



FCC RADIO TEST REPORT

FCC ID : A4RGD2WG
Equipment : Wireless Device
Model Name : GD2WG
Applicant : Google LLC
1600 Amphitheatre Parkway, Mountain View,
California, 94043 USA
Standard : FCC 47 CFR Part 2, and 90(S)

The product was received on Mar. 07, 2023 and testing was performed from Mar. 08, 2023 to Jul. 05, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3
Summary of Test Result.....4
1 General Description5
1.1 Feature of Equipment Under Test.....5
1.2 Product Specification of Equipment Under Test5
1.3 Modification of EUT5
1.4 Testing Site.....6
1.5 Applied Standards6
2 Test Configuration of Equipment Under Test7
2.1 Test Mode.....7
2.2 Connection Diagram of Test System8
2.3 Support Unit used in test configuration and system.....8
2.4 Measurement Results Explanation Example8
2.5 Frequency List of Low/Middle/High Channels.....9
3 Conducted Test Items.....10
3.1 Measuring Instruments.....10
3.2 Conducted Output Power Measurement and ERP Measurement11
3.3 Peak-to-Average Ratio12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....13
3.5 Emissions Mask Measurement14
3.6 Emissions Mask – Out Of Band Emissions Measurement.....15
3.7 Frequency Stability Measurement.....16
3.8 Field Strength of Spurious Radiation Measurement17
4 List of Measuring Equipment.....20
5 Measurement Uncertainty21
Appendix A. Test Results of Conducted Test
Appendix B. Test Results of Radiated Test
Appendix C. Test Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FG330714C	01	Initial issue of report	Jun. 26, 2023
FG330714C	02	Revise Section 1.2, Section 2.1, Section 2.3, List of Measuring Equipment and Appendix A This report is an updated version, replacing the report issued on Jun. 26, 2023.	Jul. 10, 2023
FG330714C	03	Revise Section 2.1 This report is an updated version, replacing the report issued on Jul. 10, 2023.	Jul. 14, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	-
3.5	§2.1051 §90.691	Emission masks – In-band emissions	Pass	-
3.6	§2.1051 §90.691	Emission masks – Out of band emissions	Pass	-
3.7	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Pass	-
3.8	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	26.77 dB under the limit at 2458.000 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Michelle Chen



1 General Description

1.1 Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	GD2WG
FCC ID	A4RGD2WG
EUT supports Radios application	WCDMA/HSPA/LTE WLAN 11b/g/n HT20 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
232640500000004	Conducted Measurement ERP
32251RUJWN06C7	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	814.7 ~ 823.3 MHz
Rx Frequency	859.7 ~ 868.3 MHz
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Maximum Output Power to Antenna	22.73 dBm
Antenna Type / Gain	Monopole Antenna with gain -10.7 dBi
Type of Modulation	QPSK / 16QAM

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Cotty Hsu
Temperature (°C)	22.3~22.9
Relative Humidity (%)	53~55

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH12-HY (TAF Code: 3786)
Test Engineer	Jesse Fan, Tim Lee and Wilson Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 90
- ♦ ANSI / TIA-603-E
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Y plane with Adapter as worst plane.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	26				v	v	-	v	v			v		v	
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v			v	v	v	
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v		v			v	v	v
Frequency Stability	26	-	-		v	v	-	v				v	v	v	
E.R.P.	26	v	v	v	v	v	-	v	v	Max. Power					
Radiated Spurious Emission	26	Worst Case										v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for Part 22 rule is 824MHz-849MHz, for Part 90 rule is 814MHz-824MHz. Total ERP of 15MHz bandwidth across Part 22H and Part 90S complies the ERP limit line of Part 22 rule. Therefore, ERP of the partial frequency spectrum which falls within Part 22 also complies. For Emission masks – In-band emission test, the single RB with the smallest BW will be the closest to the band edge limit, only the smallest bandwidth of single RB is reported. Simultaneous transmission between WWAN and WIFI or Bluetooth have been investigated and no significant emission was observed. 														

2.2 Connection Diagram of Test System

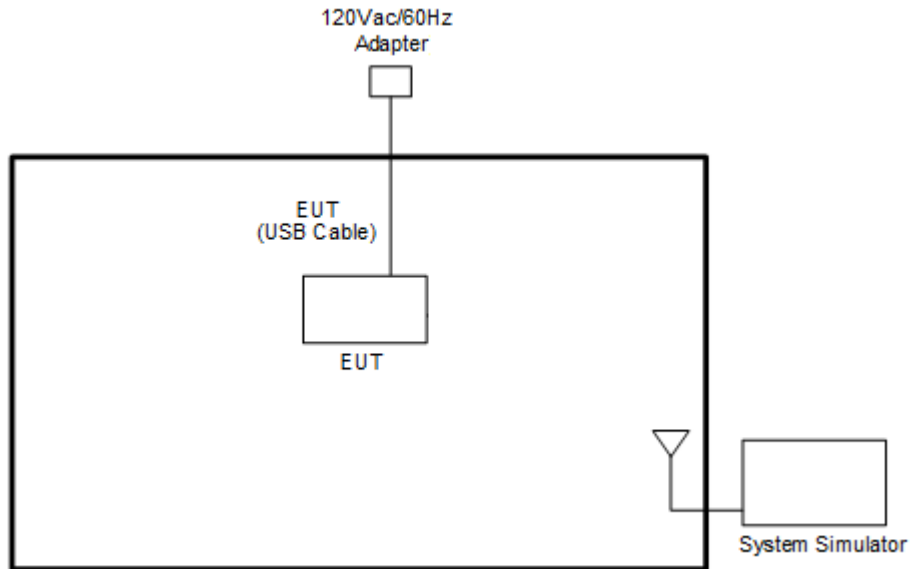

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Adapter	Google	G1000	N/A	N/A	N/A
3.	USB Cable	Google	GQ6H2	N/A	Unshielded, 0.98 m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26765	-	-
	Frequency	821.5	-	-
10	Channel	-	26740	-
	Frequency	-	819	-
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	-	cross-rule channels	-
15	Channel	-	26790	-
	Frequency	-	824	-
10	Channel	-	26790	-
	Frequency	-	824	-
5	Channel	-	26790	-
	Frequency	-	824	-
3	Channel	-	26790	-
	Frequency	-	824	-
1.4	Channel	-	26790	-
	Frequency	-	824	-


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

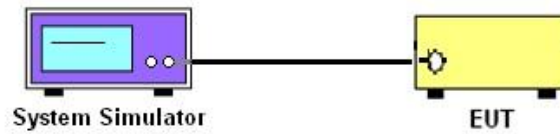

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, Emissions Mask – Out Of Band Emissions, and Conducted Spurious Emission

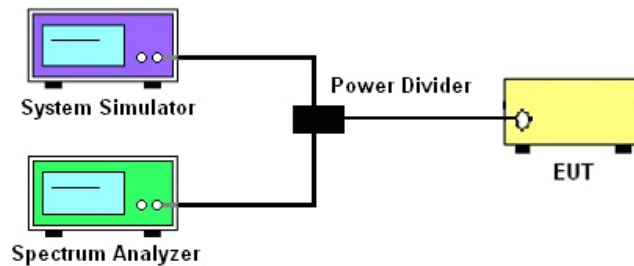

3.1.4 Frequency Stability

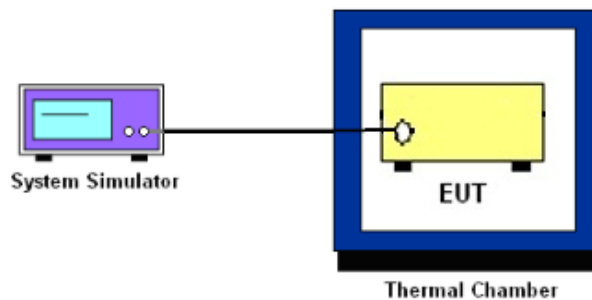

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power Measurement and ERP Measurement

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The output power of mobile transmitters must not exceed 100 Watts for LTE Band 26.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Reporting only

3.3.2 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



3.5 Emissions Mask Measurement

3.5.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.5.2 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge , RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.



3.6 Emissions Mask – Out Of Band Emissions Measurement

3.6.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



3.8 Field Strength of Spurious Radiation Measurement

3.8.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10\log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
12. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8.3 Test Setup


For radiated test below 30MHz

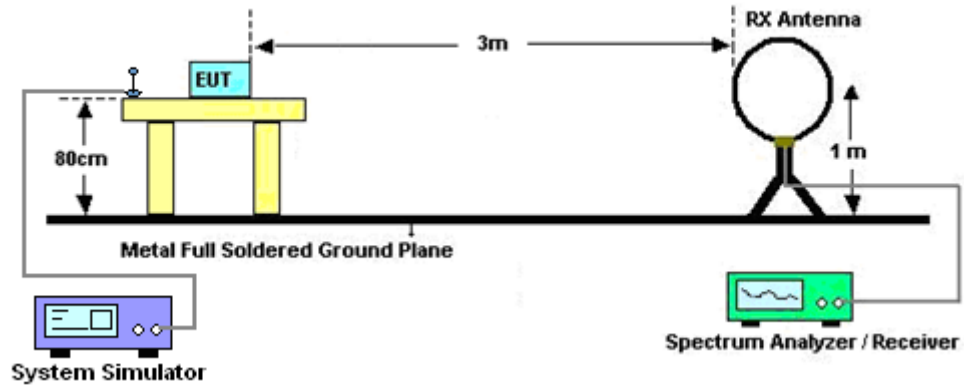

For radiated test from 30MHz to 1GHz

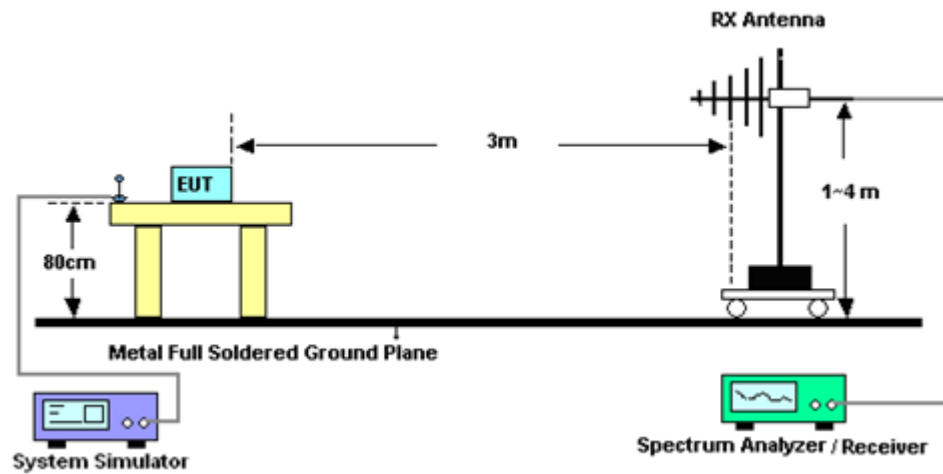

For radiated test above 1GHz

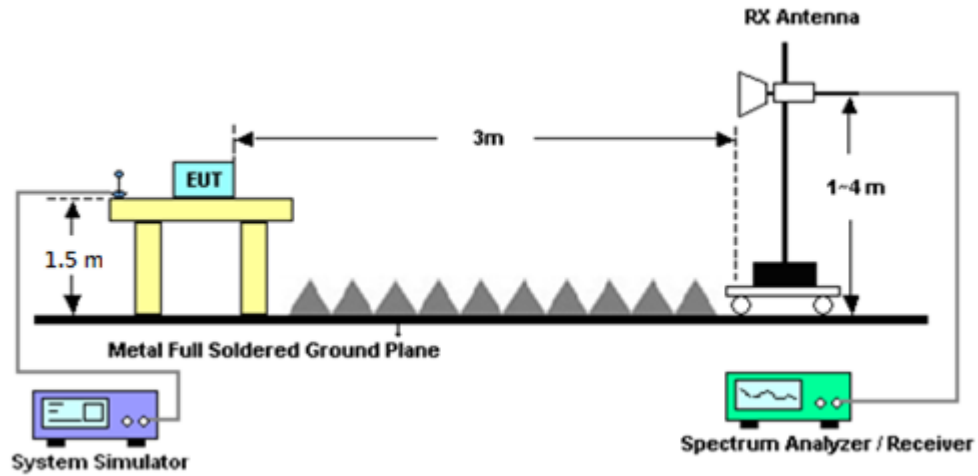

3.8.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Apr. 08, 2023~ Apr. 11, 2023	Sep. 19, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Nov. 10, 2022	Apr. 08, 2023~ Apr. 11, 2023	Nov. 09, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Aug. 09, 2022	Apr. 08, 2023~ Apr. 11, 2023	Aug. 08, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2022	Apr. 08, 2023~ Apr. 11, 2023	Nov. 23, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Apr. 08, 2023~ Apr. 11, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	Apr. 08, 2023~ Apr. 11, 2023	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz-18GHz	Dec. 21, 2022	Apr. 08, 2023~ Apr. 11, 2023	Dec. 20, 2023	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	Apr. 08, 2023~ Apr. 11, 2023	Dec. 06, 2023	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 10, 2023	Apr. 08, 2023~ Apr. 11, 2023	Jan. 09, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60SS	SN1	1.2GHz High Pass Filter	Mar. 14, 2023	Apr. 08, 2023~ Apr. 11, 2023	Mar. 13, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60ST	SN2	3GHz High Pass Filter	Mar. 14, 2023	Apr. 08, 2023~ Apr. 11, 2023	Mar. 13, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Apr. 08, 2023~ Apr. 11, 2023	Mar. 06, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 20, 2022	Apr. 08, 2023~ Apr. 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 20, 2022	Apr. 08, 2023~ Apr. 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 20, 2022	Apr. 08, 2023~ Apr. 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Oct. 03, 2022	Apr. 08, 2023~ Apr. 11, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 08, 2023~ Apr. 11, 2023	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Apr. 08, 2023~ Apr. 11, 2023	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 08, 2023~ Apr. 11, 2023	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Apr. 08, 2023~ Apr. 11, 2023	N/A	Radiation (03CH12-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Mar. 08, 2023~ Jul. 05, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 07, 2022	Mar. 08, 2023~ Jul. 05, 2023	Sep. 06, 2023	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V ; 0A~6A	Dec. 29, 2022	Mar. 08, 2023~ Jul. 05, 2023	Dec. 28, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Mar. 08, 2023~ Jul. 05, 2023	Jan. 05, 2024	Conducted (TH03-HY)
RF Cable	E-Instument	SFL405_1.5M	#1	0.5~18GHz	Jan. 06, 2023	Mar. 08, 2023~ Jul. 05, 2023	Jan. 05, 2024	Conducted (TH03-HY)
RF Cable	E-Instument	SFL405_1.5M	#7	0.5~18GHz	Jan. 06, 2023	Mar. 08, 2023~ Jul. 05, 2023	Jan. 05, 2024	Conducted (TH03-HY)
Attenuator	Woken	10dB 18GHz_5W	#1	0.5~18GHz	Jan. 06, 2023	Mar. 08, 2023~ Jul. 05, 2023	Jan. 05, 2024	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	Sep. 27, 2022	Mar. 08, 2023~ Jul. 05, 2023	Sep. 26, 2023	Conducted (TH03-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.25 dB
---	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power)

LTE Band 26 Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
15	1	0	QPSK	22.67	-	-	9.82	0.0096
15	1	25		22.55	-	-		
15	1	49		22.51	-	-		
15	25	0		21.56	-	-		
15	25	12		21.67	-	-		
15	25	25		21.64	-	-		
15	50	0		21.99	-	-		
15	1	0	16-QAM	22.11	-	-	9.26	0.0084
15	1	13		21.76	-	-		
15	1	26		21.89	-	-		
15	12	0		21.62	-	-		
15	12	7		21.53	-	-		
15	12	15		21.70	-	-		
15	27	0		20.62	-	-		
Limit	ERP < 100W			Result			Pass	

LTE Band 26 Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	-	22.51	-	9.72	0.0094
10	1	25		-	22.54	-		
10	1	49		-	22.57	-		
10	25	0		-	21.55	-		
10	25	12		-	21.54	-		
10	25	25		-	21.52	-		
10	50	0		-	21.66	-		
10	1	0	16-QAM	-	21.74	-	8.89	0.0077
10	1	13		-	21.57	-		
10	1	26		-	21.59	-		
10	12	0		-	21.29	-		
10	12	7		-	21.25	-		
10	12	15		-	21.26	-		
10	27	0		-	20.57	-		
Limit	ERP < 100W			Result			Pass	



LTE Band 26 Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	22.60	22.54	22.58	9.75	0.0094
5	1	12		22.51	22.58	22.55		
5	1	24		22.51	22.54	22.52		
5	12	0		21.53	21.55	21.54		
5	12	7		21.62	21.57	21.51		
5	12	13		21.55	21.59	21.59		
5	25	0		21.96	21.61	21.52		
5	1	0	16-QAM	21.79	21.64	21.69	9.04	0.0080
5	1	12		21.73	21.56	21.50		
5	1	24		21.89	21.53	21.56		
5	12	0		21.61	21.32	21.28		
5	12	7		21.46	21.24	21.26		
5	12	13		21.65	21.26	21.08		
5	25	0		20.52	20.59	20.57		
Limit	ERP < 100W			Result			Pass	

LTE Band 26 Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0	QPSK	22.58	22.52	22.54	9.73	0.0094
3	1	8		22.51	22.51	22.57		
3	1	14		22.51	22.55	22.58		
3	8	0		21.59	21.51	21.54		
3	8	4		21.64	21.54	21.57		
3	8	7		21.54	21.59	21.51		
3	15	0		21.95	21.66	21.57		
3	1	0	16-QAM	22.10	21.74	21.66	9.25	0.0084
3	1	8		21.71	21.50	21.53		
3	1	14		21.82	21.55	21.54		
3	8	0		21.54	21.35	21.33		
3	8	4		21.45	21.28	21.28		
3	8	7		21.67	21.31	21.13		
3	15	0		20.54	20.54	20.50		
Limit	ERP < 100W			Result			Pass	



LTE Band 26 Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0	QPSK	22.66	22.58	22.53	9.81	0.0096
1.4	1	3		22.55	22.52	22.59		
1.4	1	5		22.59	22.54	22.56		
1.4	3	0		22.61	22.50	22.53		
1.4	3	1		22.54	22.50	22.58		
1.4	3	3		22.50	22.55	22.56		
1.4	6	0		21.59	21.55	21.51		
1.4	1	0	16-QAM	22.10	21.72	21.62	9.25	0.0084
1.4	1	3		21.76	21.58	21.53		
1.4	1	5		21.82	21.57	21.58		
1.4	3	0		21.73	21.73	21.69		
1.4	3	1		21.71	21.57	21.56		
1.4	3	3		21.86	21.58	21.56		
1.4	6	0		21.54	21.35	21.27		
Limit	ERP < 100W			Result			Pass	



LTE Band 26 Straddle Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
15	1	0	QPSK	-	22.03	-	9.18	0.0083
15	1	25		-	22.02	-		
15	1	49		-	21.81	-		
15	25	0		-	21.43	-		
15	25	12		-	21.24	-		
15	25	25		-	21.04	-		
15	50	0		-	21.28	-		
15	1	0	16-QAM	-	21.73	-	8.88	0.0077
15	1	13		-	20.97	-		
15	1	26		-	20.75	-		
15	12	0		-	21.16	-		
15	12	7		-	21.03	-		
15	12	15		-	20.82	-		
15	27	0		-	20.05	-		
Limit	Reporting only			Result			N/A	

LTE Band 26 Straddle Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	-	22.73	-	9.88	0.0097
10	1	25		-	22.38	-		
10	1	49		-	22.64	-		
10	25	0		-	21.56	-		
10	25	12		-	21.58	-		
10	25	25		-	21.56	-		
10	50	0		-	21.65	-		
10	1	0	16-QAM	-	22.02	-	9.17	0.0083
10	1	13		-	21.83	-		
10	1	26		-	21.52	-		
10	12	0		-	21.56	-		
10	12	7		-	21.47	-		
10	12	15		-	21.54	-		
10	27	0		-	20.56	-		
Limit	Reporting only			Result			N/A	



LTE Band 26 Straddle Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	-	22.52	-	9.67	0.0093
5	1	12		-	22.45	-		
5	1	24		-	22.41	-		
5	12	0		-	21.42	-		
5	12	7		-	21.39	-		
5	12	13		-	21.56	-		
5	25	0		-	21.55	-		
5	1	0	16-QAM	-	22.00	-	9.15	0.0082
5	1	12		-	21.87	-		
5	1	24		-	21.62	-		
5	12	0		-	20.54	-		
5	12	7		-	20.51	-		
5	12	13		-	20.47	-		
5	25	0		-	20.55	-		
Limit	Reporting only			Result			N/A	

LTE Band 26 Straddle Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0	QPSK	-	22.39	-	9.66	0.0092
3	1	8		-	22.51	-		
3	1	14		-	22.49	-		
3	8	0		-	21.41	-		
3	8	4		-	21.47	-		
3	8	7		-	21.47	-		
3	15	0		-	21.50	-		
3	1	0	16-QAM	-	21.45	-	8.91	0.0078
3	1	8		-	21.76	-		
3	1	14		-	21.74	-		
3	8	0		-	20.57	-		
3	8	4		-	20.54	-		
3	8	7		-	20.55	-		
3	15	0		-	20.62	-		
Limit	Reporting only			Result			N/A	




LTE Band 26 Straddle Maximum Average Power [dBm] (GT - LC = -10.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0	QPSK	-	22.50	-	9.65	0.0092
1.4	1	3		-	22.37	-		
1.4	1	5		-	22.30	-		
1.4	3	0		-	22.41	-		
1.4	3	1		-	22.43	-		
1.4	3	3		-	22.36	-		
1.4	6	0		-	21.56	-		
1.4	1	0	16-QAM	-	21.91	-	9.06	0.0081
1.4	1	3		-	21.69	-		
1.4	1	5		-	21.22	-		
1.4	3	0		-	21.52	-		
1.4	3	1		-	21.62	-		
1.4	3	3		-	21.37	-		
1.4	6	0		-	20.51	-		
Limit	Reporting only			Result			N/A	



LTE Band 26

Peak-to-Average Ratio

Mode	LTE Band 26 / 10MHz		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	27RB0	Result
Middle CH	5.30	6.35	PASS

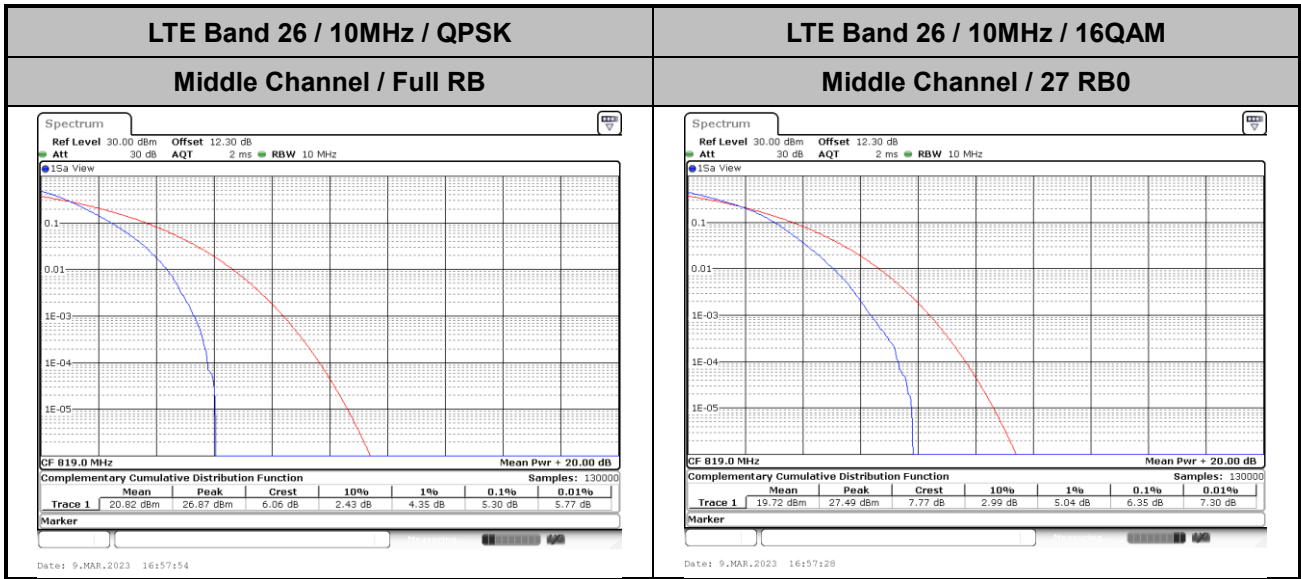




26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
BW										
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Low CH	-	-	-	-	-	-	-	-	14.51	5.57
Middle CH	1.26	1.27	3.00	2.96	5.00	4.90	9.65	5.44	-	-




LTE Band 26

Middle Channel / 1.4MHz / QPSK

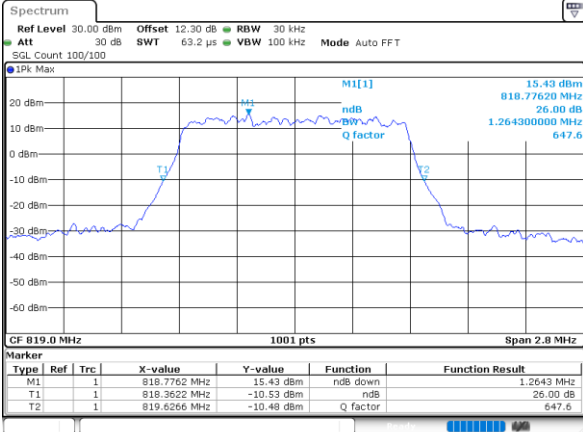


Date: 9,MAR,2023 16:28:01

Middle Channel / 1.4MHz / 16QAM

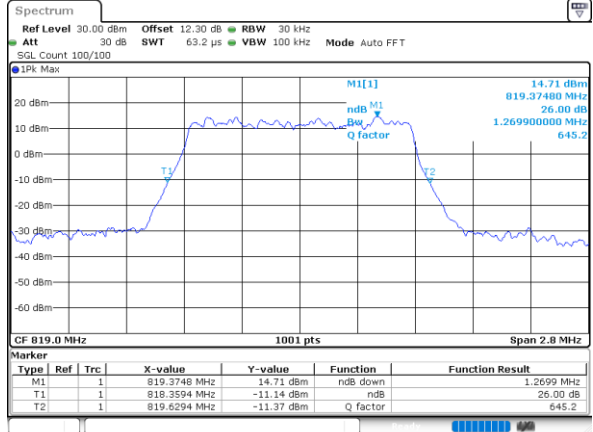


Date: 9,MAR,2023 16:28:25

Middle Channel / 3MHz / QPSK

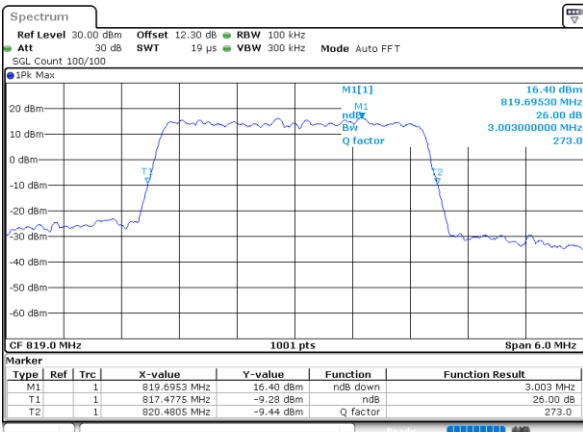


Date: 9,MAR,2023 16:41:12

Middle Channel / 3MHz / 16QAM

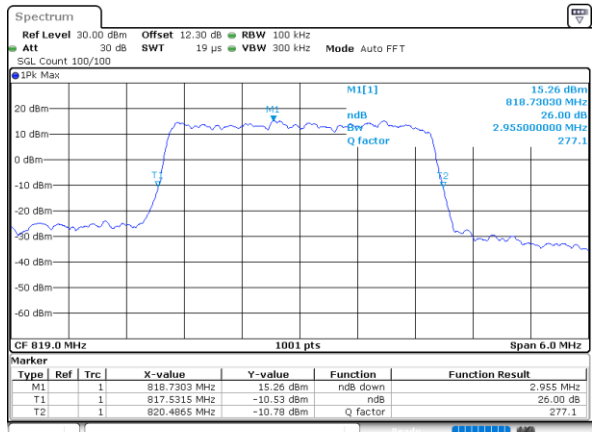


Date: 9,MAR,2023 16:41:37

Middle Channel / 5MHz / QPSK

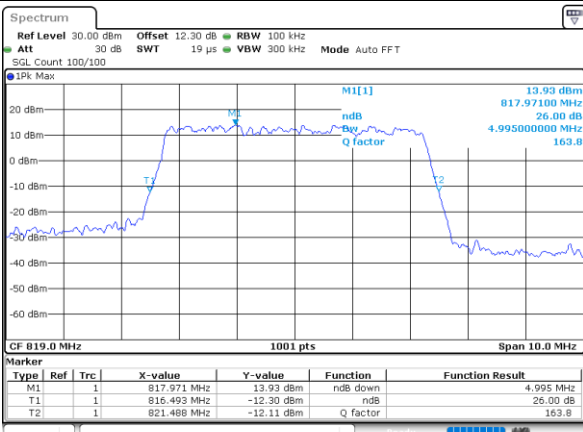

Date: 9,MAR,2023 16:47:42

Middle Channel / 5MHz / 16QAM

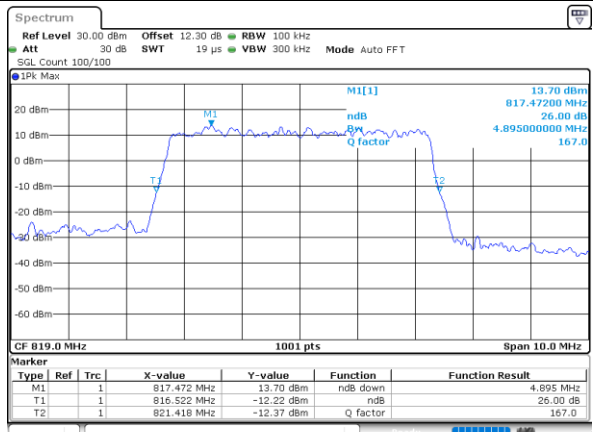


Date: 9,MAR,2023 16:48:07




LTE Band 26

Middle Channel / 10MHz / QPSK

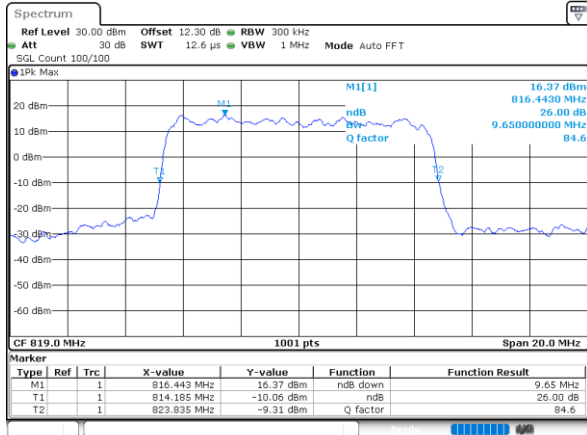


Date: 9, MAR, 2023 16:56:37

Middle Channel / 10MHz / 16QAM

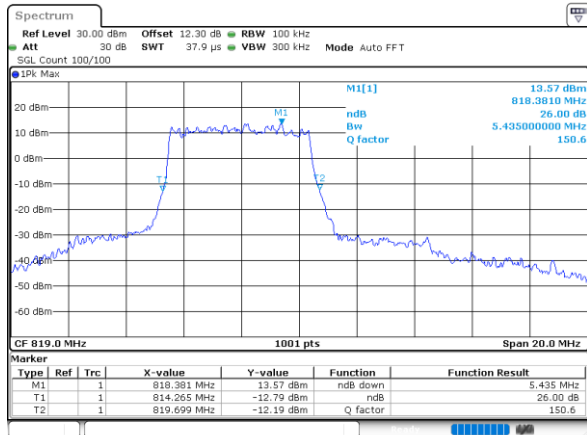


Date: 4, JUL, 2023 16:53:52

Low Channel / 15MHz / QPSK

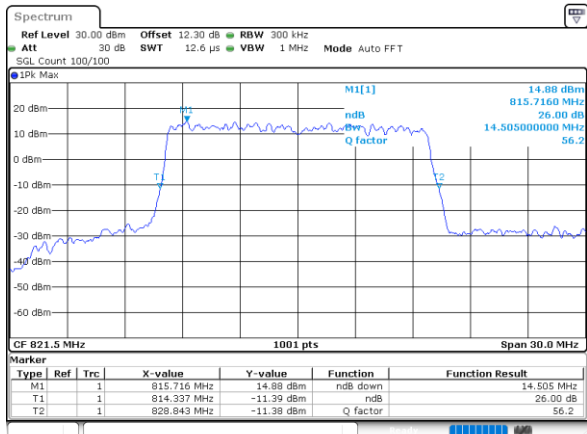

Date: 9, MAR, 2023 17:01:27

Low Channel / 15MHz / 16QAM

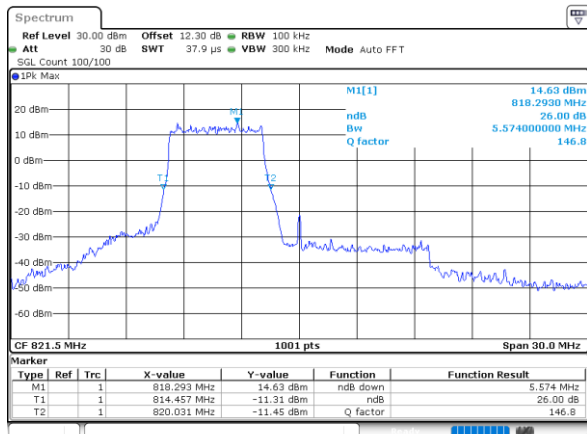

Date: 4, JUL, 2023 16:54:42




Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Low CH	-	-	-	-	-	-	-	-	13.46	4.83
Middle CH	1.08	1.09	2.72	2.72	4.49	4.48	9.07	4.88	-	-




LTE Band 26


Middle Channel / 1.4MHz / QPSK

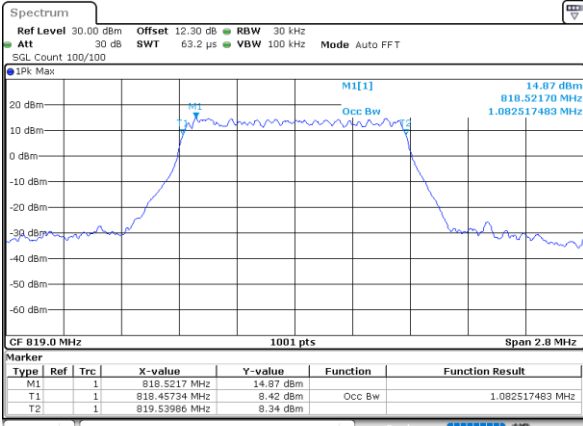


Middle Channel / 1.4MHz / 16QAM

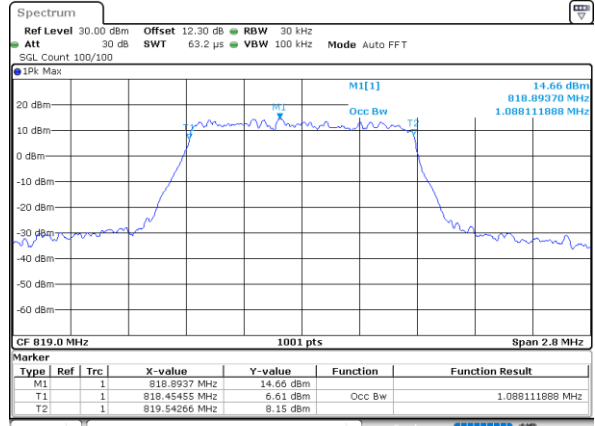


Middle Channel / 3MHz / QPSK

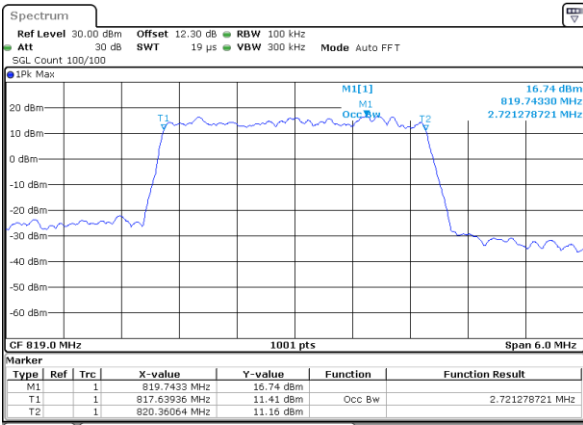


Middle Channel / 3MHz / 16QAM

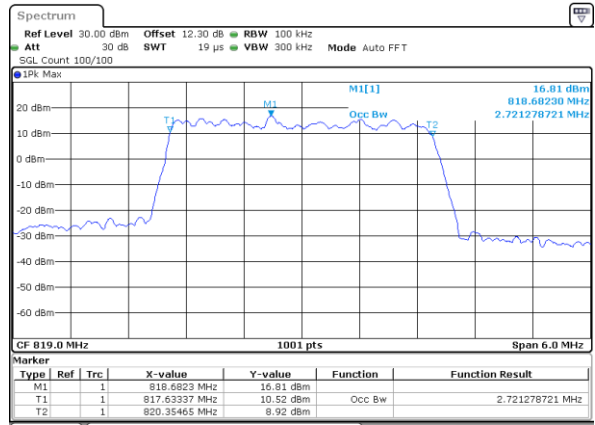

Middle Channel / 5MHz / QPSK

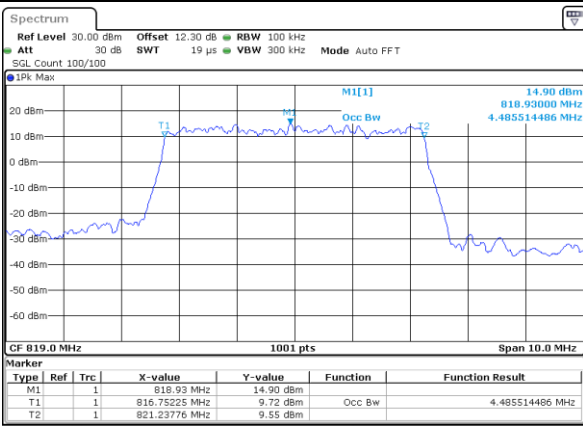


Middle Channel / 5MHz / 16QAM

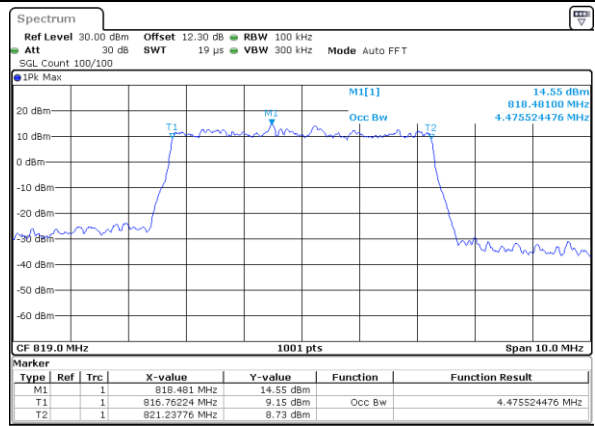




LTE Band 26

Middle Channel / 10MHz / QPSK

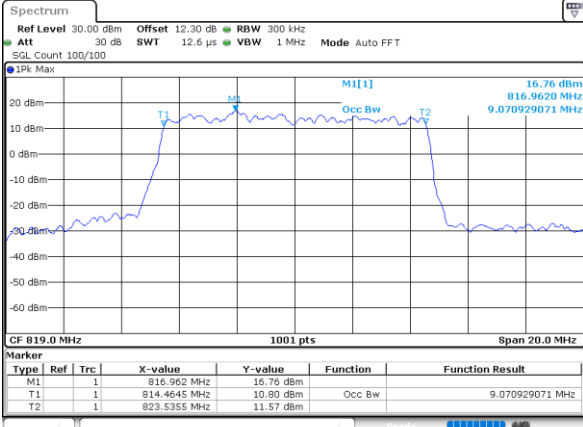


Date: 9,MAR,2023 16:55:49

Middle Channel / 10MHz / 16QAM

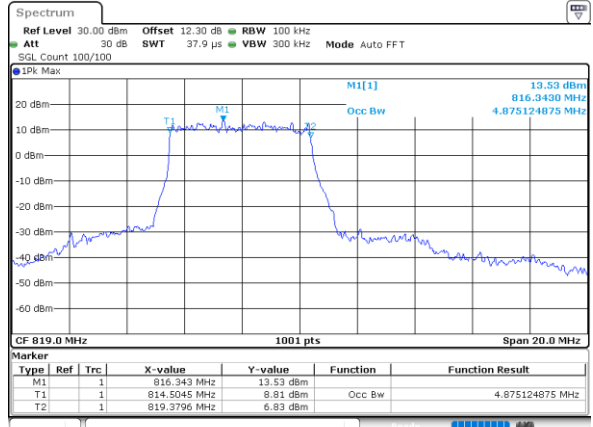


Date: 4,JUL,2023 16:53:28

Low Channel / 15MHz / QPSK

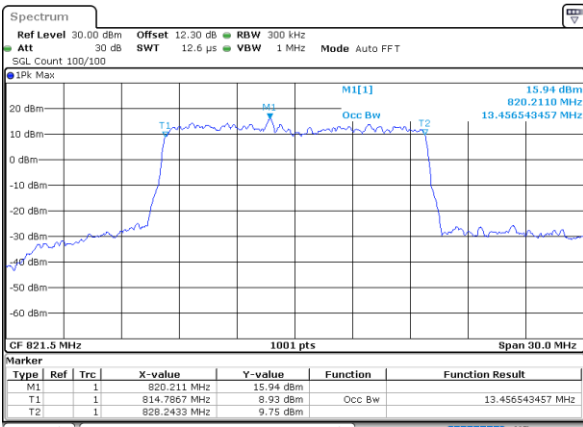

Date: 9,MAR,2023 17:01:33


Low Channel / 15MHz / 16QAM

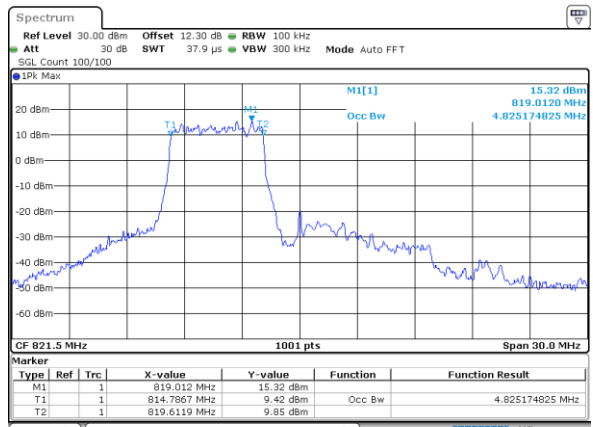

Date: 4,JUL,2023 16:54:17




Emission masks – In-band emissions

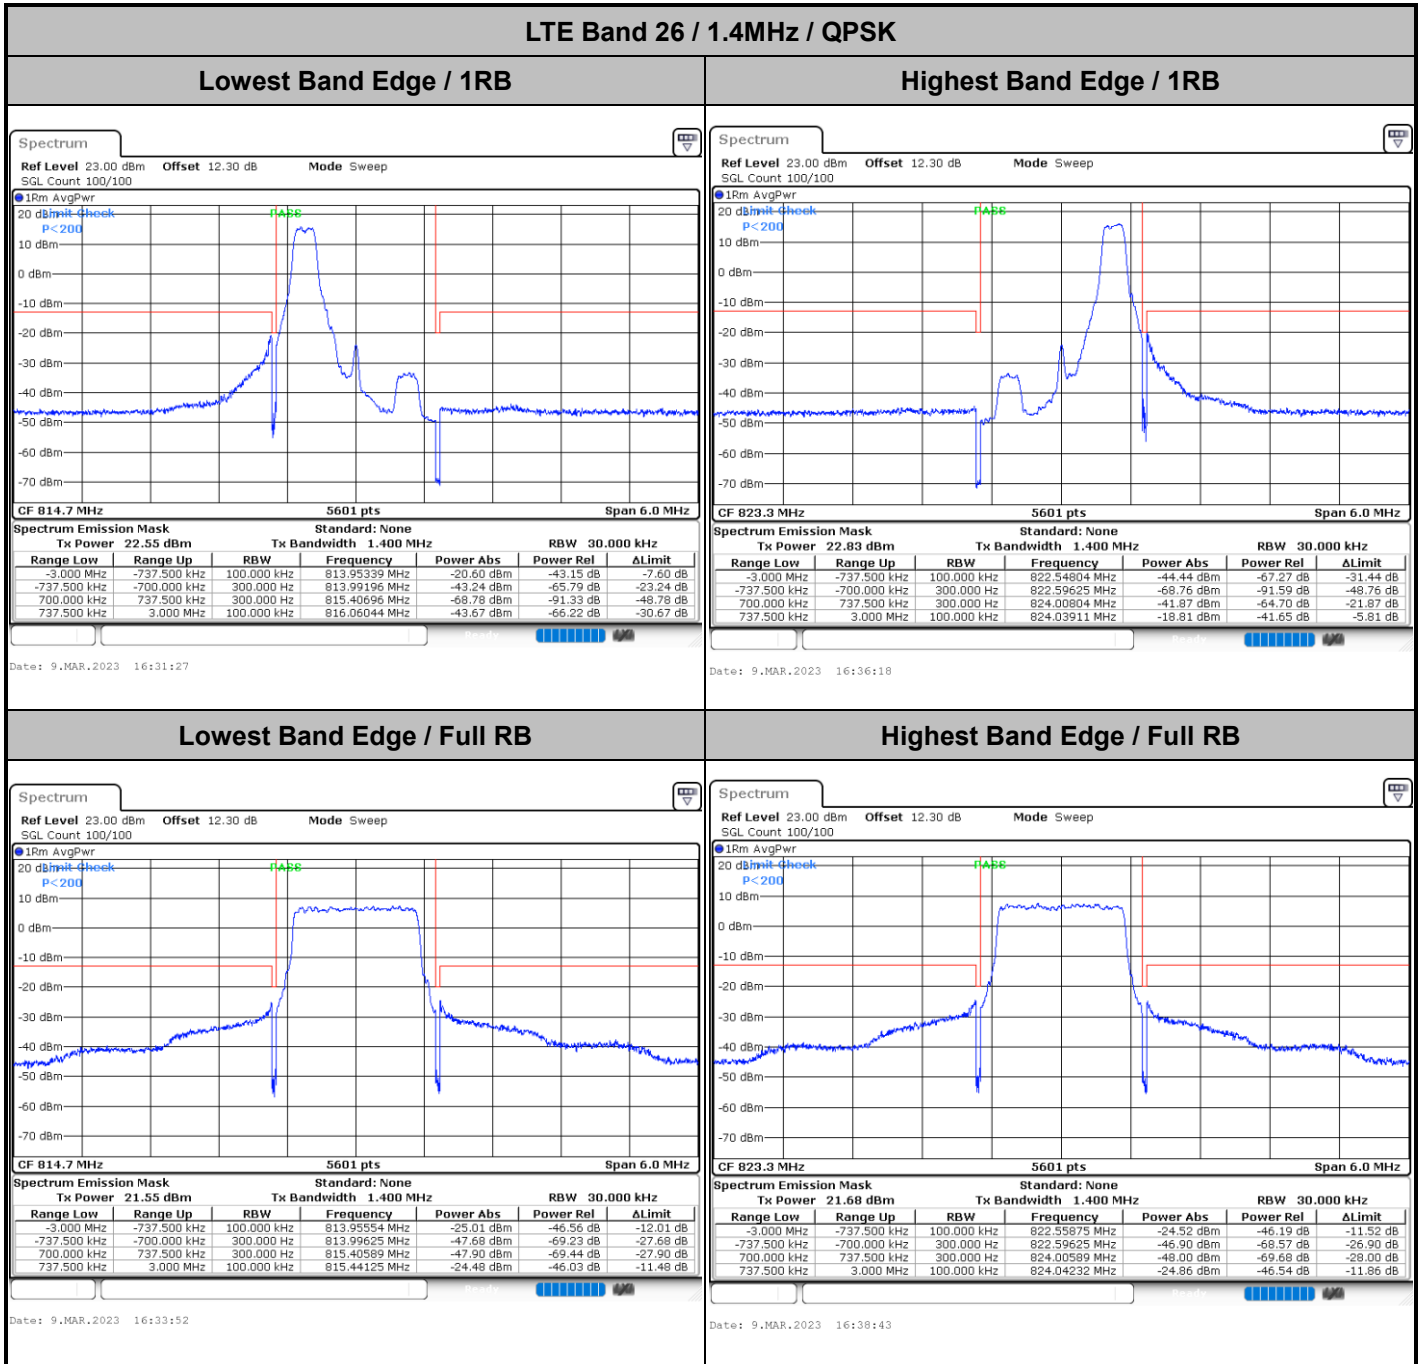




LTE Band 26 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

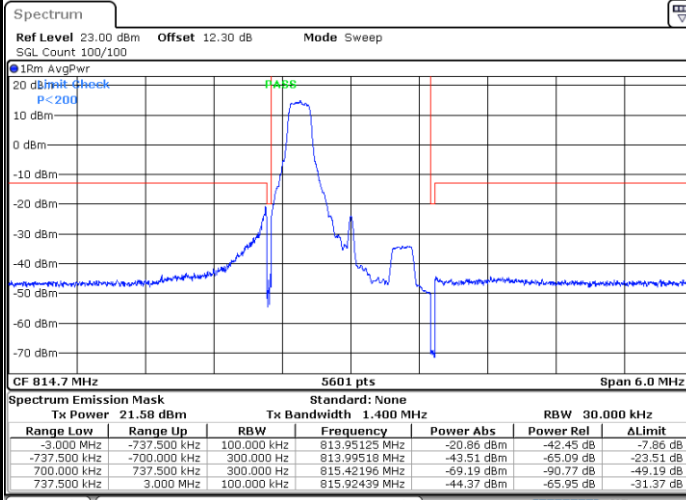


Date: 9.MAR.2023 16:32:39

Highest Band Edge / 1 RB

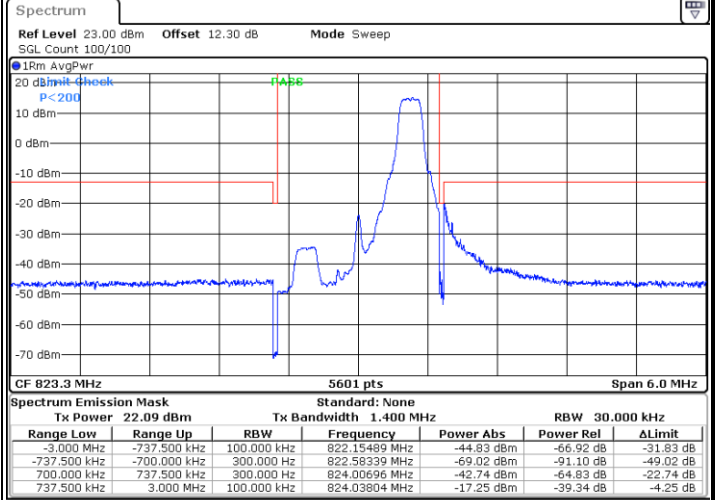


Date: 9.MAR.2023 16:37:30

Lowest Band Edge / Full RB

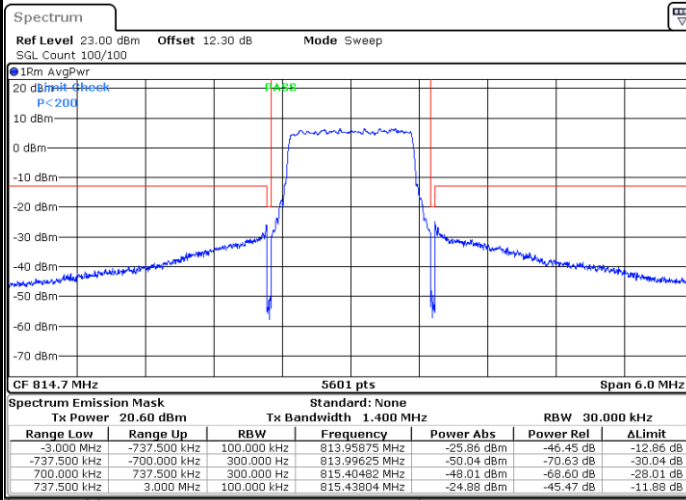

Date: 9.MAR.2023 16:35:05

Highest Band Edge / Full RB

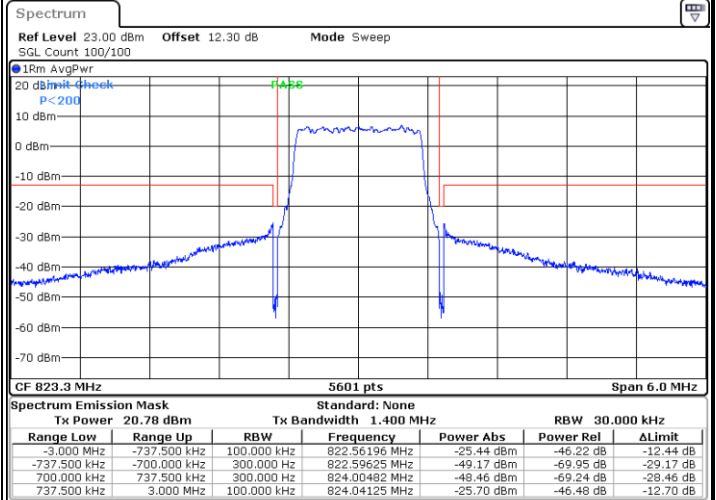


Date: 9.MAR.2023 16:39:56




LTE Band 26 / 3MHz / QPSK

Lowest Band Edge / Full RB

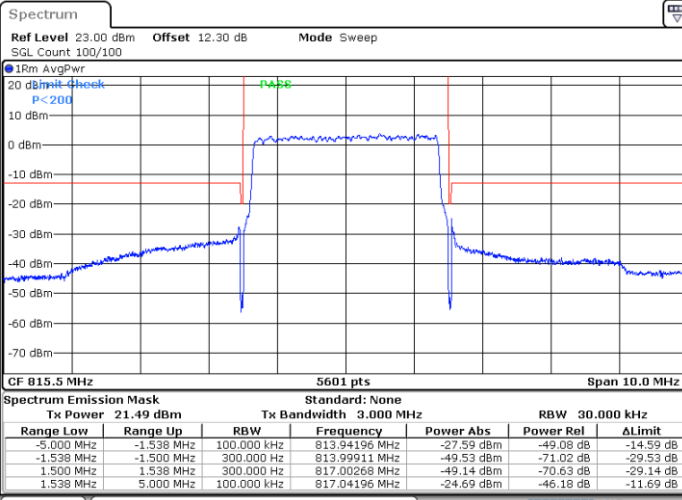

Date: 9.MAR.2023 16:42:49


Highest Band Edge / Full RB

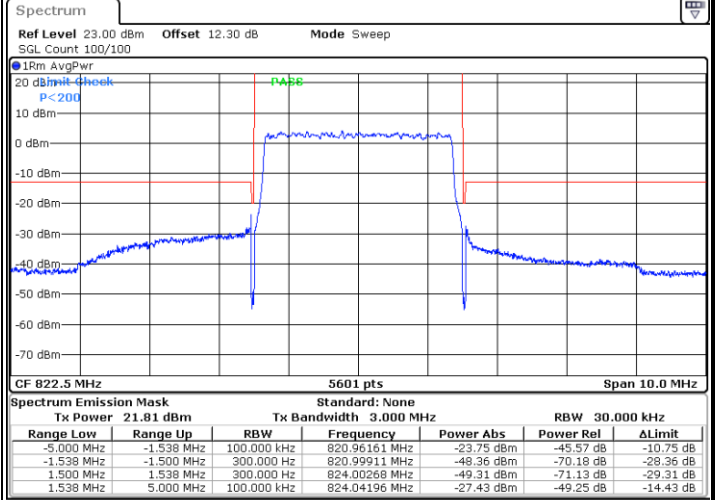

Date: 9.MAR.2023 16:45:15


LTE Band 26 / 3MHz / 16QAM

Lowest Band Edge / Full RB

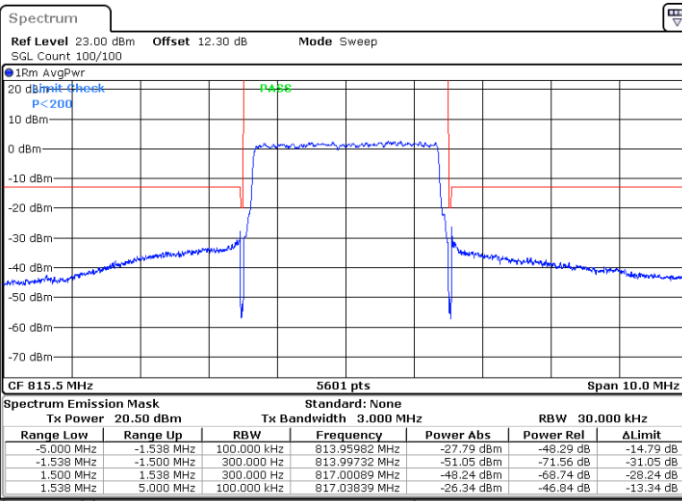

Date: 9.MAR.2023 16:44:02

Highest Band Edge / Full RB

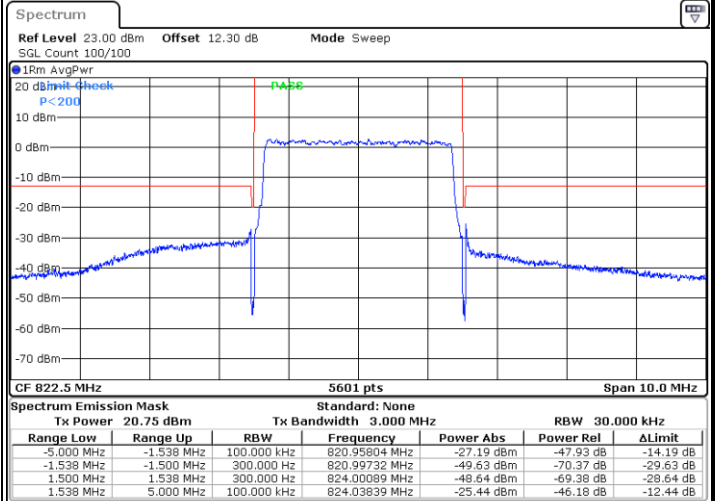


Date: 9.MAR.2023 16:46:28




LTE Band 26 / 5MHz / QPSK

Lowest Band Edge / Full RB

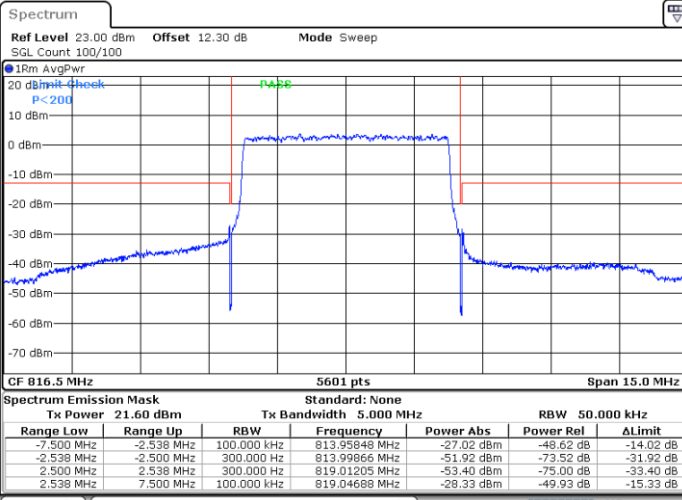

Date: 9.MAR.2023 16:49:19


Highest Band Edge / Full RB

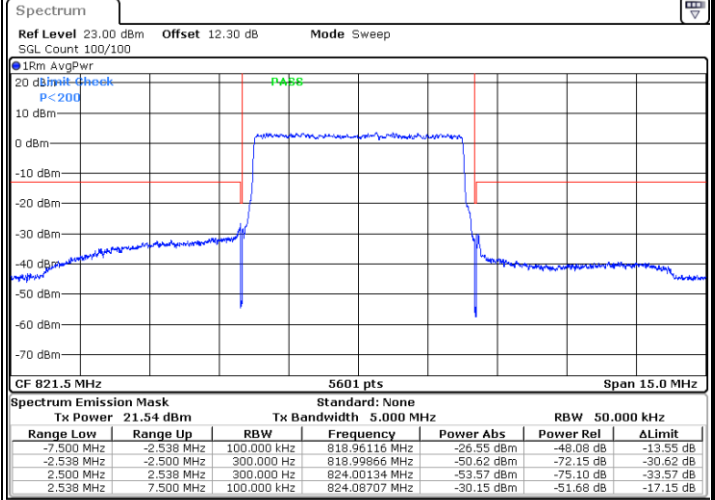

Date: 9.MAR.2023 16:51:44


LTE Band 26 / 5MHz / 16QAM

Lowest Band Edge / Full RB




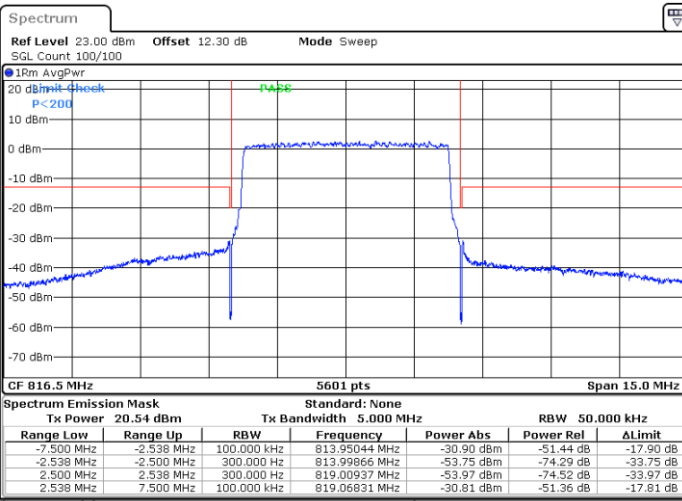


Date: 9.MAR.2023 16:50:32

Highest Band Edge / Full RB

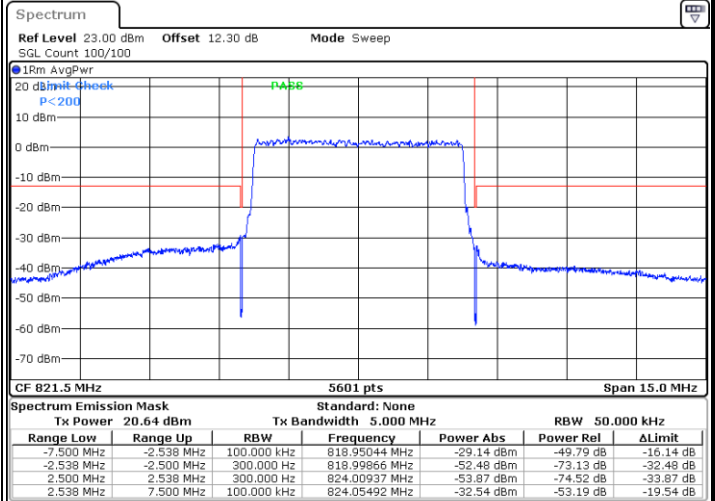

Date: 9.MAR.2023 16:52:57

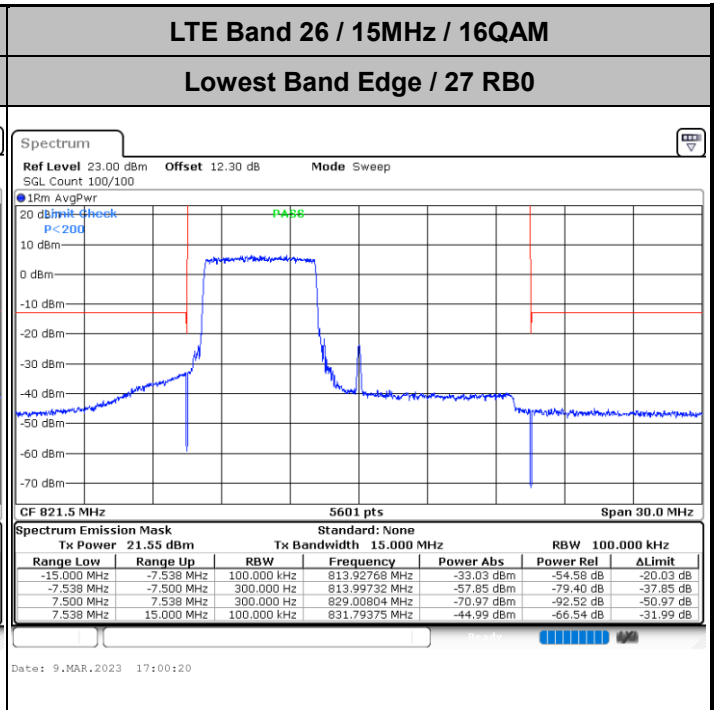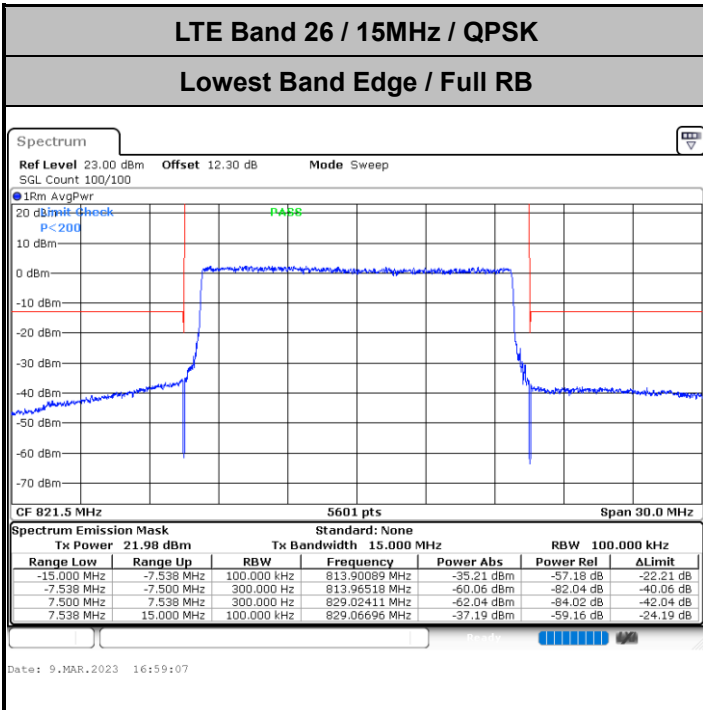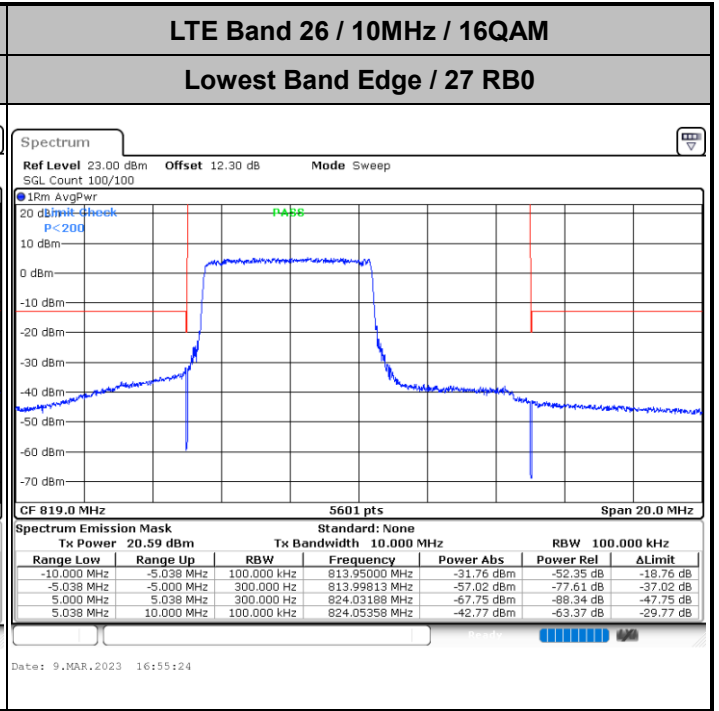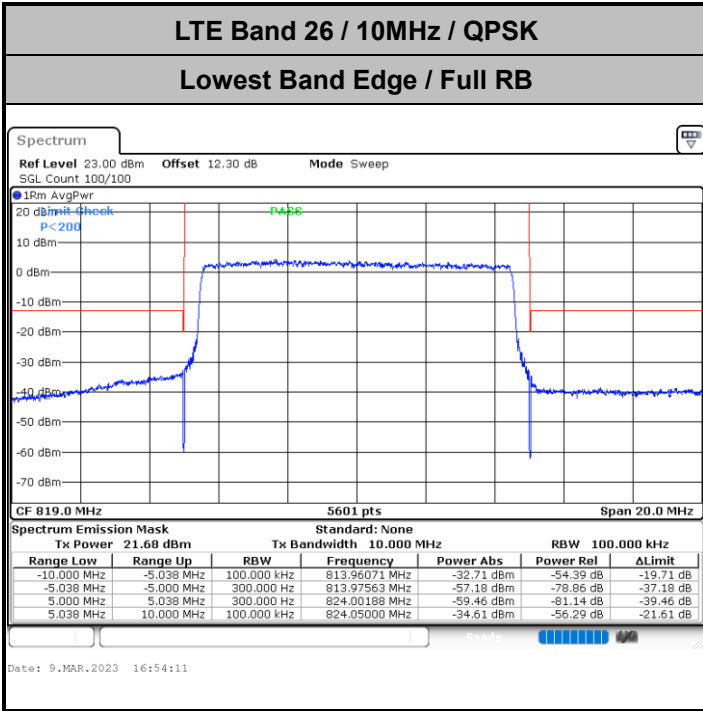




Emission masks – Out of band emissions






LTE Band 26 / 3MHz

Lowest Channel / QPSK

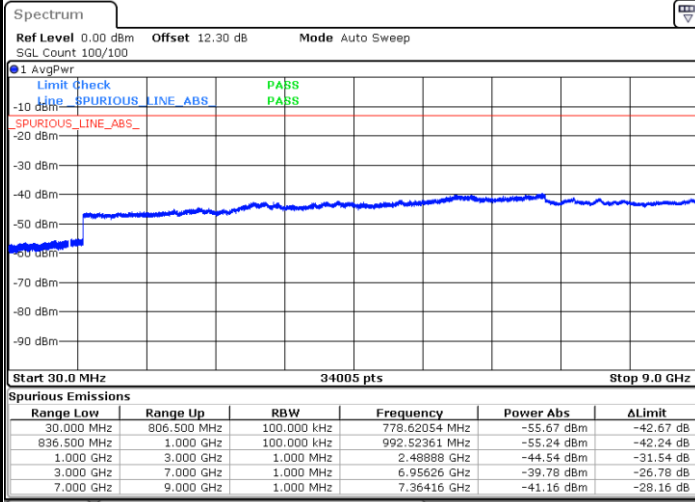


Date: 9.MAR.2023 17:02:52

Middle Channel / QPSK

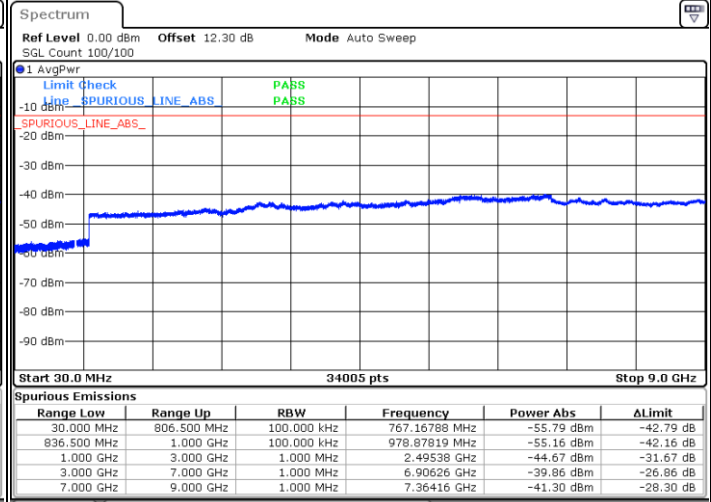

Date: 9.MAR.2023 17:03:46

Highest Channel / QPSK

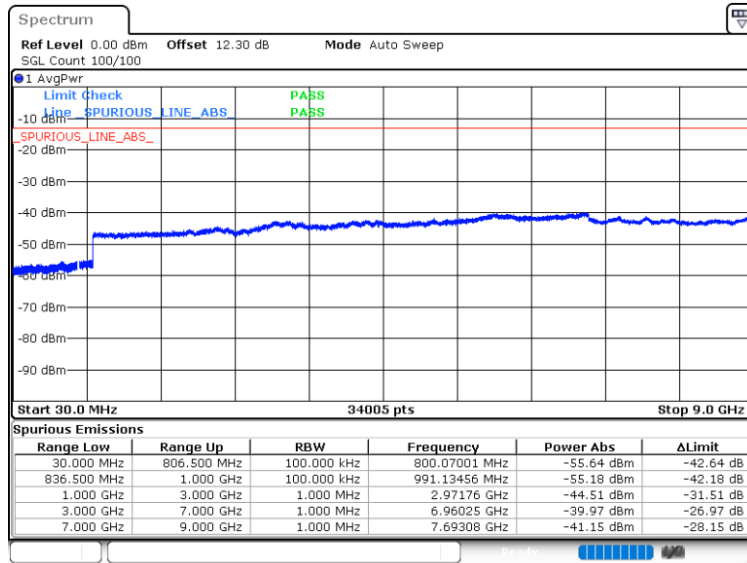


Date: 9.MAR.2023 17:04:41




LTE Band 26 / 5MHz

Lowest Channel / QPSK

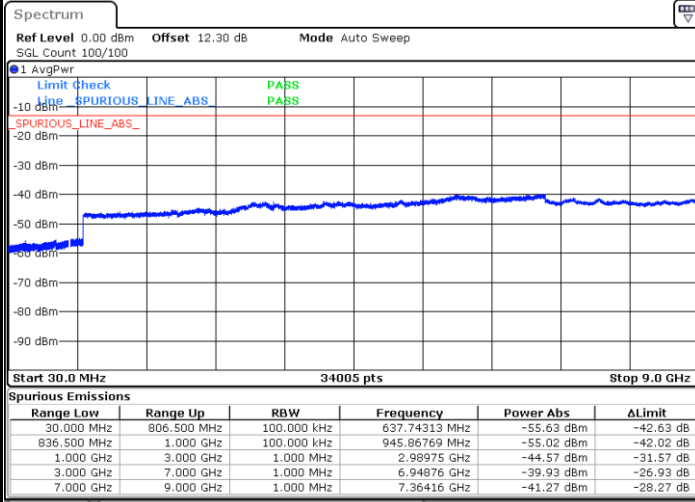


Date: 9.MAR.2023 17:05:36

Middle Channel / QPSK

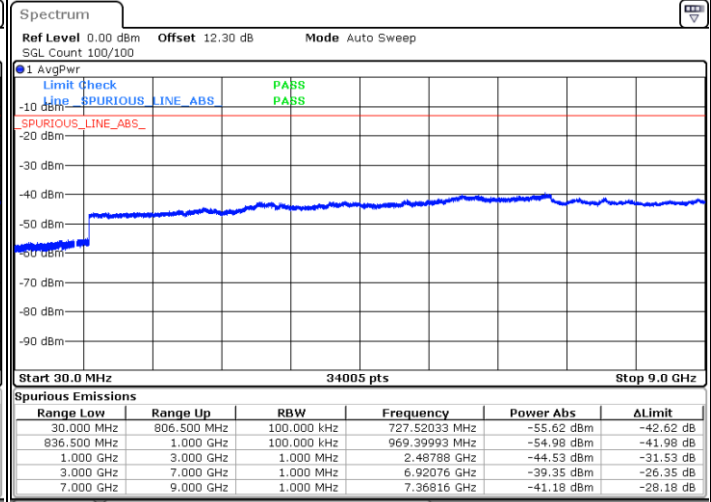

Date: 9.MAR.2023 17:06:30

Highest Channel / QPSK

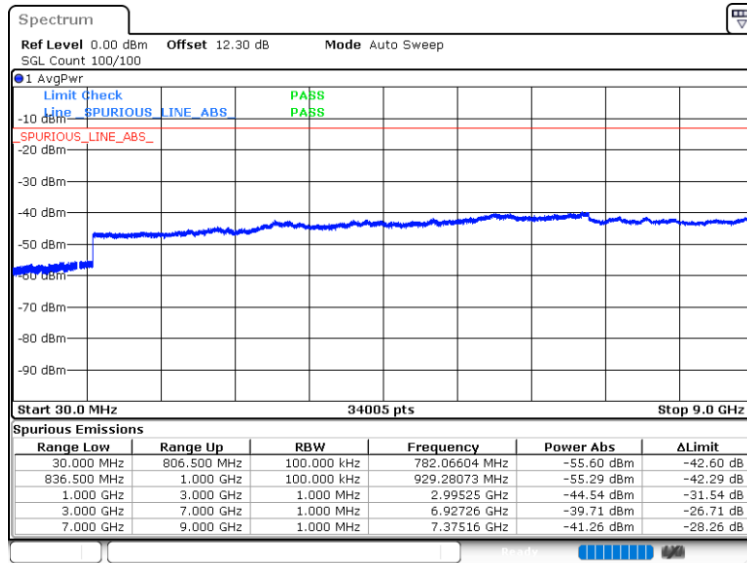


Date: 9.MAR.2023 17:07:25



LTE Band 26 / 10MHz


Middle Channel / QPSK

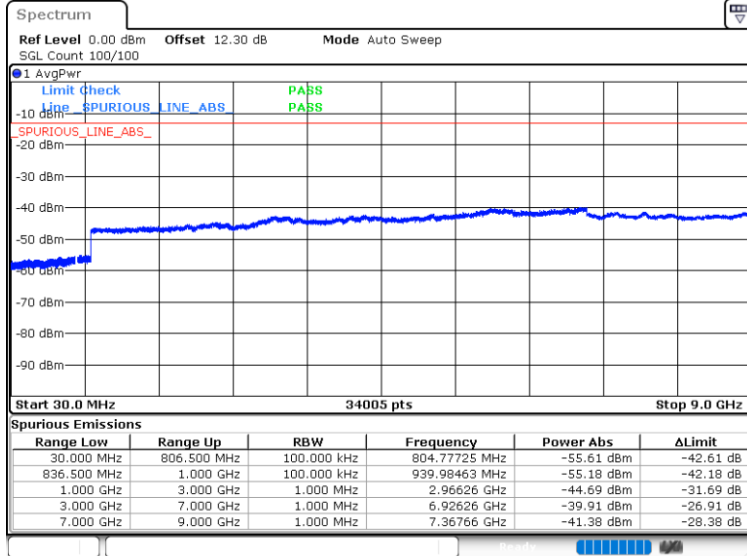

Date: 9.MAR.2023 17:08:20

LTE Band 26 / 15MHz

Lowest Channel / QPSK

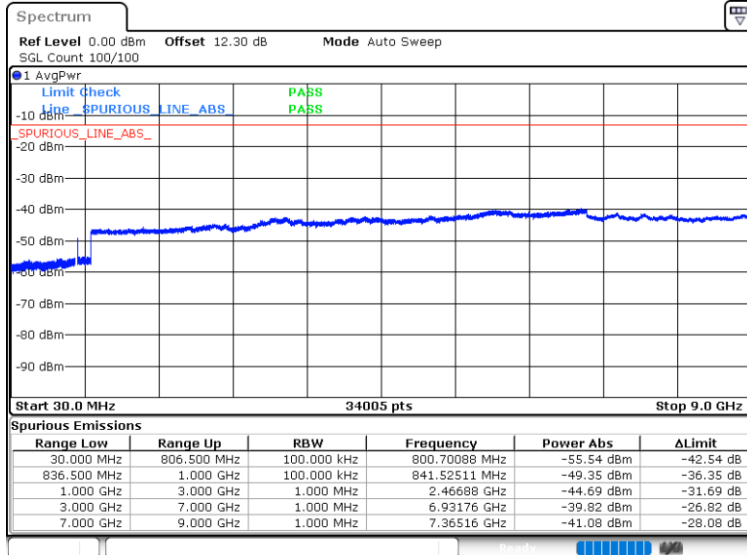

Date: 9.MAR.2023 17:09:16



Frequency Stability

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
35	Normal Voltage	0.0010	PASS
30	Normal Voltage	0.0118	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0100	
0	Normal Voltage	0.0065	
20	Maximum Voltage	0.0110	
20	Normal Voltage	0.0009	
20	Battery End Point	0.0150	

Note:

- 1. Normal Voltage = 3.87 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.4 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 26 (QPSK) / Low Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 15MHz	Note 2.
		Deviation (ppm)	Result
40	Normal Voltage	0.0138	PASS
30	Normal Voltage	0.0158	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0149	
0	Normal Voltage	0.0026	
20	Maximum Voltage	0.0063	
20	Normal Voltage	0.0170	
20	Battery End Point	0.0135	

Note:


1. Normal Voltage = 3.87 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



LTE Band 26_824MHz

Peak-to-Average Ratio

Mode	LTE Band 26 / 15MHz		
Mod.	QPSK	16QAM	Limit: 13dB
RB Size	Full RB	Full RB	Result
Middle CH	5.74	6.38	PASS

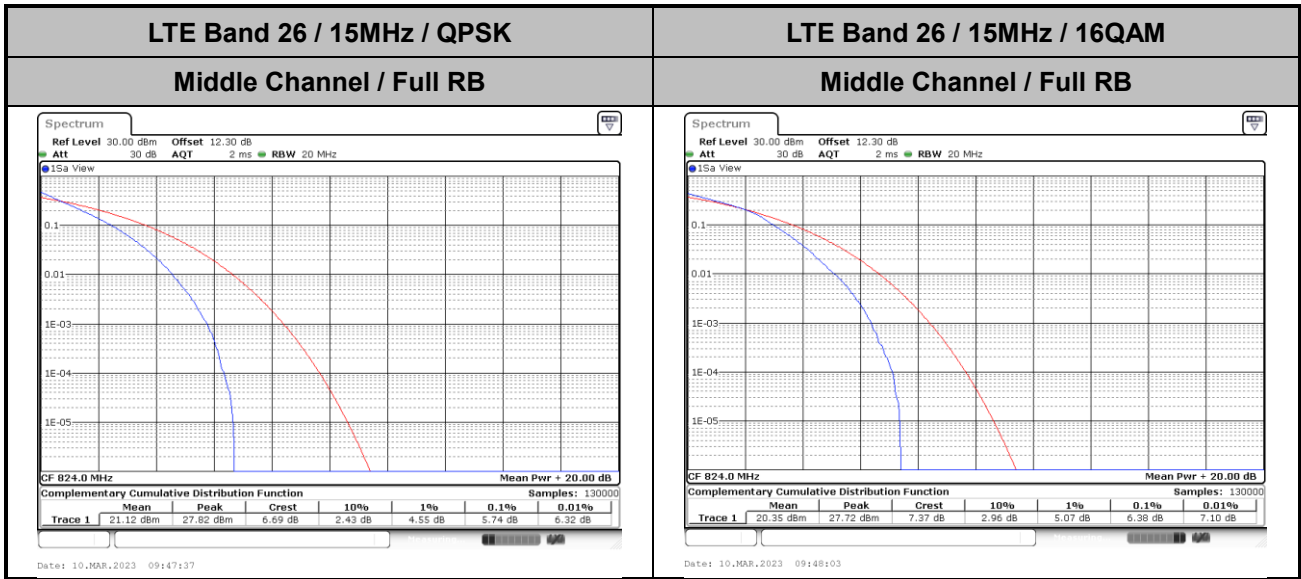




26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.28	1.28	3.03	3.03	4.96	4.91	9.95	5.38	14.27	5.39




LTE Band 26

Middle Channel / 1.4MHz / QPSK

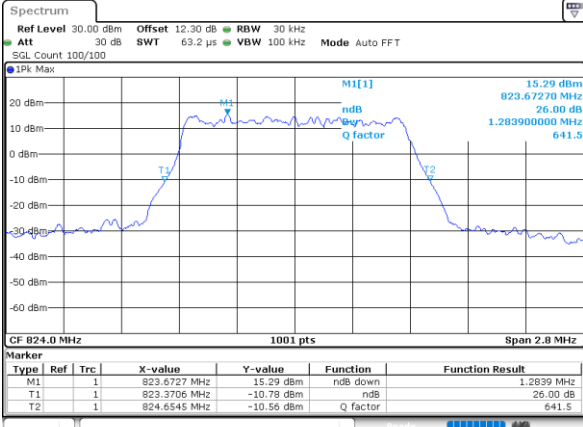


Date: 10_MAR_2023 09:39:56

Middle Channel / 1.4MHz / 16QAM

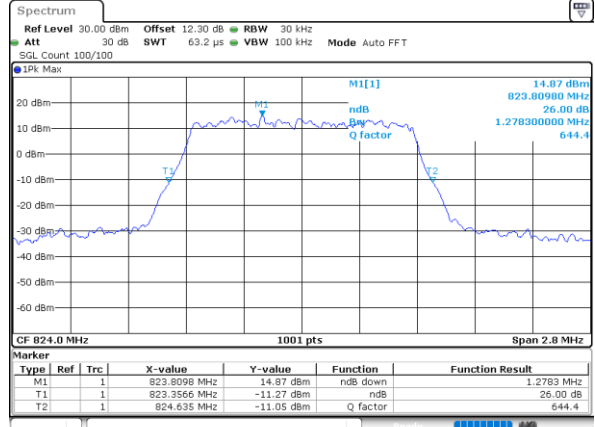


Date: 10_MAR_2023 09:40:120

Middle Channel / 3MHz / QPSK

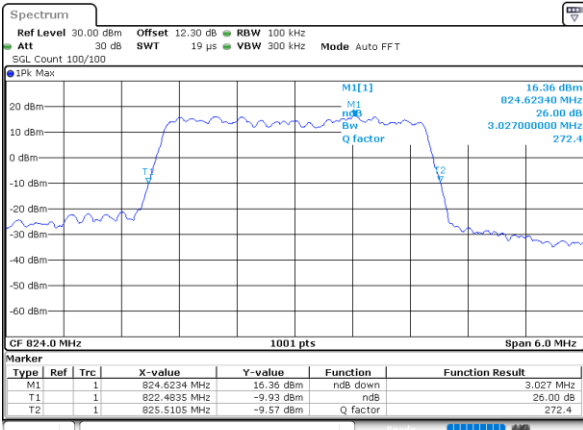


Date: 10_MAR_2023 09:41:33

Middle Channel / 3MHz / 16QAM

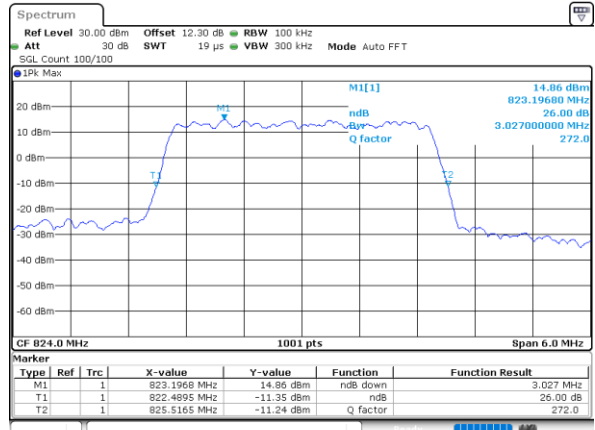


Date: 10_MAR_2023 09:41:57

Middle Channel / 5MHz / QPSK

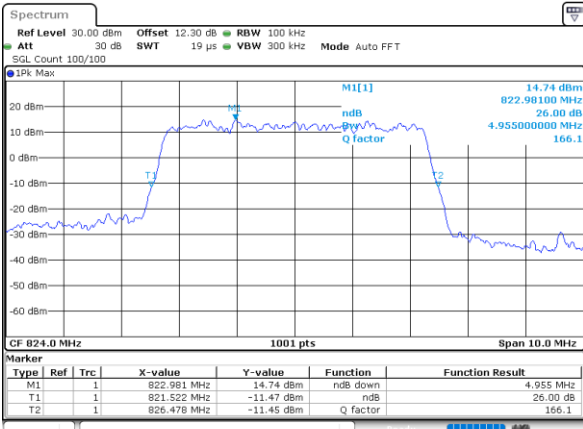

Date: 10_MAR_2023 09:43:10

Middle Channel / 5MHz / 16QAM

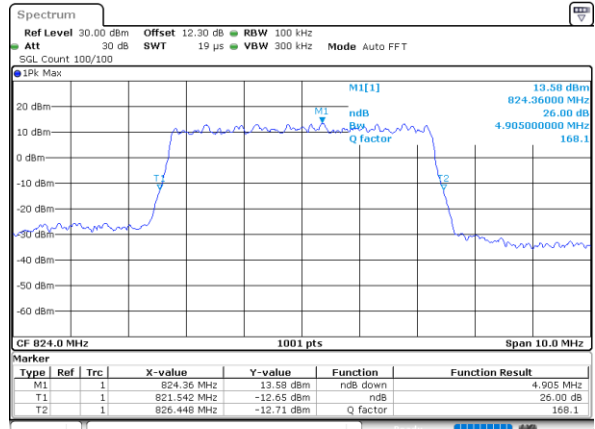


Date: 10_MAR_2023 09:43:34




LTE Band 26

Middle Channel / 10MHz / QPSK

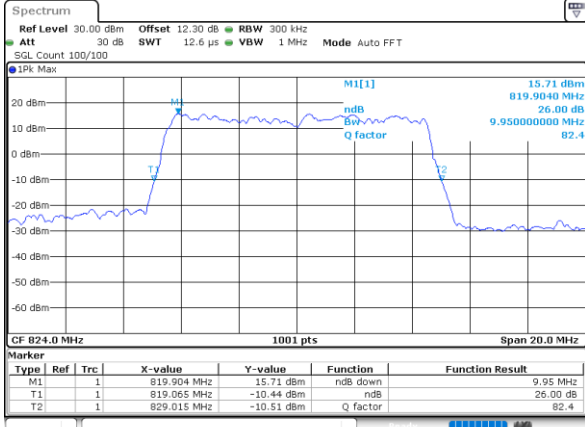


Date: 10_MAR_2023 09:44:47

Middle Channel / 10MHz / 16QAM

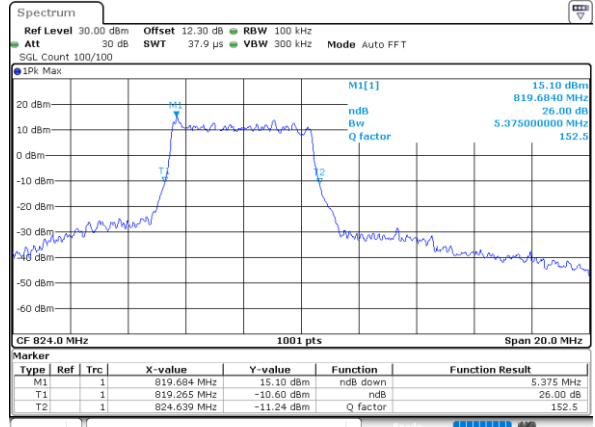


Date: 4_JUL_2023 16:55:07

Middle Channel / 15MHz / QPSK

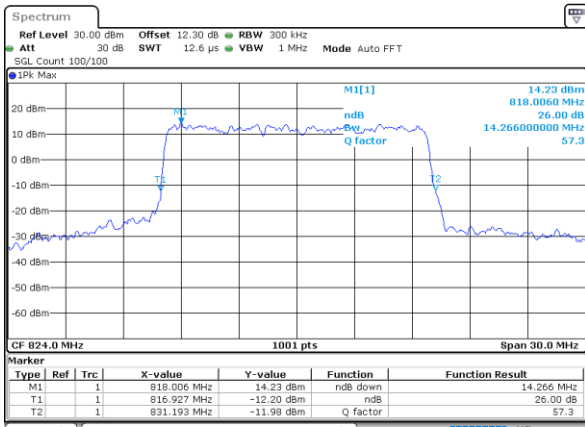

Date: 10_MAR_2023 09:46:24

Middle Channel / 15MHz / 16QAM

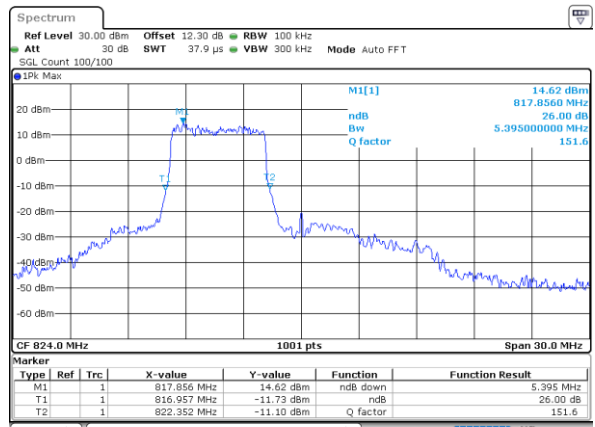

Date: 4_JUL_2023 16:55:56




Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)									
	1.4MHz		3MHz		5MHz		10MHz		15MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.10	1.09	2.73	2.73	4.51	4.50	9.03	4.88	13.43	4.86




LTE Band 26

Middle Channel / 1.4MHz / QPSK

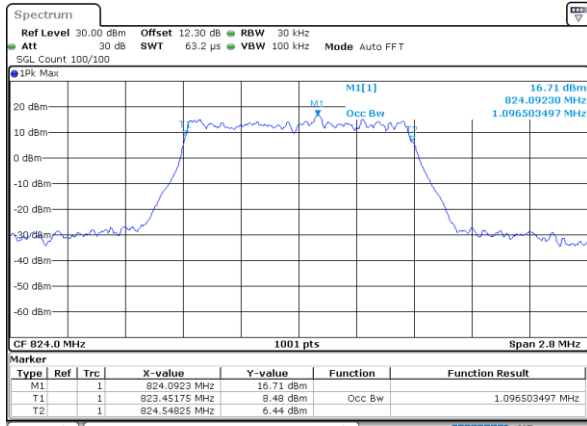


Date: 10.MAR.2023 09:39:32

Middle Channel / 1.4MHz / 16QAM

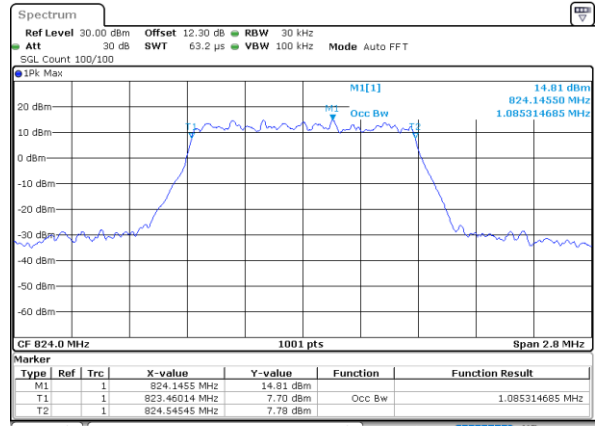


Date: 10.MAR.2023 09:40:44

Middle Channel / 3MHz / QPSK

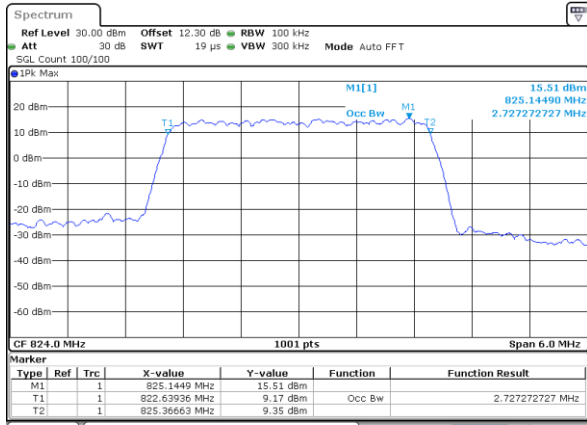


Date: 10.MAR.2023 09:41:09

Middle Channel / 3MHz / 16QAM

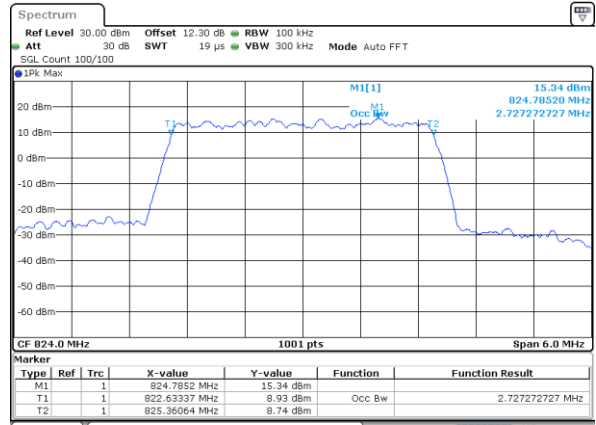


Date: 10.MAR.2023 09:42:12

Middle Channel / 5MHz / QPSK

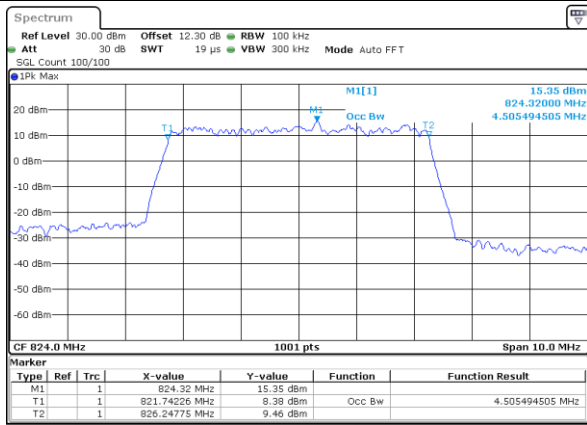

Date: 10.MAR.2023 09:42:46

Middle Channel / 5MHz / 16QAM

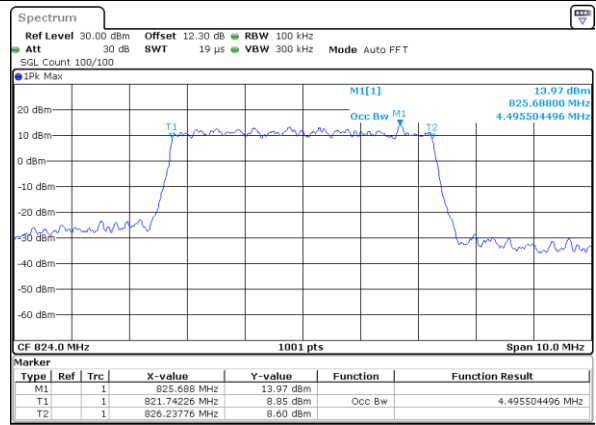


Date: 10.MAR.2023 09:43:58




LTE Band 26

Middle Channel / 10MHz / QPSK

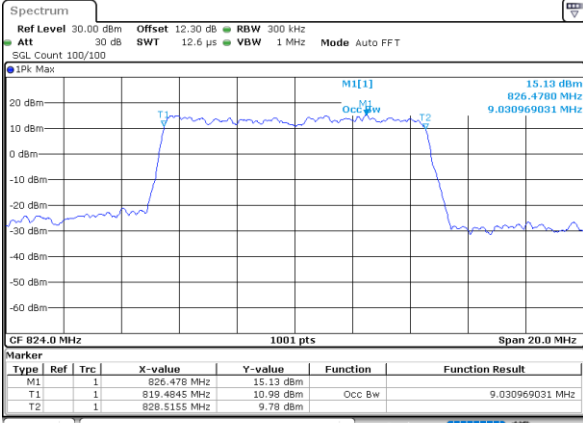


Date: 10_MAR_2023 09:44:23

Middle Channel / 10MHz / 16QAM

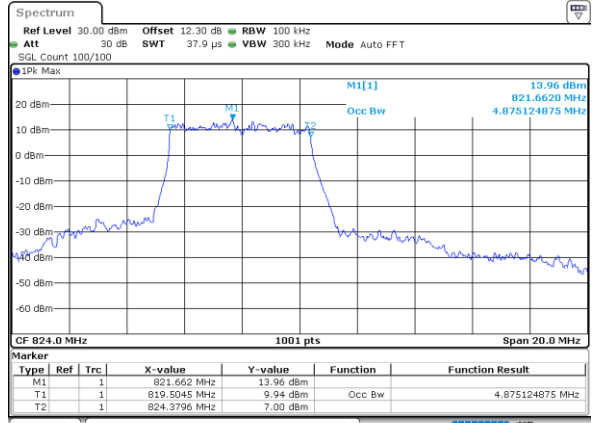


Date: 4_JUL_2023 16:55:31

Middle Channel / 15MHz / QPSK

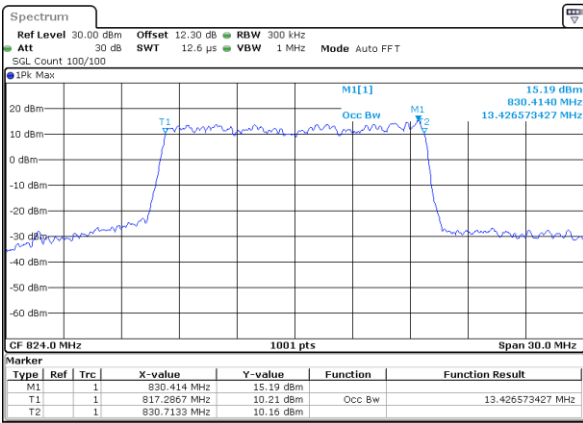

Date: 10_MAR_2023 09:46:00

Middle Channel / 15MHz / 16QAM

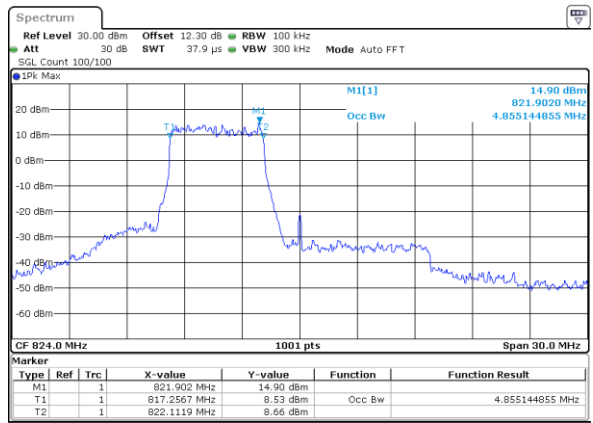

Date: 4_JUL_2023 16:56:20



Conducted Spurious Emission

LTE Band 26 / 1.4MHz	LTE Band 26 / 3MHz																																																																								
Middle Channel / QPSK	Middle Channel / QPSK																																																																								
<p>Spectrum</p> <p>Ref Level 0.00 dBm Offset 12.30 dB Mode Auto Sweep SGL Count 100/100</p> <p>Start 30.0 MHz Stop 9.0 GHz</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>814.000 MHz</td> <td>100.000 kHz</td> <td>810.30073 MHz</td> <td>-56.51 dBm</td> <td>-43.51 dB</td> </tr> <tr> <td>849.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>933.63093 MHz</td> <td>-55.16 dBm</td> <td>-43.16 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.96576 GHz</td> <td>-45.35 dBm</td> <td>-32.35 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>6.97775 GHz</td> <td>-40.98 dBm</td> <td>-27.98 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>8.93077 GHz</td> <td>-41.10 dBm</td> <td>-28.10 dB</td> </tr> </tbody> </table> <p>Date: 10.MAR.2023 09:49:18</p>	Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	814.000 MHz	100.000 kHz	810.30073 MHz	-56.51 dBm	-43.51 dB	849.000 MHz	1.000 GHz	100.000 kHz	933.63093 MHz	-55.16 dBm	-43.16 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.96576 GHz	-45.35 dBm	-32.35 dB	3.000 GHz	7.000 GHz	1.000 MHz	6.97775 GHz	-40.98 dBm	-27.98 dB	7.000 GHz	9.000 GHz	1.000 MHz	8.93077 GHz	-41.10 dBm	-28.10 dB	<p>Spectrum</p> <p>Ref Level 0.00 dBm Offset 12.30 dB Mode Auto Sweep SGL Count 100/100</p> <p>Start 30.0 MHz Stop 9.0 GHz</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>814.000 MHz</td> <td>100.000 kHz</td> <td>809.36979 MHz</td> <td>-56.41 dBm</td> <td>-43.41 dB</td> </tr> <tr> <td>849.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>961.02374 MHz</td> <td>-56.03 dBm</td> <td>-43.03 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.95626 GHz</td> <td>-45.65 dBm</td> <td>-32.65 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>6.93826 GHz</td> <td>-41.07 dBm</td> <td>-28.07 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>8.91727 GHz</td> <td>-41.01 dBm</td> <td>-28.01 dB</td> </tr> </tbody> </table> <p>Date: 10.MAR.2023 09:50:34</p>	Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	814.000 MHz	100.000 kHz	809.36979 MHz	-56.41 dBm	-43.41 dB	849.000 MHz	1.000 GHz	100.000 kHz	961.02374 MHz	-56.03 dBm	-43.03 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.95626 GHz	-45.65 dBm	-32.65 dB	3.000 GHz	7.000 GHz	1.000 MHz	6.93826 GHz	-41.07 dBm	-28.07 dB	7.000 GHz	9.000 GHz	1.000 MHz	8.91727 GHz	-41.01 dBm	-28.01 dB
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																				
30.000 MHz	814.000 MHz	100.000 kHz	810.30073 MHz	-56.51 dBm	-43.51 dB																																																																				
849.000 MHz	1.000 GHz	100.000 kHz	933.63093 MHz	-55.16 dBm	-43.16 dB																																																																				
1.000 GHz	3.000 GHz	1.000 MHz	2.96576 GHz	-45.35 dBm	-32.35 dB																																																																				
3.000 GHz	7.000 GHz	1.000 MHz	6.97775 GHz	-40.98 dBm	-27.98 dB																																																																				
7.000 GHz	9.000 GHz	1.000 MHz	8.93077 GHz	-41.10 dBm	-28.10 dB																																																																				
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																				
30.000 MHz	814.000 MHz	100.000 kHz	809.36979 MHz	-56.41 dBm	-43.41 dB																																																																				
849.000 MHz	1.000 GHz	100.000 kHz	961.02374 MHz	-56.03 dBm	-43.03 dB																																																																				
1.000 GHz	3.000 GHz	1.000 MHz	2.95626 GHz	-45.65 dBm	-32.65 dB																																																																				
3.000 GHz	7.000 GHz	1.000 MHz	6.93826 GHz	-41.07 dBm	-28.07 dB																																																																				
7.000 GHz	9.000 GHz	1.000 MHz	8.91727 GHz	-41.01 dBm	-28.01 dB																																																																				
<p>Spectrum</p> <p>Ref Level 0.00 dBm Offset 12.30 dB Mode Auto Sweep SGL Count 100/100</p> <p>Start 30.0 MHz Stop 9.0 GHz</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>814.000 MHz</td> <td>100.000 kHz</td> <td>632.34385 MHz</td> <td>-56.58 dBm</td> <td>-43.58 dB</td> </tr> <tr> <td>849.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>944.04473 MHz</td> <td>-56.17 dBm</td> <td>-43.17 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.93827 GHz</td> <td>-45.44 dBm</td> <td>-32.44 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>5.84489 GHz</td> <td>-41.12 dBm</td> <td>-28.12 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>8.91877 GHz</td> <td>-41.15 dBm</td> <td>-28.15 dB</td> </tr> </tbody> </table> <p>Date: 10.MAR.2023 09:51:49</p>	Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	814.000 MHz	100.000 kHz	632.34385 MHz	-56.58 dBm	-43.58 dB	849.000 MHz	1.000 GHz	100.000 kHz	944.04473 MHz	-56.17 dBm	-43.17 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.93827 GHz	-45.44 dBm	-32.44 dB	3.000 GHz	7.000 GHz	1.000 MHz	5.84489 GHz	-41.12 dBm	-28.12 dB	7.000 GHz	9.000 GHz	1.000 MHz	8.91877 GHz	-41.15 dBm	-28.15 dB	<p>Spectrum</p> <p>Ref Level 0.00 dBm Offset 12.30 dB Mode Auto Sweep SGL Count 100/100</p> <p>Start 30.0 MHz Stop 9.0 GHz</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ΔLimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>814.000 MHz</td> <td>100.000 kHz</td> <td>810.83970 MHz</td> <td>-52.54 dBm</td> <td>-39.54 dB</td> </tr> <tr> <td>849.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>937.63043 MHz</td> <td>-56.00 dBm</td> <td>-43.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>3.000 GHz</td> <td>1.000 MHz</td> <td>2.95676 GHz</td> <td>-45.04 dBm</td> <td>-32.04 dB</td> </tr> <tr> <td>3.000 GHz</td> <td>7.000 GHz</td> <td>1.000 MHz</td> <td>6.99876 GHz</td> <td>-41.00 dBm</td> <td>-28.00 dB</td> </tr> <tr> <td>7.000 GHz</td> <td>9.000 GHz</td> <td>1.000 MHz</td> <td>8.91877 GHz</td> <td>-41.27 dBm</td> <td>-28.27 dB</td> </tr> </tbody> </table> <p>Date: 10.MAR.2023 09:53:04</p>	Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit	30.000 MHz	814.000 MHz	100.000 kHz	810.83970 MHz	-52.54 dBm	-39.54 dB	849.000 MHz	1.000 GHz	100.000 kHz	937.63043 MHz	-56.00 dBm	-43.00 dB	1.000 GHz	3.000 GHz	1.000 MHz	2.95676 GHz	-45.04 dBm	-32.04 dB	3.000 GHz	7.000 GHz	1.000 MHz	6.99876 GHz	-41.00 dBm	-28.00 dB	7.000 GHz	9.000 GHz	1.000 MHz	8.91877 GHz	-41.27 dBm	-28.27 dB
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																				
30.000 MHz	814.000 MHz	100.000 kHz	632.34385 MHz	-56.58 dBm	-43.58 dB																																																																				
849.000 MHz	1.000 GHz	100.000 kHz	944.04473 MHz	-56.17 dBm	-43.17 dB																																																																				
1.000 GHz	3.000 GHz	1.000 MHz	2.93827 GHz	-45.44 dBm	-32.44 dB																																																																				
3.000 GHz	7.000 GHz	1.000 MHz	5.84489 GHz	-41.12 dBm	-28.12 dB																																																																				
7.000 GHz	9.000 GHz	1.000 MHz	8.91877 GHz	-41.15 dBm	-28.15 dB																																																																				
Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit																																																																				
30.000 MHz	814.000 MHz	100.000 kHz	810.83970 MHz	-52.54 dBm	-39.54 dB																																																																				
849.000 MHz	1.000 GHz	100.000 kHz	937.63043 MHz	-56.00 dBm	-43.00 dB																																																																				
1.000 GHz	3.000 GHz	1.000 MHz	2.95676 GHz	-45.04 dBm	-32.04 dB																																																																				
3.000 GHz	7.000 GHz	1.000 MHz	6.99876 GHz	-41.00 dBm	-28.00 dB																																																																				
7.000 GHz	9.000 GHz	1.000 MHz	8.91877 GHz	-41.27 dBm	-28.27 dB																																																																				



Frequency Stability

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
35	Normal Voltage	0.0137	PASS
30	Normal Voltage	0.0039	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0066	
0	Normal Voltage	0.0016	
20	Maximum Voltage	0.0061	
20	Normal Voltage	0.0165	
20	Battery End Point	0.0175	

Note:

- 1. Normal Voltage = 3.87 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.4 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 26 (QPSK) / Low Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 15MHz	Note 2.
		Deviation (ppm)	Result
35	Normal Voltage	0.0138	PASS
30	Normal Voltage	0.0158	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0149	
0	Normal Voltage	0.0026	
20	Maximum Voltage	0.0063	
20	Normal Voltage	0.0170	
20	Battery End Point	0.0135	

Note:

1. Normal Voltage = 3.87 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.4 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

LTE Band 26

LTE Band 26 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1629	-60.32	-13	-47.32	-70.79	-66.67	0.80	9.30	H
	2443	-42.85	-13	-29.85	-56.57	-49.87	1.05	10.22	H
	3257	-51.59	-13	-38.59	-68.34	-60.15	1.11	11.81	H
									H
									H
									H
									H
	1629	-60.31	-13	-47.31	-70.66	-66.66	0.80	9.30	V
	2443	-45.12	-13	-32.12	-58.89	-52.14	1.05	10.22	V
	3257	-53.13	-13	-40.13	-70.16	-61.69	1.11	11.81	V
									V
									V
									V
									V
Middle	1634	-60.24	-13	-47.24	-70.71	-66.60	0.81	9.32	H
	2451	-42.93	-13	-29.93	-56.65	-49.98	1.06	10.26	H
	3267	-47.85	-13	-34.85	-64.62	-56.46	1.11	11.87	H
									H
									H
									H
									H
	1634	-58.69	-13	-45.69	-69.05	-65.05	0.81	9.32	V
	2451	-46.42	-13	-33.42	-60.19	-53.47	1.06	10.26	V
	3267	-47.87	-13	-34.87	-64.92	-56.48	1.11	11.87	V
									V
									V
									V
									V
								V	



Highest	1640	-60.28	-13	-47.28	-70.76	-66.66	0.81	9.34	H
	2458	-39.77	-13	-26.77	-53.49	-46.85	1.06	10.29	H
	3280	-54.01	-13	-41.01	-70.79	-62.69	1.11	11.94	H
									H
									H
									H
									H
	1640	-60.21	-13	-47.21	-70.6	-66.59	0.81	9.34	V
	2458	-56.91	-13	-43.91	-70.68	-63.99	1.06	10.29	V
	3280	-53.49	-13	-40.49	-70.56	-62.17	1.11	11.94	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Part 90S LTE Band 26 / 15MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1630	-60.24	-13	-47.24	-70.71	-66.59	0.80	9.31	H
	2445	-43.13	-13	-30.13	-56.85	-50.16	1.05	10.23	H
	3259	-46.98	-13	-33.98	-63.73	-55.55	1.11	11.82	H
									H
									H
									H
									H
	1630	-59.99	-13	-46.99	-70.35	-66.34	0.80	9.31	V
	2445	-44.89	-13	-31.89	-58.66	-51.92	1.05	10.23	V
	3259	-52.06	-13	-39.06	-69.09	-60.63	1.11	11.82	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

————THE END————