

EMC Test Report

Application for FCC Grant of Equipment Authorization

FCC Part 15 Subpart C

Model: GFHD254

FCC ID: A4RGFHD254

APPLICANT: Google Inc.
1600 Amphitheatre Pky
Mountain View, CA 94043

TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

REPORT DATE: November 16, 2016

REISSUE DATE: November 16, 2016

FINAL TEST DATES: October 5, 6, 7, 10 and 13, 2016

TOTAL NUMBER OF PAGES: 73

PROGRAM MGR /
TECHNICAL REVIEWER:

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



Mark E Hill
Staff Engineer



David Guidotti
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full



REVISION HISTORY

Rev#	Date	Comments	Modified By
-	November 16, 2016	First release	
1.0	January 12, 2017	Updated cabling information	MEH
2.0	February 8, 2017	Updated support equipment information	MEH

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
FREQUENCY HOPPING SPREAD SPECTRUM (2400 – 2483.5 MHZ, 75 HOPPING CHANNELS)	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
OTHER EUT DETAILS.....	8
ANTENNA SYSTEM	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	9
EUT OPERATION	9
TEST SITE.....	10
GENERAL INFORMATION	10
CONDUCTED EMISSIONS CONSIDERATIONS	10
RADIATED EMISSIONS CONSIDERATIONS	10
MEASUREMENT INSTRUMENTATION	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN)	11
FILTERS/ATTENUATORS	12
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS.....	13
RADIATED EMISSIONS.....	13
CONDUCTED EMISSIONS FROM ANTENNA PORT	17
BANDWIDTH MEASUREMENTS	17
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	18
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	18
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	19
OUTPUT POWER LIMITS – FHSS SYSTEMS	19
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	20
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	22
APPENDIX B TEST DATA	27
END OF REPORT	73

SCOPE

An electromagnetic emissions test has been performed on the Google Inc. model GFHD254, pursuant to the following rules:

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2013

FHSS test procedure DA 00-0705A1 (FCC KDB 867751)

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The EUT support an IEEE 802.11 5GHz and Bluetooth radio. This report only covers the Bluetooth Basic/EDR FHSS modes. Refer to NTS reports R103346 and R103316.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Google Inc. model GFHD254 complied with the requirements of the following regulations:

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Google Inc. model GFHD254 and therefore apply only to the tested sample. The sample was selected and prepared by Weifeng Pan of Google Inc.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

FREQUENCY HOPPING SPREAD SPECTRUM (2400 – 2483.5 MHz, 75 Hopping Channels)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247 (a) (1)	-	20dB Bandwidth	Basic: 856kHz EDR: 1270kHz	Channel spacing > 2/3 of 20dB bandwidth	Complies
		Channel Separation	1000 kHz		Complies
15.247 (a) (1) (iii)	-	Channel Dwell Time (average time of occupancy)	Device complies with Bluetooth specifications with a minimum of 20 hopping channels	<0.4 second within a period of 0.4 x number of channels	Complies
15.247 (a) (1) (iii) & (b) (1)	-	Number of Channels		15 or more	Complies
15.247 (a) (1)	-	Channel Utilization	The system uses the Bluetooth algorithm and, therefore, meets all requirements for channel utilization.	All channels shall, on average, be used equally	Complies
15.247 (b) (3)	RSS 247 5.4 (2)	Output Power (multipoint systems)	Basic: 2.2dBm (1.7mW) EDR: 5.8dBm (3.8mW)	0.125W	Complies
15.247(d)	RSS 247 5.5	Spurious Emissions – 30MHz – 25GHz	All spurious emissions < -20dBc	< -20dBc	Complies
15.247(d) / 15.209	RSS 247 5.5	Radiated Spurious Emissions 30MHz – 25GHz	52.0 dBμV/m @ 4804.1 MHz (-2.0 dB)	Refer to the limits section (p19) for restricted bands, all others < -20dBc	Complies
15.247 (a) (1)	RSS 247 5.1(2)	Receiver bandwidth	Refer to operational description	Shall match the channel bandwidth	Complies

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antenna is internal	Unique or integral antenna required	Complies
15.407 (b) (6)	-	AC Conducted Emissions	45.1 dBμV @ 0.447 MHz (-1.8 dB)	Refer to page 18	Complies
15.247 (i) 15.407 (f)	-	RF Exposure Requirements	Refer to MPE calculations in separate exhibit	Refer to OET 65, FCC Part 1 and RSS 102	Complies

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Google Inc. model GFHD254 is a residential set-top box that supports the use of a IEEE 802.11 a/n/ac 5GHz radio and a Bluetooth 4.1 radio. The EUT is powered from an external AC/DC adapter.

The sample was received on May 2, 2016 and tested on October 5, 6, 7, 10 and 13, 2016. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Google	FGHD254	Set-top box	See test data	A4RGFHD254
Google	OTD018	External power supply	-	-

OTHER EUT DETAILS

IEEE 802.11a/n/ac 4x4 radio

Indoor Use

DFS Client

Bluetooth 4.1 radio supporting Basic/EDR and Low Energy Modes

Simultaneous Transmission of 802.11 and BT radio supported

ANTENNA SYSTEM

Internal Antenna, -4.0dBi

ENCLOSURE

The EUT enclosure measures approximately 24.3cm by 15.5cm by 3.5cm. It is primarily constructed of uncoated plastic.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Samsung	UN22F5000	LCD monitor	-	-

The following equipment was used as remote support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
Netgear	GS605	Ethernet switch	-	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
HDMI	LCD	Multiwire	Shielded	1.0
Audio out	LCD	Multiwire	Shielded	1.0
Ethernet	Switch	Cat 5	Unshielded	10.0
DC power	External power supply	2 wire	Unshielded	2.0
AC in (ext supply)	AC mains	2 wire	Unshielded	2.0
USB	Not connected*	-	-	-

* - USB port not supported for the current product release

EUT OPERATION

During testing, the EUT was configured to continuously transmit on the Bluetooth radio, in the Basic (GFSK) or EDR (8PSK) mode at the maximum output power level. Refer to the test data in the Appendix of this report for details on the duty cycle of the transmission and the channels/frequencies used.

Additional testing was done with both the Bluetooth radio and the Wifi radio transmitting. Both radios were configured for continuous transmission, with the power set to the maximum power setting.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers		Location
	FCC	Canada	
Chamber 3	US0027	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	US0027	2845B-4	
Chamber 5	US0027	2845B-5	
Chamber 7	US0027	2845B-7	

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

Software is used to view and convert receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers. The software used for radiated and conducted emissions measurements is NTS EMI Test Software (rev 2.10)

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

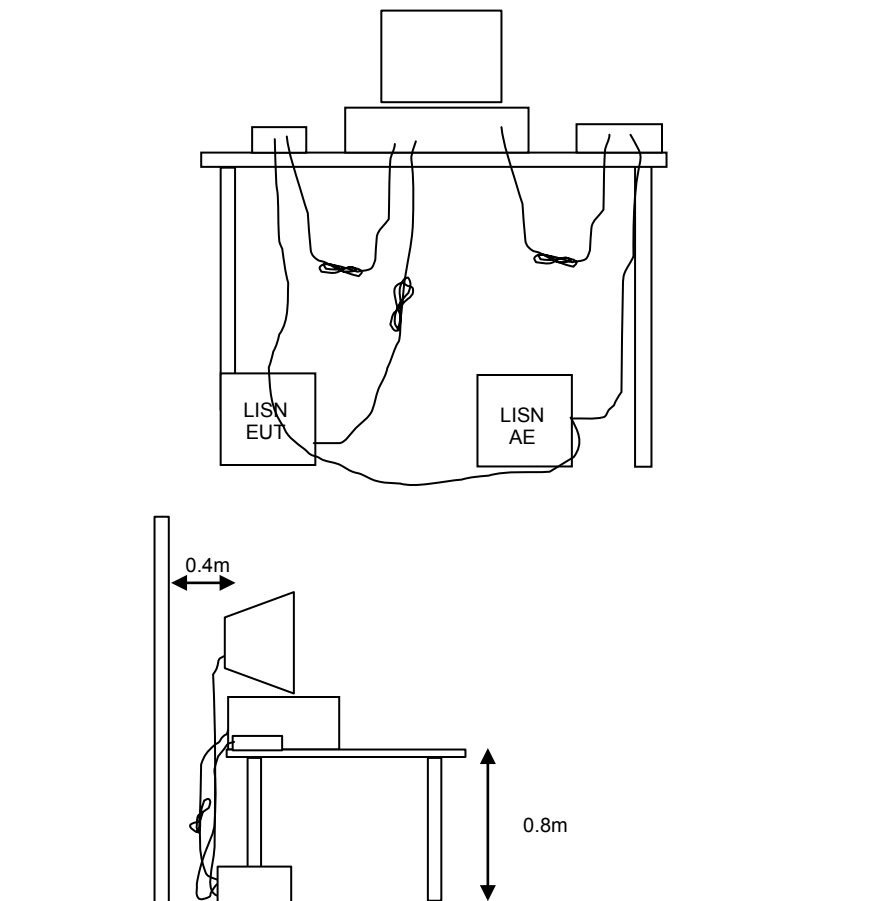


Figure 1 Typical Conducted Emissions Test Configuration



RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

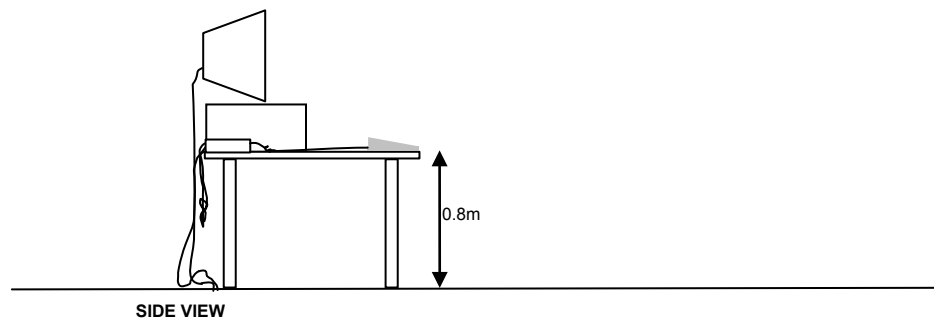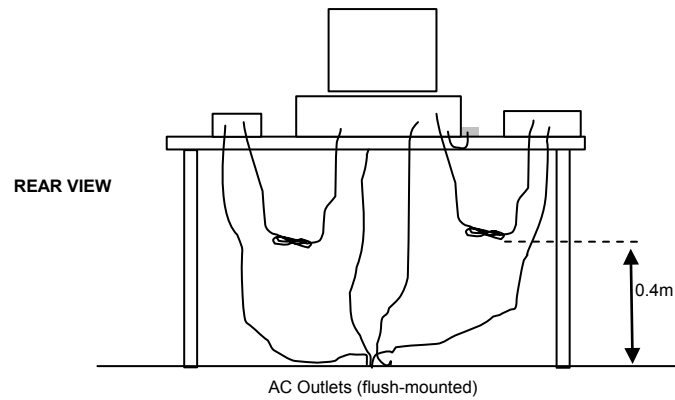


Typical Test Configuration for Radiated Field Strength Measurements

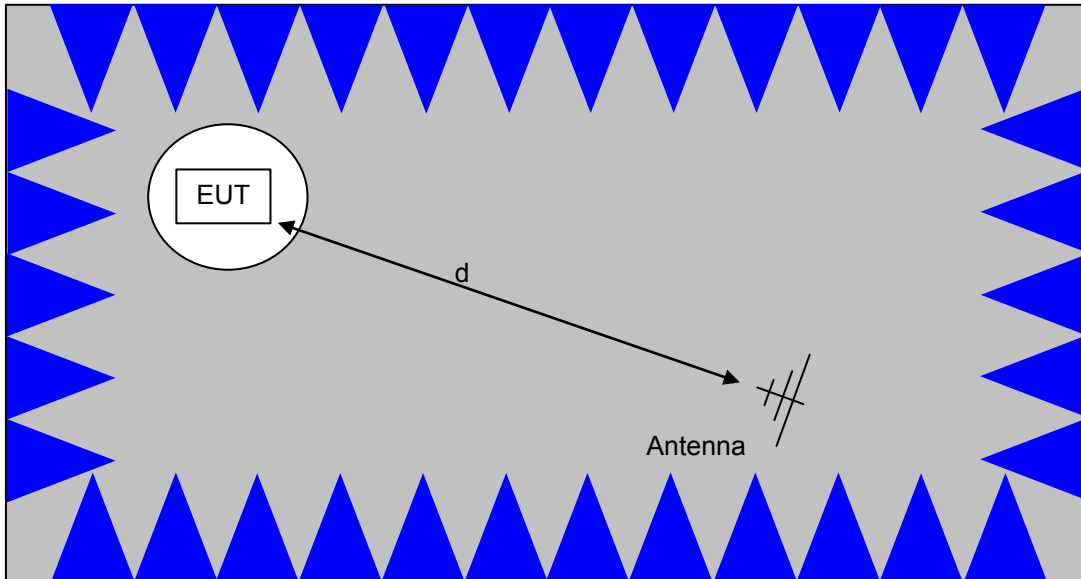

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

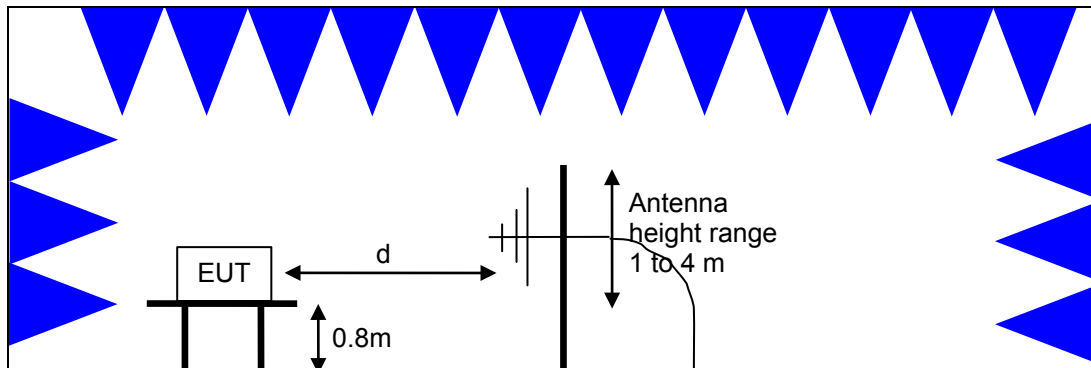

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

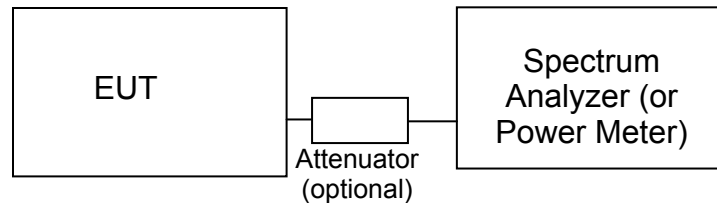**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

OUTPUT POWER LIMITS – FHSS SYSTEMS

The table below shows the limits for output power based on the number of channels available for the hopping system.

Operating Frequency (MHz)	Number of Channels	Output Power
2400 – 2483.5	< 75	0.125 Watts (21 dBm)

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 247. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

¹ The restricted bands are detailed in FCC 15.205 and RSS-Gen Table 6

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \log_{10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \log_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 1000 - 18,000 MHz, 02-May-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/26/2014	6/26/2016
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1152	7/10/2015	7/10/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	10/9/2015	10/9/2016
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2239	9/16/2015	9/16/2016
Hewlett Packard	Spectrum Analyzer (SA40) Purple 9 kHz - 40 GHz,	8564E (84125C)	2415	3/19/2016	3/19/2017
Radiated Emissions, 1000 - 18,000 MHz, 04-May-16					
Narda West	High Pass Filter, 8 GHz	HPF 180	821	1/27/2016	1/27/2017
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	7/8/2015	7/8/2016
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1730	7/10/2015	7/10/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Emissions, 1000 - 40,000 MHz, 09-May-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
HP / Miteq	SA40 Head (Red)	TTA1840-45-5P-HG-S	1145	7/17/2015	7/17/2016
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	7/8/2015	7/8/2016
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/28/2014	8/28/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Spurious Emissions, 1000 - 18,000 MHz, 11-May-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	7/8/2015	7/8/2016
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1730	7/10/2015	7/10/2016
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2239	9/16/2015	9/16/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016



Manufacturer	Description	Model	Asset #	Calibrated	Cal Due
Radiated Emissions, 1000 - 40,000 MHz, 11-May-16					
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
HP / Miteq	SA40 Head (Red)	TTA1840-45-5P-HG-S	1145	7/17/2015	7/17/2016
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1152	7/10/2015	7/10/2016
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/28/2014	8/28/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Emissions, 1000 - 18,000 MHz, 17-May-16					
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1152	7/10/2015	7/10/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Emissions, 30 - 1,000 MHz, 18-May-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1549	6/2/2015	6/2/2017
Hewlett Packard	9KHz-1300MHz pre-amp	8447F	2777	1/26/2016	1/26/2017
Radiated Emissions, 1000 - 6,500 MHz, 18-May-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Emissions, 1000 - 6,000 MHz, 18-May-16					
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radiated Emissions, 1000 - 6,000 MHz, 19-May-16					
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/29/2014	7/29/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Radiated Emissions, 1000 - 6,000 MHz, 20-May-16					
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
EMCO	Antenna, Horn, 1-18 GHz	3115	2733	11/18/2014	11/18/2016
Radio Antenna Port (Power and Spurious Emissions), 24-May-16					
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	6/22/2015	6/22/2016



<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 1000 - 40,000 MHz, 24-Aug-16					
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1156	5/5/2016	5/5/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	7/8/2016	7/8/2018
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1728	5/11/2016	5/11/2017
HP / Miteq	SA40 Head (Purple)	TTA1840-45-5P-HG-S	1772	12/21/2015	N/A
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	10/9/2015	10/9/2016
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	7/29/2015	7/29/2017
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2239	9/16/2015	9/16/2016
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	2240	9/16/2015	9/16/2016
Hewlett Packard	Spectrum Analyzer (SA40) Purple 9 kHz - 40 GHz,	8564E (84125C)	2415	3/19/2016	3/19/2017
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/19/2015	12/19/2016
Radiated Emissions, 1,000 - 18,000 MHz, 02-Sep-16					
Hewlett Packard	High Pass filter, 8.2 GHz (Blu System)	P/N 84300-80039 (84125C)	1392	5/5/2016	5/5/2017
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	7/8/2016	7/8/2018
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	10/9/2015	10/9/2016
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	9/16/2015	9/16/2016
Hewlett Packard	Spectrum Analyzer (SA40) Purple 9 kHz - 40 GHz,	8564E (84125C)	2415	3/19/2016	3/19/2017
Radio Antenna Port (Power and Spurious Emissions), 19-23-Sep-16					
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	5/6/2016	5/6/2017
NTS	NTS UNII Power Software (rev 3.8)	N/A	0		N/A
NTS	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Radio Antenna Port (Power and Spurious Emissions), 27 and 28-Sep-16					
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	5/6/2016	5/6/2017
NTS	NTS UNII Power Software (rev 3.8)	N/A	0		N/A
NTS	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Radiated Emissions, 1,000 - 12,000 MHz, 06-Oct-16 & 07-Oct-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/30/2016	6/30/2018
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	6/29/2016	6/29/2017

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Spurious Emissions, 1000 - 25,000 MHz, 11-Oct-16					
NTS	NTS EMI Software (rev 2.10)	N/A	0		N/A
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/30/2016	6/30/2018
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
HP / Miteq	SA40 Head (Red)	TTA1840-45-5P-HG-S	1145	8/24/2016	8/24/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	10/17/2016
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	6/29/2016	6/29/2017
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/28/2014	8/28/2017
Radiated Emissions, 1,000 - 18,000 MHz, 13-Oct-16					
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/30/2016	6/30/2018
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	1/21/2016	1/21/2017
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	10/17/2015	11/17/2016
Hewlett Packard	High Pass filter, 8.2 GHz	P/N 84300-80039	1152	6/28/2016	6/28/2017
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	9/19/2016	9/19/2017
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2251	9/19/2016	9/19/2017
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	2/20/2016	2/20/2017
Radiated Emissions, 30 - 1,000 MHz, 14-Oct-16					
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	5/9/2016	5/9/2017
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	6/29/2016	6/29/2017
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2251	9/19/2016	9/19/2017
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	2/20/2016	2/20/2017
Com-Power	Preamplifier, 1-1000 MHz	PAM-103	2885	9/16/2016	9/16/2017
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1657	7/27/2016	7/27/2018
Radio Antenna Port (Power and Spurious Emissions), 14-Oct-16					
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	5/6/2016	5/6/2017
Conducted Emissions - AC Power Ports, 20-Oct-16					
EMCO	LISN, 10 kHz-100 MHz	3825/2	1292	8/1/2016	8/1/2017
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	6/7/2016	6/7/2017
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	8/31/2016	8/31/2017
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/29/2016	6/29/2017
Radio Antenna Port (Frequency Stability), 26-Oct-16					
NTS	NTS Capture Analyzer Software (rev 3.8)	N/A	0		N/A
Rohde & Schwarz	Signal Analyzer 20 Hz - 26.5 GHz	FSQ26	2327	6/17/2016	6/17/2017



<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Honeywell	Chart Recorder	DR45AT-1000-00-001-0 (Trueline)	2406	11/17/2015	11/17/2016
Envirotronics	Temperature/Humidity chamber	SH16C	3195		N/A

Appendix B Test Data

T101543 Pages 28 – 72

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Product	GFHD254	T-Log Number:	T101543
System Configuration:	-	Project Manager:	Deepa Shetty
Contact:	Weifeng Pan	Project Coordinator:	-
Emissions Standard(s):	FCC 15.247 and 15.407	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Google, Inc.

Product

GFHD254

Date of Last Test: 10/20/2016



EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: B

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/20/2016	Config. Used: 1
Test Engineer: Rafael Varelas	Config Change: None
Test Location: Fremont Chamber #3	EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:	Temperature: 23.2 °C
	Rel. Humidity: 39 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	Pass	45.1 dBµV @ 0.447 MHz (-1.8 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Sample Notes

Sample S/N: GTCFNS1630E0091
Driver:

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz
The EUT was configured to transmit at 2440 MHz (BLE) and 5785 MHz (802.11a)

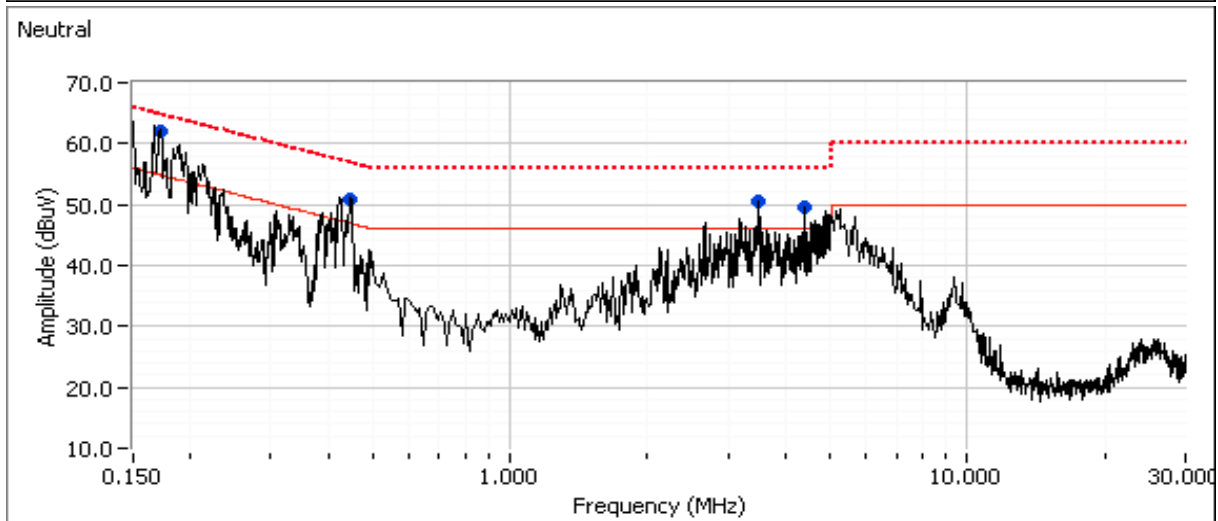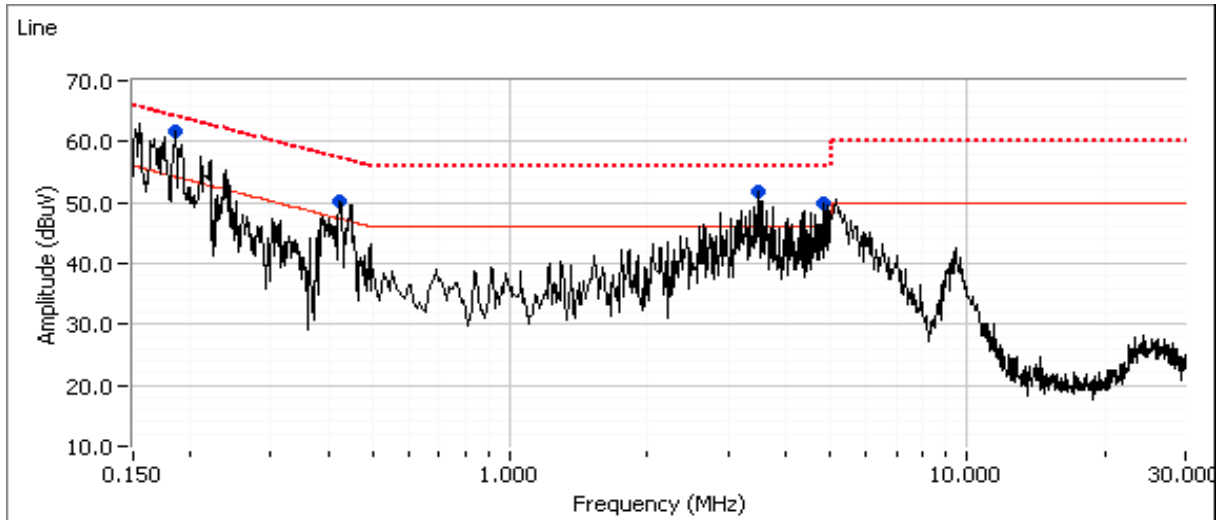

EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.188	61.7	Line 1	54.2	7.5	Peak	
0.423	50.3	Line 1	47.4	2.9	Peak	
3.501	51.7	Line 1	46.0	5.7	Peak	
4.865	49.8	Line 1	46.0	3.8	Peak	
0.174	62.0	Neutral	54.8	7.2	Peak	
0.447	50.9	Neutral	46.9	4.0	Peak	
3.499	50.4	Neutral	46.0	4.4	Peak	
4.421	49.5	Neutral	46.0	3.5	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.447	45.1	Neutral	46.9	-1.8	AVG	AVG (0.10s)
0.423	44.3	Line 1	47.4	-3.1	AVG	AVG (0.10s)
0.188	50.1	Line 1	54.1	-4.0	AVG	AVG (0.10s)
0.188	58.4	Line 1	64.1	-5.7	QP	QP (1.00s)
0.447	50.7	Neutral	56.9	-6.2	QP	QP (1.00s)
0.423	50.7	Line 1	57.4	-6.7	QP	QP (1.00s)
3.501	47.7	Line 1	56.0	-8.3	QP	QP (1.00s)
4.865	37.6	Line 1	46.0	-8.4	AVG	AVG (0.10s)
4.865	47.1	Line 1	56.0	-8.9	QP	QP (1.00s)
0.174	55.6	Neutral	64.8	-9.2	QP	QP (1.00s)
3.499	46.5	Neutral	56.0	-9.5	QP	QP (1.00s)
3.501	36.4	Line 1	46.0	-9.6	AVG	AVG (0.10s)
3.499	35.6	Neutral	46.0	-10.4	AVG	AVG (0.10s)
4.421	41.5	Neutral	56.0	-14.5	QP	QP (1.00s)
0.174	40.2	Neutral	54.8	-14.6	AVG	AVG (0.10s)
4.421	29.5	Neutral	46.0	-16.5	AVG	AVG (0.10s)

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

RSS-247, FCC 15.247, FCC 15.407 Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: See below
 Test Engineer: See below
 Test Location: Fremont CH 5

Config. Used: 1
 Config Change: None
 EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 21.8 °C
 Rel. Humidity: 43 %

Summary of Results

Run #	Mode	Freq.	Power Setting	Passing Power Setting	Test Performed	Limit	Result / Margin
Simultaneous Tx operation							
1	BLE	2440	Max	Max	Radiated Emissions, 30 - 1000MHz	FCC 15.209 / 15.247 / 15 E	31.0 dBμV/m @ 75.51 MHz (-9.0 dB)
	a	5300	15	15	Radiated Emissions, 1 - 40 GHz		53.0 dBμV/m @ 21199.8 MHz (-1.0 dB)
2	BLE	2440	Max	Max	Radiated Emissions, 30 - 1000MHz		35.2 dBμV/m @ 226.92 MHz (-10.8 dB)
	a	5785	19	19	Radiated Emissions, 1 - 40 GHz		52.1 dBμV/m @ 4880.1 MHz (-1.9 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

Procedure Comments:

Measurements performed in accordance with FCC KDB 789033

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold 50 traces. (method VB of KDB 789033)

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1Mbps	62.6%	Yes	2.44	2.03	4.07	410
11a	6Mbps	90.1%	Yes	0.567	0.45	0.90	1764

Sample Notes

Sample S/N: GTCFNS1630E0091

Driver:

Antenna: Internal

Measurement Specific Notes:

Note 1:	For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector). Per KDB 789033 2) c) (i), compliance can be demonstrated by meeting the average and peak limits of 15.209, as an alternative.
Note 2:	Emission has constant duty cycle < 98%, average measurement performed: RBW=1MHz, VBW>1/T but not less than 10Hz, peak detector, linear averaging, auto sweep, max hold 50*1/DC traces (method VB of KDB 789033)

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

Run #1, Radiated Spurious Emissions

Date of Test: 10/13-14/16

Test Engineer: M. Birgani

Test Location: Chamber 5

Config. Used: 1

Config Change: -


EUT Voltage: 120V/ 60Hz

Freq: 2440 Mode: BLE
 Tx Chain: - Data Rate: 1Mbps
 Freq: 5300 Mode: 11a
 Tx Chain: 4Tx Data Rate: 6Mbps

Run #1a: 30-1000MHz

Frequency	Level	Pol	15.209 / 15.247 / 15E		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
75.514	31.0	V	40.0	-9.0	QP	267	1.0	QP (1.00s)
223.709	35.4	H	46.0	-10.6	QP	200	1.0	QP (1.00s)
151.209	30.7	H	43.5	-12.8	QP	231	1.2	QP (1.00s)
296.014	29.9	H	46.0	-16.1	QP	191	1.9	QP (1.00s)
31.956	22.3	V	40.0	-17.7	QP	116	1.0	QP (1.00s)
370.370	23.8	H	46.0	-22.2	QP	214	1.5	QP (1.00s)

Bluetooth at 2440 MHz (BLE Mode); 802.11a at 5300 MHz

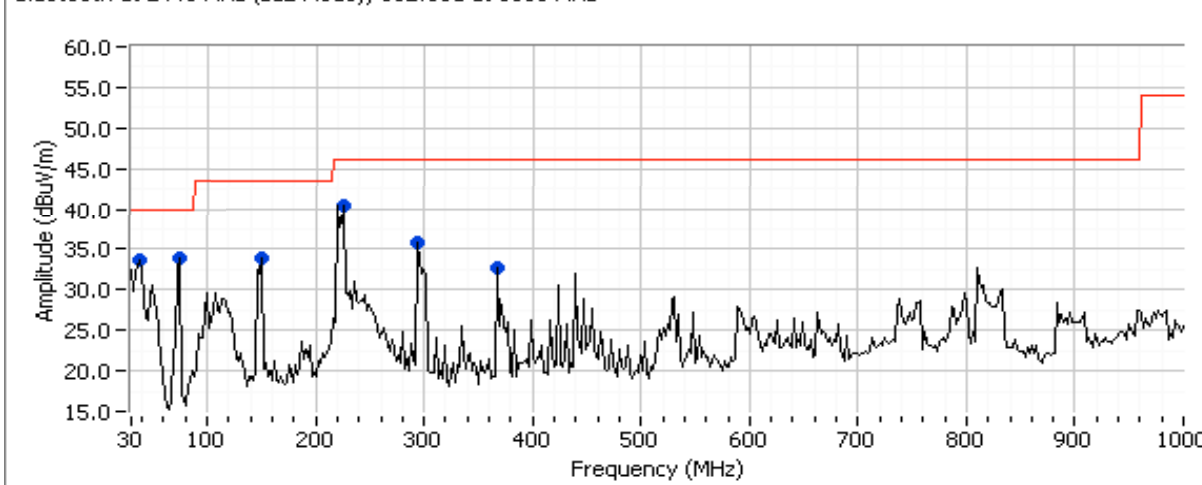

EMC Test Data



Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

Run #1b: 1000-40000MHz

Freq:	2440	Mode:	BLE
Tx Chain:	-	Data Rate:	1Mbps
Freq:	5300	Mode:	11a
Tx Chain:	4Tx	Data Rate:	6Mbps

Frequency	Level	Pol	15.209 / 15E		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
21199.770	53.0	V	54.0	-1.0	PK	338	0.97	RB 1 MHz;VB 3 MHz;Peak
4880.080	52.1	H	54.0	-1.9	VAVG	295	1.67	BLE 2nd Harmonic
21199.770	47.0	V	54.0	-7.0	VAVG	338	0.97	RB 1 MHz;VB 3 kHz;Peak
3533.380	45.7	V	54.0	-8.3	PK	88	1.08	RB 1 MHz;VB 3 MHz;Peak
15899.800	42.9	V	54.0	-11.1	Avg	203	1.96	VB 3 kHz, note 2
3533.350	40.6	V	54.0	-13.4	VAVG	88	1.08	RB 1 MHz;VB 1 kHz;Peak
4880.530	54.6	H	74.0	-19.4	PK	295	1.67	BLE 2nd Harmonic
15900.270	52.2	V	74.0	-21.8	PK	203	1.96	

Client:	Google, Inc.	Job Number:	JD101521 and ID101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

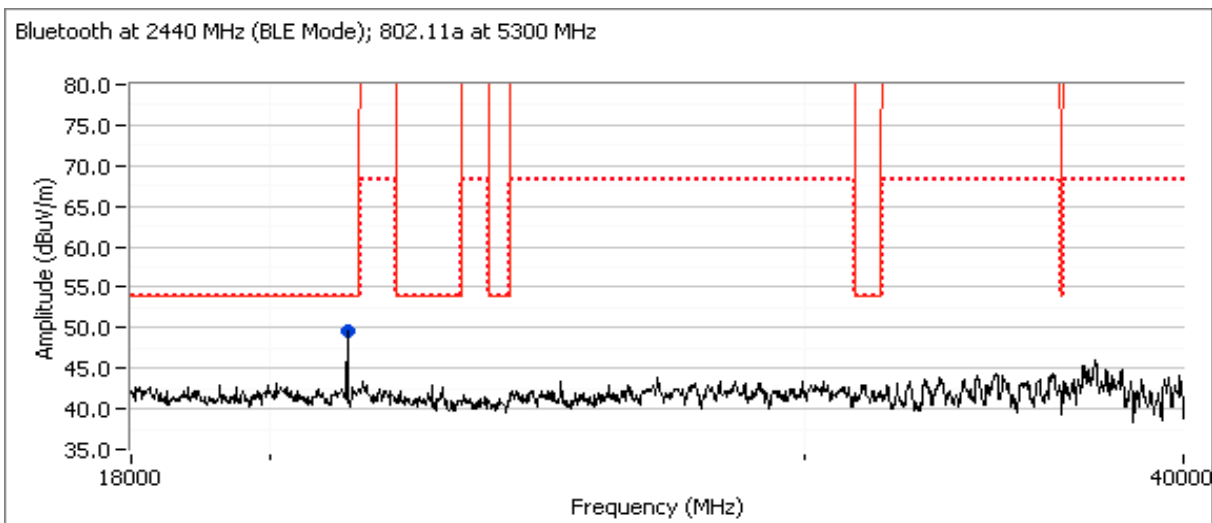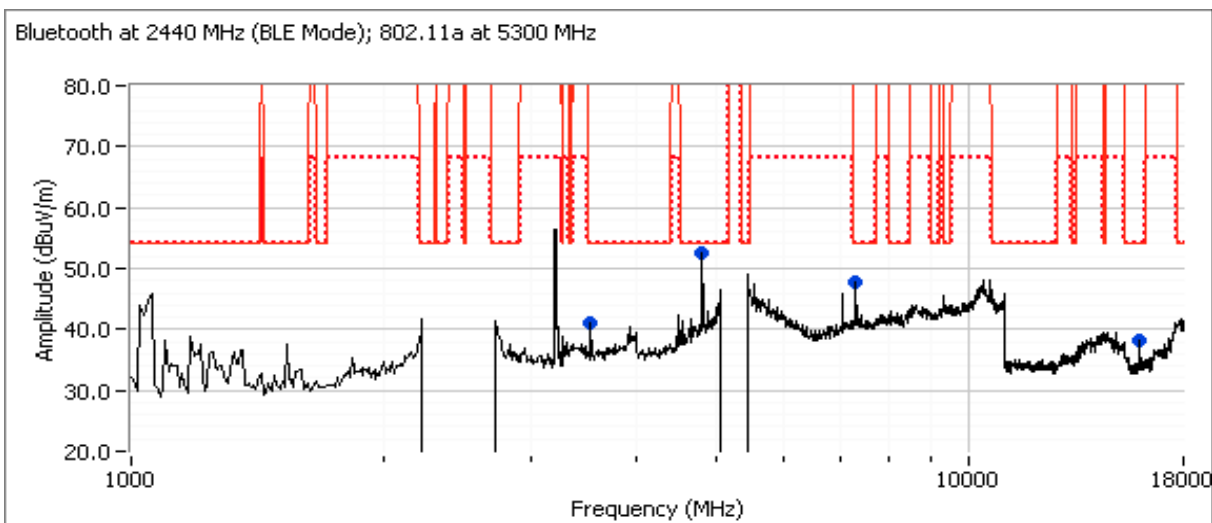

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

Run #2, Radiated Spurious Emissions

Date of Test: 10/13-14/16

Test Engineer: M. Birgani

Test Location: Chamber 5

Config. Used: 1

Config Change: -


EUT Voltage: 120V/ 60Hz

Freq: 2440 Mode: BLE
 Tx Chain: - Data Rate: 1Mbps
 Freq: 5785 Mode: 11a
 Tx Chain: 4Tx Data Rate: 6Mbps

Run #2a: 30-1000MHz

Frequency	Level	Pol	15.209 / 15.247 / 15E		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
226.916	35.2	H	46.0	-10.8	QP	178	2.9	QP (1.00s)
75.152	27.4	V	40.0	-12.6	QP	242	1.0	QP (1.00s)
34.669	25.1	V	40.0	-14.9	QP	121	1.0	QP (1.00s)
149.378	27.6	H	43.5	-15.9	QP	59	1.1	QP (1.00s)
296.025	29.5	H	46.0	-16.5	QP	178	2.1	QP (1.00s)
384.060	21.4	H	46.0	-24.6	QP	173	1.6	QP (1.00s)

Bluetooth at 2440 MHz (BLE Mode); 802.11a at 5785 MHz

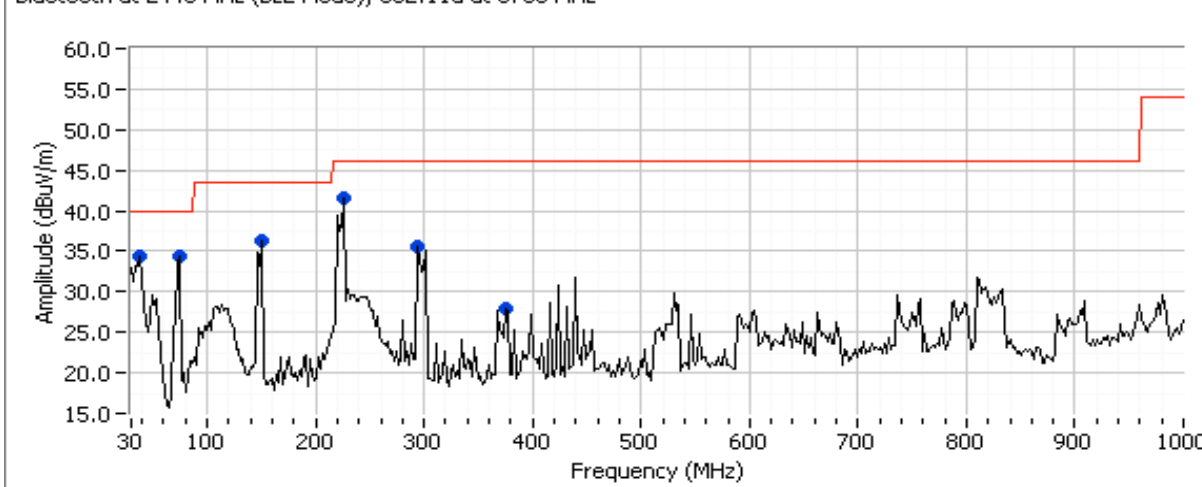

EMC Test Data



Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

Run #2b: 1000-40000MHz

Freq:	2440	Mode:	BLE
Tx Chain:	-	Data Rate:	1Mbps
Freq:	5785	Mode:	11a
Tx Chain:	4Tx	Data Rate:	6Mbps

Frequency	Level	Pol	15.209 / 15E		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.080	52.1	H	54.0	-1.9	VAVG	295	1.67	BLE 2nd Harmonic
11569.940	50.6	H	54.0	-3.4	Avg	130	1.11	VB 3 kHz, note 2.
17359.600	64.0	H	68.3	-4.3	PK	242	2.49	
11569.940	61.4	H	74.0	-12.6	PK	130	1.11	
23139.830	51.7	V	68.3	-16.6	PK	144	1.51	
4880.530	54.6	H	74.0	-19.4	PK	295	1.67	BLE 2nd Harmonic

Client:	Google, Inc.	Job Number:	JD101521 and ID101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	B

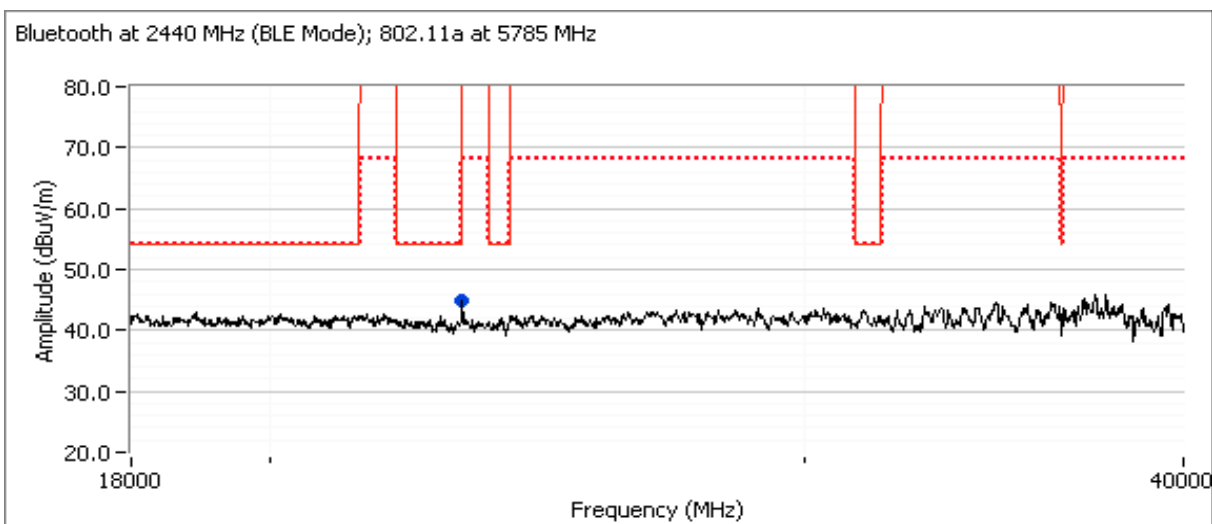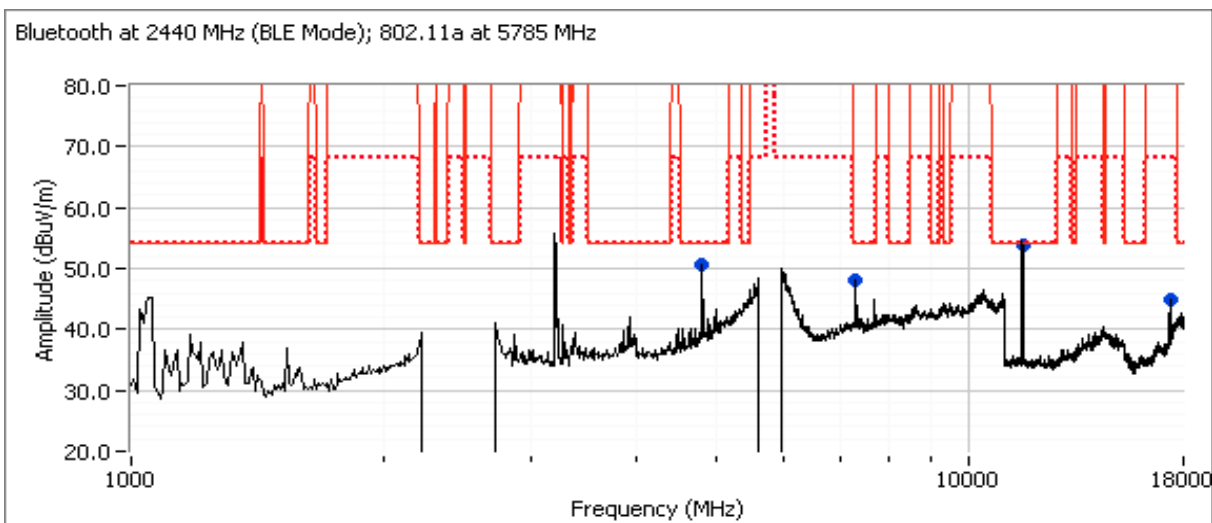

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

RSS-247 and FCC 15.247 (FHSS) Measurements Power, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/10/16 and 10/13/16
 Test Engineer: J. Caizzi; M. Birgani
 Test Location: Fremont Chamber #7

Config. Used: -
 Config Change: -
 EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

Unless stated otherwise the EUT was operating such that it constantly hopped on either the low, center or high channels.

Ambient Conditions:

Temperature: 22-24 °C
 Rel. Humidity: 40-45 %

Summary of Results

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
1 - Basic	30 - 25000 MHz - Transmitter Radiated Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	52.0 dBμV/m @ 4804.1 MHz (-2.0 dB)
2 - EDR	30 - 25000 MHz - Transmitter Radiated Spurious Emissions	FCC Part 15.209 / 15.247(c)	Pass	51.5 dBμV/m @ 4804.1 MHz (-2.5 dB)
3	30 - 25000 MHz - Transmitter Conducted Spurious Emissions	FCC Part 15.247(c)	Pass	All emissions <20dBc
4	Output Power	15.247(b)	Pass	Basic: 2.2dBm (1.7mW) EDR: 5.8dBm (3.8mW)
5	20dB Bandwidth	15.247(a)	Pass	Basic: 856kHz EDR: 1270kHz
5	Channel Occupancy	15.247(a)	Pass	Complies with BT specification
5	Number of Channels	15.247(a)	Pass	79 channels

Client: Google, Inc.	Job Number: 0D101521 and 1D101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BT (Basic)	1Mbps	76.0%	Yes	2.88	1.2	2.4	347
BT (EDR)	3 Mbps	72.9%	Yes	2.73	1.4	2.7	366

Sample Notes

Sample S/N: GTCFNS1630E0091

Driver:

Chain 1

Port Assignment: J21

Notes

Testing of the EDR mode was performed using 8PSK modulation

Testing of the EDR 8PSK modulation was considered representative of the PI/4PSK modulation



EMC Test Data

Client:	Google, Inc.	Job Number:	JD101521 and JD101837
Model:	GFHD254	T-Log Number:	T101543
Contact:	Weifeng Pan	Project Manager:	Deepa Shetty
Standard:	FCC 15.247 and 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 30 - 25,000 MHz., Bluetooth Basic.

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 2:	Emission in non-restricted band, refer to antenna conducted results.
Note 3:	Emission is unmodulated, with 100% duty cycle. It is also not directly related to carrier; when transmission is stopped, the emission remains, and it does not change frequency when the channel is changed.
Note 4:	Emission has constant duty cycle < 98%, average measurement performed: RBW=1MHz, VBW>1/T but not less than 10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear voltage correction factor
Note 5:	Emission is unmodulated, with 100% duty cycle.

**NTS**

WE ENGINEER SUCCESS

EMC Test Data

Client: Google, Inc.	Job Number: JD101521 and JD101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Date of Test: 10/10/2016 & 10/11/16
 Test Engineer: John Caizzi

Test Location: Chamber 7

Run #1a: Low Channel @ 2402 MHz**Band Edge Signal Field Strength**


Date of Test: 10/13/2016

Test Location: Chamber 7

Test Engineer: M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2354.020	37.8	H	54.0	-16.2	VAVG	61	2.1	RB 1 MHz; VB: 1 kHz; note 4
2353.810	47.9	H	74.0	-26.1	PK	61	2.1	RB 1 MHz; VB: 3 MHz
2367.390	36.8	V	54.0	-17.2	VAVG	148	2.5	RB 1 MHz; VB: 1 kHz; note 4
2363.790	46.1	V	74.0	-27.9	PK	148	2.5	RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 1 kHz; Average (Black Trace); RB 1 MHz; VB 3 MHz; Peak (Blue Trace)

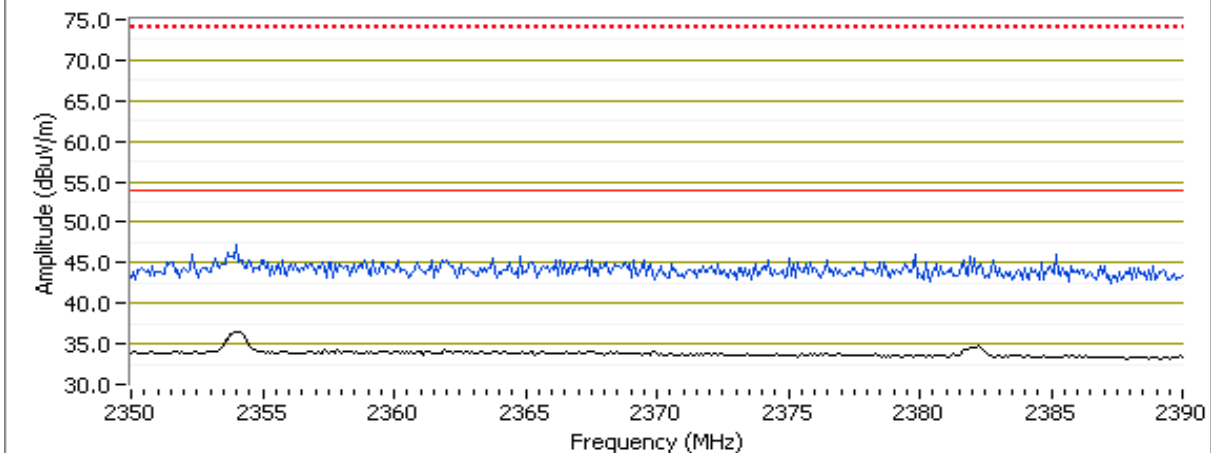



EMC Test Data

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Other Spurious Emissions

Date of Test: 10/10-11/2016 & 10/13/16

Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani



Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4804.080	52.0	H	54.0	-2.0	VAVG	283	1.72	RB 1 MHz; VB: 1 kHz; note 4
19295.970	49.5	V	54.0	-4.5	AVG	303	2.42	Note 3
4803.780	54.3	H	74.0	-19.7	PK	283	1.72	
19295.920	54.2	V	74.0	-19.8	PK	303	2.42	
3202.720	56.8	H	-	-	Pk	22	1.29	Note 2
12864.000	49.8	V	-	-	PK	126	1.9	Note 2
1058.330	42.4	V	-	-	PK	151	2.5	Measured in run 2c.
6430.000	52.0	V	-	-	PK	54	2.5	Measured in run 2c.
7320.000	48.4	H	-	-	PK	190	2.0	Measured in run 2c.

**NTS**

WE ENGINEER SUCCESS

EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

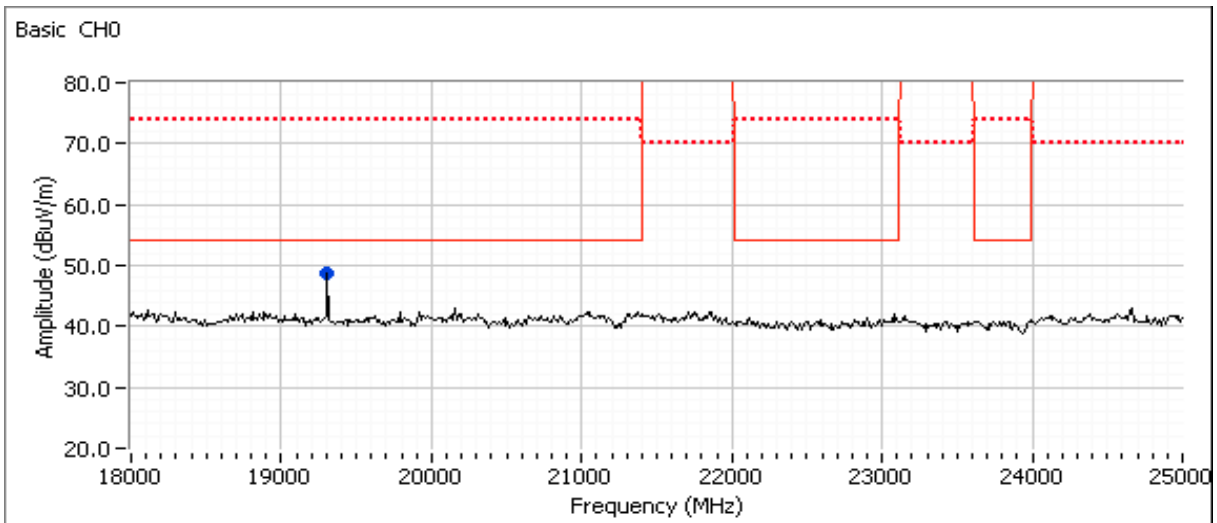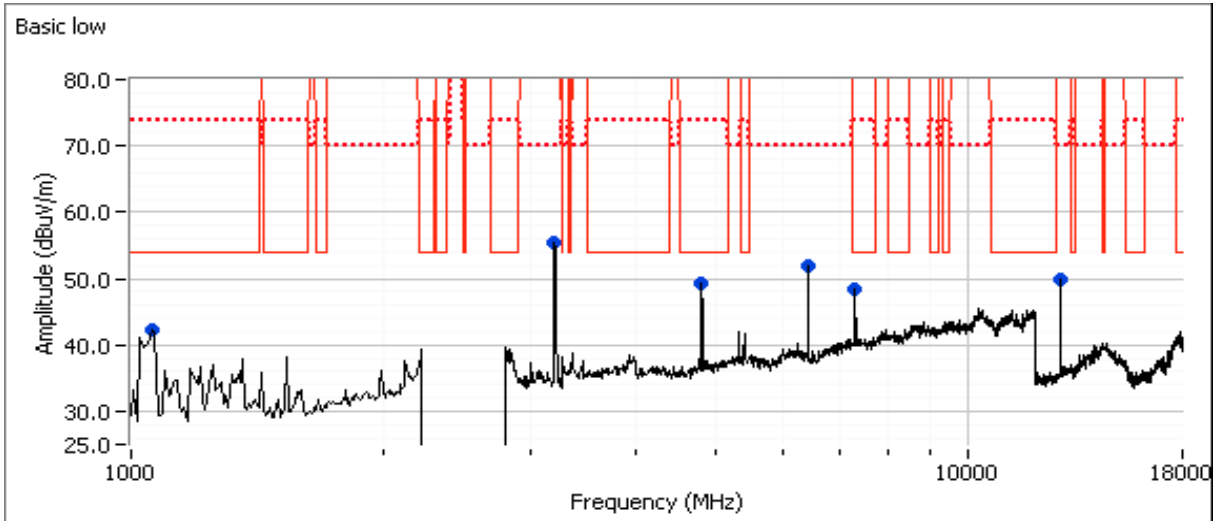



EMC Test Data

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #1b: Center Channel @ 2441 MHz

Spurious Emissions



Date of Test: 10/10-11/2016 & 10/13/16

Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
19306.670	48.5	V	54.0	-5.5	Pk	310	2.5	Note 3, pk vs avg limit
4881.910	47.8	H	54.0	-6.2	VAVG	282	1.75	RB 1 MHz; VB: 1 kHz; note 4
4882.510	51.4	H	74.0	-22.6	PK	282	1.75	
3254.700	55.5	H	-	-	Pk	353	1.49	Note 2
12860.000	50.6	V	-	-	PK	129	1.9	RB=100kHz, VB=300kHz; note 2
6430.000	51.8	V	-	-	Pk	60	2.5	Measured in run 2c.
7320.000	46.9	H	-	-	Pk	196	2.0	Measured in run 2c.
1058.330	42.4	H	-	-	Pk	196	1.0	Measured in run 2c.

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

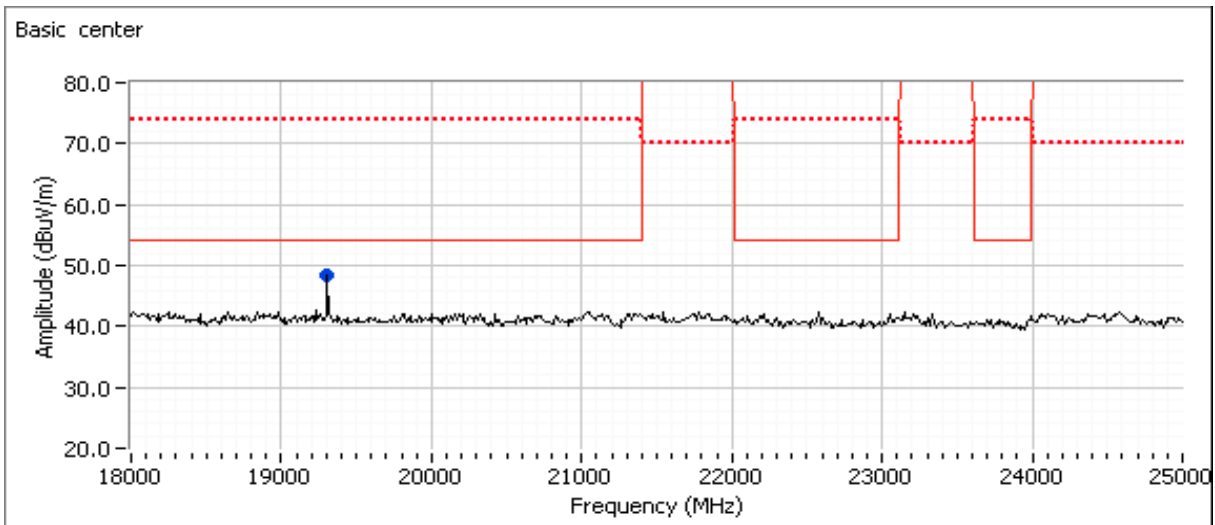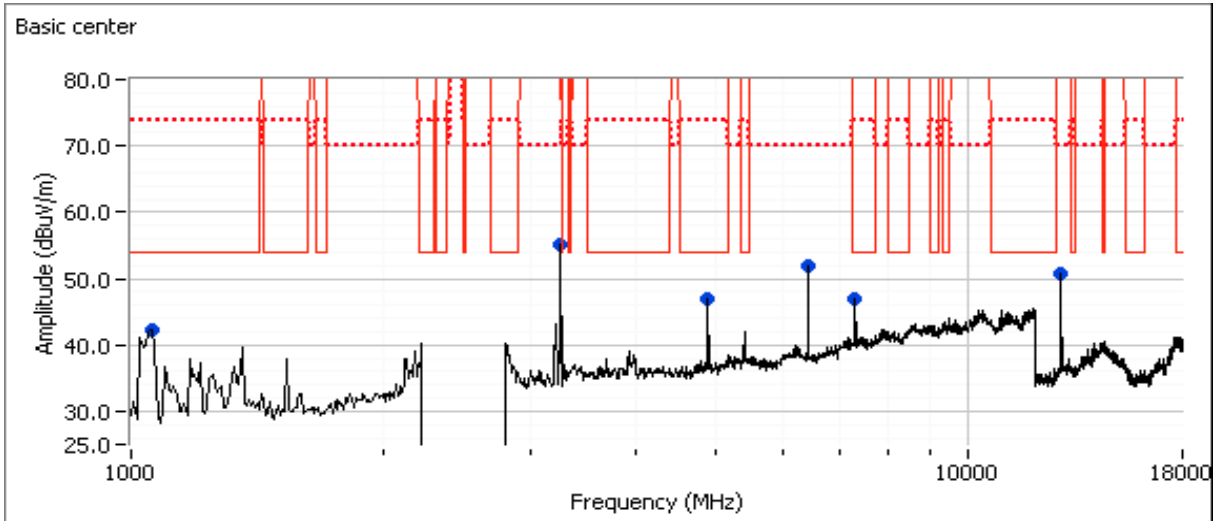

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #1c: High Channel @ 2480 MHz


Band Edge Signal Field Strength

Date of Test: 10/13/2016

Test Location: Chamber 7

Test Engineer: M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2484.000	38.7	H	54.0	-15.3	VAVG	261	2.0	RB 1 MHz; VB: 1 kHz; note 4
2483.500	47.6	H	74.0	-26.4	PK	261	2.0	RB 1 MHz; VB: 3 MHz
2483.510	36.8	V	54.0	-17.2	VAVG	146	2.0	RB 1 MHz; VB: 1 kHz; note 4
2484.310	47.2	V	74.0	-26.8	PK	146	2.0	RB 1 MHz; VB: 3 MHz

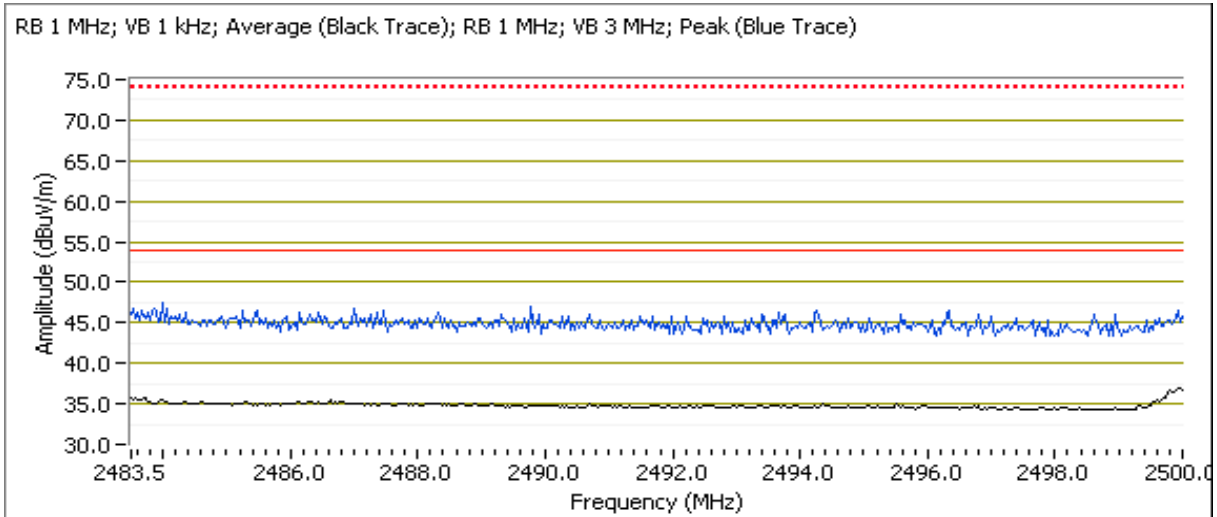



EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Other Spurious Emissions



Date of Test: 10/10-11/2016 & 10/13/16

Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
19306.670	49.9	V	54.0	-4.1	Pk	306	2.5	Note 3, pk vs avg limit
4960.150	44.9	H	54.0	-9.1	VAVG	281	1.76	RB 1 MHz; VB: 1 kHz; note 4
4960.410	49.3	H	74.0	-24.7	PK	281	1.76	
3306.750	55.6	H	-	-	Pk	30	1.00	Note 2
12864.340	51.3	V	-	-	PK	128	1.9	Note 2
1050.000	42.5	H	-	-	Pk	192	1.0	Measured in run 2c.
6430.000	51.8	V	-	-	Pk	60	2.5	Measured in run 2c.
7320.000	46.2	H	-	-	Pk	189	1.5	Measured in run 2c.

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

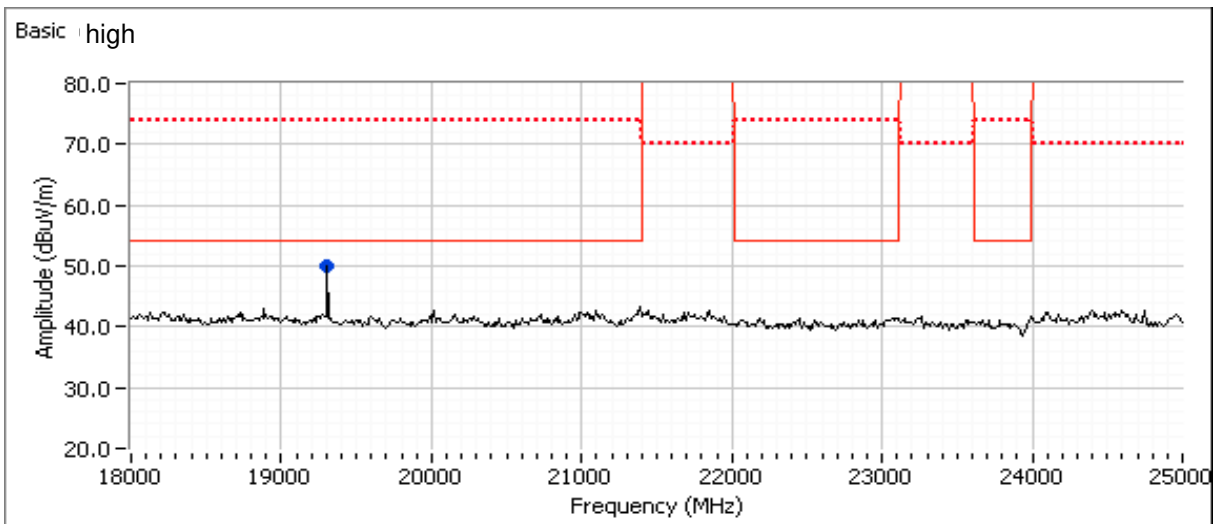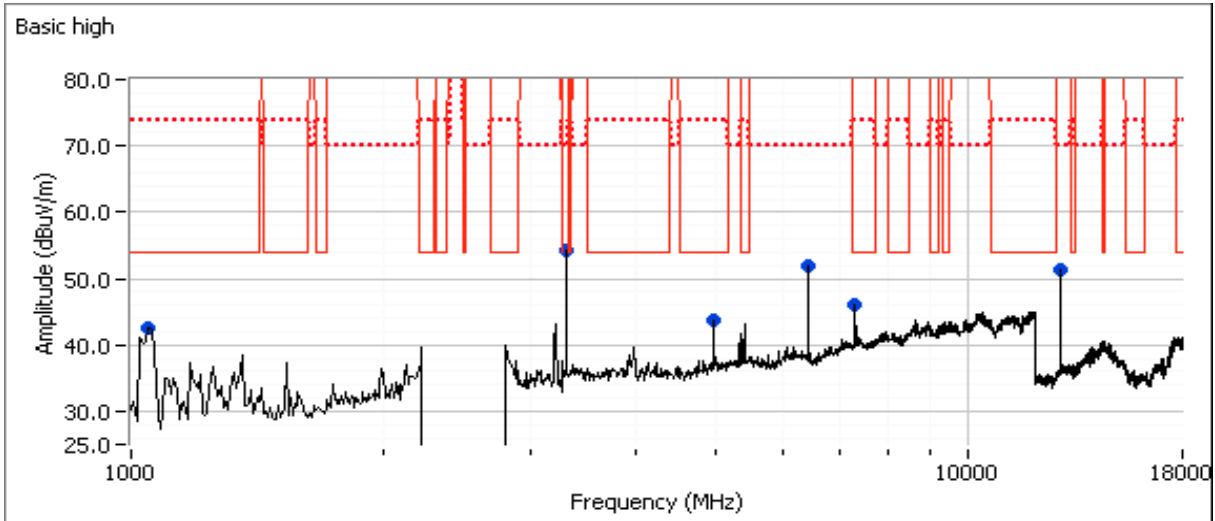

Client: Google, Inc.	Job Number: 0D101321 and 1D101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #2: Radiated Spurious Emissions, 30 - 25,000 MHz., Bluetooth EDR.

Run #2a: Low Channel @ 2402 MHz


Band Edge Signal Field Strength

Date of Test: 10/13/2016

Test Location: Chamber 7

Test Engineer: M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2354.090	35.3	H	54.0	-18.7	VAVG	192	1.3	RB 1 MHz; VB: 1 kHz; note 4
2371.480	47.6	H	74.0	-26.4	PK	192	1.3	RB 1 MHz; VB: 3 MHz
2353.770	34.8	V	54.0	-19.2	VAVG	153	2.1	RB 1 MHz; VB: 1 kHz; note 4
2352.240	46.4	V	74.0	-27.6	PK	153	2.1	RB 1 MHz; VB: 3 MHz

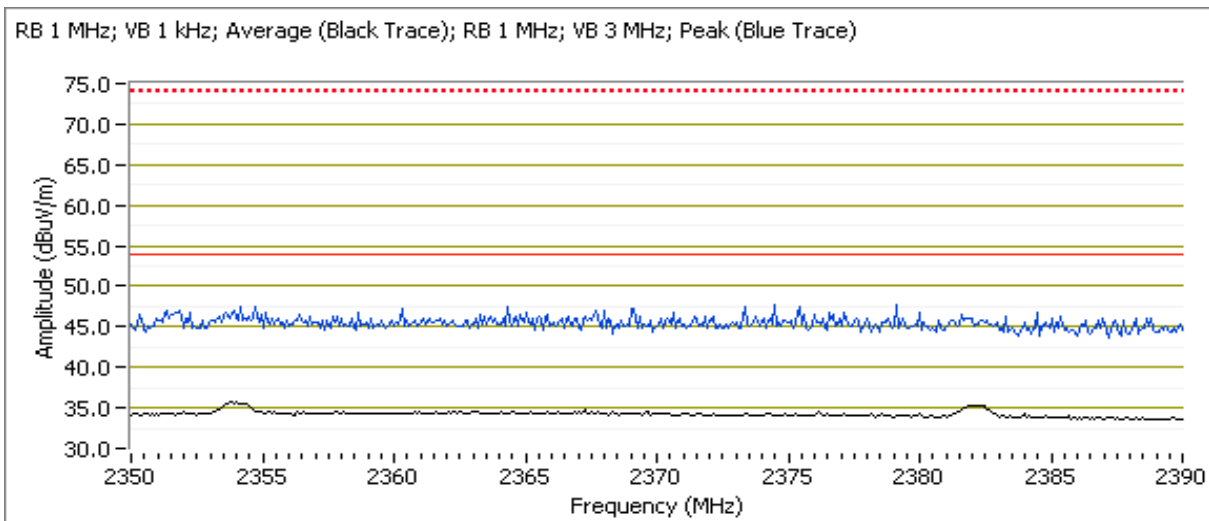



EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and 1D101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Other Spurious Emissions



Date of Test: 10/10-11/2016 & 10/13/16

Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4804.120	51.5	H	54.0	-2.5	VAVG	282	1.73	RB 1 MHz; VB: 1 kHz; note 4
19306.670	49.0	V	54.0	-5.0	Pk	307	2.5	Note 3, pk vs. avg limi
4804.170	57.4	H	74.0	-16.6	PK	282	1.73	
3202.700	56.8	H	-	-	Pk	21	1.30	Note 2
12864.190	51.8	V	-	-	PK	128	1.9	Note 2
1050.000	42.0	H	-	-	Pk	185	1.5	Measured in run 2c.
6440.000	51.8	V	-	-	Pk	60	2.5	Measured in run 2c.
7320.000	47.2	H	-	-	Pk	197	2.0	Measured in run 2c.

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

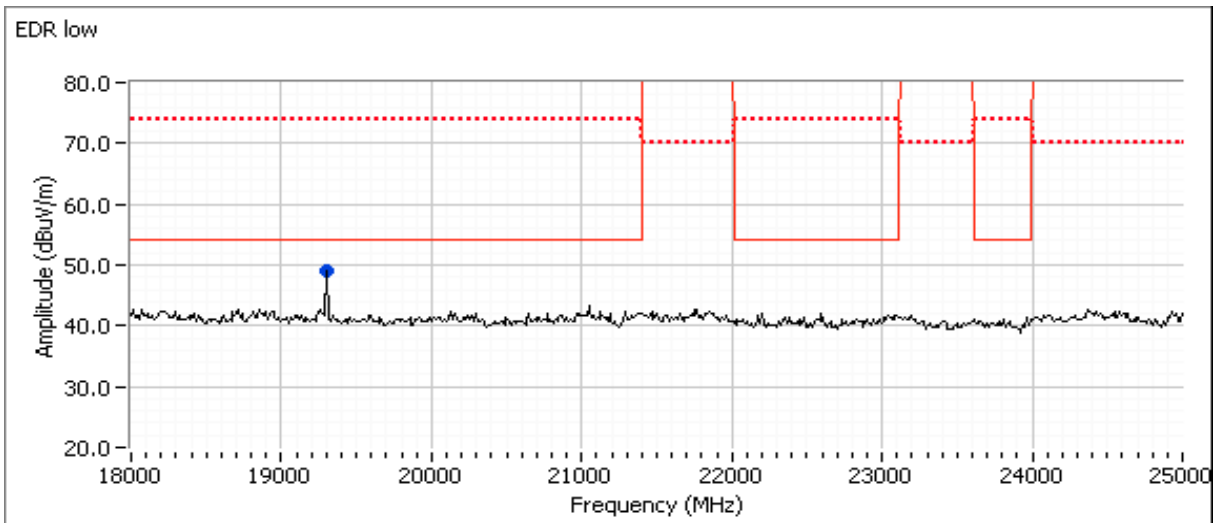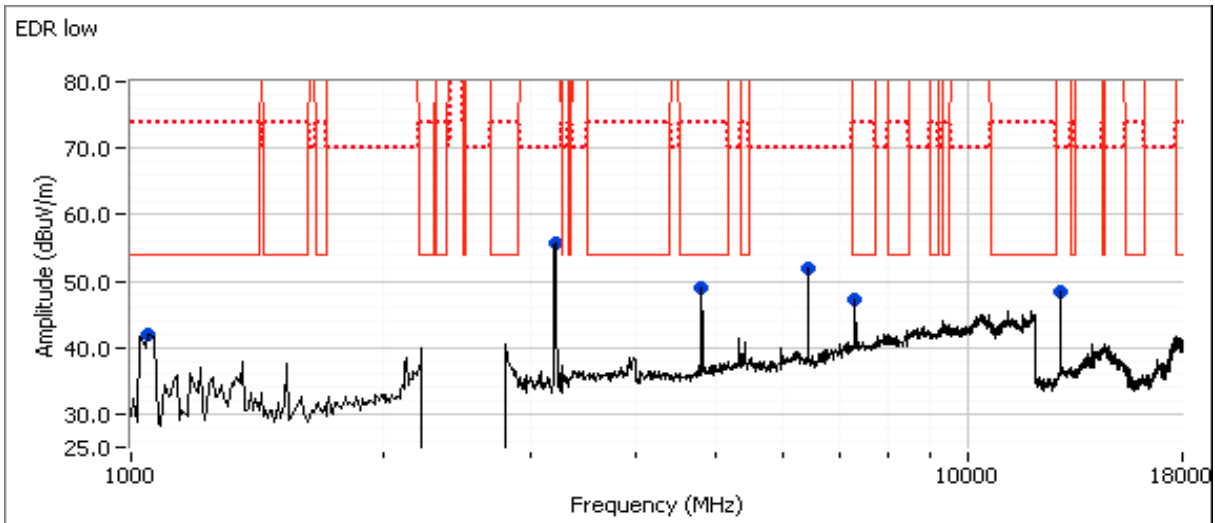



EMC Test Data

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #2b: Center Channel @ 2441 MHz

Date of Test: 10/10-11/2016 & 10/13/16



Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani

Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
19306.670	49.2	V	54.0	-4.8	Pk	306	2.5	Note 3, pk vs. avg limit
4882.200	45.7	H	54.0	-8.3	VAVG	284	1.75	RB 1 MHz; VB: 1 kHz; note 4
4882.110	54.5	H	74.0	-19.5	PK	284	1.75	
3254.700	55.8	H	-	-	Pk	358	1.07	Note 2
12864.490	48.3	V	-	-	PK	123	1.9	Note 2
6440.000	51.5	V	-	-	Pk	60	2.5	Measured in run 2c.
7320.000	47.1	H	-	-	Pk	196	2.0	Measured in run 2c.

Client: Google, Inc.	Job Number: 0D101521 and 1D101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

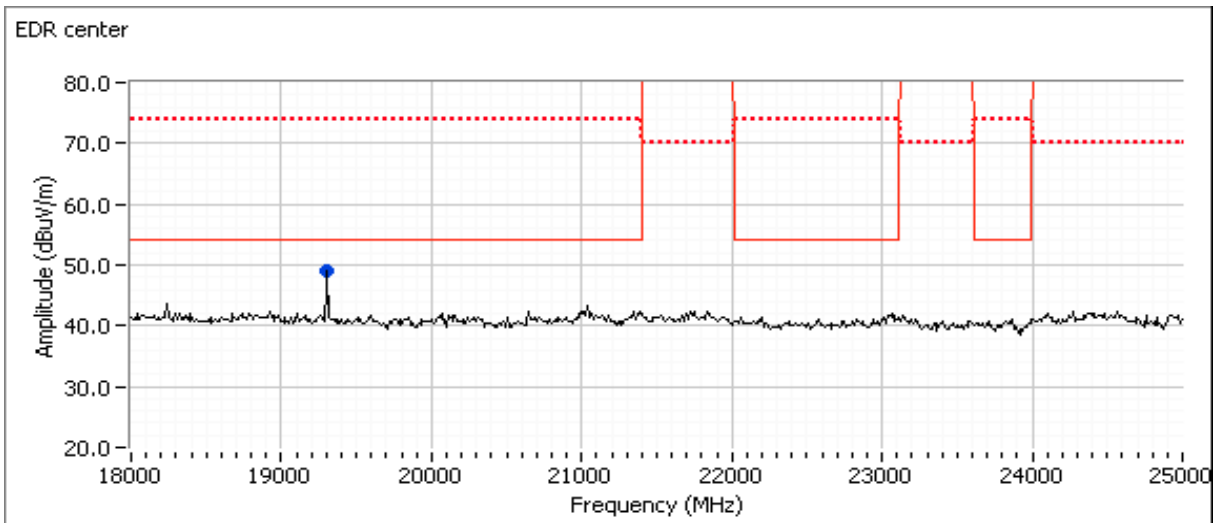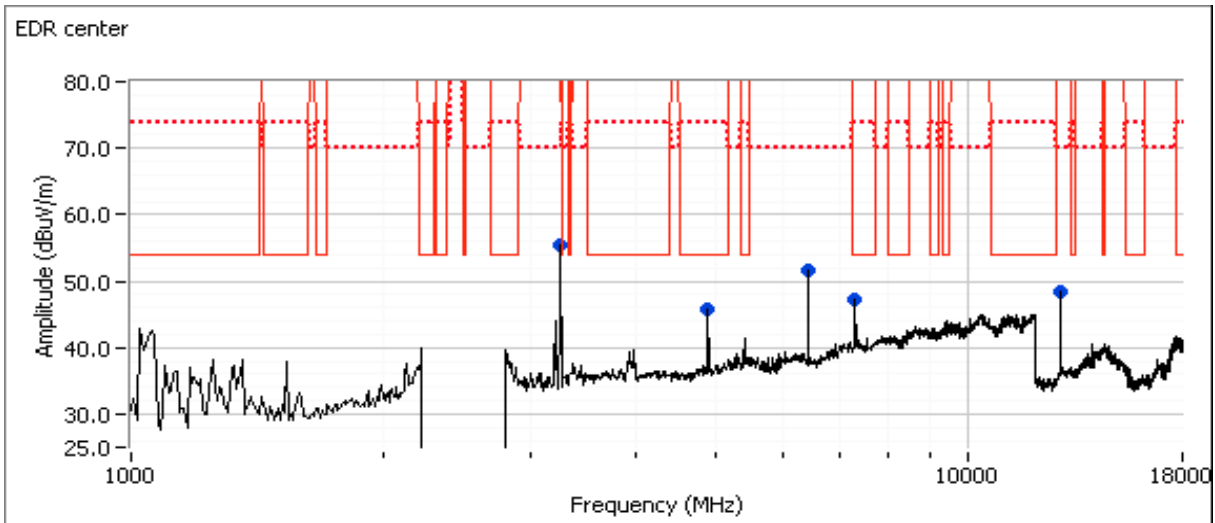



EMC Test Data

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #2c: High Channel @ 2480 MHz


Band Edge Signal Field Strength

Date of Test: 10/13/2016

Test Location: Chamber 7

Test Engineer: M. Birgani

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.700	37.9	V	54.0	-16.1	VAVG	144	1.3	RB 1 MHz; VB: 1 kHz; note 4
2492.000	47.1	V	74.0	-26.9	PK	144	1.3	RB 1 MHz; VB: 3 MHz
2483.670	38.4	H	54.0	-15.6	VAVG	178	1.3	RB 1 MHz; VB: 1 kHz; note 4
2486.150	47.0	H	74.0	-27.0	PK	178	1.3	RB 1 MHz; VB: 3 MHz

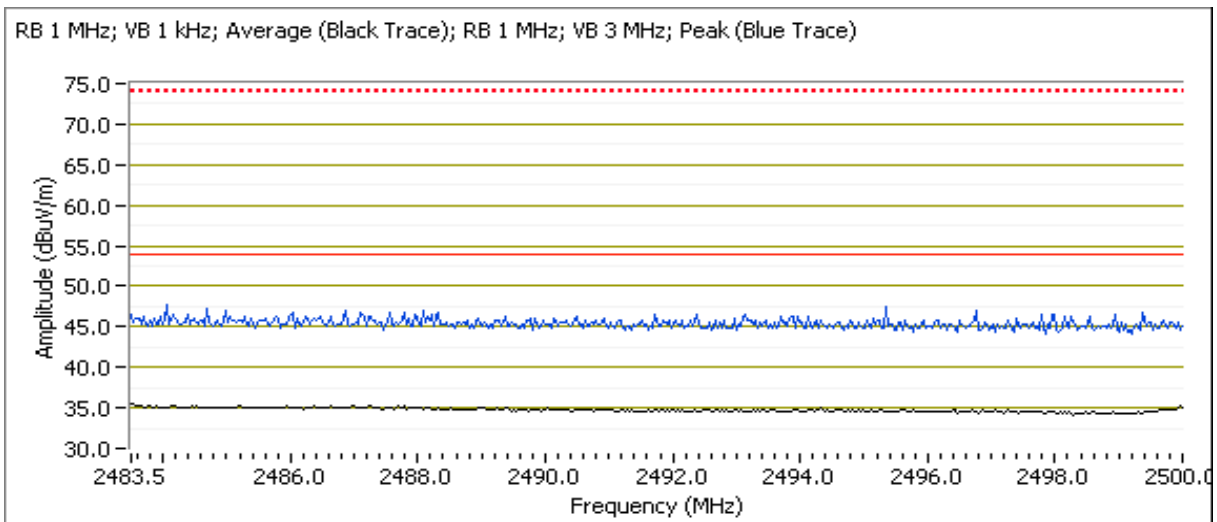



EMC Test Data

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Other Spurious Emissions

Date of Test: 10/10-11/2016 & 10/13/16

Test Location: Chamber 7

Test Engineer: J. Caizzi & M. Birgani



Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
19306.670	48.4	V	54.0	-5.6	Pk	311	2.5	Note 3, pk vs. avg limit
4959.980	45.9	H	54.0	-8.1	VAVG	283	1.72	RB 1 MHz; VB: 1 kHz; note 4
4960.160	52.3	H	74.0	-21.7	PK	283	1.72	
3306.720	55.9	H	-	-	Pk	329	1.67	Note 2
12864.490	51.6	V	-	-	Pk	126	1.89	Note 2

Emissions from the EUT not related to the Bluetooth Radio

1042.730	32.5	H	54.0	-21.5	AVG	194	1.28	
1042.400	55.9	H	74.0	-18.1	PK	194	1.28	
5400.170	41.4	V	54.0	-12.6	AVG	92	1.11	Note 5
5400.170	48.7	V	74.0	-25.3	PK	92	1.11	
6431.970	52.9	V	-	-	Pk	58	2.50	RB 100 kHz, VB 300 kHz, note 5.
7319.920	46.8	H	54.0	-7.2	AVG	192	1.98	Note 5
7319.900	52.0	H	74.0	-22.0	PK	192	1.98	

Note 3 Emission is unmodulated, with 100% duty cycle. It is also not directly related to carrier; when transmission is stopped, the emission remains, and it does not change frequency when the channel is changed.

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

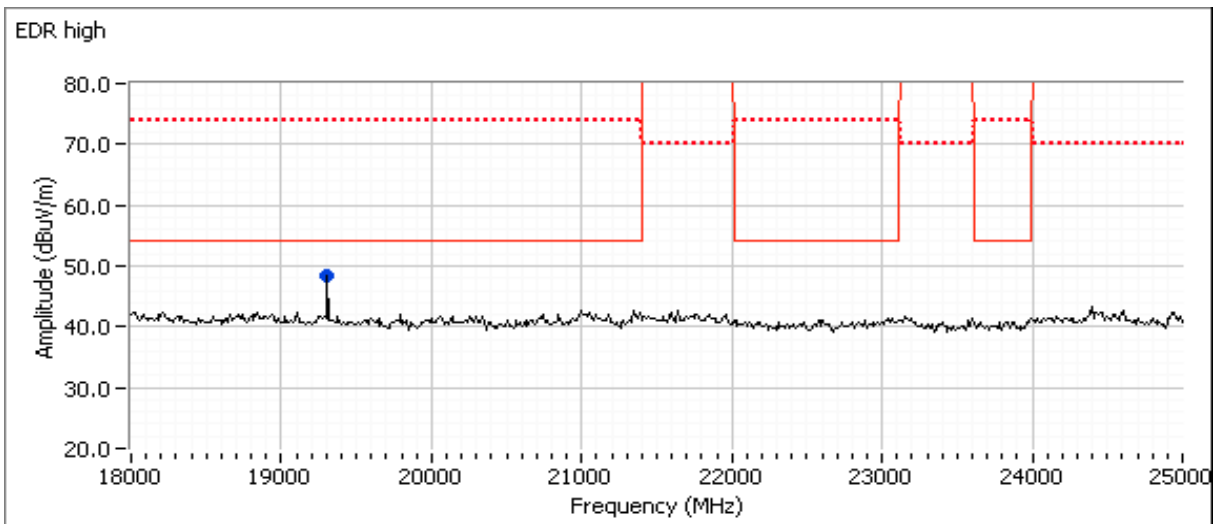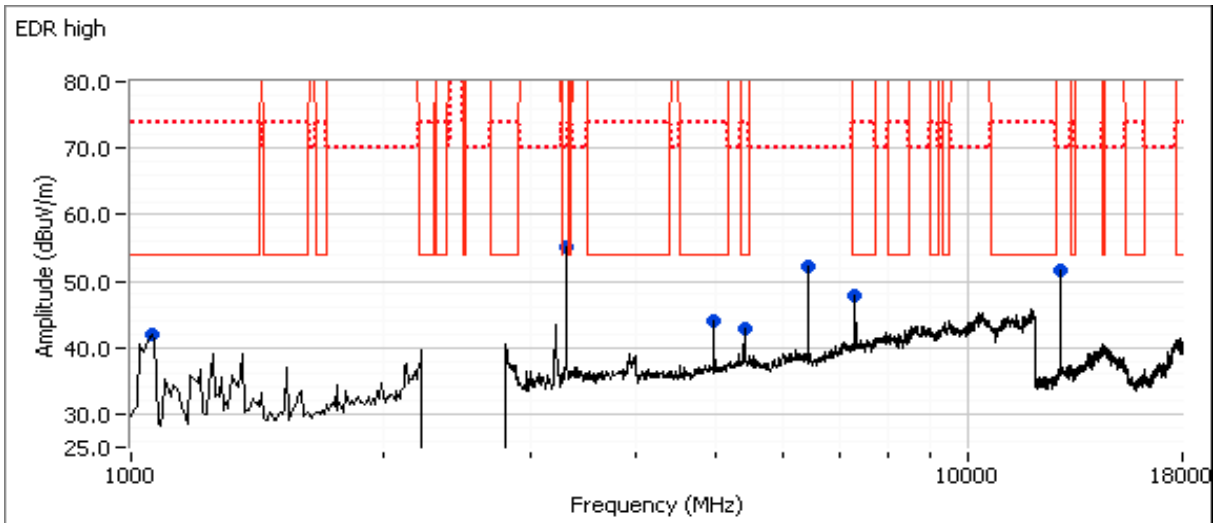

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #3: Antenna Conducted Spurious Emissions, 30 - 25,000 MHz.

Date of Test: 10/20/2016



Test Engineer: Rafael Varelas

Test Location: FT Lab #4B

Refer to plots below. Scans made using RBW=VB=100 KHz with the limit line set at 20dB below the highest in-band signal level with the hopping feature disabled.


Low channel

Broadband plot

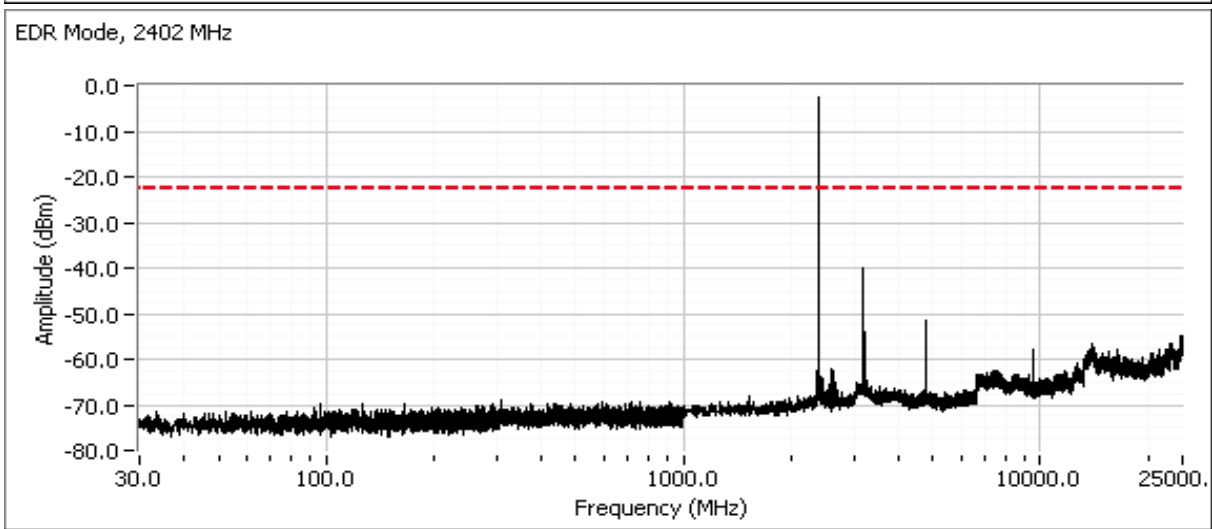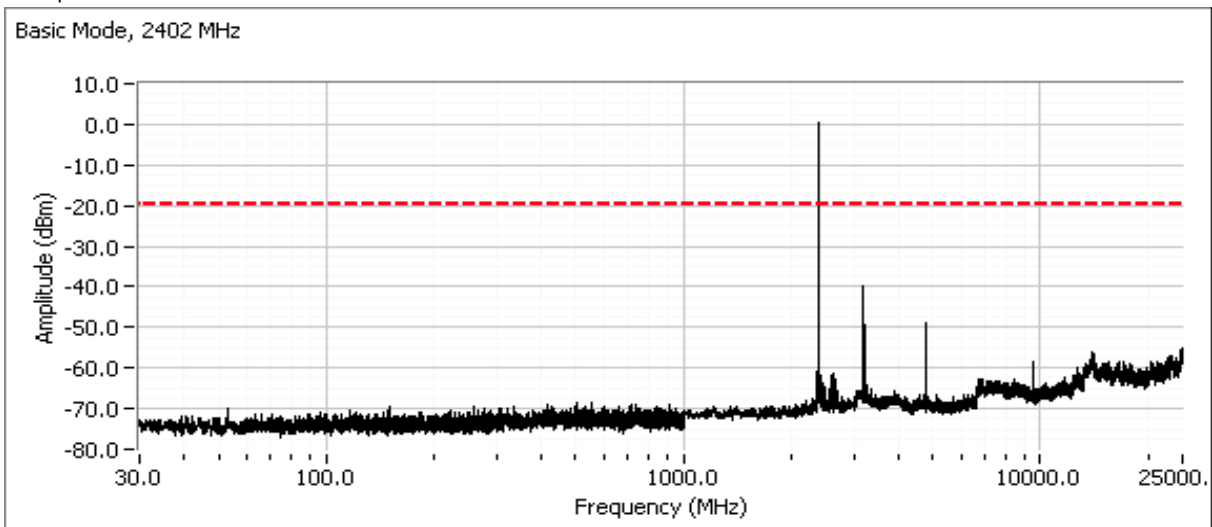

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Plot showing -20dBc at the lower band edge

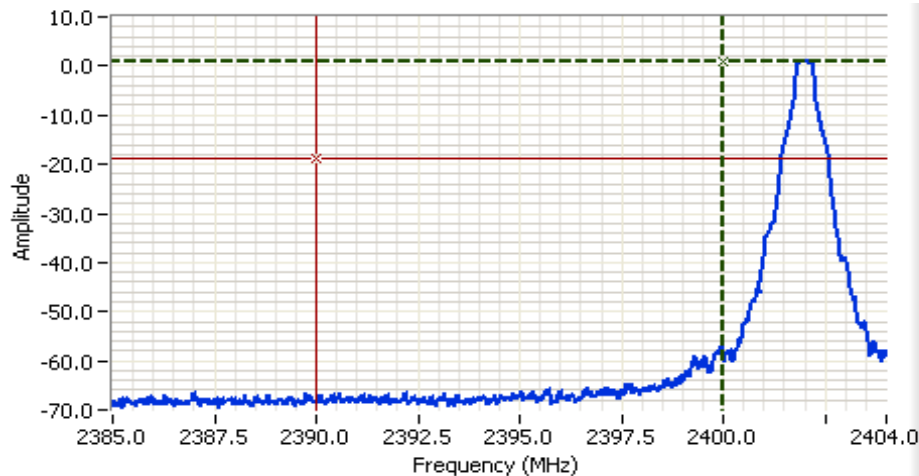


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2394.500 MHz
 SPAN: 19.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 1.9ms
 Ref Lvl: 10.8 DBM

Comments

-20dBc
 Basic Mode, 2402 MHz

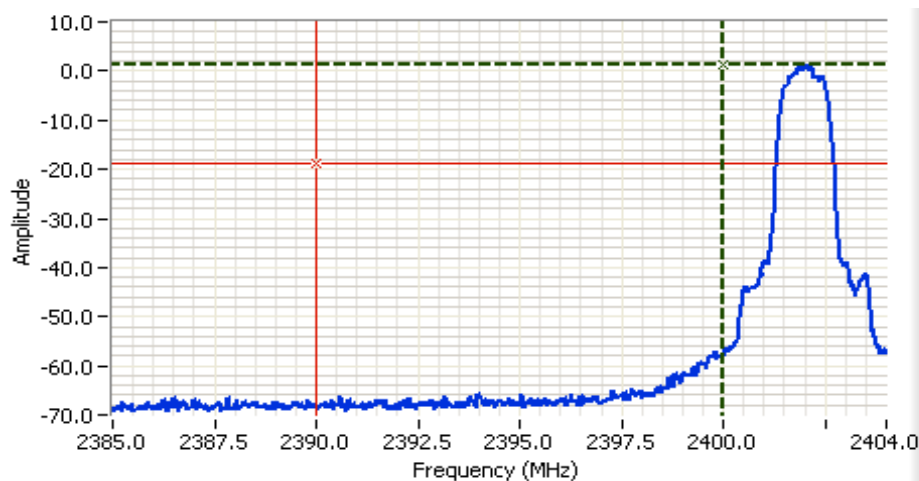

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2394.500 MHz
 SPAN: 19.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 1.9ms
 Ref Lvl: 10.8 DBM

Comments



-20dBc
 EDR Mode, 2402 MHz



Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A



Center channel

Broadband plot

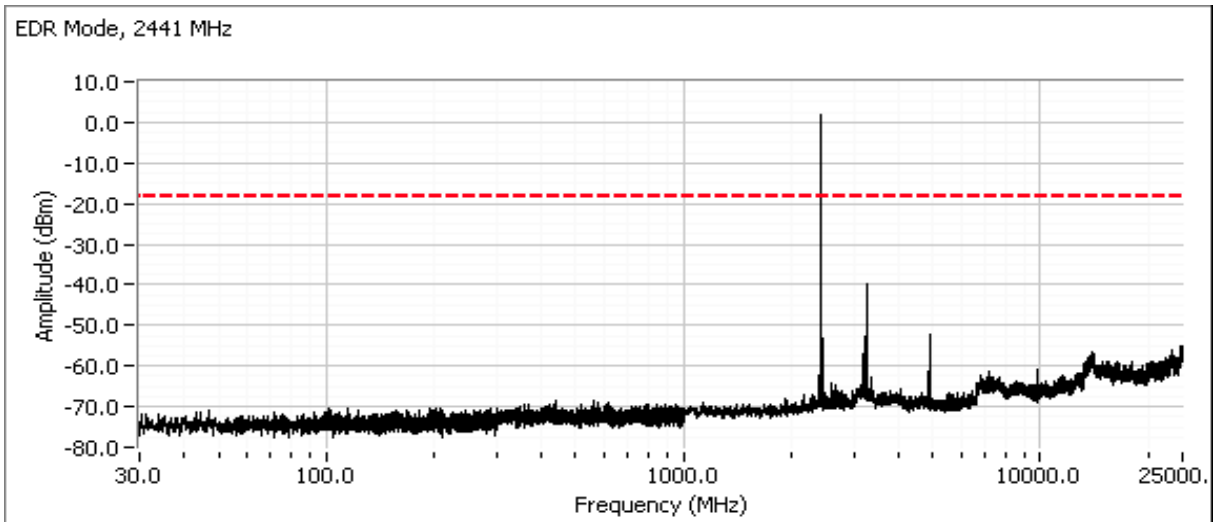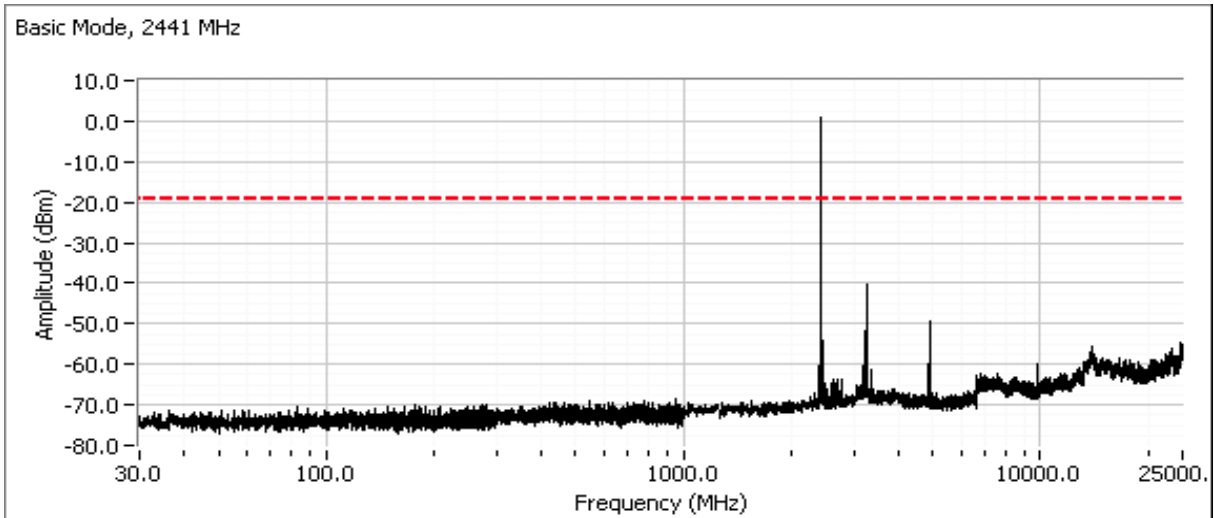


Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

High channel Broadband plot

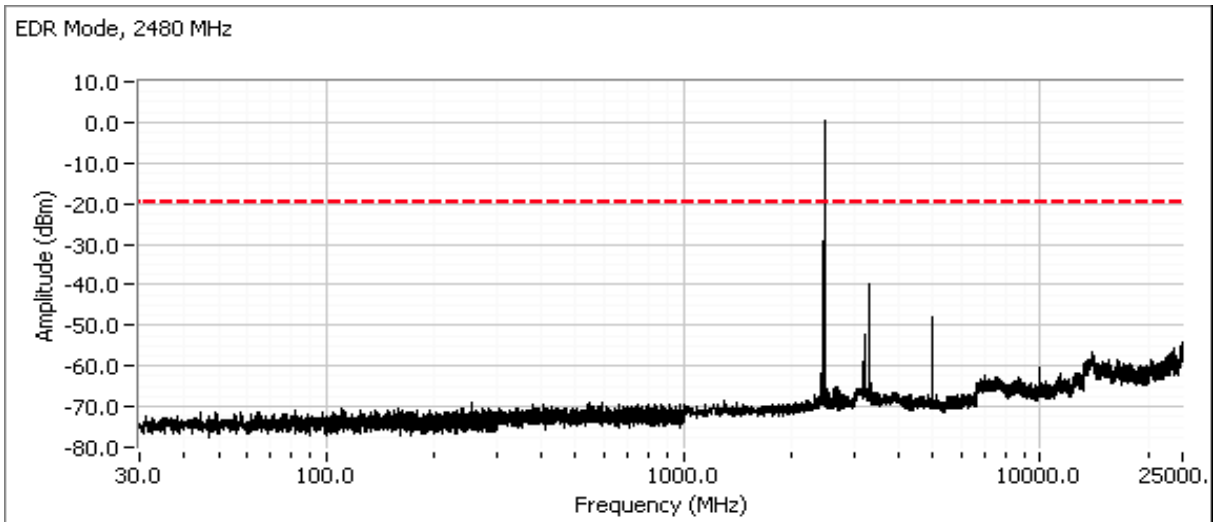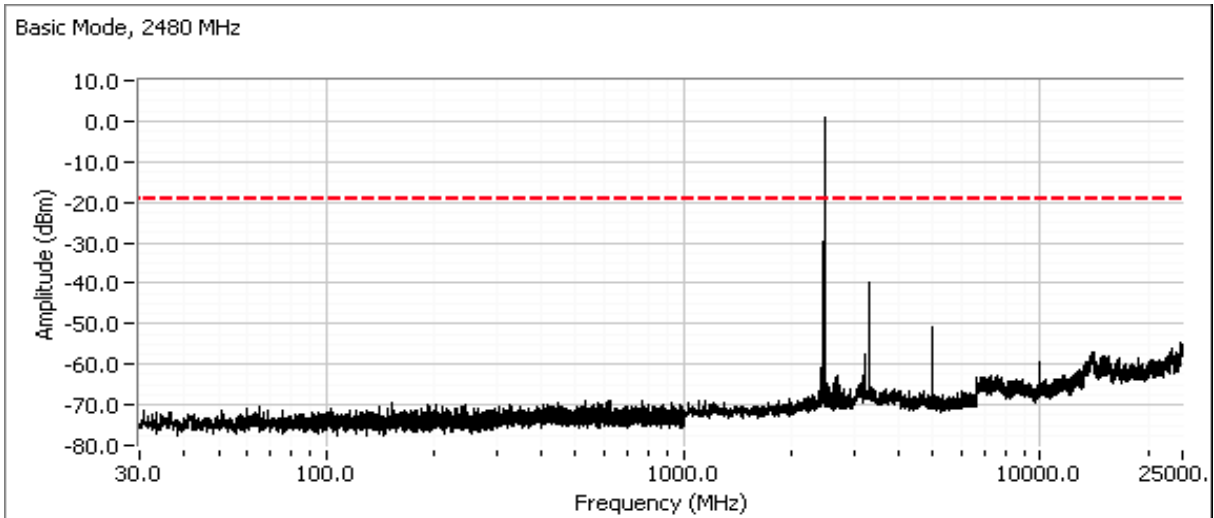

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Plot showing -20dBc at the upper band edge

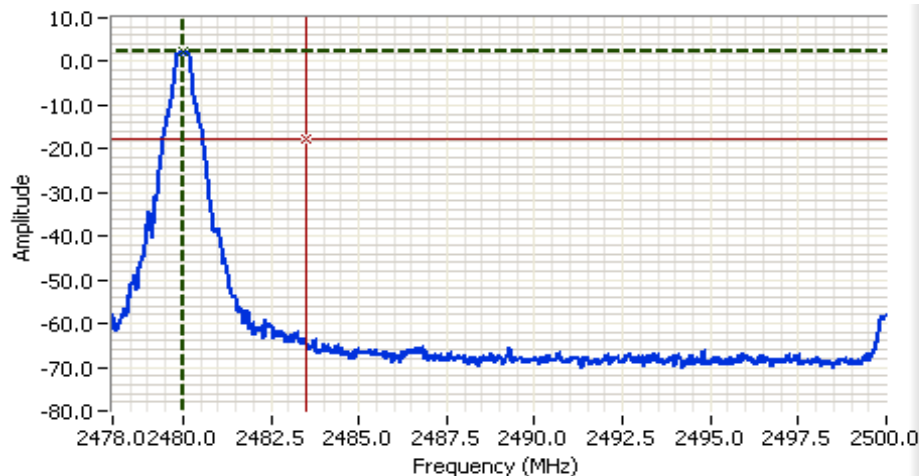


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2489.000 MHz
 SPAN: 22.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 2.1ms
 Ref Lvl: 10.8 DBM


Comments

-20dBc
 Basic Mode, 2480 MHz



Delta Freq. 3.500

Delta Amplitude 20.0

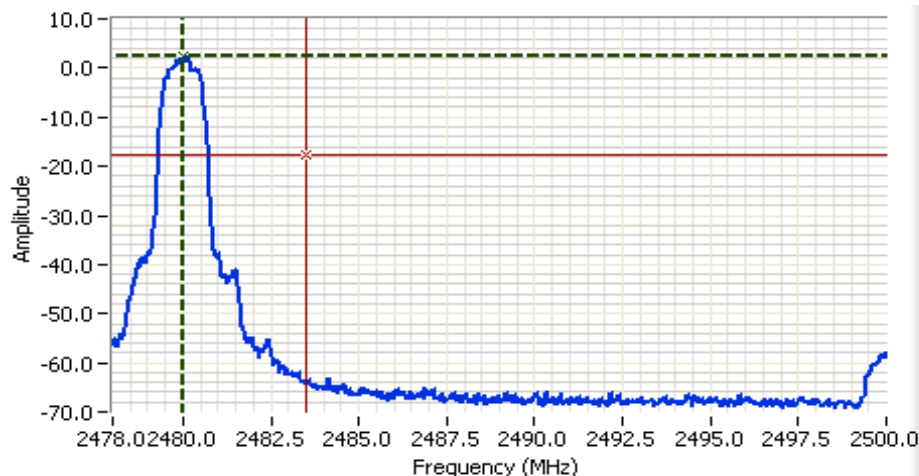


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2489.000 MHz
 SPAN: 22.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 2.1ms
 Ref Lvl: 10.8 DBM

Comments

-20dBc
 EDR Mode, 2480 MHz



Delta Freq. 3.500

Delta Amplitude 20.0




Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Refer to plots below. Scans made using RBW=VB=100 KHz with the limit line set at 20dB below the highest in-band signal level with the **hopping feature enabled** to show compliance with the -20dBc requirement at the allocated band edge. The spectrum analyzer is left in max hold mode until the trace stabilizes.

Low channel, hopping enabled

Plot showing -20dBc at the lower band edge

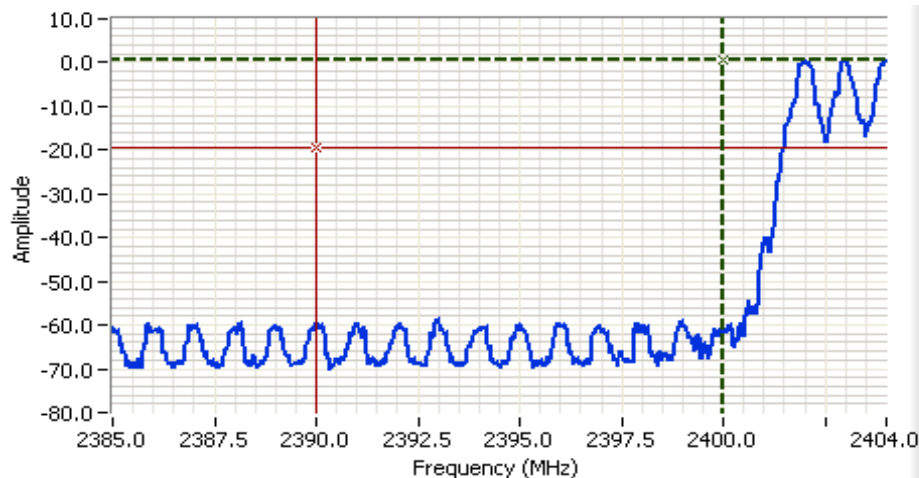

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2394.500 MHz
 SPAN: 19.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 1.9ms
 Ref Lvl: 10.8 DBM


Comments

-20dBc
 Hopping Enabled
 Basic Mode

Cursor 1	2400.0000	0.6	
Cursor 2	2390.0000	-19.4	

Delta Freq. 10.000
 Delta Amplitude 20.0

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

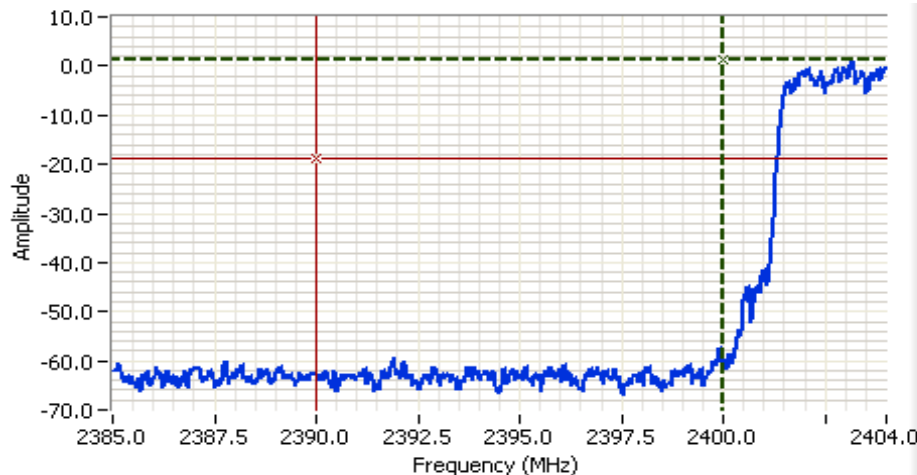


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2394.500 MHz
 SPAN: 19.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 1.9ms
 Ref Lvl: 10.8 DBM

Comments

-20dBc
 Hopping Enabled
 EDR Mode




Delta Freq. 10.000

Delta Amplitude 20.0



High channel, hopping enabled

Plot showing -20dBc at the upper band edge

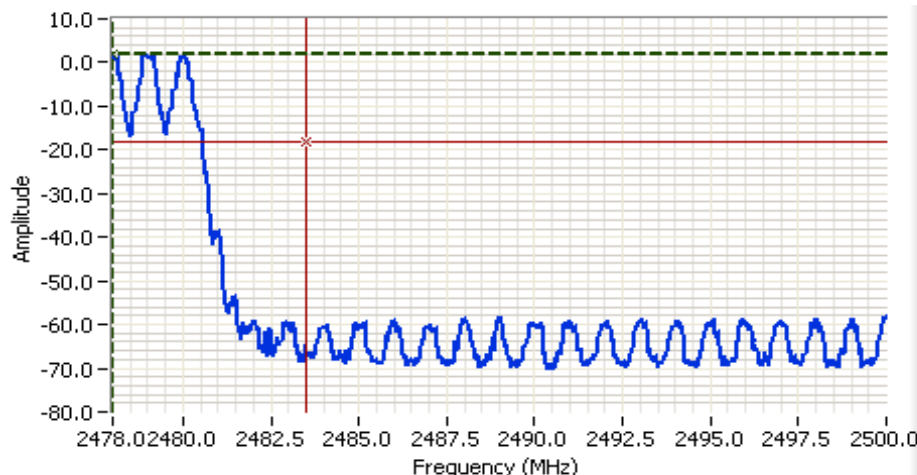


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2489.000 MHz
 SPAN: 22.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 2.1ms
 Ref Lvl: 10.8 DBM

Comments

-20dBc
 Hopping Enabled
 Basic Mode



Delta Freq. 5.500

Delta Amplitude 20.0



Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A



Analyzer Settings

Agilent Technologies, E4446A
 CF: 2489.000 MHz
 SPAN: 22.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 2.1ms
 Ref Lvl: 10.8 DBM

Comments

-20dBc
 Hopping Enabled
 EDR Mode

Cursor 1	2478.0000	0.9	
Cursor 2	2483.5000	-19.1	

Delta Freq. 5.500
 Delta Amplitude 20.0

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Date of Test: 14-Oct
 Test Engineer: Mehran Birgani

Test Location: Lab 4


Run #4: Output Power

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Maximum antenna gain: -4.0 dBi

Channel	Frequency (MHz)	Res BW	Output Power (dBm)	Output Power (W)	EIRP (W)
Low	GFSK - 2402	3 MHz	1.2	0.00132	0.00052
Mid	GFSK - 2441	3 MHz	1.8	0.00151	0.00060
High	GFSK - 2480	3 MHz	2.2	0.00166	0.00066
Low	EDR - 2402	3 MHz	4.8	0.00302	0.00120
Mid	EDR - 2441	3 MHz	5.4	0.00347	0.00138
High	EDR - 2480	3 MHz	5.8	0.00380	0.00151

Note 1: Output power measured using RBW>OBW, VBW≥3*RBW, peak detector, max hold

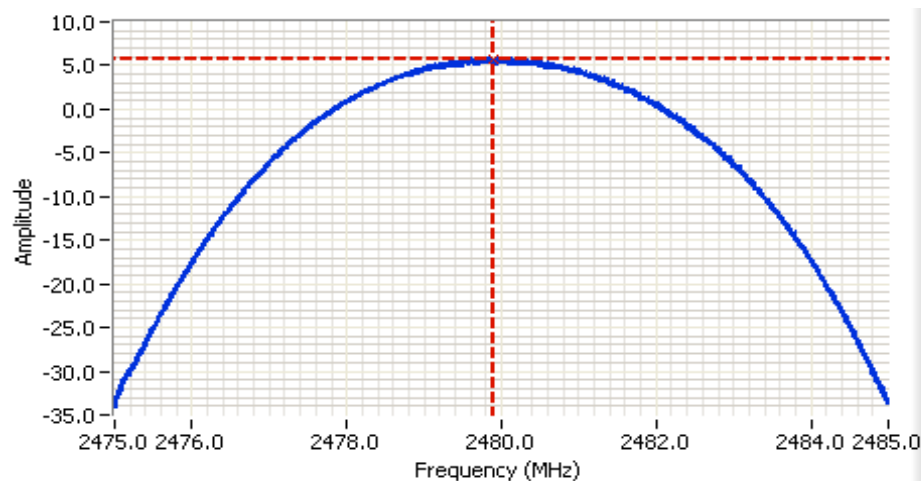

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2480.000 MHz
 SPAN: 10.000 MHz
 RB: 3.000 MHz
 VB: 8.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 1.1ms
 Ref Lvl: 12.8 DBM

Comments

Bluetooth EDR
 Peak Power: 5.8 dBm


Cursor 1	2479.8869	5.8	
	0.0000	0.0	

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Run #5: Bandwidth, Channel Occupancy, Spacing and Number of Channels

Channel	Frequency (MHz)	Resolution Bandwidth	20dB Bandwidth (kHz)
Low	GFSK 2402	20kHz	856
Mid	GFSK 2441	20kHz	856
High	GFSK 2480	20kHz	856
Low	EDR 2402	20kHz	1270
Mid	EDR 2441	20kHz	1270
High	EDR 2480	20kHz	1270

Note 1: 20dB bandwidth measured using RB = 10 kHz, VB = 30 kHz (VB > RB)

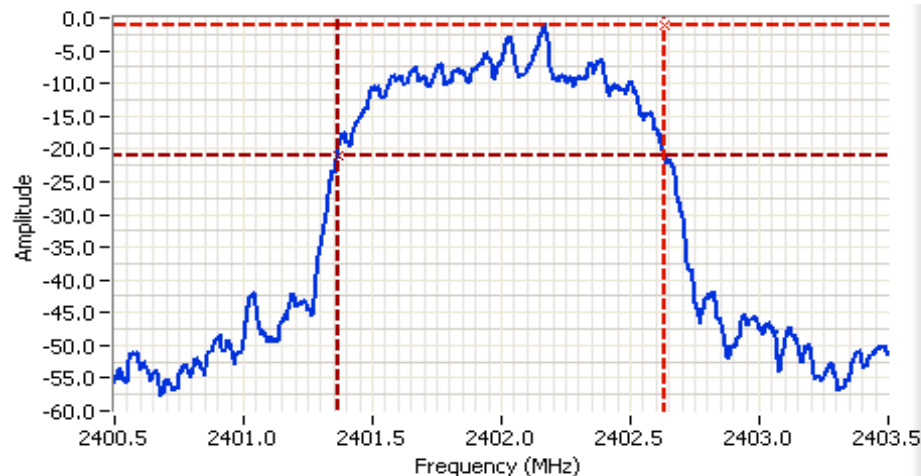

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 3.000 MHz
 RB: 20.0 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 7.1ms
 Ref Lvl: 12.8 DBM

Comments

Bluetooth EDR
 20dB BW: 1.270 MHz

Cursor 1	2402.6351	-1.2	
Cursor 2	2401.3649	-21.2	

Delta Freq. 1.270
 Delta Amplitude 20.0

Client: Google, Inc.	Job Number: 0D101321 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

Frequency hopping systems in the **2400-2483.5 MHz** band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. (Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.)

The device complies with the Bluetooth protocol and employs a minimum of 20 of the available 79 hopping channels when employing adaptive frequency hopping and all 79 channels when not. Channels are selected in a pseudo random manner to ensure, on average, all channels are used equally.

The hopping rate is 1600 hops per second although any new channel may be used for a single hop slot, 3 hop slots or 5 hop slots. The dwell time per channel is, therefore either 0.625ms (single slot), 1.875ms (three slot) or 3.125ms (five slot). The average time of occupancy will not exceed 0.4s in any time interval of 0.4s multiplied by the number of channels being used.

Maximum 20dB bandwidth: 1270 kHz
 Channel spacing: 1005 kHz
 Transmission time per hop: 2.88 ms
 Number of channels (N): 79

Pass

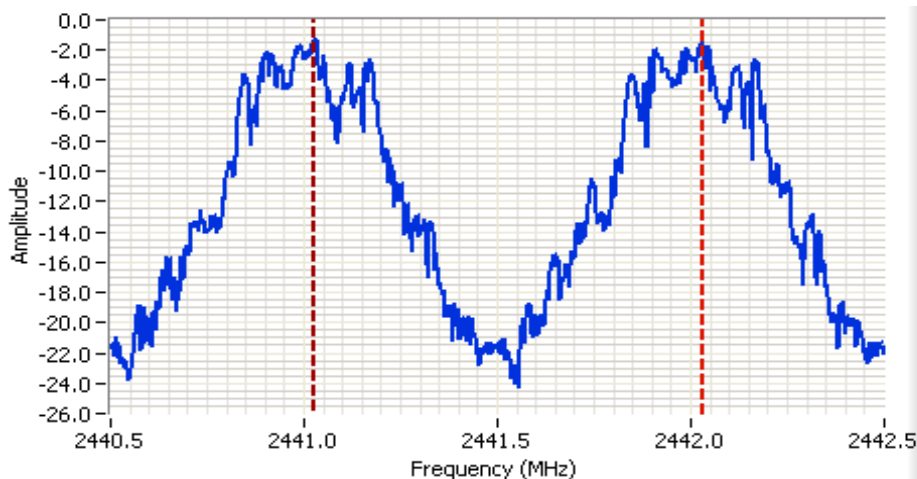

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2441.500 MHz
 SPAN: 2.000 MHz
 RB: 30.0 kHz
 VB: 1.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 5.1ms
 Ref Lvl: 12.8 DBM


Comments

Channel Spacing: 1005 kHz

Cursor 1	2442.0312	3.6	
Cursor 2	2441.0260	1.8	

Delta Freq. 1.005
 Delta Amplitude 1.7

Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

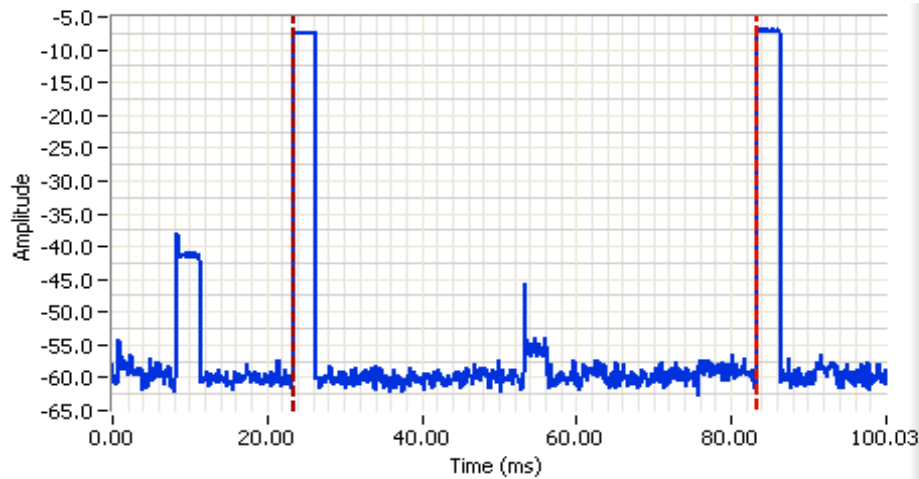







Analyzer Settings

Agilent Technologies, E4446A
 CF: 2441.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 100.0ms
 Ref Lvl: 12.8 DBM

Comments


Time between hops: 59.9ms

Cursor 1	83.3610	-1.0			
Cursor 2	23.4312	-1.3			

Delta Time (ms) 59.93

Delta Amplitude 0.3

Client: Google, Inc.	Job Number: 0D101321 and 1D101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

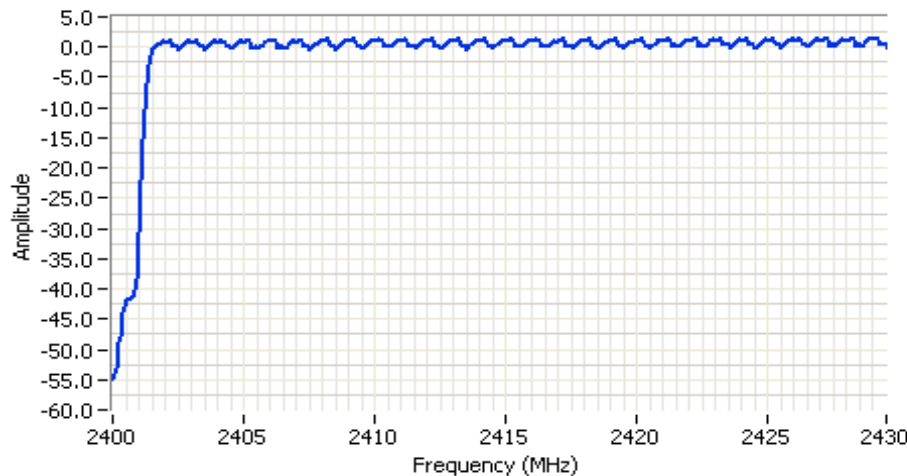

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2441.000 MHz
 SPAN: 82.000 MHz
 RB: 300 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 5.4ms
 Ref Lvl: 12.8 DBM


Comments

Number of channels: 79

Cursor 1	2486.4844	12.7	
Cursor 2	2397.6510	10.2	

Delta Freq. 88.833

Delta Amplitude 2.5

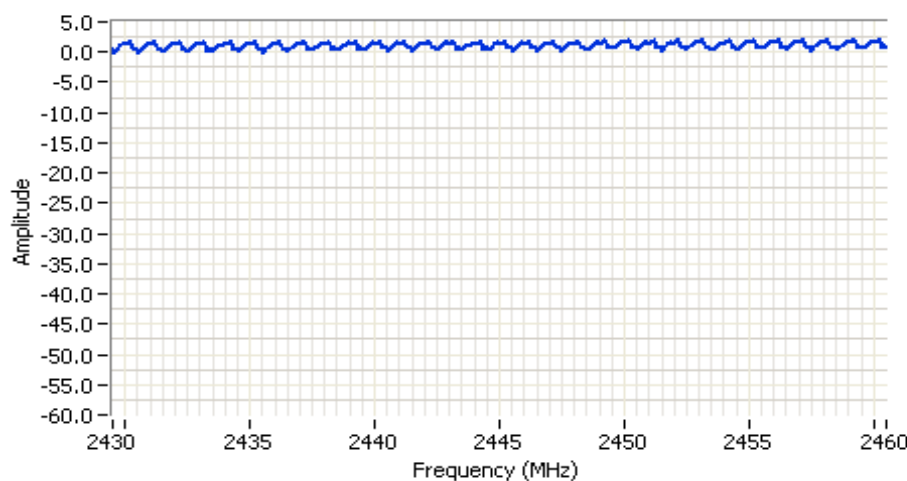

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2441.000 MHz
 SPAN: 82.000 MHz
 RB: 300 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 5.4ms
 Ref Lvl: 12.8 DBM

Comments

Number of channels: 79


Cursor 1	2486.4844	12.7	
Cursor 2	2397.6510	10.2	

Delta Freq. 88.833

Delta Amplitude 2.5



Client: Google, Inc.	Job Number: 0D101521 and ID101837
Model: GFHD254	T-Log Number: T101543
Contact: Weifeng Pan	Project Manager: Deepa Shetty
Standard: FCC 15.247 and 15.407	Project Coordinator: -
	Class: N/A

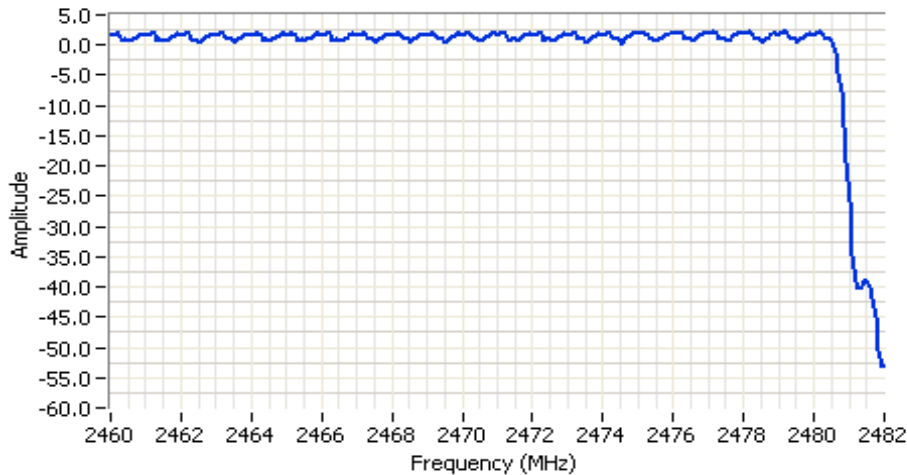







Analyzer Settings

Agilent Technologies, E4446A
 CF: 2441.000 MHz
 SPAN: 82.000 MHz
 RB: 300 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 12.8 DB
 Sweep Time: 5.4ms
 Ref Lvl: 12.8 DBM

Comments

NUmber of channels: 79

Cursor 1	2486.4844	12.7			
Cursor 2	2397.6510	10.2			

Delta Freq. 88.833

Delta Amplitude 2.5

End of Report

This page is intentionally blank and marks the last page of this test report.