

### #01\_GSM850 Ant 1\_GPRS (4 Tx slots)\_Left Cheek\_0mm\_Ch128


Communication System: GPRS-FDD; Frequency: 824.200 MHz  
Medium: HSL\_850\_240225 Medium parameters used:  $f=824.200$  MHz;  $\sigma=0.92$  S/m;  $\epsilon_r=42.53$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.58, 9.16, 10.94); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.398 W/kg; SAR (10g) = 0.258 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.04 dB  
SAR (1g) = 0.409 W/kg; SAR (8g) = 0.276 W/kg; SAR (10g) = 0.258 W/kg  
Smallest distance from peaks to all points 3 dB below = 11.0 mm  
Ratio of SAR at M2 to SAR at M1 = 91.4 %

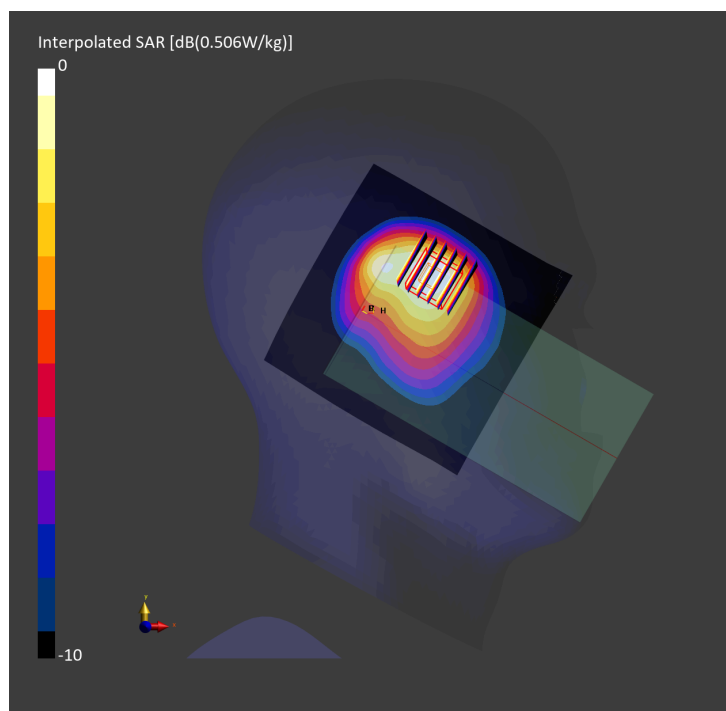

#02\_GSM1900 Ant 1\_GPRS (4 Tx slots)\_Left Cheek\_0mm\_Ch512


Communication System: GPRS-FDD; Frequency: 1850.200 MHz  
Medium: HSL\_1900\_240217 Medium parameters used:  $f=1850.200$  MHz;  $\sigma=1.38$  S/m;  $\epsilon_r=40.0$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.18, 7.89, 9.24); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.388 W/kg; SAR (10g) = 0.173 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm  
Power Drift = 0.03 dB  
SAR (1g) = 0.439 W/kg; SAR (8g) = 0.198 W/kg; SAR (10g) = 0.177 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.2 mm  
Ratio of SAR at M2 to SAR at M1 = 80.0 %

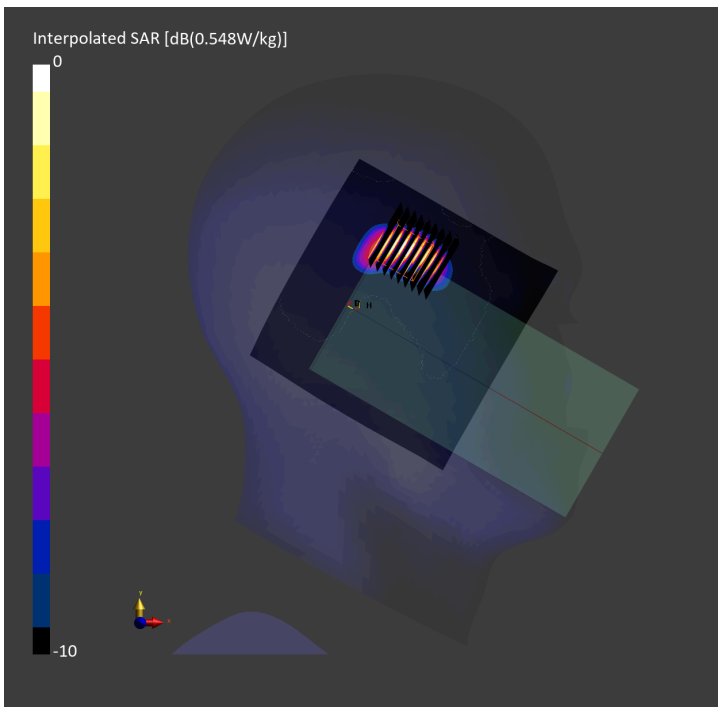

### #03\_WCDMA II Ant 1\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch9400


Communication System: WCDMA; Frequency: 1880.000 MHz  
Medium: HSL\_1900\_240217 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.41$  S/m;  $\epsilon_r=40.0$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.18, 7.89, 9.24); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.442 W/kg; SAR (10g) = 0.203 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.461 W/kg; SAR (8g) = 0.202 W/kg; SAR (10g) = 0.181 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.7 mm  
Ratio of SAR at M2 to SAR at M1 = 76.1 %

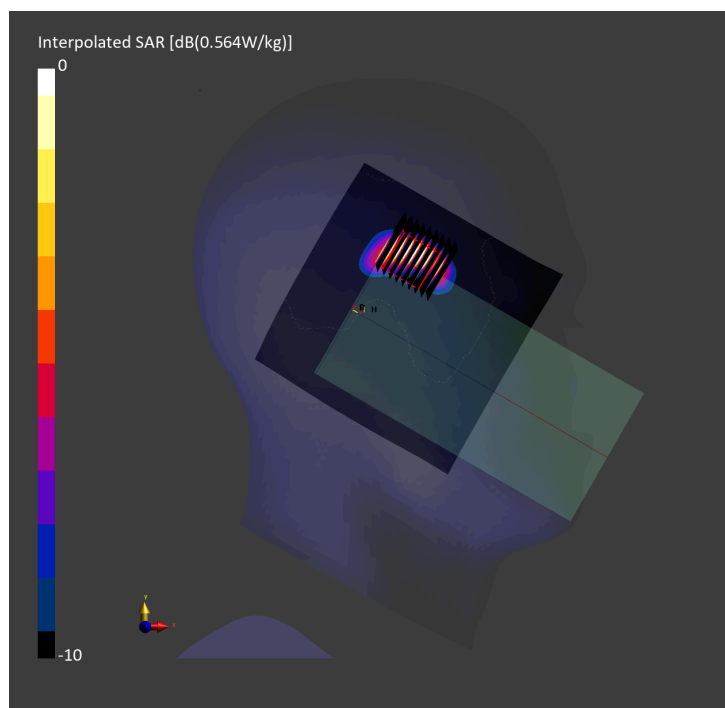

### #04\_WCDMA IV Ant 1\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch1413


Communication System: WCDMA; Frequency: 1732.600 MHz  
Medium: HSL\_1750\_240213 Medium parameters used:  $f=1732.600$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=40.1$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.53, 8.33, 9.75); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.384 W/kg; SAR (10g) = 0.191 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm  
Power Drift = 0.12 dB  
SAR (1g) = 0.438 W/kg; SAR (8g) = 0.210 W/kg; SAR (10g) = 0.189 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.3 mm  
Ratio of SAR at M2 to SAR at M1 = 78.2 %

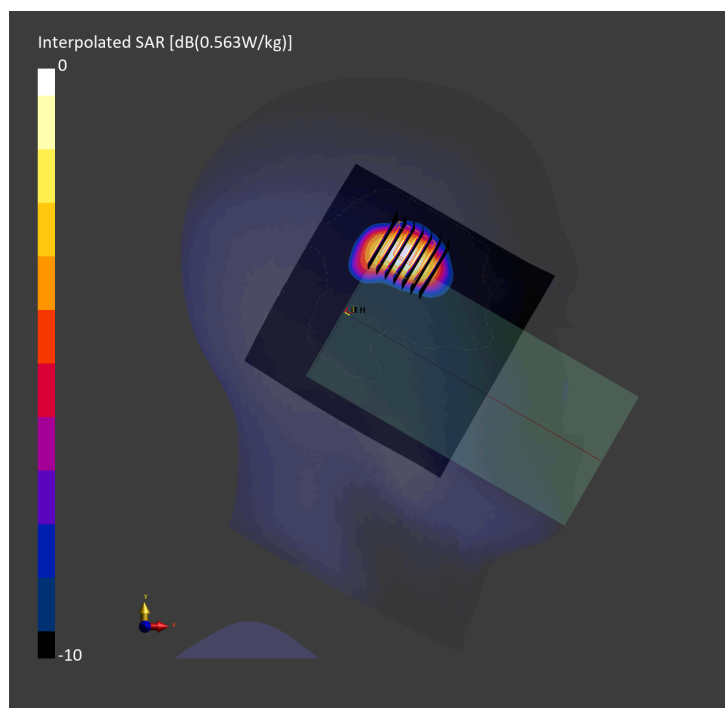

### #05\_WCDMA V Ant 1\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch4182


Communication System: WCDMA; Frequency: 836.400 MHz  
Medium: HSL\_850\_240225 Medium parameters used:  $f = 836.400$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 42.5$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.58, 9.16, 10.94); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.453 W/kg; SAR (10g) = 0.287 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.443 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.285 W/kg  
Smallest distance from peaks to all points 3 dB below = 12.1 mm  
Ratio of SAR at M2 to SAR at M1 = 84.5 %

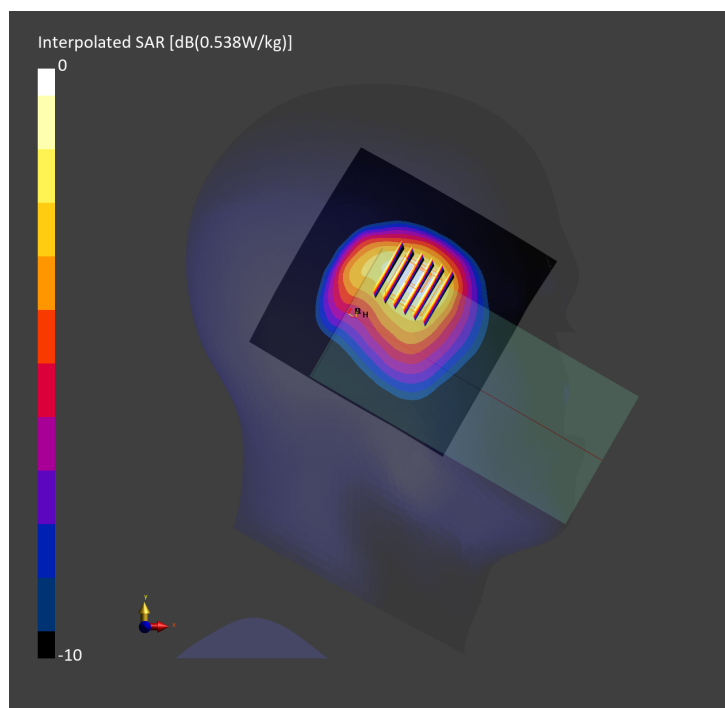

#06\_LTE Band 7 Ant 1\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch20850


Communication System: LTE-FDD; Frequency: 2510.000 MHz  
Medium: HSL\_2600\_240210 Medium parameters used:  $f=2510.000$  MHz;  $\sigma=1.86$  S/m;  $\epsilon_r=38.7$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.69, 7.52, 8.7); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (100.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.462 W/kg; SAR (10g) = 0.224 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.428 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.188 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.5 mm  
Ratio of SAR at M2 to SAR at M1 = 83.7 %

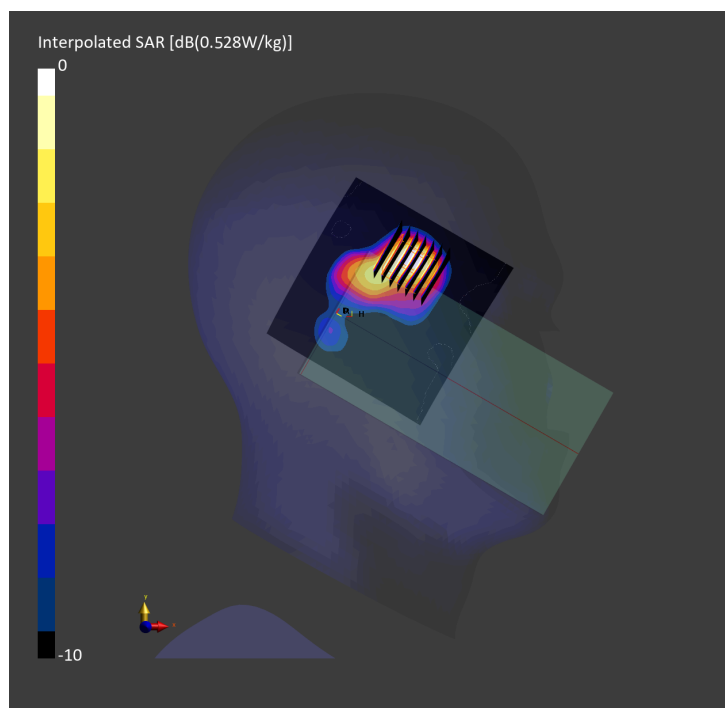

## #07\_LTE Band 12 Ant 1\_10M\_QPSK\_1\_0\_Left Tilted\_0mm\_Ch23095


Communication System: LTE-FDD; Frequency: 707.500 MHz  
Medium: HSL\_750\_240221 Medium parameters used:  $f = 707.500$  MHz;  $\sigma = 0.869$  S/m;  $\epsilon_r = 43.1$   
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.357 W/kg; SAR (10g) = 0.206 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.400 W/kg; SAR (8g) = 0.208 W/kg; SAR (10g) = 0.192 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.1 mm  
Ratio of SAR at M2 to SAR at M1 = 62.6 %

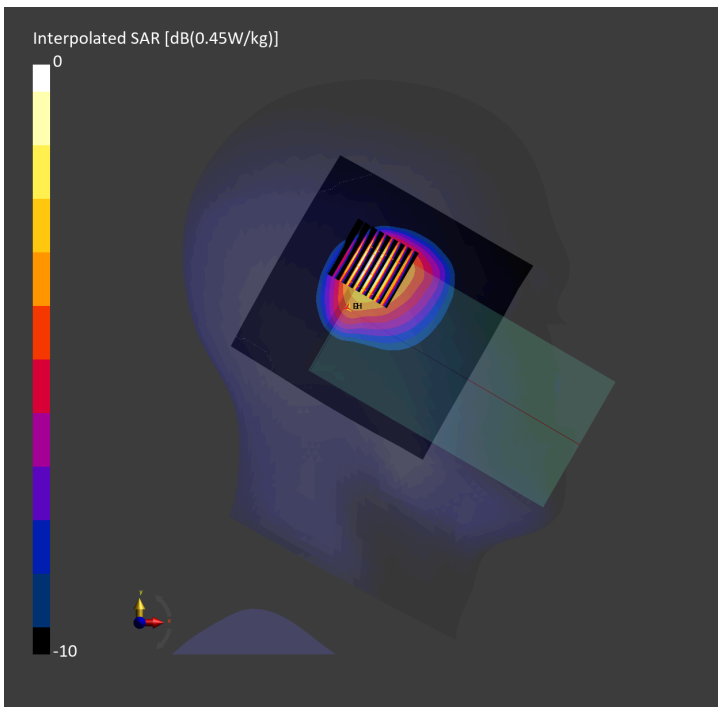

**#08\_LTE Band 13 Ant 1\_10M\_QPSK\_1\_0\_Left Tilted\_0mm\_Ch23230**


Communication System: LTE-FDD; Frequency: 782.000 MHz  
Medium: HSL\_750\_240221 Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 42.8$   
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.494 W/kg; SAR (10g) = 0.294 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.00 dB  
SAR (1g) = 0.467 W/kg; SAR (8g) = 0.247 W/kg; SAR (10g) = 0.228 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.9 mm  
Ratio of SAR at M2 to SAR at M1 = 66.0 %

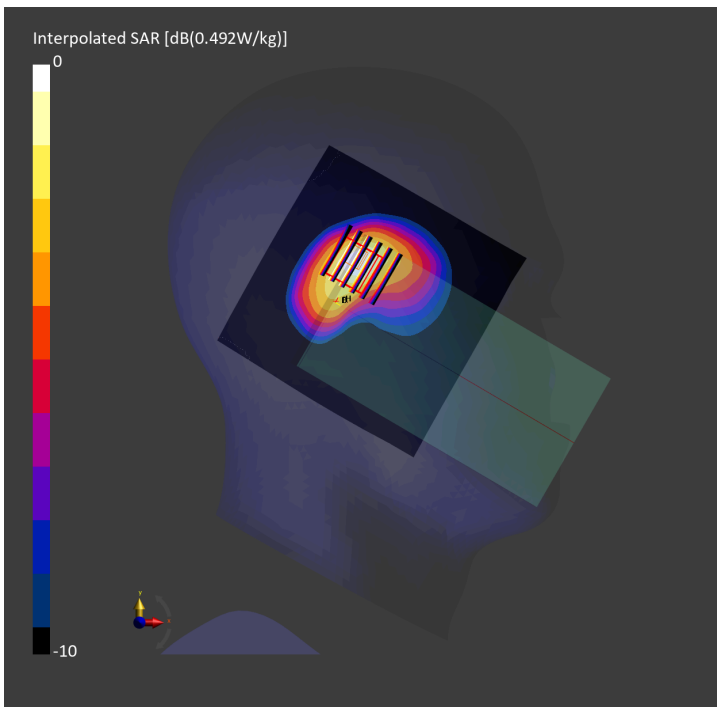



**#09\_LTE Band 14 Ant 1\_10M\_QPSK\_1\_0\_Left Tilted\_0mm\_Ch23330**


Communication System: LTE-FDD; Frequency: 793.000 MHz  
Medium: HSL\_750\_240221 Medium parameters used:  $f = 793.000$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 42.4$   
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.327 W/kg; SAR (10g) = 0.196 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm  
Power Drift = 0.05 dB  
SAR (1g) = 0.411 W/kg; SAR (8g) = 0.220 W/kg; SAR (10g) = 0.203 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.1 mm  
Ratio of SAR at M2 to SAR at M1 = 67.8 %

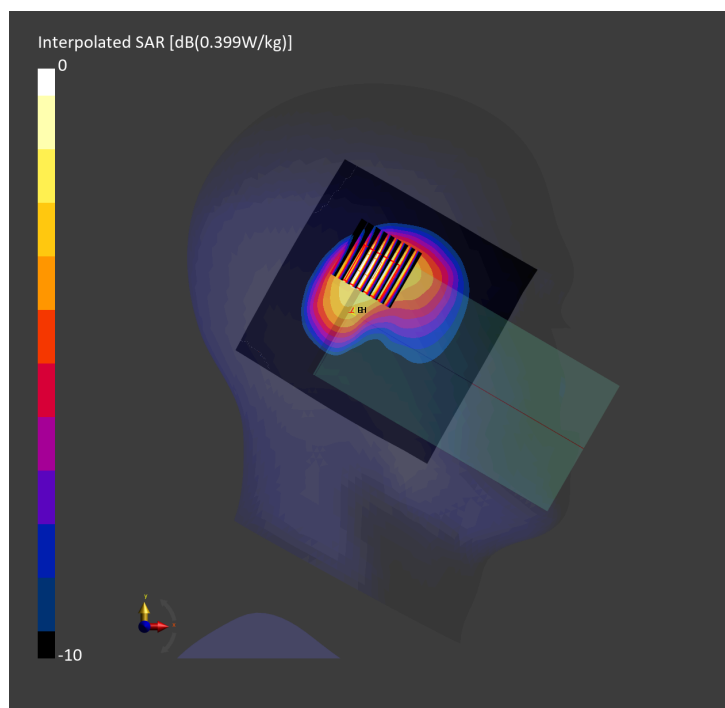

### #10\_LTE Band 25 Ant 1\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch26340


Communication System: LTE-FDD; Frequency: 1880.000 MHz  
Medium: HSL\_1900\_240218 Medium parameters used:  $f=1880.000$  MHz;  $\sigma=1.39$  S/m;  $\epsilon_r=39.9$   
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.18, 7.89, 9.24); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.490 W/kg; SAR (10g) = 0.224 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.454 W/kg; SAR (8g) = 0.201 W/kg; SAR (10g) = 0.179 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.7 mm  
Ratio of SAR at M2 to SAR at M1 = 75.4 %

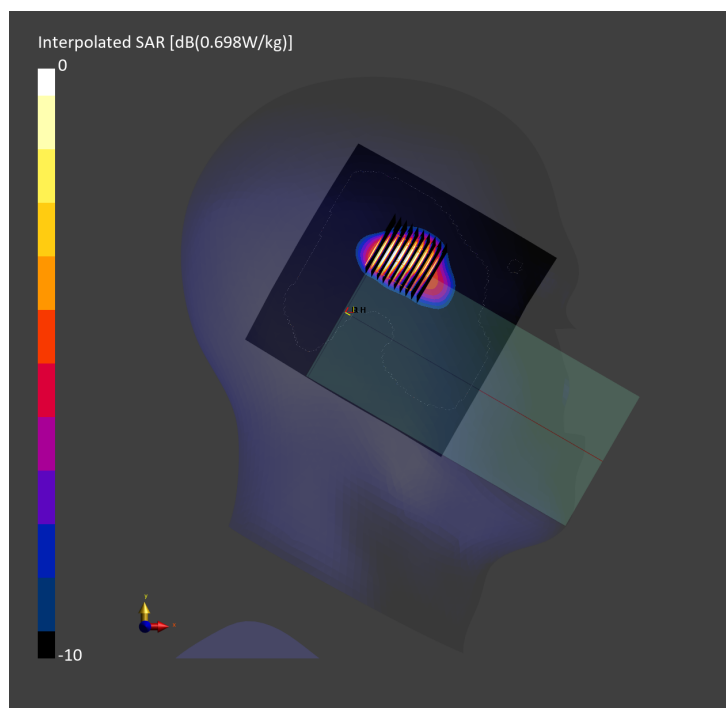

## #11\_LTE Band 26 Ant 1\_15M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch26865


Communication System: LTE-FDD; Frequency: 831.500 MHz  
Medium: HSL\_850\_240225 Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 42.4$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.58, 9.16, 10.94); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.484 W/kg; SAR (10g) = 0.240 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.05 dB  
SAR (1g) = 0.430 W/kg; SAR (8g) = 0.287 W/kg; SAR (10g) = 0.271 W/kg  
Smallest distance from peaks to all points 3 dB below = 11.1 mm  
Ratio of SAR at M2 to SAR at M1 = 85.7 %

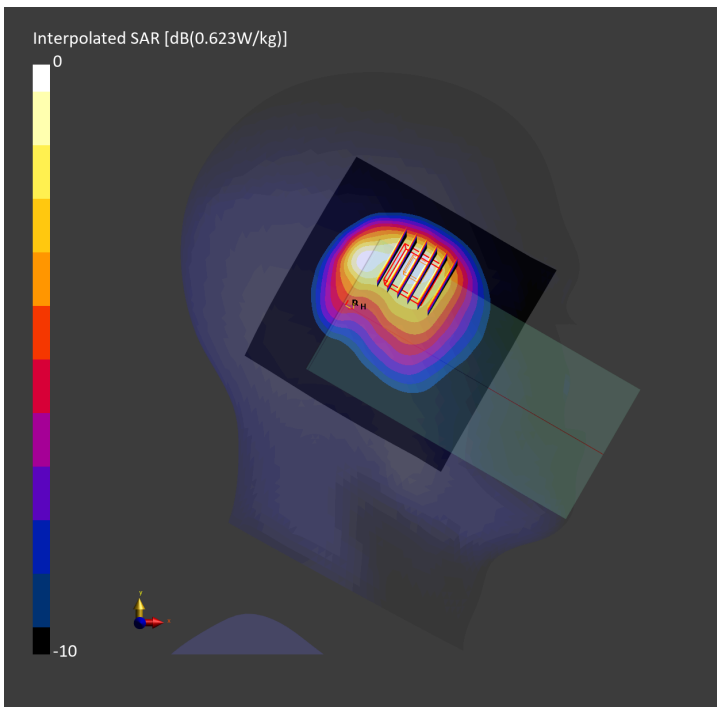

## #12\_LTE Band 30 Ant 1\_10M\_QPSK\_1\_0\_Right Tilted\_0mm\_Ch27710


Communication System: LTE-FDD; Frequency: 2310.000 MHz  
Medium: HSL\_2300\_240216 Medium parameters used:  $f=2310.000$  MHz;  $\sigma=1.63$  S/m;  $\epsilon_r=39.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.64, 7.44, 8.64); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.471 W/kg; SAR (10g) = 0.207 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.461 W/kg; SAR (8g) = 0.216 W/kg; SAR (10g) = 0.193 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.4 mm  
Ratio of SAR at M2 to SAR at M1 = 79.0 %

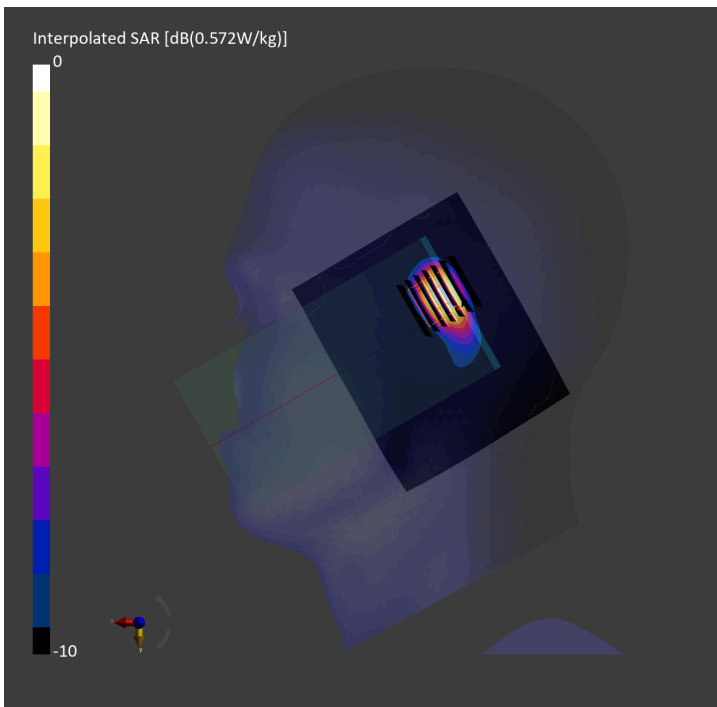

#13\_LTE Band 66 Ant 1\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch132572


Communication System: LTE-FDD; Frequency: 1770.000 MHz  
Medium: HSL\_1750\_240213 Medium parameters used:  $f=1770.000$  MHz;  $\sigma=1.37$  S/m;  $\epsilon_r=39.8$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.53, 8.33, 9.75); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.481 W/kg; SAR (10g) = 0.227 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm  
Power Drift = 0.00 dB  
SAR (1g) = 0.448 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.187 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.9 mm  
Ratio of SAR at M2 to SAR at M1 = 76.1 %

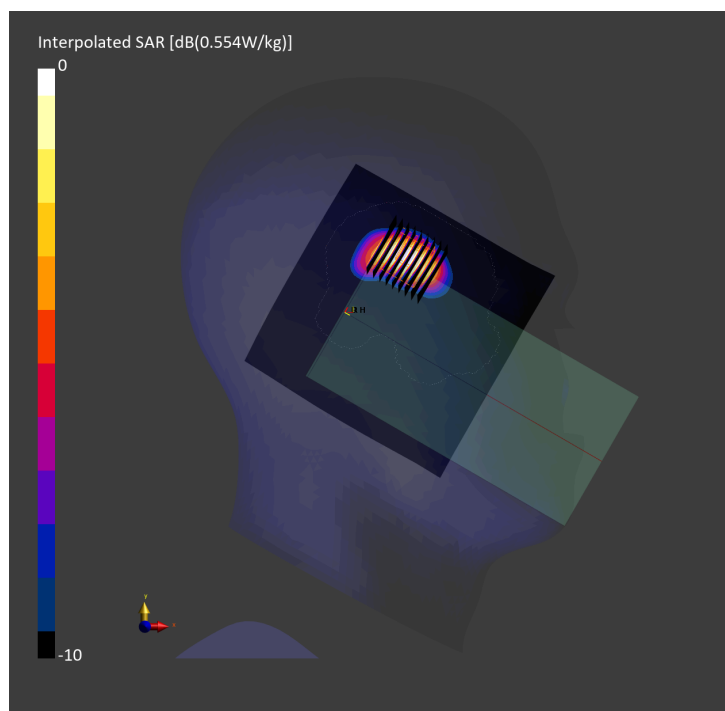

#14\_LTE Band 71 Ant 1\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch133297


Communication System: LTE-FDD; Frequency: 680.500 MHz  
Medium: HSL\_750\_240221 Medium parameters used:  $f=680.500$  MHz;  $\sigma=0.853$  S/m;  $\epsilon_r=43.0$   
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.479 W/kg; SAR (10g) = 0.322 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.486 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.254 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.2 mm  
Ratio of SAR at M2 to SAR at M1 = 62.5 %

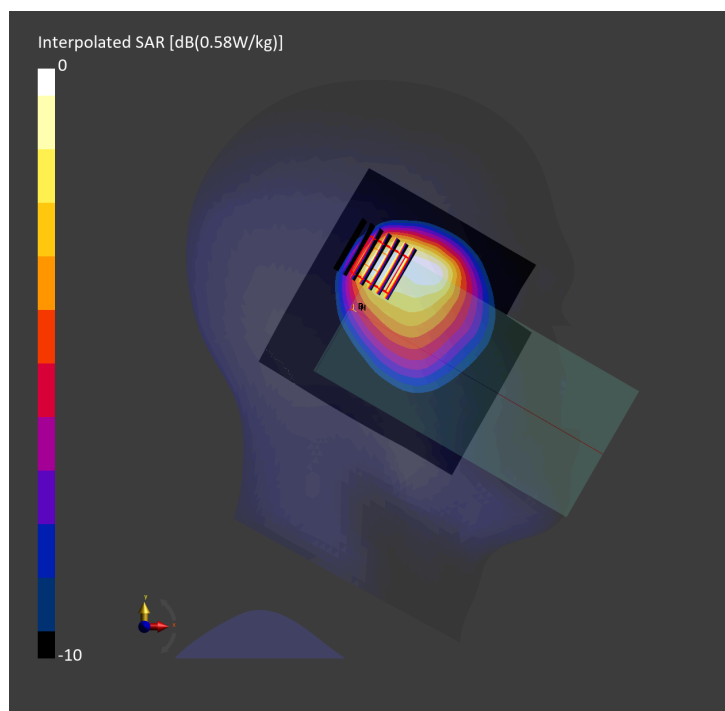

### #15\_LTE Band 41 Ant 5\_20M\_QPSK\_1\_0\_Right Cheek\_0mm\_Ch40620


Communication System: LTE-TDD; Frequency: 2593.000 MHz  
Medium: HSL\_2600\_240211 Medium parameters used:  $f=2593.000$  MHz;  $\sigma=1.98$  S/m;  $\epsilon_r=38.4$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.69, 7.52, 8.7); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

**Area Scan (120.0 mm x 160.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.410 W/kg; SAR (10g) = 0.174 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = 0.16 dB  
SAR (1g) = 0.414 W/kg; SAR (8g) = 0.191 W/kg; SAR (10g) = 0.171 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.6 mm  
Ratio of SAR at M2 to SAR at M1 = 81.3 %

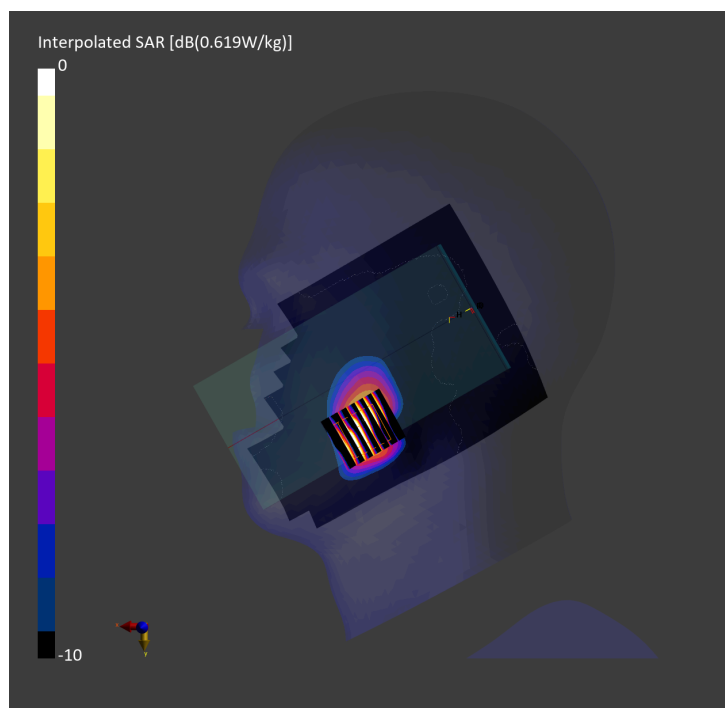

#16\_LTE Band 48 Ant 1\_20M\_QPSK\_1\_0\_Left Cheek\_0mm\_Ch55340


Communication System: LTE-TDD; Frequency: 3560.000 MHz  
Medium: HSL\_3500\_240303 Medium parameters used:  $f=3560.000$  MHz;  $\sigma=2.91$  S/m;  $\epsilon_r=37.5$   
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.1, 6.9, 8.02); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

**Area Scan (100.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.399 W/kg; SAR (10g) = 0.150 W/kg;

**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.364 W/kg; SAR (8g) = 0.123 W/kg; SAR (10g) = 0.106 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.9 mm  
Ratio of SAR at M2 to SAR at M1 = 74.9 %

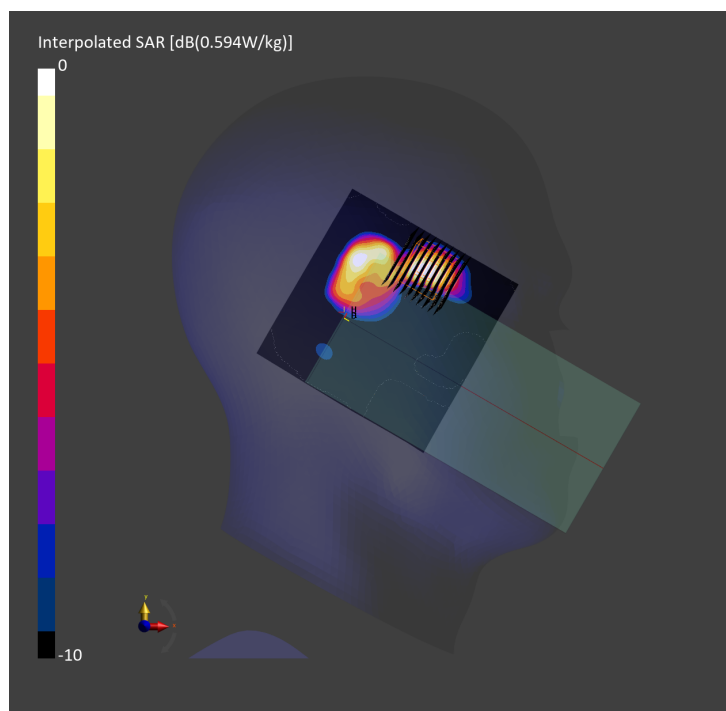



#17\_FR1 n7 Ant 1\_50M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch507000


Communication System: 5G NR; Frequency: 2535.000 MHz  
Medium: HSL\_2600\_240212 Medium parameters used:  $f=2535.000$  MHz;  $\sigma=1.92$  S/m;  $\epsilon_r=38.6$   
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.69, 7.52, 8.7); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

**Area Scan (100.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.483 W/kg; SAR (10g) = 0.202 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = 0.05 dB  
SAR (1g) = 0.434 W/kg; SAR (8g) = 0.206 W/kg; SAR (10g) = 0.186 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.5 mm  
Ratio of SAR at M2 to SAR at M1 = 81.7 %

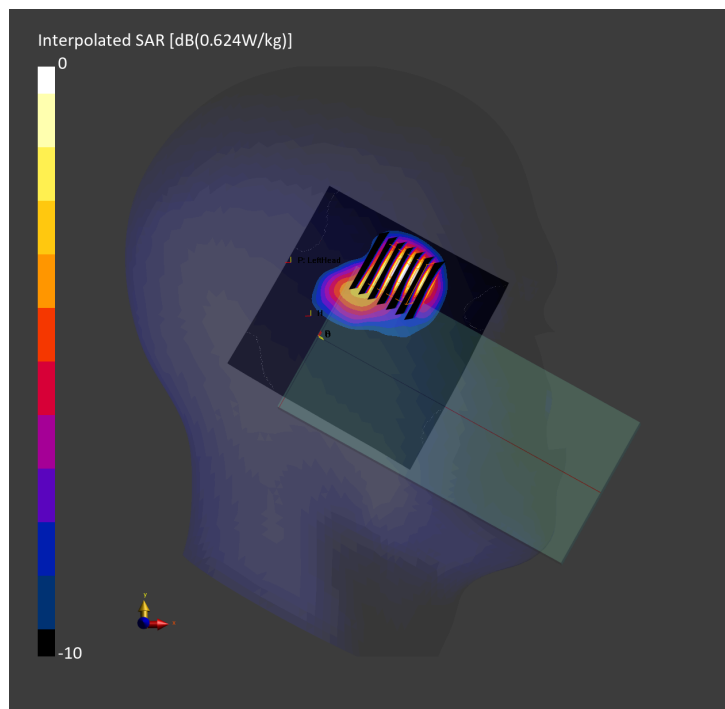

#18\_FR1 n12 Ant 1\_15M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch141500


Communication System: 5G NR; Frequency: 707.500 MHz  
Medium: HSL\_750\_240222 Medium parameters used:  $f = 707.500$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 43.2$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.475 W/kg; SAR (10g) = 0.257 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.05 dB  
SAR (1g) = 0.456 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.285 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.6 mm  
Ratio of SAR at M2 to SAR at M1 = 77.9 %

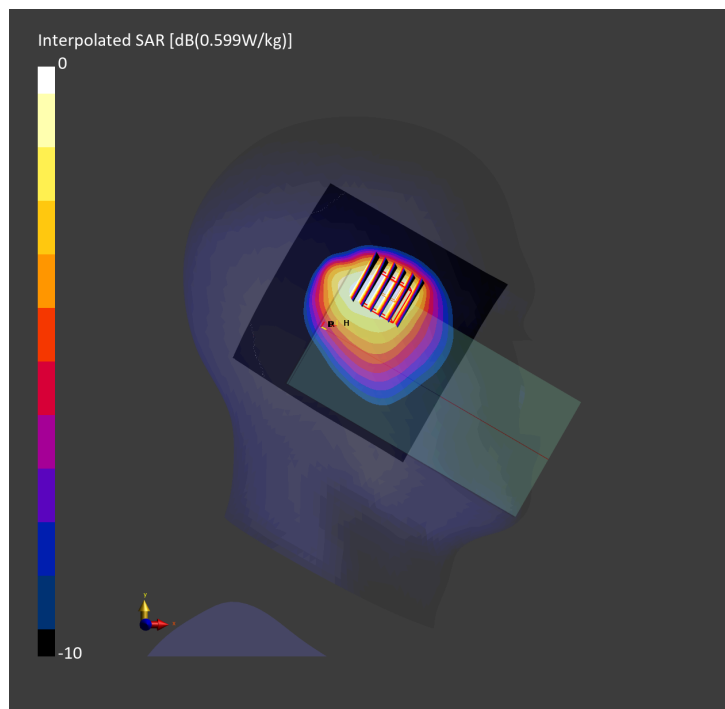

### #19\_FR1 n14 Ant 1\_10M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch158600


Communication System: 5G NR; Frequency: 793.000 MHz  
Medium: HSL\_750\_240222 Medium parameters used:  $f = 793.000$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 42.5$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.464 W/kg; SAR (10g) = 0.295 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.427 W/kg; SAR (8g) = 0.275 W/kg; SAR (10g) = 0.259 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.9 mm  
Ratio of SAR at M2 to SAR at M1 = 82.9 %

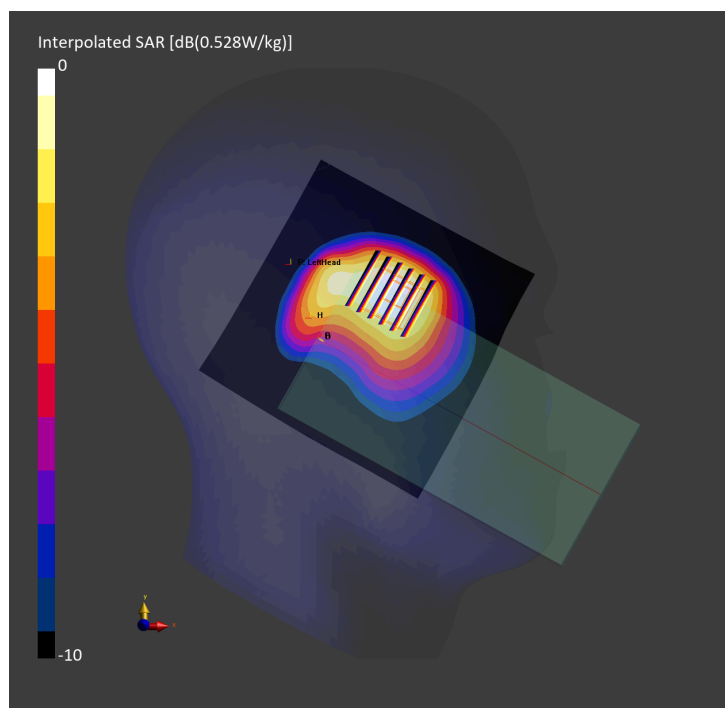

#20\_FR1 n25 Ant 1\_40M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch376500


Communication System: 5G NR; Frequency: 1882.500 MHz  
Medium: HSL\_1900\_240219 Medium parameters used:  $f=1882.500$  MHz;  $\sigma=1.37$  S/m;  $\epsilon_r=40.2$   
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.18, 7.89, 9.24); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.422 W/kg; SAR (10g) = 0.191 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.458 W/kg; SAR (8g) = 0.201 W/kg; SAR (10g) = 0.180 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.8 mm  
Ratio of SAR at M2 to SAR at M1 = 76.0 %

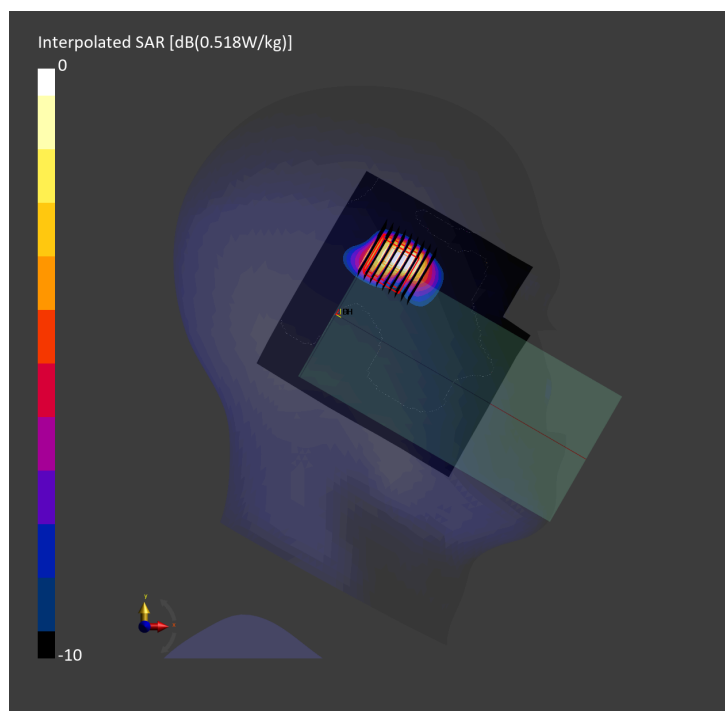

#21\_FR1 n26 Ant 1\_20M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch166300


Communication System: 5G NR; Frequency: 831.500 MHz  
Medium: HSL\_850\_240226 Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.7$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.58, 9.16, 10.94); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.500 W/kg; SAR (10g) = 0.297 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.05 dB  
SAR (1g) = 0.433 W/kg; SAR (8g) = 0.292 W/kg; SAR (10g) = 0.276 W/kg  
Smallest distance from peaks to all points 3 dB below = 12.3 mm  
Ratio of SAR at M2 to SAR at M1 = 87.3 %

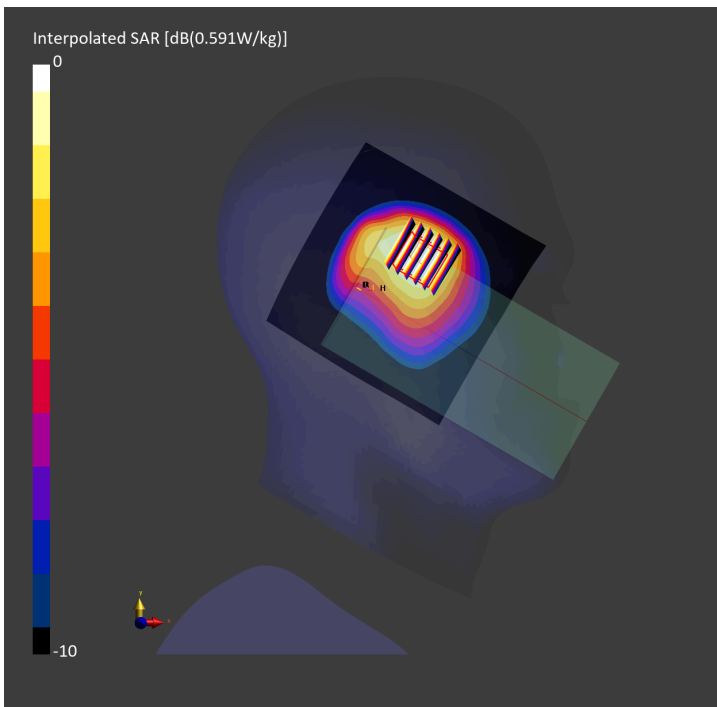

**#22\_FR1 n30 Ant 1\_10M\_BPSK\_1\_1\_Right Tilted\_0mm\_Ch462000**


Communication System: 5G NR; Frequency: 2310.000 MHz  
Medium: HSL\_2300\_240216 Medium parameters used:  $f=2310.000$  MHz;  $\sigma=1.63$  S/m;  $\epsilon_r=39.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.64, 7.44, 8.64); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.531 W/kg; SAR (10g) = 0.220 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.14 dB  
SAR (1g) = 0.481 W/kg; SAR (8g) = 0.225 W/kg; SAR (10g) = 0.201 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.1 mm  
Ratio of SAR at M2 to SAR at M1 = 79.1 %

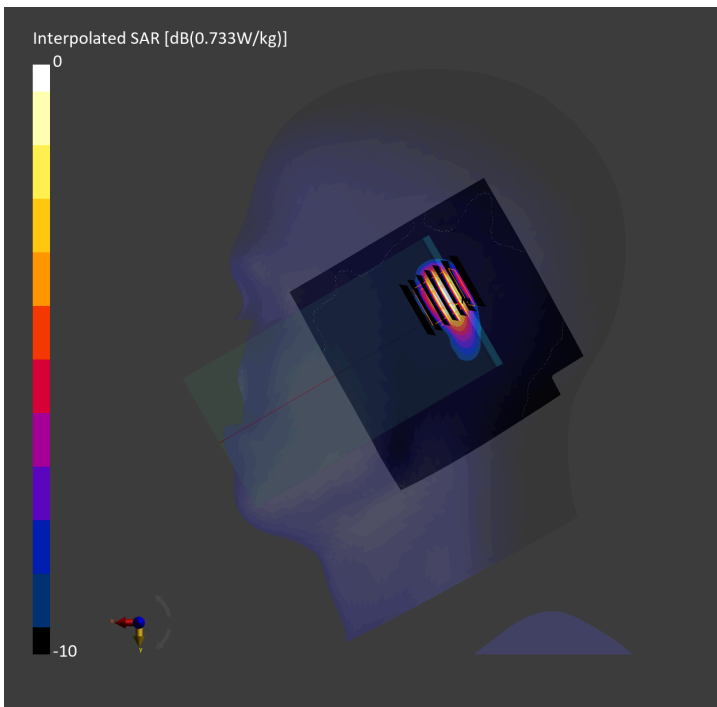

#23\_FR1 n66 Ant 1\_40M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch349000


Communication System: 5G NR; Frequency: 1745.000 MHz  
Medium: HSL\_1750\_240214 Medium parameters used:  $f=1745.000$  MHz;  $\sigma=1.35$  S/m;  $\epsilon_r=40.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.53, 8.33, 9.75); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.556 W/kg; SAR (10g) = 0.223 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.469 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.205 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.3 mm  
Ratio of SAR at M2 to SAR at M1 = 77.5 %

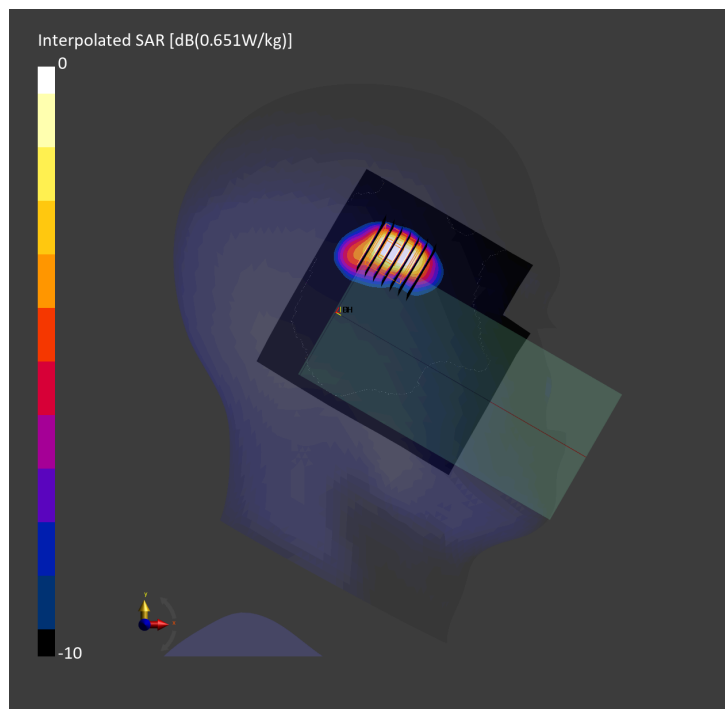

#24\_FR1 n70 Ant 1\_15M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch340500


Communication System: 5G NR; Frequency: 1702.500 MHz  
Medium: HSL\_1750\_240214 Medium parameters used:  $f=1702.500$  MHz;  $\sigma=1.31$  S/m;  $\epsilon_r=40.0$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.53, 8.33, 9.75); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.470 W/kg; SAR (10g) = 0.208 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.434 W/kg; SAR (8g) = 0.211 W/kg; SAR (10g) = 0.190 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.3 mm  
Ratio of SAR at M2 to SAR at M1 = 77.0 %

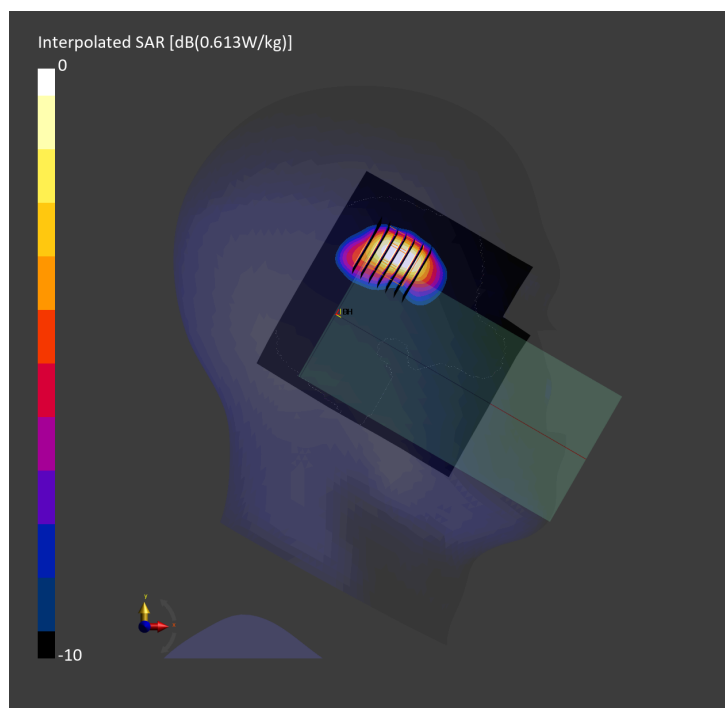



#25\_FR1 n71 Ant 1\_20M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch136100


Communication System: 5G NR; Frequency: 680.500 MHz  
Medium: HSL\_750\_240222 Medium parameters used:  $f = 680.500$  MHz;  $\sigma = 0.861$  S/m;  $\epsilon_r = 43.1$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(9.65, 9.46, 11.18); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (120.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm  
SAR (1g) = 0.447 W/kg; SAR (10g) = 0.307 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.486 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.311 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.5 mm  
Ratio of SAR at M2 to SAR at M1 = 67.2 %

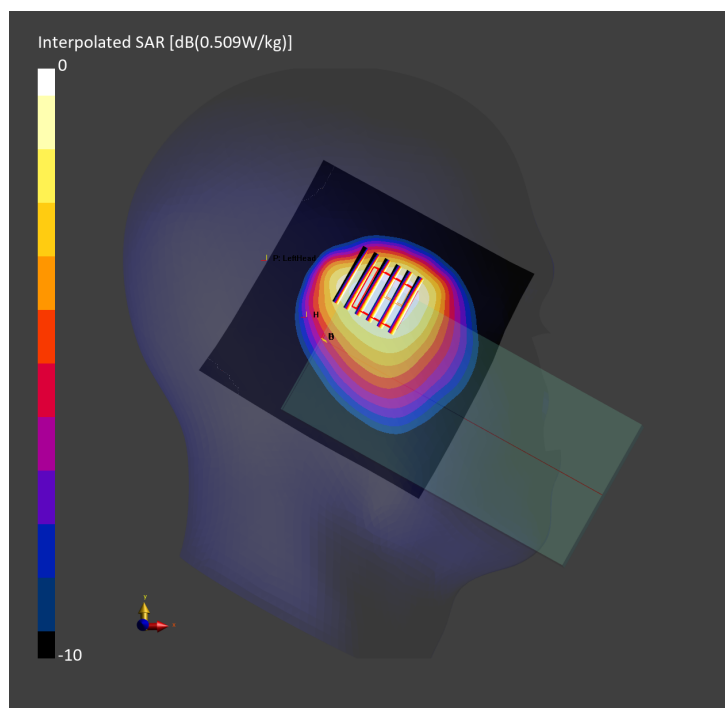

#26\_FR1 n41 Ant 1\_100M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz  
Medium: HSL\_2600\_240209 Medium parameters used:  $f=2592.990$  MHz;  $\sigma=2.00$  S/m;  $\epsilon_r=38.5$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.69, 7.52, 8.7); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (100.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.478 W/kg; SAR (10g) = 0.192 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.447 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.197 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.9 mm  
Ratio of SAR at M2 to SAR at M1 = 81.8 %

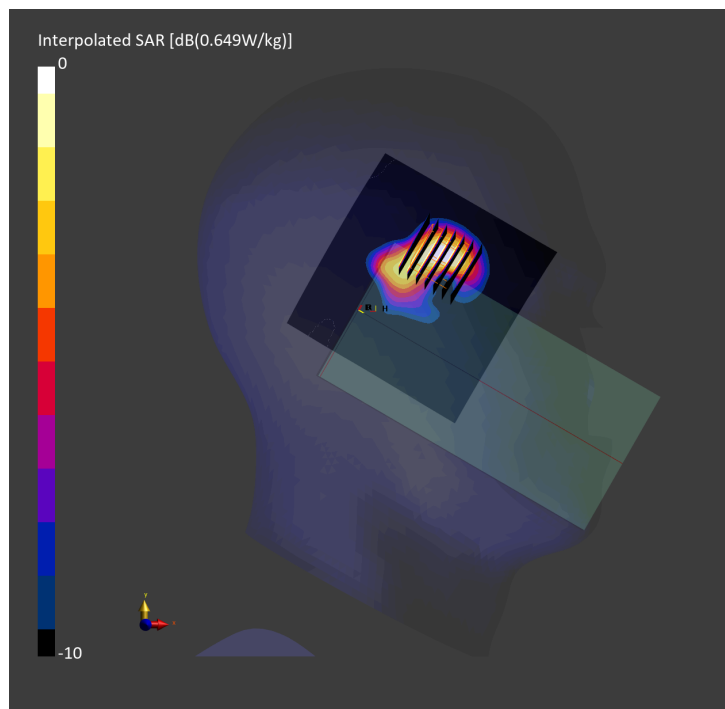

#27\_FR1 n48 Ant 1\_40M\_BPSK\_1\_0\_Left Cheek\_0mm\_Ch641666


Communication System: 5G NR; Frequency: 3624.985 MHz  
Medium: HSL\_3700\_240229 Medium parameters used:  $f=3624.985$  MHz;  $\sigma=3.10$  S/m;  $\epsilon_r=38.1$   
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.11, 6.91, 8.06); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

**Area Scan (100.0 mm x 100.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.511 W/kg; SAR (10g) = 0.180 W/kg;

**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.474 W/kg; SAR (8g) = 0.149 W/kg; SAR (10g) = 0.127 W/kg  
Smallest distance from peaks to all points 3 dB below = 3.9 mm  
Ratio of SAR at M2 to SAR at M1 = 73.9 %

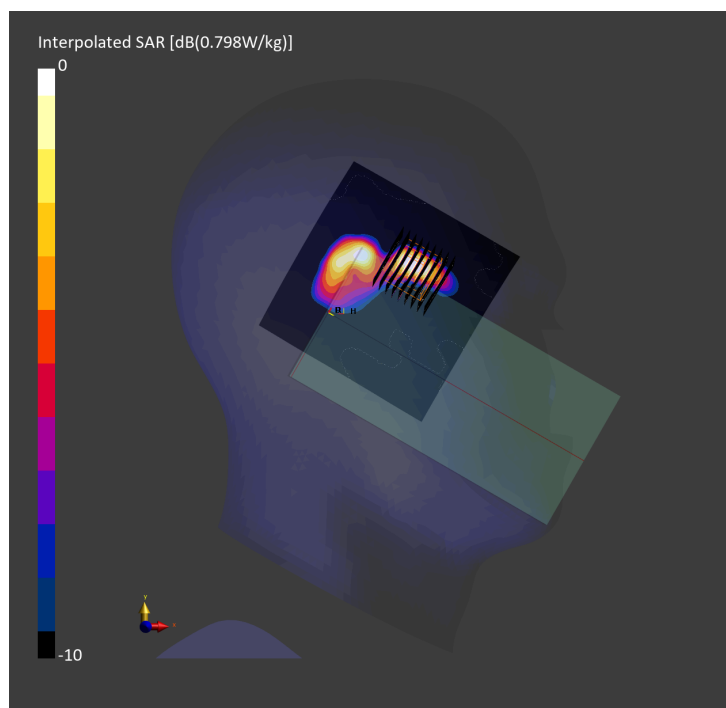

## #28\_FR1 n77 Ant 5\_100M\_BPSK\_1\_1\_Left Cheek\_0mm\_Ch656000

Communication System: 5G NR ; Frequency: 3840.000 MHz  
Medium: HSL\_3900\_240301 Medium parameters used:  $f=3840.000$  MHz;  $\sigma=3.30$  S/m;  $\epsilon_r=37.8$   
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.06, 6.86, 8.01); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2023-09-13
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.554 W/kg; SAR (10g) = 0.204 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 28.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.478 W/kg; SAR (8g) = 0.183 W/kg; SAR (10g) = 0.161 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.2 mm  
Ratio of SAR at M2 to SAR at M1 = 76.3 %

