

System Check_Head_5750MHz

DUT: D5GHzV2-1128


Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: HSL_5G_221018 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.294$ S/m; $\epsilon_r = 36.655$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.74, 4.74, 4.74) @ 5750 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 19.0 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 57.82 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 34.1 W/kg
SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.15 W/kg
Maximum value of SAR (measured) = 19.3 W/kg

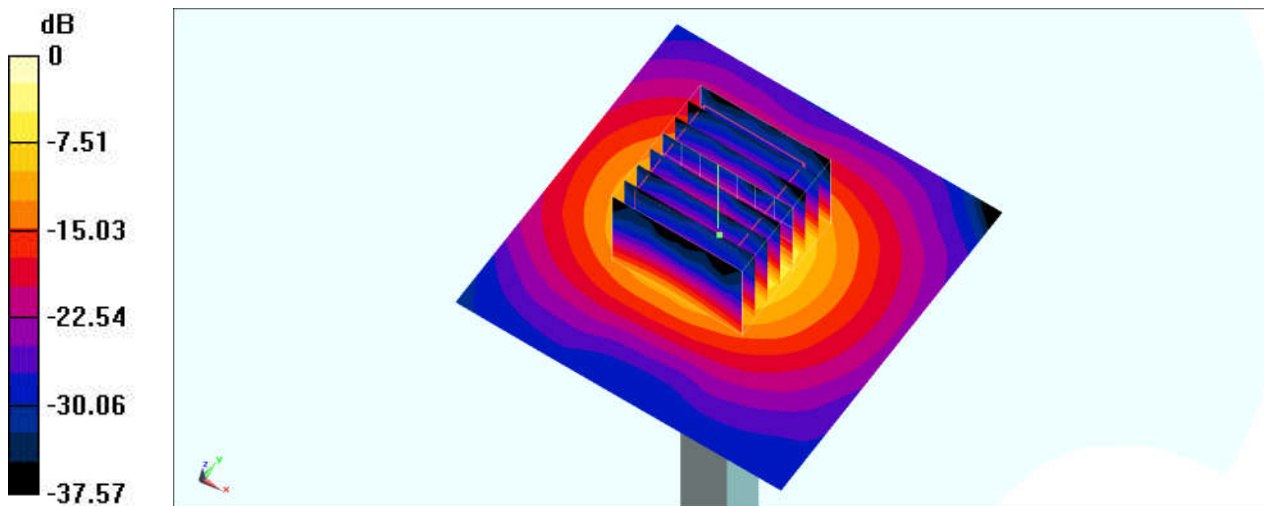

System Check_Head_5750MHz

DUT: D5GHzV2-1128

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5G_221019 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 36.707$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5750 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 10.3 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 48.79 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 3.82 W/kg; SAR(10 g) = 1.1 W/kg
Maximum value of SAR (measured) = 9.70 W/kg

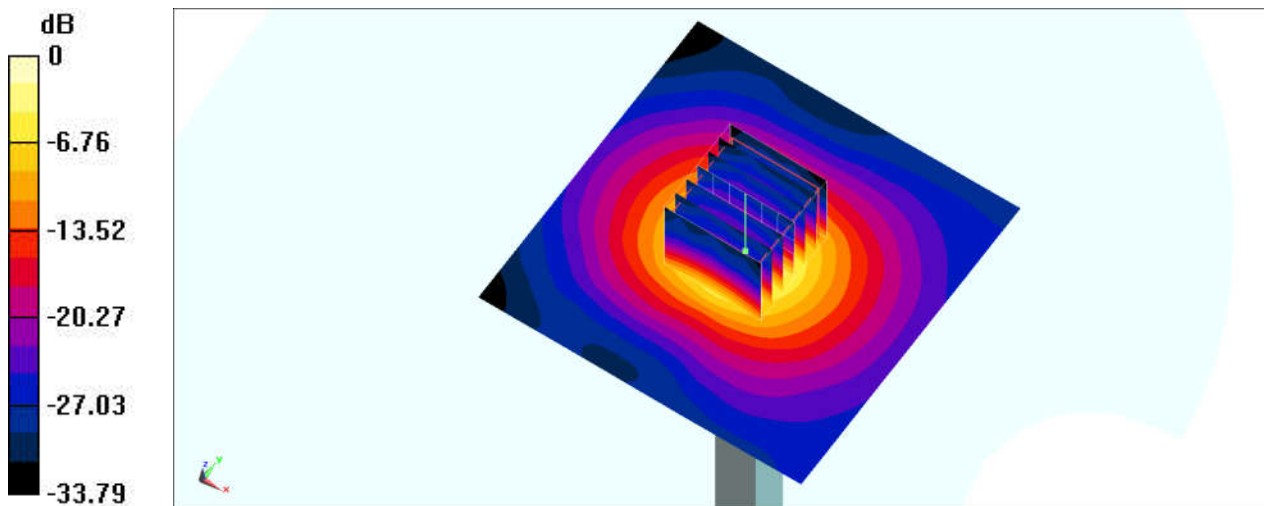

0 dB = 9.70 W/kg = 9.87 dBW/kg

System Check_Head_5850MHz

DUT: D5GHzV2-1171


Communication System: CW; Frequency: 5850 MHz; Duty Cycle: 1:1
Medium: HSL_5G_221017 Medium parameters used: $f = 5850 \text{ MHz}$; $\sigma = 5.306 \text{ S/m}$; $\epsilon_r = 36.365$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5850 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 23.2 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
Reference Value = 73.36 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 42.4 W/kg
SAR(1 g) = 8.36 W/kg ; SAR(10 g) = 2.34 W/kg
Maximum value of SAR (measured) = 22.7 W/kg

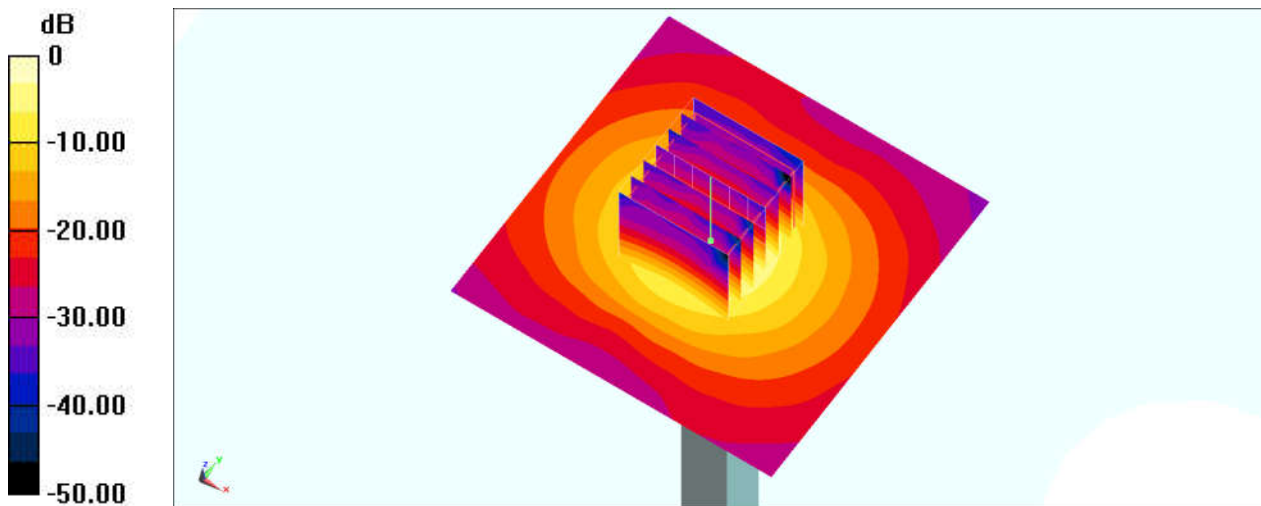

0 dB = $22.7 \text{ W/kg} = 13.56 \text{ dBW/kg}$

System Check_Head_6500MHz

DUT: D6.5GHzV2-1003


Communication System: CW; Frequency: 6500.0 MHz; Duty Cycle: 1:1
Medium: HSL_6G_220923 Medium parameters used: $f=6500.0$ MHz; $\sigma=6.12$ S/m; $\epsilon_r=34.6$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.0, 5.0, 5.0); Calibrated: 2022-03-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2022-01-26
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.0.1425
- UID: CW, 0--

Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 23.3 W/kg; SAR (10g) = 5.08 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.11 dB
SAR (1g) = 30.5 W/kg; SAR (8g) = 6.90 W/kg; SAR (10g) = 5.68 W/kg
psAPD (1.0cm², sq) = 305 [W/m²]; psAPD (4.0cm², sq) = 138 [W/m²]

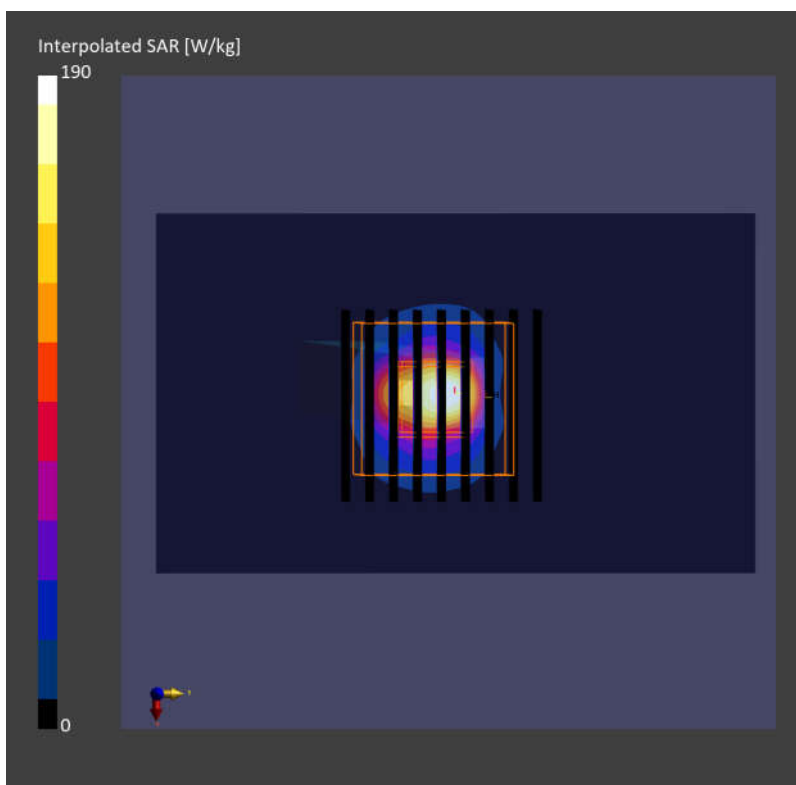

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1003


Communication System: CW; Frequency: 6500.0 MHz; Duty Cycle: 1:1
Medium: HSL_6G_221028 Medium parameters used: $f=6500.0$ MHz; $\sigma=6.03$ S/m; $\epsilon_r=34.28$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.35, 5.35, 5.35); Calibrated: 2022-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2022-01-20
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.0.1425
- UID: CW

Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 24.1 W/kg; SAR (10g) = 5.22 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 30.9 W/kg; SAR (8g) = 6.93 W/kg; SAR (10g) = 5.70 W/kg
psAPD (1.0cm², sq) = 309 [W/m²]; psAPD (4.0cm², sq) = 140 [W/m²]

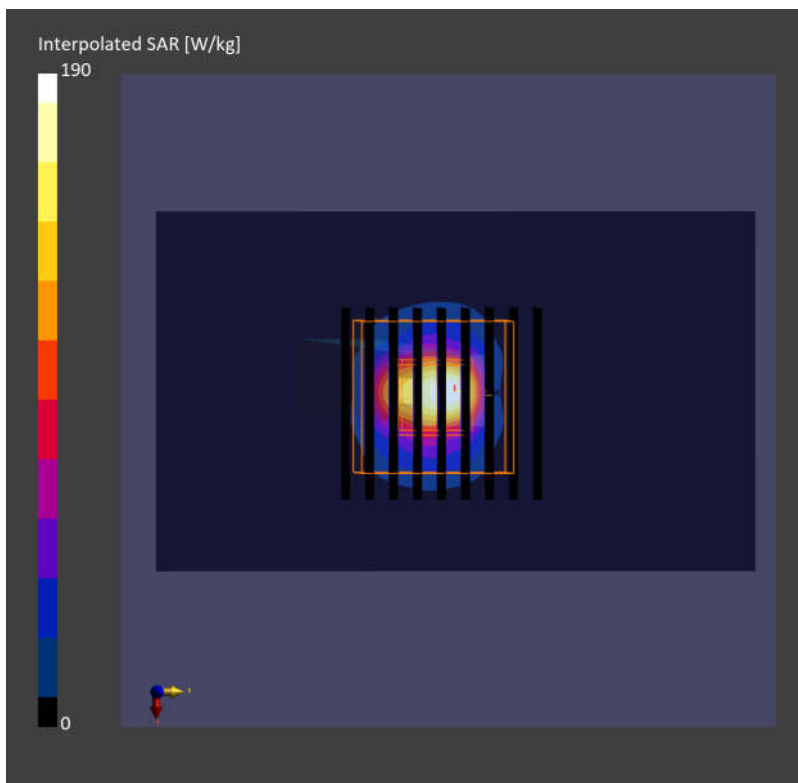

Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	70.0 x 50.0 x 8.0		Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 10.00	10000.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1044	Air -	EUmmWV3 - SN9424_F1-55GHz, 2022-04-06	DAE4 Sn316, 2022-01-26

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Date	2022-09-25, 21:05
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	55.5
psPDtot+ [W/m ²]	55.6
H _{max} [A/m]	0.407
E _{max} [V/m]	157
max _(Stot) [W/m ²]	62.7
Power Drift [dB]	0.04

