



FCC RADIO TEST REPORT

FCC ID : A4RGE2AE
Equipment : Phone
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

The product was received on Mar. 10, 2022 and testing was performed from Mar. 21, 2022 to May 24, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	9
1.4 Testing Location	10
1.5 Applicable Standards.....	10
2 Test Configuration of Equipment Under Test	11
2.1 Test Mode.....	11
2.2 Connection Diagram of Test System.....	15
2.3 Support Unit used in test configuration and system	15
2.4 Measurement Results Explanation Example.....	15
2.5 Frequency List of Low/Middle/High Channels	16
3 Conducted Test Items.....	21
3.1 Measuring Instruments	21
3.2 Conducted Output Power and ERP/EIRP	22
3.3 Peak-to-Average Ratio	23
3.4 Occupied Bandwidth.....	24
3.5 Conducted Band Edge	25
3.6 Conducted Spurious Emission	27
3.7 Frequency Stability	28
4 Radiated Test Items	29
4.1 Measuring Instruments	29
4.2 Radiated Spurious Emission Measurement	31
5 List of Measuring Equipment.....	32
6 Uncertainty of Evaluation.....	33
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG1O2919-05C	01	Initial issue of report	Jun. 02, 2022
FG1O2919-05C	02	<ol style="list-style-type: none"> 1. Revise Table of Contents, Test Mode and antenna information 2. Revise Product Specification of Equipment Under Test 3. Add remark 5 in section 3.2.2 4. Add remark 8 in section 3.5.2 5. Add remark 10 in section 3.6.2 6. Revise appendix A and B 7. Add Radiated Spurious Emission test data 8. Remove model name 	Jun. 06, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (n5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (n12) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n25) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (n2) (n5) (n12) (n25) (n66) (n71)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (n2) (n5) (n12) (n25) (n66) (n71)	Pass	Under limit 20.85 dB at 10193.000 MHz for Primary Antenna
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		Under limit 19.00 dB at 7538.000 MHz for ASDIV Antenna

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity..

Reviewed by: William Chen

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
FCC ID	A4RGE2AE
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/ NFC/GNSS/WPC/WPT/UWB WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
23061FDH300017	Conducted Measurement ERP/EIRP
23221FDH300019	
22271FDH30003S	Radiated Spurious Emission



1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n7: 2502.5 MHz ~ 2567.5 MHz 5G NR n12: 701.5 MHz ~ 713.5 MHz 5G NR n25: 1852.5 MHz ~ 1912.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 665.5 MHz ~ 695.5 MHz
Rx Frequency	5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n7: 2622.5 MHz ~ 2687.5 MHz 5G NR n12: 731.5 MHz ~ 743.5 MHz 5G NR n25: 1932.5 MHz ~ 1992.5 MHz 5G NR n38: 2575 MHz ~ 2615 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 2112.5 MHz ~ 2197.5 MHz 5G NR n71: 619.5 MHz ~ 649.5 MHz
Bandwidth	5G NR n2: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz 5G NR n12: 5MHz / 10MHz / 15MHz 5G NR n25: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz 5G NR n38: 10MHz / 15MHz / 20MHz 5G NR n41: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz 5G NR n66: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz 5G NR n71: 5MHz / 10MHz / 15MHz / 20MHz



Product Specification is subject to this standard	
Maximum Output Power to Antenna <DFT-s-OFDM>	<Primary Antenna> <Ant. 0> 5G NR n5 : 24.94 dBm 5G NR n12 : 25.07 dBm 5G NR n71 : 25.11 dBm <Ant. 2> 5G NR n2 : 25.22 dBm 5G NR n7 : 24.93 dBm 5G NR n25 : 25.09 dBm 5G NR n38 : 25.14 dBm 5G NR n41 : 26.89 dBm 5G NR n66 : 25.16 dBm <ASDIV Antenna> <Ant. 0> 5G NR n2 : 24.36 dBm 5G NR n7 : 23.87 dBm 5G NR n25 : 24.49 dBm 5G NR n38 : 24.58 dBm 5G NR n41 : 26.36 dBm 5G NR n66 : 24.32 dBm <Ant. 1> 5G NR n5 : 24.63 dBm 5G NR n12 : 24.71 dBm 5G NR n71 : 24.98 dBm
Maximum Output Power to Antenna <CP OFDM>	MIMO n41 <Ant. 2+1>: 29.68 dBm MIMO n41 <Ant. 0+5>: 26.78 dBm MIMO n41 <Ant. 2+5>: 27.63 dBm MIMO n41 <Ant. 0+1>: 27.64 dBm
Antenna Type	<Primary Antenna> <Ant. 0> : PIFA Antenna <Ant. 1> : PIFA Antenna <Ant. 2> : PIFA Antenna <ASDIV Antenna> <Ant. 0> : PIFA Antenna <Ant. 1> : PIFA Antenna <Ant. 5> : IFA Antenna
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM



<Primary Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n2	ANT1	-8.3
5G NR	n2	ANT2	1.5
5G NR	n5	ANT0	-2.3
5G NR	n7	ANT2	-0.8
5G NR	n12	ANT0	-2.8
5G NR	n25	ANT2	1.5
5G NR	n38	ANT1	-1.7
5G NR	n38	ANT2	-0.8
5G NR	n41	ANT1	-2.0
5G NR	n41	ANT2	-0.8
5G NR	n66	ANT1	-4.6
5G NR	n66	ANT2	-0.5
5G NR	n71	ANT0	-5.3

<ASDIV Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n2	ANT5	-3.0
5G NR	n2	ANT0	1.4
5G NR	n5	ANT1	-4.6
5G NR	n7	ANT0	0.7
5G NR	n12	ANT1	-5.8
5G NR	n25	ANT0	1.4
5G NR	n38	ANT5	-3.0
5G NR	n38	ANT0	0.7
5G NR	n41	ANT5	0.6
5G NR	n41	ANT0	0.7
5G NR	n66	ANT5	-3.8
5G NR	n66	ANT0	-2.1
5G NR	n71	ANT1	-8.0

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Sherry Wu
Temperature (°C)	21.4~23.7
Relative Humidity (%)	50~59

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH15-HY (TAF Code: 3786)
Test Engineer	Leo Lee and Bigshow Wang
Temperature (°C)	18~25
Relative Humidity (%)	45~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find **<Primary Antenna>**: X Plane with Adapter for 5G NR n41 PC2, n66, EN-DC 2A-n2A, 2A-n66A, 66A-n41A, 12A-n7A, 66A-n7A, 66B-n7A, 66C-n7A; Y Plane with Adapter for 5G NR n2, n5, n12; Z Plane with Adapter for 5G NR n71, EN-DC 30A-n2A; **<ASDIV Antenna>**: X Plane with Adapter for 5G NR n2, n5, n7, n12, n66, n71, EN-DC 2A-n2A, 30A-n2A, 66A-n41A, 66A-n25A, 66B-n25A, 12A-n41A; Z Plane with Adapter for EN-DC 66C-n25A; **<MIMO Antenna>**: X Plane with Adapter for 5G NR n41 PC1.5 as worst plane.

Test Items	NR Band	Bandwidth (MHz)								Modulation					RB #			Test Channel		
		5	10	15	20	25	30	40	50	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n2	v	v	v	v	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n12	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n38	-	v	v	v	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Ave rage Ratio	n2	Covered by n25																		
	n5				v	-	-	-	-	v	v	v	v	v				v	v	
	n7				v					v	v	v	v	v				v	v	
	n12			v	-	-	-	-	-	v	v	v	v	v				v	v	
	n25				v				-	v	v	v	v	v				v	v	
	n38	Covered by n41																		
	n66				v				-	v	v	v	v	v				v	v	
	n71				v	-	-	-	-	v	v	v	v	v				v	v	
26dB and 99% Bandwidth	n2	Covered by n25																		
	n5	v	v	v	v	-	-	-	-	v	v	v	v	v				v	v	
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v				v	v	
	n12	v	v	v	-	-	-	-	-	v	v	v	v	v				v	v	
	n25	v	v	v	v	v	v	v	-	v	v	v	v	v				v	v	
	n38	Covered by n41																		
	n66	v	v	v	v	v	v	v	-	v	v	v	v	v				v	v	
	n71	v	v	v	v	-	-	-	-	v	v	v	v	v				v	v	



Test Items	NR Band	Bandwidth (MHz)								Modulation					RB #			Test Channel		
		5	10	15	20	25	30	40	50	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Conducted Band Edge	n2	Covered by n25																		
	n5	v	v	v	v	-	-	-	-	v	v	v	v	v	v		v	v		v
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v
	n12	v	v	v	-	-	-	-	v	v	v	v	v	v		v	v		v	
	n25	v	v	v	v	v	v	v	-	v	v	v	v	v	v		v	v		v
	n38	Covered by n41																		
	n66	v	v	v	v	v	v	v	-	v	v	v	v	v	v		v	v		v
	n71	v	v	v	v	-	-	-	-	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	n2	Covered by n25																		
	n5	v				-	-	-	-		v				v			v	v	v
	n7	v									v				v			v	v	v
	n12	v			-	-	-	-		v				v			v	v	v	
	n25	v							-		v				v			v	v	v
	n38	Covered by n41																		
	n66	v							-		v				v			v	v	v
	n71	v				-	-	-	-		v				v			v	v	v
Frequency Stability	n2	Covered by n25																		
	n5				v	-	-	-	-	v							v		v	
	n7				v					v							v		v	
	n12			v	-	-	-	-	v							v		v		
	n25				v				-	v							v		v	
	n38	Covered by n41																		
	n66				v	-			-	v							v		v	
	n71				v	-	-	-	-	v							v		v	
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	v	v	v	v	v	Max. Power					
	n5	v	v	v	v	-	-	-	-	v	v	v	v	v						
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v						
	n12	v	v	v	-	-	-	-	v	v	v	v	v							
	n25	v	v	v	v	v	v	v	-	v	v	v	v	v						
	n38	-	v	v	v	-		-	-	v	v	v	v	v						
	n66	v	v	v	v	v	v	v	-	v	v	v	v	v						
	n71	v	v	v	v	-	-	-	-	v	v	v	v	v						




Test Items	NR Band	Bandwidth (MHz)								Modulation					RB #			Test Channel		
		5	10	15	20	25	30	40	50	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	n2	Worst Case															v	v	v	
	n5	Worst Case															v	v	v	
	n7	Worst Case															v	v	v	
	n12	Worst Case															v	v	v	
	n25	Worst Case															v	v	v	
	n38	Covered by n41																		
	n66	Worst Case															v	v	v	
	n71	Worst Case															v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination are EN-DC 2A-n2A, EN-DC 30A-n2A, EN-DC 12A-n7A, EN-DC 66A-n7A, EN-DC 66B-n7A, EN-DC 66C-n7A, EN-DC 2A-n66A, EN-DC 2A-n66A, EN-DC 66A-n25A, EN-DC 66B-n25A. All the radiated test cases were performed with Adapter 1 and USB Cable 2. Wider operating range bandwidth covers narrower one when the power is higher or the same. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. During the preliminary test, both charging modes (Adapter mode and WPT Charging mode) were verified. It is determined that the adaptor mode is the worst case for official test. One representative bandwidth is selected to perform PAR and frequency stability. 																			



Test Items	NR Band	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		10	15	20	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n41			v								v	v	v	v	v			v		v	
26dB and 99% Bandwidth	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v	
Conducted Band Edge	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	n41	v											v				v			v	v	v
Frequency Stability	n41			v								v							v		v	
E.R.P / E.I.R.P	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	Max Power					
Radiated Spurious Emission	n41	Worst Case																	v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination are EN-DC 66A-n41A, EN-DC 12A-n41A. All the radiated test cases were performed with Adapter 2 and USB Cable 1.. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. During the preliminary test, both charging modes (Adapter mode and WPT Charging mode) were verified. It is determined that the adaptor mode is the worst case for official test. One representative bandwidth is selected to perform PAR and frequency stability. 																					

2.2 Connection Diagram of Test System

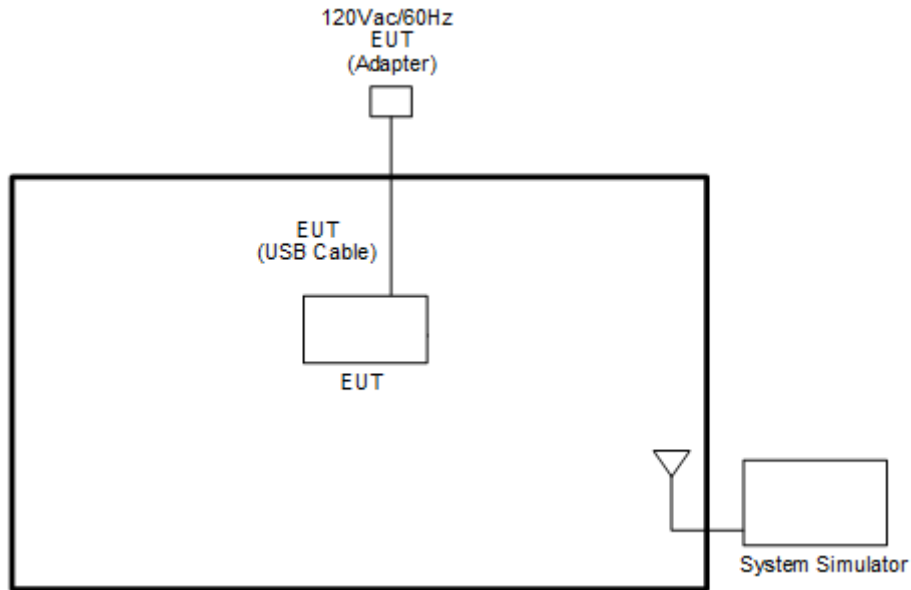

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502000	507000	511550
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1990
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685



5G NR Band n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR Band n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

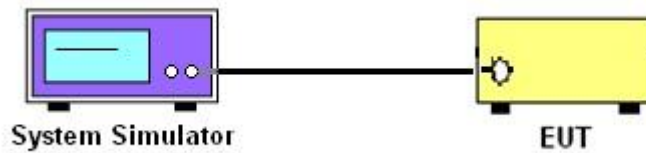

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

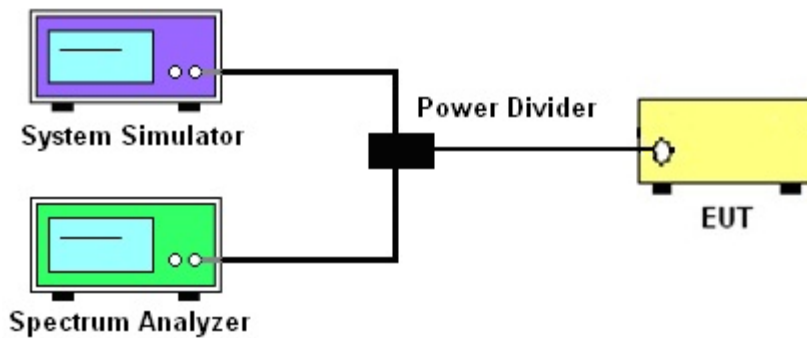

3.1.4 Frequency Stability

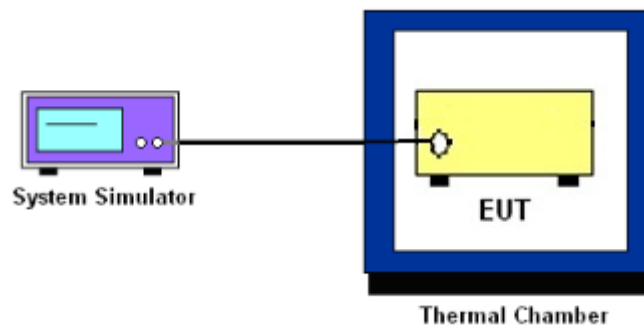

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12 and n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2 and n25 and n7 and n38 and n41.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.
5. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

**27.53(m)(4)**

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7

The other 40 dB, and 55 dB have additionally applied same calculation above.

8. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

For 5G NR n38, n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n7, n38, n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
10. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

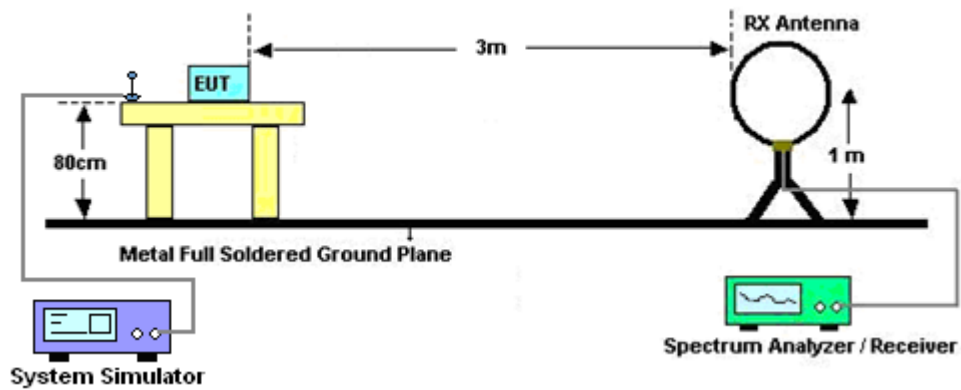


For radiated test from 30MHz to 1GHz

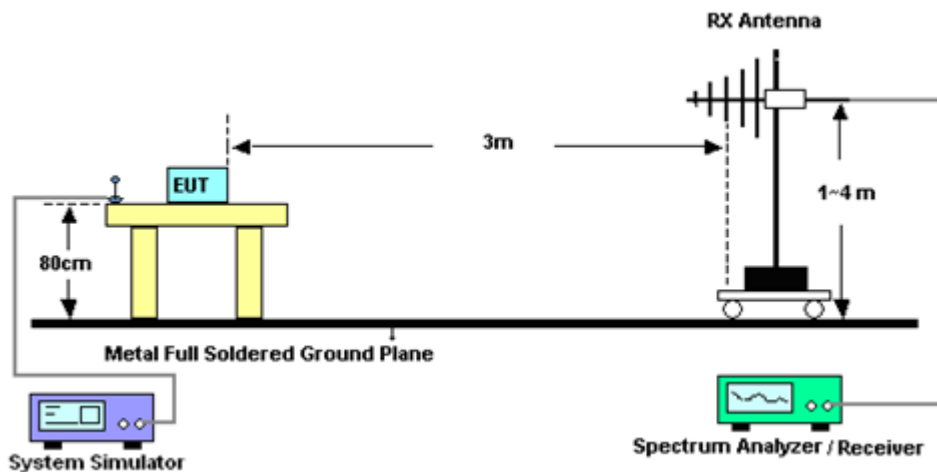

For radiated test from 1GHz to 18GHz

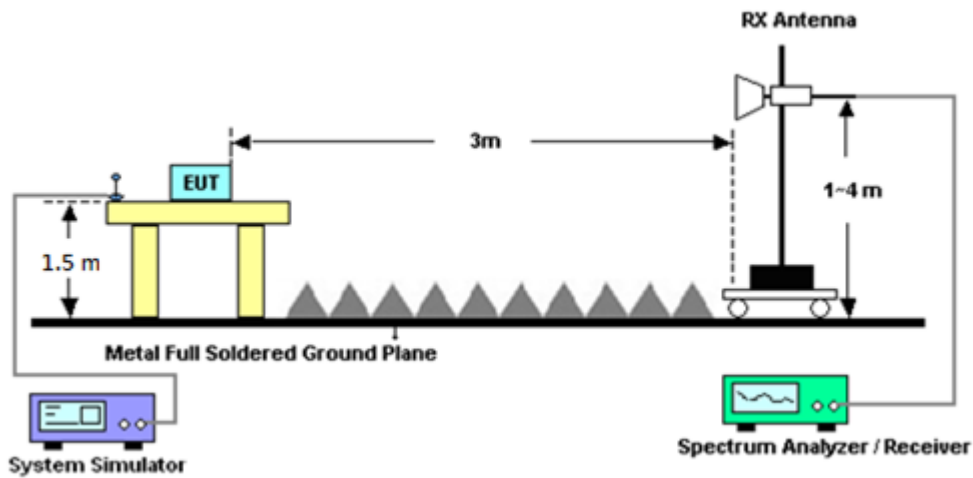

For radiated test above 18GHz

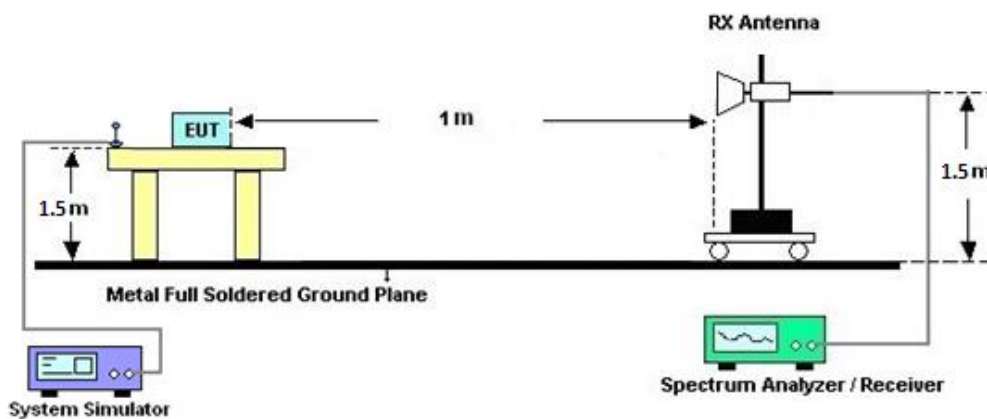

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n7, n38, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Mar. 29, 2022~ May 24, 2022	Sep. 06, 2022	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-0 6	37059 & 01	30MHz~1GHz	Oct. 09, 2021	Mar. 29, 2022~ May 24, 2022	Oct. 08, 2022	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0080 0N1D01N-06	35414 & AT-N0602	30MHz to 1GHz	Oct. 09, 2021	Mar. 29, 2022~ May 24, 2022	Oct. 08, 2022	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 30, 2021	Mar. 29, 2022~ May 24, 2022	Dec. 29, 2022	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-01620	1-18GHz	Oct. 25, 2021	Mar. 29, 2022~ May 24, 2022	Oct. 24, 2022	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Mar. 29, 2022~ May 24, 2022	Oct. 24, 2022	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00993	18GHz- 40GHz	Nov. 30, 2021	Mar. 29, 2022~ May 24, 2022	Nov. 29, 2022	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000 55006	1GHz~18GHz	May 06, 2021	Mar. 29, 2022~ May 04, 2022	May 05, 2022	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000 55006	1GHz~18GHz	May 05, 2022	May 05, 2022~ May 24, 2022	May 04, 2023	Radiation (03CH15-HY)
Amplifier	E-INSTRUME NT TECH LTD	ERA-10M-7000- MR	EC1900247	10MHz-7GHz	Dec. 03, 2021	Mar. 29, 2022~ May 24, 2022	Dec. 02, 2022	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz-18GHz	Dec. 16, 2021	Mar. 29, 2022~ May 24, 2022	Dec. 15, 2022	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18-40GHz	Jun. 22, 2021	Mar. 29, 2022~ May 24, 2022	Jun. 21, 2022	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9038A	MY54130085	20MHz~8.4GHz	Oct. 21, 2021	Mar. 29, 2022~ May 24, 2022	Oct. 20, 2022	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	Mar. 07, 2022	Mar. 29, 2022~ May 24, 2022	Mar. 06, 2023	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 29, 2022~ May 24, 2022	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 29, 2022~ May 24, 2022	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Mar. 29, 2022~ May 24, 2022	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY36980/4,M Y9838/4PE,50 8405/2E	30MHz~18G	Nov. 15, 2021	Mar. 29, 2022~ May 24, 2022	Nov. 14, 2022	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	30MHz-40GHz	Jan. 04, 2022	Mar. 29, 2022~ May 24, 2022	Jan. 03, 2023	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Mar. 29, 2022~ May 24, 2022	Jan. 03, 2023	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	0.1Hz~40GHz	Dec. 08, 2021	Mar. 29, 2022~ May 24, 2022	Dec. 07, 2022	Radiation (03CH15-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	50Hz~60Hz	Oct. 06, 2021	Mar. 21, 2022~ May 23, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101102	10Hz~44GHz	Feb. 09, 2022	Mar. 21, 2022~ May 23, 2022	Feb. 08, 2023	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 09, 2021	Mar. 21, 2022~ May 23, 2022	Sep. 08, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6261849015	LTE	Ocr. 06, 2021	Mar. 21, 2022~ May 23, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6261940327	FR1	Oct. 29, 2021	Mar. 21, 2022~ May 23, 2022	Oct. 28, 2022	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.92 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.94 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

<SISO Mode>

<DFT-s-OFDM>

<Primary Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.99	25.05	25.03	26.64	0.4613
5	1	23		24.92	25.04	24.99		
5	12	6		25.01	25.05	24.95		
5	1	0		24.45	24.52	24.52		
5	1	24		24.51	24.51	24.47		
5	25	0		24.45	24.55	24.45		
5	1	1	QPSK	25.14	24.93	24.99		
5	1	23		25.10	25.01	24.93		
5	12	6		25.03	25.02	24.95		
5	1	0		24.11	23.94	24.01		
5	1	24		24.06	23.98	23.95		
5	25	0		22.62	22.47	22.52		
5	1	1	16-QAM	24.25	23.82	24.01	25.75	0.3758
5	1	1	64-QAM	22.80	22.45	22.45		
5	1	1	256-QAM	19.12	18.81	19.00		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.22	24.75	25.01	26.72	0.4699
10	1	50		25.07	24.71	24.91		
10	25	12		25.17	24.78	25.04		
10	1	0		24.70	24.12	24.55		
10	1	51		24.63	24.21	24.41		
10	50	0		24.63	24.07	24.50		
10	1	1	QPSK	25.05	24.87	24.52		
10	1	50		25.03	24.88	25.04		
10	25	12		25.07	24.91	24.21		
10	1	0		24.12	23.92	24.07		
10	1	51		24.10	23.88	23.97		
10	50	0		22.52	22.45	22.61		
10	1	1	16-QAM	24.00	23.98	24.31	25.81	0.3811
10	1	1	64-QAM	22.78	22.45	22.45		
10	1	1	256-QAM	18.82	18.94	19.21		
Limit	EIRP < 2W			Result			Pass	



NR n2 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.12	24.83	24.88	26.62	0.4592
15	1	77		25.02	24.83	24.78		
15	36	18		25.10	24.89	24.05		
15	1	0		24.74	24.20	24.45		
15	1	78		24.57	24.23	24.32		
15	75	0		24.57	24.28	24.45		
15	1	1	QPSK	25.07	24.87	24.12	25.57	0.3606
15	1	77		24.92	24.85	24.02		
15	36	18		25.02	24.96	24.11		
15	1	0		24.11	23.88	23.99		
15	1	78		23.95	23.86	23.88		
15	75	0		22.56	22.47	22.48		
15	1	1	16-QAM	24.01	24.01	24.07	25.57	0.3606
15	1	1	64-QAM	22.57	22.54	22.74		
15	1	1	256-QAM	19.01	18.89	18.95		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.11	24.83	24.78	26.61	0.4581
20	1	104		24.96	24.73	24.71		
20	50	25		25.04	24.88	24.93		
20	1	0		24.66	24.21	24.38		
20	1	105		24.45	24.21	24.31		
20	100	0		24.57	24.21	24.45		
20	1	1	QPSK	25.02	24.97	25.07	25.61	0.3639
20	1	104		24.92	24.87	24.94		
20	50	25		25.01	24.88	24.67		
20	1	0		24.05	23.84	24.05		
20	1	105		23.96	23.87	23.92		
20	100	0		22.51	22.34	22.56		
20	1	1	16-QAM	24.02	23.99	24.11	25.61	0.3639
20	1	1	64-QAM	22.52	22.64	22.52		
20	1	1	256-QAM	18.67	19.07	19.01		
Limit	EIRP < 2W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = -2.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.92	24.84	24.82	20.48	0.1117
5	1	23		24.91	24.83	24.81		
5	12	6		24.92	24.93	24.81		
5	1	0		24.41	24.41	24.31		
5	1	24		24.43	24.37	24.33		
5	25	0		24.41	24.37	24.35		
5	1	1	QPSK	24.91	24.91	24.89		
5	1	23		24.87	24.84	24.81		
5	12	6		24.91	24.91	24.85		
5	1	0		23.91	23.87	23.82		
5	1	24		23.94	23.88	23.81		
5	25	0		23.41	23.37	23.31		
5	1	1	16-QAM	23.91	24.01	23.71	19.56	0.0904
5	1	1	64-QAM	21.45	21.24	21.31		
5	1	1	256-QAM	19.01	18.97	18.73		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -2.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.91	24.84	24.73	20.49	0.1119
10	1	50		24.94	24.83	24.72		
10	25	12		24.91	24.85	24.78		
10	1	0		24.39	24.34	24.26		
10	1	51		24.32	24.33	24.24		
10	50	0		24.40	24.39	24.28		
10	1	1	QPSK	24.81	24.83	24.71		
10	1	50		24.82	24.82	24.68		
10	25	12		24.93	24.87	24.78		
10	1	0		23.87	23.89	23.77		
10	1	51		23.84	23.80	23.72		
10	50	0		23.41	23.41	23.29		
10	1	1	16-QAM	24.04	24.04	23.97	19.59	0.0910
10	1	1	64-QAM	21.40	21.41	21.37		
10	1	1	256-QAM	18.82	18.89	18.70		
Limit	ERP < 7W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = -2.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.81	24.80	24.81	20.44	0.1107
15	1	77		24.68	24.80	24.71		
15	36	18		24.87	24.81	24.82		
15	1	0		24.35	24.33	24.30		
15	1	78		24.22	24.27	24.24		
15	75	0		24.37	24.30	24.31		
15	1	1	QPSK	24.89	24.87	24.72		
15	1	77		24.77	24.85	24.73		
15	36	18		24.83	24.78	24.77		
15	1	0		23.84	23.85	23.79		
15	1	78		23.77	23.84	23.80		
15	75	0		23.35	23.27	23.34		
15	1	1	16-QAM	23.78	23.82	23.78	19.37	0.0865
15	1	1	64-QAM	21.41	21.51	21.02		
15	1	1	256-QAM	18.91	18.71	18.78		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -2.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.82	24.87	24.79	20.42	0.1102
20	1	104		24.74	24.79	24.75		
20	50	25		24.80	24.86	24.81		
20	1	0		24.31	24.37	24.34		
20	1	105		24.21	24.32	24.24		
20	100	0		24.31	24.36	24.33		
20	1	1	QPSK	24.78	24.84	24.72		
20	1	104		24.74	24.76	24.74		
20	50	25		24.78	24.87	24.85		
20	1	0		23.81	23.84	23.78		
20	1	105		23.74	23.81	23.77		
20	100	0		23.31	23.31	23.36		
20	1	1	16-QAM	23.94	23.71	24.01	19.56	0.0904
20	1	1	64-QAM	21.41	21.31	21.61		
20	1	1	256-QAM	18.78	19.02	18.63		
Limit	ERP < 7W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.78	24.55	24.69	23.99	0.2506
5	1	23		24.79	24.57	24.72		
5	12	6		24.76	24.55	24.67		
5	1	0		24.31	24.04	24.22		
5	1	24		24.31	24.11	24.21		
5	25	0		24.40	24.04	24.21		
5	1	1	QPSK	24.75	24.54	24.78		
5	1	23		24.72	24.60	24.75		
5	12	6		24.69	24.50	24.71		
5	1	0		23.81	23.59	23.75		
5	1	24		23.70	23.59	23.79		
5	25	0		22.25	22.02	22.29		
5	1	1	16-QAM	23.86	23.39	23.91	23.11	0.2046
5	1	1	64-QAM	22.32	21.99	22.31		
5	1	1	256-QAM	18.84	18.57	18.64		
Limit	Power < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.71	24.67	24.69	23.91	0.2460
10	1	50		24.61	24.51	24.71		
10	25	12		24.63	24.60	24.67		
10	1	0		24.12	24.17	24.17		
10	1	51		24.14	24.07	24.21		
10	50	0		24.11	24.07	24.19		
10	1	1	QPSK	24.70	24.57	24.62		
10	1	50		24.62	24.54	24.62		
10	25	12		24.63	24.56	24.64		
10	1	0		23.68	22.67	23.77		
10	1	51		23.68	22.61	23.71		
10	50	0		22.18	22.06	22.24		
10	1	1	16-QAM	23.61	23.91	23.61	23.11	0.2046
10	1	1	64-QAM	22.26	22.04	22.19		
10	1	1	256-QAM	18.71	18.64	18.74		
Limit	Power < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	24.82	24.62	24.74	24.02	0.2523
15	1	77		24.60	24.54	24.80		
15	36	18		24.66	24.55	24.81		
15	1	0		24.27	24.12	24.25		
15	1	78		24.14	24.02	24.29		
15	75	0		24.19	24.07	24.26		
15	1	1	QPSK	24.71	24.61	24.81		
15	1	77		24.64	24.52	24.80		
15	36	18		24.67	24.61	24.82		
15	1	0		23.71	23.71	23.75		
15	1	78		23.67	23.60	23.88		
15	75	0		22.18	22.15	22.31		
15	1	1	16-QAM	23.86	23.93	23.71	23.13	0.2056
15	1	1	64-QAM	22.35	22.45	22.42		
15	1	1	256-QAM	18.61	18.83	18.61		
Limit	Power < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.81	24.80	24.64	24.02	0.2523
20	1	104		24.71	24.55	24.82		
20	50	25		24.71	24.55	24.72		
20	1	0		24.27	24.14	24.15		
20	1	105		24.16	24.05	24.31		
20	100	0		24.22	24.11	24.27		
20	1	1	QPSK	24.82	24.64	24.72		
20	1	104		24.77	24.50	24.77		
20	50	25		24.80	24.59	24.71		
20	1	0		23.79	23.75	23.77		
20	1	105		23.70	23.61	23.85		
20	100	0		22.29	22.11	22.25		
20	1	1	16-QAM	23.94	23.67	23.57	23.14	0.2061
20	1	1	64-QAM	22.53	22.04	22.21		
20	1	1	256-QAM	18.64	18.71	18.52		
Limit	Power < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.81	24.68	24.55	24.01	0.2518		
25	1	131		24.74	24.51	24.66				
25	64	32		24.72	24.53	24.68				
25	1	0		24.33	24.18	24.08				
25	1	132		24.25	24.05	24.22				
25	128	0		24.25	24.06	24.19				
25	1	1	QPSK	24.77	24.74	24.61			23.11	0.2046
25	1	131		24.78	24.55	24.72				
25	64	32		24.79	24.65	24.71				
25	1	0		23.84	23.71	23.61				
25	1	132		23.74	23.54	23.85				
25	128	0		22.26	22.16	22.23				
25	1	1	16-QAM	23.91	23.60	23.51	23.11	0.2046		
25	1	1	64-QAM	22.37	22.35	22.12				
25	1	1	256-QAM	19.02	18.55	18.57				
Limit	Power < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.81	24.92	24.55	24.12	0.2582		
30	1	158		24.61	24.62	24.72				
30	80	40		24.80	24.57	24.61				
30	1	0		24.26	24.34	24.08				
30	1	159		24.16	24.19	24.16				
30	160	0		24.12	24.13	24.25				
30	1	1	QPSK	24.73	24.79	24.55			23.15	0.2065
30	1	158		24.58	24.67	24.65				
30	80	40		24.69	24.55	24.62				
30	1	0		23.77	23.90	23.68				
30	1	159		23.68	23.64	23.80				
30	160	0		22.14	22.09	22.14				
30	1	1	16-QAM	23.87	23.95	23.67	23.15	0.2065		
30	1	1	64-QAM	22.31	22.12	21.95				
30	1	1	256-QAM	18.79	18.91	18.34				
Limit	Power < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.93	24.72	24.70	24.13	0.2588		
40	1	214		24.65	24.65	24.74				
40	108	54		24.69	24.55	24.65				
40	1	0		24.32	24.26	24.24				
40	1	215		24.14	24.17	24.30				
40	216	0		24.27	24.11	24.25				
40	1	1	QPSK	24.81	24.92	24.72			24.13	0.2588
40	1	214		24.71	24.74	24.86				
40	108	54		24.70	24.60	24.69				
40	1	0		23.90	23.81	23.73				
40	1	215		23.69	23.77	23.90				
40	216	0		22.19	22.11	22.28				
40	1	1	16-QAM	24.05	23.84	23.61	23.25	0.2113		
40	1	1	64-QAM	22.88	22.71	22.44				
40	1	1	256-QAM	18.94	18.71	18.77				
Limit	Power < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -0.8 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	24.75	24.62	24.81	24.01	0.2518		
50	1	268		24.42	24.52	24.65				
50	135	67		24.43	24.38	24.32				
50	1	0		24.28	24.16	24.17				
50	1	269		24.04	24.10	24.10				
50	270	0		24.10	23.91	23.91				
50	1	1	QPSK	24.77	24.69	24.77			24.01	0.2518
50	1	268		24.55	24.65	24.57				
50	135	67		24.47	24.37	24.31				
50	1	0		23.81	23.84	23.82				
50	1	269		23.55	23.66	23.84				
50	270	0		21.94	22.02	22.04				
50	1	1	16-QAM	23.84	23.96	23.70	23.16	0.2070		
50	1	1	64-QAM	22.41	22.62	22.30				
50	1	1	256-QAM	18.92	18.74	18.97				
Limit	Power < 2W			Result			Pass			



NR n12 Maximum Average Power [dBm] (GT - LC = -2.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.93	25.01	24.91	20.09	0.1021
5	1	23		24.97	24.99	24.87		
5	12	6		24.95	25.01	24.85		
5	1	0		24.46	24.52	24.41		
5	1	24		24.53	24.51	24.39		
5	25	0		24.42	24.51	24.43		
5	1	1	QPSK	24.94	25.04	24.87		
5	1	23		24.91	25.02	24.90		
5	12	6		24.94	25.04	24.91		
5	1	0		23.96	24.01	23.95		
5	1	24		23.98	24.04	23.92		
5	25	0		23.49	23.51	23.44		
5	1	1	16-QAM	24.01	24.01	23.94	19.06	0.0805
5	1	1	64-QAM	21.45	21.54	21.41		
5	1	1	256-QAM	19.07	18.95	18.92		
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = -2.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.85	25.03	24.95	20.09	0.1021
10	1	50		24.92	24.99	24.93		
10	25	12		24.95	25.04	24.96		
10	1	0		24.45	24.52	24.45		
10	1	51		24.45	24.52	24.41		
10	50	0		24.41	24.51	24.45		
10	1	1	QPSK	24.97	24.91	24.95		
10	1	50		24.96	24.95	24.95		
10	25	12		24.95	25.03	24.96		
10	1	0		23.93	24.01	23.95		
10	1	51		23.93	24.04	23.94		
10	50	0		23.45	23.54	23.44		
10	1	1	16-QAM	23.91	24.12	23.92	19.17	0.0826
10	1	1	64-QAM	21.41	21.51	21.52		
10	1	1	256-QAM	19.07	19.02	18.74		
Limit	ERP < 3W			Result			Pass	



NR n12 Maximum Average Power [dBm] (GT - LC = -2.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.97	24.98	24.91	20.12	0.1028
15	1	77		25.03	24.97	24.96		
15	36	18		25.02	24.99	24.96		
15	1	0		24.48	24.46	24.45		
15	1	78		24.51	24.45	24.45		
15	75	0		24.51	24.49	24.51		
15	1	1	QPSK	25.06	25.01	24.92		
15	1	77		25.07	24.96	24.93		
15	36	18		25.00	25.02	25.01		
15	1	0		24.05	23.95	24.02		
15	1	78		24.06	23.94	23.98		
15	75	0		23.54	23.48	23.51		
15	1	1	16-QAM	24.10	24.03	24.11	19.16	0.0824
15	1	1	64-QAM	21.65	21.54	21.64		
15	1	1	256-QAM	19.10	19.07	18.84		
Limit	ERP < 3W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.80	24.71	24.51	26.30	0.4266
5	1	23		24.76	24.67	24.48		
5	12	6		24.74	24.69	24.62		
5	1	0		24.26	24.20	24.07		
5	1	24		24.25	24.18	24.02		
5	25	0		24.22	24.14	24.12		
5	1	1	QPSK	24.70	24.64	24.73		
5	1	23		24.71	24.62	24.64		
5	12	6		24.70	24.62	24.59		
5	1	0		23.66	23.73	23.67		
5	1	24		23.74	23.72	23.66		
5	25	0		22.24	22.17	22.14		
5	1	1	16-QAM	23.64	23.81	23.85	25.35	0.3428
5	1	1	64-QAM	22.41	22.05	22.20		
5	1	1	256-QAM	18.94	18.64	18.72		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.90	24.80	24.41	26.44	0.4406
10	1	50		24.75	24.78	23.82		
10	25	12		24.88	24.71	24.72		
10	1	0		24.27	24.24	24.22		
10	1	51		24.20	24.21	24.06		
10	50	0		24.34	24.21	24.28		
10	1	1	QPSK	24.94	24.61	24.68		
10	1	50		24.84	24.67	24.62		
10	25	12		24.88	24.71	24.73		
10	1	0		23.93	23.73	23.72		
10	1	51		23.90	23.76	23.62		
10	50	0		22.40	22.23	22.23		
10	1	1	16-QAM	24.07	23.52	23.67	25.57	0.3606
10	1	1	64-QAM	22.54	22.30	22.04		
10	1	1	256-QAM	19.04	18.76	18.82		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.00	24.70	24.84	26.50	0.4467
15	1	77		24.85	24.84	24.52		
15	36	18		24.97	24.82	24.69		
15	1	0		24.50	24.26	24.20		
15	1	78		24.37	24.32	24.02		
15	75	0		24.41	24.37	24.25		
15	1	1	QPSK	25.00	24.82	23.16		
15	1	77		24.80	24.82	23.05		
15	36	18		24.91	24.81	23.14		
15	1	0		24.02	23.75	22.85		
15	1	78		23.84	23.87	22.04		
15	75	0		22.34	22.33	21.53		
15	1	1	16-QAM	23.85	23.40	22.21	25.35	0.34280
15	1	1	64-QAM	22.36	22.40	21.60		
15	1	1	256-QAM	18.58	18.98	18.70		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.95	24.50	24.87	26.47	0.4436
20	1	104		24.73	23.93	24.64		
20	50	25		24.90	24.91	23.55		
20	1	0		24.50	24.32	24.22		
20	1	105		24.27	24.01	24.10		
20	100	0		24.35	24.34	24.17		
20	1	1	QPSK	24.97	24.84	24.72		
20	1	104		23.77	24.79	24.35		
20	50	25		24.97	24.86	24.80		
20	1	0		23.97	23.82	23.70		
20	1	105		23.84	23.85	23.56		
20	100	0		22.43	22.41	22.27		
20	1	1	16-QAM	23.72	23.82	23.94	25.44	0.3499
20	1	1	64-QAM	22.46	22.39	22.24		
20	1	1	256-QAM	19.05	18.88	18.86		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.85	24.90	24.71	26.40	0.4365		
25	1	131		24.71	24.64	24.41				
25	64	32		24.85	24.85	24.82				
25	1	0		24.22	24.26	24.01				
25	1	132		24.16	24.32	23.85				
25	128	0		24.17	24.41	23.93				
25	1	1	QPSK	24.07	23.97	24.72			25.47	0.3524
25	1	131		24.85	24.02	24.60				
25	64	32		24.14	24.07	24.87				
25	1	0		24.04	24.01	23.72				
25	1	132		23.84	23.40	23.50				
25	128	0		22.45	22.51	22.26				
25	1	1	16-QAM	23.43	23.97	23.72	25.47	0.3524		
25	1	1	64-QAM	22.45	22.31	22.21				
25	1	1	256-QAM	18.90	19.15	18.51				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.09	24.71	24.61	26.59	0.4560		
30	1	158		24.85	24.53	24.51				
30	80	40		24.94	24.79	24.77				
30	1	0		24.45	24.10	24.25				
30	1	159		24.33	24.02	24.07				
30	160	0		24.40	24.15	24.25				
30	1	1	QPSK	24.81	24.81	24.82			25.41	0.3475
30	1	158		24.70	24.66	24.57				
30	80	40		24.91	24.81	24.72				
30	1	0		24.02	23.73	23.85				
30	1	159		23.66	23.65	23.67				
30	160	0		22.37	22.29	22.31				
30	1	1	16-QAM	23.91	23.72	23.66	25.41	0.3475		
30	1	1	64-QAM	22.41	22.41	22.61				
30	1	1	256-QAM	18.89	18.82	18.88				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = 1.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	24.74	24.60	24.61	26.45	0.4416
40	1	214		24.66	24.45	24.31		
40	108	54		24.92	24.62	24.71		
40	1	0		24.50	23.94	24.34		
40	1	215		24.26	23.78	24.16		
40	216	0		24.40	23.91	24.35		
40	1	1	QPSK	24.94	24.87	24.71	26.45	0.4416
40	1	214		24.80	24.52	24.57		
40	108	54		24.57	24.70	24.95		
40	1	0		24.01	23.66	23.73		
40	1	215		23.82	23.58	23.51		
40	216	0		22.45	22.21	22.39		
40	1	1	16-QAM	23.70	23.92	23.75	25.42	0.3483
40	1	1	64-QAM	22.71	22.34	21.91		
40	1	1	256-QAM	18.87	18.81	18.44		
Limit	EIRP < 2W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.02	24.98	24.94	24.22	0.2642
10	1	22		24.91	24.91	24.91		
10	12	6		24.97	24.94	24.96		
10	1	0		24.51	24.46	24.44		
10	1	23		24.42	24.54	24.41		
10	24	0		24.52	24.43	24.50		
10	1	1	QPSK	25.02	24.99	24.97		
10	1	22		24.95	24.94	24.93		
10	12	6		24.98	24.95	24.97		
10	1	0		24.02	23.97	23.91		
10	1	23		23.94	23.97	23.97		
10	24	0		22.48	22.45	22.47		
10	1	1	16-QAM	24.12	24.06	24.21	23.41	0.2193
10	1	1	64-QAM	22.65	22.66	22.51		
10	1	1	256-QAM	19.07	18.98	18.97		
Limit	Power < 2W			Result			Pass	

NR n38 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.11	25.01	25.11	24.31	0.2698
15	1	36		24.97	24.97	25.07		
15	18	9		25.01	24.91	25.07		
15	1	0		24.54	24.51	24.62		
15	1	37		24.48	24.51	24.58		
15	36	0		24.52	24.41	24.58		
15	1	1	QPSK	25.05	25.00	25.07		
15	1	36		24.93	24.92	25.01		
15	18	9		24.97	24.97	25.07		
15	1	0		24.10	23.95	24.06		
15	1	37		24.01	23.92	24.03		
15	36	0		22.49	22.44	22.61		
15	1	1	16-QAM	24.14	23.95	24.34	23.54	0.2259
15	1	1	64-QAM	22.43	22.74	22.49		
15	1	1	256-QAM	19.13	19.02	19.02		
Limit	Power < 2W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	25.10	24.97	25.02	24.34	0.2716
20	1	49		24.95	24.82	24.99		
20	25	12		25.02	24.95	25.02		
20	1	0		24.63	24.45	24.52		
20	1	50		24.47	24.36	24.51		
20	50	0		24.53	24.44	24.55		
20	1	1	QPSK	25.14	25.01	25.04	24.34	0.2716
20	1	49		25.02	24.91	25.02		
20	25	12		25.07	25.00	25.03		
20	1	0		24.12	24.04	24.01		
20	1	50		24.03	23.92	24.01		
20	50	0		22.55	22.47	22.56		
20	1	1	16-QAM	24.21	24.23	24.21	23.43	0.2203
20	1	1	64-QAM	22.84	22.57	22.97		
20	1	1	256-QAM	19.03	19.00	19.01		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	26.14	26.24	25.84	25.44	0.3499
10	1	22		26.14	26.12	25.86		
10	12	6		26.09	26.14	25.85		
10	1	0		22.57	22.58	22.34		
10	1	23		22.61	22.62	22.32		
10	24	0		25.59	25.69	25.32		
10	1	1	QPSK	26.07	26.11	25.91	25.44	0.3499
10	1	22		26.10	26.15	25.83		
10	12	6		26.09	26.16	25.81		
10	1	0		22.57	22.68	22.32		
10	1	23		22.58	22.61	22.32		
10	24	0		25.10	25.16	24.87		
10	1	1	16-QAM	25.10	25.12	25.12	24.32	0.2704
10	1	1	64-QAM	23.58	23.55	23.37		
10	1	1	256-QAM	21.61	21.85	21.51		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.68	26.52	26.72	25.99	0.3972
15	1	36		26.72	26.54	26.72		
15	18	9		26.62	26.58	26.72		
15	1	0		23.14	23.06	23.27		
15	1	37		23.19	23.08	23.19		
15	36	0		26.13	26.01	26.21		
15	1	1	QPSK	26.57	26.61	26.79	25.99	0.3972
15	1	36		26.64	26.61	26.75		
15	18	9		26.67	26.59	26.73		
15	1	0		23.06	23.09	23.37		
15	1	37		23.11	23.05	23.25		
15	36	0		25.66	25.59	25.74		
15	1	1	16-QAM	25.57	25.55	25.77	24.97	0.3141
15	1	1	64-QAM	24.04	24.22	24.37		
15	1	1	256-QAM	21.89	22.07	22.41		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.83	26.84	26.78	26.07	0.4046
20	1	49		26.78	26.87	26.84		
20	25	12		26.85	26.86	26.85		
20	1	0		23.27	23.41	23.35		
20	1	50		23.32	23.39	23.28		
20	50	0		26.41	26.41	26.28		
20	1	1	QPSK	26.86	26.84	26.85	25.02	0.3177
20	1	49		26.87	26.78	26.72		
20	25	12		26.81	26.85	26.80		
20	1	0		23.29	23.35	23.34		
20	1	50		23.35	23.38	23.21		
20	50	0		25.84	25.90	25.79		
20	1	1	16-QAM	25.78	25.82	25.78	25.02	0.3177
20	1	1	64-QAM	24.51	24.38	24.38		
20	1	1	256-QAM	22.21	22.52	22.31		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.87	26.87	26.68	26.08	0.4055
30	1	76		26.86	26.85	26.59		
30	36	18		26.85	26.84	26.60		
30	1	0		23.41	23.41	23.12		
30	1	77		23.43	23.41	23.08		
30	75	0		26.44	26.38	26.05		
30	1	1	QPSK	26.85	26.88	26.63	25.17	0.3289
30	1	76		26.80	26.87	26.61		
30	36	18		26.87	26.86	26.57		
30	1	0		23.41	23.45	23.17		
30	1	77		23.35	23.41	23.12		
30	75	0		26.00	25.91	25.57		
30	1	1	16-QAM	25.87	25.97	25.67	25.17	0.3289
30	1	1	64-QAM	24.62	24.54	24.03		
30	1	1	256-QAM	22.52	22.34	21.98		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	26.61	26.78	26.71	25.98	0.3963
40	1	104		26.45	26.78	26.51		
40	50	25		26.61	26.64	26.53		
40	1	0		23.12	23.21	23.12		
40	1	105		22.99	23.22	22.90		
40	100	0		26.13	26.14	26.04		
40	1	1	QPSK	26.78	26.78	26.74		
40	1	104		26.57	26.70	26.47		
40	50	25		26.61	26.63	26.51		
40	1	0		23.18	23.16	23.19		
40	1	105		23.01	23.21	23.01		
40	100	0		25.67	25.61	25.54		
40	1	1	16-QAM	25.74	25.99	25.98	25.19	0.3304
40	1	1	64-QAM	24.25	24.06	24.01		
40	1	1	256-QAM	22.29	22.45	21.90		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	26.76	26.75	26.84	26.07	0.4046
50	1	131		26.67	26.67	26.65		
50	64	32		26.68	26.64	26.64		
50	1	0		23.21	23.22	23.31		
50	1	132		23.16	23.19	23.12		
50	128	0		26.20	26.12	26.15		
50	1	1	QPSK	26.71	26.78	26.87		
50	1	131		26.63	26.70	26.67		
50	64	32		26.71	26.66	26.65		
50	1	0		23.24	23.31	23.33		
50	1	132		23.17	23.17	23.13		
50	128	0		25.71	25.63	25.70		
50	1	1	16-QAM	25.67	25.64	25.91	25.11	0.3243
50	1	1	64-QAM	24.15	24.22	24.21		
50	1	1	256-QAM	21.98	21.91	22.41		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.87	26.85	26.84	26.07	0.4046
60	1	160		26.78	26.78	26.66		
60	81	40		26.61	26.72	26.60		
60	1	0		23.31	23.41	23.41		
60	1	161		23.18	23.34	23.15		
60	162	0		26.15	26.25	26.15		
60	1	1	QPSK	26.85	26.85	26.84	26.07	0.4046
60	1	160		26.67	26.84	26.61		
60	81	40		26.65	26.73	26.61		
60	1	0		23.32	23.43	23.46		
60	1	161		23.19	23.34	23.17		
60	162	0		25.67	26.71	25.65		
60	1	1	16-QAM	25.74	26.01	26.05	25.25	0.3350
60	1	1	64-QAM	24.57	24.45	24.48		
60	1	1	256-QAM	22.24	22.39	22.21		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.87	26.87	26.87	26.08	0.4055
80	1	215		26.87	26.81	26.78		
80	108	54		26.57	26.68	26.66		
80	1	0		23.54	23.56	23.59		
80	1	216		23.35	23.56	23.27		
80	216	0		26.21	26.21	26.27		
80	1	1	QPSK	26.87	26.88	26.87	26.08	0.4055
80	1	215		26.87	26.84	26.82		
80	108	54		26.57	26.68	26.66		
80	1	0		23.57	23.59	23.58		
80	1	216		23.41	23.52	23.31		
80	216	0		25.67	25.78	25.73		
80	1	1	16-QAM	26.10	26.18	26.15	25.38	0.3451
80	1	1	64-QAM	24.75	24.65	24.67		
80	1	1	256-QAM	22.50	22.71	22.73		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	26.87	26.87	26.87	26.08	0.4055
90	1	243		26.81	26.87	26.88		
90	120	60		26.59	26.72	26.75		
90	1	0		23.67	23.75	23.68		
90	1	244		23.52	23.68	23.56		
90	240	0		26.25	26.28	26.38		
90	1	1	QPSK	26.87	26.87	26.88		
90	1	243		26.86	26.87	26.80		
90	120	60		26.67	26.73	26.79		
90	1	0		23.65	23.71	23.75		
90	1	244		23.56	23.64	23.52		
90	240	0		25.77	25.82	25.87		
90	1	1	16-QAM	26.24	26.19	26.11	25.44	0.3499
90	1	1	64-QAM	24.67	24.64	24.74		
90	1	1	256-QAM	22.42	22.59	22.69		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = -0.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	26.87	26.87	26.87	26.09	0.4064
100	1	271		26.78	26.76	26.67		
100	135	67		26.21	26.26	26.31		
100	1	0		23.45	23.47	23.47		
100	1	272		23.21	23.32	23.24		
100	270	0		25.84	25.89	26.01		
100	1	1	QPSK	26.87	26.87	26.89		
100	1	271		26.69	26.80	26.75		
100	135	67		26.25	26.27	26.29		
100	1	0		23.50	23.47	23.54		
100	1	272		23.19	23.28	23.25		
100	270	0		25.35	25.40	25.44		
100	1	1	16-QAM	26.07	25.86	26.03	25.27	0.3365
100	1	1	64-QAM	24.47	24.31	24.50		
100	1	1	256-QAM	22.38	22.51	22.57		
Limit	Power < 2W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	25.12	25.07	25.06	24.62	0.2897
5	1	23		25.03	25.04	25.04		
5	12	6		25.07	25.05	25.02		
5	1	0		24.58	24.55	24.57		
5	1	24		24.52	24.52	24.58		
5	25	0		24.57	24.56	24.56		
5	1	1	QPSK	24.96	25.08	25.10		
5	1	23		24.96	25.02	25.05		
5	12	6		25.04	25.07	25.07		
5	1	0		24.11	24.12	24.10		
5	1	24		24.08	24.11	24.07		
5	25	0		22.53	22.51	22.58		
5	1	1	16-QAM	24.10	23.97	24.15	23.65	0.2317
5	1	1	64-QAM	22.57	22.61	22.74		
5	1	1	256-QAM	19.10	19.00	19.17		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.10	25.07	25.07	24.65	0.2917
10	1	50		25.10	25.01	25.02		
10	25	12		25.13	25.04	25.04		
10	1	0		24.65	24.60	24.56		
10	1	51		24.61	24.50	24.49		
10	50	0		24.57	24.52	24.56		
10	1	1	QPSK	25.12	25.01	24.97		
10	1	50		25.10	24.99	24.94		
10	25	12		25.15	25.01	25.04		
10	1	0		24.19	24.07	24.02		
10	1	51		24.11	24.01	23.94		
10	50	0		22.63	22.54	22.53		
10	1	1	16-QAM	24.07	23.92	23.99	23.57	0.2275
10	1	1	64-QAM	22.54	22.41	22.40		
10	1	1	256-QAM	19.01	18.85	19.04		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	25.12	25.03	24.81	24.62	0.2897
15	1	77		25.05	24.10	24.87		
15	36	18		25.11	24.95	24.97		
15	1	0		24.54	24.41	24.31		
15	1	78		24.55	24.31	24.42		
15	75	0		24.55	24.31	24.40		
15	1	1	QPSK	25.01	25.02	25.02		
15	1	77		25.02	25.04	24.93		
15	36	18		25.05	24.97	24.97		
15	1	0		24.06	24.09	23.98		
15	1	78		24.03	24.03	23.97		
15	75	0		22.50	22.46	22.52		
15	1	1	16-QAM	23.87	24.02	24.15	23.65	0.2317
15	1	1	64-QAM	22.31	22.45	22.61		
15	1	1	256-QAM	18.64	19.21	18.63		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.91	25.15	24.85	24.65	0.2917
20	1	104		25.03	24.91	24.91		
20	50	25		25.13	25.04	25.04		
20	1	0		24.43	24.58	24.46		
20	1	105		24.55	24.45	24.41		
20	100	0		24.61	24.55	24.47		
20	1	1	QPSK	24.66	24.98	25.07		
20	1	104		24.81	24.81	24.94		
20	50	25		25.11	25.04	25.01		
20	1	0		24.18	24.04	24.04		
20	1	105		24.06	23.84	23.97		
20	100	0		22.64	22.49	22.51		
20	1	1	16-QAM	24.10	23.84	24.16	23.66	0.2323
20	1	1	64-QAM	22.62	22.74	22.47		
20	1	1	256-QAM	18.71	18.91	19.11		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
25	1	1	PI/2 BPSK	25.12	25.12	24.85	24.66	0.2924
25	1	131		24.99	24.91	24.74		
25	64	32		25.06	25.04	24.99		
25	1	0		24.61	24.53	24.47		
25	1	132		24.48	24.35	24.37		
25	128	0		24.54	24.46	24.47		
25	1	1	QPSK	24.98	25.16	25.10		
25	1	131		25.05	24.98	24.94		
25	64	32		25.13	25.07	24.98		
25	1	0		24.22	24.15	24.03		
25	1	132		23.97	23.94	24.02		
25	128	0		22.57	22.53	22.52		
25	1	1	16-QAM	23.80	24.24	23.99	23.74	0.2366
25	1	1	64-QAM	22.62	22.55	22.81		
25	1	1	256-QAM	18.84	19.15	18.91		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	25.13	25.10	24.83	24.66	0.2924
30	1	158		24.97	24.83	24.71		
30	80	40		25.16	25.03	25.07		
30	1	0		24.64	24.65	24.57		
30	1	159		24.50	24.44	24.41		
30	160	0		24.57	24.51	24.57		
30	1	1	QPSK	24.95	25.10	24.94		
30	1	158		24.98	24.78	24.78		
30	80	40		25.10	24.94	25.02		
30	1	0		24.16	24.07	23.97		
30	1	159		24.04	23.74	23.86		
30	160	0		22.70	22.47	22.51		
30	1	1	16-QAM	23.98	24.01	23.91	23.51	0.2244
30	1	1	64-QAM	22.91	22.34	22.32		
30	1	1	256-QAM	19.07	18.94	18.74		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -0.5 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.01	25.02	24.77	24.59	0.2877
40	1	214		24.81	24.74	24.67		
40	108	54		25.02	24.96	24.81		
40	1	0		24.50	24.35	24.40		
40	1	215		24.31	24.12	24.27		
40	216	0		24.48	24.17	24.44		
40	1	1	QPSK	24.98	25.09	24.46		
40	1	214		24.74	24.77	24.34		
40	108	54		25.07	24.98	24.80		
40	1	0		24.00	24.09	24.04		
40	1	215		23.79	23.71	23.61		
40	216	0		22.47	22.44	22.54		
40	1	1	16-QAM	24.12	24.17	23.47	23.67	0.2328
40	1	1	64-QAM	23.32	22.59	22.28		
40	1	1	256-QAM	19.06	18.73	18.71		
Limit	EIRP < 1W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -5.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	25.08	25.02	25.02	17.66	0.0583
5	1	23		25.11	25.01	24.97		
5	12	6		25.10	25.01	25.01		
5	1	0		24.59	24.52	24.54		
5	1	24		24.60	24.48	24.47		
5	25	0		24.61	24.52	24.50		
5	1	1	QPSK	25.03	24.97	24.93		
5	1	23		25.01	24.97	24.85		
5	12	6		25.05	25.01	24.97		
5	1	0		24.07	24.01	24.05		
5	1	24		24.10	24.00	24.01		
5	25	0		23.62	23.51	23.52		
5	1	1	16-QAM	24.11	24.14	24.12	16.69	0.0467
5	1	1	64-QAM	21.70	21.47	21.71		
5	1	1	256-QAM	19.04	18.97	19.01		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -5.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	25.01	24.97	24.91	17.60	0.0575
10	1	50		25.03	24.96	24.92		
10	25	12		25.05	25.01	24.95		
10	1	0		24.45	24.47	24.44		
10	1	51		24.54	24.45	24.41		
10	50	0		24.55	24.51	24.51		
10	1	1	QPSK	24.97	25.01	24.96		
10	1	50		25.02	24.97	24.90		
10	25	12		25.04	25.01	25.01		
10	1	0		24.01	23.91	23.94		
10	1	51		24.06	23.97	23.92		
10	50	0		23.56	23.52	23.50		
10	1	1	16-QAM	24.11	24.12	24.14	16.69	0.0467
10	1	1	64-QAM	21.52	21.42	21.61		
10	1	1	256-QAM	18.96	18.84	18.91		
Limit	ERP < 3W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -5.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.97	24.95	24.91	17.59	0.0574
15	1	77		24.95	24.95	24.91		
15	36	18		25.02	24.96	24.99		
15	1	0		24.45	24.45	24.41		
15	1	78		24.51	24.41	24.45		
15	75	0		24.51	24.52	24.51		
15	1	1	QPSK	25.04	24.94	24.97		
15	1	77		25.02	24.93	24.93		
15	36	18		25.01	25.03	24.95		
15	1	0		23.96	23.93	24.01		
15	1	78		24.03	23.84	24.01		
15	75	0		23.51	23.55	23.49		
15	1	1	16-QAM	23.94	23.84	24.01	16.56	0.0453
15	1	1	64-QAM	21.35	21.54	21.57		
15	1	1	256-QAM	19.25	18.81	19.00		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -5.3 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.90	24.95	24.95	17.57	0.0571
20	1	104		24.91	24.97	24.91		
20	50	25		25.02	25.01	24.96		
20	1	0		24.41	24.51	24.45		
20	1	105		24.45	24.45	24.45		
20	100	0		24.49	24.53	24.48		
20	1	1	QPSK	24.91	25.01	24.91		
20	1	104		24.91	24.93	24.93		
20	50	25		25.01	24.99	24.99		
20	1	0		23.92	23.94	23.93		
20	1	105		23.94	23.94	23.95		
20	100	0		23.51	23.50	23.51		
20	1	1	16-QAM	24.01	24.10	24.14	16.69	0.0467
20	1	1	64-QAM	21.74	21.52	21.86		
20	1	1	256-QAM	18.74	18.94	18.90		
Limit	ERP < 3W			Result			Pass	



<ASDIV Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.11	24.07	24.11	25.67	0.3690
5	1	23		24.09	24.08	24.12		
5	12	6		24.10	24.21	24.07		
5	1	0		23.61	23.56	23.70		
5	1	24		23.54	23.56	23.60		
5	25	0		23.55	23.58	23.55		
5	1	1	QPSK	24.27	24.07	24.07		
5	1	23		24.21	24.03	23.96		
5	12	6		24.22	24.02	24.00		
5	1	0		23.13	22.98	23.14		
5	1	24		23.11	23.07	23.10		
5	25	0		21.79	21.49	21.67		
5	1	1	16-QAM	23.26	22.99	23.02	24.66	0.2924
5	1	1	64-QAM	21.88	21.59	21.52		
5	1	1	256-QAM	18.26	17.98	18.18		
Limit	EIRP < 2W			Result			Pass	

NR n2 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.27	23.76	24.19	25.76	0.3767
10	1	50		24.17	23.80	23.93		
10	25	12		24.36	23.94	24.05		
10	1	0		23.87	23.31	23.61		
10	1	51		23.81	23.30	23.55		
10	50	0		23.65	23.09	23.66		
10	1	1	QPSK	24.14	23.95	23.71		
10	1	50		24.21	23.99	24.05		
10	25	12		24.23	23.99	23.31		
10	1	0		23.25	22.95	23.13		
10	1	51		23.14	23.00	22.98		
10	50	0		21.59	21.62	21.69		
10	1	1	16-QAM	23.04	22.99	23.43	24.83	0.3041
10	1	1	64-QAM	21.92	21.60	21.55		
10	1	1	256-QAM	17.88	17.95	18.33		
Limit	EIRP < 2W			Result			Pass	



NR n2 Maximum Average Power [dBm] (GT - LC = 1.4 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.21	23.94	24.00	25.62	0.3648		
15	1	77		24.17	23.95	23.92				
15	36	18		24.22	24.04	23.17				
15	1	0		23.78	23.21	23.60				
15	1	78		23.68	23.43	23.35				
15	75	0		23.71	23.32	23.52				
15	1	1	QPSK	24.14	24.01	23.27			24.61	0.2891
15	1	77		24.04	24.03	23.16				
15	36	18		24.21	24.02	23.18				
15	1	0		23.16	23.02	23.12				
15	1	78		22.96	22.86	22.91				
15	75	0		21.64	21.52	21.55				
15	1	1	16-QAM	23.14	23.06	23.21	24.61	0.2891		
15	1	1	64-QAM	21.68	21.64	21.76				
15	1	1	256-QAM	18.16	17.99	18.05				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = 1.4 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.12	23.86	23.88	25.58	0.3614		
20	1	104		24.14	23.83	23.89				
20	50	25		24.09	23.90	24.07				
20	1	0		23.74	23.28	23.55				
20	1	105		23.48	23.38	23.48				
20	100	0		23.72	23.36	23.48				
20	1	1	QPSK	24.06	24.13	24.18			24.66	0.2924
20	1	104		23.94	23.99	24.06				
20	50	25		24.16	24.04	23.73				
20	1	0		23.15	22.95	23.25				
20	1	105		23.14	22.91	23.02				
20	100	0		21.57	21.35	21.61				
20	1	1	16-QAM	23.18	23.16	23.26	24.66	0.2924		
20	1	1	64-QAM	21.67	21.73	21.62				
20	1	1	256-QAM	17.73	18.26	18.16				
Limit	EIRP < 2W			Result			Pass			



NR n5 Maximum Average Power [dBm] (GT - LC = -4.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.60	24.41	24.48	17.85	0.0610
5	1	23		24.55	24.41	24.45		
5	12	6		24.51	24.46	24.34		
5	1	0		24.02	23.92	23.84		
5	1	24		24.06	24.04	23.87		
5	25	0		23.92	23.95	24.01		
5	1	1	QPSK	24.53	24.41	24.50		
5	1	23		24.45	24.37	24.49		
5	12	6		24.60	24.55	24.54		
5	1	0		23.43	23.46	23.33		
5	1	24		23.54	23.48	23.47		
5	25	0		23.09	22.91	22.89		
5	1	1	16-QAM	23.42	23.68	23.23	16.93	0.0493
5	1	1	64-QAM	21.03	20.85	20.98		
5	1	1	256-QAM	18.58	18.60	18.26		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -4.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.57	24.37	24.36	17.88	0.0614
10	1	50		24.63	24.37	24.27		
10	25	12		24.50	24.52	24.41		
10	1	0		23.91	23.94	23.82		
10	1	51		23.91	23.87	23.87		
10	50	0		23.99	23.92	23.88		
10	1	1	QPSK	24.47	24.43	24.22		
10	1	50		24.44	24.43	24.27		
10	25	12		24.60	24.46	24.38		
10	1	0		23.47	23.57	23.28		
10	1	51		23.49	23.45	23.33		
10	50	0		23.06	22.92	22.83		
10	1	1	16-QAM	23.72	23.59	23.64	16.97	0.0498
10	1	1	64-QAM	21.04	21.03	20.91		
10	1	1	256-QAM	18.47	18.52	18.23		
Limit	ERP < 7W			Result			Pass	



NR n5 Maximum Average Power [dBm] (GT - LC = -4.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.36	24.35	24.38	17.79	0.0601
15	1	77		24.21	24.37	24.40		
15	36	18		24.48	24.50	24.41		
15	1	0		23.91	23.89	23.88		
15	1	78		23.81	23.89	23.83		
15	75	0		23.97	23.97	23.99		
15	1	1	QPSK	24.52	24.47	24.32		
15	1	77		24.41	24.54	24.35		
15	36	18		24.48	24.47	24.41		
15	1	0		23.40	23.40	23.37		
15	1	78		23.38	23.50	23.46		
15	75	0		22.86	22.78	22.86		
15	1	1	16-QAM	23.35	23.48	23.45	16.73	0.0471
15	1	1	64-QAM	21.07	21.04	20.65		
15	1	1	256-QAM	18.49	18.23	18.47		
Limit	ERP < 7W			Result			Pass	

NR n5 Maximum Average Power [dBm] (GT - LC = -4.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.51	24.41	24.48	17.76	0.0597
20	1	104		24.43	24.39	24.37		
20	50	25		24.45	24.36	24.38		
20	1	0		23.95	24.00	23.85		
20	1	105		23.82	23.88	23.90		
20	100	0		23.94	24.01	23.96		
20	1	1	QPSK	24.34	24.46	24.29		
20	1	104		24.27	24.42	24.30		
20	50	25		24.30	24.47	24.40		
20	1	0		23.51	23.40	23.45		
20	1	105		23.27	23.46	23.44		
20	100	0		22.83	22.84	22.97		
20	1	1	16-QAM	23.57	23.36	23.52	16.82	0.0481
20	1	1	64-QAM	20.93	21.01	21.18		
20	1	1	256-QAM	18.38	18.64	18.20		
Limit	ERP < 7W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	23.67	23.51	23.54	24.42	0.2767
5	1	23		23.59	23.49	23.69		
5	12	6		23.72	23.43	23.64		
5	1	0		23.21	23.03	23.07		
5	1	24		23.24	23.05	23.16		
5	25	0		23.32	23.02	23.03		
5	1	1	QPSK	23.72	23.39	23.69		
5	1	23		23.53	23.56	23.71		
5	12	6		23.50	23.37	23.58		
5	1	0		22.78	22.54	22.57		
5	1	24		22.53	22.40	22.69		
5	25	0		21.18	20.91	21.12		
5	1	1	16-QAM	22.80	22.26	22.81	23.51	0.2244
5	1	1	64-QAM	21.15	20.97	21.21		
5	1	1	256-QAM	17.66	17.55	17.60		
Limit	Power < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	23.61	23.49	23.66	24.36	0.2729
10	1	50		23.43	23.45	23.60		
10	25	12		23.57	23.44	23.50		
10	1	0		23.02	22.98	23.00		
10	1	51		23.13	23.03	23.19		
10	50	0		22.95	23.01	23.09		
10	1	1	QPSK	23.65	23.45	23.48		
10	1	50		23.45	23.45	23.49		
10	25	12		23.46	23.51	23.48		
10	1	0		22.49	21.67	22.76		
10	1	51		22.58	21.57	22.69		
10	50	0		20.99	20.94	21.24		
10	1	1	16-QAM	22.52	22.73	22.56	23.43	0.2203
10	1	1	64-QAM	21.25	20.90	21.18		
10	1	1	256-QAM	17.67	17.59	17.61		
Limit	Power < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	23.68	23.45	23.68	24.49	0.2812
15	1	77		23.58	23.51	23.79		
15	36	18		23.60	23.53	23.68		
15	1	0		23.10	22.94	23.05		
15	1	78		23.00	22.83	23.21		
15	75	0		23.10	23.00	23.16		
15	1	1	QPSK	23.57	23.41	23.65		
15	1	77		23.61	23.43	23.62		
15	36	18		23.64	23.58	23.63		
15	1	0		22.53	22.56	22.74		
15	1	78		22.53	22.50	22.87		
15	75	0		21.12	21.06	21.15		
15	1	1	16-QAM	22.69	22.87	22.68	23.57	0.2275
15	1	1	64-QAM	21.23	21.41	21.30		
15	1	1	256-QAM	17.58	17.70	17.46		
Limit	Power < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.68	23.71	23.51	24.51	0.2825
20	1	104		23.63	23.46	23.81		
20	50	25		23.68	23.51	23.54		
20	1	0		23.25	23.02	23.14		
20	1	105		23.05	23.04	23.23		
20	100	0		23.21	22.98	23.14		
20	1	1	QPSK	23.76	23.56	23.68		
20	1	104		23.75	23.32	23.67		
20	50	25		23.67	23.51	23.70		
20	1	0		22.66	22.56	22.63		
20	1	105		22.61	22.53	22.74		
20	100	0		21.09	21.10	21.22		
20	1	1	16-QAM	22.82	22.62	22.47	23.52	0.2249
20	1	1	64-QAM	21.39	21.03	21.02		
20	1	1	256-QAM	17.45	17.53	17.47		
Limit	Power < 2W			Result			Pass	



NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	23.64	23.64	23.44	24.41	0.2761		
25	1	131		23.65	23.47	23.47				
25	64	32		23.52	23.34	23.65				
25	1	0		23.20	22.99	22.92				
25	1	132		23.10	22.94	23.14				
25	128	0		23.18	22.89	23.07				
25	1	1	QPSK	23.71	23.55	23.43			24.41	0.2761
25	1	131		23.70	23.51	23.65				
25	64	32		23.69	23.49	23.57				
25	1	0		22.81	22.65	22.47				
25	1	132		22.65	22.46	22.69				
25	128	0		21.23	21.07	21.08				
25	1	1	16-QAM	22.73	22.55	22.33	23.43	0.2203		
25	1	1	64-QAM	21.28	21.34	21.12				
25	1	1	256-QAM	17.87	17.44	17.45				
Limit	Power < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.74	23.73	23.45	24.50	0.2818		
30	1	158		23.43	23.51	23.66				
30	80	40		23.80	23.52	23.53				
30	1	0		23.24	23.33	23.03				
30	1	159		23.15	23.12	22.98				
30	160	0		23.01	22.99	23.14				
30	1	1	QPSK	23.55	23.77	23.47			24.50	0.2818
30	1	158		23.48	23.49	23.48				
30	80	40		23.68	23.45	23.49				
30	1	0		22.71	22.83	22.65				
30	1	159		22.57	22.54	22.72				
30	160	0		21.01	20.98	21.06				
30	1	1	16-QAM	22.83	22.80	22.51	23.53	0.2254		
30	1	1	64-QAM	21.15	20.99	20.94				
30	1	1	256-QAM	17.63	17.83	17.18				
Limit	Power < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	23.87	23.56	23.66	24.57	0.2864
40	1	214		23.48	23.50	23.68		
40	108	54		23.57	23.55	23.62		
40	1	0		23.19	23.13	23.07		
40	1	215		22.98	23.01	23.17		
40	216	0		23.10	22.97	23.05		
40	1	1	QPSK	23.79	23.85	23.55		
40	1	214		23.67	23.64	23.69		
40	108	54		23.57	23.41	23.57		
40	1	0		22.76	22.72	22.55		
40	1	215		22.59	22.75	22.74		
40	216	0		21.11	21.09	21.09		
40	1	1	16-QAM	22.87	22.64	22.51	23.57	0.2275
40	1	1	64-QAM	21.82	21.68	21.26		
40	1	1	256-QAM	17.91	17.56	17.59		
Limit	Power < 2W			Result			Pass	

NR n7 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	23.57	23.55	23.62	24.40	0.2754
50	1	268		23.36	23.32	23.57		
50	135	67		23.27	23.20	23.28		
50	1	0		23.14	23.11	23.07		
50	1	269		22.99	22.94	22.94		
50	270	0		23.05	22.85	22.75		
50	1	1	QPSK	23.68	23.55	23.70		
50	1	268		23.54	23.60	23.47		
50	135	67		23.36	23.26	23.31		
50	1	0		22.68	22.76	22.79		
50	1	269		22.47	22.53	22.76		
50	270	0		20.74	20.93	20.95		
50	1	1	16-QAM	22.72	22.79	22.56	23.49	0.2234
50	1	1	64-QAM	21.36	21.53	21.19		
50	1	1	256-QAM	17.84	17.69	17.83		
Limit	Power < 2W			Result			Pass	



NR n12 Maximum Average Power [dBm] (GT - LC = -5.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.45	24.69	24.55	16.76	0.0474
5	1	23		24.65	24.58	24.39		
5	12	6		24.61	24.71	24.36		
5	1	0		24.13	24.06	23.94		
5	1	24		24.11	24.02	24.04		
5	25	0		23.97	24.04	24.08		
5	1	1	QPSK	24.54	24.68	24.56		
5	1	23		24.47	24.70	24.51		
5	12	6		24.54	24.60	24.54		
5	1	0		23.58	23.64	23.47		
5	1	24		23.61	23.73	23.59		
5	25	0		23.06	23.14	23.06		
5	1	1	16-QAM	23.65	23.56	23.50	15.70	0.0372
5	1	1	64-QAM	21.03	21.21	21.04		
5	1	1	256-QAM	18.72	18.47	18.53		
Limit	ERP < 3W			Result			Pass	

NR n12 Maximum Average Power [dBm] (GT - LC = -5.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.43	24.69	24.59	16.74	0.0472
10	1	50		24.61	24.62	24.51		
10	25	12		24.59	24.55	24.49		
10	1	0		24.01	24.20	24.12		
10	1	51		24.06	24.19	23.91		
10	50	0		23.95	24.10	24.06		
10	1	1	QPSK	24.62	24.54	24.63		
10	1	50		24.52	24.52	24.47		
10	25	12		24.57	24.67	24.54		
10	1	0		23.61	23.71	23.55		
10	1	51		23.58	23.74	23.51		
10	50	0		22.97	23.04	23.01		
10	1	1	16-QAM	23.41	23.68	23.58	15.73	0.0374
10	1	1	64-QAM	21.09	21.20	21.13		
10	1	1	256-QAM	18.73	18.64	18.29		
Limit	ERP < 3W			Result			Pass	



NR n12 Maximum Average Power [dBm] (GT - LC = -5.8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.62	24.64	24.43	16.74	0.0472
15	1	77		24.58	24.52	24.60		
15	36	18		24.66	24.56	24.59		
15	1	0		24.01	24.16	24.01		
15	1	78		24.18	24.08	24.02		
15	75	0		24.11	24.17	24.16		
15	1	1	QPSK	24.62	24.53	24.53	16.74	0.0472
15	1	77		24.60	24.58	24.53		
15	36	18		24.69	24.56	24.62		
15	1	0		23.66	23.61	23.62		
15	1	78		23.71	23.57	23.66		
15	75	0		23.17	23.00	23.11		
15	1	1	16-QAM	23.62	23.56	23.75	15.80	0.0380
15	1	1	64-QAM	21.24	21.20	21.14		
15	1	1	256-QAM	18.77	18.61	18.43		
Limit	ERP < 3W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.29	24.17	23.96	25.69	0.3707
5	1	23		24.09	24.13	23.96		
5	12	6		24.23	24.02	24.09		
5	1	0		23.71	23.50	23.50		
5	1	24		23.73	23.53	23.45		
5	25	0		23.64	23.62	23.50		
5	1	1	QPSK	24.11	24.07	24.16		
5	1	23		24.20	23.92	23.99		
5	12	6		24.18	23.98	24.07		
5	1	0		23.05	23.11	23.07		
5	1	24		23.22	23.19	23.08		
5	25	0		21.74	21.52	21.56		
5	1	1	16-QAM	23.10	23.27	23.23	24.67	0.2931
5	1	1	64-QAM	21.83	21.37	21.68		
5	1	1	256-QAM	18.43	18.01	18.11		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.31	24.23	23.83	25.75	0.3758
10	1	50		24.22	24.13	23.29		
10	25	12		24.35	24.12	24.05		
10	1	0		23.65	23.54	23.66		
10	1	51		23.68	23.56	23.44		
10	50	0		23.78	23.65	23.61		
10	1	1	QPSK	24.30	24.06	24.01		
10	1	50		24.34	24.06	24.09		
10	25	12		24.27	24.14	24.15		
10	1	0		23.35	23.08	23.03		
10	1	51		23.31	23.08	23.03		
10	50	0		21.78	21.65	21.55		
10	1	1	16-QAM	23.44	22.92	23.02	24.84	0.3048
10	1	1	64-QAM	21.99	21.66	21.46		
10	1	1	256-QAM	18.39	18.17	18.30		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	24.32	24.14	24.17	25.86	0.3855
15	1	77		24.24	24.19	23.97		
15	36	18		24.27	24.32	24.08		
15	1	0		23.93	23.59	23.56		
15	1	78		23.67	23.79	23.51		
15	75	0		23.73	23.81	23.64		
15	1	1	QPSK	24.46	24.17	22.60		
15	1	77		24.25	24.16	22.54		
15	36	18		24.40	24.19	22.49		
15	1	0		23.47	23.23	22.32		
15	1	78		23.19	23.20	21.39		
15	75	0		21.79	21.69	20.95		
15	1	1	16-QAM	23.20	22.72	21.56	24.60	0.2884
15	1	1	64-QAM	21.79	21.86	21.00		
15	1	1	256-QAM	18.00	18.43	18.12		
Limit	EIRP < 2W			Result			Pass	

NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.27	23.92	24.30	25.78	0.3784
20	1	104		24.11	23.24	24.00		
20	50	25		24.28	24.26	23.04		
20	1	0		23.90	23.76	23.59		
20	1	105		23.76	23.34	23.45		
20	100	0		23.77	23.80	23.62		
20	1	1	QPSK	24.38	24.19	24.11		
20	1	104		23.09	24.19	23.69		
20	50	25		24.29	24.30	24.19		
20	1	0		23.34	23.25	23.02		
20	1	105		23.29	23.26	22.91		
20	100	0		21.79	21.75	21.57		
20	1	1	16-QAM	23.05	23.20	23.42	24.82	0.3034
20	1	1	64-QAM	21.95	21.70	21.58		
20	1	1	256-QAM	18.53	18.23	18.29		
Limit	EIRP < 2W			Result			Pass	



NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.26	24.23	24.19	25.74	0.3750		
25	1	131		24.15	23.98	23.90				
25	64	32		24.34	24.20	24.29				
25	1	0		23.65	23.72	23.50				
25	1	132		23.55	23.64	23.23				
25	128	0		23.52	23.86	23.37				
25	1	1	QPSK	23.54	23.36	24.13			24.69	0.2944
25	1	131		24.17	23.47	23.99				
25	64	32		23.59	23.39	24.17				
25	1	0		23.49	23.41	23.10				
25	1	132		23.19	22.87	22.93				
25	128	0		21.80	21.96	21.71				
25	1	1	16-QAM	22.92	23.29	23.15	24.69	0.2944		
25	1	1	64-QAM	21.89	21.62	21.66				
25	1	1	256-QAM	18.33	18.60	17.91				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.49	24.19	23.96	25.89	0.3882		
30	1	158		24.17	23.91	23.89				
30	80	40		24.35	24.12	24.13				
30	1	0		23.91	23.55	23.63				
30	1	159		23.73	23.35	23.56				
30	160	0		23.83	23.50	23.72				
30	1	1	QPSK	24.25	24.19	24.13			24.78	0.3006
30	1	158		24.13	24.09	23.93				
30	80	40		24.27	24.15	24.07				
30	1	0		23.35	23.13	23.21				
30	1	159		23.12	22.97	23.09				
30	160	0		21.74	21.68	21.69				
30	1	1	16-QAM	23.38	23.06	23.07	24.78	0.3006		
30	1	1	64-QAM	21.79	21.72	22.06				
30	1	1	256-QAM	18.19	18.24	18.20				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = 1.4 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	24.21	24.03	24.00	25.81	0.3811
40	1	214		24.04	23.87	23.73		
40	108	54		24.39	23.92	24.10		
40	1	0		23.80	23.29	23.66		
40	1	215		23.63	23.19	23.65		
40	216	0		23.84	23.40	23.78		
40	1	1	QPSK	24.41	24.36	24.16	25.81	0.3811
40	1	214		24.23	23.83	23.94		
40	108	54		23.89	24.20	24.31		
40	1	0		23.46	23.10	23.12		
40	1	215		23.30	22.92	22.95		
40	216	0		21.81	21.55	21.79		
40	1	1	16-QAM	23.18	23.26	23.19	24.66	0.2924
40	1	1	64-QAM	22.07	21.71	21.39		
40	1	1	256-QAM	18.36	18.25	17.87		
Limit	EIRP < 2W			Result			Pass	



NR n38 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.50	24.33	24.38	25.20	0.3311		
10	1	22		24.33	24.23	24.28				
10	12	6		24.45	24.41	24.38				
10	1	0		23.84	23.81	23.80				
10	1	23		23.80	23.86	23.90				
10	24	0		23.97	23.86	23.91				
10	1	1	QPSK	24.36	24.43	24.34			25.20	0.3311
10	1	22		24.45	24.37	24.28				
10	12	6		24.34	24.35	24.43				
10	1	0		23.38	23.36	23.26				
10	1	23		23.25	23.34	23.40				
10	24	0		21.90	21.80	21.89				
10	1	1	16-QAM	23.44	23.50	23.54	24.24	0.2655		
10	1	1	64-QAM	22.03	21.97	21.87				
10	1	1	256-QAM	18.48	18.42	18.38				
Limit	Power < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.58	24.41	24.51	25.28	0.3373		
15	1	36		24.41	24.27	24.44				
15	18	9		24.34	24.36	24.40				
15	1	0		23.87	23.84	23.99				
15	1	37		23.80	23.85	23.96				
15	36	0		23.92	23.79	24.07				
15	1	1	QPSK	24.41	24.42	24.46			25.28	0.3373
15	1	36		24.24	24.36	24.37				
15	18	9		24.37	24.46	24.43				
15	1	0		23.40	23.34	23.52				
15	1	37		23.35	23.39	23.39				
15	36	0		21.88	21.78	21.92				
15	1	1	16-QAM	23.44	23.29	23.77	24.47	0.2799		
15	1	1	64-QAM	21.73	22.06	21.95				
15	1	1	256-QAM	18.62	18.51	18.46				
Limit	Power < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	24.46	24.44	24.47	25.23	0.3334
20	1	49		24.36	24.27	24.42		
20	25	12		24.47	24.26	24.36		
20	1	0		24.01	23.86	24.02		
20	1	50		23.83	23.76	23.93		
20	50	0		24.00	23.75	23.91		
20	1	1	QPSK	24.48	24.42	24.37		
20	1	49		24.35	24.34	24.45		
20	25	12		24.53	24.41	24.39		
20	1	0		23.56	23.38	23.32		
20	1	50		23.53	23.25	23.47		
20	50	0		21.93	21.92	22.02		
20	1	1	16-QAM	23.70	23.65	23.69	24.40	0.2754
20	1	1	64-QAM	22.19	21.88	22.40		
20	1	1	256-QAM	18.42	18.35	18.40		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	25.62	25.55	25.29	26.32	0.4285
10	1	22		25.46	25.50	25.28		
10	12	6		25.40	25.59	25.16		
10	1	0		21.98	21.89	21.71		
10	1	23		22.09	21.97	21.65		
10	24	0		25.05	25.11	24.73		
10	1	1	QPSK	25.51	25.49	25.25		
10	1	22		25.40	25.54	25.28		
10	12	6		25.41	25.50	25.31		
10	1	0		22.04	22.06	21.74		
10	1	23		21.98	22.02	21.62		
10	24	0		24.56	24.62	24.32		
10	1	1	16-QAM	24.54	24.50	24.57	25.27	0.3365
10	1	1	64-QAM	22.97	22.92	22.70		
10	1	1	256-QAM	21.10	21.27	20.83		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	26.15	25.85	26.11	26.92	0.4920
15	1	36		26.22	26.00	26.11		
15	18	9		25.92	26.01	26.15		
15	1	0		22.45	22.38	22.76		
15	1	37		22.69	22.50	22.61		
15	36	0		25.49	25.38	25.62		
15	1	1	QPSK	26.01	26.03	26.17		
15	1	36		26.12	25.95	26.08		
15	18	9		26.16	25.95	26.17		
15	1	0		22.43	22.50	22.78		
15	1	37		22.61	22.51	22.64		
15	36	0		25.05	25.07	25.19		
15	1	1	16-QAM	24.91	24.95	25.16	25.86	0.3855
15	1	1	64-QAM	23.48	23.59	23.75		
15	1	1	256-QAM	21.28	21.44	21.75		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	26.18	26.22	26.27	27.04	0.5058
20	1	49		26.20	26.26	26.33		
20	25	12		26.27	26.32	26.34		
20	1	0		22.66	22.79	22.75		
20	1	50		22.70	22.72	22.74		
20	50	0		25.82	25.90	25.60		
20	1	1	QPSK	26.18	26.33	26.17	27.04	0.5058
20	1	49		26.24	26.22	26.03		
20	25	12		26.27	26.23	26.11		
20	1	0		22.61	22.70	22.75		
20	1	50		22.69	22.69	22.70		
20	50	0		25.21	25.39	25.14		
20	1	1	16-QAM	25.17	25.25	25.15	25.95	0.3936
20	1	1	64-QAM	23.83	23.85	23.80		
20	1	1	256-QAM	21.54	21.90	21.64		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
30	1	1	PI/2 BPSK	26.34	26.36	26.08	27.06	0.5082
30	1	76		26.29	26.25	25.94		
30	36	18		26.35	26.17	26.01		
30	1	0		22.89	22.75	22.44		
30	1	77		22.80	22.76	22.49		
30	75	0		25.78	25.80	25.36		
30	1	1	QPSK	26.28	26.28	25.94	27.06	0.5082
30	1	76		26.21	26.21	25.97		
30	36	18		26.28	26.36	25.99		
30	1	0		22.89	22.82	22.49		
30	1	77		22.74	22.91	22.48		
30	75	0		25.41	25.35	25.00		
30	1	1	16-QAM	25.35	25.46	24.97	26.16	0.4130
30	1	1	64-QAM	23.95	23.98	23.45		
30	1	1	256-QAM	21.93	21.72	21.36		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.07	26.18	26.06	26.91	0.4909		
40	1	104		25.93	26.08	25.99				
40	50	25		25.92	25.94	26.03				
40	1	0		22.59	22.70	22.58				
40	1	105		22.35	22.53	22.34				
40	100	0		25.55	25.62	25.37				
40	1	1	QPSK	26.13	26.21	26.09			26.10	0.4074
40	1	104		25.92	26.11	25.94				
40	50	25		26.10	26.07	25.89				
40	1	0		22.53	22.47	22.64				
40	1	105		22.44	22.60	22.33				
40	100	0		24.98	25.05	24.89				
40	1	1	16-QAM	25.15	25.40	25.29	26.10	0.4074		
40	1	1	64-QAM	23.59	23.54	23.33				
40	1	1	256-QAM	21.74	21.93	21.22				
Limit	Power < 2W			Result			Pass			

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.25	26.20	26.32	27.03	0.5047		
50	1	131		26.14	25.98	25.95				
50	64	32		25.99	26.06	26.05				
50	1	0		22.66	22.64	22.64				
50	1	132		22.56	22.65	22.43				
50	128	0		25.52	25.60	25.61				
50	1	1	QPSK	26.17	26.25	26.33			25.96	0.3945
50	1	131		25.93	26.16	26.14				
50	64	32		26.15	26.16	25.95				
50	1	0		22.56	22.67	22.80				
50	1	132		22.67	22.60	22.56				
50	128	0		25.02	25.03	25.13				
50	1	1	16-QAM	24.98	25.00	25.26	25.96	0.3945		
50	1	1	64-QAM	23.48	23.54	23.64				
50	1	1	256-QAM	21.34	21.24	21.82				
Limit	Power < 2W			Result			Pass			



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
60	1	1	PI/2 BPSK	26.29	26.30	26.25	27.00	0.5012
60	1	160		26.27	26.11	26.06		
60	81	40		26.08	26.20	26.04		
60	1	0		22.77	22.86	22.84		
60	1	161		22.55	22.65	22.50		
60	162	0		25.47	25.66	25.52		
60	1	1	QPSK	26.17	26.16	26.29	27.00	0.5012
60	1	160		26.08	26.15	26.00		
60	81	40		26.07	26.20	26.08		
60	1	0		22.62	22.76	22.77		
60	1	161		22.50	22.79	22.66		
60	162	0		25.16	26.13	25.00		
60	1	1	16-QAM	25.15	25.31	25.39	26.09	0.4064
60	1	1	64-QAM	23.96	23.93	23.82		
60	1	1	256-QAM	21.58	21.82	21.67		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	26.17	26.32	26.21	27.06	0.5082
80	1	215		26.25	26.25	26.19		
80	108	54		26.00	26.13	26.03		
80	1	0		23.00	22.94	23.04		
80	1	216		22.80	22.98	22.58		
80	216	0		25.60	25.66	25.72		
80	1	1	QPSK	26.22	26.21	26.36	27.06	0.5082
80	1	215		26.27	26.22	26.24		
80	108	54		26.03	26.07	26.06		
80	1	0		22.87	22.93	23.06		
80	1	216		22.80	22.99	22.74		
80	216	0		25.03	25.21	25.10		
80	1	1	16-QAM	25.46	25.63	25.55	26.33	0.4295
80	1	1	64-QAM	24.24	24.02	24.16		
80	1	1	256-QAM	21.87	22.08	22.19		
Limit	Power < 2W			Result			Pass	



NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	26.25	26.35	26.32	27.05	0.5070
90	1	243		26.26	26.28	26.28		
90	120	60		25.96	26.06	26.19		
90	1	0		23.06	23.12	23.10		
90	1	244		22.89	23.01	22.95		
90	240	0		25.60	25.62	25.76		
90	1	1	QPSK	26.23	26.33	26.24		
90	1	243		26.31	26.33	26.18		
90	120	60		26.09	26.08	26.14		
90	1	0		23.08	23.03	23.17		
90	1	244		22.91	23.04	22.91		
90	240	0		25.22	25.25	25.35		
90	1	1	16-QAM	25.57	25.61	25.58	26.31	0.4276
90	1	1	64-QAM	24.10	23.98	24.18		
90	1	1	256-QAM	21.89	22.09	22.00		
Limit	Power < 2W			Result			Pass	

NR n41 PC2 Maximum Average Power [dBm] (GT - LC = 0.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	26.32	26.26	26.22	27.05	0.5070
100	1	271		26.21	26.13	26.14		
100	135	67		25.61	25.75	25.76		
100	1	0		22.75	22.84	22.83		
100	1	272		22.66	22.74	22.57		
100	270	0		25.14	25.23	25.42		
100	1	1	QPSK	26.35	26.22	26.22		
100	1	271		26.03	26.28	26.19		
100	135	67		25.57	25.69	25.69		
100	1	0		22.97	22.96	22.95		
100	1	272		22.69	22.59	22.73		
100	270	0		24.67	24.73	24.79		
100	1	1	16-QAM	25.42	25.32	25.41	26.12	0.4093
100	1	1	64-QAM	23.94	23.61	23.84		
100	1	1	256-QAM	21.73	21.90	21.94		
Limit	Power < 2W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
5	1	1	PI/2 BPSK	24.27	24.20	24.17	22.17	0.1648
5	1	23		24.11	24.16	24.13		
5	12	6		24.09	24.06	24.04		
5	1	0		23.62	23.68	23.69		
5	1	24		23.52	23.72	23.73		
5	25	0		23.58	23.69	23.59		
5	1	1	QPSK	24.00	24.15	24.16		
5	1	23		24.03	24.08	24.12		
5	12	6		24.10	24.20	24.23		
5	1	0		23.14	23.23	23.26		
5	1	24		23.11	23.18	23.08		
5	25	0		21.72	21.53	21.64		
5	1	1	16-QAM	23.23	23.00	23.33	21.23	0.1327
5	1	1	64-QAM	21.58	21.68	21.94		
5	1	1	256-QAM	18.20	18.15	18.22		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.20	24.12	24.08	22.20	0.1660
10	1	50		24.16	24.19	24.03		
10	25	12		24.16	24.23	24.20		
10	1	0		23.76	23.61	23.69		
10	1	51		23.78	23.62	23.67		
10	50	0		23.64	23.53	23.70		
10	1	1	QPSK	24.30	24.06	24.12		
10	1	50		24.23	24.05	23.96		
10	25	12		24.23	24.02	24.04		
10	1	0		23.36	23.25	23.15		
10	1	51		23.28	23.05	22.95		
10	50	0		21.73	21.55	21.54		
10	1	1	16-QAM	23.23	23.06	23.02	21.13	0.1297
10	1	1	64-QAM	21.58	21.49	21.54		
10	1	1	256-QAM	18.16	17.89	18.09		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	24.17	24.18	23.86	22.11	0.1626
15	1	77		24.07	23.11	23.99		
15	36	18		24.18	24.00	23.99		
15	1	0		23.73	23.56	23.36		
15	1	78		23.59	23.43	23.51		
15	75	0		23.65	23.39	23.48		
15	1	1	QPSK	24.17	24.20	24.14	21.10	0.1288
15	1	77		24.09	24.14	23.94		
15	36	18		24.21	24.10	24.03		
15	1	0		23.22	23.16	23.12		
15	1	78		23.08	23.05	22.97		
15	75	0		21.70	21.61	21.70		
15	1	1	16-QAM	23.01	23.04	23.20	21.10	0.1288
15	1	1	64-QAM	21.38	21.59	21.71		
15	1	1	256-QAM	17.64	18.41	17.74		
Limit	EIRP < 1W			Result			Pass	

NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	23.99	24.19	23.92	22.16	0.1644
20	1	104		24.13	23.92	24.08		
20	50	25		24.18	24.05	24.20		
20	1	0		23.57	23.63	23.62		
20	1	105		23.56	23.56	23.53		
20	100	0		23.67	23.74	23.48		
20	1	1	QPSK	23.78	24.10	24.26	21.22	0.1324
20	1	104		23.88	23.83	23.96		
20	50	25		24.23	24.07	24.19		
20	1	0		23.21	23.08	23.20		
20	1	105		23.09	23.02	23.17		
20	100	0		21.77	21.53	21.55		
20	1	1	16-QAM	23.10	23.01	23.32	21.22	0.1324
20	1	1	64-QAM	21.74	21.90	21.63		
20	1	1	256-QAM	17.82	18.11	18.25		
Limit	EIRP < 1W			Result			Pass	



NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.32	24.22	23.86	22.22	0.1667		
25	1	131		24.16	24.10	23.77				
25	64	32		24.17	24.07	24.17				
25	1	0		23.63	23.53	23.52				
25	1	132		23.50	23.43	23.38				
25	128	0		23.74	23.48	23.65				
25	1	1	QPSK	24.01	24.22	24.21			22.22	0.1667
25	1	131		24.20	24.01	24.07				
25	64	32		24.29	24.13	24.12				
25	1	0		23.30	23.17	23.22				
25	1	132		22.98	23.00	23.05				
25	128	0		21.64	21.57	21.69				
25	1	1	16-QAM	22.84	23.34	23.06	21.24	0.1330		
25	1	1	64-QAM	21.80	21.74	21.88				
25	1	1	256-QAM	18.03	18.20	17.99				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.25	24.21	24.01	22.19	0.1656		
30	1	158		24.13	24.01	23.76				
30	80	40		24.18	24.09	24.11				
30	1	0		23.74	23.71	23.70				
30	1	159		23.64	23.60	23.54				
30	160	0		23.75	23.67	23.75				
30	1	1	QPSK	24.00	24.10	23.98			22.19	0.1656
30	1	158		24.11	23.97	23.88				
30	80	40		24.29	23.97	24.12				
30	1	0		23.20	23.09	23.08				
30	1	159		23.19	22.89	23.01				
30	160	0		21.90	21.64	21.70				
30	1	1	16-QAM	23.10	23.09	23.05	21.00	0.1259		
30	1	1	64-QAM	21.91	21.46	21.35				
30	1	1	256-QAM	18.15	18.07	17.75				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	24.13	24.18	23.77	22.13	0.1633
40	1	214		23.91	23.78	23.83		
40	108	54		24.18	24.00	23.90		
40	1	0		23.52	23.51	23.46		
40	1	215		23.34	23.20	23.37		
40	216	0		23.66	23.30	23.59		
40	1	1	QPSK	24.07	24.14	23.58	22.13	0.1633
40	1	214		23.91	23.93	23.40		
40	108	54		24.23	24.15	23.98		
40	1	0		23.04	23.27	23.24		
40	1	215		22.88	22.86	22.70		
40	216	0		21.66	21.52	21.67		
40	1	1	16-QAM	23.29	23.20	22.64	21.19	0.1315
40	1	1	64-QAM	22.48	21.72	21.37		
40	1	1	256-QAM	18.15	17.89	17.85		
Limit	EIRP < 1W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
5	1	1	PI/2 BPSK	24.98	24.92	24.84	14.83	0.0304
5	1	23		24.84	24.77	24.80		
5	12	6		24.98	24.85	24.81		
5	1	0		24.34	24.33	24.37		
5	1	24		24.38	24.34	24.27		
5	25	0		24.44	24.30	24.29		
5	1	1	QPSK	24.83	24.81	24.83		
5	1	23		24.90	24.77	24.71		
5	12	6		24.89	24.78	24.85		
5	1	0		23.83	23.78	23.83		
5	1	24		23.98	23.83	23.80		
5	25	0		23.48	23.36	23.25		
5	1	1	16-QAM	23.94	24.02	23.91	13.87	0.0244
5	1	1	64-QAM	21.41	21.36	21.59		
5	1	1	256-QAM	18.88	18.71	18.85		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
10	1	1	PI/2 BPSK	24.80	24.74	24.66	14.71	0.0296
10	1	50		24.84	24.79	24.62		
10	25	12		24.79	24.76	24.72		
10	1	0		24.32	24.20	24.31		
10	1	51		24.35	24.27	24.23		
10	50	0		24.33	24.28	24.24		
10	1	1	QPSK	24.76	24.76	24.73		
10	1	50		24.77	24.75	24.79		
10	25	12		24.79	24.85	24.86		
10	1	0		23.86	23.75	23.64		
10	1	51		23.84	23.84	23.77		
10	50	0		23.39	23.33	23.36		
10	1	1	16-QAM	23.88	23.89	24.01	13.86	0.0243
10	1	1	64-QAM	21.42	21.26	21.47		
10	1	1	256-QAM	18.81	18.67	18.74		
Limit	ERP < 3W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.71	24.76	24.68	14.77	0.0300
15	1	77		24.70	24.70	24.70		
15	36	18		24.90	24.80	24.77		
15	1	0		24.25	24.31	24.25		
15	1	78		24.22	24.30	24.17		
15	75	0		24.36	24.23	24.26		
15	1	1	QPSK	24.86	24.74	24.70		
15	1	77		24.92	24.80	24.74		
15	36	18		24.87	24.82	24.84		
15	1	0		23.67	23.70	23.79		
15	1	78		23.92	23.68	23.85		
15	75	0		23.26	23.35	23.35		
15	1	1	16-QAM	23.80	23.60	23.77	13.65	0.0232
15	1	1	64-QAM	21.18	21.32	21.42		
15	1	1	256-QAM	19.12	18.59	18.77		
Limit	ERP < 3W			Result			Pass	

NR n71 Maximum Average Power [dBm] (GT - LC = -8 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
20	1	1	PI/2 BPSK	24.68	24.82	24.71	14.72	0.0296
20	1	104		24.80	24.75	24.62		
20	50	25		24.73	24.74	24.82		
20	1	0		24.15	24.34	24.21		
20	1	105		24.24	24.27	24.29		
20	100	0		24.20	24.24	24.32		
20	1	1	QPSK	24.69	24.80	24.62		
20	1	104		24.74	24.79	24.75		
20	50	25		24.87	24.78	24.80		
20	1	0		23.66	23.84	23.82		
20	1	105		23.70	23.81	23.71		
20	100	0		23.21	23.40	23.39		
20	1	1	16-QAM	23.85	23.85	23.87	13.72	0.0236
20	1	1	64-QAM	21.58	21.26	21.58		
20	1	1	256-QAM	18.55	18.73	18.63		
Limit	ERP < 3W			Result			Pass	



<MIMO Mode>

<CP OFDM>

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	25.76	25.82	25.97	26.05	25.56	25.62	28.92	28.70	28.81	28.12	0.6486
10	1	22		25.84	25.71	25.81	25.97	25.66	25.52	28.92	28.70	28.68		
10	12	6		25.84	25.80	25.87	25.90	25.66	25.67	28.88	28.74	28.78		
10	1	0		22.19	22.29	22.42	22.50	22.13	22.15	25.36	25.22	25.30		
10	1	23		22.27	22.13	22.32	22.43	22.14	22.09	25.36	25.15	25.22		
10	24	0		22.84	22.74	22.91	22.95	22.63	22.65	25.91	25.70	25.79		
10	1	1	16-QAM	25.25	25.39	25.64	25.76	25.16	25.21	28.52	28.29	28.44	27.72	0.5916
10	1	1	64-QAM	23.81	23.67	23.95	24.33	23.48	23.60	27.09	26.59	26.79		
10	1	1	256-QAM	19.23	19.21	19.41	19.66	19.09	18.95	22.46	22.16	22.20		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	25.87	25.88	26.06	26.04	25.59	25.79	28.97	28.75	28.94	28.19	0.6592
15	1	36		25.94	25.71	25.89	26.02	25.69	25.75	28.99	28.71	28.83		
15	19	9		25.94	25.77	26.06	25.97	25.61	25.71	28.97	28.70	28.90		
15	1	0		22.33	22.34	22.53	22.54	22.15	22.28	25.45	25.26	25.42		
15	1	37		22.41	22.17	22.45	22.40	22.16	22.21	25.42	25.18	25.34		
15	38	0		22.91	22.73	23.03	22.99	22.63	22.71	25.96	25.69	25.88		
15	1	1	16-QAM	25.24	25.41	25.61	25.56	25.11	25.20	28.41	28.27	28.42	27.62	0.5781
15	1	1	64-QAM	23.90	23.54	24.23	24.12	23.51	23.70	27.02	26.54	26.98		
15	1	1	256-QAM	19.31	19.30	19.45	19.54	19.06	19.35	22.44	22.19	22.41		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	25.84	25.87	26.05	25.91	25.61	25.81	28.89	28.75	28.94	28.14	0.6516
20	1	49		25.93	25.76	25.91	25.71	25.58	25.68	28.83	28.68	28.81		
20	25	12		25.89	25.77	26.06	25.85	25.62	25.75	28.88	28.71	28.92		
20	1	0		22.31	22.36	22.58	22.41	22.17	22.32	25.37	25.28	25.46		
20	1	50		22.30	22.17	22.42	22.21	22.14	22.15	25.27	25.17	25.30		
20	51	0		22.85	22.74	23.04	22.83	22.67	22.71	25.85	25.72	25.89		
20	1	1	16-QAM	25.37	25.34	25.47	25.61	25.19	25.25	28.50	28.28	28.37	27.70	0.5888
20	1	1	64-QAM	23.84	23.70	23.91	23.94	23.57	23.79	26.90	26.65	26.86		
20	1	1	256-QAM	19.21	19.51	19.48	19.46	19.09	19.11	22.35	22.32	22.31		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	25.91	25.91	26.10	26.04	25.59	25.78	28.99	28.76	28.95	28.19	0.6592
30	1	76		25.97	25.63	25.84	25.86	25.57	25.56	28.93	28.61	28.71		
30	39	19		25.97	25.82	26.10	25.89	25.63	25.71	28.94	28.74	28.92		
30	1	0		22.32	22.40	22.60	22.51	22.16	22.30	25.43	25.29	25.46		
30	1	77		22.45	22.17	22.43	22.36	22.14	22.08	25.42	25.17	25.27		
30	78	0		22.98	22.78	23.09	22.86	22.66	22.71	25.93	25.73	25.91		
30	1	1	16-QAM	25.47	25.62	25.65	25.61	25.17	25.24	28.55	28.41	28.46	27.75	0.5957
30	1	1	64-QAM	23.78	23.74	23.97	23.96	23.61	23.78	26.88	26.69	26.89		
30	1	1	256-QAM	19.35	19.53	19.60	19.25	19.32	19.33	22.31	22.44	22.48		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	25.97	26.07	26.07	26.01	25.57	25.85	29.00	28.84	28.97	28.20	0.6607
40	1	104		26.05	25.87	26.03	25.66	25.70	25.74	28.87	28.80	28.90		
40	53	26		25.87	25.81	26.13	25.74	25.70	25.83	28.82	28.77	28.99		
40	1	0		22.47	22.61	22.57	22.53	22.21	22.32	25.51	25.42	25.46		
40	1	105		22.47	22.19	22.46	22.18	22.15	22.24	25.34	25.18	25.36		
40	106	0		22.93	22.78	23.10	22.77	22.66	22.82	25.86	25.73	25.97		
40	1	1	16-QAM	25.45	25.37	25.62	25.52	25.31	25.46	28.50	28.35	28.55	27.75	0.5957
40	1	1	64-QAM	24.10	23.71	23.94	23.92	23.61	23.71	27.02	26.67	26.84		
40	1	1	256-QAM	19.44	19.41	19.31	19.52	19.11	19.25	22.49	22.27	22.29		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	26.06	26.14	26.09	26.12	25.79	25.90	29.10	28.98	29.01	28.30	0.6761
50	1	131		26.17	25.93	26.22	25.72	25.75	25.87	28.96	28.85	29.06		
50	67	33		26.08	25.84	26.19	25.79	25.72	25.85	28.95	28.79	29.03		
50	1	0		22.45	22.63	22.57	22.64	22.30	22.35	25.56	25.48	25.47		
50	1	132		22.64	22.40	22.70	22.26	22.31	22.35	25.46	25.37	25.54		
50	133	0		23.10	22.81	23.13	22.84	22.71	22.89	25.98	25.77	26.02		
50	1	1	16-QAM	25.63	25.47	25.53	25.73	25.30	25.42	28.69	28.40	28.49	27.89	0.6152
50	1	1	64-QAM	24.15	24.01	24.02	24.03	23.84	23.79	27.10	26.94	26.92		
50	1	1	256-QAM	19.57	19.77	19.40	19.56	19.21	19.42	22.58	22.51	22.42		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	26.28	26.45	26.25	26.24	25.81	26.11	29.27	29.15	29.19	28.47	0.7031
60	1	160		26.39	26.26	26.19	25.81	25.75	25.93	29.12	29.02	29.07		
60	81	40		26.10	25.87	26.05	25.83	25.72	25.70	28.98	28.81	28.89		
60	1	0		22.74	23.01	22.72	22.77	22.34	22.53	25.77	25.70	25.64		
60	1	161		22.82	22.60	22.61	22.31	22.39	22.30	25.58	25.51	25.47		
60	162	0		23.14	22.83	23.05	22.81	22.74	22.75	25.99	25.80	25.91		
60	1	1	16-QAM	25.71	25.71	25.67	25.70	25.52	25.77	28.72	28.63	28.73	27.93	0.6209
60	1	1	64-QAM	24.18	24.48	24.34	24.12	23.67	24.13	27.16	27.10	27.25		
60	1	1	256-QAM	19.74	19.84	19.70	19.62	19.40	19.52	22.69	22.64	22.62		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	26.37	26.54	26.19	26.41	26.20	26.17	29.40	29.38	29.19	28.60	0.7244
80	1	215		26.16	26.24	26.35	25.79	25.95	26.03	28.99	29.11	29.20		
80	109	54		26.05	25.88	26.07	25.71	25.68	25.73	28.89	28.79	28.91		
80	1	0		22.89	23.02	22.76	22.91	22.55	22.61	25.91	25.80	25.70		
80	1	216		22.60	22.64	22.75	22.21	22.53	22.47	25.42	25.60	25.62		
80	217	0		23.05	22.90	23.09	22.79	22.80	22.79	25.93	25.86	25.95		
80	1	1	16-QAM	25.81	25.86	25.88	25.68	25.62	25.67	28.76	28.75	28.79	27.99	0.6295
80	1	1	64-QAM	24.34	24.77	23.82	24.46	24.01	24.21	27.41	27.42	27.03		
80	1	1	256-QAM	19.67	19.83	19.65	19.70	19.79	19.46	22.70	22.82	22.57		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	26.51	26.73	26.32	26.50	26.17	26.22	29.52	29.47	29.28	28.72	0.7447
90	1	243		26.30	26.40	26.27	25.90	26.11	25.98	29.11	29.27	29.14		
90	123	61		26.17	25.89	25.90	25.77	25.64	25.63	28.98	28.78	28.78		
90	1	0		22.97	23.21	22.75	23.06	22.71	22.79	26.03	25.98	25.78		
90	1	244		22.77	22.81	22.87	22.50	22.59	22.62	25.65	25.71	25.76		
90	245	0		23.13	22.97	23.04	22.84	22.81	22.71	26.00	25.90	25.89		
90	1	1	16-QAM	25.80	26.04	25.71	26.18	25.81	25.92	29.00	28.94	28.83	28.20	0.6607
90	1	1	64-QAM	24.38	24.53	24.21	24.61	24.31	24.30	27.51	27.43	27.27		
90	1	1	256-QAM	19.86	20.07	19.78	19.95	19.62	19.94	22.92	22.86	22.87		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = -0.8 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	26.63	26.71	26.45	26.71	26.35	26.28	29.68	29.54	29.38	28.88	0.7727
100	1	271		26.06	26.41	26.34	26.11	26.27	26.19	29.10	29.35	29.28		
100	137	68		26.03	25.92	25.98	25.70	25.71	25.75	28.88	28.83	28.88		
100	1	0		23.12	23.25	22.92	23.31	22.91	22.89	26.23	26.09	25.92		
100	1	272		22.64	22.91	22.90	22.67	22.74	22.77	25.67	25.84	25.85		
100	273	0		23.02	23.04	22.97	22.87	22.97	23.01	25.96	26.02	26.00		
100	1	1	16-QAM	26.14	26.21	25.87	26.29	25.93	25.90	29.23	29.08	28.90	28.43	0.6966
100	1	1	64-QAM	24.44	24.74	24.42	24.67	24.27	24.27	27.57	27.52	27.36		
100	1	1	256-QAM	19.79	20.45	20.06	20.31	19.77	19.94	23.07	23.13	23.01		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	22.77	22.91	23.15	23.19	22.45	22.79	26.00	25.70	25.98	26.70	0.4677
10	1	22		22.91	22.55	22.86	23.00	22.50	22.55	25.97	25.54	25.72		
10	12	6		22.88	22.76	22.71	22.94	22.61	22.64	25.92	25.70	25.69		
10	1	0		19.36	19.22	19.53	19.52	19.18	19.27	22.45	22.21	22.41		
10	1	23		19.46	19.08	19.18	19.61	19.33	18.99	22.55	22.22	22.10		
10	24	0		19.67	19.60	19.93	20.12	19.81	19.69	22.91	22.72	22.82		
10	1	1	16-QAM	22.35	22.36	22.52	22.74	22.09	22.16	25.56	25.24	25.35	26.26	0.4227
10	1	1	64-QAM	20.90	20.76	20.83	21.48	20.48	20.79	24.21	23.63	23.82		
10	1	1	256-QAM	16.20	16.13	16.56	16.70	15.91	15.77	19.47	19.03	19.19		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	22.77	22.74	23.10	22.87	22.68	22.86	25.83	25.72	25.99	26.69	0.4667
15	1	36		23.02	22.85	22.72	22.87	22.53	22.84	25.96	25.70	25.79		
15	19	9		22.87	22.59	23.02	23.05	22.66	22.59	25.97	25.64	25.82		
15	1	0		19.36	19.39	19.53	19.34	19.11	19.42	22.36	22.26	22.49		
15	1	37		19.28	19.16	19.54	19.45	19.31	19.03	22.38	22.25	22.30		
15	38	0		19.72	19.69	20.19	19.91	19.45	19.84	22.83	22.58	23.03		
15	1	1	16-QAM	22.21	22.49	22.80	22.48	22.19	22.15	25.36	25.35	25.50	26.20	0.4169
15	1	1	64-QAM	20.81	20.37	21.38	21.31	20.54	20.56	24.08	23.47	24.00		
15	1	1	256-QAM	16.27	16.50	16.52	16.67	16.10	16.46	19.48	19.31	19.50		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	22.68	22.88	23.07	22.91	22.72	22.87	25.81	25.81	25.98	26.68	0.4656
20	1	49		22.76	22.73	22.76	22.52	22.61	22.59	25.65	25.68	25.69		
20	25	12		22.95	22.71	23.09	22.80	22.61	22.82	25.89	25.67	25.97		
20	1	0		19.23	19.44	19.49	19.49	19.25	19.21	22.37	22.36	22.36		
20	1	50		19.24	19.34	19.44	19.37	19.09	18.96	22.32	22.23	22.22		
20	51	0		19.94	19.56	19.91	19.85	19.71	19.53	22.91	22.65	22.73		
20	1	1	16-QAM	22.42	22.50	22.59	22.50	22.04	22.07	25.47	25.29	25.35	26.17	0.4140
20	1	1	64-QAM	20.77	20.85	20.91	21.13	20.56	20.79	23.96	23.72	23.86		
20	1	1	256-QAM	16.06	16.36	16.54	16.39	16.16	16.25	19.24	19.27	19.41		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 5			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	22.80	22.90	23.09	23.18	22.71	22.71	26.00	25.82	25.91	26.70	0.4677
30	1	76		22.87	22.71	23.03	22.74	22.56	22.58	25.82	25.65	25.82		
30	39	19		22.99	22.85	23.06	22.88	22.66	22.75	25.95	25.77	25.92		
30	1	0		19.32	19.48	19.74	19.66	19.09	19.21	22.50	22.30	22.49		
30	1	77		19.50	19.24	19.28	19.31	19.28	18.93	22.42	22.27	22.12		
30	78	0		19.92	19.87	20.22	19.76	19.74	19.65	22.85	22.82	22.95		
30	1	1	16-QAM	22.36	22.66	22.83	22.54	22.26	22.28	25.46	25.47	25.57	26.27	0.4236
30	1	1	64-QAM	20.67	20.57	20.96	21.04	20.67	20.68	23.87	23.63	23.83		
30	1	1	256-QAM	16.52	16.55	16.66	16.24	16.43	16.38	19.39	19.50	19.53		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 5			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	22.99	22.96	23.26	23.16	22.60	22.83	26.09	25.79	26.06	26.79	0.4775
40	1	104		23.05	22.81	22.98	22.80	22.80	22.82	25.94	25.82	25.91		
40	53	26		22.67	22.67	23.26	22.80	22.72	22.82	25.75	25.71	26.06		
40	1	0		19.38	19.72	19.68	19.46	19.05	19.38	22.43	22.41	22.54		
40	1	105		19.62	19.14	19.46	19.36	19.34	19.30	22.50	22.25	22.39		
40	106	0		19.92	19.92	20.19	19.61	19.51	19.93	22.78	22.73	23.07		
40	1	1	16-QAM	22.29	22.18	22.50	22.63	22.14	22.55	25.47	25.17	25.54	26.24	0.4207
40	1	1	64-QAM	21.08	20.85	20.89	21.12	20.56	20.53	24.11	23.72	23.72		
40	1	1	256-QAM	16.56	16.46	16.12	16.36	16.01	16.31	19.47	19.25	19.23		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 5			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	23.09	23.29	23.22	23.21	22.60	22.87	26.16	25.97	26.06	26.86	0.4853
50	1	131		23.02	22.80	23.19	22.65	22.80	22.99	25.85	25.81	26.10		
50	67	33		23.01	22.76	23.26	22.94	22.88	22.89	25.99	25.83	26.09		
50	1	0		19.63	19.70	19.74	19.82	19.32	19.17	22.74	22.52	22.47		
50	1	132		19.76	19.41	19.69	19.16	19.21	19.41	22.48	22.32	22.56		
50	133	0		19.95	19.62	20.23	20.00	19.78	20.01	22.99	22.71	23.13		
50	1	1	16-QAM	22.51	22.59	22.44	22.69	22.33	22.52	25.61	25.47	25.49	26.31	0.4276
50	1	1	64-QAM	21.32	21.09	20.82	20.88	20.95	20.74	24.12	24.03	23.79		
50	1	1	256-QAM	16.60	16.64	16.44	16.37	16.40	16.27	19.50	19.53	19.37		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	23.44	23.44	23.28	23.24	22.76	23.19	26.35	26.12	26.25	27.05	0.5070
60	1	160		23.24	23.33	23.28	22.66	22.91	23.08	25.97	26.14	26.19		
60	81	40		23.03	22.85	23.10	22.93	22.76	22.66	25.99	25.82	25.90		
60	1	0		19.86	19.89	19.82	19.80	19.54	19.46	22.84	22.73	22.65		
60	1	161		19.90	19.68	19.53	19.41	19.19	19.22	22.67	22.45	22.39		
60	162	0		19.94	19.76	19.97	19.78	19.81	19.90	22.87	22.80	22.95		
60	1	1	16-QAM	22.69	22.53	22.83	22.84	22.42	22.96	25.78	25.49	25.91	26.61	0.4581
60	1	1	64-QAM	21.17	21.46	21.54	21.09	20.59	21.28	24.14	24.06	24.42		
60	1	1	256-QAM	16.57	16.97	16.53	16.76	16.38	16.67	19.68	19.70	19.61		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	23.24	23.54	23.13	23.49	23.18	23.15	26.38	26.37	26.15	27.08	0.5105
80	1	215		23.18	23.35	23.21	22.98	23.00	23.15	26.09	26.19	26.19		
80	109	54		23.17	23.05	23.01	22.85	22.79	22.54	26.02	25.93	25.79		
80	1	0		19.77	20.00	19.91	20.09	19.52	19.64	22.94	22.78	22.79		
80	1	216		19.46	19.51	19.70	19.17	19.49	19.64	22.33	22.51	22.68		
80	217	0		19.85	19.87	20.09	19.79	19.97	19.89	22.83	22.93	23.00		
80	1	1	16-QAM	22.96	22.79	22.79	22.83	22.68	22.78	25.91	25.75	25.80	26.61	0.4581
80	1	1	64-QAM	21.39	21.61	20.76	21.39	21.20	21.36	24.40	24.42	24.08		
80	1	1	256-QAM	16.60	16.83	16.66	16.66	16.72	16.31	19.64	19.79	19.50		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	23.58	23.84	23.24	23.48	23.21	23.36	26.54	26.55	26.31	27.25	0.5309
90	1	243		23.23	23.36	23.24	22.89	22.98	22.90	26.07	26.18	26.08		
90	123	61		23.16	22.93	22.74	22.92	22.52	22.65	26.05	25.74	25.71		
90	1	0		20.07	20.17	19.76	20.11	19.67	19.92	23.10	22.94	22.85		
90	1	244		19.85	19.78	19.89	19.56	19.44	19.43	22.72	22.62	22.68		
90	245	0		20.07	19.88	20.13	19.75	19.89	19.65	22.92	22.90	22.91		
90	1	1	16-QAM	22.76	23.18	22.79	23.30	22.91	23.02	26.05	26.06	25.92	26.76	0.4742
90	1	1	64-QAM	21.21	21.36	21.06	21.71	21.48	21.10	24.48	24.43	24.09		
90	1	1	256-QAM	16.99	17.24	16.91	16.95	16.49	17.04	19.98	19.89	19.99		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	23.83	23.67	23.51	23.71	23.38	23.47	26.78	26.54	26.50	27.48	0.5598
100	1	271		22.94	23.37	23.53	23.26	23.22	23.32	26.11	26.31	26.44		
100	137	68		22.83	22.89	22.94	22.78	22.72	22.92	25.82	25.82	25.94		
100	1	0		19.93	20.13	19.94	20.27	19.93	19.69	23.11	23.04	22.83		
100	1	272		19.67	19.92	19.89	19.83	19.61	19.89	22.76	22.78	22.90		
100	273	0		19.83	19.86	20.16	19.91	19.84	20.10	22.88	22.86	23.14		
100	1	1	16-QAM	23.27	23.05	22.76	23.11	22.85	22.77	26.20	25.96	25.78	26.90	0.4898
100	1	1	64-QAM	21.61	21.93	21.58	21.68	21.20	21.15	24.66	24.59	24.38		
100	1	1	256-QAM	16.60	17.25	17.18	17.30	16.60	16.92	19.97	19.95	20.06		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.39	23.61	23.84	23.70	23.53	23.34	26.56	26.58	26.61	27.26	0.5321
10	1	22		23.76	23.46	23.54	23.54	23.55	23.16	26.66	26.52	26.36		
10	12	6		23.57	23.59	23.66	23.61	23.54	23.44	26.60	26.58	26.56		
10	1	0		20.11	20.07	20.03	20.22	20.10	19.98	23.18	23.10	23.02		
10	1	23		20.04	20.05	20.25	20.34	19.92	19.80	23.20	23.00	23.04		
10	24	0		20.66	20.53	20.67	20.78	20.31	20.35	23.73	23.43	23.52		
10	1	1	16-QAM	22.99	23.21	23.62	23.33	23.05	23.01	26.17	26.14	26.34	26.94	0.4943
10	1	1	64-QAM	21.51	21.44	21.65	21.69	21.37	21.33	24.61	24.42	24.50		
10	1	1	256-QAM	16.93	16.88	17.38	17.69	16.90	16.78	20.34	19.90	20.10		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.49	23.52	23.95	23.62	23.23	23.67	26.57	26.39	26.82	27.42	0.5521
15	1	36		23.53	23.71	23.72	23.56	23.55	23.52	26.56	26.64	26.63		
15	19	9		23.67	23.65	23.86	23.72	23.59	23.63	26.71	26.63	26.76		
15	1	0		19.99	20.15	20.14	20.29	19.91	20.18	23.15	23.04	23.17		
15	1	37		20.02	19.85	20.18	20.12	19.76	20.03	23.08	22.82	23.12		
15	38	0		20.47	20.57	20.74	20.65	20.33	20.38	23.57	23.46	23.57		
15	1	1	16-QAM	23.21	23.28	23.42	23.47	22.84	22.81	26.35	26.08	26.14	26.95	0.4955
15	1	1	64-QAM	21.67	21.52	22.14	21.60	21.15	21.69	24.65	24.35	24.93		
15	1	1	256-QAM	16.84	17.11	17.06	17.35	16.95	17.34	20.11	20.04	20.21		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.55	23.58	23.93	23.81	23.31	23.71	26.69	26.46	26.83	27.47	0.5585
20	1	49		23.98	23.74	23.56	23.59	23.41	23.48	26.80	26.59	26.53		
20	25	12		23.75	23.65	23.98	23.58	23.41	23.74	26.68	26.54	26.87		
20	1	0		20.25	20.06	20.41	20.32	19.83	20.29	23.30	22.96	23.36		
20	1	50		20.50	20.01	20.13	20.06	19.96	19.93	23.30	23.00	23.04		
20	51	0		20.51	20.51	20.96	20.85	20.39	20.32	23.69	23.46	23.66		
20	1	1	16-QAM	23.40	22.99	23.33	23.19	23.15	23.09	26.31	26.08	26.22	26.91	0.4909
20	1	1	64-QAM	21.38	21.61	21.67	21.55	21.51	21.70	24.48	24.57	24.70		
20	1	1	256-QAM	17.25	17.16	17.38	17.57	16.93	16.80	20.42	20.06	20.11		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
30	1	1	QPSK	23.63	23.91	23.95	23.56	23.29	23.68	26.61	26.62	26.83	27.44	0.5546
30	1	76		23.57	23.41	23.61	23.54	23.48	23.17	26.57	26.46	26.41		
30	39	19		23.90	23.77	23.78	23.75	23.42	23.58	26.84	26.61	26.69		
30	1	0		20.18	20.36	20.60	20.05	20.04	20.05	23.13	23.21	23.34		
30	1	77		20.29	19.94	20.04	20.17	20.01	19.81	23.24	22.99	22.94		
30	78	0		20.84	20.59	20.79	20.57	20.55	20.37	23.72	23.58	23.60		
30	1	1	16-QAM	23.09	23.43	23.54	23.07	23.13	23.11	26.09	26.29	26.34	26.94	0.4943
30	1	1	64-QAM	21.42	21.36	21.77	21.79	21.30	21.67	24.62	24.34	24.73		
30	1	1	256-QAM	17.37	17.21	17.50	17.27	17.00	16.95	20.33	20.12	20.24		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
40	1	1	QPSK	23.82	24.05	23.89	23.81	23.19	23.58	26.83	26.65	26.75	27.43	0.5534
40	1	104		24.03	23.73	23.98	23.50	23.36	23.64	26.78	26.56	26.82		
40	53	26		23.66	23.79	23.94	23.74	23.50	23.63	26.71	26.66	26.80		
40	1	0		20.26	20.56	20.25	20.47	19.95	20.28	23.38	23.28	23.28		
40	1	105		20.52	20.12	20.09	20.03	20.01	19.90	23.29	23.08	23.01		
40	106	0		20.72	20.75	20.73	20.76	20.30	20.79	23.75	23.54	23.77		
40	1	1	16-QAM	23.22	23.10	23.48	23.16	23.15	23.35	26.20	26.14	26.43	27.03	0.5047
40	1	1	64-QAM	21.72	21.37	21.92	21.71	21.22	21.41	24.73	24.31	24.68		
40	1	1	256-QAM	17.38	17.08	17.15	17.38	16.78	17.25	20.39	19.94	20.21		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
50	1	1	QPSK	23.84	24.04	23.70	23.83	23.75	23.76	26.85	26.91	26.74	27.51	0.5636
50	1	131		24.04	23.56	23.90	23.42	23.68	23.47	26.75	26.63	26.70		
50	67	33		23.63	23.66	24.09	23.40	23.60	23.52	26.53	26.64	26.82		
50	1	0		20.29	20.54	20.33	20.26	20.05	20.34	23.29	23.31	23.35		
50	1	132		20.35	20.37	20.37	19.84	20.11	20.16	23.11	23.25	23.28		
50	133	0		20.59	20.42	21.09	20.45	20.61	20.68	23.53	23.53	23.90		
50	1	1	16-QAM	23.20	23.30	23.38	23.51	22.97	23.09	26.37	26.15	26.25	26.97	0.4977
50	1	1	64-QAM	21.64	21.95	21.97	21.99	21.75	21.49	24.83	24.86	24.75		
50	1	1	256-QAM	17.08	17.43	17.18	17.32	17.17	17.16	20.21	20.31	20.18		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	24.06	24.38	24.02	24.07	23.77	24.10	27.08	27.10	27.07	27.70	0.5888
60	1	160		23.99	23.93	24.03	23.64	23.44	23.53	26.83	26.70	26.80		
60	81	40		23.81	23.56	23.88	23.52	23.44	23.42	26.68	26.51	26.67		
60	1	0		20.60	20.90	20.34	20.43	20.22	20.18	23.53	23.58	23.27		
60	1	161		19.91	20.25	20.42	20.20	20.22	20.26	23.07	23.25	23.35		
60	162	0		20.74	20.74	20.84	20.69	20.38	20.61	23.73	23.57	23.74		
60	1	1	16-QAM	23.38	23.38	23.29	23.50	23.21	23.53	26.45	26.31	26.42	27.05	0.5070
60	1	1	64-QAM	21.94	22.41	22.26	21.84	21.36	21.84	24.90	24.93	25.07		
60	1	1	256-QAM	17.79	17.69	17.57	17.56	17.38	17.36	20.69	20.55	20.48		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	24.19	24.21	23.98	24.14	23.94	24.11	27.18	27.09	27.06	27.78	0.5998
80	1	215		24.06	24.19	23.97	23.76	23.82	23.71	26.92	27.02	26.85		
80	109	54		23.96	23.68	24.02	23.44	23.47	23.62	26.72	26.59	26.83		
80	1	0		20.64	20.87	20.71	20.63	20.44	20.53	23.65	23.67	23.63		
80	1	216		20.26	20.59	20.42	19.95	20.17	20.12	23.12	23.40	23.28		
80	217	0		20.90	20.67	20.73	20.54	20.62	20.68	23.73	23.66	23.72		
80	1	1	16-QAM	23.40	23.51	23.60	23.70	23.26	23.39	26.56	26.40	26.51	27.16	0.5200
80	1	1	64-QAM	22.21	22.48	21.47	22.21	21.73	22.11	25.22	25.13	24.81		
80	1	1	256-QAM	17.63	17.73	17.27	18.04	17.77	17.35	20.85	20.76	20.32		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	24.29	24.69	23.95	24.25	24.03	23.92	27.28	27.38	26.95	27.98	0.6281
90	1	243		23.65	24.03	24.18	23.55	23.76	23.93	26.61	26.91	27.07		
90	123	61		23.54	23.77	23.82	23.42	23.30	23.23	26.49	26.55	26.55		
90	1	0		20.79	21.17	20.40	20.90	20.59	20.54	23.86	23.90	23.48		
90	1	244		20.11	20.43	20.65	20.42	20.25	20.57	23.28	23.35	23.62		
90	245	0		20.84	20.92	20.96	20.47	20.67	20.58	23.67	23.81	23.78		
90	1	1	16-QAM	23.79	23.67	23.49	23.78	23.73	23.77	26.80	26.71	26.64	27.40	0.5495
90	1	1	64-QAM	22.50	22.38	22.05	22.24	21.94	22.11	25.38	25.18	25.09		
90	1	1	256-QAM	17.77	17.96	17.70	17.73	17.53	17.70	20.76	20.76	20.71		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.6 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 2			Antenna 5			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	24.59	24.44	24.38	24.65	24.27	24.21	27.63	27.37	27.31	28.23	0.6653
100	1	271		24.08	24.31	24.17	23.98	23.94	23.95	27.04	27.14	27.07		
100	137	68		24.10	23.72	23.60	23.55	23.52	23.74	26.84	26.63	26.68		
100	1	0		21.00	21.15	20.81	21.28	20.90	20.58	24.15	24.04	23.71		
100	1	272		20.69	20.70	20.75	20.48	20.73	20.52	23.60	23.73	23.65		
100	273	0		20.98	21.04	20.77	20.71	20.74	20.66	23.86	23.90	23.73		
100	1	1	16-QAM	23.70	23.87	23.57	24.28	23.84	23.81	27.01	26.87	26.70	27.61	0.5768
100	1	1	64-QAM	22.56	22.56	22.22	22.51	21.90	21.93	25.55	25.25	25.09		
100	1	1	256-QAM	17.67	18.34	17.75	18.02	17.53	17.70	20.86	20.96	20.74		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	23.82	23.67	23.82	24.01	23.40	23.75	26.93	26.55	26.80	27.63	0.5794
10	1	22		23.92	23.52	23.75	23.84	23.53	23.50	26.89	26.54	26.64		
10	12	6		23.62	23.64	23.90	23.70	23.49	23.80	26.67	26.58	26.86		
10	1	0		20.45	20.37	20.22	20.41	20.15	20.05	23.44	23.27	23.15		
10	1	23		20.09	19.94	20.39	20.46	20.31	20.16	23.29	23.14	23.29		
10	24	0		20.85	20.62	20.94	20.94	20.80	20.71	23.91	23.72	23.84		
10	1	1	16-QAM	23.15	23.47	23.84	23.47	23.30	23.29	26.32	26.40	26.58	27.28	0.5346
10	1	1	64-QAM	21.88	21.79	21.92	21.98	21.64	21.66	24.94	24.73	24.80		
10	1	1	256-QAM	17.09	17.18	17.35	17.88	17.05	17.15	20.51	20.13	20.26		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	23.96	23.98	24.00	24.02	23.68	23.88	27.00	26.84	26.95	27.70	0.5888
15	1	36		23.97	23.68	24.04	23.89	23.68	23.58	26.94	26.69	26.83		
15	19	9		23.86	23.67	23.86	23.75	23.70	23.55	26.82	26.70	26.72		
15	1	0		20.30	20.18	20.41	20.40	20.14	20.45	23.36	23.17	23.44		
15	1	37		20.27	20.28	20.48	20.19	20.33	20.07	23.24	23.32	23.29		
15	38	0		20.72	20.81	20.98	20.76	20.83	20.84	23.75	23.83	23.92		
15	1	1	16-QAM	23.37	23.42	23.70	23.32	23.22	23.31	26.36	26.33	26.52	27.22	0.5272
15	1	1	64-QAM	21.91	21.34	22.10	21.98	21.66	21.58	24.96	24.51	24.86		
15	1	1	256-QAM	17.32	17.15	17.34	17.81	17.20	17.19	20.58	20.19	20.28		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	23.75	24.05	24.13	23.88	23.73	23.87	26.83	26.90	27.01	27.71	0.5902
20	1	49		24.05	23.93	23.86	23.62	23.74	23.79	26.85	26.85	26.84		
20	25	12		24.05	23.76	24.03	23.76	23.65	23.67	26.92	26.72	26.86		
20	1	0		20.15	20.34	20.48	20.60	20.35	20.23	23.39	23.36	23.37		
20	1	50		20.61	20.23	20.35	20.20	20.12	20.24	23.42	23.19	23.31		
20	51	0		21.00	20.91	21.09	21.03	20.79	20.73	24.03	23.86	23.92		
20	1	1	16-QAM	23.36	23.38	23.49	23.54	23.08	23.40	26.46	26.24	26.46	27.16	0.5200
20	1	1	64-QAM	21.61	21.54	22.03	21.72	21.48	21.94	24.68	24.52	25.00		
20	1	1	256-QAM	17.24	17.51	17.58	17.74	17.00	17.26	20.51	20.27	20.43		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	23.77	23.79	23.93	23.96	23.68	23.79	26.88	26.75	26.87	27.65	0.5821
30	1	76		23.68	23.71	24.01	23.77	23.39	23.64	26.74	26.56	26.84		
30	39	19		24.03	23.88	23.97	23.85	23.43	23.90	26.95	26.67	26.95		
30	1	0		20.31	20.35	20.62	20.28	20.24	20.33	23.31	23.31	23.49		
30	1	77		20.36	20.24	20.38	20.33	20.17	20.12	23.36	23.22	23.26		
30	78	0		20.95	20.72	21.18	20.65	20.59	20.76	23.81	23.67	23.99		
30	1	1	16-QAM	23.36	23.47	23.73	23.42	23.30	23.36	26.40	26.40	26.56	27.26	0.5321
30	1	1	64-QAM	21.64	21.82	21.91	21.75	21.73	21.70	24.71	24.79	24.82		
30	1	1	256-QAM	17.47	17.40	17.74	17.22	17.20	17.13	20.36	20.31	20.46		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	23.87	24.10	24.22	23.92	23.75	23.76	26.91	26.94	27.01	27.73	0.5929
40	1	104		24.20	23.99	23.95	23.63	23.61	23.91	26.93	26.81	26.94		
40	53	26		24.03	23.95	24.06	24.01	23.53	23.65	27.03	26.76	26.87		
40	1	0		20.26	20.71	20.77	20.46	20.11	20.48	23.37	23.43	23.64		
40	1	105		20.57	20.15	20.30	20.32	20.20	20.29	23.46	23.19	23.31		
40	106	0		20.88	20.97	21.28	20.85	20.60	20.67	23.88	23.80	24.00		
40	1	1	16-QAM	23.18	23.55	23.78	23.49	23.25	23.43	26.35	26.41	26.62	27.32	0.5395
40	1	1	64-QAM	22.20	21.60	22.12	22.04	21.62	21.76	25.13	24.62	24.95		
40	1	1	256-QAM	17.38	17.58	17.32	17.26	17.29	17.26	20.33	20.45	20.30		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 1			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	24.07	24.33	23.97	24.01	23.63	23.74	27.05	27.00	26.87	27.75	0.5957
50	1	131		24.06	23.79	24.15	23.48	23.65	23.75	26.79	26.73	26.96		
50	67	33		23.93	23.99	24.24	23.81	23.59	23.67	26.88	26.80	26.97		
50	1	0		20.55	20.83	20.58	20.70	20.33	20.39	23.64	23.60	23.50		
50	1	132		20.55	20.54	20.76	20.30	20.23	20.51	23.44	23.40	23.65		
50	133	0		20.95	20.78	21.31	20.94	20.62	20.80	23.96	23.71	24.07		
50	1	1	16-QAM	23.55	23.54	23.52	23.53	23.14	23.29	26.55	26.35	26.42	27.25	0.5309
50	1	1	64-QAM	21.99	21.81	21.84	21.99	21.84	21.61	25.00	24.84	24.74		
50	1	1	256-QAM	17.24	17.77	17.32	17.65	17.03	17.25	20.46	20.43	20.30		
Limit	EIRP < 2W			Result									Pass	



NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
60	1	1	QPSK	24.44	24.28	24.11	23.93	23.66	24.20	27.20	26.99	27.17	27.90	0.6166
60	1	160		23.94	24.27	24.18	23.93	23.75	23.98	26.95	27.03	27.09		
60	81	40		23.96	23.89	23.95	23.62	23.77	23.55	26.80	26.84	26.76		
60	1	0		20.65	21.15	20.74	20.77	20.19	20.49	23.72	23.71	23.63		
60	1	161		20.22	20.55	20.80	20.48	20.37	20.30	23.36	23.47	23.57		
60	162	0		20.81	20.70	21.05	20.70	20.65	20.77	23.77	23.69	23.92		
60	1	1	16-QAM	23.72	23.55	23.69	23.62	23.64	23.67	26.68	26.61	26.69	27.39	0.5483
60	1	1	64-QAM	22.02	22.40	22.28	21.97	21.51	22.11	25.01	24.99	25.21		
60	1	1	256-QAM	17.85	17.94	17.76	17.89	17.22	17.43	20.88	20.61	20.61		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
80	1	1	QPSK	24.38	24.35	24.39	24.43	24.22	23.97	27.42	27.30	27.20	28.12	0.6486
80	1	215		23.93	24.42	24.19	23.60	23.95	23.99	26.78	27.20	27.10		
80	109	54		23.98	23.83	24.06	23.89	23.50	23.73	26.95	26.68	26.91		
80	1	0		21.01	20.85	20.58	20.82	20.38	20.64	23.93	23.63	23.62		
80	1	216		20.32	20.74	20.70	20.16	20.50	20.47	23.25	23.63	23.60		
80	217	0		20.98	21.01	20.94	20.91	20.90	20.99	23.96	23.97	23.98		
80	1	1	16-QAM	23.63	23.73	23.72	23.80	23.54	23.53	26.73	26.65	26.64	27.43	0.5534
80	1	1	64-QAM	22.30	22.61	21.85	22.69	22.05	22.03	25.51	25.35	24.95		
80	1	1	256-QAM	17.78	17.92	17.83	18.28	17.73	17.28	21.05	20.84	20.57		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
90	1	1	QPSK	24.45	24.76	24.13	24.56	24.32	24.18	27.52	27.56	27.17	28.26	0.6699
90	1	243		23.84	24.31	24.47	23.73	24.04	24.03	26.80	27.19	27.27		
90	123	61		23.81	24.04	24.05	23.45	23.56	23.54	26.64	26.82	26.81		
90	1	0		21.11	21.01	20.82	21.19	20.69	20.68	24.16	23.86	23.76		
90	1	244		20.32	20.81	21.01	20.52	20.40	20.55	23.43	23.62	23.80		
90	245	0		21.01	21.08	21.01	20.89	20.91	20.75	23.96	24.01	23.89		
90	1	1	16-QAM	24.10	23.99	23.86	23.82	23.95	23.86	26.97	26.98	26.87	27.68	0.5861
90	1	1	64-QAM	22.68	22.47	22.11	22.43	22.44	22.47	25.57	25.47	25.30		
90	1	1	256-QAM	18.17	18.26	17.73	17.71	17.59	17.91	20.96	20.95	20.83		
Limit	EIRP < 2W			Result									Pass	

NR n41 PC1.5 Maximum Average Power [dBm], DG = 0.7 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 1			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
100	1	1	QPSK	24.62	24.89	24.40	24.64	24.15	24.08	27.64	27.55	27.25	28.34	0.6823
100	1	271		24.28	24.52	24.17	24.00	24.42	24.24	27.15	27.48	27.22		
100	137	68		24.12	23.76	24.02	23.69	23.60	23.73	26.92	26.69	26.89		
100	1	0		21.17	21.37	20.82	21.24	20.74	20.96	24.22	24.08	23.90		
100	1	272		20.96	21.07	20.70	20.67	20.84	20.83	23.83	23.97	23.78		
100	273	0		21.17	21.19	21.07	20.80	21.01	20.98	24.00	24.11	24.04		
100	1	1	16-QAM	23.87	24.34	23.92	24.31	24.10	23.92	27.11	27.23	26.93	27.93	0.6209
100	1	1	64-QAM	22.70	22.78	22.22	22.60	22.27	22.45	25.66	25.54	25.35		
100	1	1	256-QAM	18.25	18.59	18.12	18.12	17.87	17.98	21.20	21.26	21.06		
Limit	EIRP < 2W			Result									Pass	



FR1 n5

Peak-to-Average Ratio



Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.80	6.00	6.34	6.44	PASS
Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.60				PASS



FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB



PI/2 BPSK

QPSK

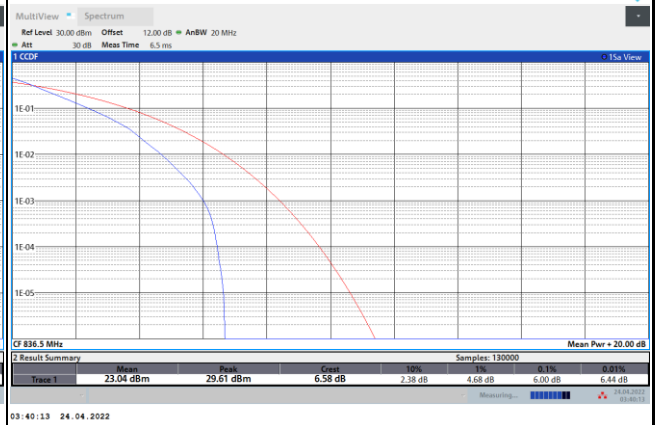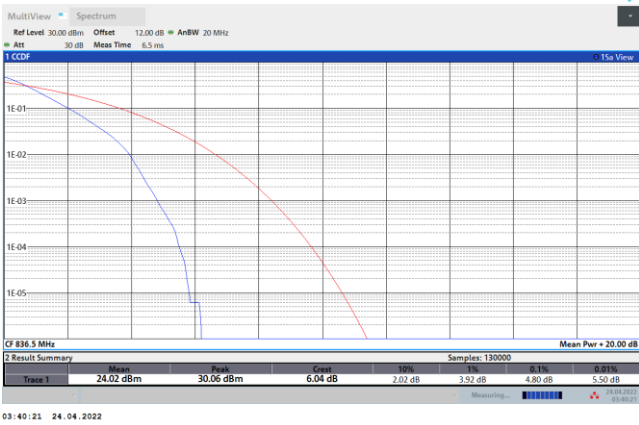


16QAM

64QAM

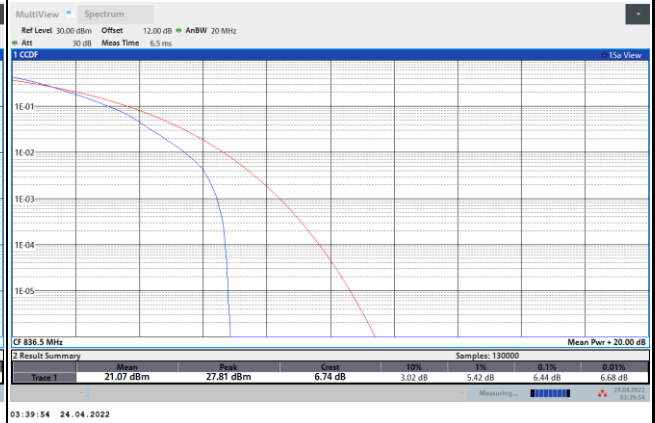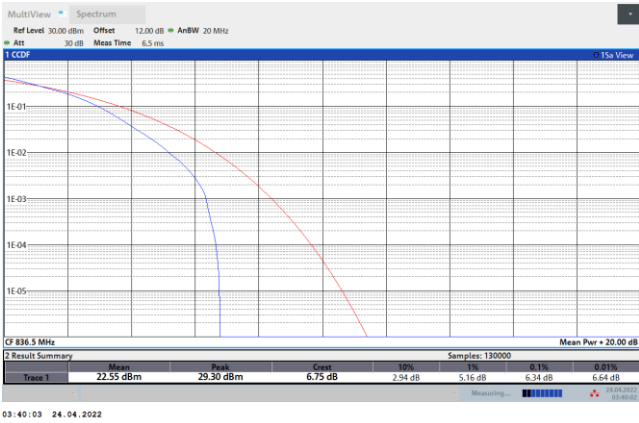

256QAM

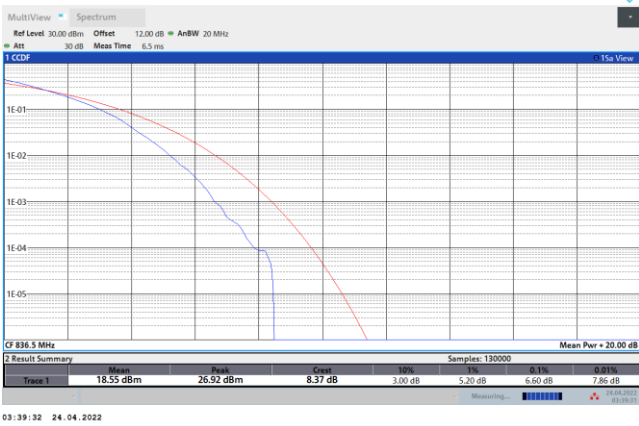



26dB Bandwidth


Mode	FR1 n5 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	5.04		9.51		14.30		18.82	

Mode	FR1 n5 : 26dB BW(MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.97	5.15	10.09	9.95	14.99	15.11	19.90	20.38
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	5.10	5.16	10.03	9.81	15.02	15.05	19.90	20.54




FR1 n5 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

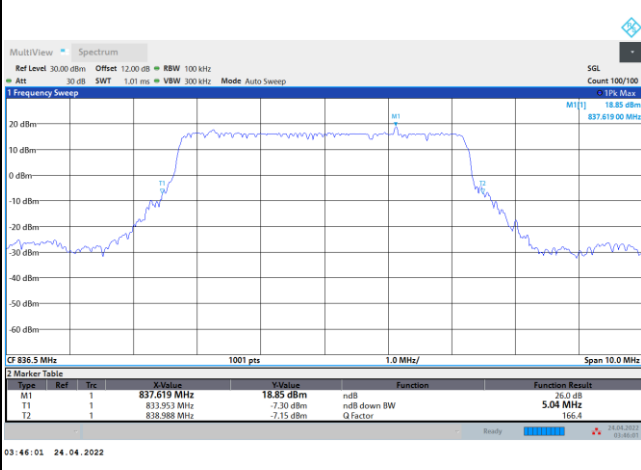


FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

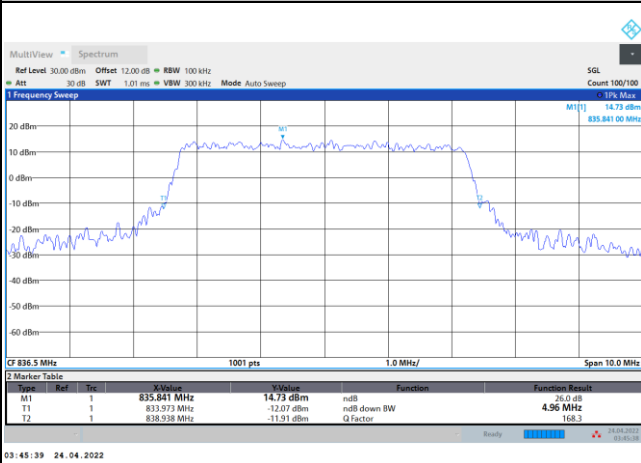


16QAM

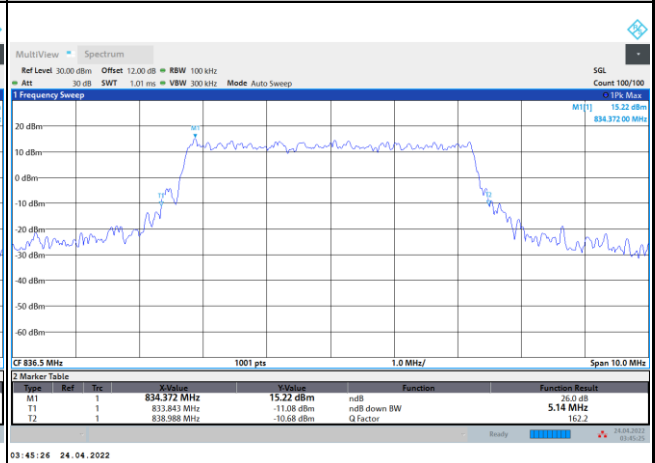

64QAM

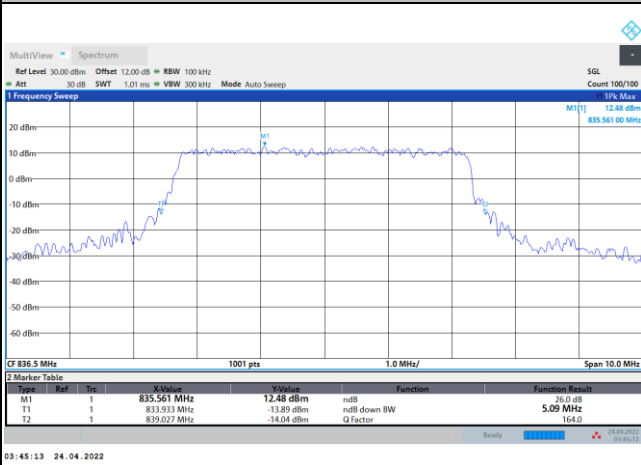


256QAM

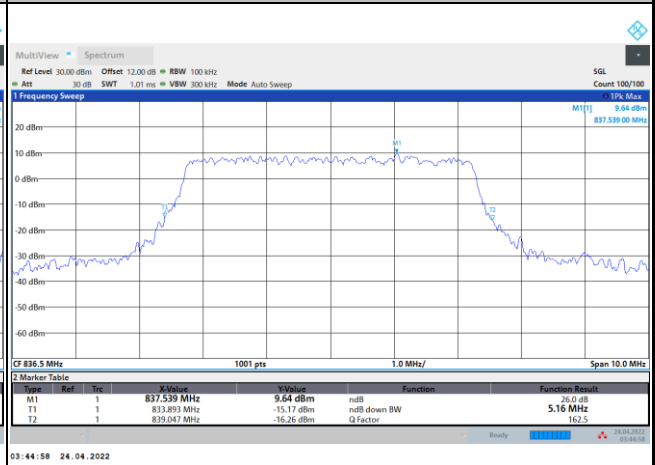




FR1 n5 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

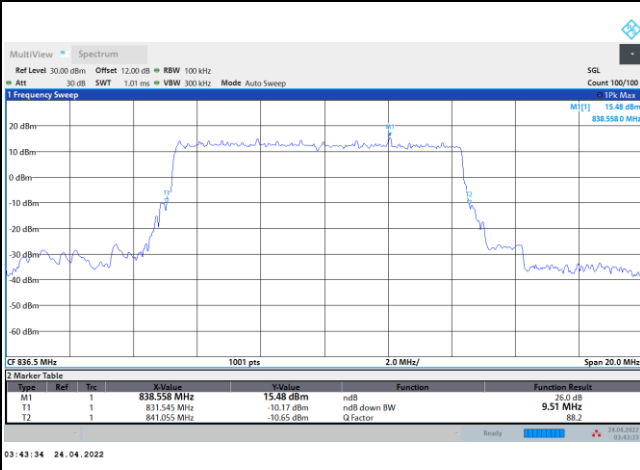


FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

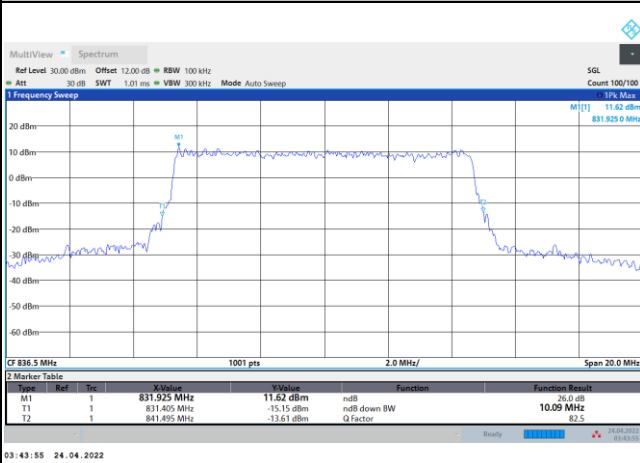


16QAM

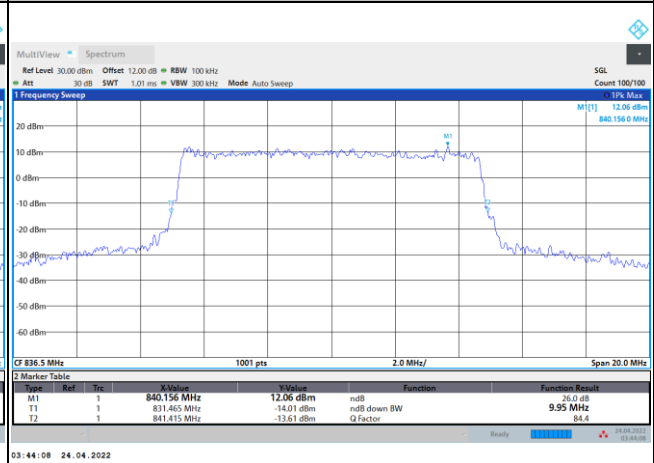

64QAM

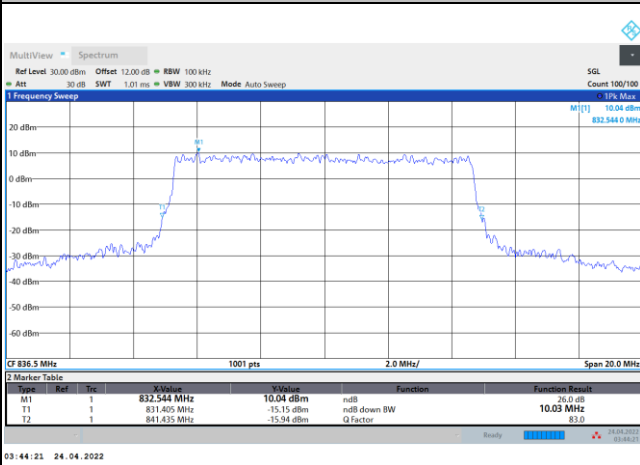


256QAM

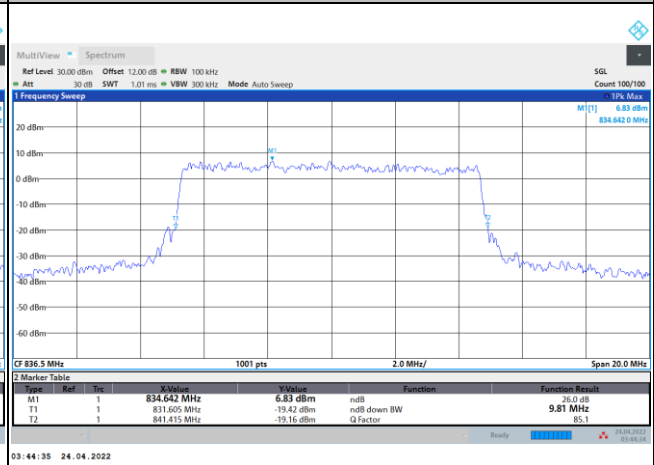




FR1 n5 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

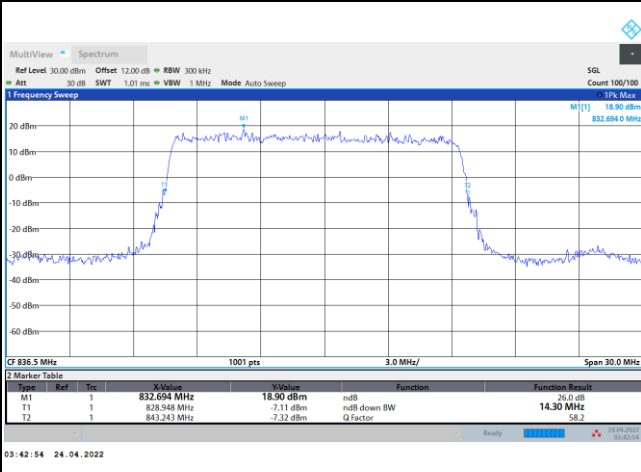


FR1 n5 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

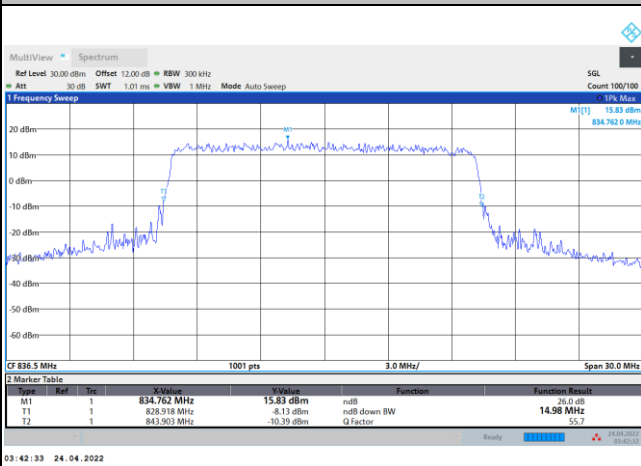


16QAM

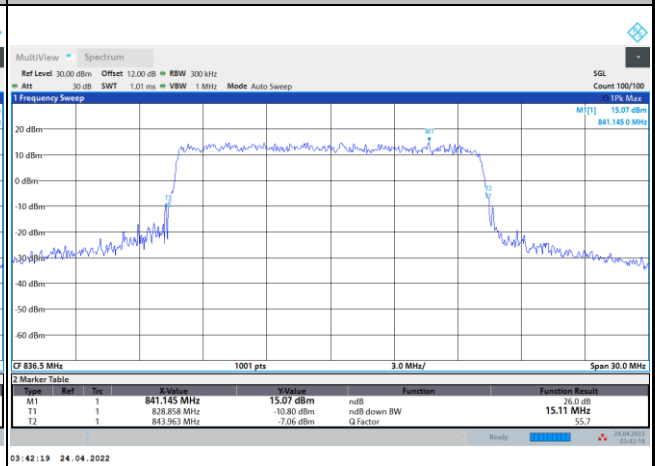

64QAM

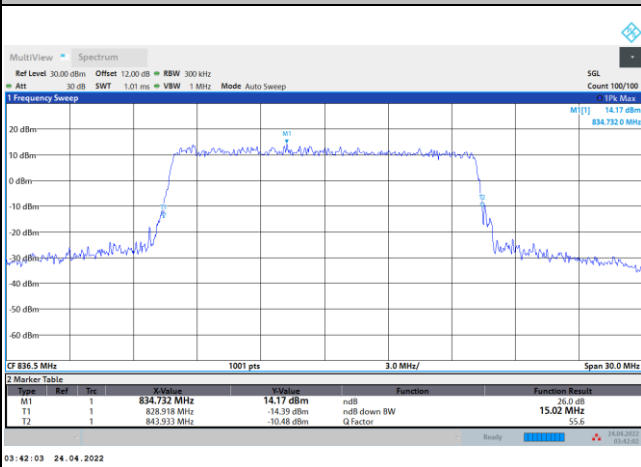


256QAM

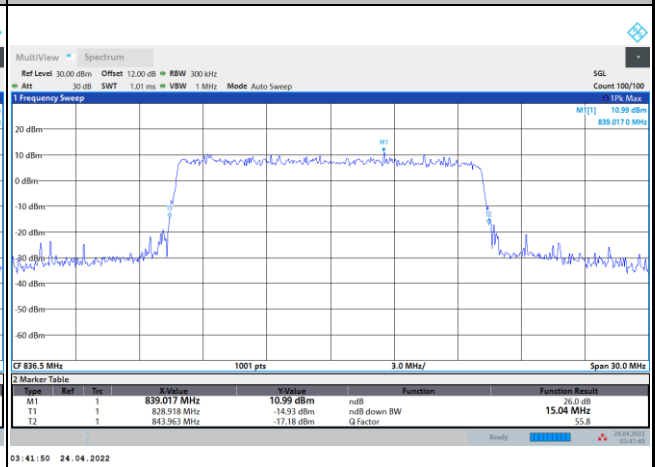




FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

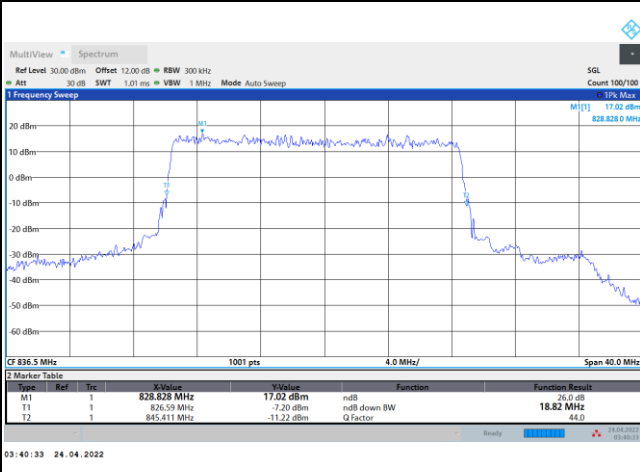


FR1 n5 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

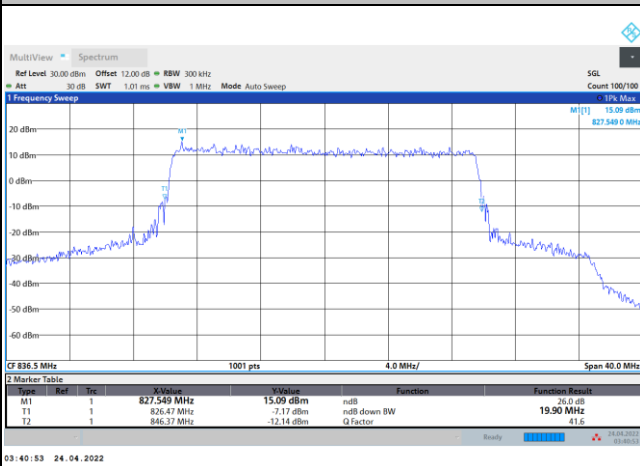


16QAM

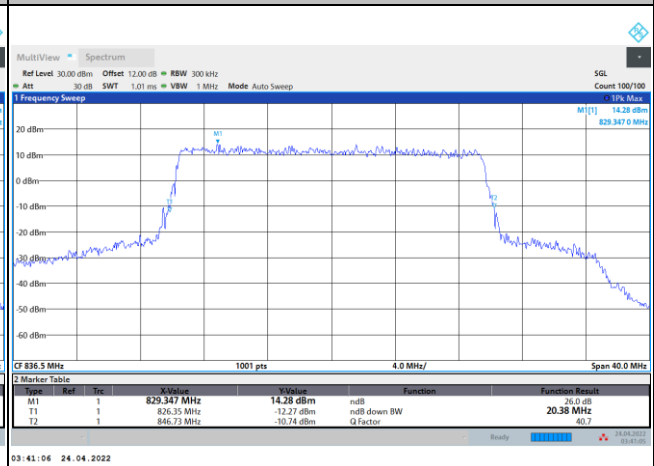

64QAM

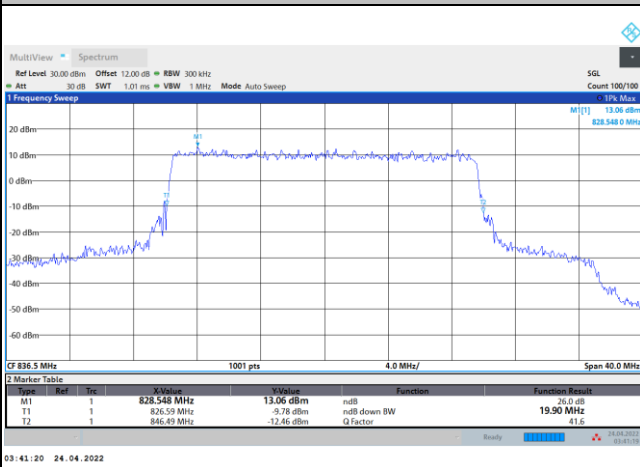

256QAM

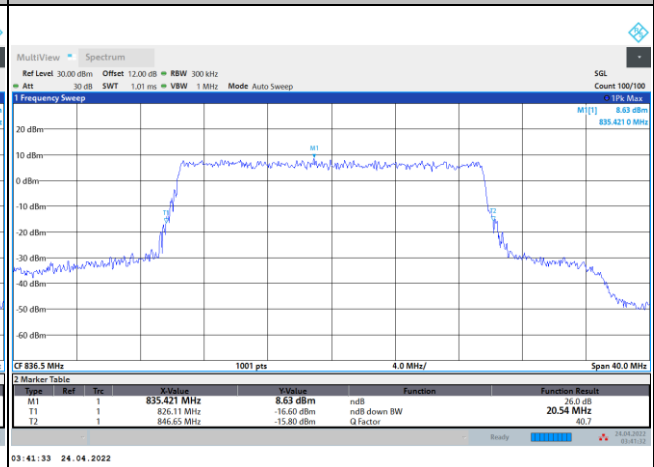



Occupied Bandwidth


Mode	FR1 n5 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	4.48		8.93		13.47		17.91	

Mode	FR1 n5 : 99%OBW (MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.50	4.53	9.27	9.28	14.18	14.12	18.96	18.98
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	4.51	4.50	9.27	9.27	14.16	14.12	18.92	18.98




FR1 n5 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

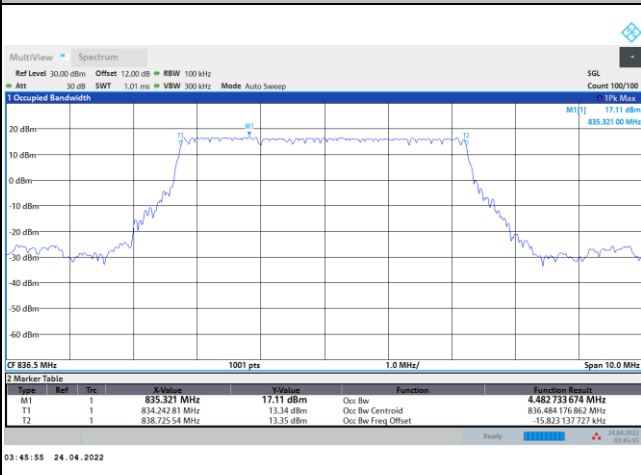


FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

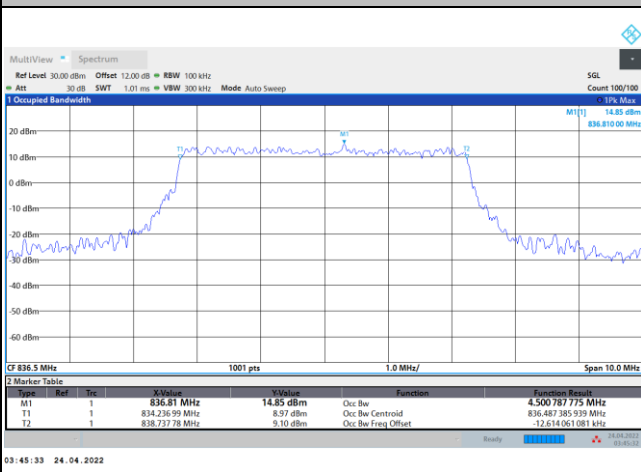


16QAM

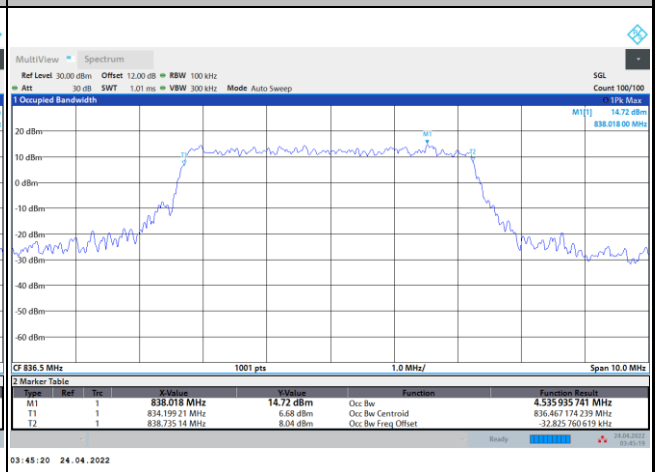

64QAM

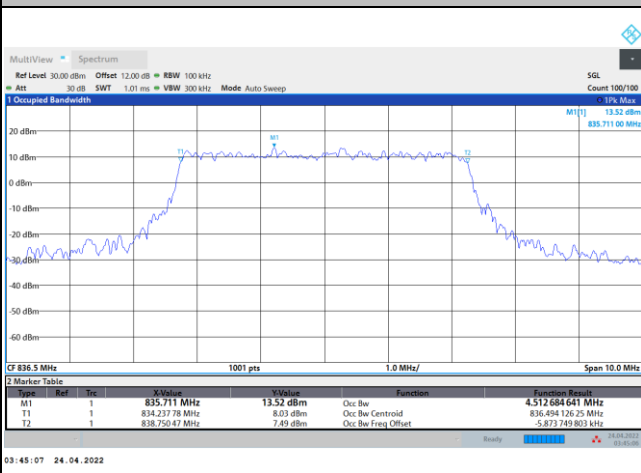


256QAM

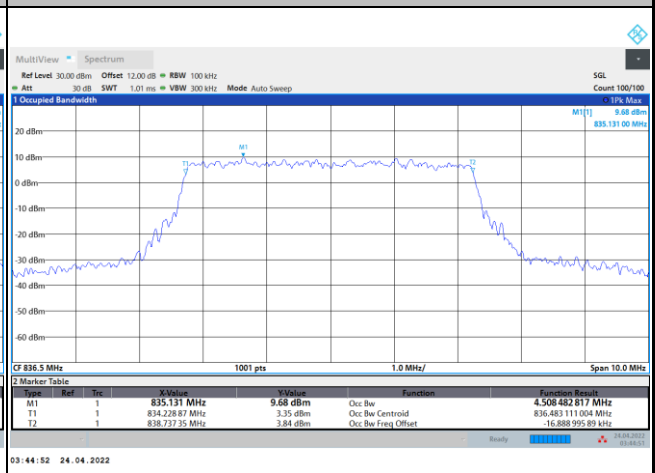




FR1 n5 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

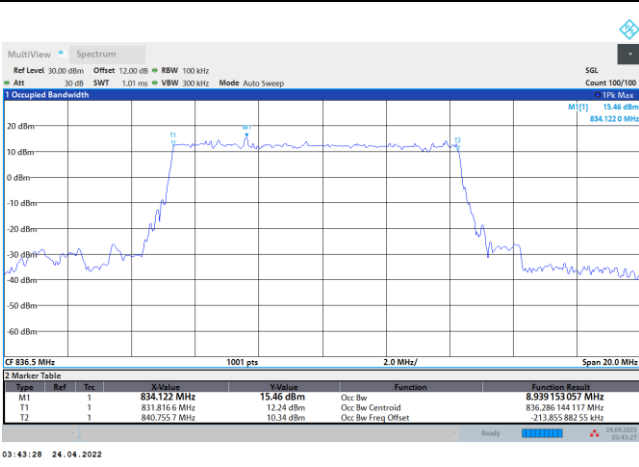


FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

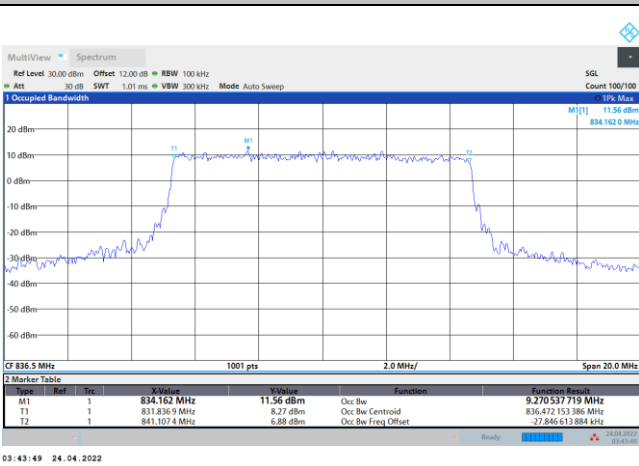


16QAM

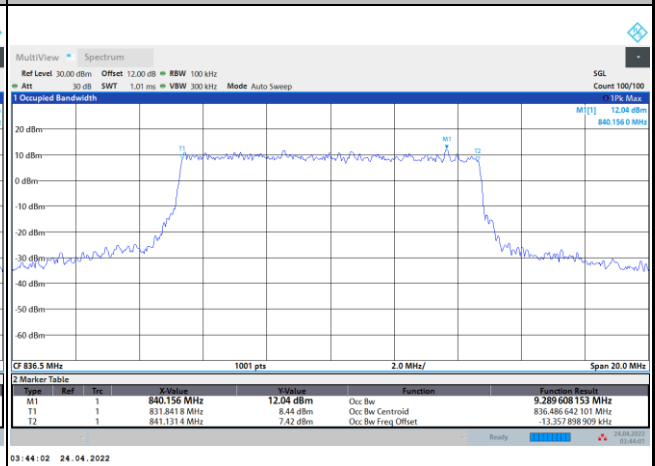

64QAM

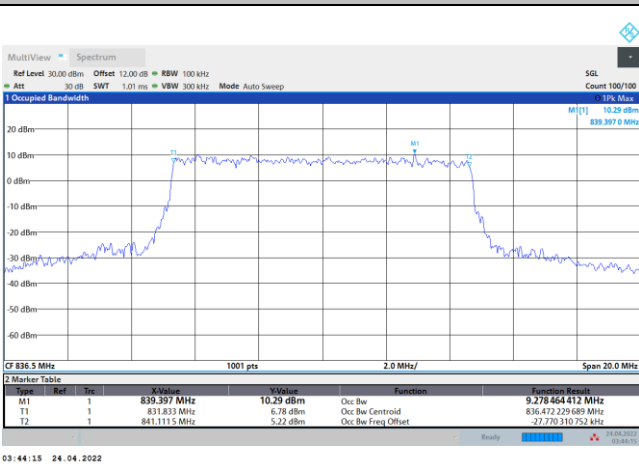


256QAM

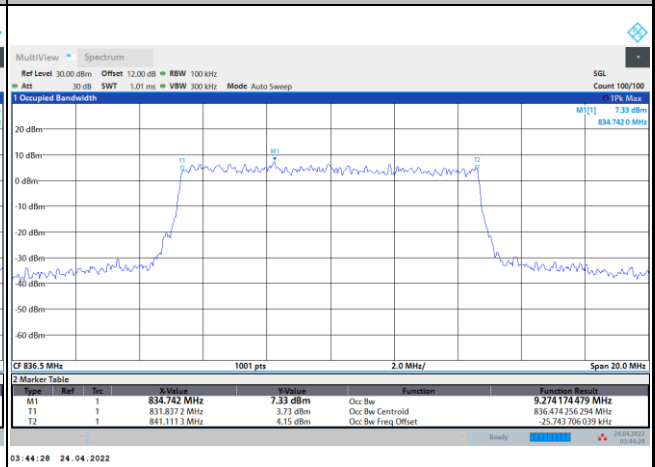




FR1 n5 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

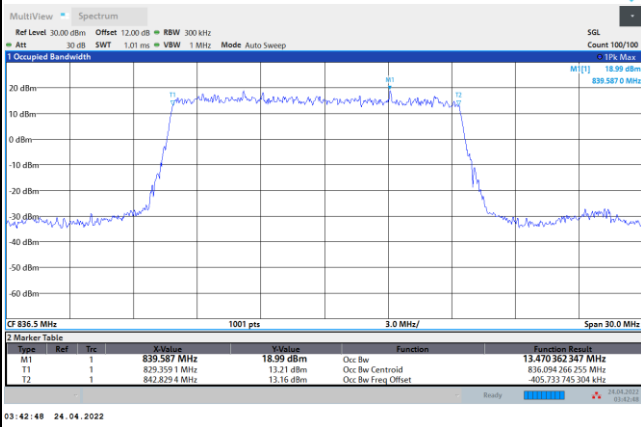


FR1 n5 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

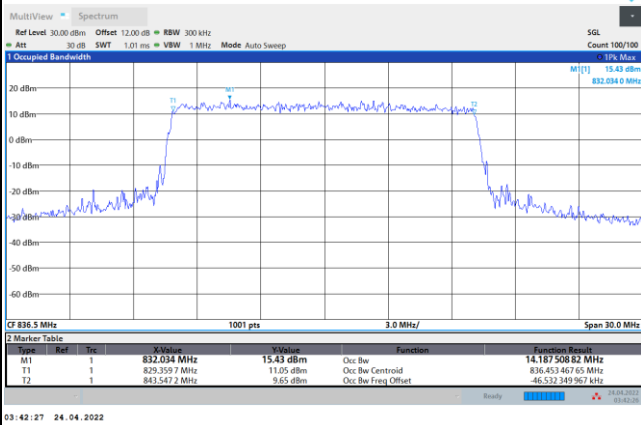


16QAM

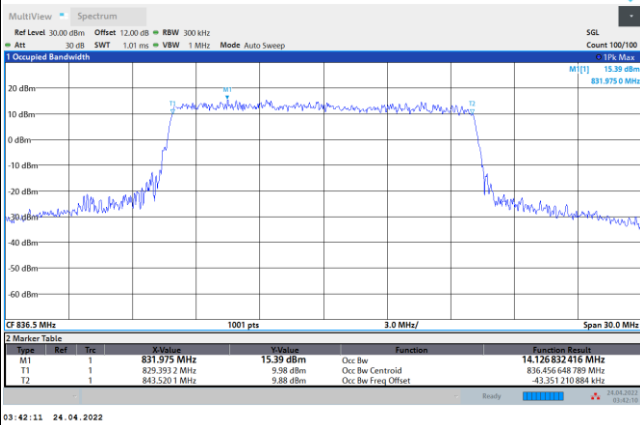

64QAM

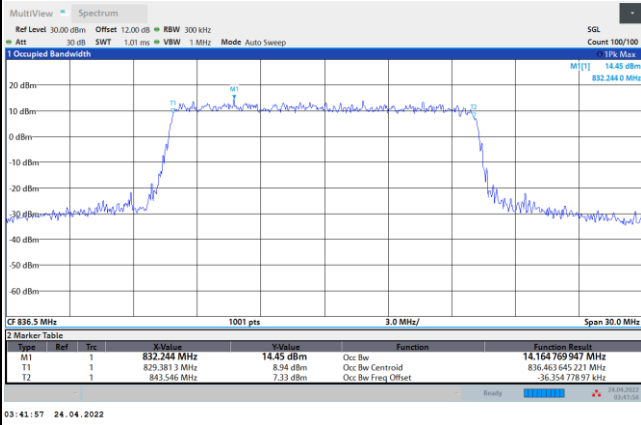


256QAM

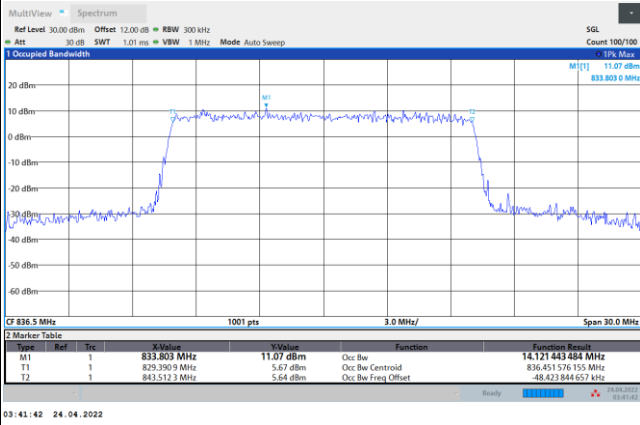




FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

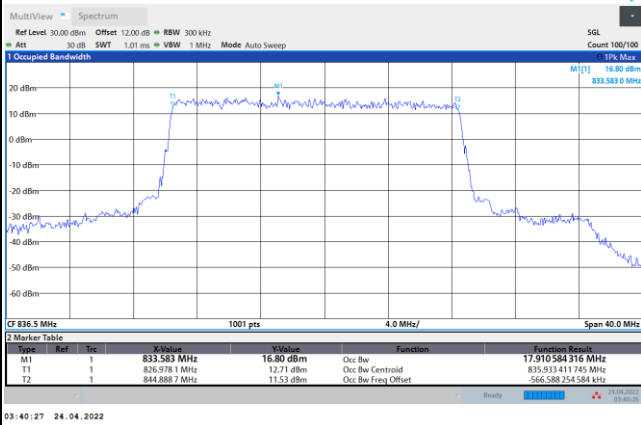


FR1 n5 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

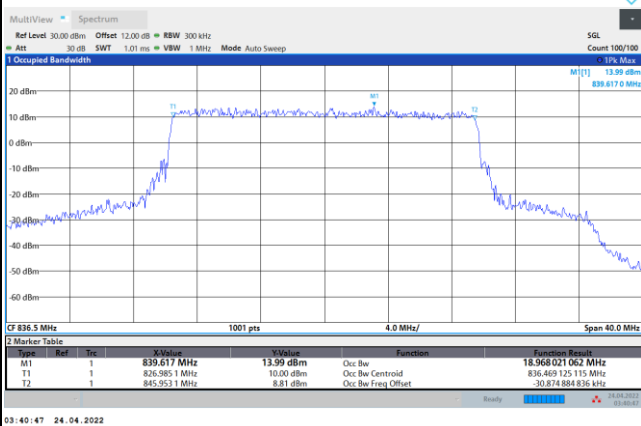


16QAM

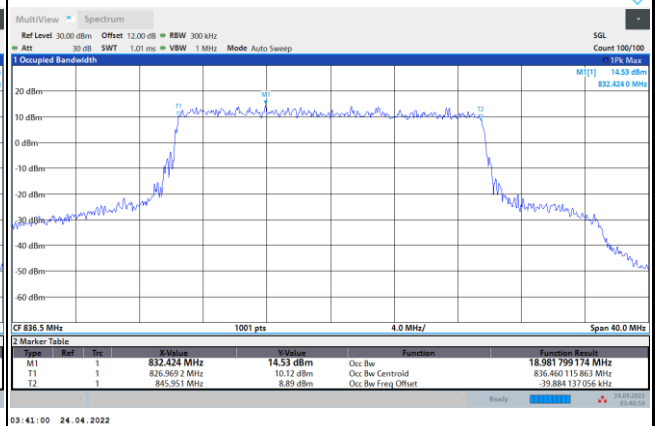

64QAM

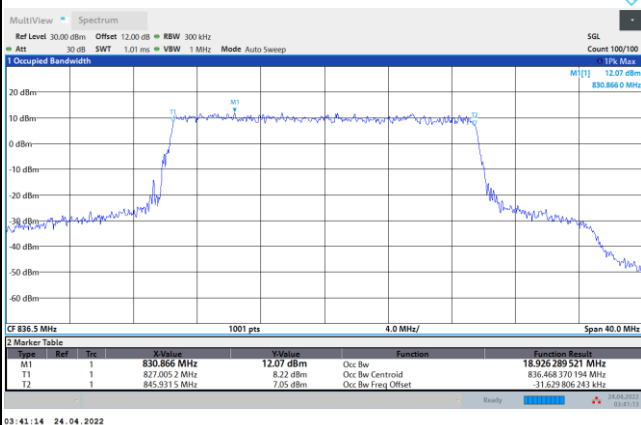

256QAM

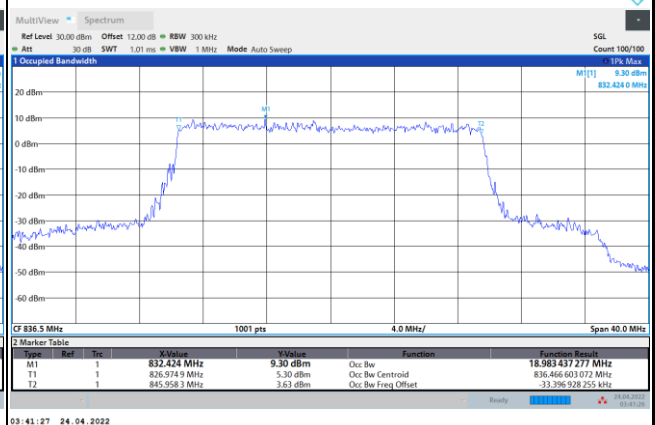





Conducted Band Edge

FR1 n5 / 5MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

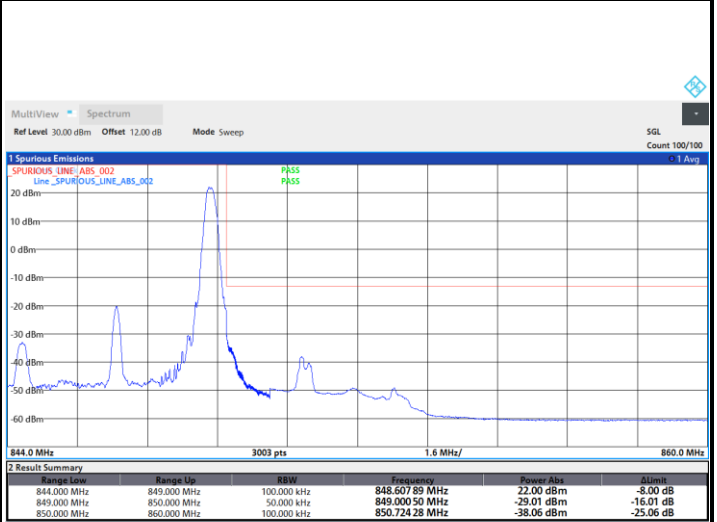
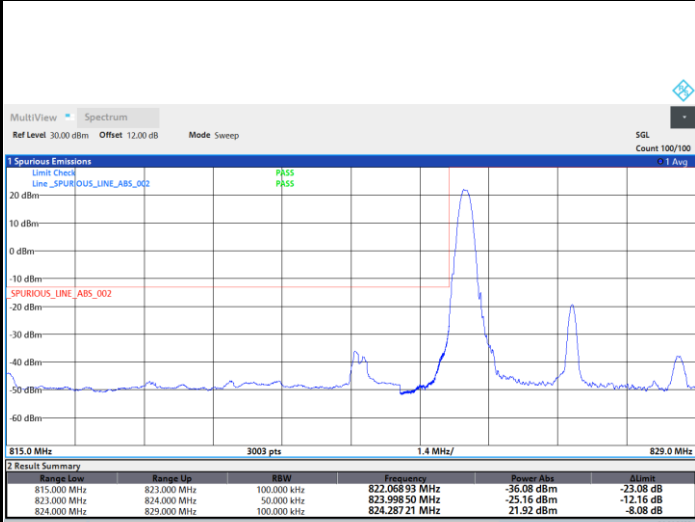


02:54:16 24.04.2022

03:09:13 24.04.2022

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

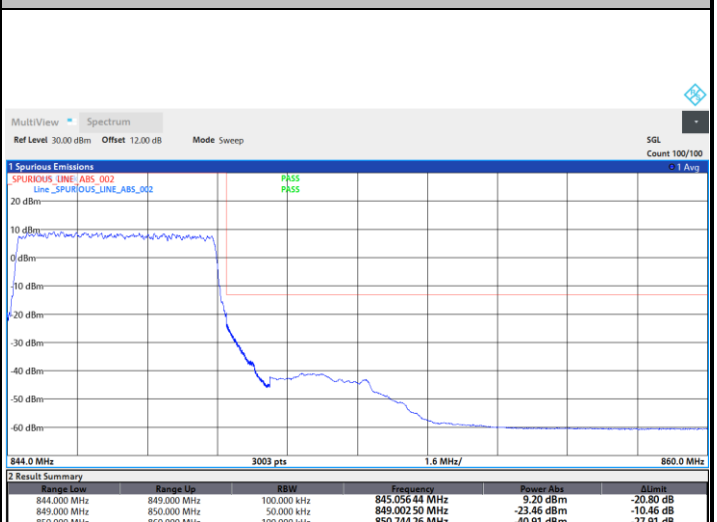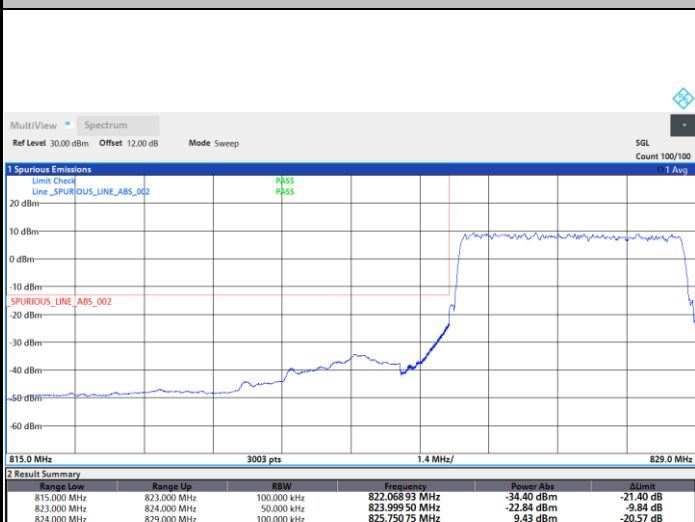

02:48:00 24.04.2022



03:03:02 24.04.2022



FR1 n5 / 5MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

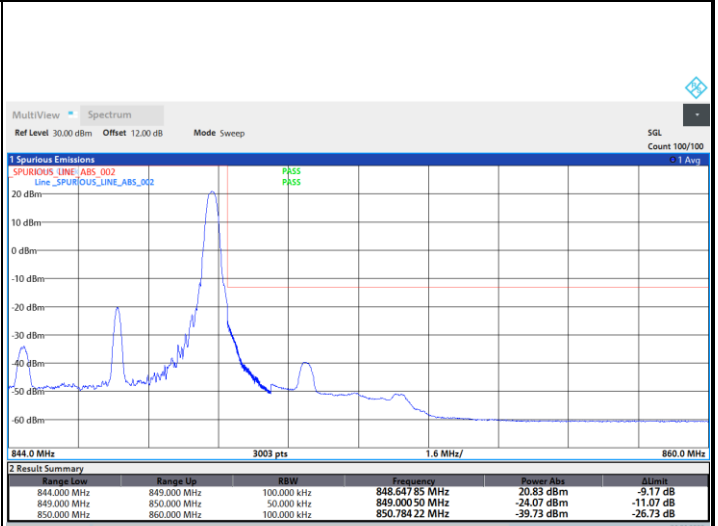
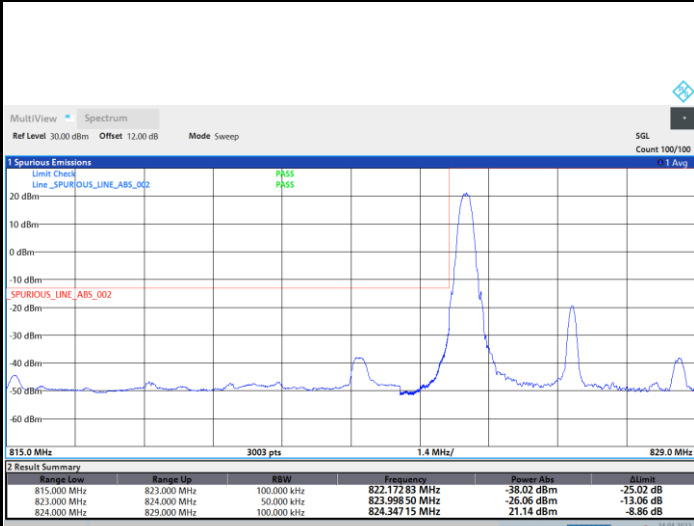


02:52:21 24.04.2022

03:08:38 24.04.2022

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

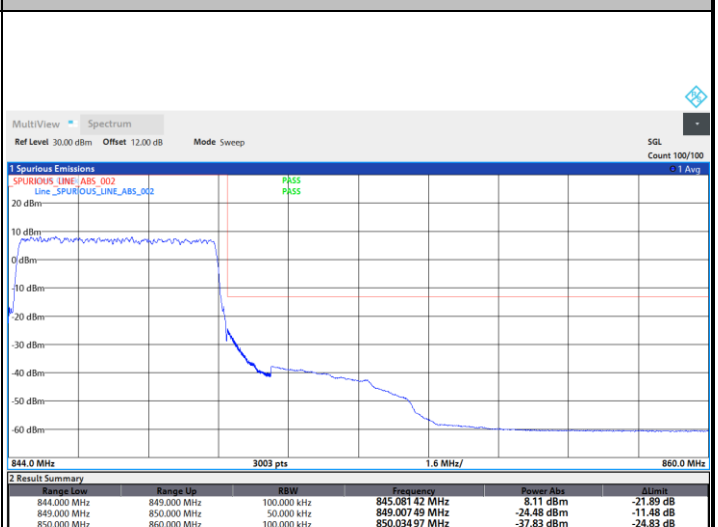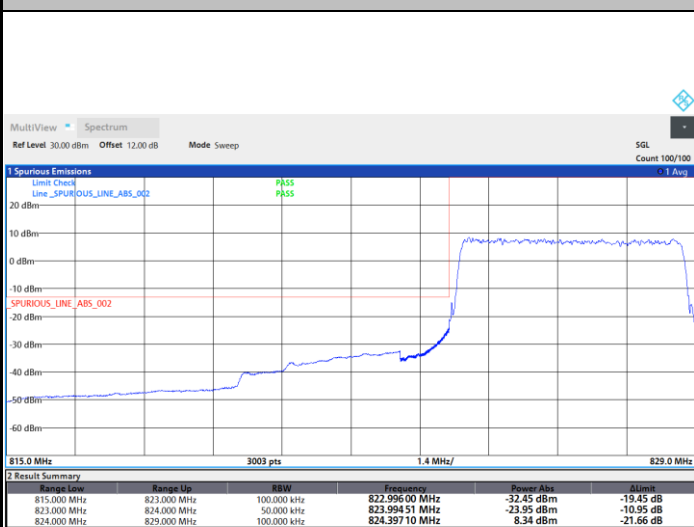

02:48:34 24.04.2022


03:04:00 24.04.2022



FR1 n5 / 5MHz / DFT-S OFDM / 16QAM

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax


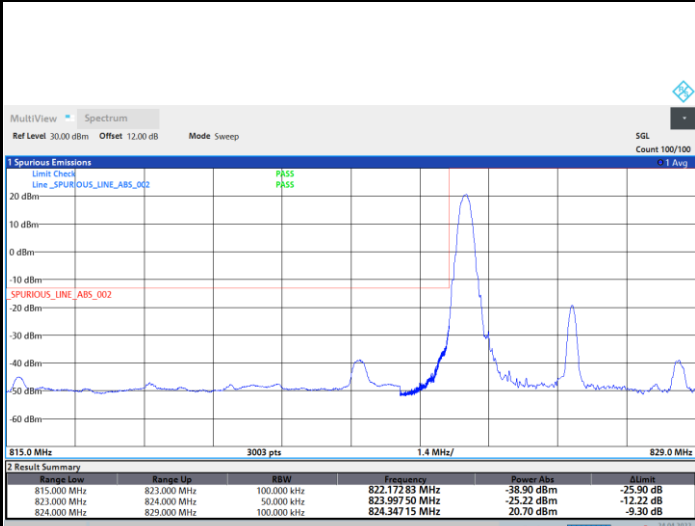


02:51:30 24.04.2022

03:08:01 24.04.2022

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

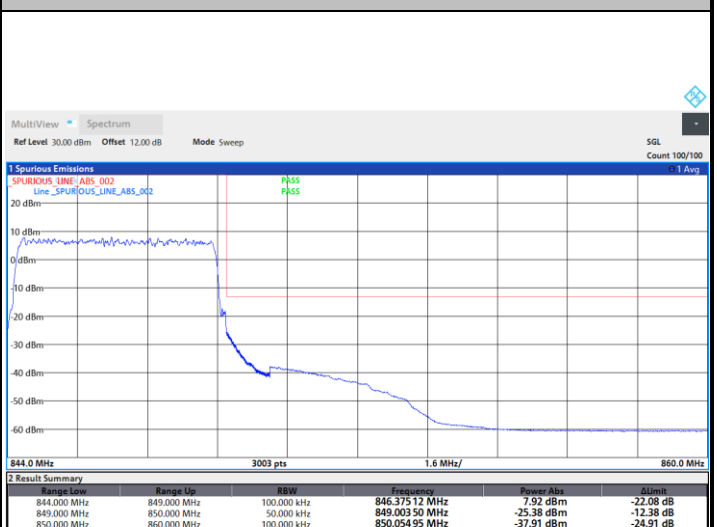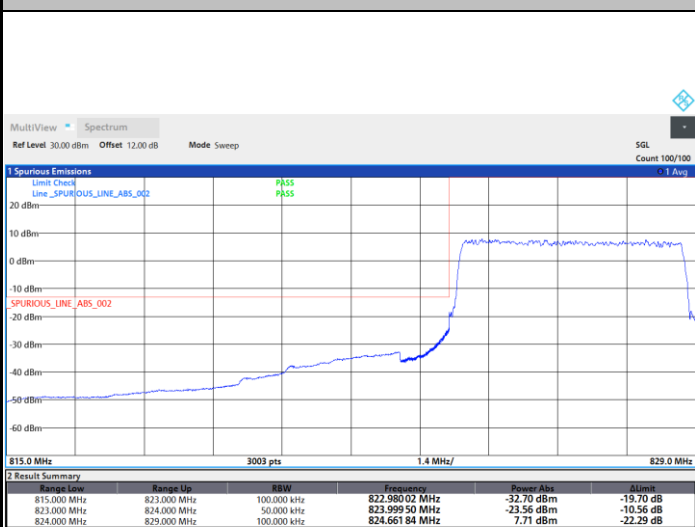

02:49:18 24.04.2022



03:05:00 24.04.2022



FR1 n5 / 5MHz / DFT-S OFDM / 64QAM

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

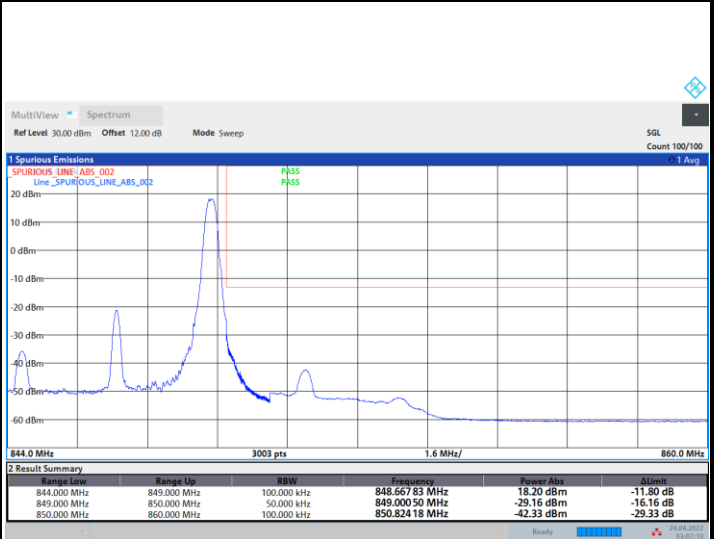
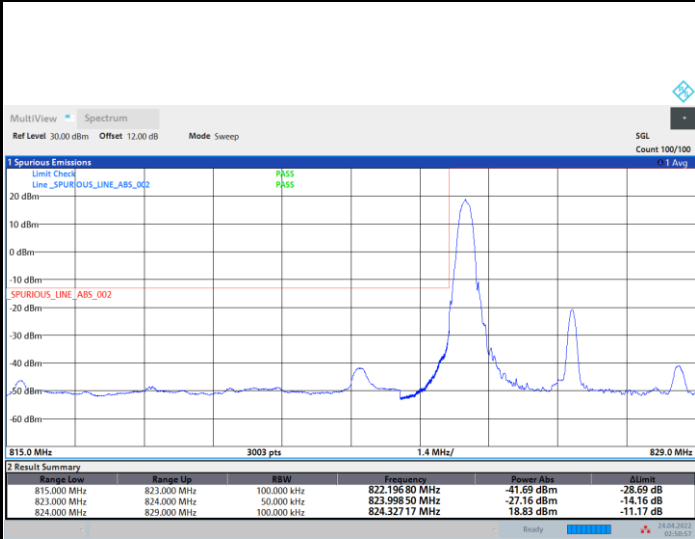


02:50:57 24.04.2022

03:07:10 24.04.2022

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

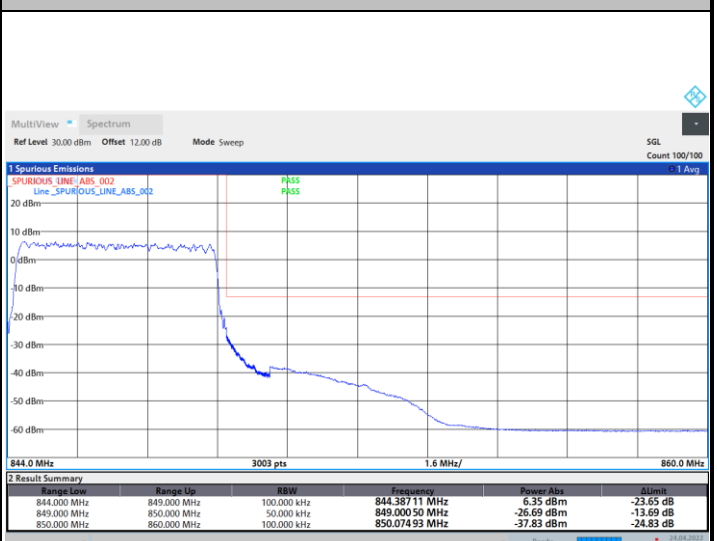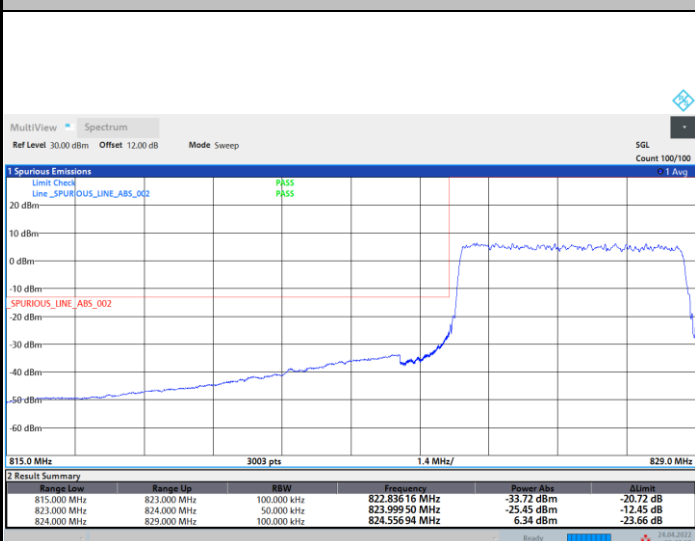

02:49:59 24.04.2022



03:06:01 24.04.2022



FR1 n5 / 5MHz / DFT-S OFDM / 256QAM



Lowest Band Edge / 1RB0


Highest Band Edge / 1RBmax

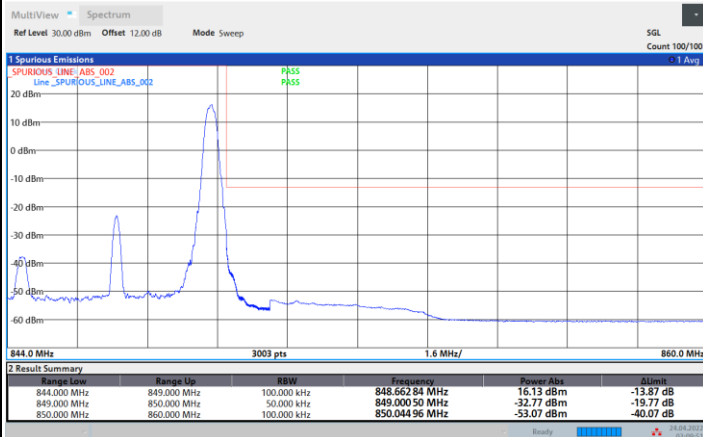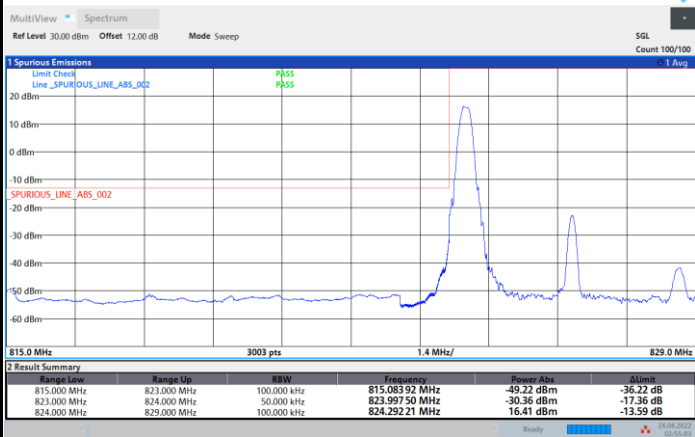

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

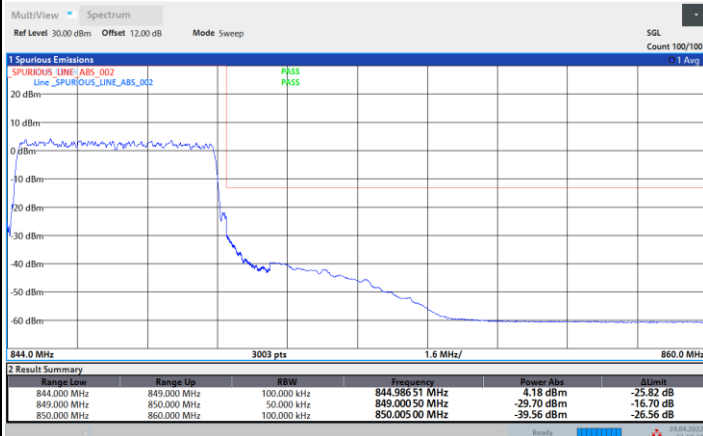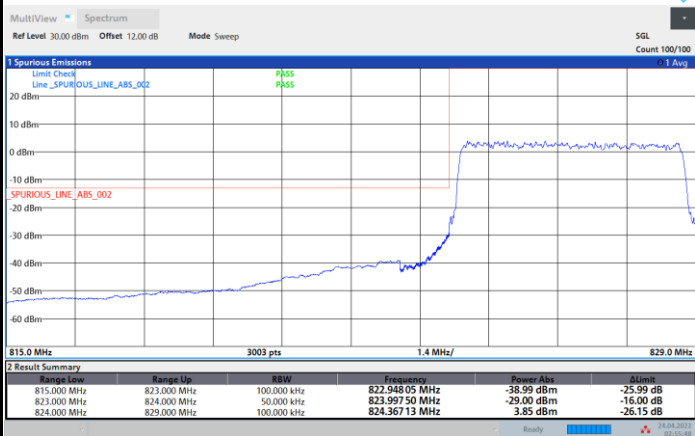


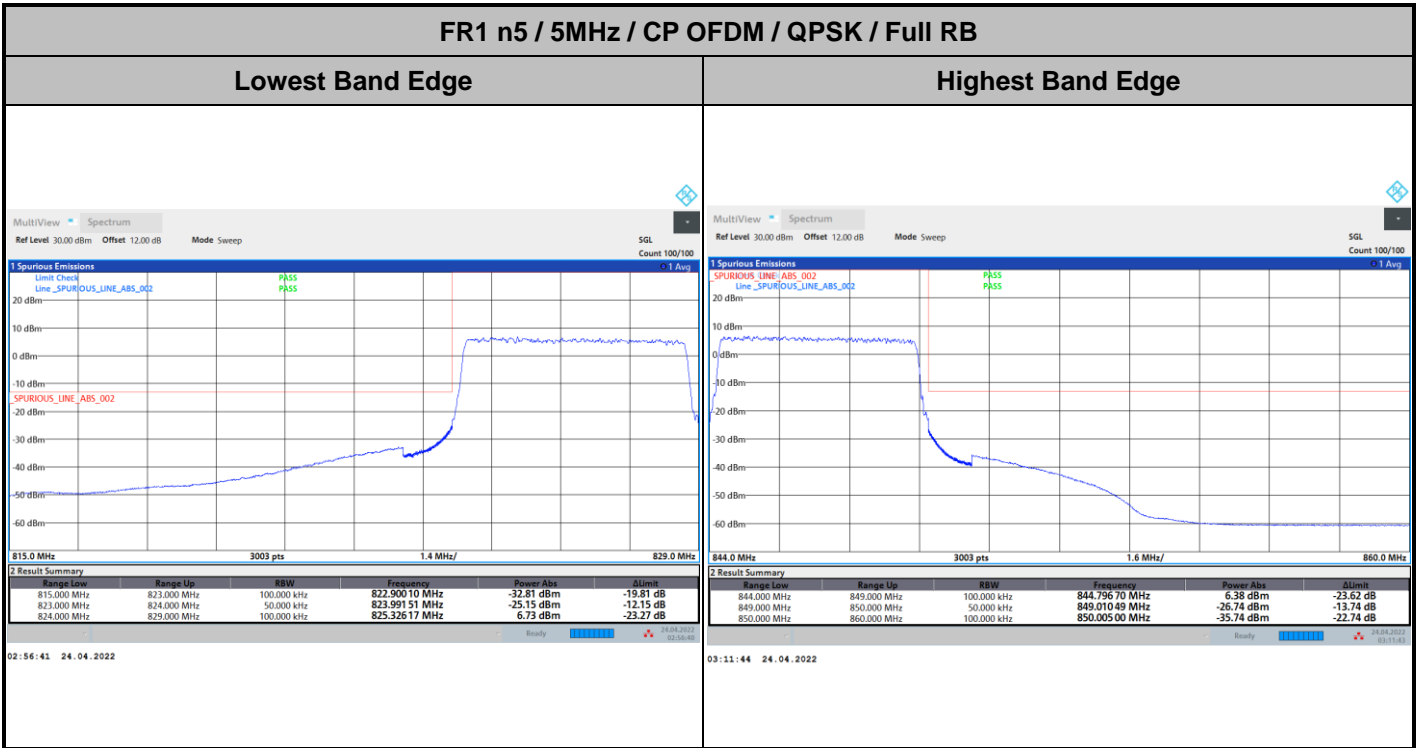




FR1 n5 / 10MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge

Highest Band Edge

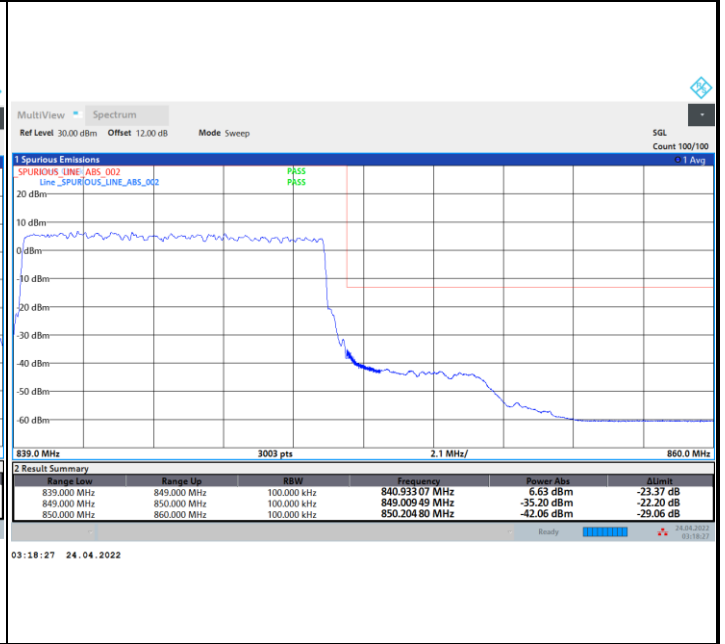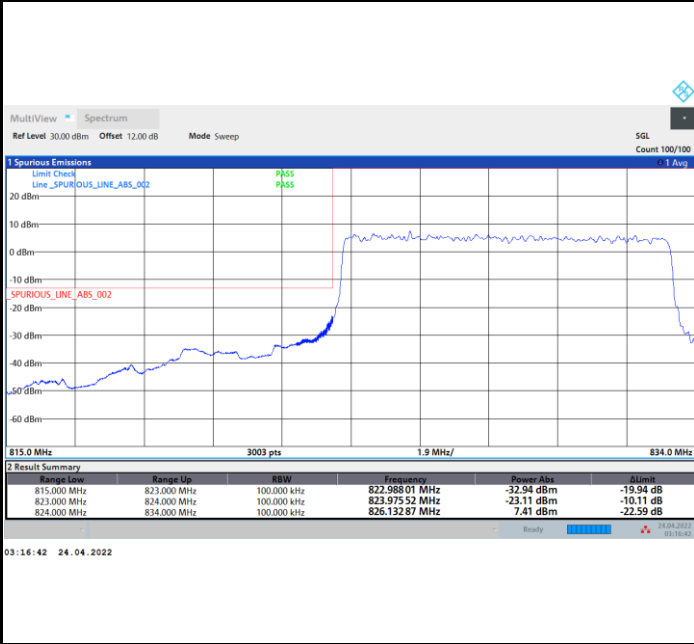

FR1 n5 / 10MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

