

#36_LTE Band 2_20M_QPSK_50_0_Top Side_10mm_Ch19100


Communication System: LTE-FDD; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230605 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.41$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.970 W/kg; SAR (10g) = 0.421 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm
Power Drift = -0.13 dB
SAR (1g) = 0.699 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.357 W/kg
Smallest distance from peaks to all points 3 dB below = 2.9 mm
Ratio of SAR at M2 to SAR at M1 = 83.0 %

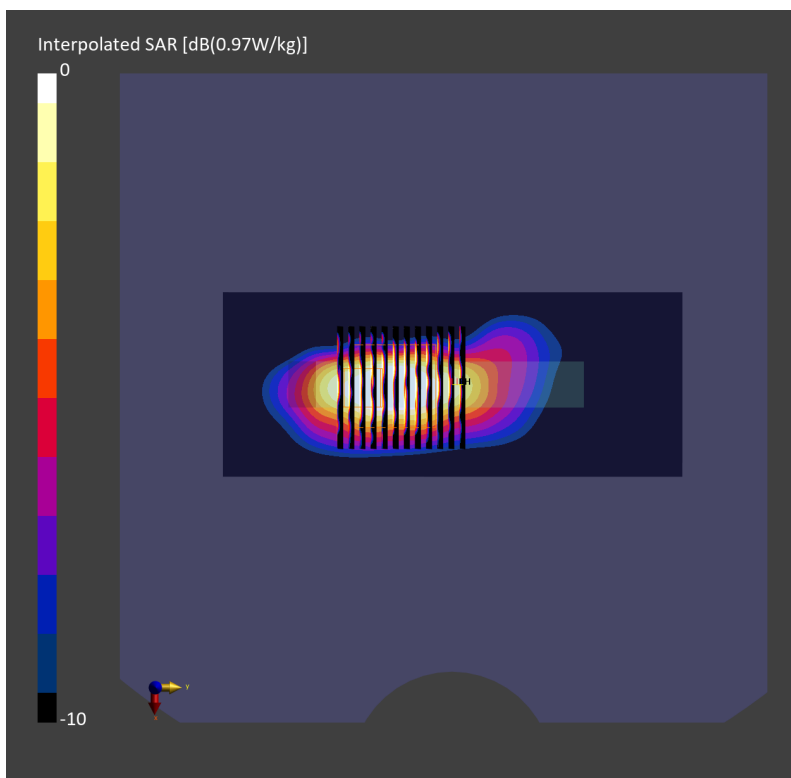

#37_LTE Band 7_20M_QPSK_1_0_Bottom Side_10mm_Ch20850


Communication System: LTE-FDD; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f= 2510$ MHz; $\sigma= 1.83$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.568 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.587 W/kg; SAR (8g) = 0.310 W/kg; SAR (10g) = 0.282 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 79.2 %

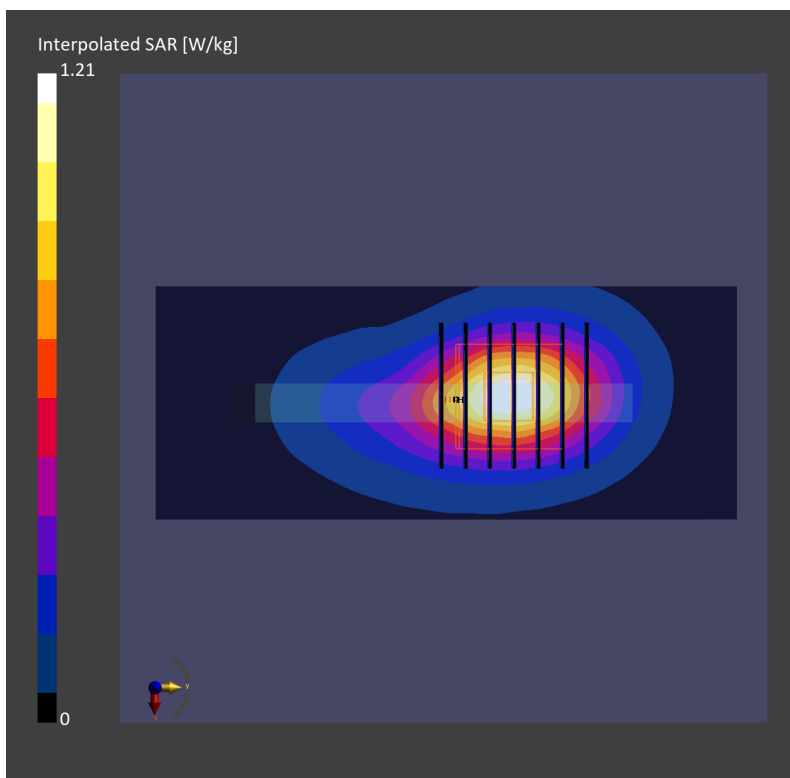

#38_LTE Band 12_10M_QPSK_1_0_Bottom Side_10mm_Ch23095


Communication System: LTE-FDD ; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.382 W/kg; SAR (10g) = 0.219 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 0.379 W/kg; SAR (8g) = 0.212 W/kg; SAR (10g) = 0.195 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 90.1 %

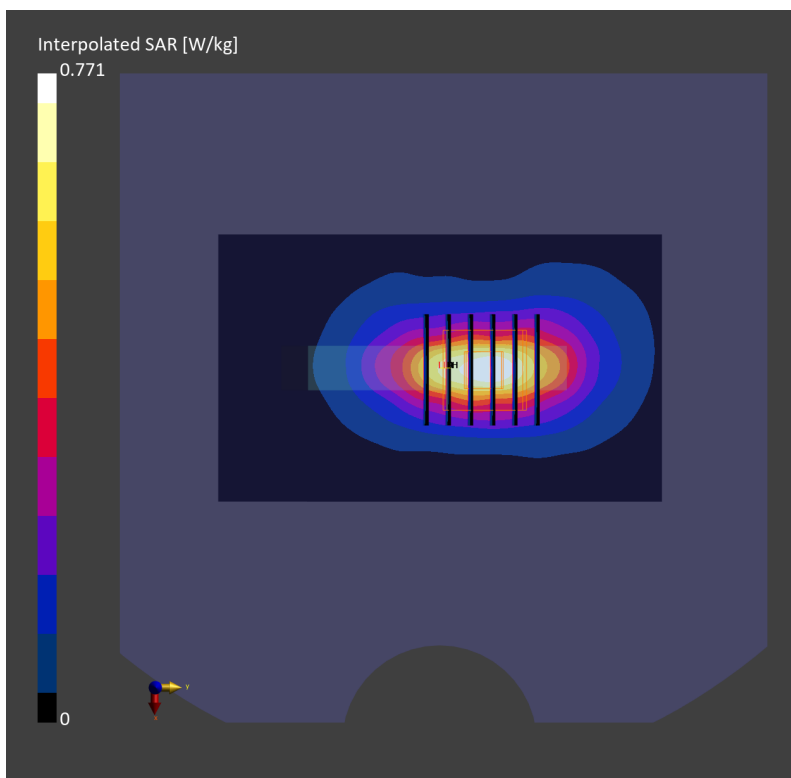

#39_LTE Band 13_10M_QPSK_1_0_Left Side_10mm_Ch23230


Communication System: LTE-FDD ; Frequency: 782.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=782.0$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.689 W/kg; SAR (10g) = 0.467 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.694 W/kg; SAR (8g) = 0.495 W/kg; SAR (10g) = 0.472 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 88.8 %

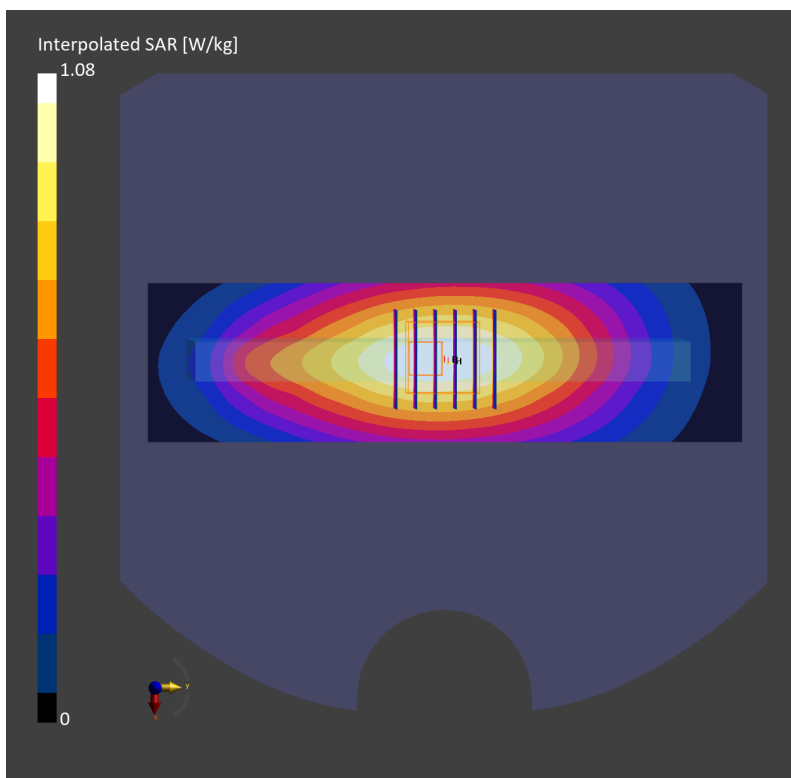

#40_LTE Band 14_10M_QPSK_1_0_Left Side_10mm_Ch23330


Communication System: LTE-FDD; Frequency: 793.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=793.0$ MHz; $\sigma=0.902$ S/m; $\epsilon_r=41.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.766 W/kg; SAR (10g) = 0.522 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.624 W/kg; SAR (8g) = 0.557 W/kg; SAR (10g) = 0.530 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.4 %

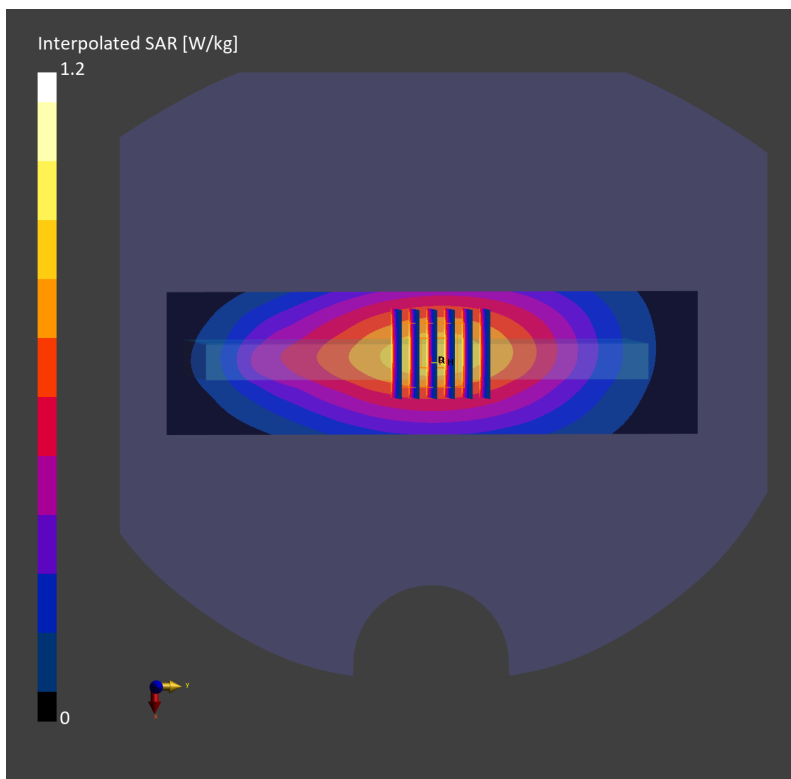

#41_LTE Band 25_20M_QPSK_1_0_Bottom Side_10mm_Ch26340


Communication System: LTE-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230521 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.541 W/kg; SAR (10g) = 0.280 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.555 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.292 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 85.2 %

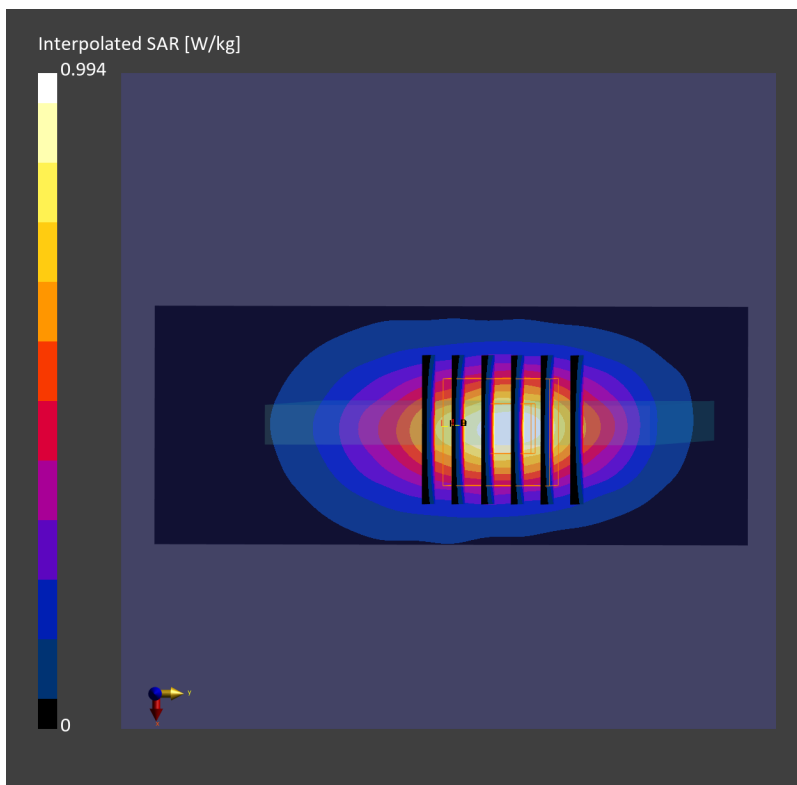

#42_LTE Band 26_15M_QPSK_1_0_Bottom Side_10mm_Ch26865


Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230425 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.556 W/kg; SAR (10g) = 0.304 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.551 W/kg; SAR (8g) = 0.305 W/kg; SAR (10g) = 0.280 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 77.8 %

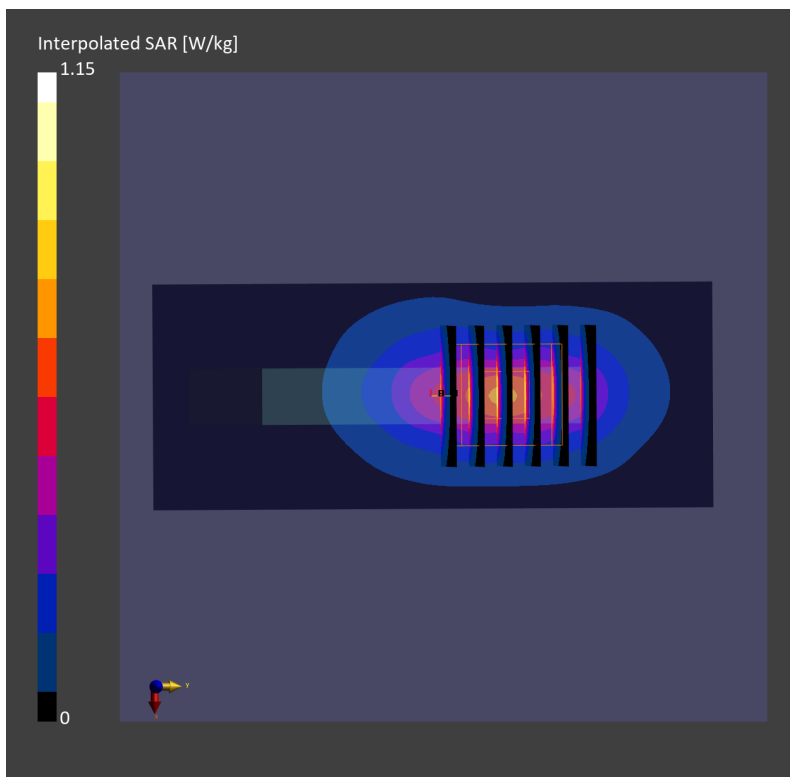

#43_LTE Band 30_10M_QPSK_1_49_Bottom Side_10mm_Ch27710


Communication System: LTE-FDD ; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f= 2310.000$ MHz; $\sigma= 1.68$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.597 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.616 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.302 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.5 %

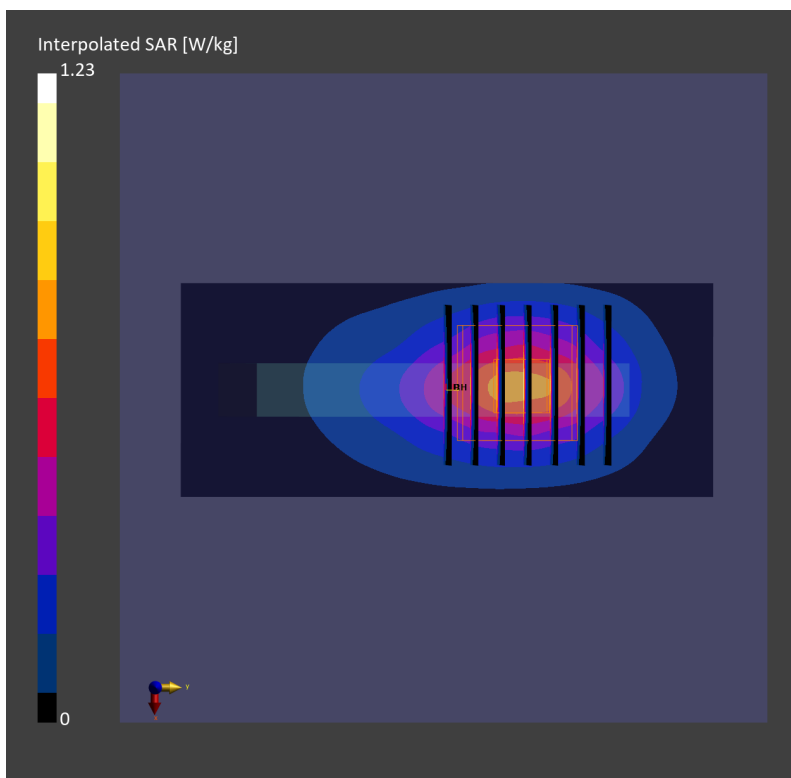

#44_LTE Band 41_20M_QPSK_1_0_Bottom Side_10mm_Ch39750

Communication System: LTE; Frequency: 2506.000 MHz; Duty Cycle: 1:2.33
Medium: HSL_2600_230526 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.437 W/kg; SAR (10g) = 0.207 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.443 W/kg; SAR (8g) = 0.237 W/kg; SAR (10g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

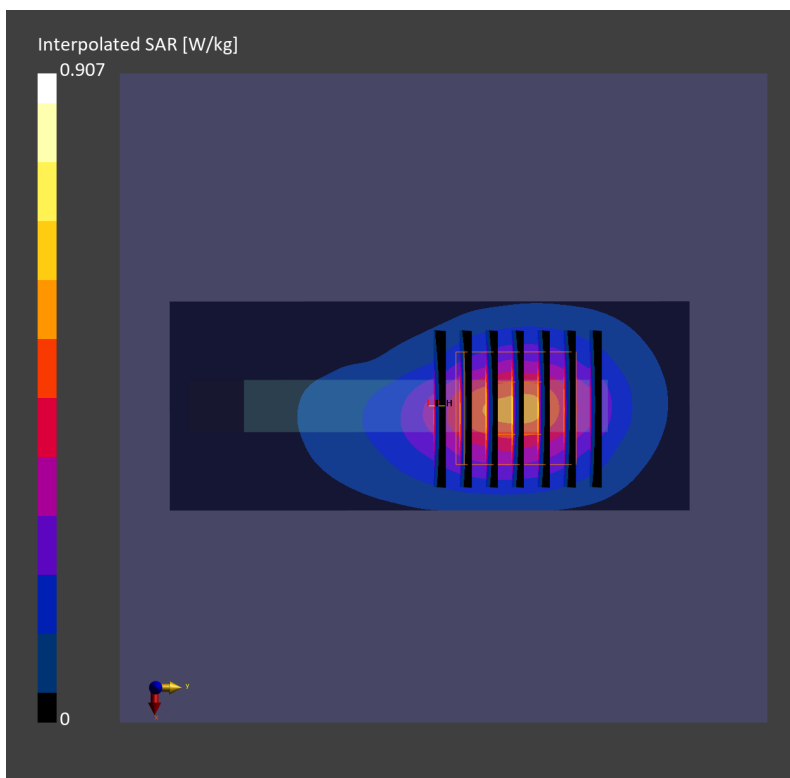

#45_LTE Band 48_20M_QPSK_1_0_Bottom Side_10mm_Ch55830


Communication System: LTE; Frequency: 3609.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_230528 Medium parameters used: $f=3609.000$ MHz; $\sigma=3.15$ S/m; $\epsilon_r=38.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.06, 7.06, 7.06); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.629 W/kg; SAR (10g) = 0.245 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.672 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.269 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 76.7 %

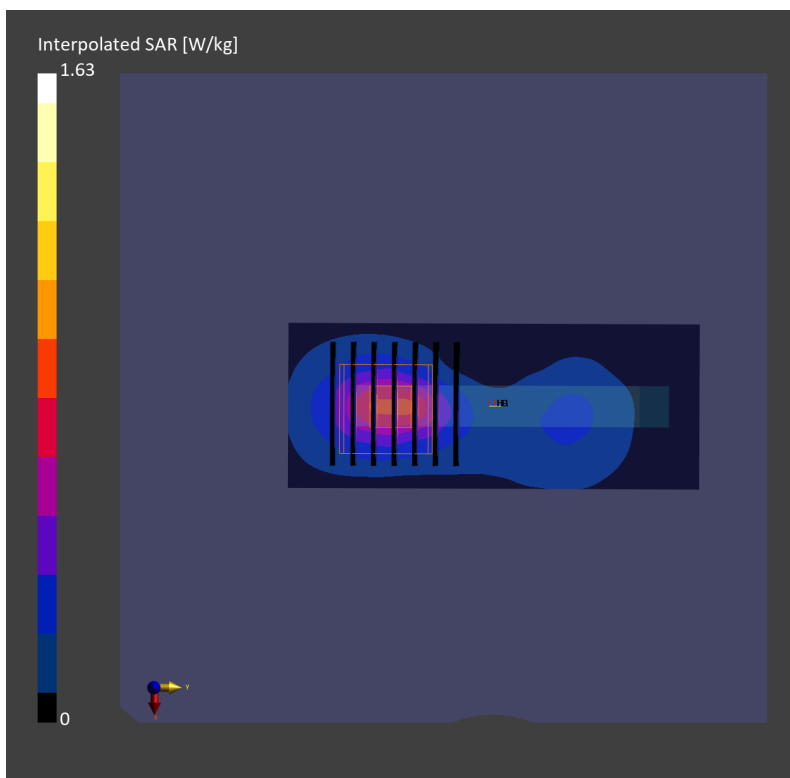

#46_LTE Band 66_20M_QPSK_1_0_Bottom Side_10mm_Ch132072


Communication System: LTE; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230525 Medium parameters used: $f=1720.000$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=40.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.517 W/kg; SAR (10g) = 0.268 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.530 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.275 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

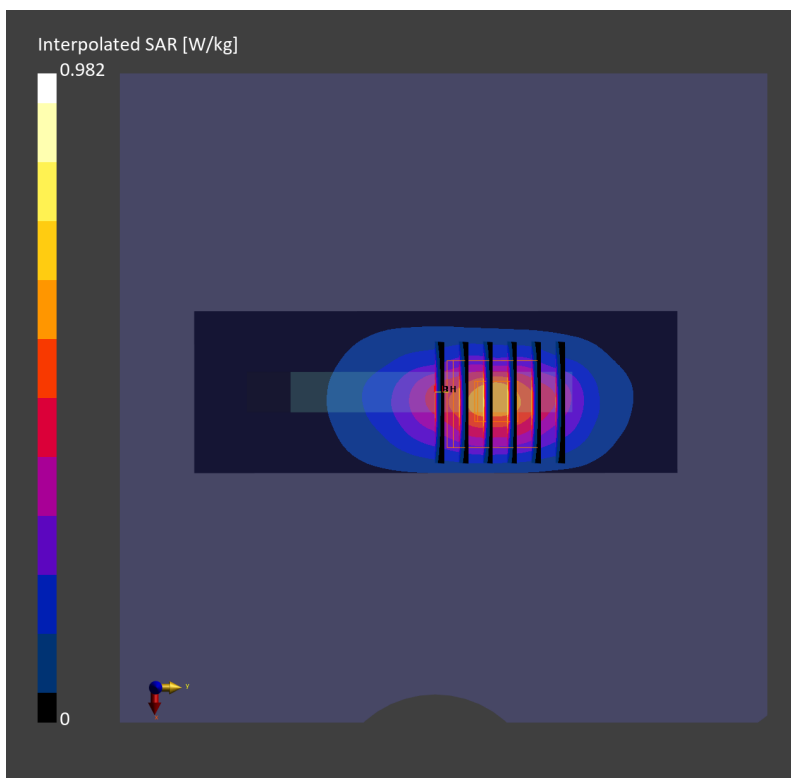

#47_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133297


Communication System: LTE-FDD; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230424 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.852$ S/m; $\epsilon_r = 43.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.386 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.384 W/kg; SAR (8g) = 0.277 W/kg; SAR (10g) = 0.264 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.6 %

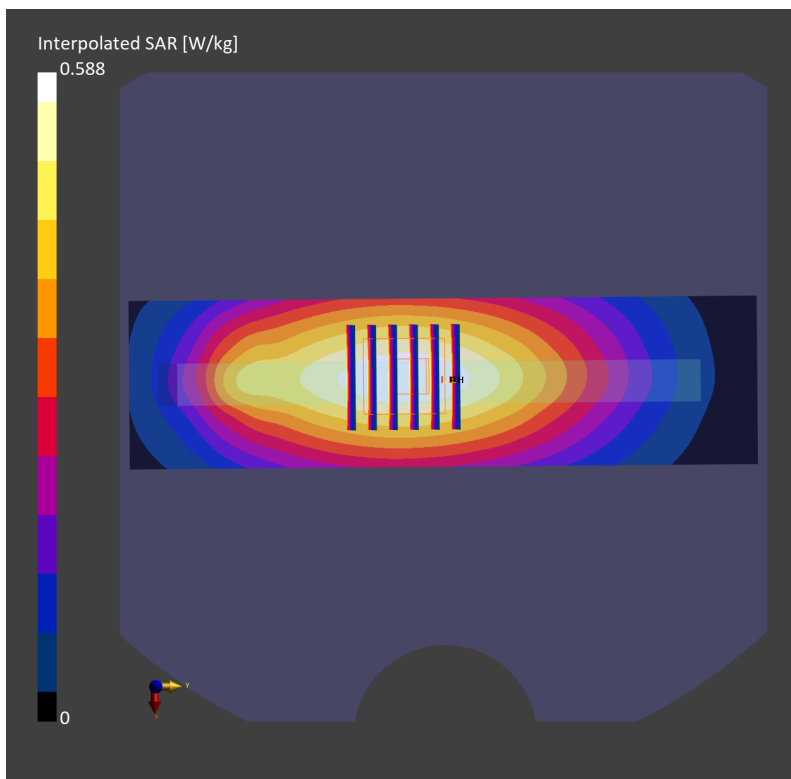

#48_FR1 n2_20M_BPSK_50_0_Right Side_10mm_Ch380000


Communication System: 5G NR; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230606 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.5$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.514 W/kg; SAR (10g) = 0.246 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.540 W/kg; SAR (8g) = 0.293 W/kg; SAR (10g) = 0.268 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.1 %

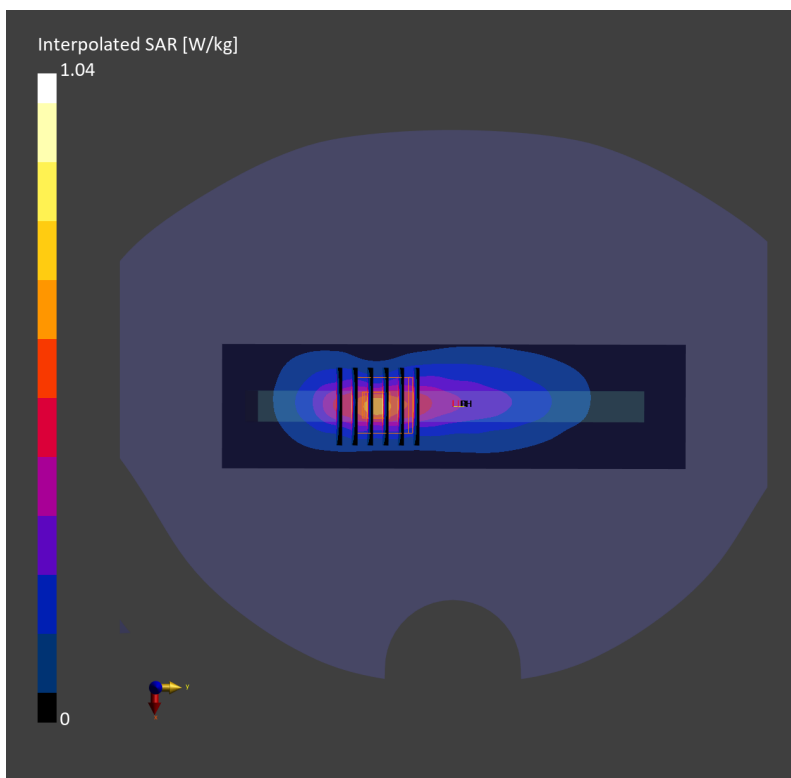

#49_FR1 n7_50M_BPSK_1_1_Bottom Side_10mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230520 Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.91$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.277 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.592 W/kg; SAR (8g) = 0.310 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

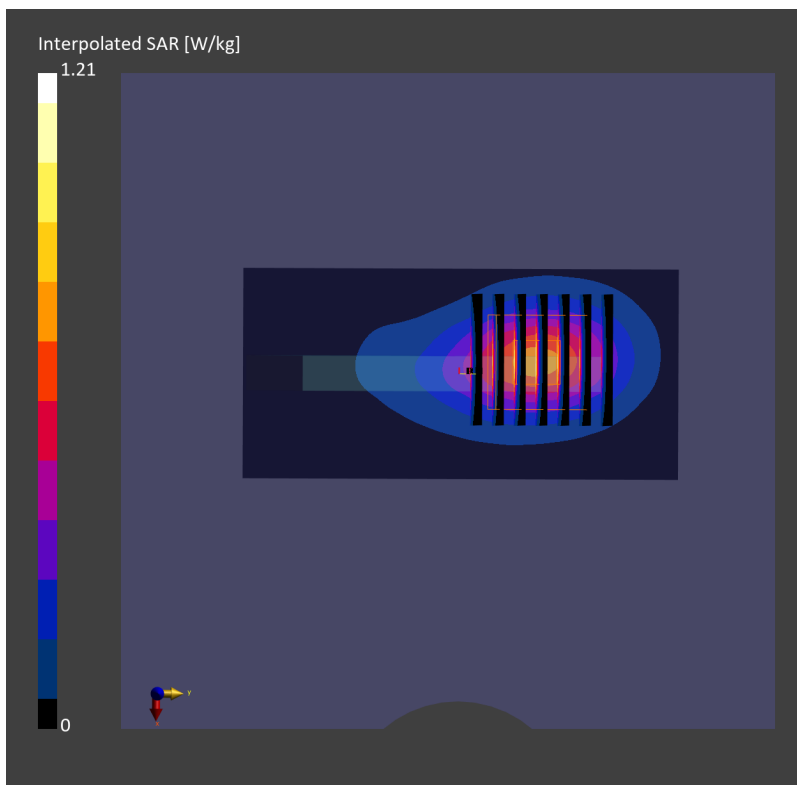

#50_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500


Communication System: 5G NR; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.334 W/kg; SAR (10g) = 0.229 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.342 W/kg; SAR (8g) = 0.246 W/kg; SAR (10g) = 0.235 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 82.6 %

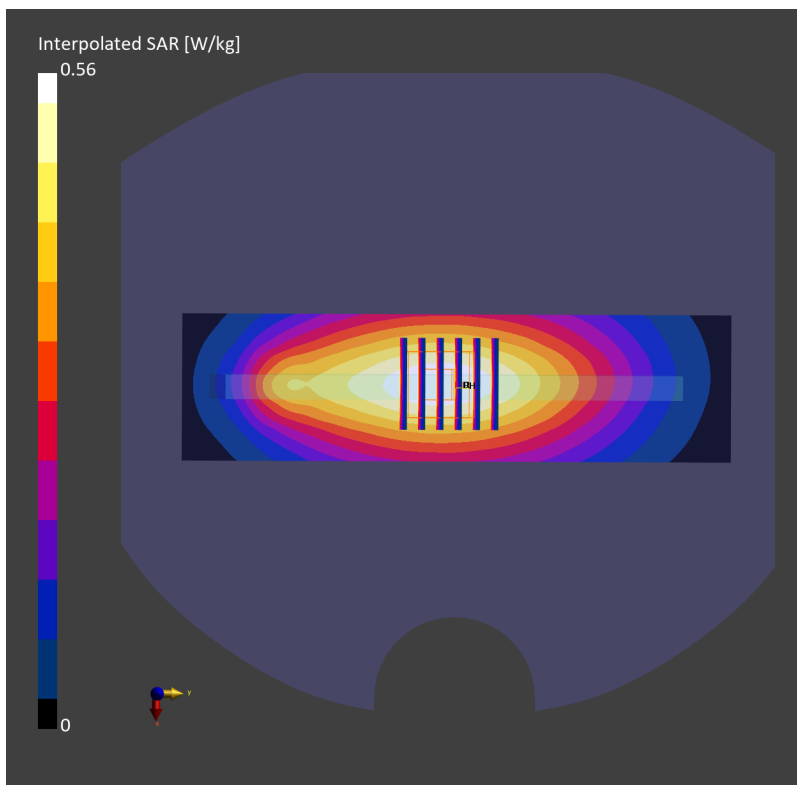

#51_FR1 n25_40M_BPSK_1_1_Bottom Side_10mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230522 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.33, 7.51); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.397 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.782 W/kg; SAR (8g) = 0.445 W/kg; SAR (10g) = 0.409 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

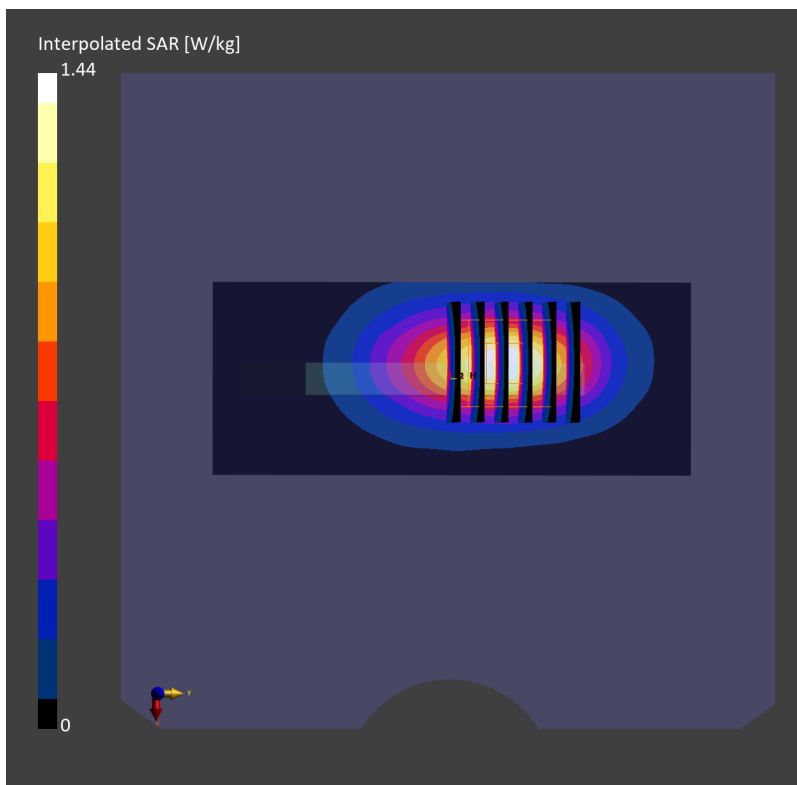

#52_FR1 n26_20M_BPSK_1_1_Bottom Side_10mm_Ch166300

Communication System: 5G NR; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230515 Medium parameters used: $f=831.5$ MHz; $\sigma=0.906$ S/m; $\epsilon_r=41.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.73, 9.71, 8.75); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.636 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

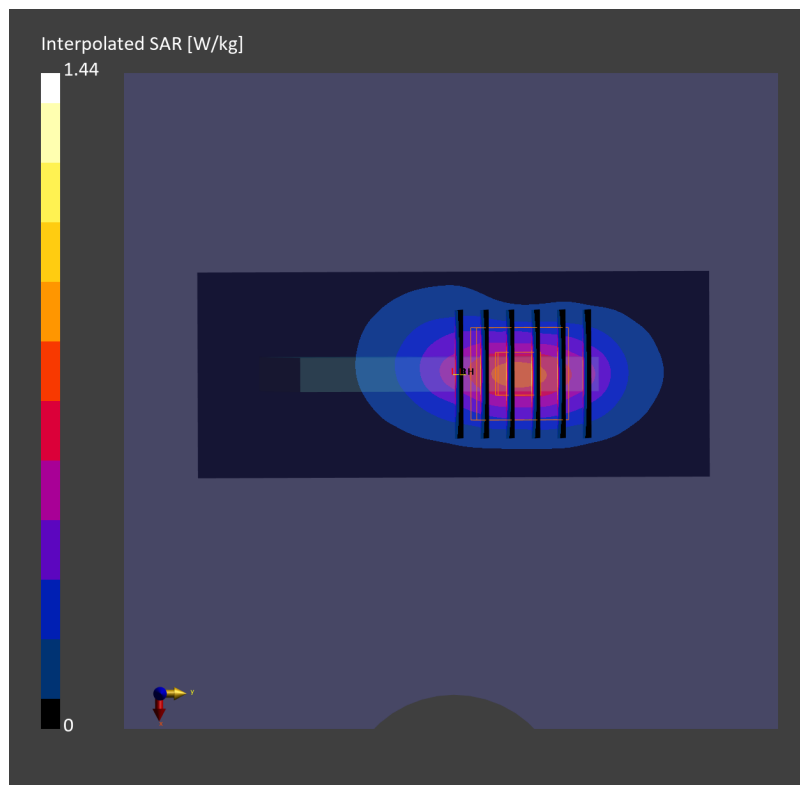

#53_FR1 n30_10M_BPSK_1_26_Bottom Side_10mm_Ch462000

Communication System: 5G NR ; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230519 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.62$ S/m; $\epsilon_r=39.18$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.88, 7.66, 6.92); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.606 W/kg; SAR (10g) = 0.292 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm Power

Drift = -0.04 dB

SAR (1g) = 0.608 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

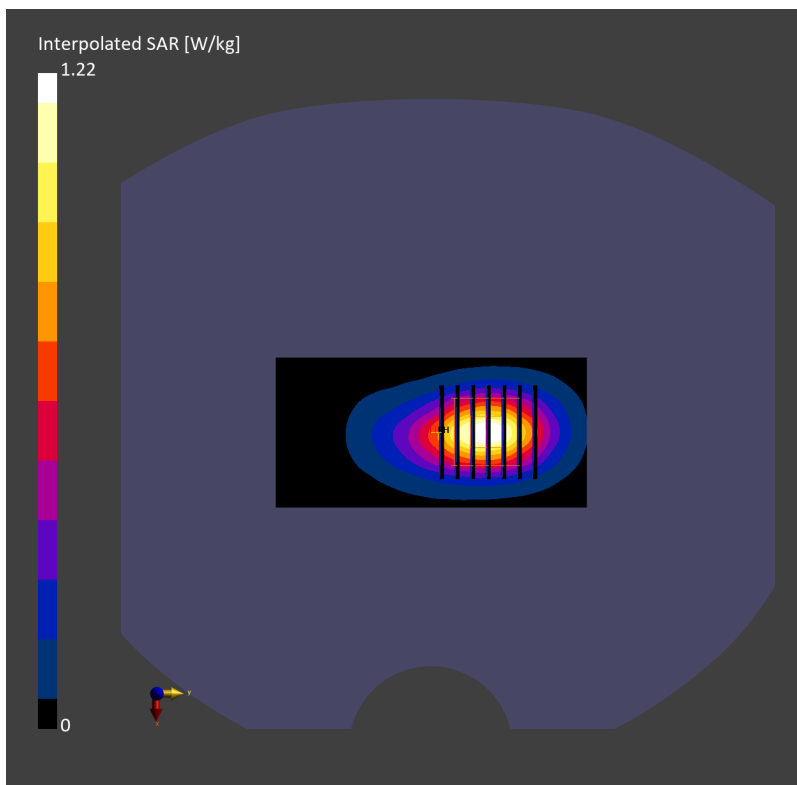

#54_FR1 n41_100M_BPSK_135_0_Top Side_10mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230530 Medium parameters used: $f=2592.990$ MHz; $\sigma=1.96$ S/m; $\epsilon_r=38.2$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.562 W/kg; SAR (10g) = 0.235 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.579 W/kg; SAR (8g) = 0.271 W/kg; SAR (10g) = 0.242 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 76.9 %

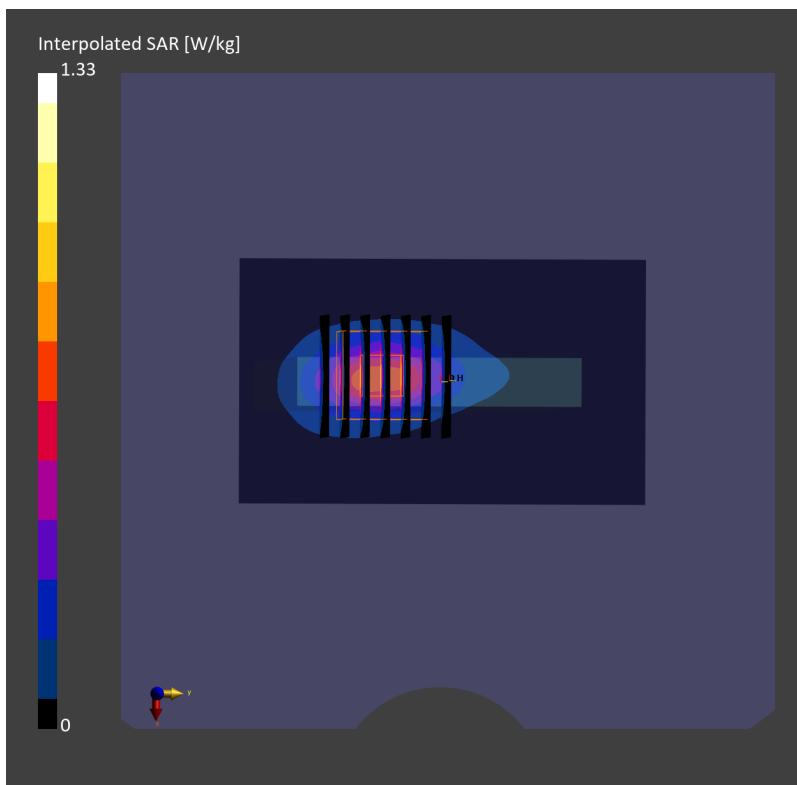

#55_FR1 n48_20M_BPSK_1_49_Left Side_10mm_Ch637334

Communication System: 5G NR; Frequency: 3560.01 MHz; Duty Cycle: 1:1
Medium: HSL_3500_230602 Medium parameters used: $f = 3560.01$ MHz; $\sigma = 2.96$ S/m; $\epsilon_r = 37.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.19, 7.19, 7.19); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10900-AAC

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.686 W/kg; SAR (10g) = 0.286 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.709 W/kg; SAR (8g) = 0.339 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

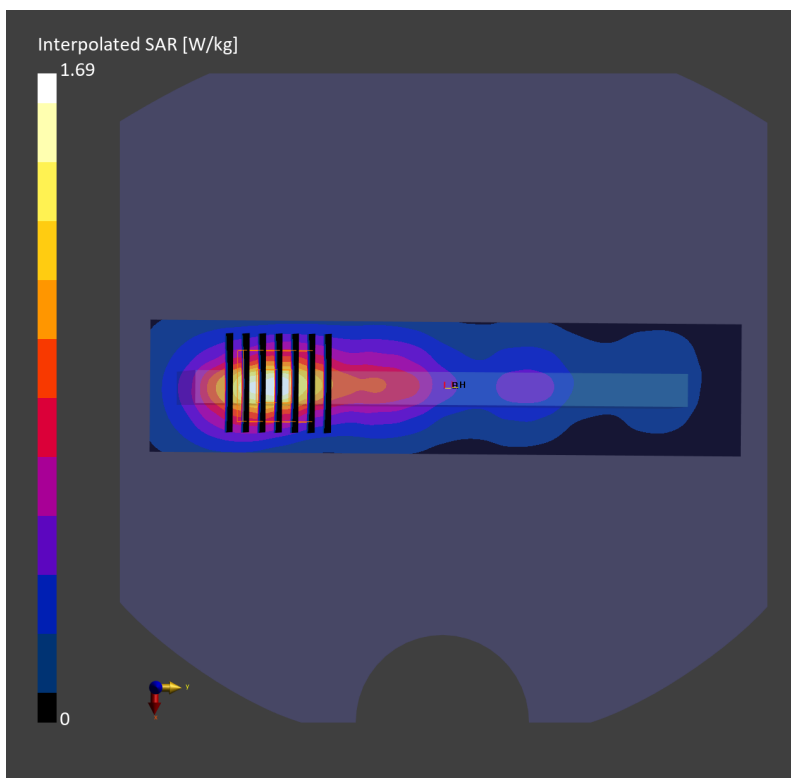

#56_FR1 n66_40M_BPSK_108_0_Bottom Side_10mm_Ch349000


Communication System: 5G NR; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1745$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.703 W/kg; SAR (10g) = 0.361 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.716 W/kg; SAR (8g) = 0.402 W/kg; SAR (10g) = 0.369 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.8 %

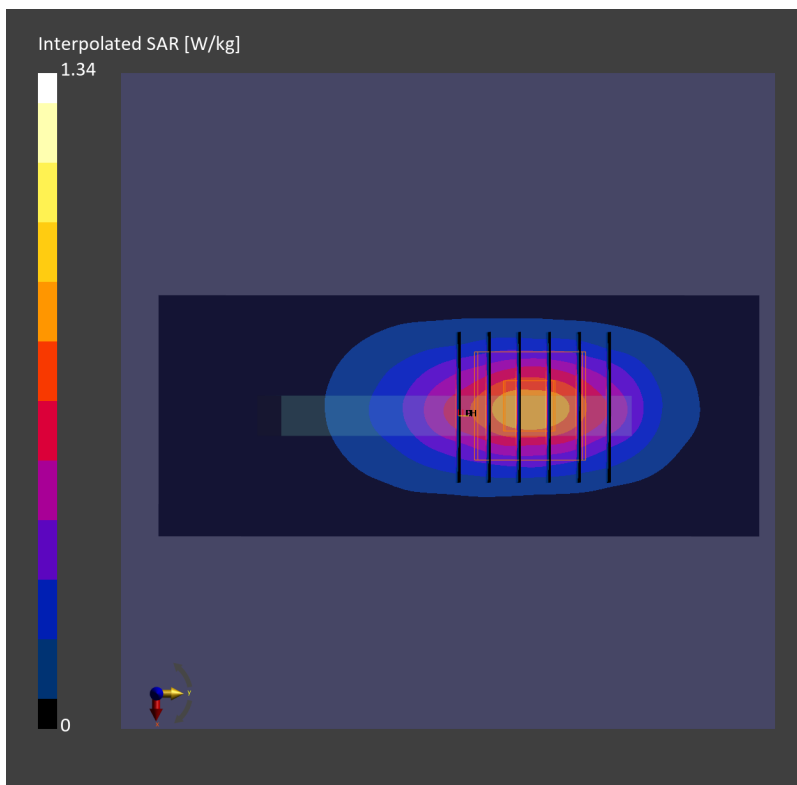

#57_FR1 n70_15M_BPSK_36_22_Bottom Side_10mm_Ch340500


Communication System: 5G NR; Frequency: 1702.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1702.5$ MHz; $\sigma=1.36$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.710 W/kg; SAR (10g) = 0.366 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.721 W/kg; SAR (8g) = 0.407 W/kg; SAR (10g) = 0.374 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

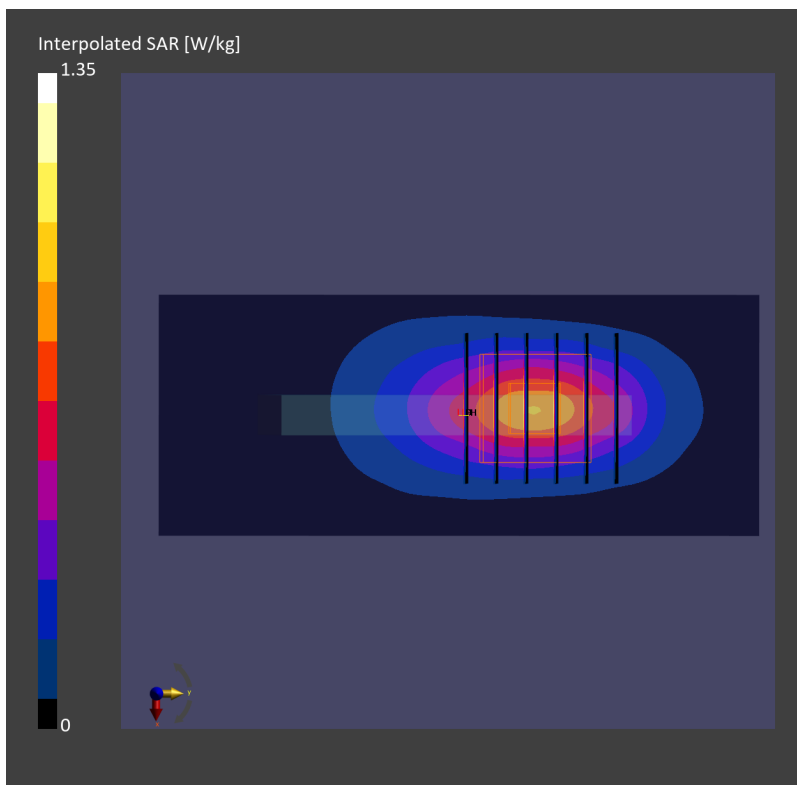

#58_FR1 n71_20M_BPSK_1_1_Left Side_10mm_Ch136100


Communication System: 5G NR; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=680.5$ MHz; $\sigma=0.863$ S/m; $\epsilon_r=42.1$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.470 W/kg; SAR (10g) = 0.325 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.481 W/kg; SAR (8g) = 0.349 W/kg; SAR (10g) = 0.334 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 82.9 %

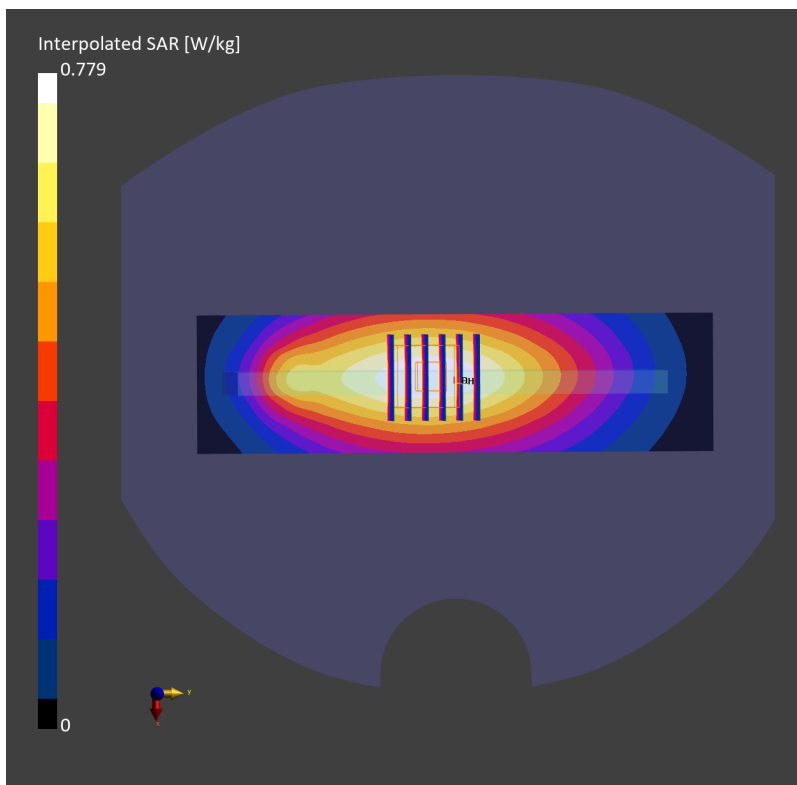

#59_FR1 n77_100M_BPSK_1_1_Right Side_10mm_Ch656000


Communication System: NR; Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL_3900_230608 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.35$ S/m; $\epsilon_r = 37.9$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.87, 6.87, 6.87); Calibrated: 2023-02-21
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2023-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.405 W/kg; SAR (10g) = 0.171 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.440 W/kg; SAR (8g) = 0.201 W/kg; SAR (10g) = 0.180 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.5 %

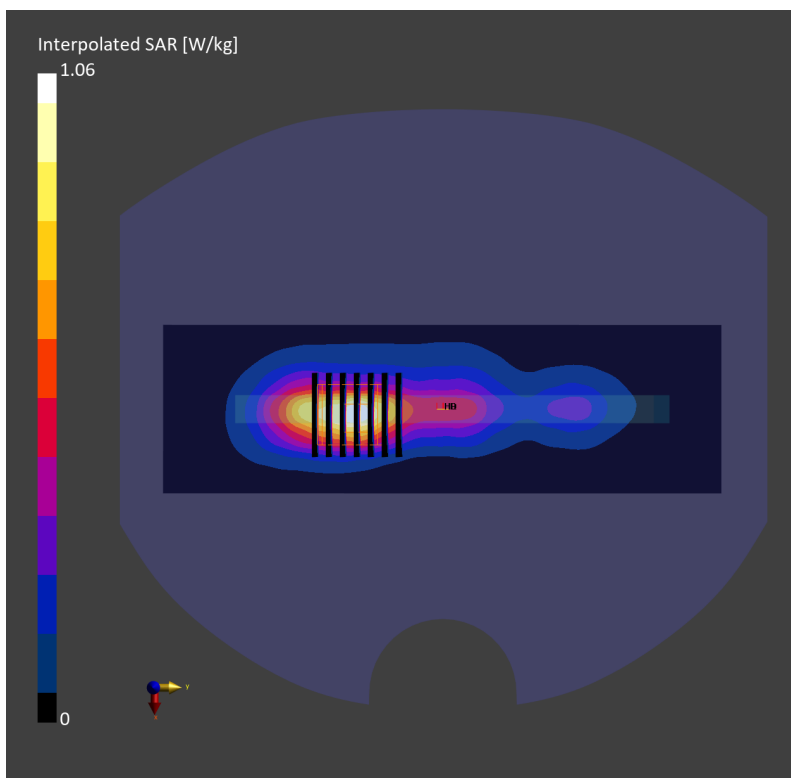

#60_GSM850_GPRS (4 Tx slots)_Front_10mm_Ch189


Communication System: GPRS; Frequency: 836.400 MHz; Duty Cycle: 1:2.08
Medium: HSL_850_230523 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.532 W/kg; SAR (10g) = 0.359 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.578 W/kg; SAR (8g) = 0.358 W/kg; SAR (10g) = 0.334 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.0 %

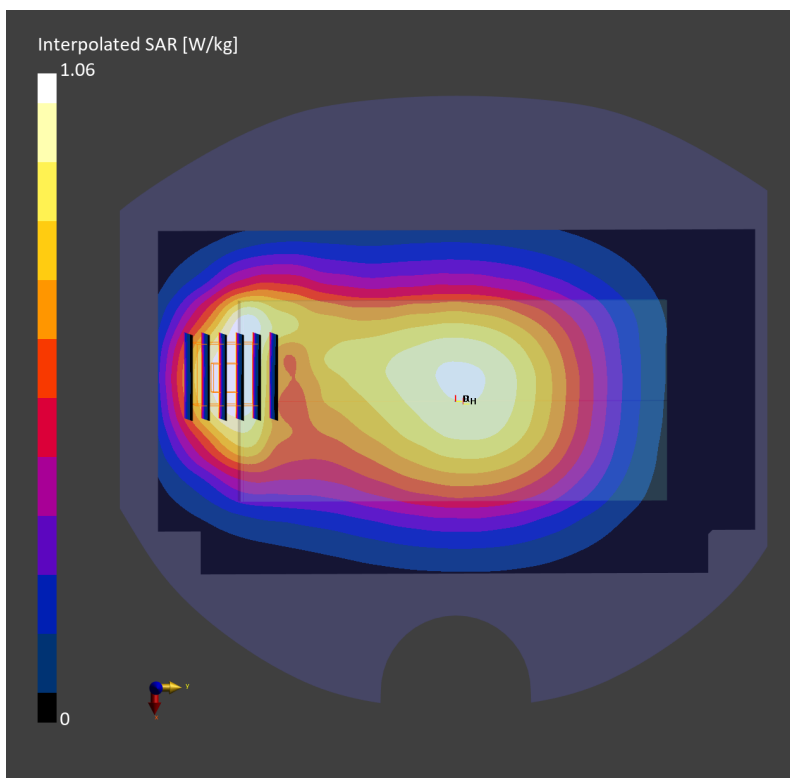

#61_GSM1900_GPRS (4 Tx slots)_Front_10mm_Ch661

Communication System: GPRS; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_230521 Medium parameters used: $f=1880$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.246 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.542 W/kg; SAR (8g) = 0.312 W/kg; SAR (10g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

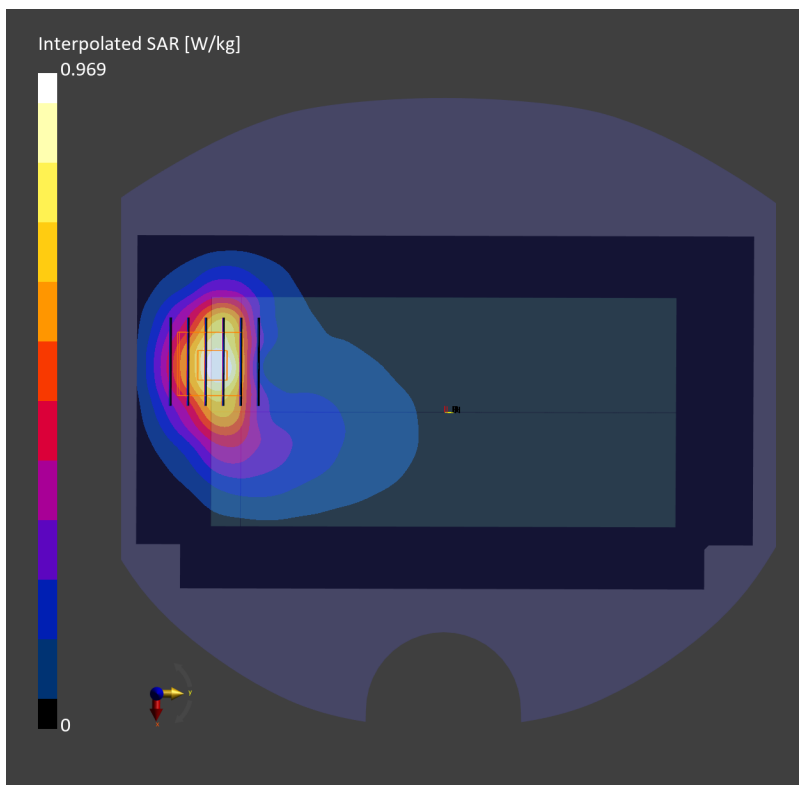

#62_WCDMA II_RMC 12.2Kbps_Front_10mm_Ch9538


Communication System: WCDMA; Frequency: 1907.600 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230517 Medium parameters used: $f=1907.600$ MHz; $\sigma=1.46$ S/m; $\epsilon_r=38.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.383 W/kg; SAR (10g) = 0.201 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.10 dB
SAR (1g) = 0.408 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.218 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 83.2 %

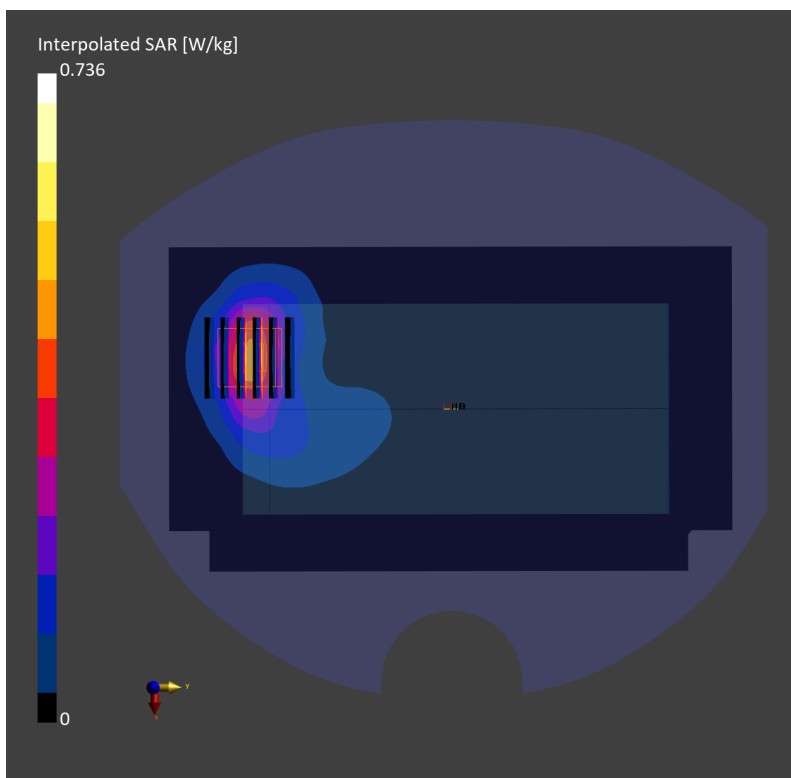

#63_WCDMA IV_RMC 12.2Kbps_Front_10mm_Ch1413


Communication System: WCDMA; Frequency: 1732.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230517 Medium parameters used: $f= 1732.600$ MHz; $\sigma= 1.36$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.336 W/kg; SAR (10g) = 0.178 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.360 W/kg; SAR (8g) = 0.211 W/kg; SAR (10g) = 0.195 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.8 %

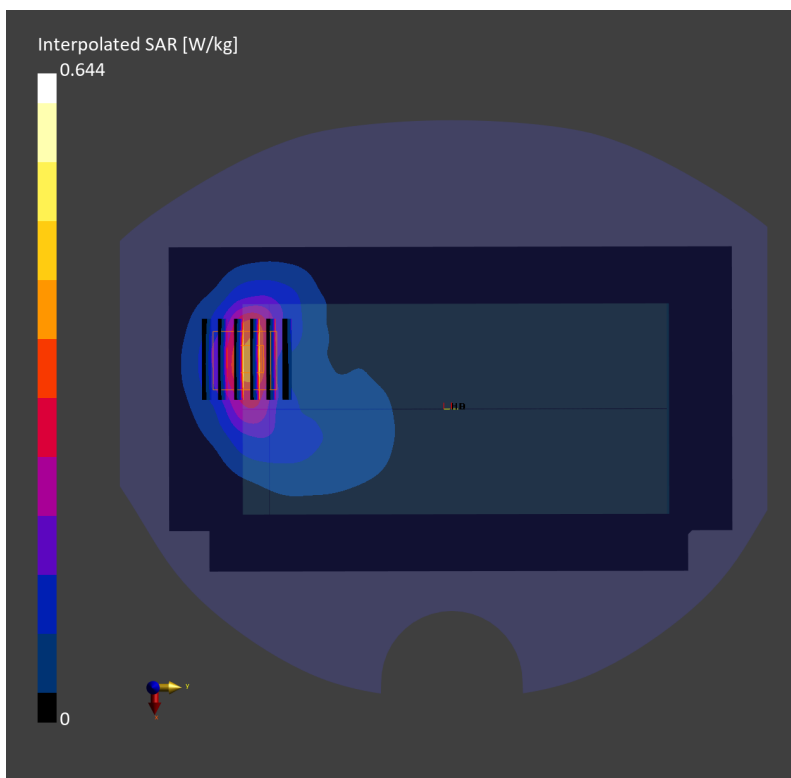

#64_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182


Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_230505 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.545 W/kg; SAR (10g) = 0.349 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.548 W/kg; SAR (8g) = 0.336 W/kg; SAR (10g) = 0.314 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.5 %

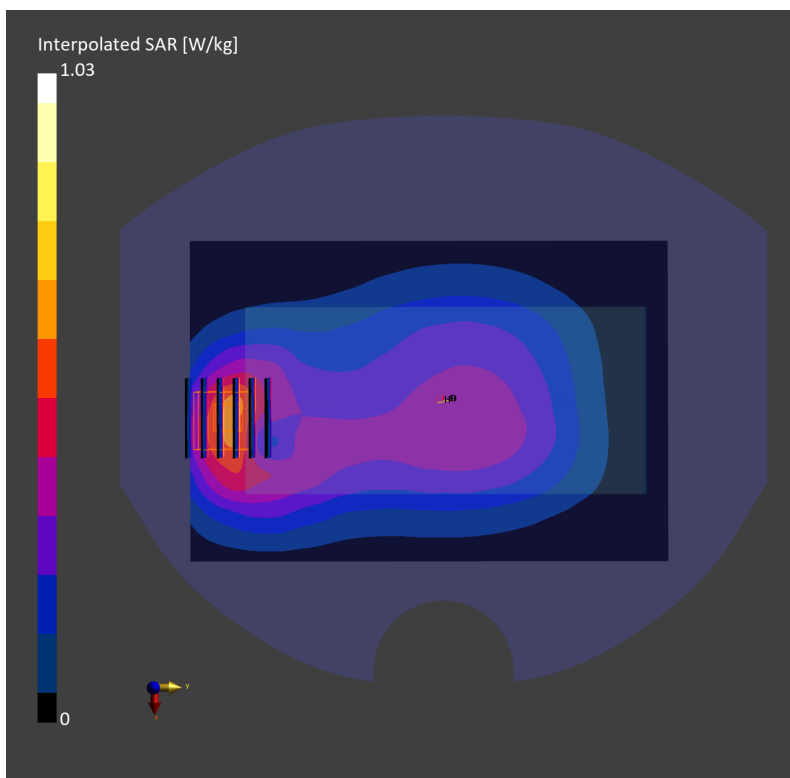

#65_LTE Band 2_20M_QPSK_50_0_Back_10mm_Ch19100


Communication System: LTE-FDD; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230606 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.46$ S/m; $\epsilon_r=39.5$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.295 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.384 W/kg; SAR (8g) = 0.213 W/kg; SAR (10g) = 0.196 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 83.0 %

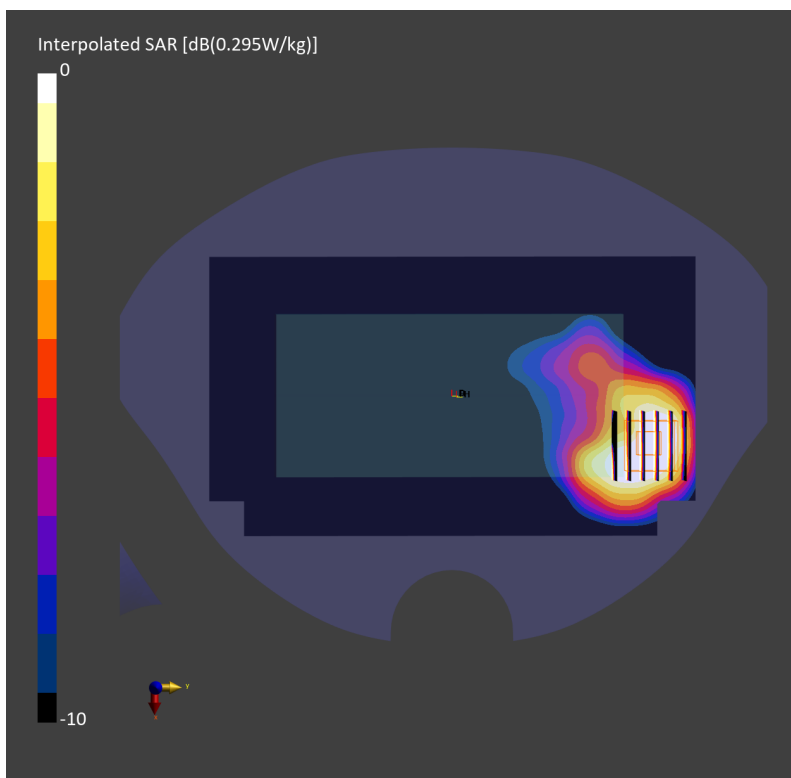

#66_LTE Band 7_20M_QPSK_1_0_Front_10mm_Ch21100


Communication System: LTE; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.518 W/kg; SAR (10g) = 0.263 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.547 W/kg; SAR (8g) = 0.302 W/kg; SAR (10g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.4 %

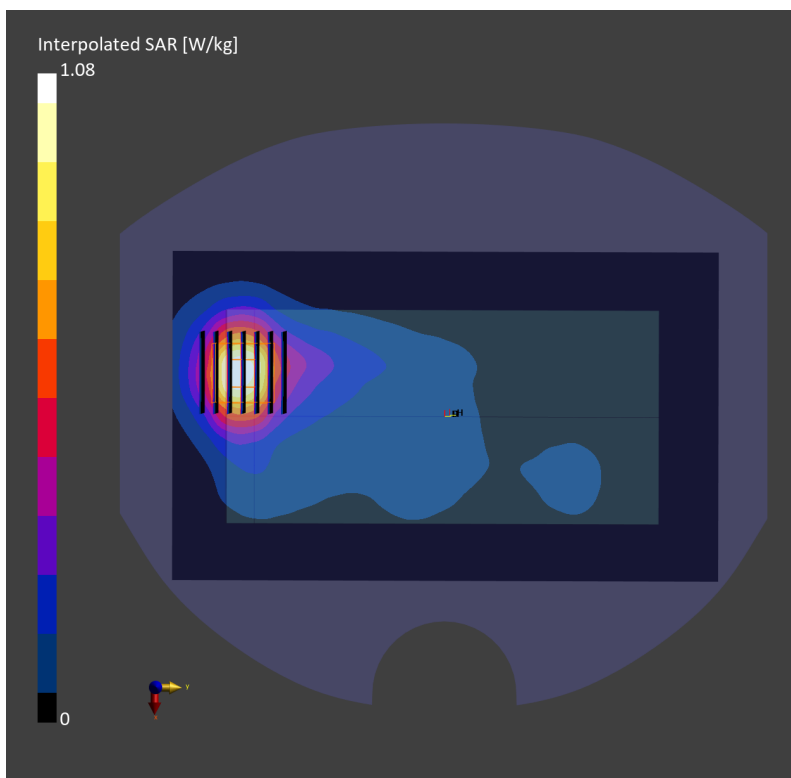

#67_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095


Communication System: LTE-FDD; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230423 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.377 W/kg; SAR (10g) = 0.264 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.376 W/kg; SAR (8g) = 0.232 W/kg; SAR (10g) = 0.217 W/kg
Smallest distance from peaks to all points 3 dB below = 14.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.3 %

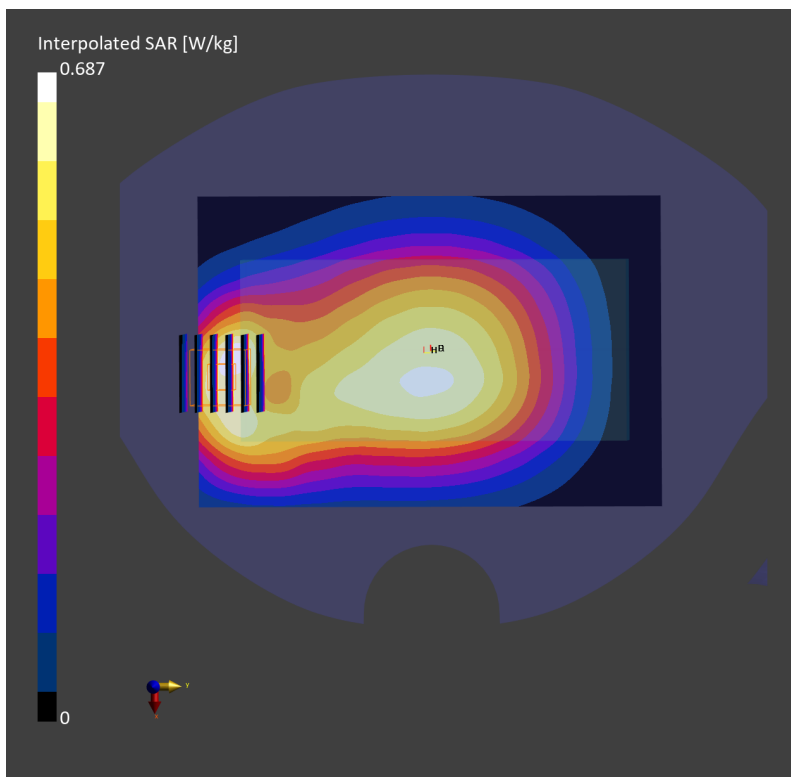

#68_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230


Communication System: LTE-FDD; Frequency: 782.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230423 Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.378 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.384 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.221 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 81.4 %

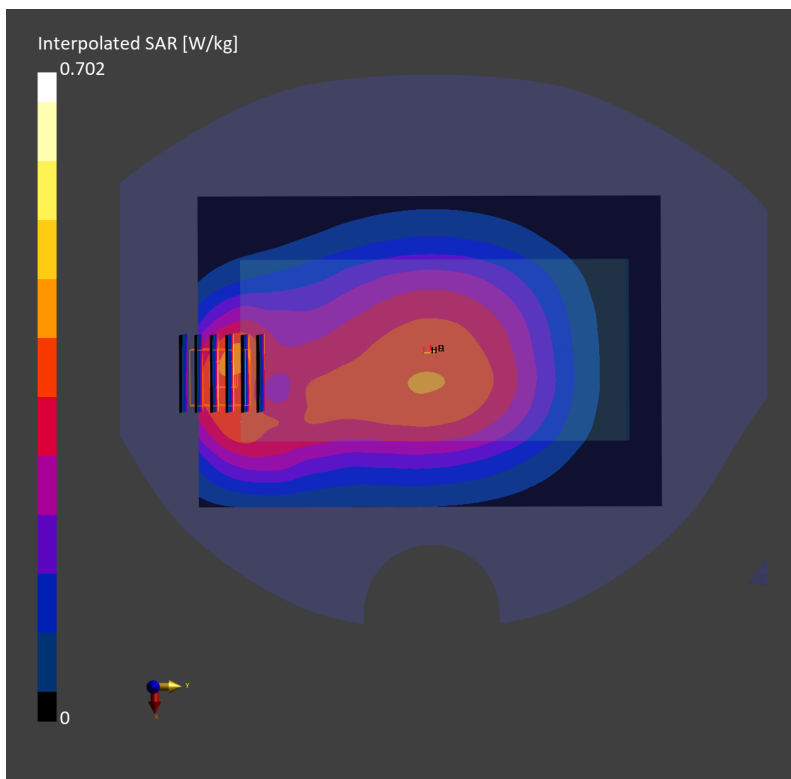

#69_LTE Band 14_10M_QPSK_1_0_Front_10mm_Ch23330


Communication System: LTE-FDD; Frequency: 793.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230423 Medium parameters used: $f=793.0$ MHz; $\sigma=0.907$ S/m; $\epsilon_r=41.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.516 W/kg; SAR (10g) = 0.367 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.447 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.309 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 90.8 %

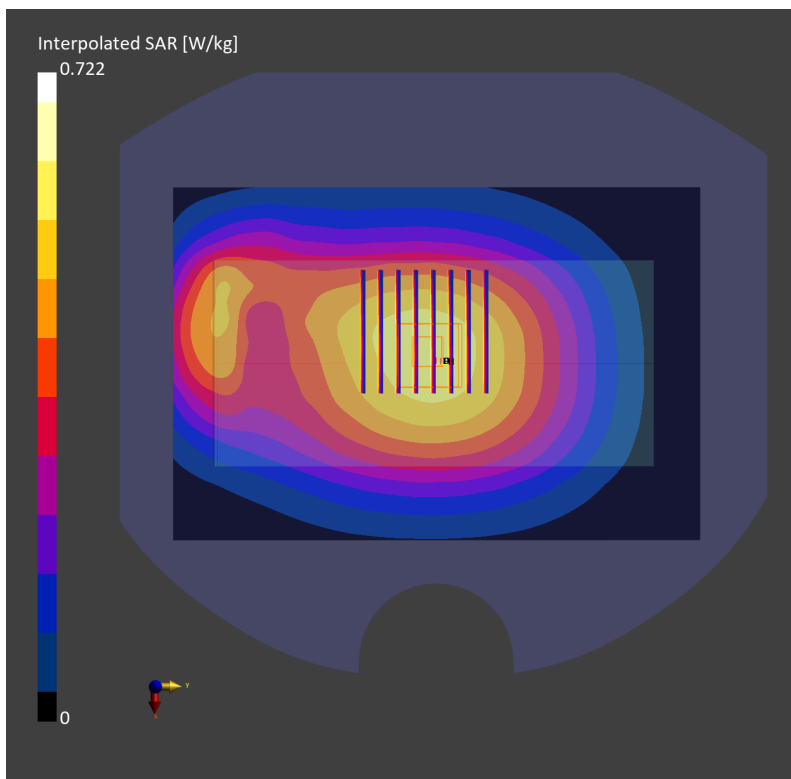

#70_LTE Band 25_20M_QPSK_1_0_Front_10mm_Ch26340


Communication System: LTE-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230521 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.423 W/kg; SAR (10g) = 0.242 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.507 W/kg; SAR (8g) = 0.299 W/kg; SAR (10g) = 0.277 W/kg
Smallest distance from peaks to all points 3 dB below = 10.9 mm
Ratio of SAR at M2 to SAR at M1 = 85.3 %

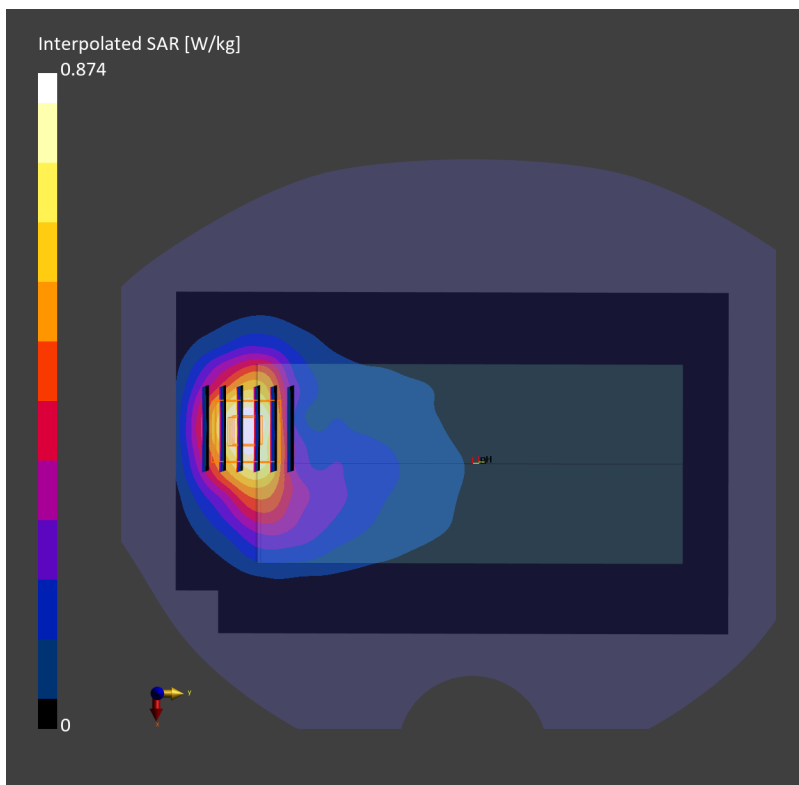

#71_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865


Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230425 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.465 W/kg; SAR (10g) = 0.305 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.504 W/kg; SAR (8g) = 0.307 W/kg; SAR (10g) = 0.287 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 80.1 %

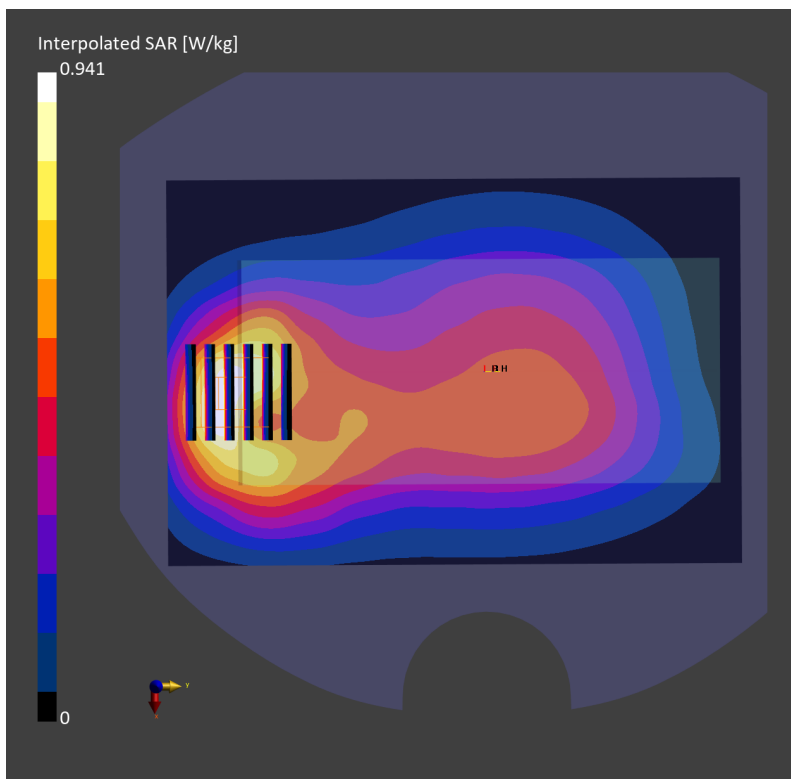

#72_LTE Band 30_10M_QPSK_1_0_Front_10mm_Ch27710


Communication System: LTE-FDD; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.68$ S/m; $\epsilon_r=39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.625 W/kg; SAR (10g) = 0.316 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 0.645 W/kg; SAR (8g) = 0.363 W/kg; SAR (10g) = 0.334 W/kg
Smallest distance from peaks to all points 3 dB below = 11.0 mm
Ratio of SAR at M2 to SAR at M1 = 82.6 %

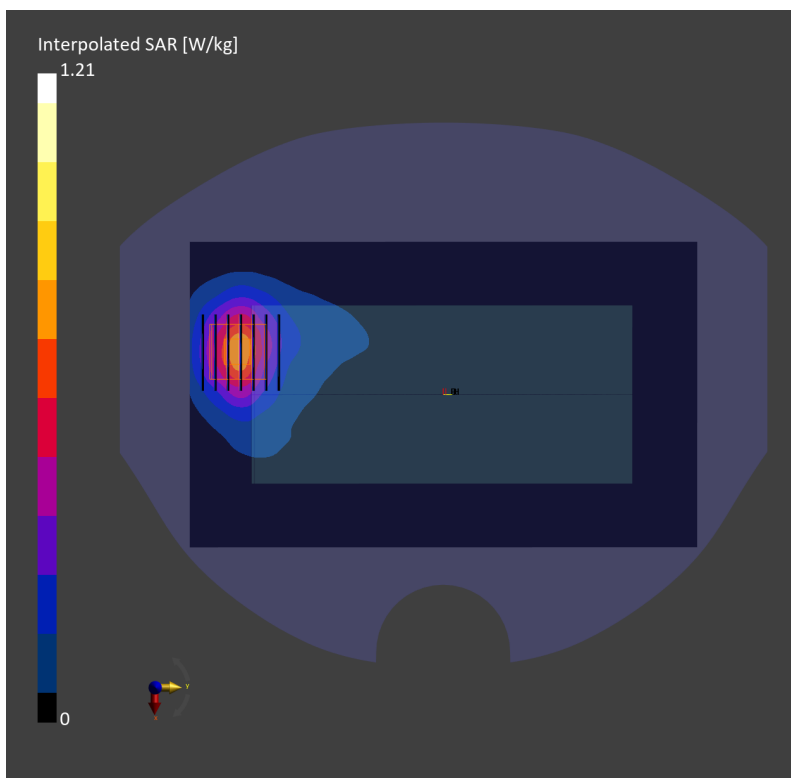

#73_LTE Band 41_20M_QPSK_1_0_Front_10mm_Ch39750


Communication System: LTE; Frequency: 2506.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_230516 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.388 W/kg; SAR (10g) = 0.214 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.394 W/kg; SAR (8g) = 0.235 W/kg; SAR (10g) = 0.218 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 78.6 %

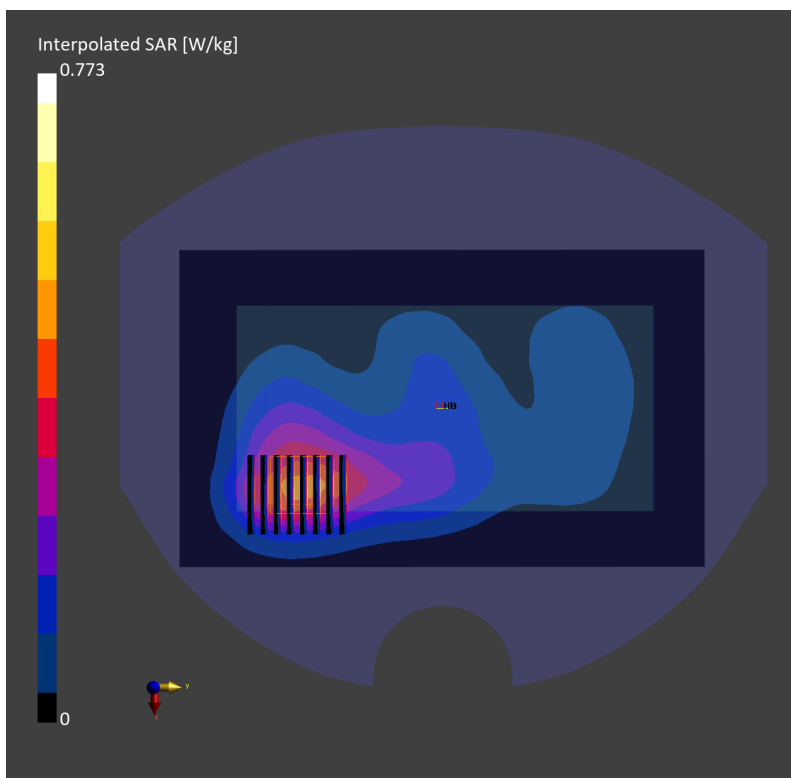

#74_LTE Band 48_20M_QPSK_1_0_Front_10mm_Ch56640


Communication System: LTE; Frequency: 3690.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_230528 Medium parameters used: $f= 3690.000$ MHz; $\sigma= 3.24$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.06, 7.06, 7.06); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.275 W/kg; SAR (10g) = 0.122 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.297 W/kg; SAR (8g) = 0.130 W/kg; SAR (10g) = 0.116 W/kg
Smallest distance from peaks to all points 3 dB below = 6.2 mm
Ratio of SAR at M2 to SAR at M1 = 75.7 %

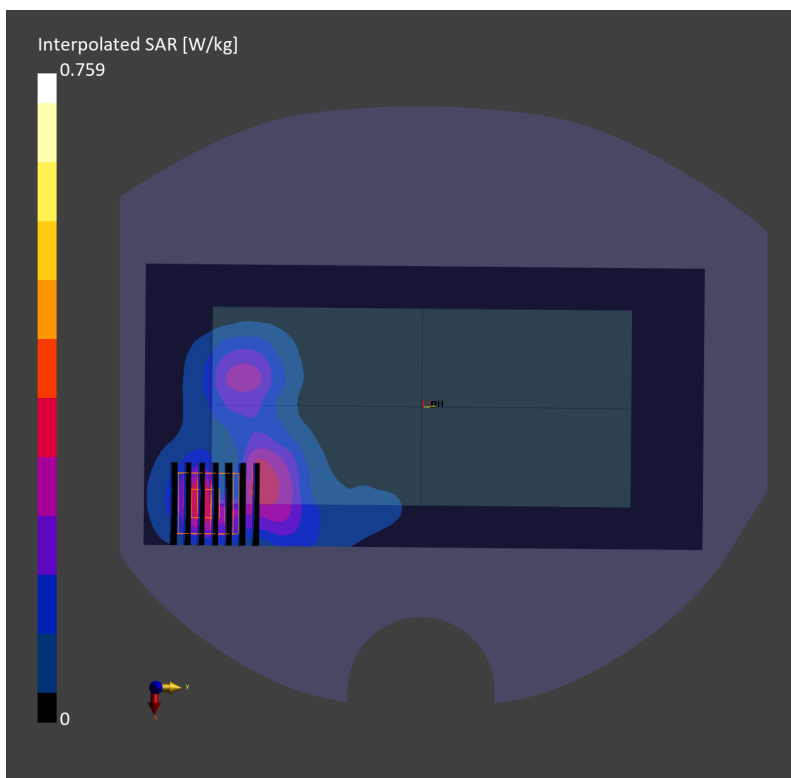

#75_LTE Band 66_20M_QPSK_1_0_Front_10mm_Ch132072


Communication System: LTE-FDD; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230525 Medium parameters used: $f=1720.000$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=40.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.282 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.579 W/kg; SAR (8g) = 0.342 W/kg; SAR (10g) = 0.316 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.7 %

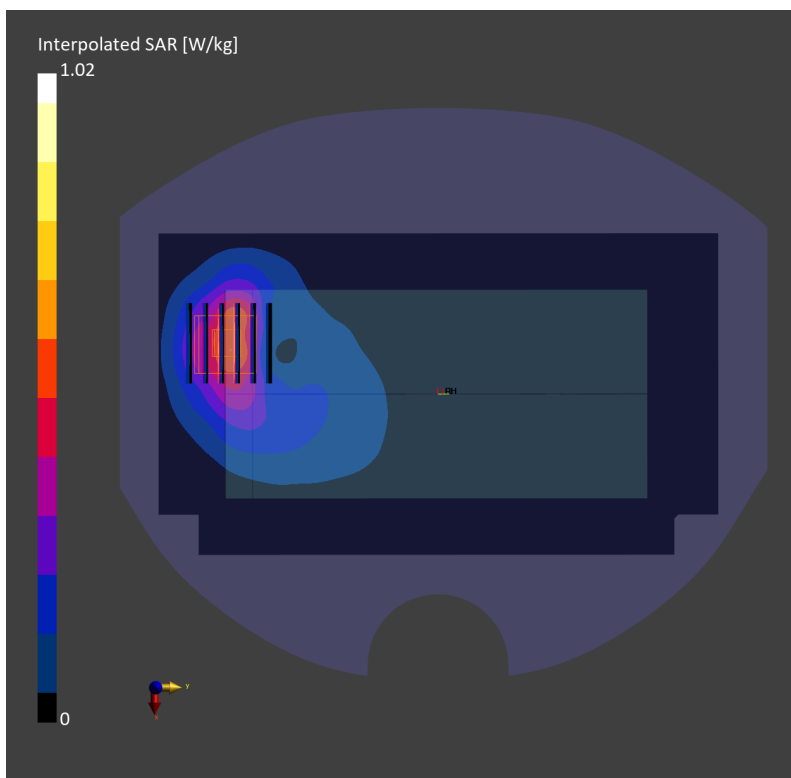

#76_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133297


Communication System: LTE-FDD; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230424 Medium parameters used: $f=680.5$ MHz; $\sigma=0.852$ S/m; $\epsilon_r=43.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.357 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.356 W/kg; SAR (8g) = 0.220 W/kg; SAR (10g) = 0.206 W/kg
Smallest distance from peaks to all points 3 dB below = 14.1 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

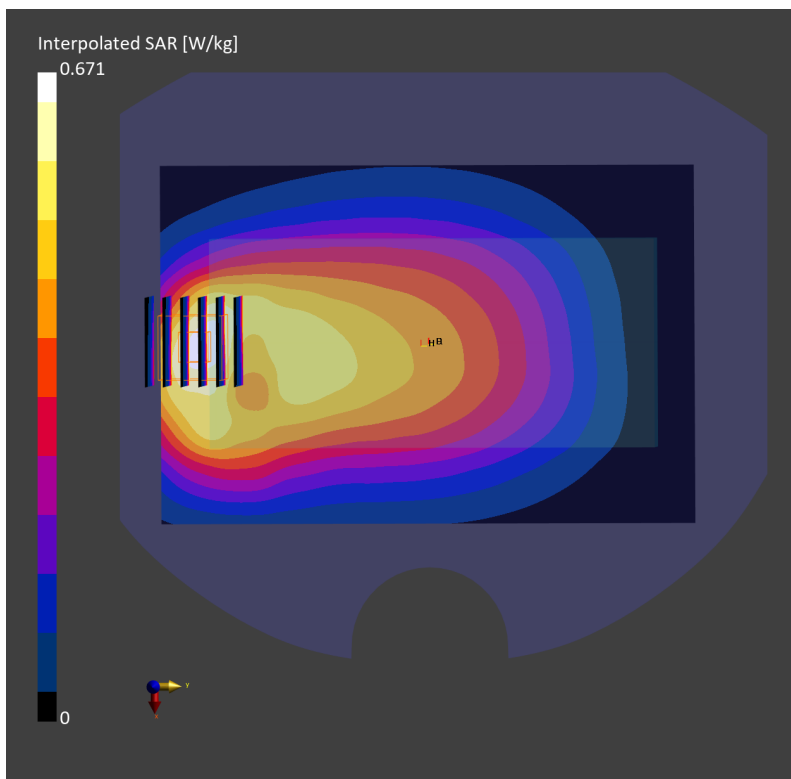

#77_FR1 n2_20M_BPSK_50_0_Back_10mm_Ch380000


Communication System: 5G NR; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230606 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.46$ S/m; $\epsilon_r=39.5$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.337 W/kg; SAR (10g) = 0.181 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.376 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.190 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 82.5 %

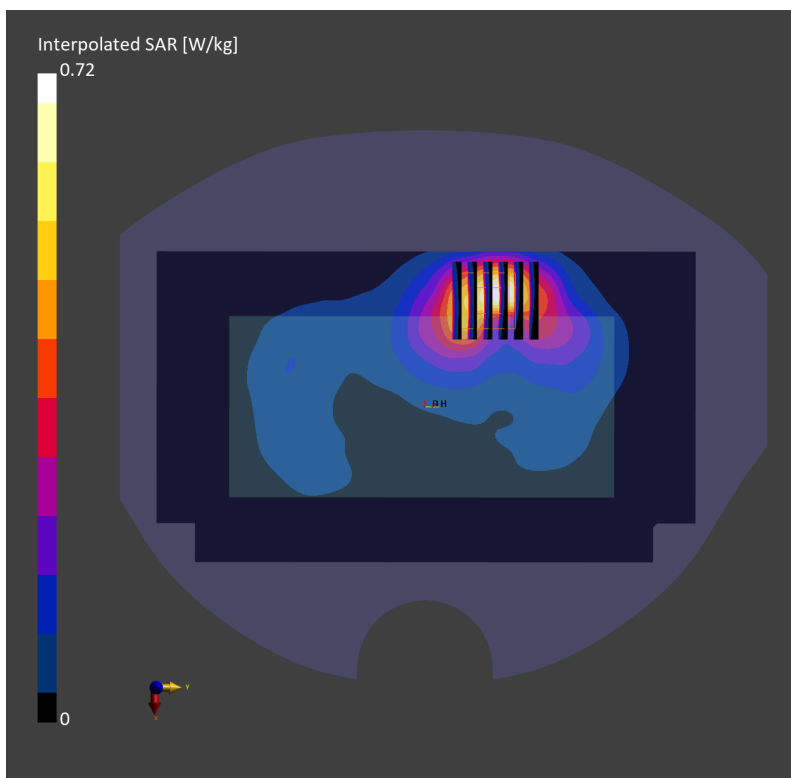

#78_FR1 n7_50M_BPSK_1_1_Front_10mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230520 Medium parameters used: $f=2535.000$ MHz; $\sigma=1.91$ S/m; $\epsilon_r=38.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.603 W/kg; SAR (10g) = 0.304 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.629 W/kg; SAR (8g) = 0.340 W/kg; SAR (10g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

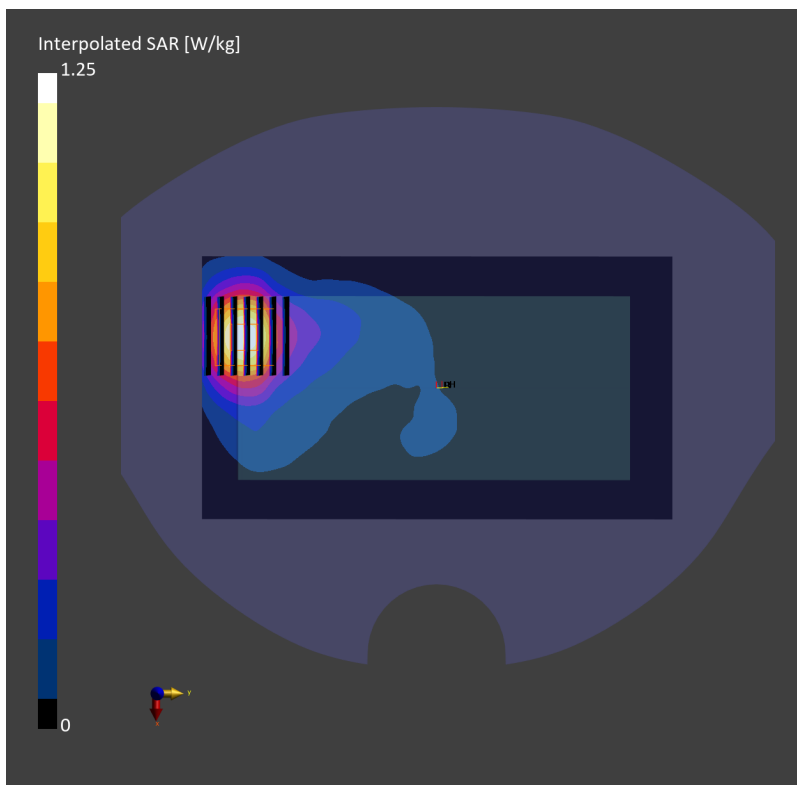

#79_FR1 n12_15M_BPSK_1_1_Back_10mm_Ch141500


Communication System: 5G NR; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.386 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.387 W/kg; SAR (8g) = 0.237 W/kg; SAR (10g) = 0.222 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 77.2 %

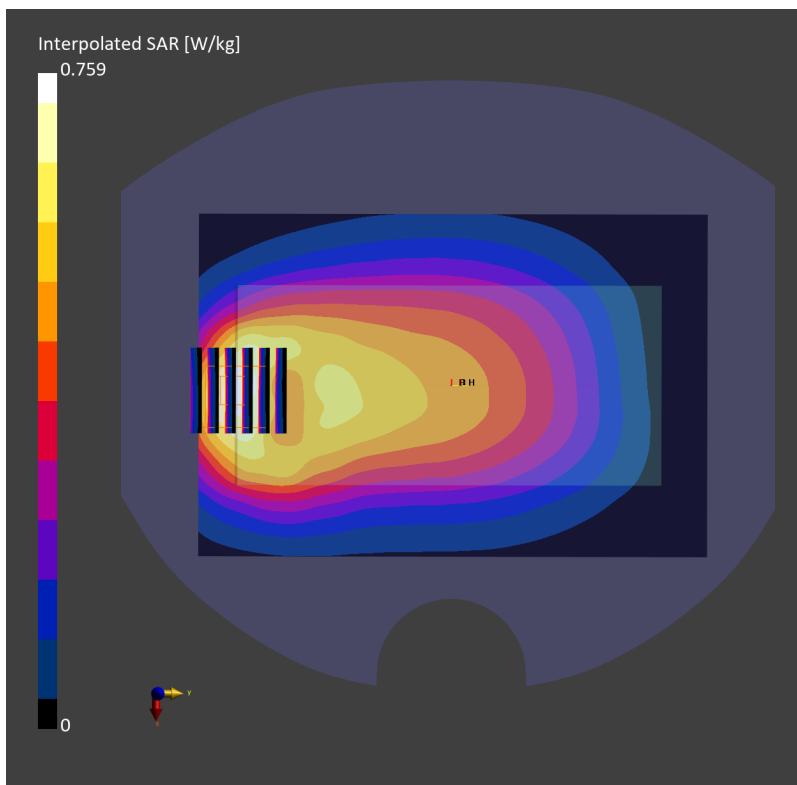

#80_FR1 n25_40M_BPSK_1_1_Front_10mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230522 Medium parameters used: $f=1882.500$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=39.1$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.33, 7.51); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.235 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.464 W/kg; SAR (8g) = 0.268 W/kg; SAR (10g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

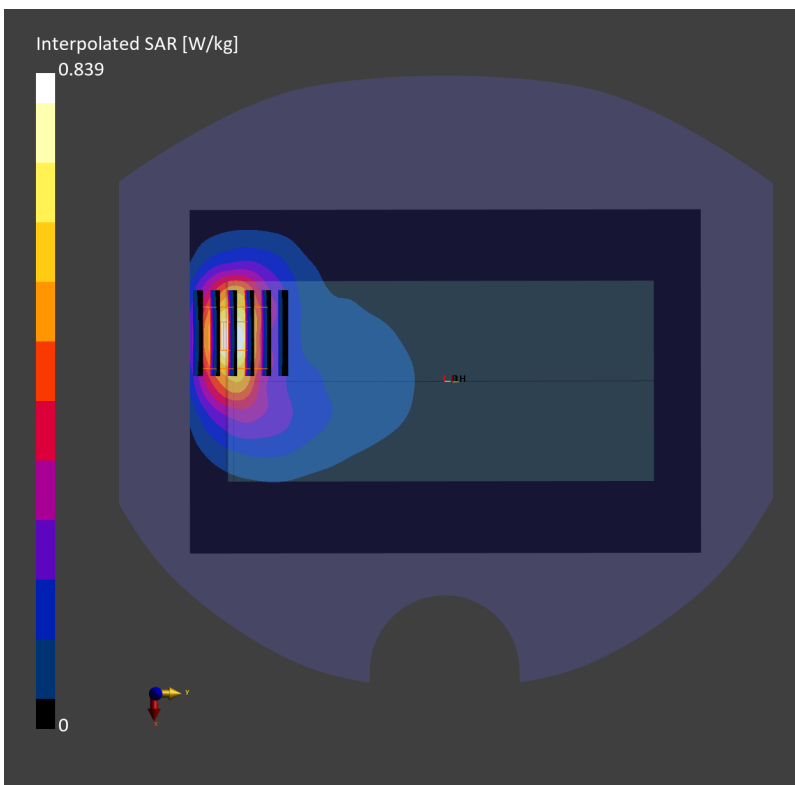

#81_FR1 n26_20M_BPSK_1_1_Front_10mm_Ch166300

Communication System: 5G NR; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230515 Medium parameters used: $f=831.5$ MHz; $\sigma=0.906$ S/m; $\epsilon_r=41.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.73, 9.71, 8.75); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.534 W/kg; SAR (10g) = 0.348 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.544 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

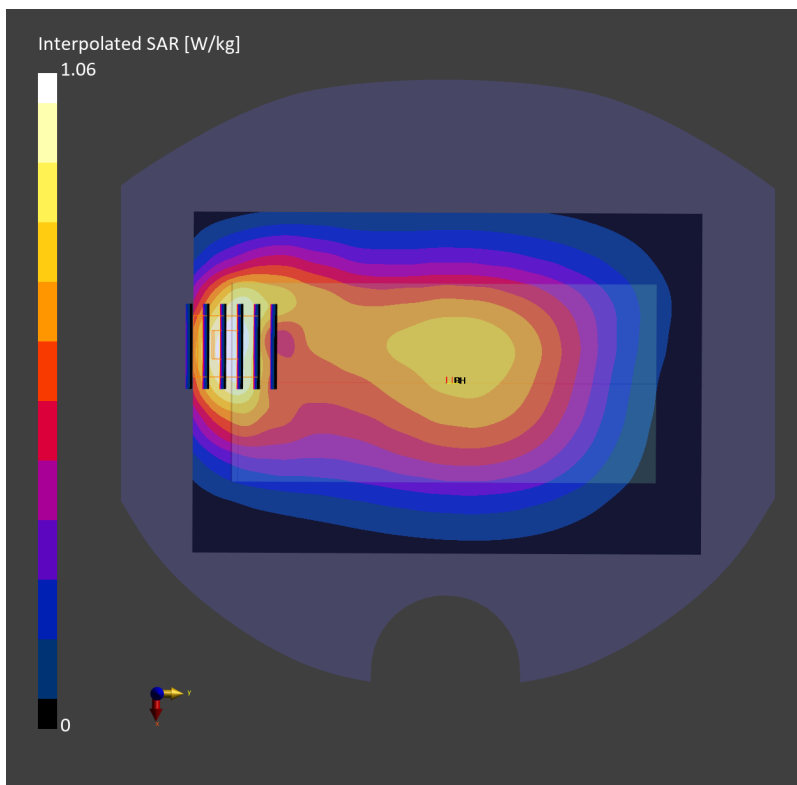

#82_FR1 n30_10M_BPSK_1_26_Front_10mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230519 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.62$ S/m; $\epsilon_r=39.18$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.88, 7.66, 6.92); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.315 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm Power

Drift = 0.01 dB

SAR (1g) = 0.640 W/kg; SAR (8g) = 0.354 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

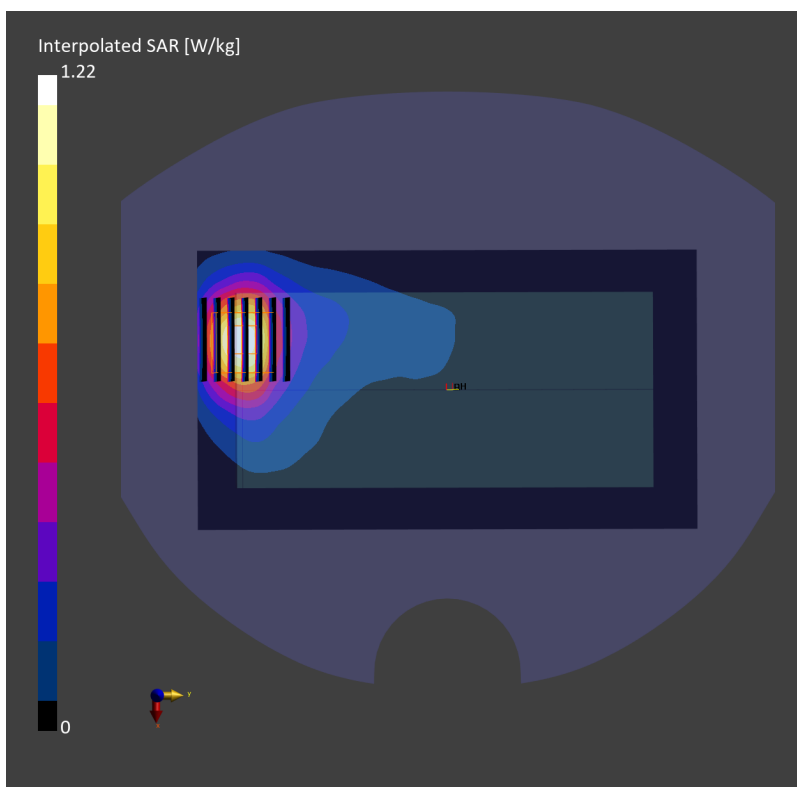

#83_FR1 n41_100M_BPSK_1_1_Front_10mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:2
Medium: HSL_2600_230531 Medium parameters used: $f=2592.990$ MHz; $\sigma=1.98$ S/m; $\epsilon_r=38.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.542 W/kg; SAR (10g) = 0.268 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.554 W/kg; SAR (8g) = 0.295 W/kg; SAR (10g) = 0.268 W/kg
Smallest distance from peaks to all points 3 dB below = 11.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.4 %

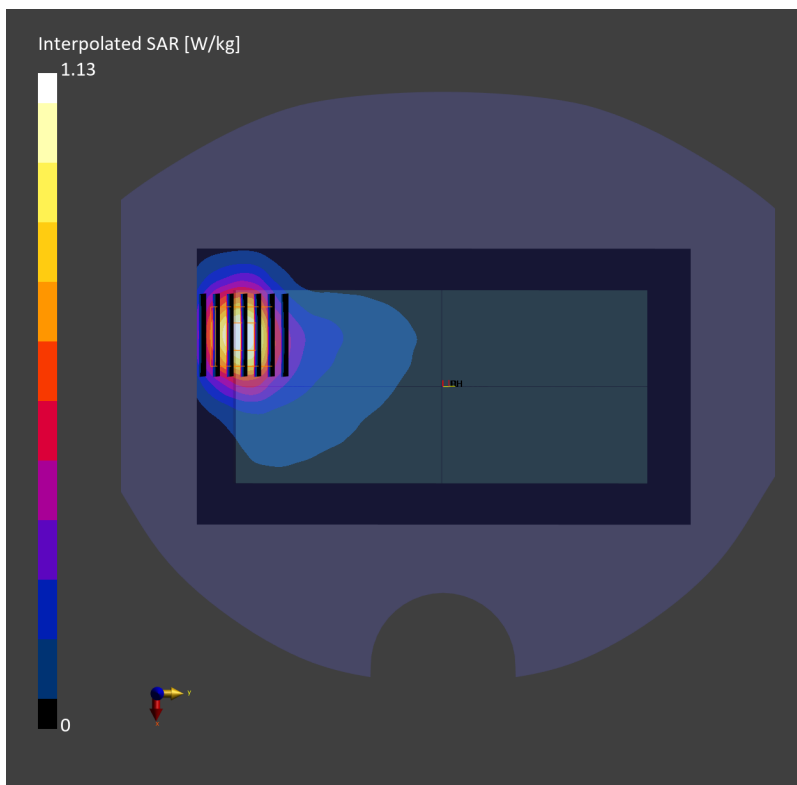

#84_FR1 n48_40M_BPSK_1_1_Front_10mm_Ch641666

Communication System: 5G NR; Frequency: 3624.99 MHz; Duty Cycle: 1:1
Medium: HSL_3700_230602 Medium parameters used: $f = 3624.99$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.06, 7.06, 7.06); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.368 W/kg; SAR (10g) = 0.146 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.15 dB

SAR (1g) = 0.410 W/kg; SAR (8g) = 0.186 W/kg; SAR (10g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

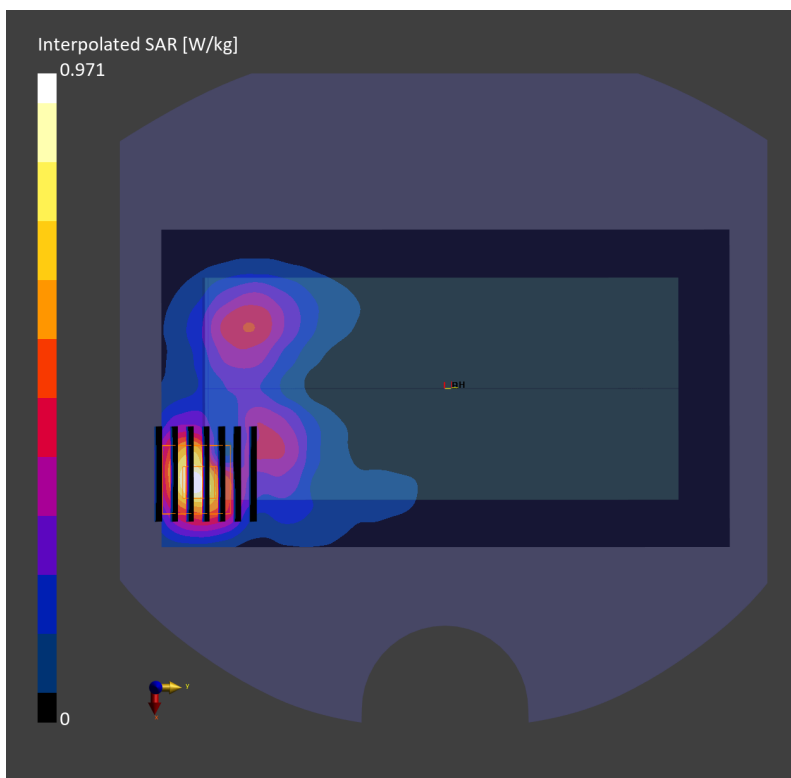

#85_FR1 n66_40M_BPSK_108_0_Front_10mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.681 W/kg; SAR (8g) = 0.395 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

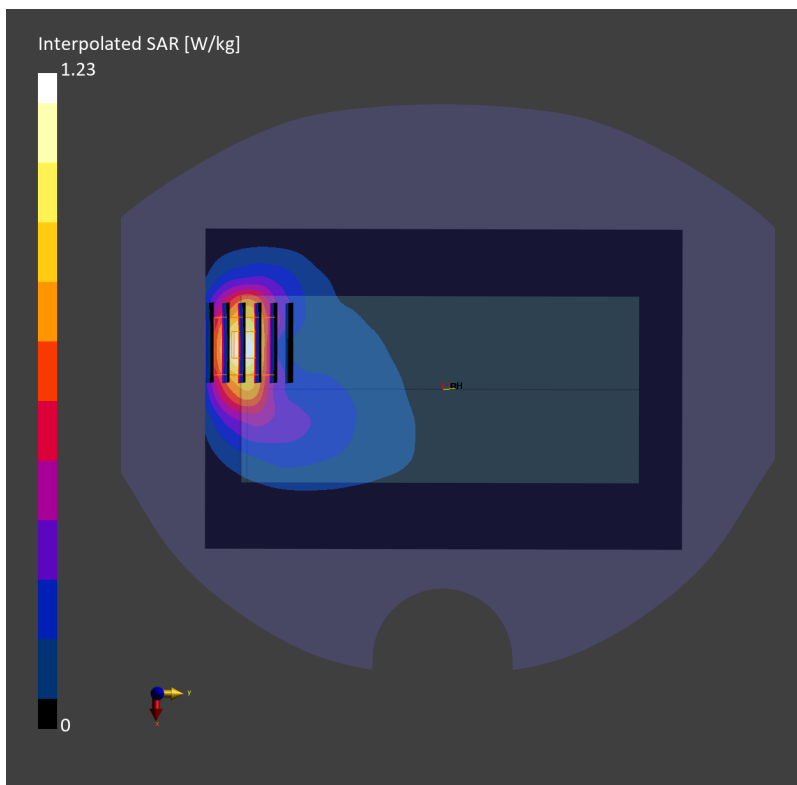

#86_FR1 n70_15M_BPSK_1_1_Front_10mm_Ch340500


Communication System: 5G NR; Frequency: 1702.500 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1702.500$ MHz; $\sigma=1.36$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.340 W/kg; SAR (10g) = 0.182 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.355 W/kg; SAR (8g) = 0.206 W/kg; SAR (10g) = 0.190 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 84.2 %

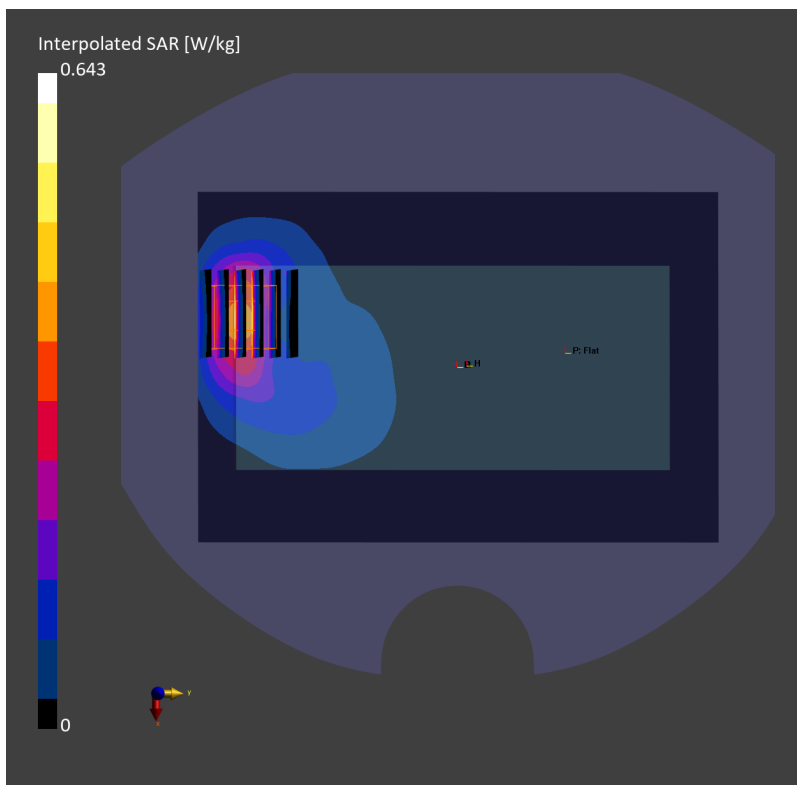

#87_FR1 n71_20M_BPSK_1_1_Back_10mm_Ch136100


Communication System: 5G NR; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=680.5$ MHz; $\sigma=0.863$ S/m; $\epsilon_r=42.1$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.392 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.392 W/kg; SAR (8g) = 0.242 W/kg; SAR (10g) = 0.227 W/kg
Smallest distance from peaks to all points 3 dB below = 14.5 mm
Ratio of SAR at M2 to SAR at M1 = 77.0 %

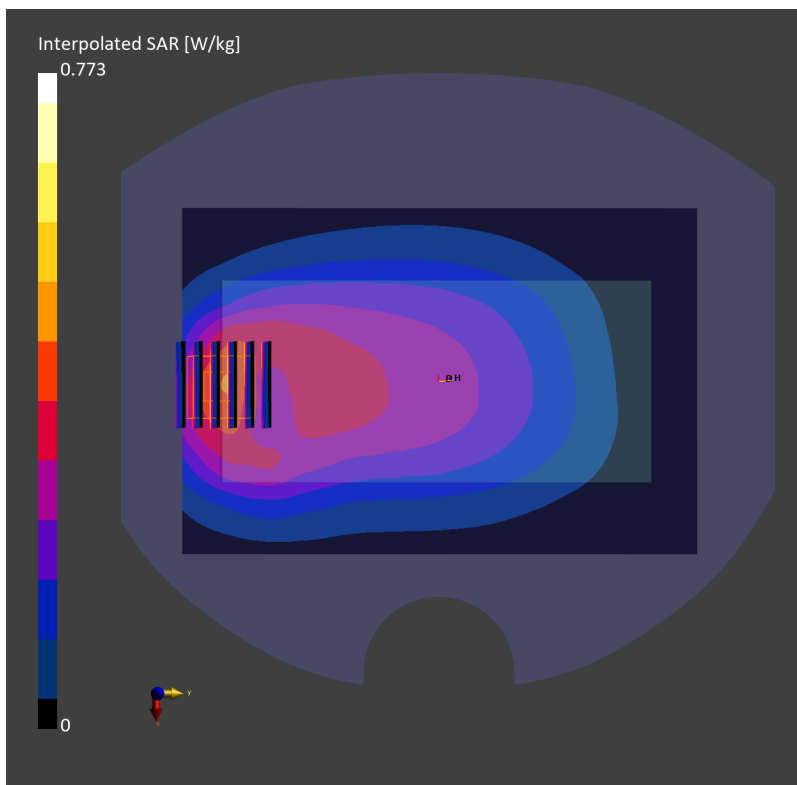

#88_FR1 n77_100M_BPSK_1_1_Front_10mm_Ch656000


Communication System: NR; Frequency: 3840.000 MHz; Duty Cycle: 1:2
Medium: HSL_3900_230603 Medium parameters used: $f=3840.000$ MHz; $\sigma=3.16$ S/m; $\epsilon_r=36.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.83, 6.5, 5.84); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.465 W/kg; SAR (10g) = 0.189 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.15 dB
SAR (1g) = 0.474 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.195 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 75.6 %

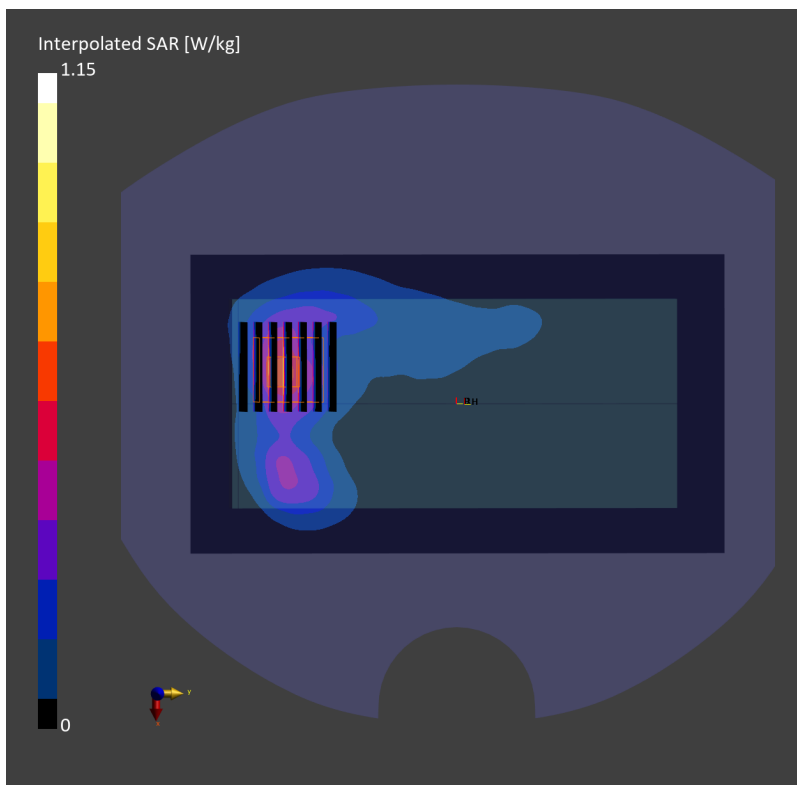

#89_GSM1900_GPRS (4 Tx slots)_Bottom Side_0mm_Ch512


Communication System: GPRS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_230521 Medium parameters used: $f=1850.2$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 3.91 W/kg; SAR (10g) = 1.76 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 4.03 W/kg; SAR (8g) = 1.93 W/kg; SAR (10g) = 1.74 W/kg
Smallest distance from peaks to all points 3 dB below = 6.3 mm
Ratio of SAR at M2 to SAR at M1 = 74.3 %

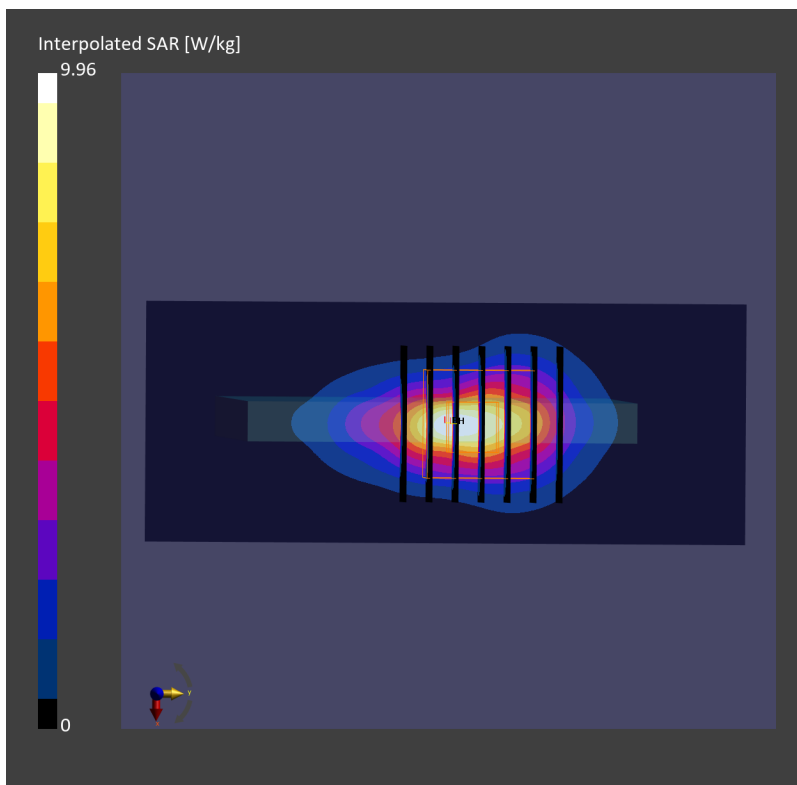

#90_LTE Band 7_20M_QPSK_1_0_Bottom Side_0mm_Ch20850


Communication System: LTE-FDD ; Frequency: 2510.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f= 2510.000$ MHz; $\sigma= 1.83$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.64 W/kg; SAR (10g) = 1.12 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 2.72 W/kg; SAR (8g) = 1.24 W/kg; SAR (10g) = 1.11 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 57.6 %

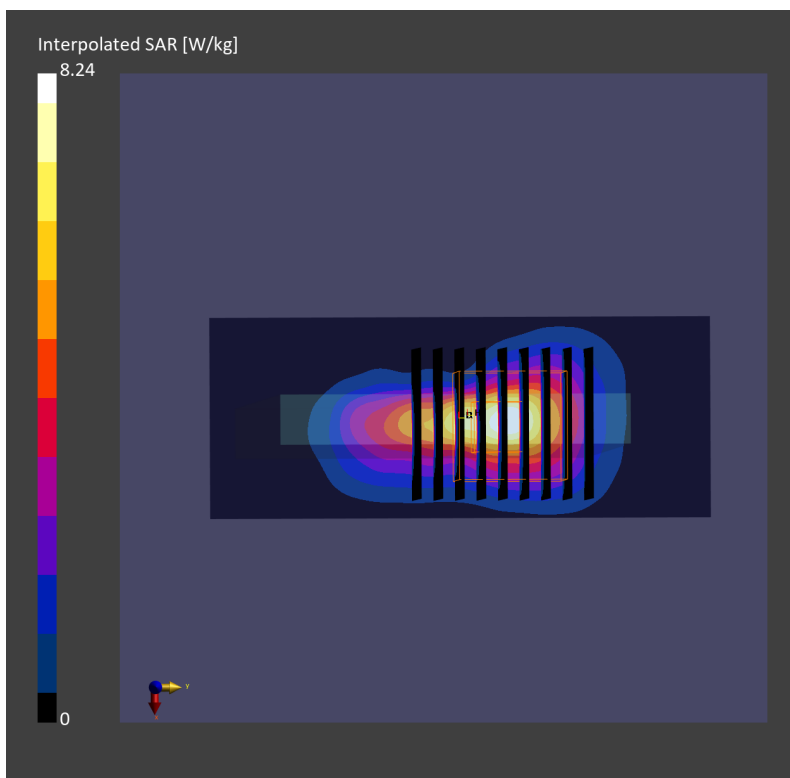

#91_LTE Band 25_20M_QPSK_1_0_Bottom Side_0mm_Ch26340


Communication System: LTE-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230521 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 4.31 W/kg; SAR (10g) = 1.97 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm
Power Drift = -0.06 dB
SAR (1g) = 4.49 W/kg; SAR (8g) = 2.16 W/kg; SAR (10g) = 1.95 W/kg
Smallest distance from peaks to all points 3 dB below = 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 74.2 %

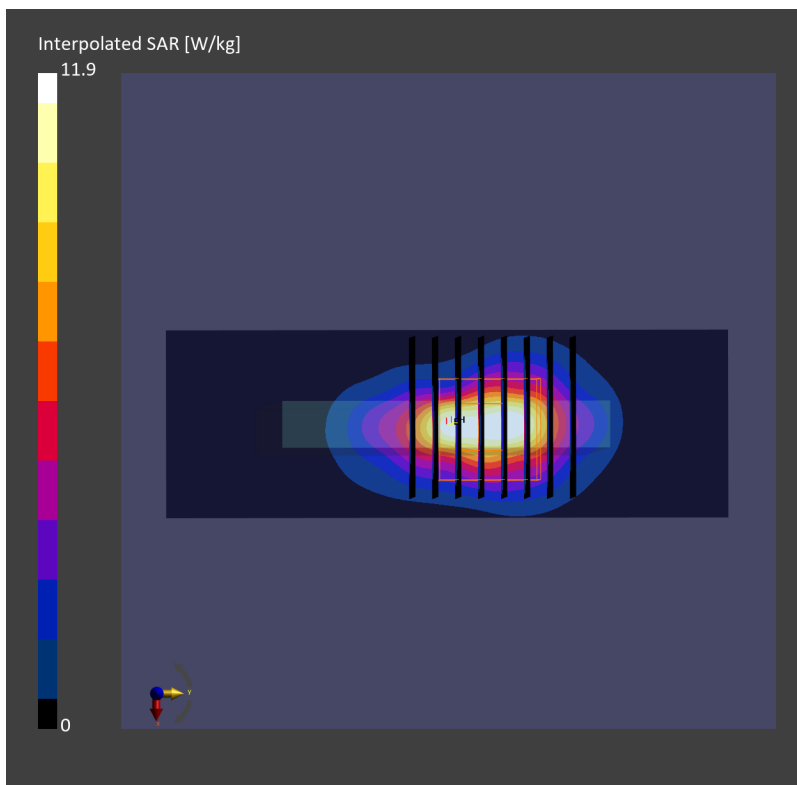

#92_LTE Band 30_10M_QPSK_1_0_Bottom Side_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.73 W/kg; SAR (10g) = 1.19 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm Power Drift =

-0.04 dB

SAR (1g) = 2.76 W/kg; SAR (8g) = 1.29 W/kg; SAR (10g) = 1.15 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

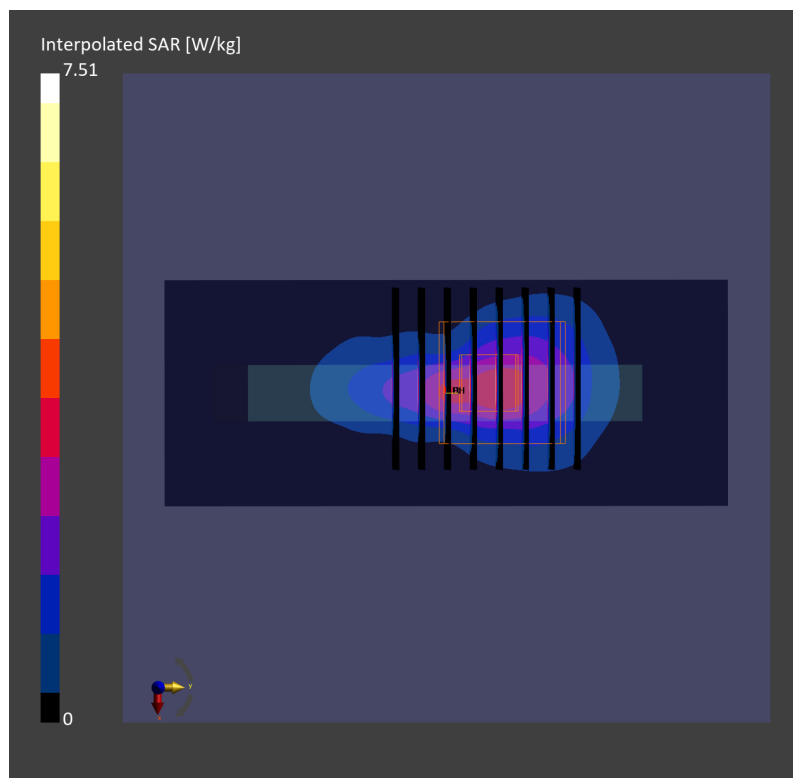

#93_LTE Band 41_20M_QPSK_1_0_Bottom Side_0mm_Ch41490


Communication System: LTE-TDD; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_230526 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 37.9$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.75 W/kg; SAR (10g) = 1.08 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 3.00 W/kg; SAR (8g) = 1.27 W/kg; SAR (10g) = 1.13 W/kg
Smallest distance from peaks to all points 3 dB below = 4.8 mm
Ratio of SAR at M2 to SAR at M1 = 72.7 %

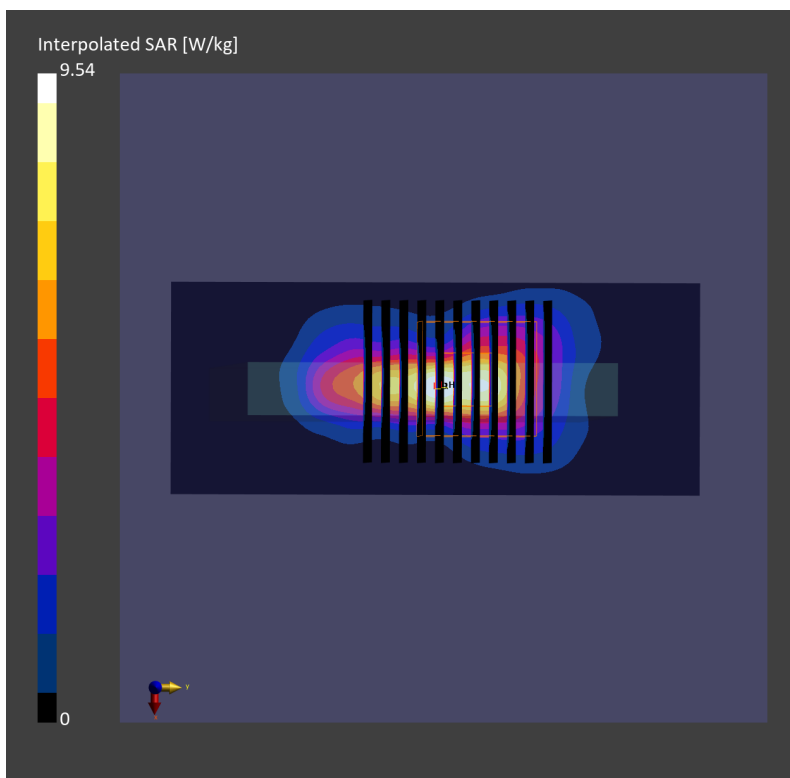

#94_LTE Band 66_20M_QPSK_1_0_Bottom Side_0mm_Ch132072


Communication System: LTE-FDD ; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230525 Medium parameters used: $f= 1720.000$ MHz; $\sigma= 1.32$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 1.81 W/kg; SAR (10g) = 0.777 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm
Power Drift = 0.00 dB
SAR (1g) = 1.79 W/kg; SAR (8g) = 0.800 W/kg; SAR (10g) = 0.717 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 70.6 %

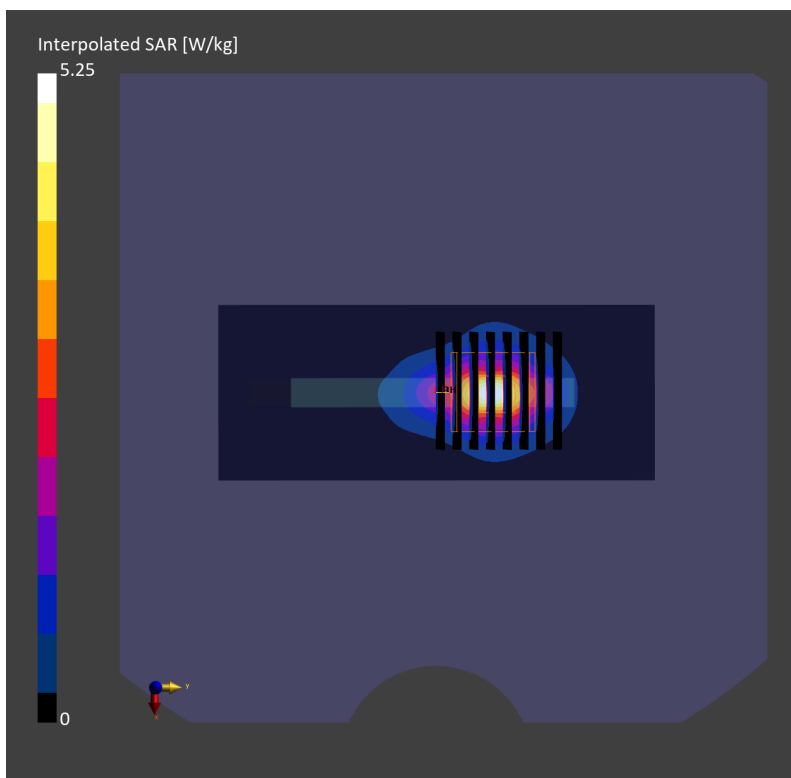

#95_FR1 n7_50M_BPSK_1_1_Bottom Side_0mm_Ch507000


Communication System: 5G NR; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230520 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 2.52 W/kg; SAR (10g) = 1.06 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm
Power Drift = 0.01 dB
SAR (1g) = 2.59 W/kg; SAR (8g) = 1.07 W/kg; SAR (10g) = 0.932 W/kg
Smallest distance from peaks to all points 3 dB below = 4.5 mm
Ratio of SAR at M2 to SAR at M1 = 60.7 %

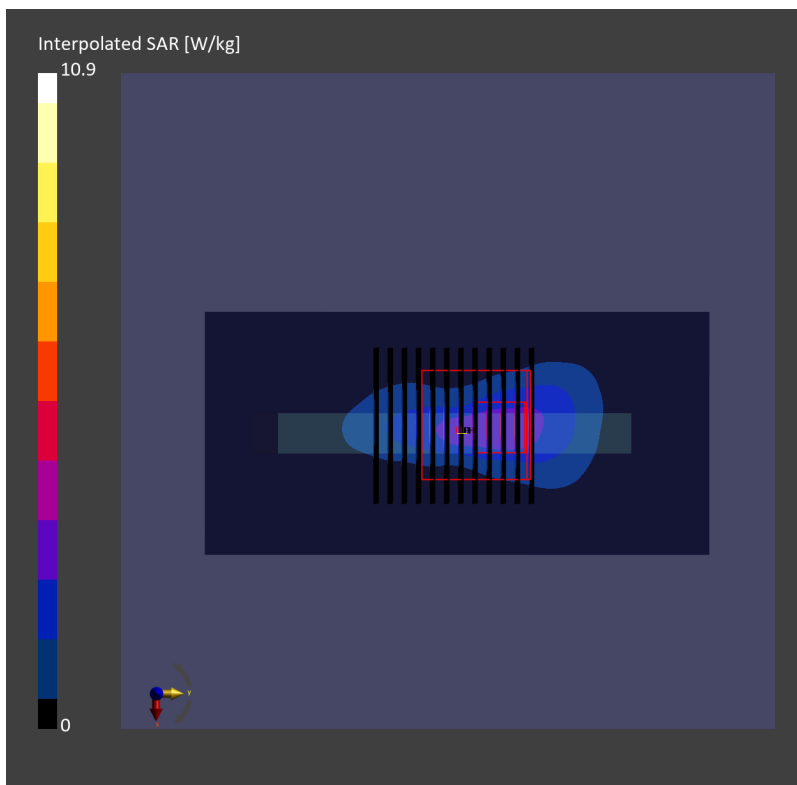

#96_FR1 n30_10M_BPSK_1_26_Bottom Side_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230519 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.62$ S/m; $\epsilon_r=39.18$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.88, 7.66, 6.92); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 2.25 W/kg; SAR (10g) = 0.960 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm Power

Drift = -0.02 dB

SAR (1g) = 2.21 W/kg; SAR (8g) = 1.01 W/kg; SAR (10g) = 0.903 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

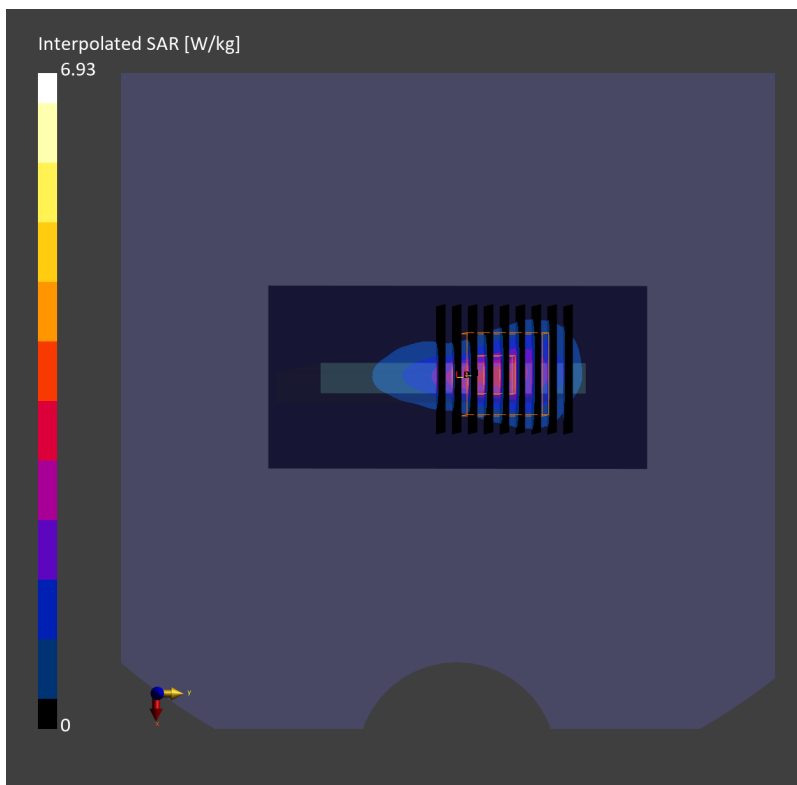

#97_FR1 n66_40M_BPSK_108_0_Bottom Side_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.73 W/kg; SAR (10g) = 0.795 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 1.69 W/kg; SAR (8g) = 0.782 W/kg; SAR (10g) = 0.702 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

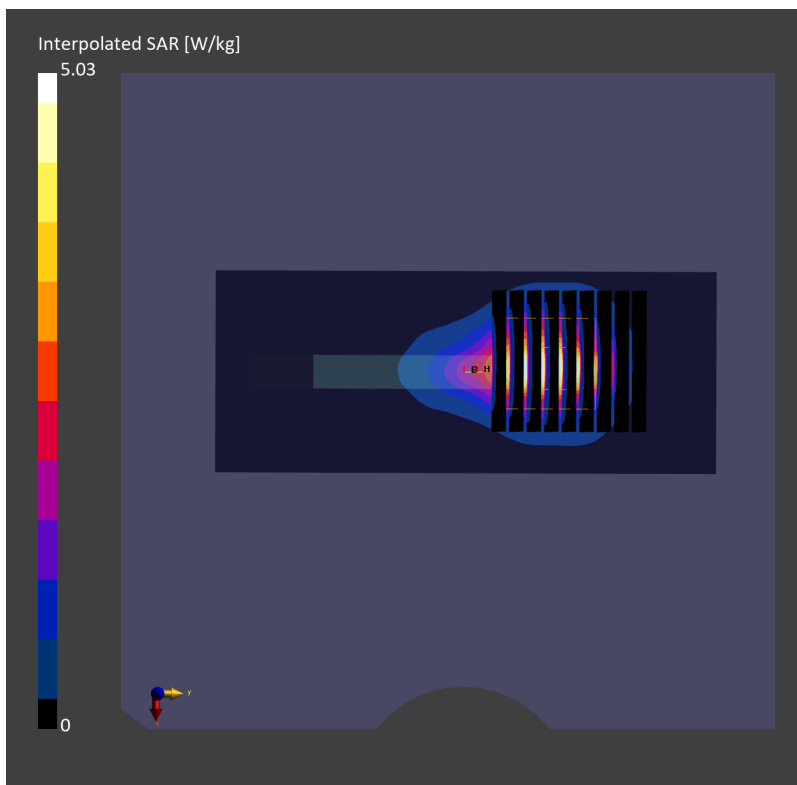

#98_WLAN2.4GHz_802.11b 1Mbps_Left Tilted_0mm_Ch12


Communication System: 802.11b; Frequency: 2467.000 MHz; Duty Cycle: 1:1.010
Medium: HSL_2450_230605 Medium parameters used: $f= 2467.000$ MHz; $\sigma= 1.83$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.682 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.728 W/kg; SAR (8g) = 0.315 W/kg; SAR (10g) = 0.279 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 76.7 %

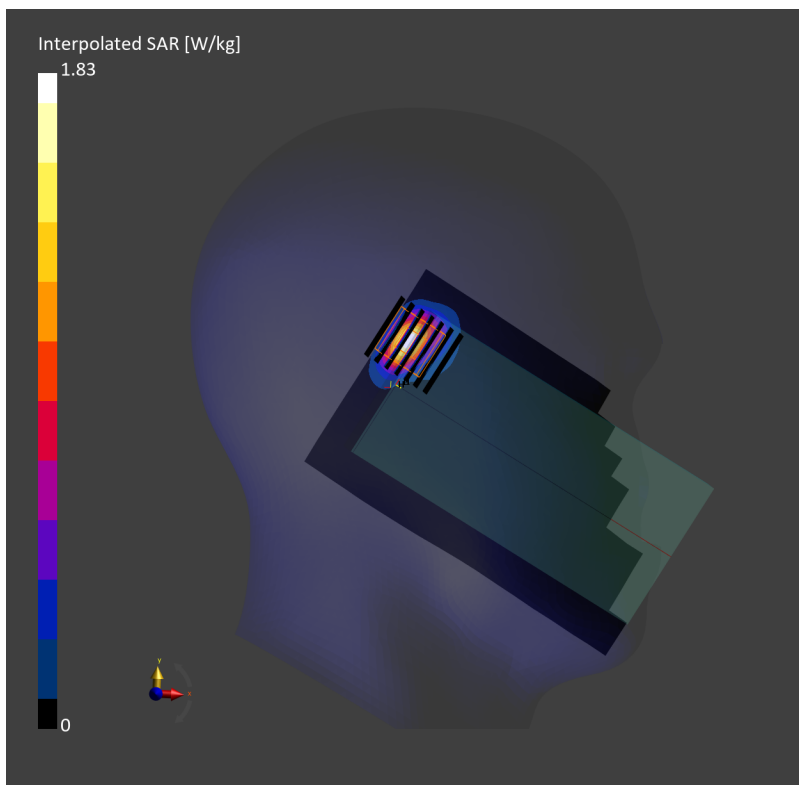

#99_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch50

Communication System: 802.11ac; Frequency: 5250.000 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230607 Medium parameters used: $f= 5250.000$ MHz; $\sigma= 4.57$ S/m; $\epsilon_r = 35.8$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.28, 5.28, 5.28); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10456-AAD

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.475 W/kg; SAR (10g) = 0.158 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.204 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.1 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.174 W/kg; SAR (8g) = 0.073 W/kg; SAR (10g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.1 %

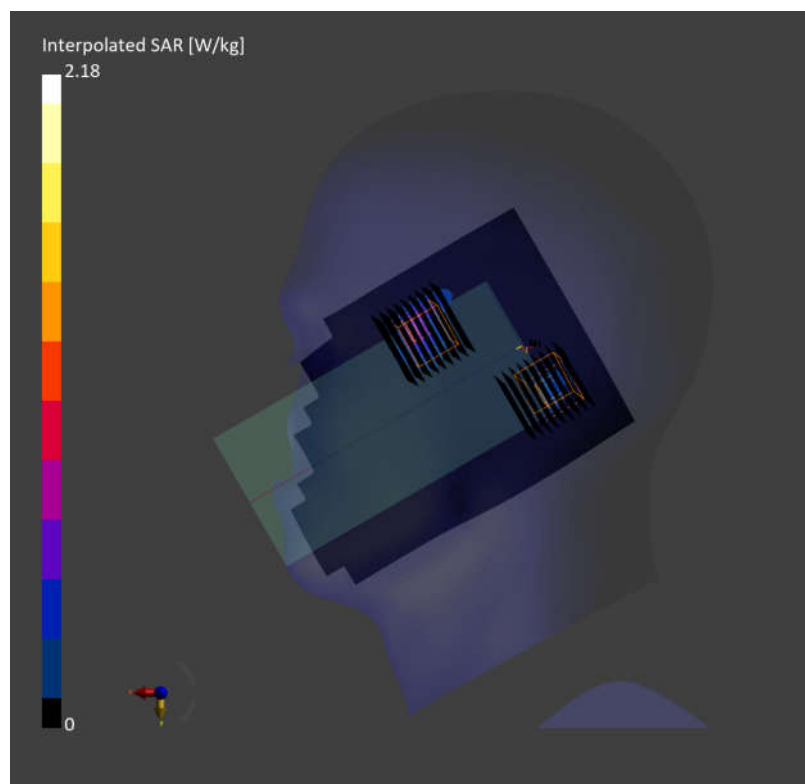

#100_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch114

Communication System: 802.11ac; Frequency: 5570.000 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230607 Medium parameters used: $f= 5570.000$ MHz; $\sigma= 4.92$ S/m; $\epsilon_r = 35.0$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.66, 4.66, 4.66); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10456-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.515 W/kg; SAR (10g) = 0.162 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.572 W/kg; SAR (8g) = 0.199 W/kg; SAR (10g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.4 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.206 W/kg; SAR (8g) = 0.087 W/kg; SAR (10g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 67.4 %

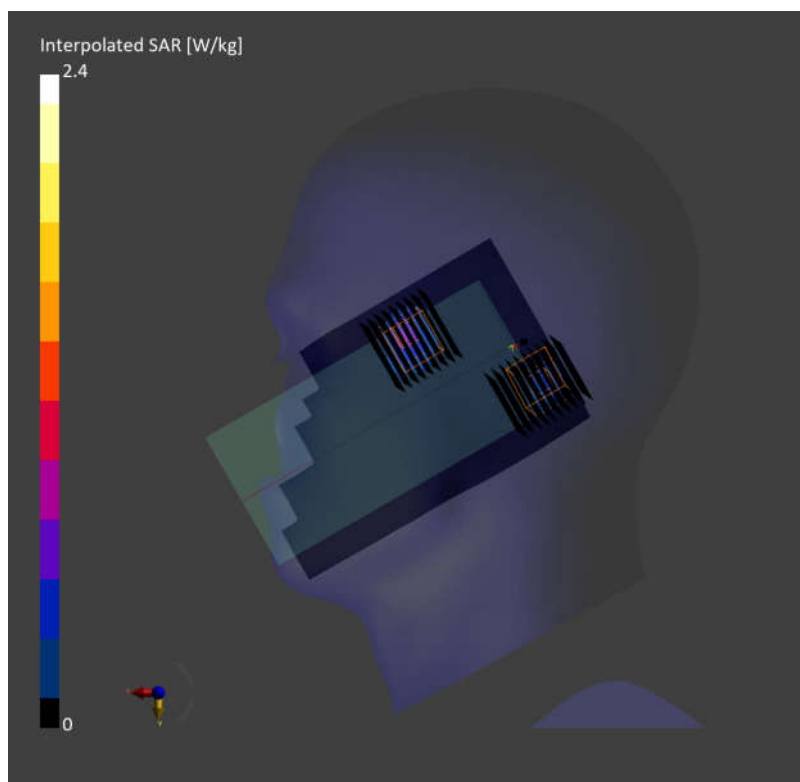

#101_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1.088
Medium: HSL_5G_230607 Medium parameters used: $f=5775.000$ MHz; $\sigma=5.13$ S/m; $\epsilon_r=35.1$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.86, 4.86, 4.86); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10402-AAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.197 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.726 W/kg; SAR (8g) = 0.240 W/kg; SAR (10g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.1 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.236 W/kg; SAR (8g) = 0.094 W/kg; SAR (10g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.1 %

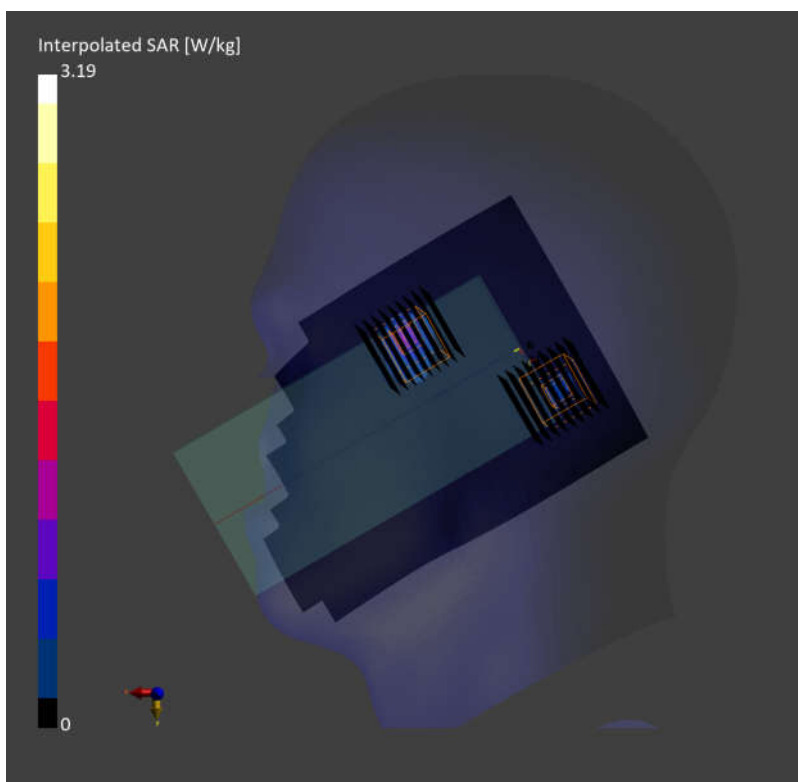

#102_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch163

Communication System: 802.11ac ; Frequency: 5815.000 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230525 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.29$ S/m; $\epsilon_r = 34.5$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: CW, 10554-AAE

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.694 W/kg; SAR (10g) = 0.227 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.17 dB
SAR (1g) = 0.824 W/kg; SAR (8g) = 0.285 W/kg; SAR (10g) = 0.249 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.9 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.17 dB
SAR (1g) = 0.314 W/kg; SAR (8g) = 0.128 W/kg; SAR (10g) = 0.112 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.9 %

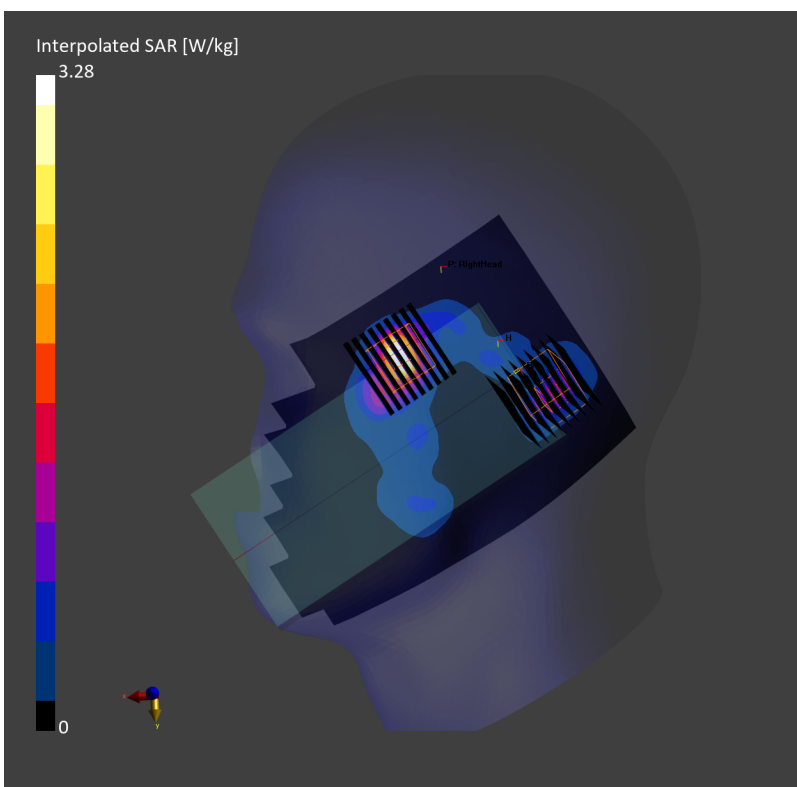

#103_WLAN6GHz_802.11ax-HE160 MCS0_Right Cheek_0mm_Ch15

Communication System: 802.11ax ; Frequency: 6025.000 MHz; Duty Cycle: 1:1.159
Medium: HSL_6G_230515 Medium parameters used: $f= 6025.000$ MHz; $\sigma= 5.58$ S/m; $\epsilon_r = 35.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10554-AAE

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.258 W/kg; SAR (10g) = 0.075 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.366 W/kg; SAR (8g) = 0.116 W/kg; SAR (10g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.0 %

psAPD (1.0cm², sq) = 3.66 [W/m²]; psAPD (4.0cm², sq) = 2.33 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.094 W/kg; SAR (8g) = 0.034 W/kg; SAR (10g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.0 %

psAPD (1.0cm², sq) = 0.941 [W/m²]; psAPD (4.0cm², sq) = 0.690 [W/m²]

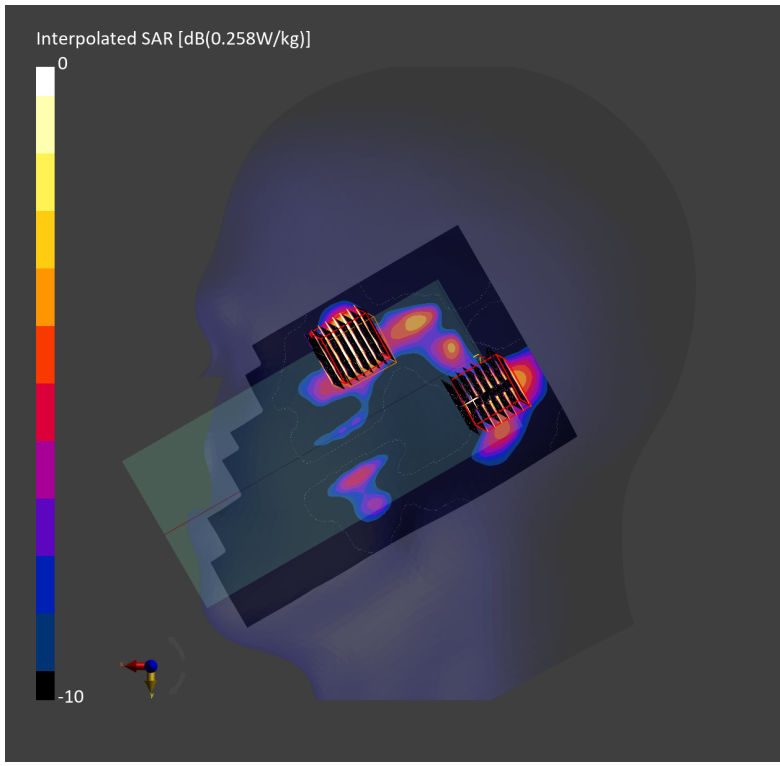

#104_Bluetooth_1Mbps_Left Tilted_0mm_Ch39

Communication System: Bluetooth ; Frequency: 2441.000 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_230605 Medium parameters used: $f= 2441.000$ MHz; $\sigma= 1.80$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.346 W/kg; SAR (10g) = 0.131 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.391 W/kg; SAR (8g) = 0.166 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

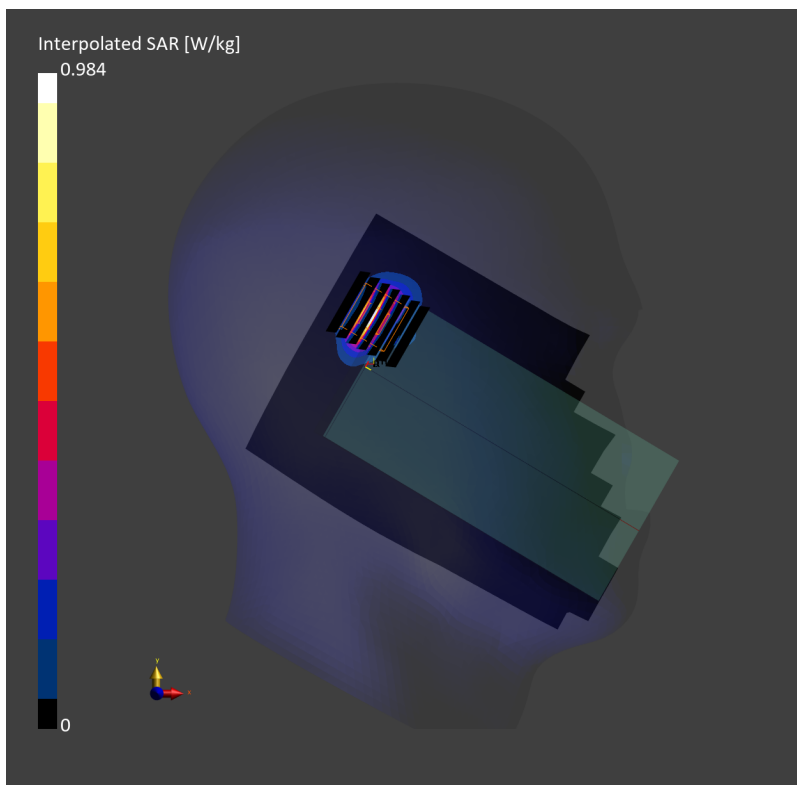

#105_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch12


Communication System: 802.11b; Frequency: 2467.000 MHz; Duty Cycle: 1:1.010
Medium: HSL_2450_230605 Medium parameters used: $f=2467.000$ MHz; $\sigma=1.83$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.627 W/kg; SAR (10g) = 0.273 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.666 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.295 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.0 %

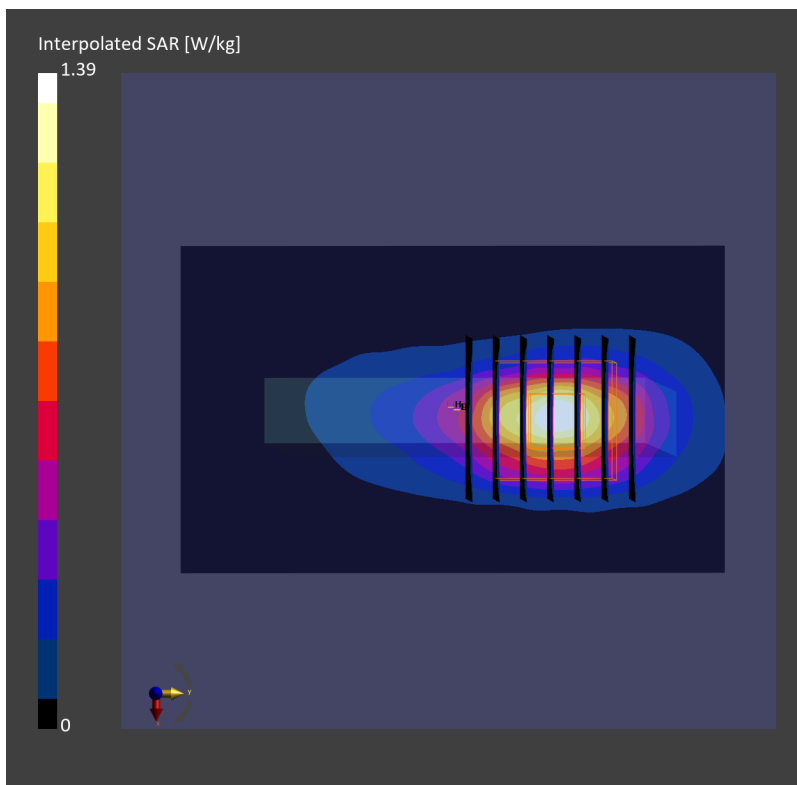

#106_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_10mm_Ch42


Communication System: 802.11ac ; Frequency: 5210.000 MHz; Duty Cycle: 1:1.088
Medium: HSL_5G_230605 Medium parameters used: $f= 5210.000$ MHz; $\sigma= 4.61$ S/m; $\epsilon_r = 35.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.28, 5.28, 5.28); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.245 W/kg; SAR (10g) = 0.096 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.10 dB
SAR (1g) = 0.163 W/kg; SAR (8g) = 0.085 W/kg; SAR (10g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.1 %

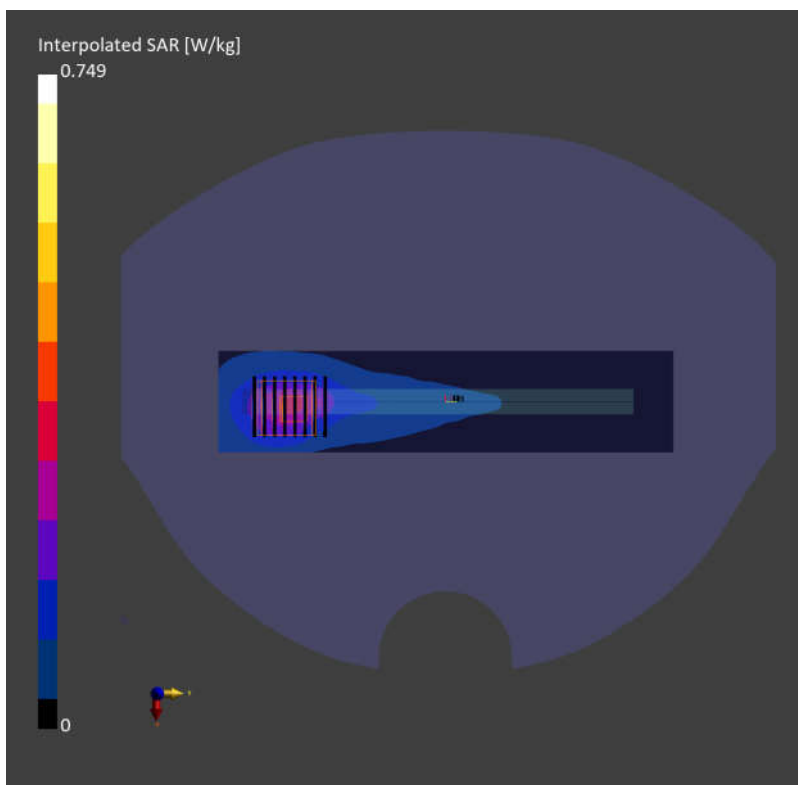

#107_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1.139
Medium: HSL_5G_230530 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 36.2$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.81, 4.81, 4.81); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.576 W/kg; SAR (10g) = 0.217 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.167 W/kg; SAR (8g) = 0.071 W/kg; SAR (10g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB


SAR (1g) = 0.380 W/kg; SAR (8g) = 0.192 W/kg; SAR (10g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

Interpolated SAR [dB(0.576W/kg)]

0

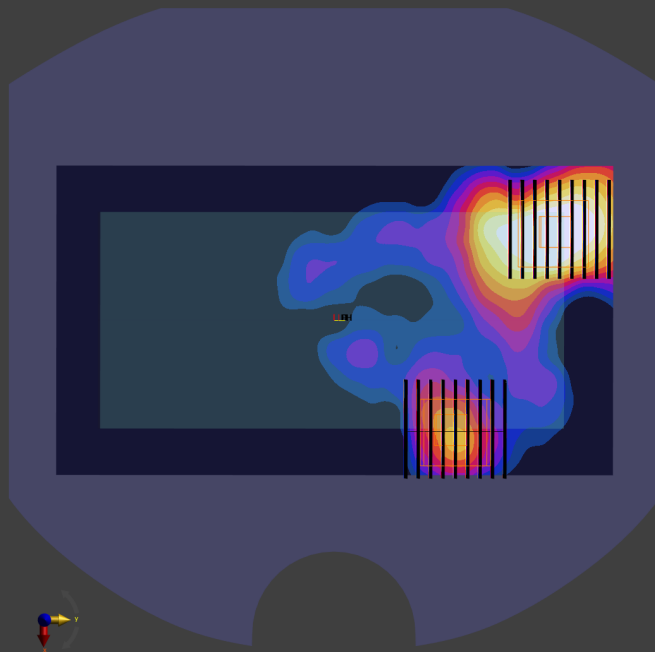

-10

#108_Bluetooth_1Mbps_Top Side_10mm_Ch78


Communication System: Bluetooth; Frequency: 2480.000 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_230605 Medium parameters used: $f=2480.000$ MHz; $\sigma=1.85$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.342 W/kg; SAR (10g) = 0.155 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.363 W/kg; SAR (8g) = 0.180 W/kg; SAR (10g) = 0.163 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

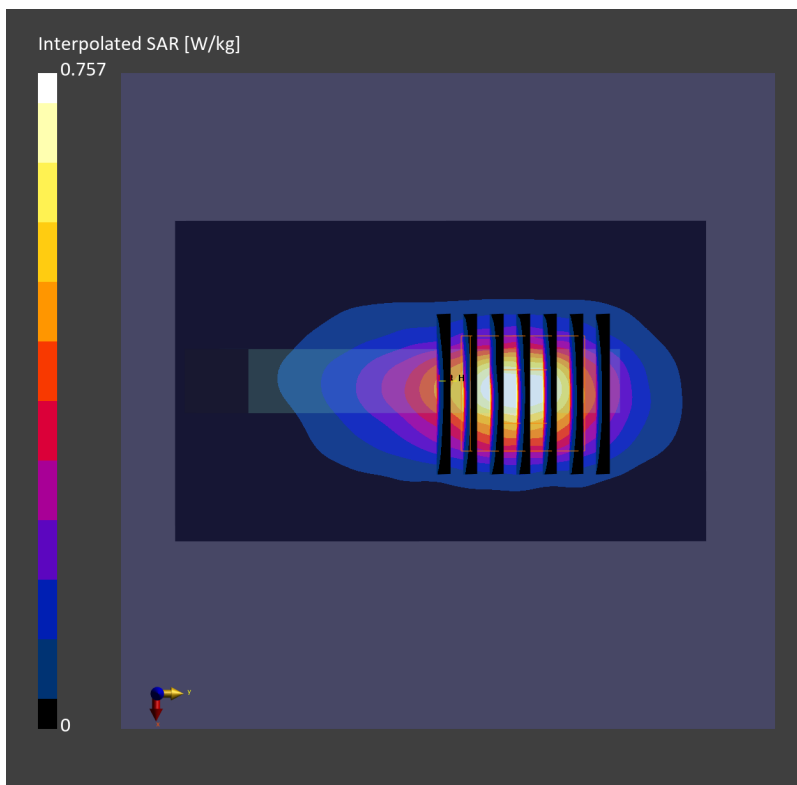

#109_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11


Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.01
Medium: HSL_2450_230605 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.868 W/kg; SAR (10g) = 0.388 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.934 W/kg; SAR (8g) = 0.481 W/kg; SAR (10g) = 0.437 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 80.5 %

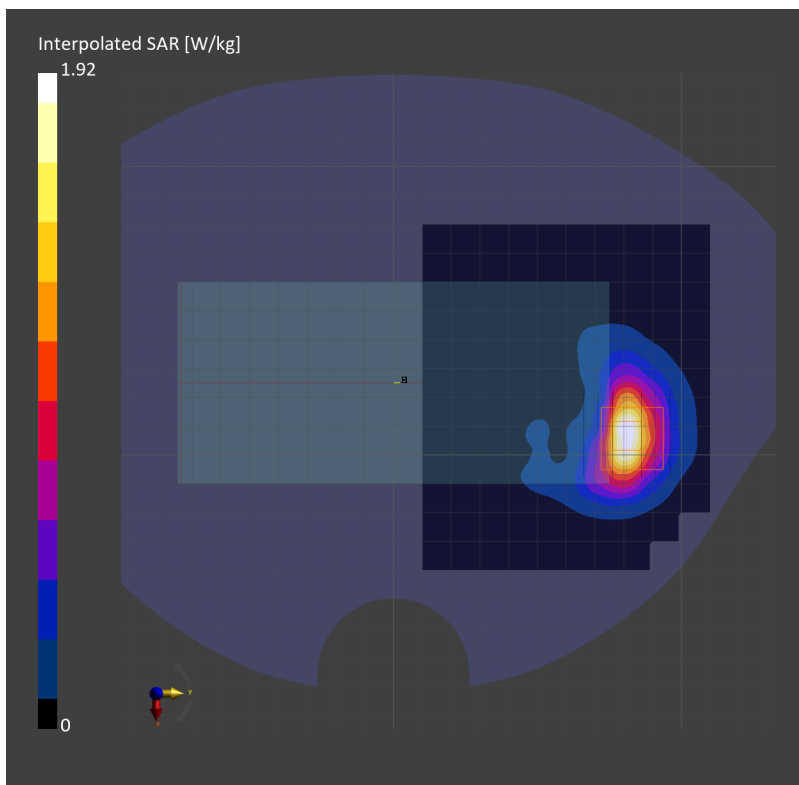

#110_WLAN5GHz_802.11n-HT40 MCS0_Front_10mm_Ch54

Communication System: 802.11n; Frequency: 5270.000 MHz; Duty Cycle: 1:1.033
Medium: HSL_5G_230530 Medium parameters used: $f= 5270.000$ MHz; $\sigma= 4.74$ S/m; $\epsilon_r = 36.9$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.13, 5.13, 5.13); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.334 W/kg; SAR (10g) = 0.127 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.359 W/kg; SAR (8g) = 0.158 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB


SAR (1g) = 0.306 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

Interpolated SAR [dB(0.334W/kg)]

0

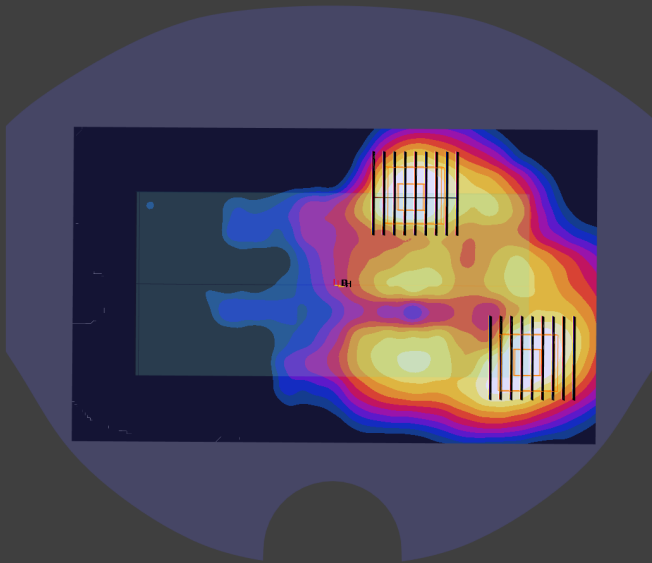

-10

#111_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch138

Communication System: 802.11ac WiFi; Frequency: 5690.000 MHz; Duty Cycle: 1:1.088
Medium: HSL_5750_230605 Medium parameters used: $f= 5690.000$ MHz; $\sigma= 5.15$ S/m; $\epsilon_r = 35.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.86, 4.86, 4.86); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.424 W/kg; SAR (10g) = 0.162 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.173 W/kg; SAR (8g) = 0.069 W/kg; SAR (10g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.467 W/kg; SAR (10g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %

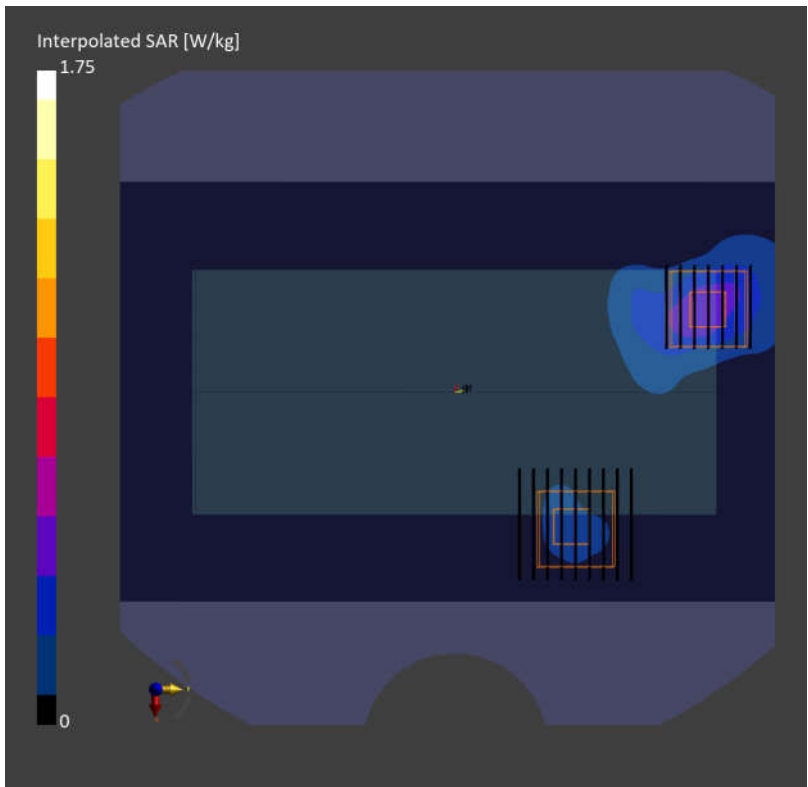

#112_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: 802.11ac WiFi; Frequency: 5775 MHz; Duty Cycle: 1:1.139
Medium: HSL_5750_230605 Medium parameters used: $f= 5775$ MHz; $\sigma= 5.17$ S/m; $\epsilon_r = 35.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.86, 4.86, 4.86); Calibrated: 2022-11-15
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn316; Calibrated: 2023-01-23
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1489-Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.538 W/kg; SAR (10g) = 0.202 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.202 W/kg; SAR (8g) = 0.078 W/kg; SAR (10g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 59.3 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.464 W/kg; SAR (8g) = 0.188 W/kg; SAR (10g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 59.3 %

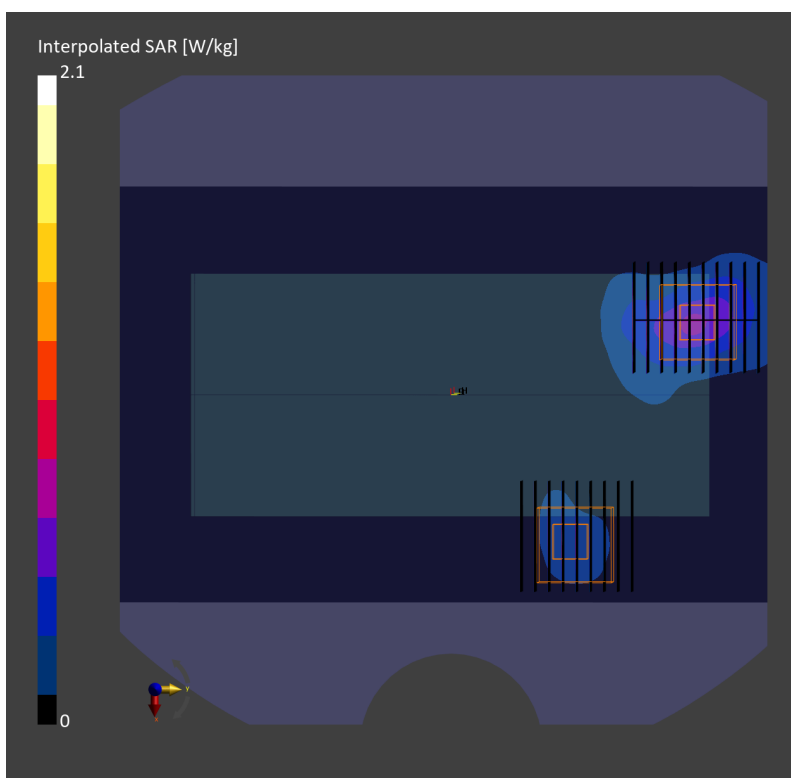

#113_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch177

Communication System: 802.11a; Frequency: 5885 MHz; Duty Cycle: 1:1.070

Medium: HSL_5G_230602 Medium parameters used: $f = 5885$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.81, 4.81, 4.81); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.632 W/kg; SAR (10g) = 0.237 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.356 W/kg; SAR (8g) = 0.144 W/kg; SAR (10g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.670 W/kg; SAR (8g) = 0.289 W/kg; SAR (10g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

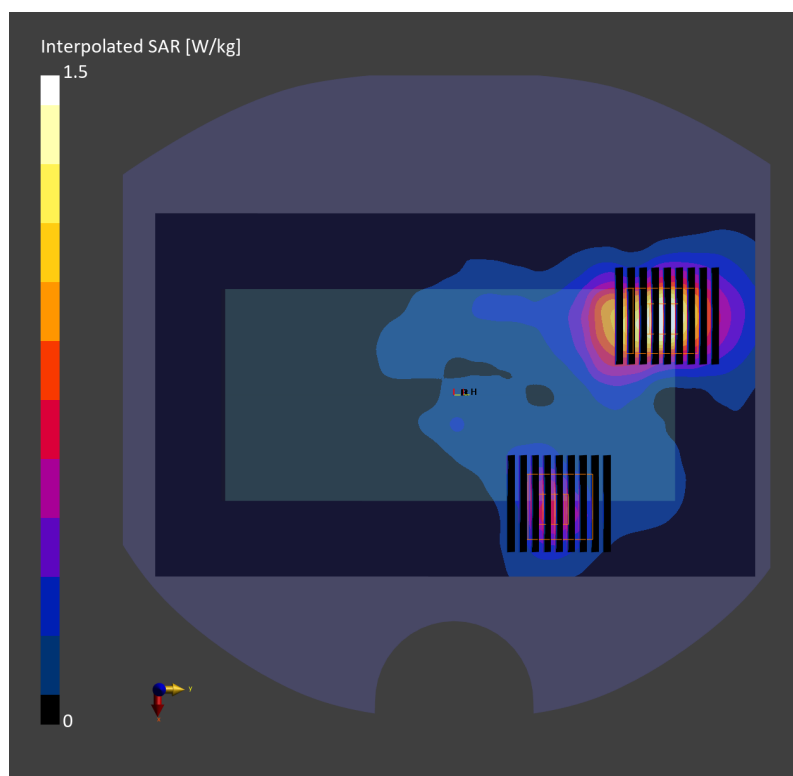

#114_WLAN6GHz_802.11ax-HE160 MCS0_Back_10mm_Ch111

Communication System: 802.11ax ; Frequency: 6505.000 MHz; Duty Cycle: 1:1.159
Medium: HSL_6G_230515 Medium parameters used: $f=6505.000$ MHz; $\sigma=6.15$ S/m; $\epsilon_r=34.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10743-AAC

Area Scan (119.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.083 W/kg; SAR (10g) = 0.028 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.098 W/kg; SAR (8g) = 0.038 W/kg; SAR (10g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.3 %

psAPD (1.0cm², sq) = 0.984 [W/m²]; psAPD (4.0cm², sq) = 0.612 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.042 W/kg; SAR (8g) = 0.015 W/kg; SAR (10g) = 0.013 W/kg


Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.3 %

psAPD (1.0cm², sq) = 0.418 [W/m²]; psAPD (4.0cm², sq) = 0.302 [W/m²]

Interpolated SAR [dB(0.113W/kg)]

0

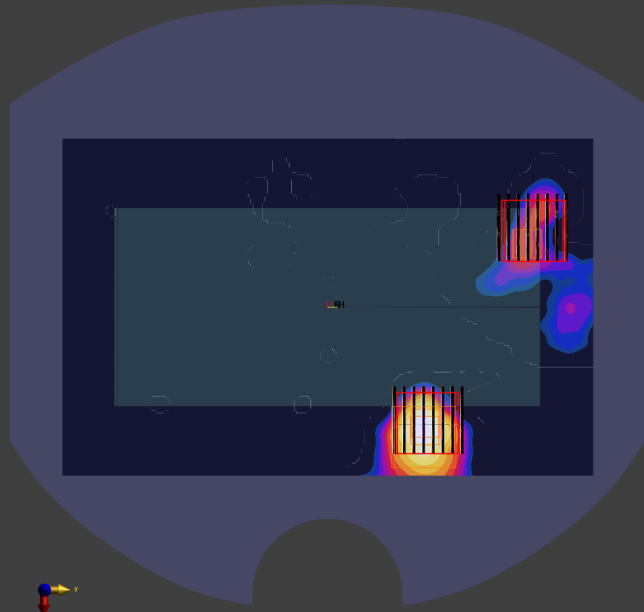

-10

#115_Bluetooth_1Mbps_Front_10mm_Ch0

Communication System: Bluetooth; Frequency: 2402.000 MHz; Duty Cycle: 1:1.301
Medium: HSL_2450_230531 Medium parameters used: $f=2402.000$ MHz; $\sigma=1.77$ S/m; $\epsilon_r=39.4$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.502 W/kg; SAR (10g) = 0.225 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.18 dB
SAR (1g) = 0.514 W/kg; SAR (8g) = 0.263 W/kg; SAR (10g) = 0.238 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.8 %

