

#01_GSM850_GPRS (4 Tx slots)_Right Cheek_0mm_Ch251


Communication System: GPRS; Frequency: 848.800 MHz; Duty Cycle: 1:2.08
Medium: HSL_850_230519 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.834 W/kg; SAR (10g) = 0.557 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.646 W/kg; SAR (8g) = 0.467 W/kg; SAR (10g) = 0.445 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.8 %

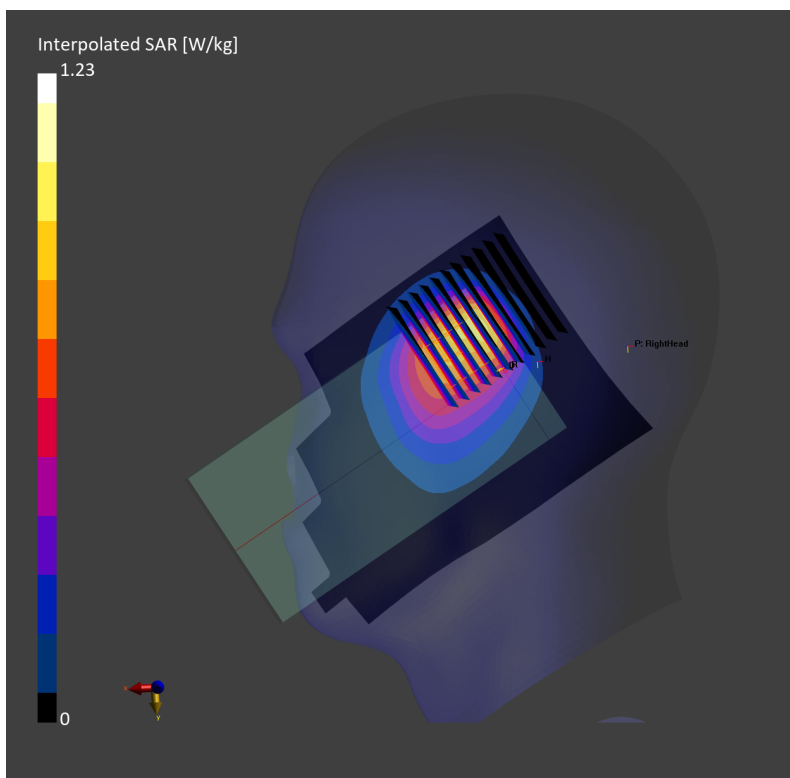

#02_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch810


Communication System: GPRS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_230506 Medium parameters used: $f=1909.8$ MHz; $\sigma=1.45$ S/m; $\epsilon_r=40.8$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.408 W/kg; SAR (10g) = 0.233 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.437 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.266 W/kg
Smallest distance from peaks to all points 3 dB below = 11.9 mm
Ratio of SAR at M2 to SAR at M1 = 88.7 %

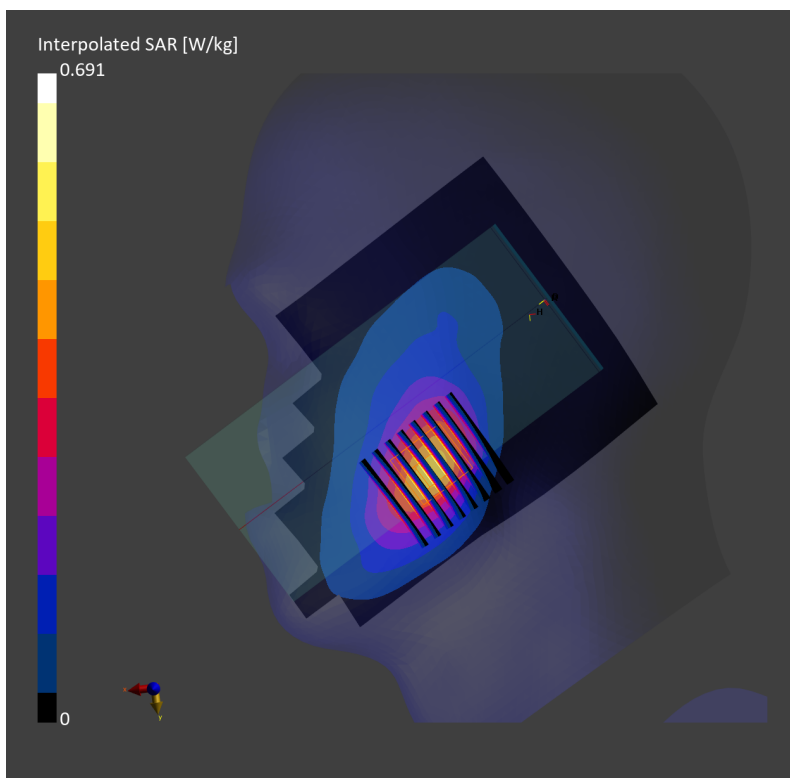

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9538


Communication System: WCDMA; Frequency: 1907.600 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230517 Medium parameters used: $f=1907.600$ MHz; $\sigma=1.46$ S/m; $\epsilon_r=38.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.695 W/kg; SAR (10g) = 0.403 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.745 W/kg; SAR (8g) = 0.484 W/kg; SAR (10g) = 0.454 W/kg
Smallest distance from peaks to all points 3 dB below = 14.9 mm
Ratio of SAR at M2 to SAR at M1 = 89.0 %

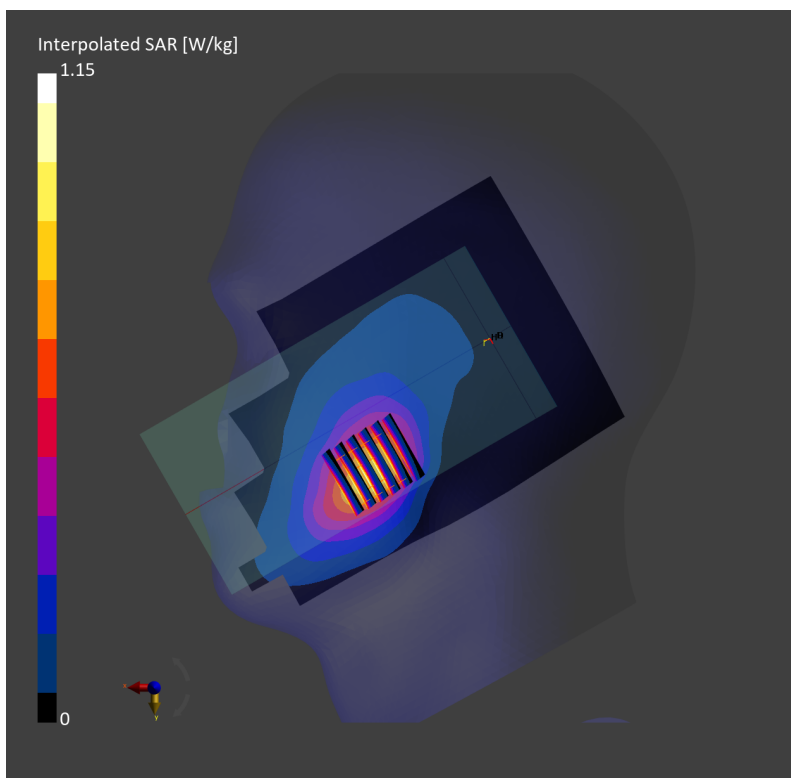

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513


Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230506 Medium parameters used: $f= 1752.6$ MHz; $\sigma= 1.38$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.488 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.19 dB
SAR (1g) = 0.517 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.327 W/kg
Smallest distance from peaks to all points 3 dB below = 13.4 mm
Ratio of SAR at M2 to SAR at M1 = 87.7 %

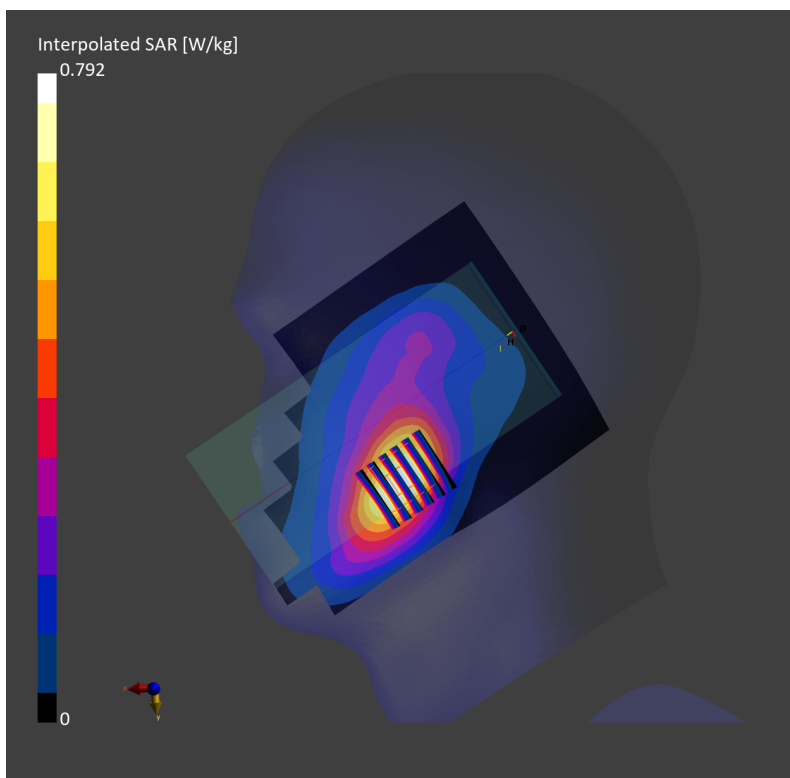

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4132


Communication System: WCDMA; Frequency: 826.400 MHz; Duty Cycle: 1:1
Medium: HSL_850_230519 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.409 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.403 W/kg; SAR (8g) = 0.260 W/kg; SAR (10g) = 0.247 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 69.5 %

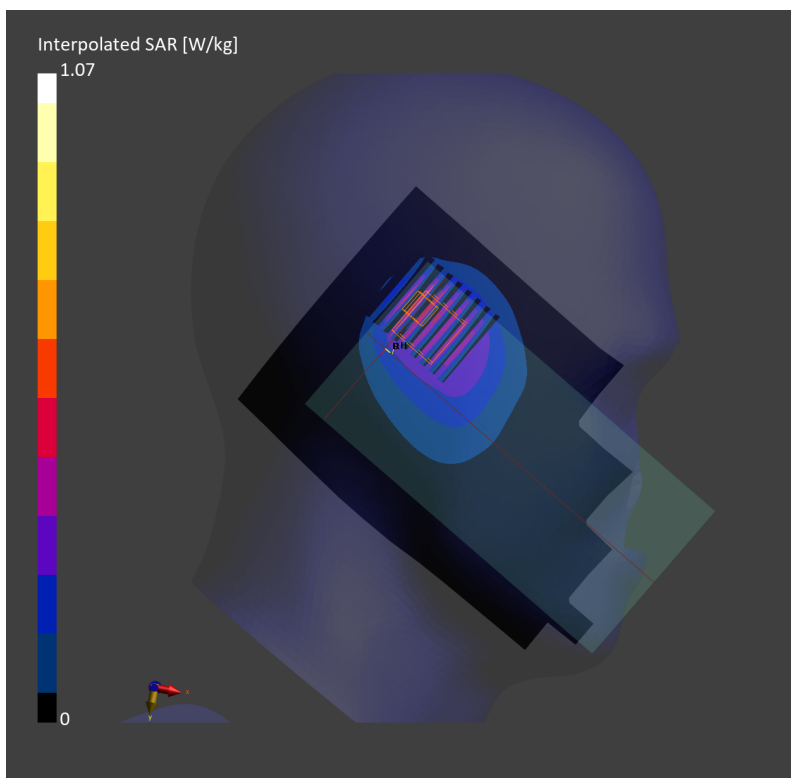

#06_LTE Band 2_20M_QPSK_1_0_Right Tilted_Ch19100


Communication System: LTE-FDD; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230603 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.638 W/kg; SAR (10g) = 0.332 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm
Power Drift = -0.07 dB
SAR (1g) = 0.773 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.323 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 81.6 %

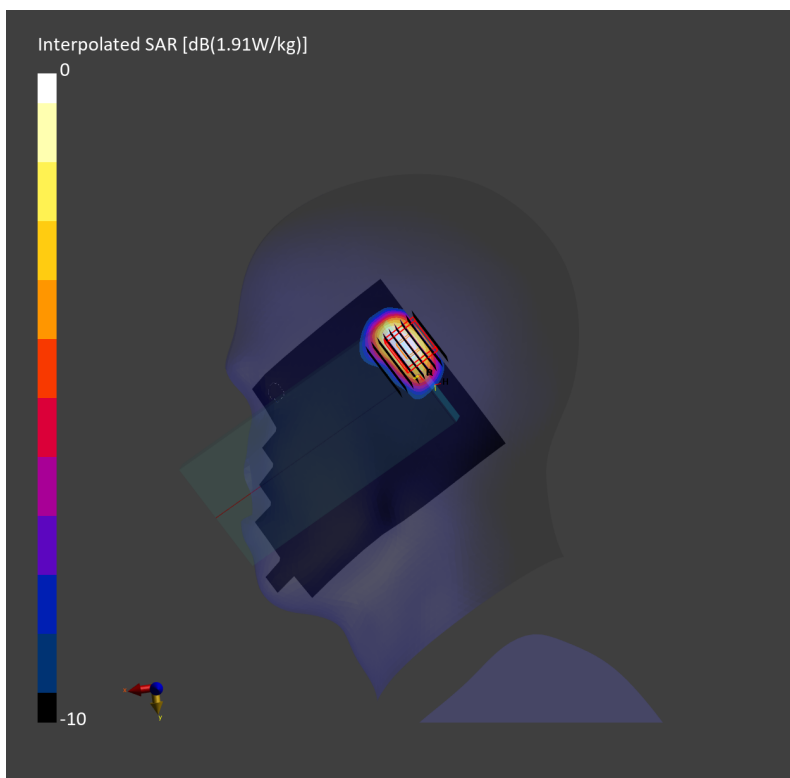

#07_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.315 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.635 W/kg; SAR (8g) = 0.376 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

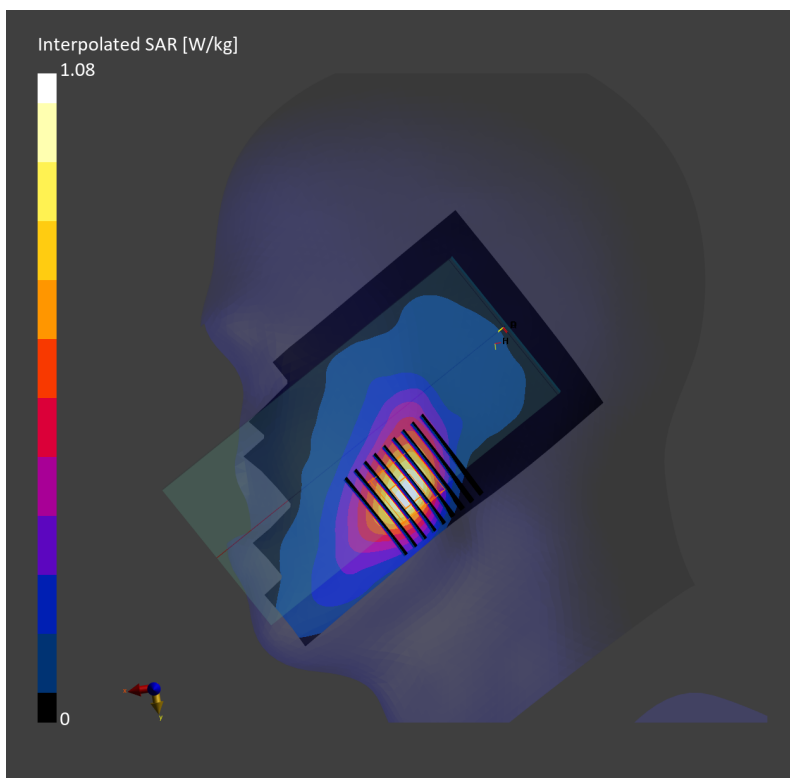

#08_LTE Band 12_10M_QPSK_1_0_Right Tilted_0mm_Ch23095

Communication System: LTE; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230518 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 42.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.426 W/kg; SAR (10g) = 0.278 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm Power

Drift = -0.05 dB

SAR (1g) = 0.511 W/kg; SAR (8g) = 0.294 W/kg; SAR (10g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

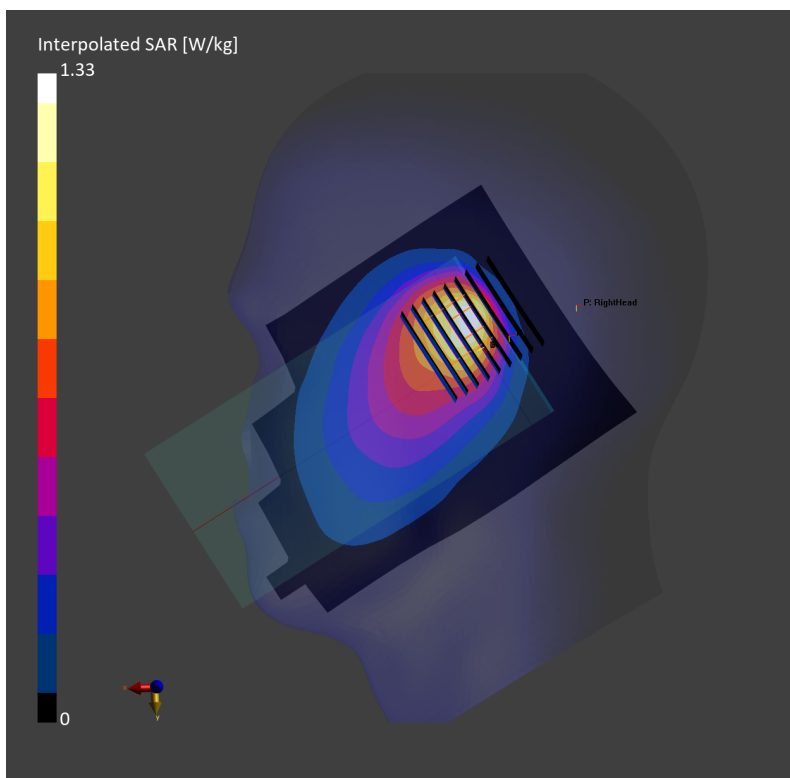

#09_LTE Band 13_10M_QPSK_1_0_Right Check_0mm_Ch23230

Communication System: LTE; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_230518 Medium parameters used: $f=782.000$ MHz; $\sigma=0.892$ S/m; $\epsilon_r=42.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.667 W/kg; SAR (10g) = 0.414 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.664 W/kg; SAR (8g) = 0.477 W/kg; SAR (10g) = 0.454 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

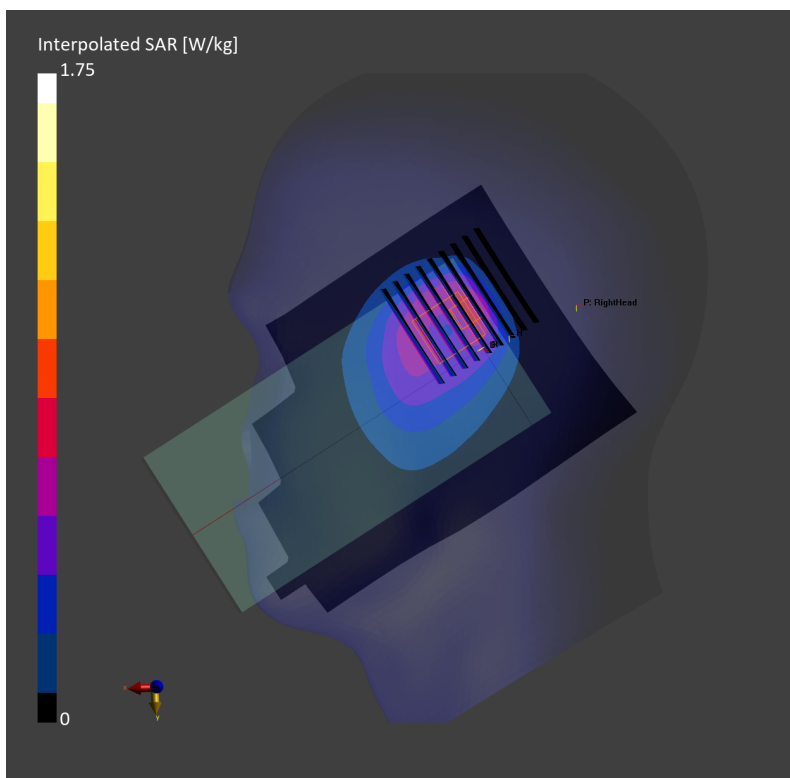

#10_LTE Band 14_10M_QPSK_1_0_Right Check_0mm_Ch23330

Communication System: LTE; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_230518 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.391 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.564 W/kg; SAR (8g) = 0.372 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.7 %

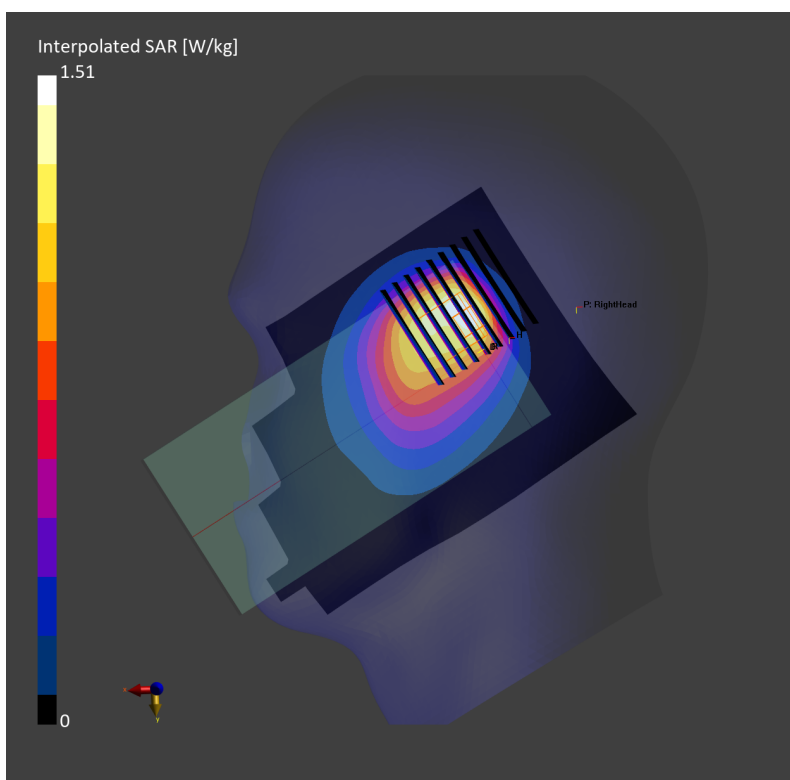

#11_LTE Band 25_20M_QPSK_1_0_Right Cheek_0mm_Ch26590

Communication System: LTE; Frequency: 1905.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230517 Medium parameters used: $f=1905.000$ MHz; $\sigma=1.45$ S/m; $\epsilon_r=38.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.402 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.755 W/kg; SAR (8g) = 0.492 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

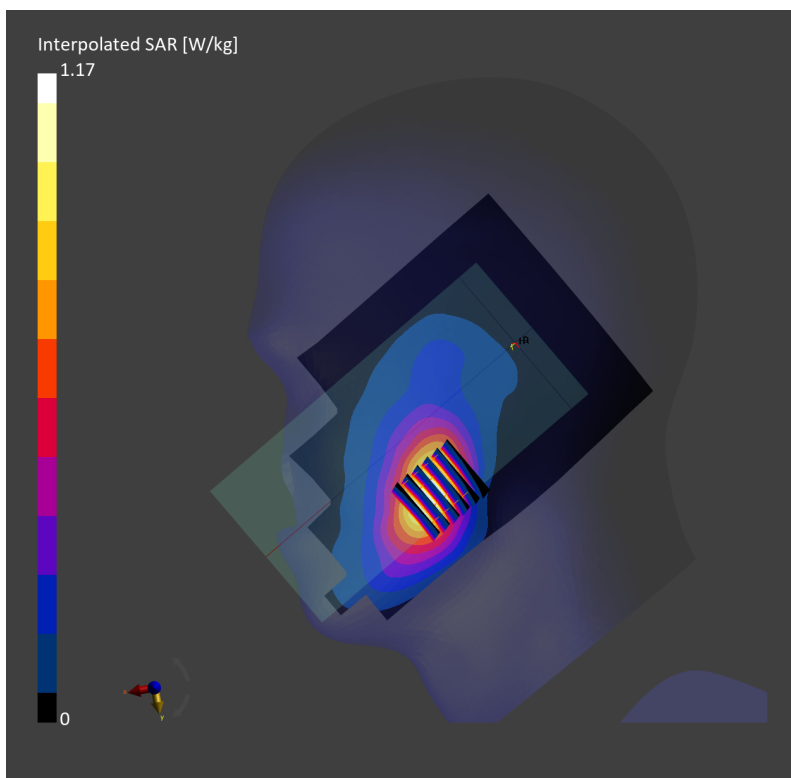

#12_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865


Communication System: LTE; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_850_230519 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.723 W/kg; SAR (10g) = 0.459 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.546 W/kg; SAR (8g) = 0.423 W/kg; SAR (10g) = 0.402 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 70.4 %

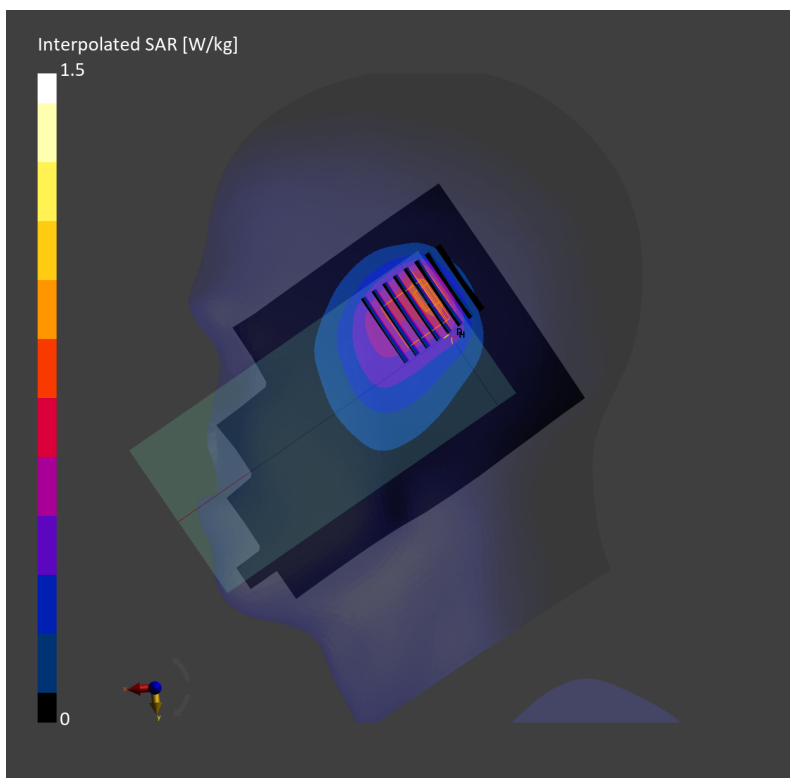

#13_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710


Communication System: LTE; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.68$ S/m; $\epsilon_r=39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.385 W/kg; SAR (10g) = 0.205 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm
Power Drift = 0.00 dB
SAR (1g) = 0.398 W/kg; SAR (8g) = 0.243 W/kg; SAR (10g) = 0.225 W/kg
Smallest distance from peaks to all points 3 dB below = 11.1 mm
Ratio of SAR at M2 to SAR at M1 = 87.6 %

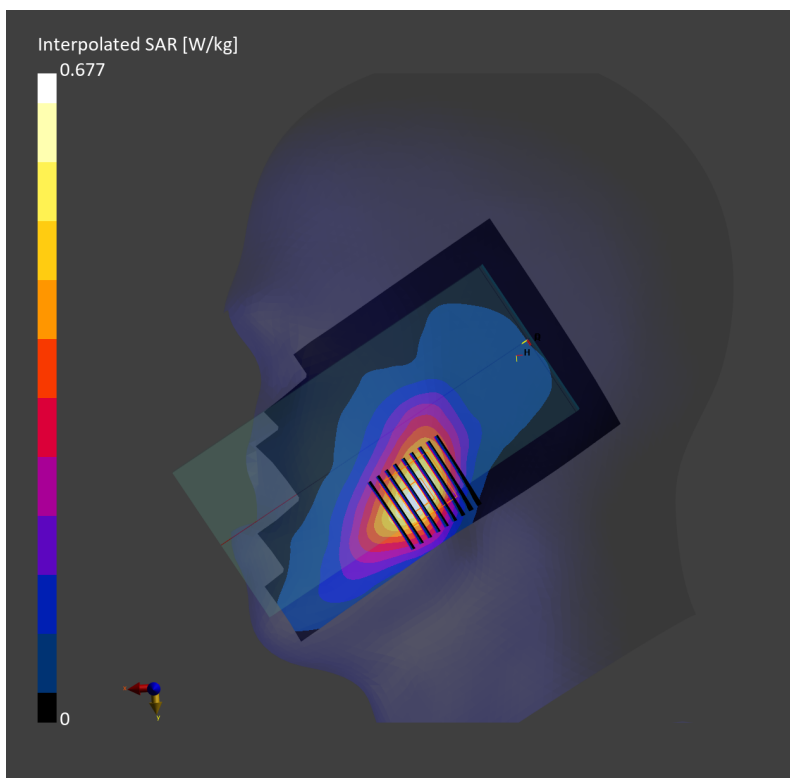

#14_LTE Band 41_20M_QPSK_1_0_Right Cheek_0mm_Ch39750


Communication System: LTE; Frequency: 2506.0 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_230509 Medium parameters used: $f = 2506.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.588 W/kg; SAR (10g) = 0.300 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.614 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.332 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 84.0 %

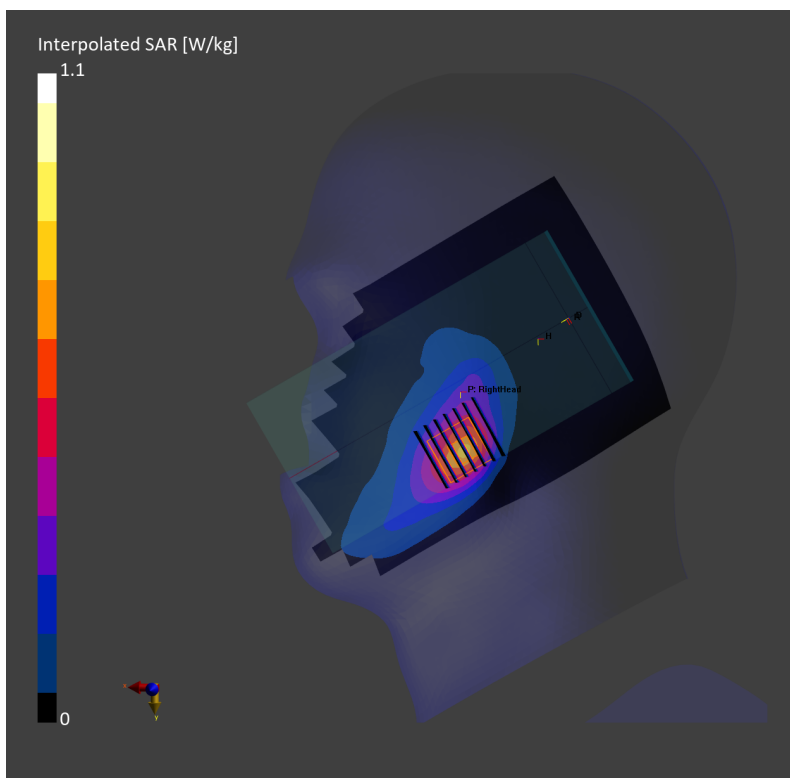

#15_LTE Band 48_20M_QPSK_1_0_Left Cheek_0mm_Ch55340


Communication System: LTE-TDD; Frequency: 3560.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3500_230528 Medium parameters used: $f= 3560.000$ MHz; $\sigma= 3.10$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.19, 7.19, 7.19); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.440 W/kg; SAR (10g) = 0.184 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.07 dB
SAR (1g) = 0.462 W/kg; SAR (8g) = 0.229 W/kg; SAR (10g) = 0.206 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 78.9 %

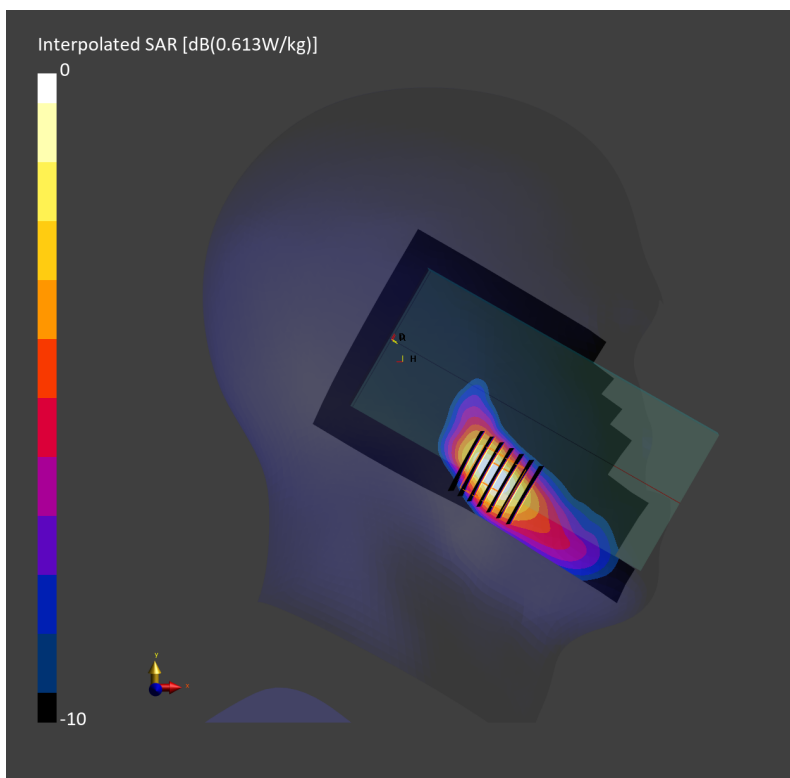

#16_LTE Band 66_20M_QPSK_1_0_Right Tilted_0mm_Ch132572


Communication System: LTE-FDD; Frequency: 1770.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230604 Medium parameters used: $f=1770.000$ MHz; $\sigma=1.40$ S/m; $\epsilon_r=40.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.743 W/kg; SAR (10g) = 0.373 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm
Power Drift = -0.04 dB
SAR (1g) = 0.765 W/kg; SAR (8g) = 0.372 W/kg; SAR (10g) = 0.336 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.1 %

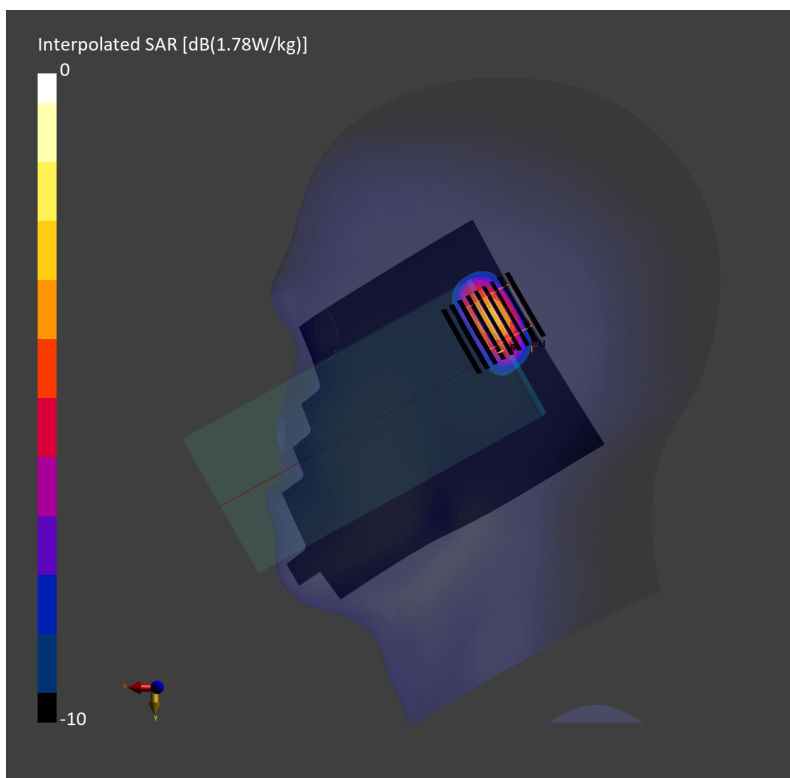

#17_LTE Band 71_20M_QPSK_1_0_Right Tilted_0mm_Ch133297

Communication System: LTE; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230518 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 43.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.330 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.607 W/kg; SAR (8g) = 0.322 W/kg; SAR (10g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.6 %

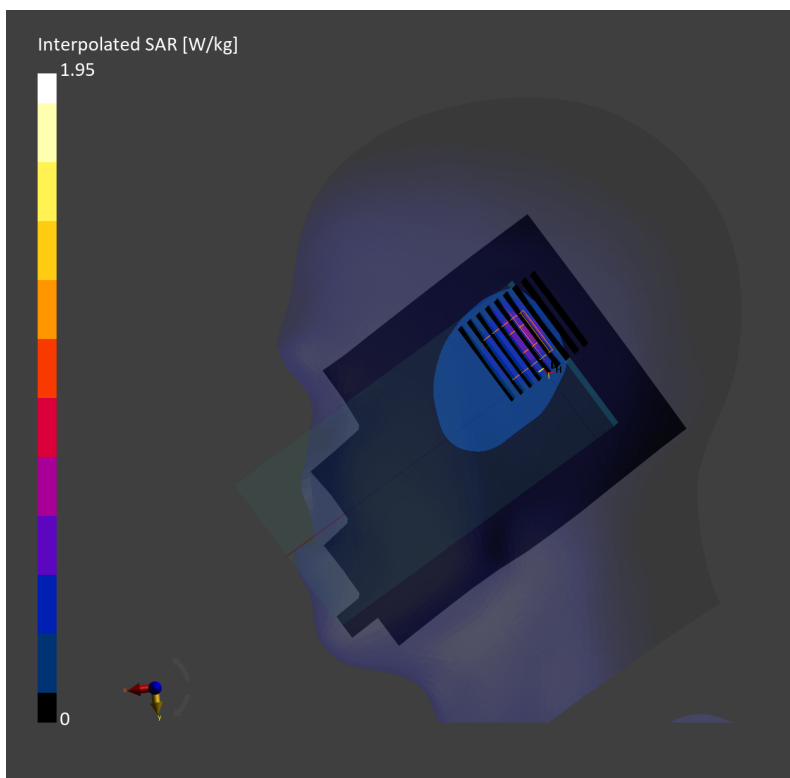

#18_FR1 n2_20M_BPSK_1_53_Right Tilted_Ch380000


Communication System: 5G NR; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230603 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.671 W/kg; SAR (10g) = 0.336 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.715 W/kg; SAR (8g) = 0.333 W/kg; SAR (10g) = 0.298 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 76.8 %

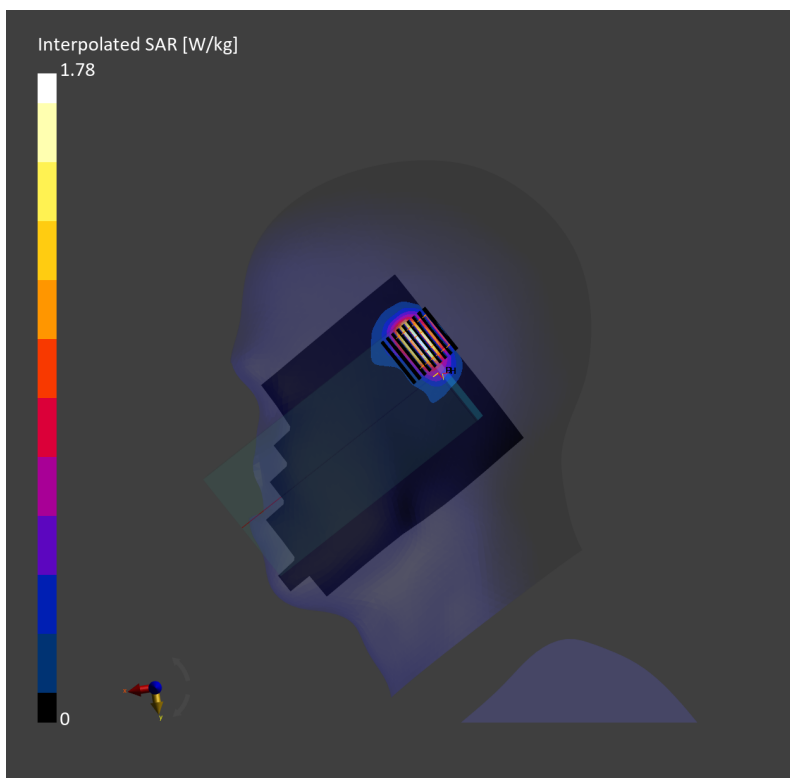

#19_FR1 n7_50M_BPSK_1_1_Right Cheek_Ch507000

Communication System: 5G NR ; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230520 Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.91$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.318 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.641 W/kg; SAR (8g) = 0.374 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

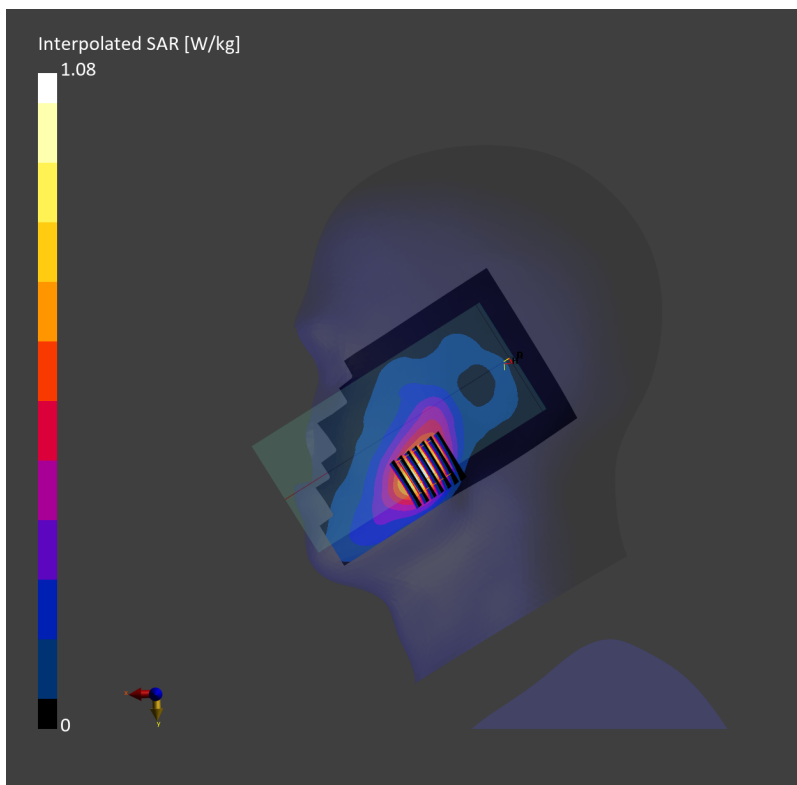

#20_FR1 n12_15M_BPSK_1_1_Right Cheek_Ch141500


Communication System: 5G NR ; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230527 Medium parameters used: $f=707.500$ MHz; $\sigma=0.868$ S/m; $\epsilon_r=42.2$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.562 W/kg; SAR (10g) = 0.358 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.525 W/kg; SAR (8g) = 0.315 W/kg; SAR (10g) = 0.289 W/kg
Smallest distance from peaks to all points 3 dB below = 5.5 mm
Ratio of SAR at M2 to SAR at M1 = 69.0 %

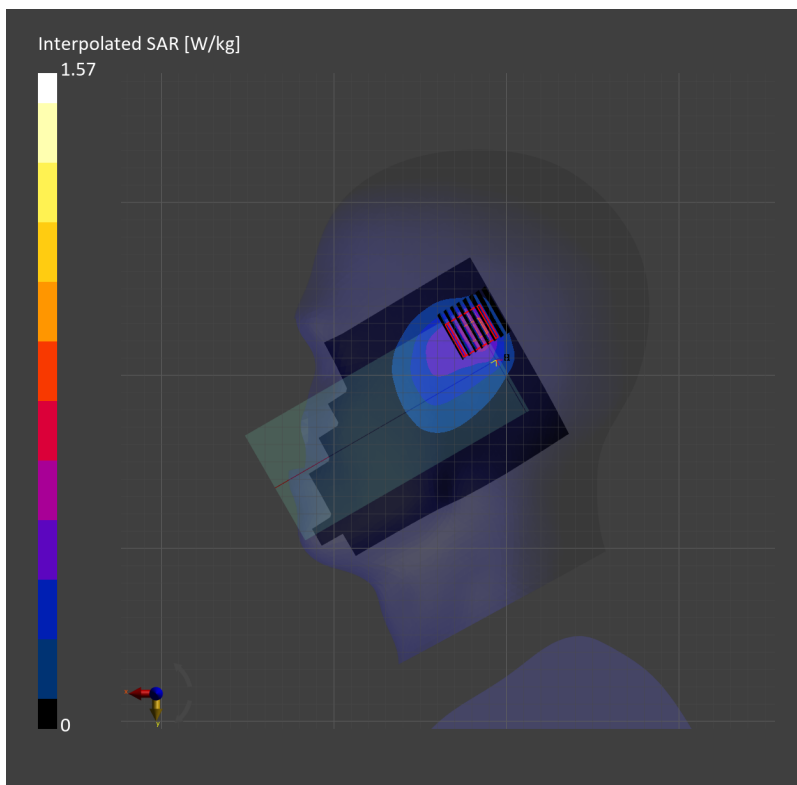

#21_FR1 n25_40M_BPSK_1_1_Right Cheek_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230522 Medium parameters used: $f=1882.500$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=39.1$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.33, 7.51); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.699 W/kg; SAR (10g) = 0.405 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.588 W/kg; SAR (8g) = 0.488 W/kg; SAR (10g) = 0.457 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

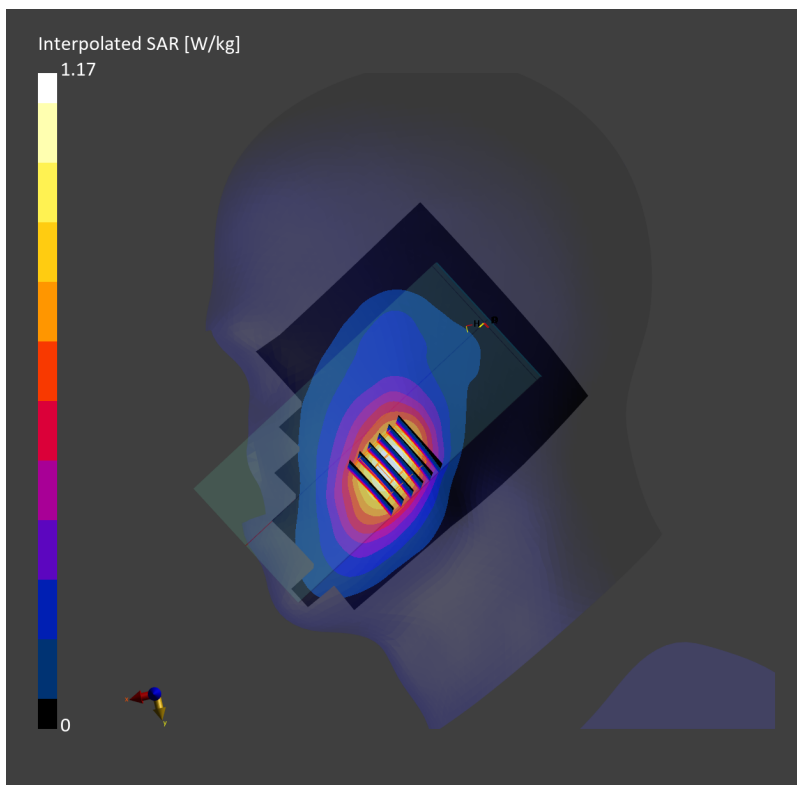

#22_FR1 n26_20M_BPSK_1_1_Right Cheek_Ch166300


Communication System: 5G NR ; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_850_230527 Medium parameters used: $f= 831.500$ MHz; $\sigma= 0.910$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.73, 9.71, 8.75); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.644 W/kg; SAR (10g) = 0.431 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.8 mm x 5.8 mm x 1.5 mm
Power Drift = 0.04 dB
SAR (1g) = 0.601 W/kg; SAR (8g) = 0.443 W/kg; SAR (10g) = 0.417 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 66.7 %

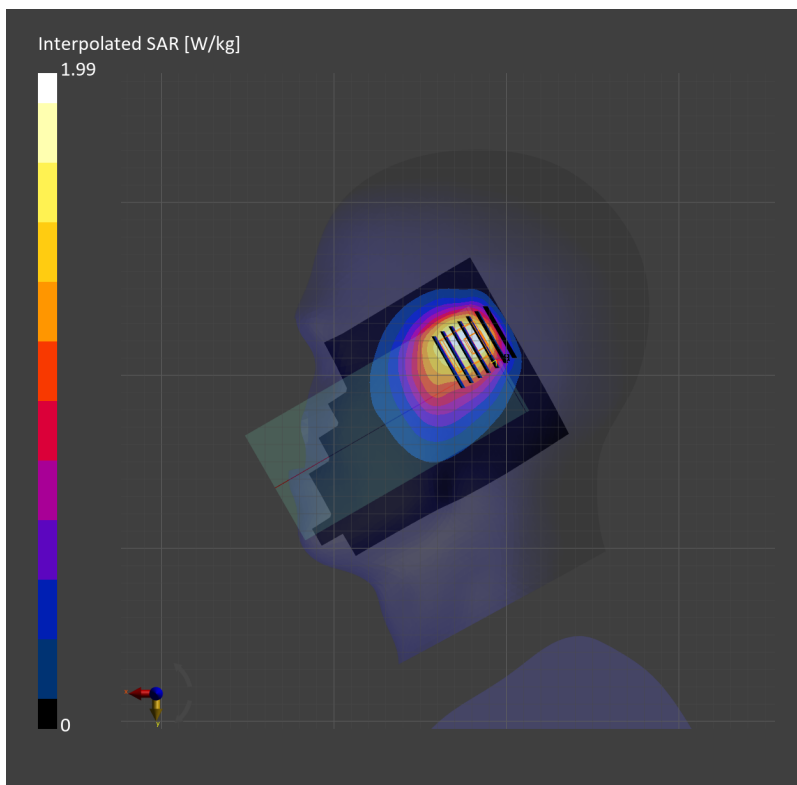

#23_FR1 n30_10M_BPSK_1_1_Right Cheek_Ch462000

Communication System: 5G NR ; Frequency: 2310.0 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230519 Medium parameters used: $f=2310.0$ MHz; $\sigma=1.63$ S/m; $\epsilon_r=39.2$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.88, 7.66, 6.92); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.423 W/kg; SAR (10g) = 0.226 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.438 W/kg; SAR (8g) = 0.266 W/kg; SAR (10g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

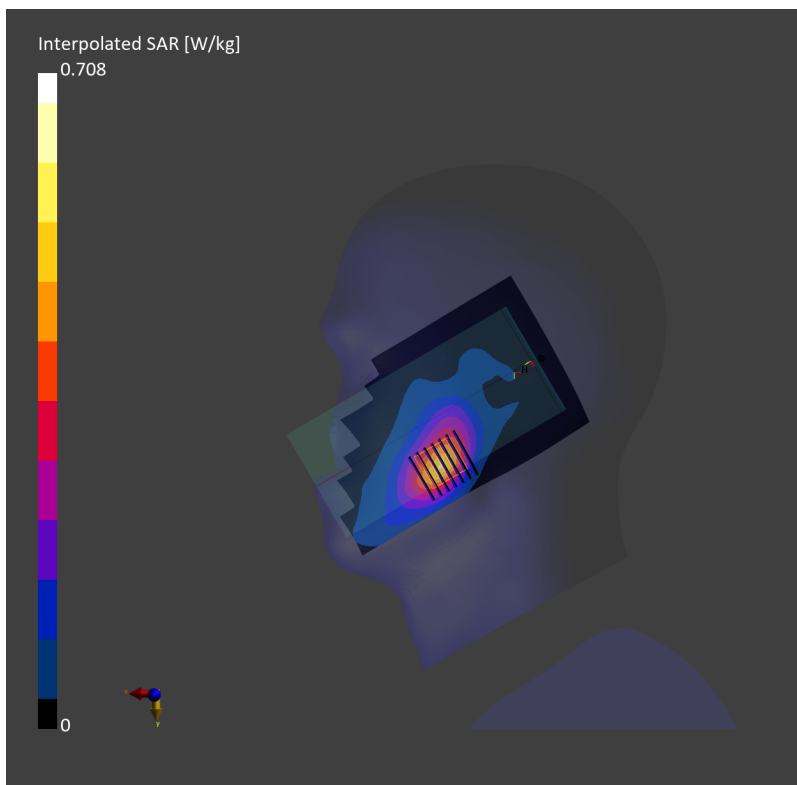

#24_FR1 n38_20M_BPSK_1_1_Right Cheek_0mm_Ch519000


Communication System: NR; Frequency: 2595.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230531 Medium parameters used: $f=2595.000$ MHz; $\sigma=1.98$ S/m; $\epsilon_r=38.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10900-AAC

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.235 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.227 W/kg; SAR (8g) = 0.122 W/kg; SAR (10g) = 0.111 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 88.6 %

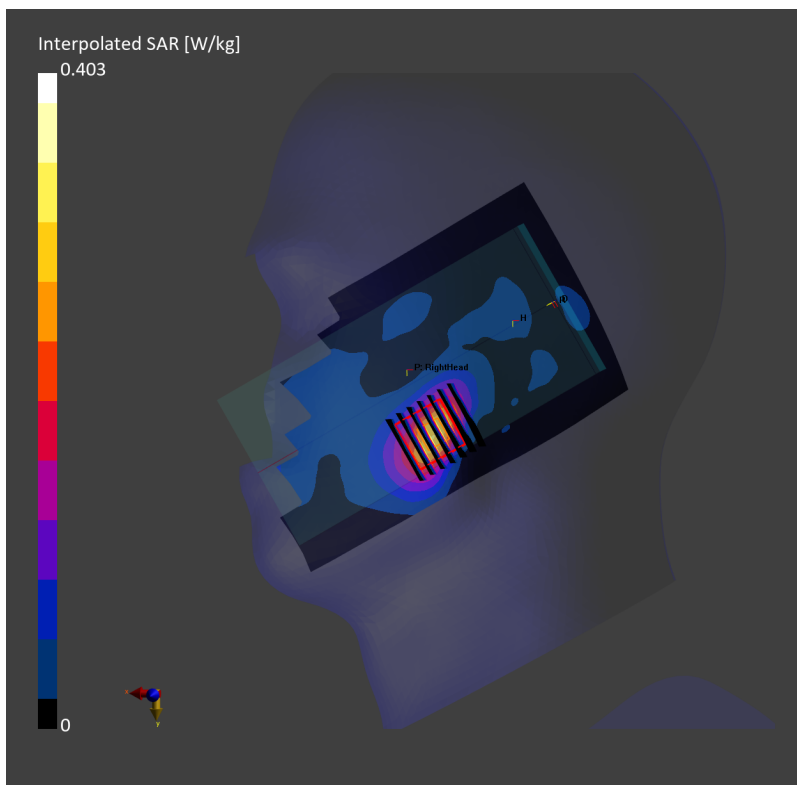

#25_FR1 n41_100M_BPSK_1_1_Right Tilted_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230530 Medium parameters used: $f=2592.990$ MHz; $\sigma=1.96$ S/m; $\epsilon_r=38.2$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.626 W/kg; SAR (10g) = 0.234 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.617 W/kg; SAR (8g) = 0.255 W/kg; SAR (10g) = 0.224 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 77.3 %

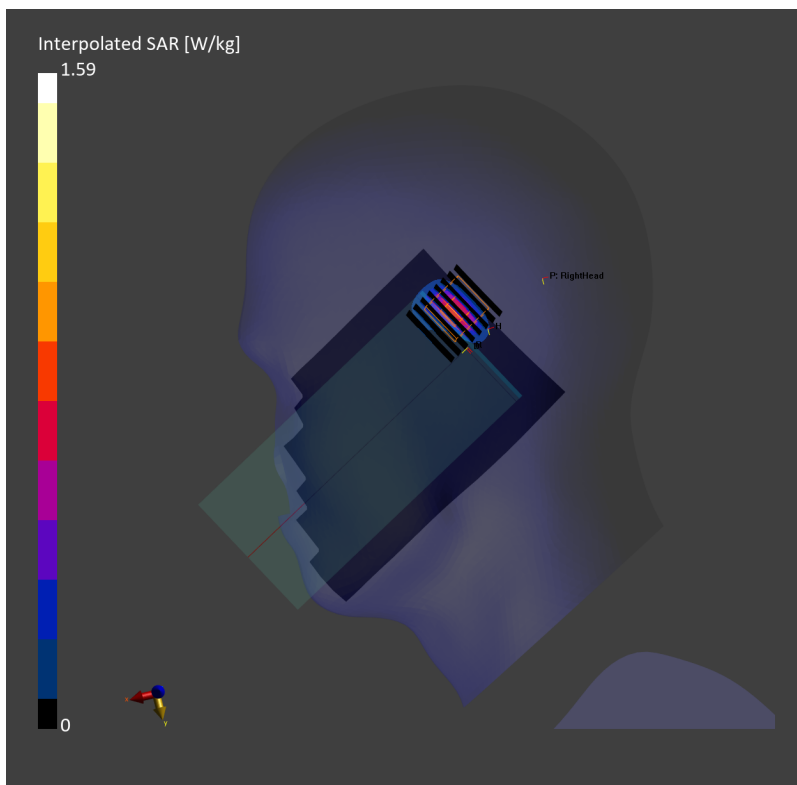

#26_FR1 n66_40M_BPSK_216_0_Right Tilted_0mm_Ch349000


Communication System: 5G NR; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230604 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.37$ S/m; $\epsilon_r=41.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.819 W/kg; SAR (10g) = 0.412 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm
Power Drift = 0.00 dB
SAR (1g) = 0.813 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.358 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 78.9 %

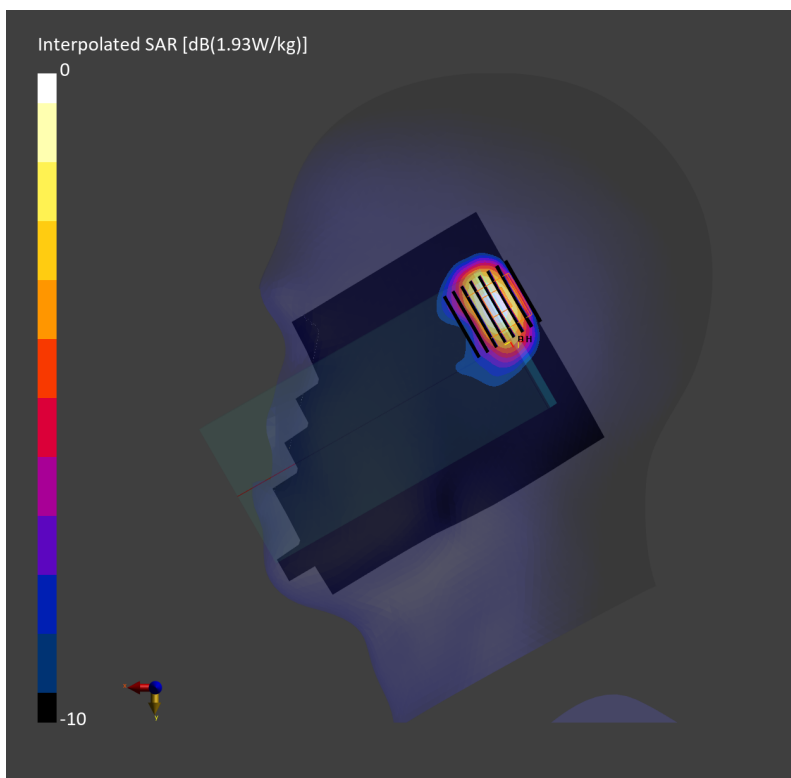

#27_FR1 n71_20M_BPSK_1_53_Right Cheek_Ch136100

Communication System: 5G NR ; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230527 Medium parameters used: $f=680.500$ MHz; $\sigma=0.858$ S/m; $\epsilon_r=42.4$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.762 W/kg; SAR (10g) = 0.482 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.738 W/kg; SAR (8g) = 0.448 W/kg; SAR (10g) = 0.416 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 64.4 %

