



# FCC RADIO TEST REPORT

FCC ID : A4RGTU8P  
Equipment : Wireless Device  
Applicant : Google LLC  
1600 Amphitheatre Parkway,  
Mountain View, California, 94043 USA  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Sep. 23, 2022 and testing was performed from Oct. 20, 2022 to Dec. 13, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement .....	17
3.4 Conducted Band Edges and Spurious Emission Measurement .....	22
3.5 Radiated Band Edges and Spurious Emission Measurement .....	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
<b>4 List of Measuring Equipment .....</b>	<b>35</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>37</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR1O0605-09B	01	Initial issue of report	Dec. 16, 2022



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	1.66 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	17.86 dB under the limit at 0.157 MHz
3.7	15.203	Antenna Requirement	Pass	-

**Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: William Chen**

**Report Producer: Doris Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
FCC ID	A4RGTU8P
EUT supports Radios application	UWB WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE

**Remark:** The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
105650087900020228W0008A	RF Conducted Measurement
WIP2919105H800CL3	Radiated Spurious Emission
WIP2901105H8009EG	Conducted Emission

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth – LE (1Mbps): 16.20 dBm / 0.0417 W Bluetooth – LE (2Mbps): 16.20 dBm / 0.0417 W
99% Occupied Bandwidth	Bluetooth – LE (1Mbps): 1.039 MHz Bluetooth – LE (2Mbps): 2.082MHz
Antenna Type / Gain	PIFA Antenna with gain 2.50 dBi
Type of Modulation	Bluetooth - LE: GFSK

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.



### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY(TAF Code: 1190)
<b>Remark</b>	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY , 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Conducted Test Cases</b>	<b>Bluetooth – LE / GFSK</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>Radiated Test Cases</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
<b>AC Conducted Emission</b>	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + USB Cable (Charging from AC Adapter)
<b>Remark:</b> For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	




## 2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

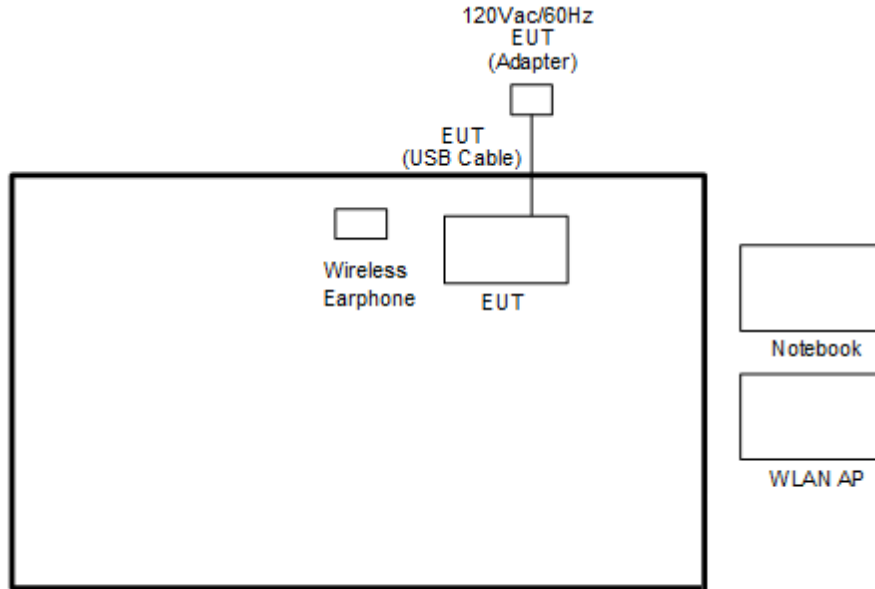

<Bluetooth -LE TX Mode>

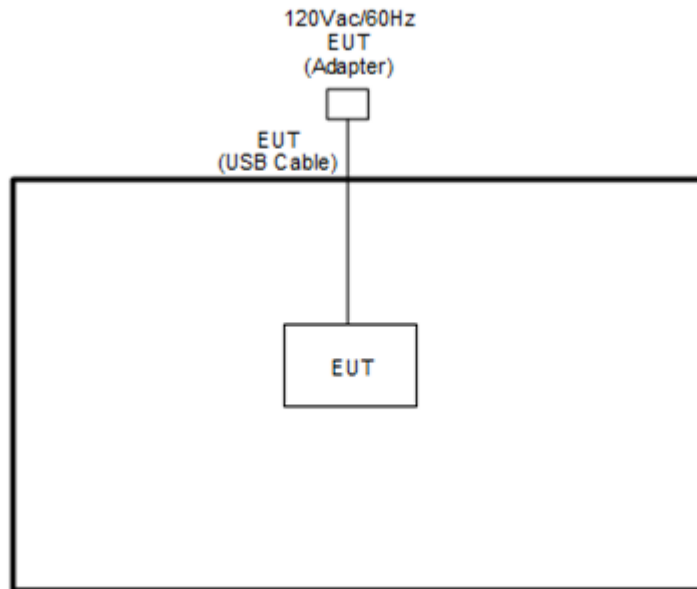



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Wireless Earphone	Google	G1007/G1008	A4RG1007/ A4RG1008	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “CMD v.10.0.18362.1256” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

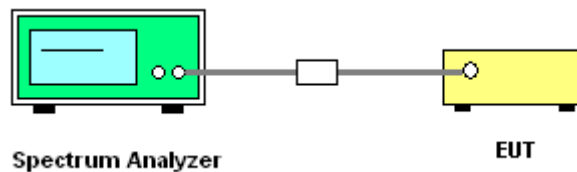




### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

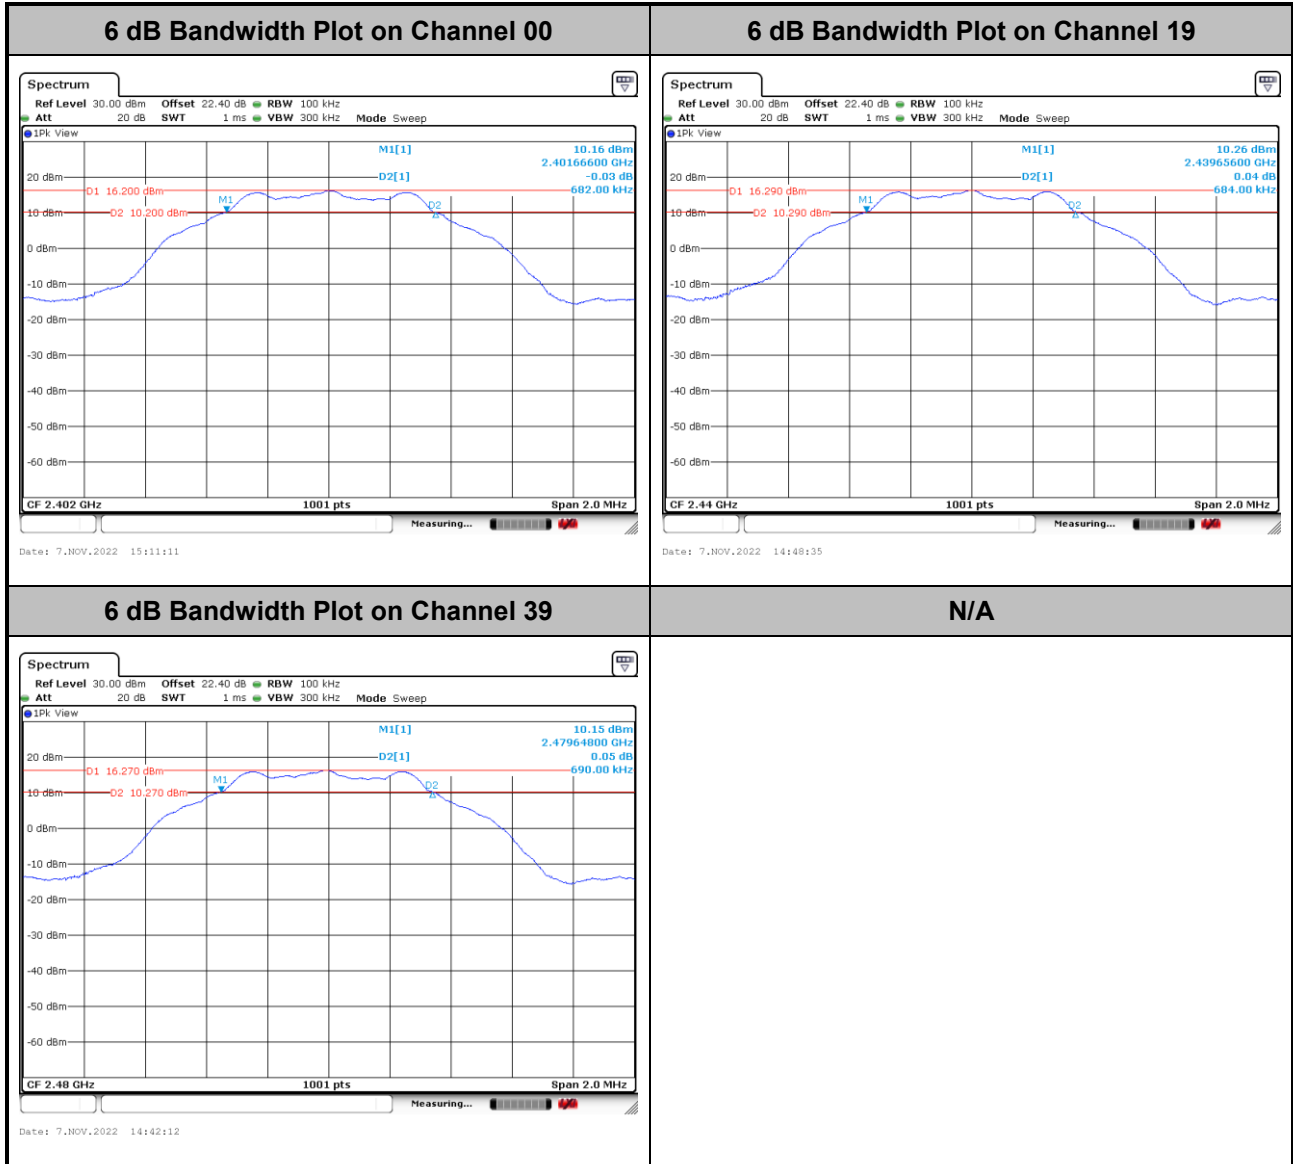



<2Mbps>

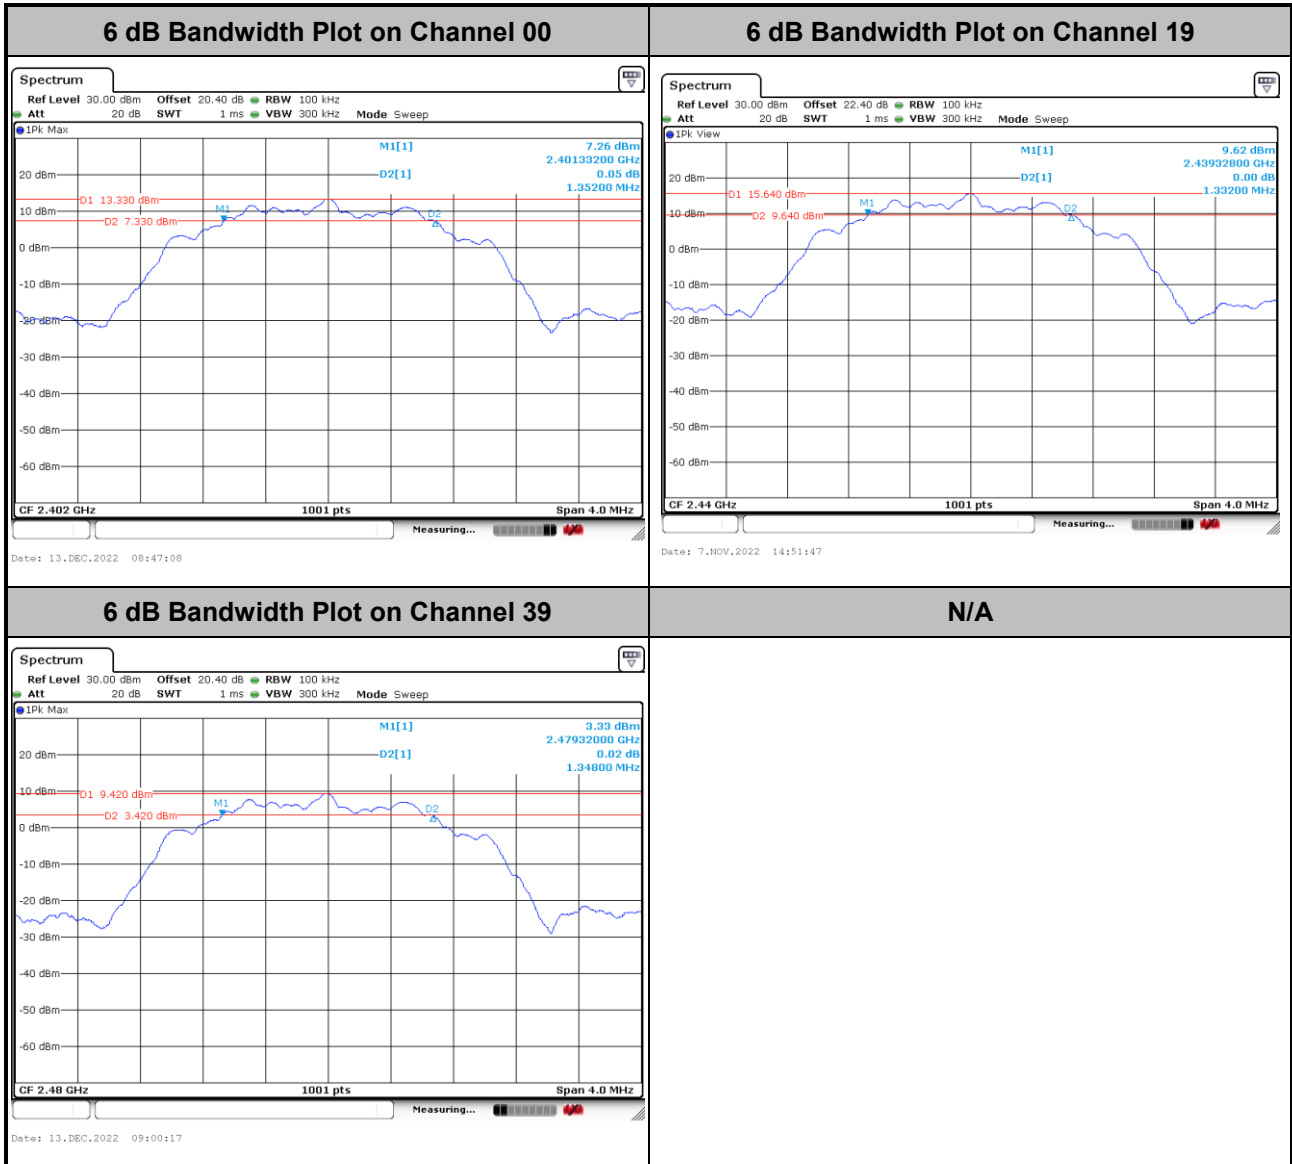




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

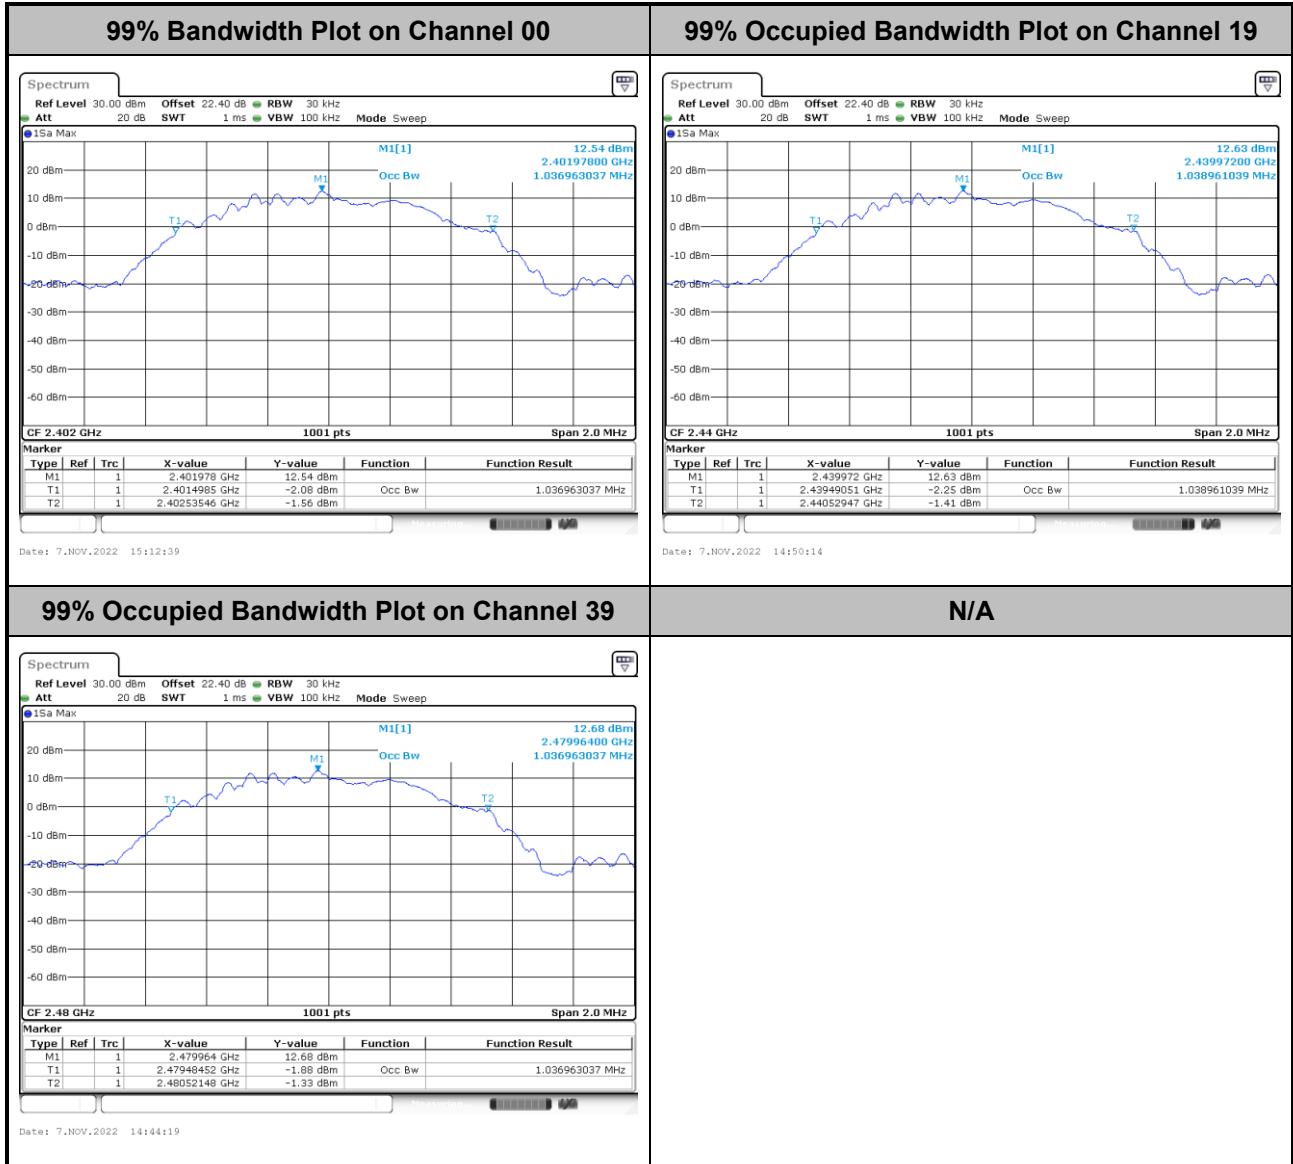

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

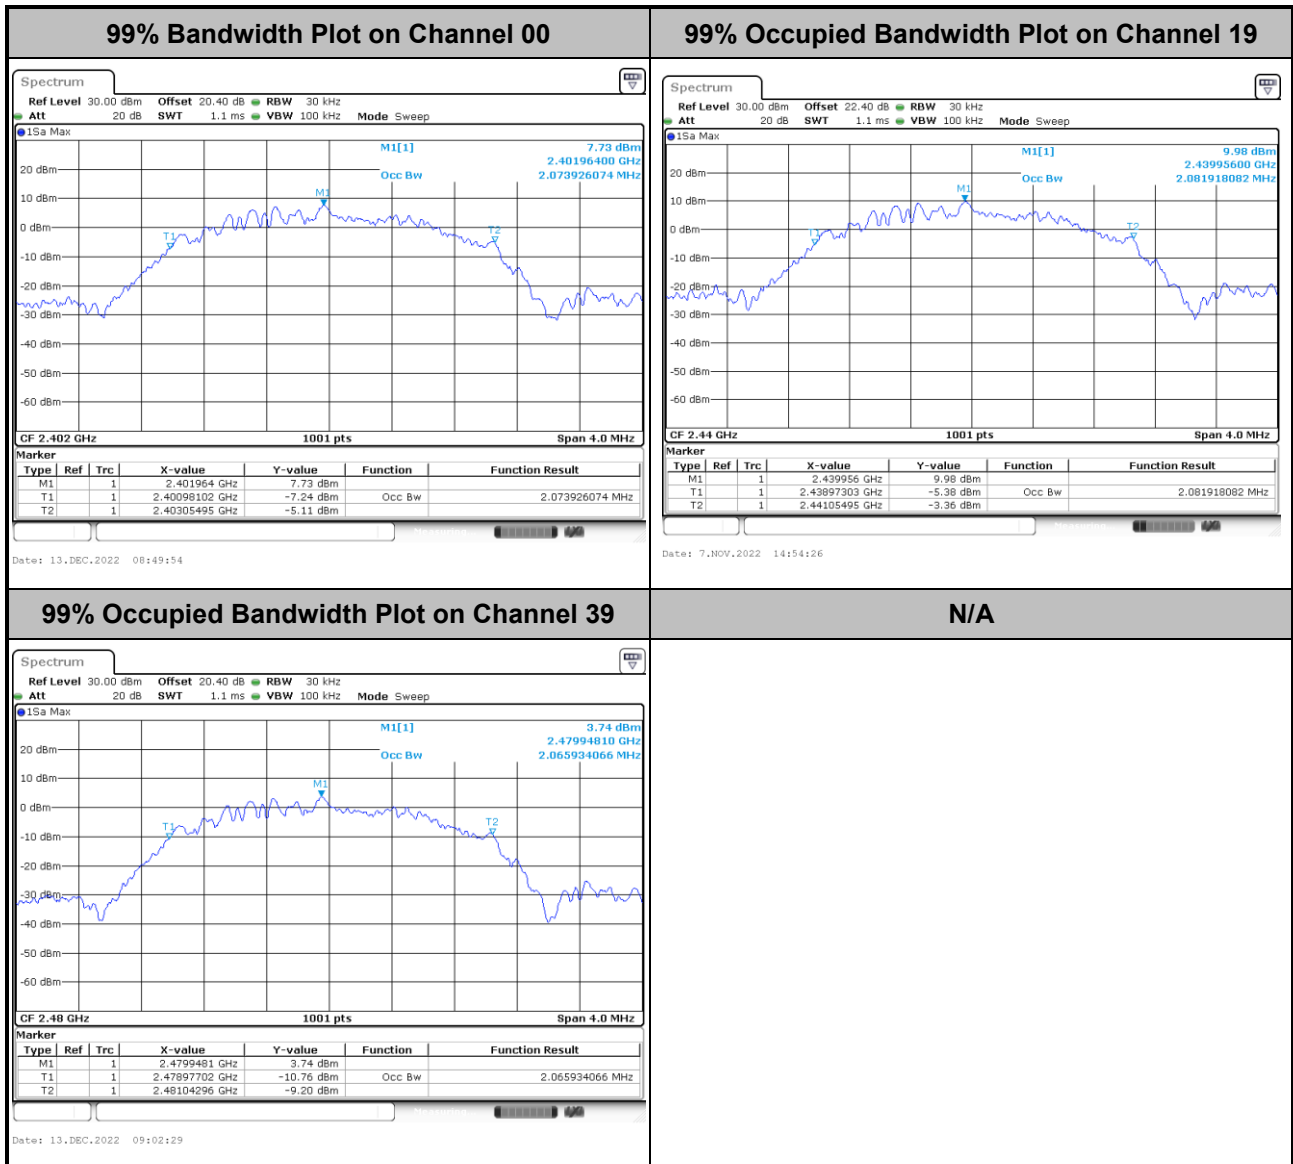

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

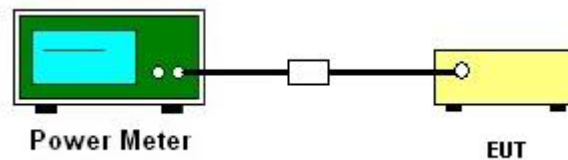

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

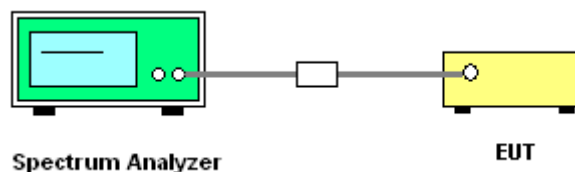


#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

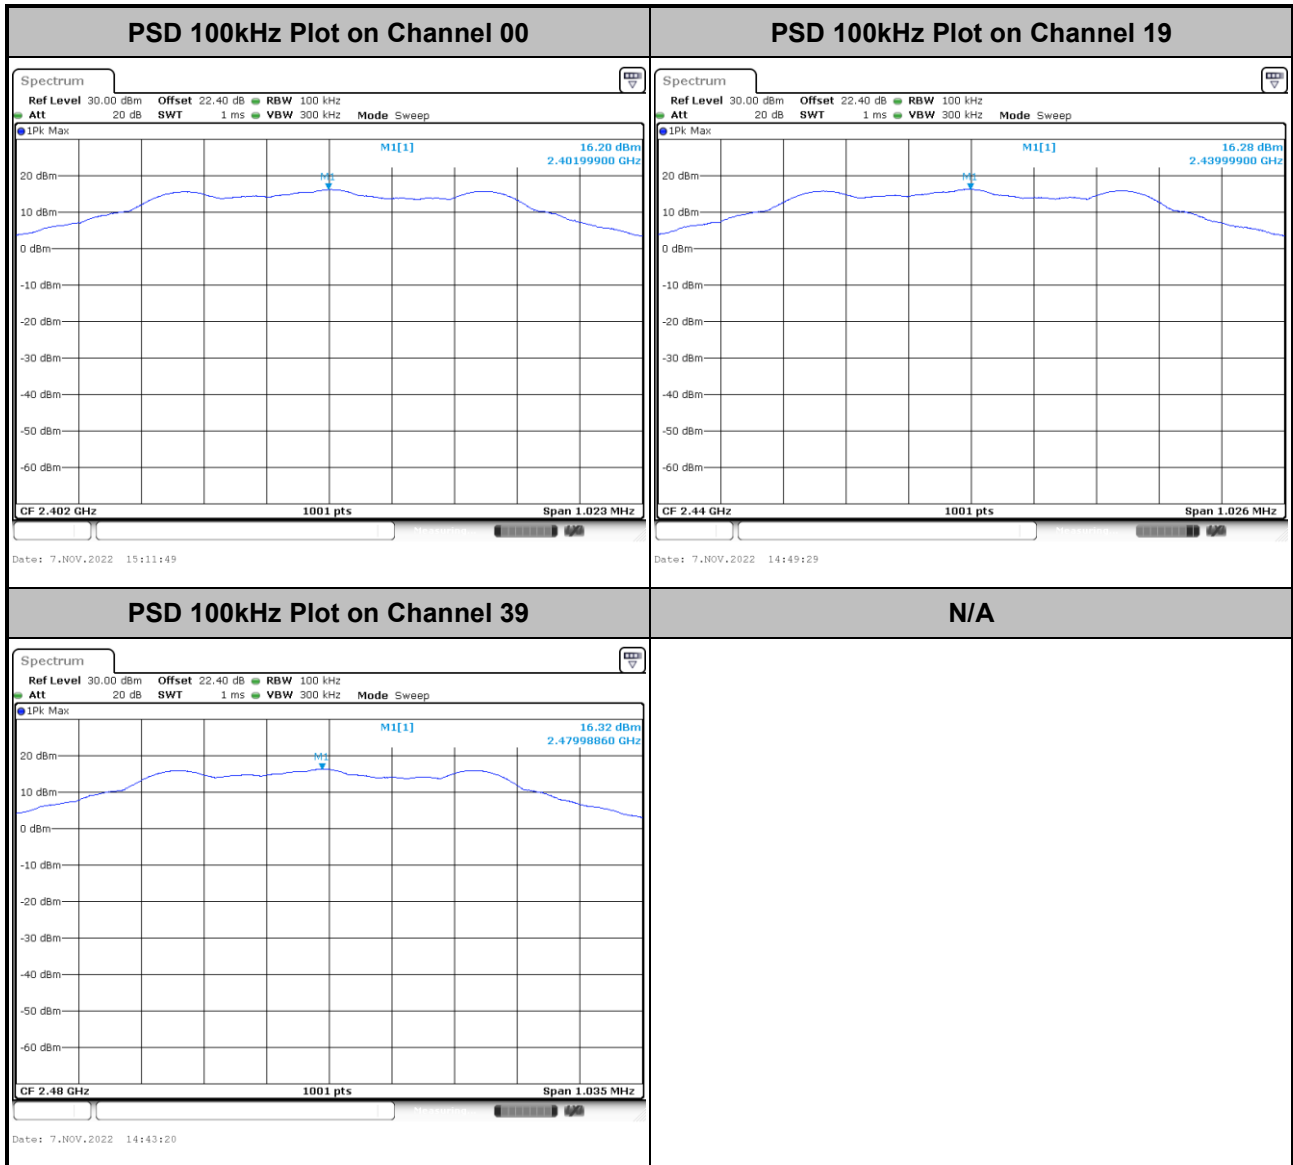




<2Mbps>

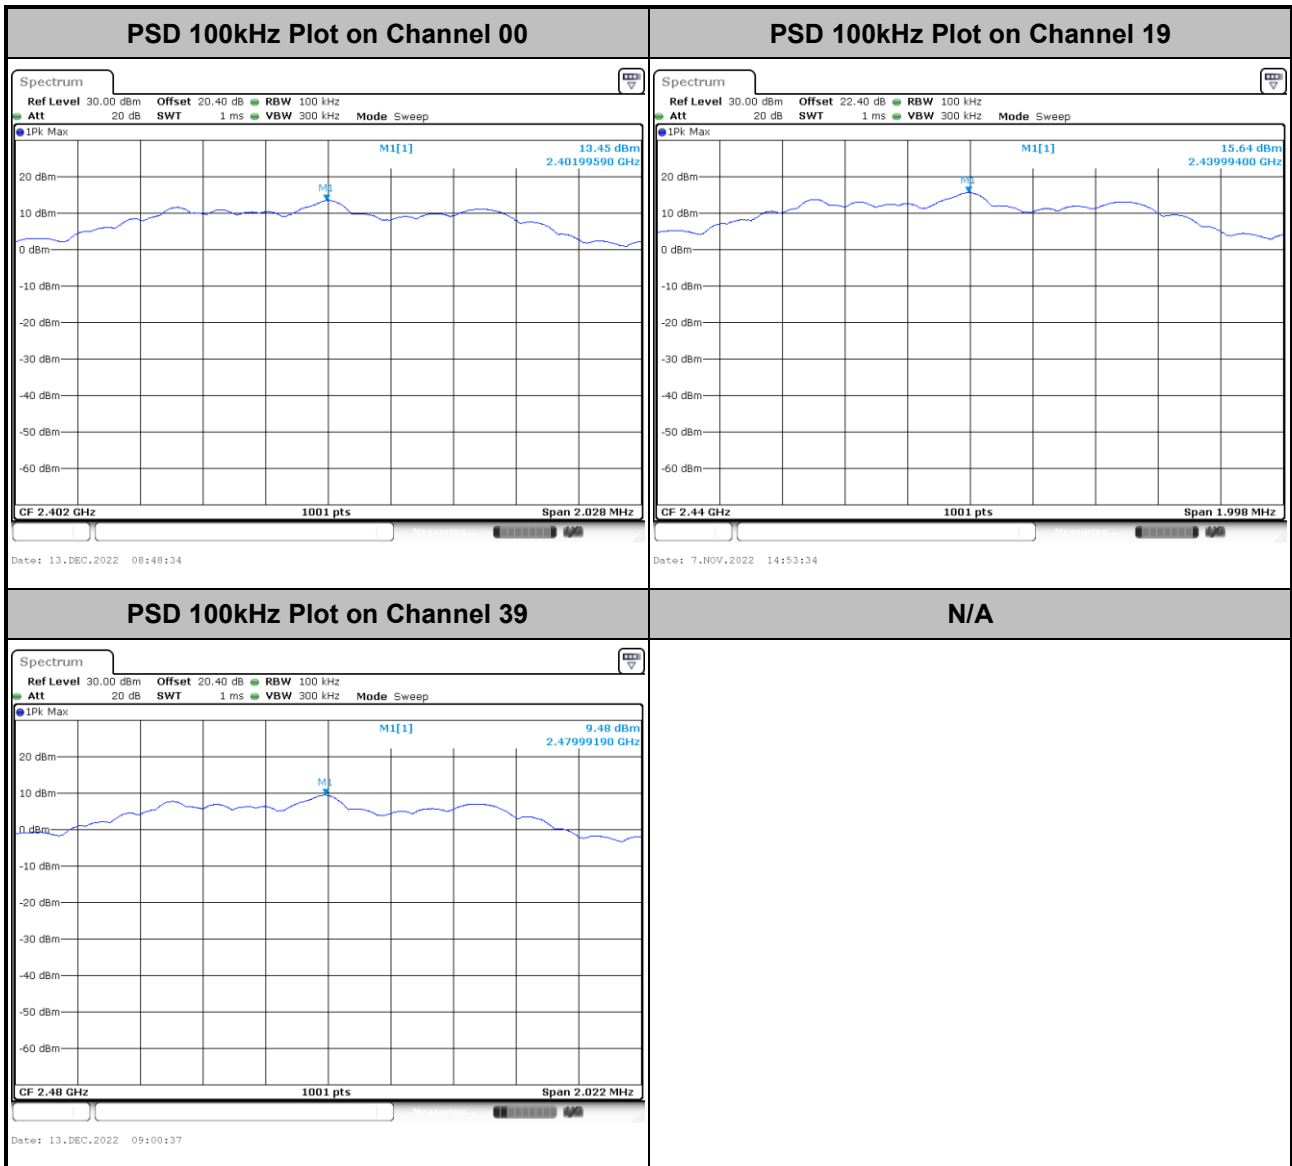




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

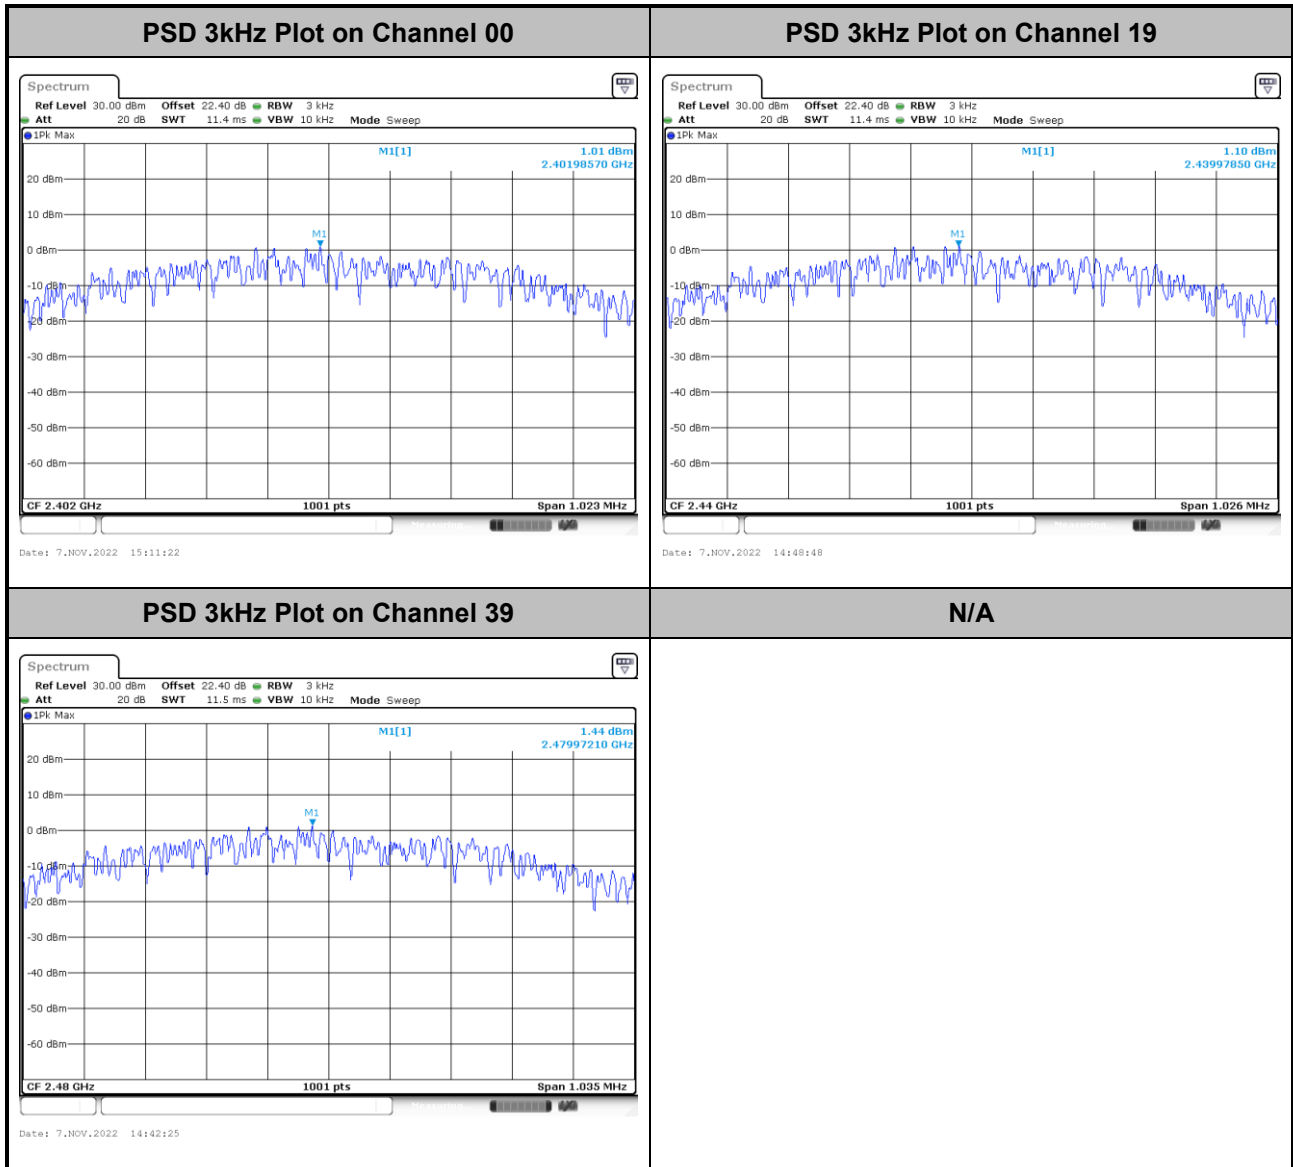



<2Mbps>

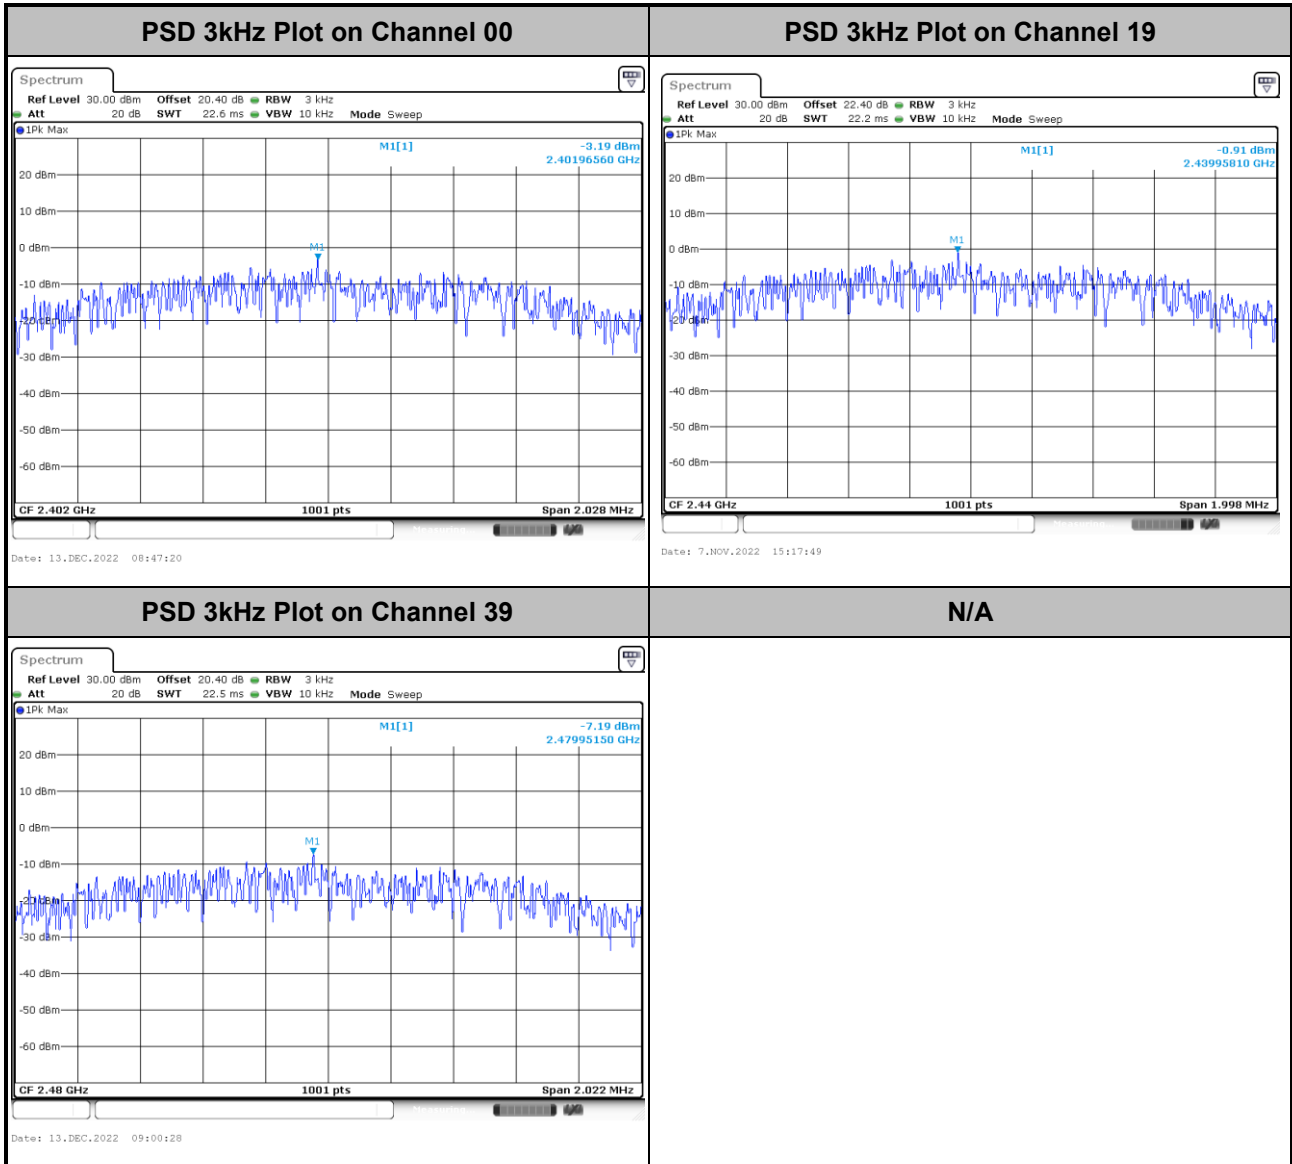

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

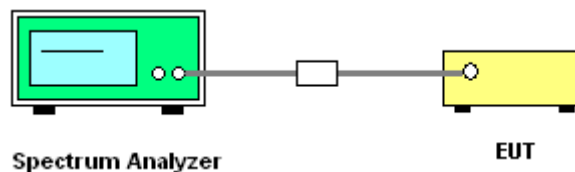




### 3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

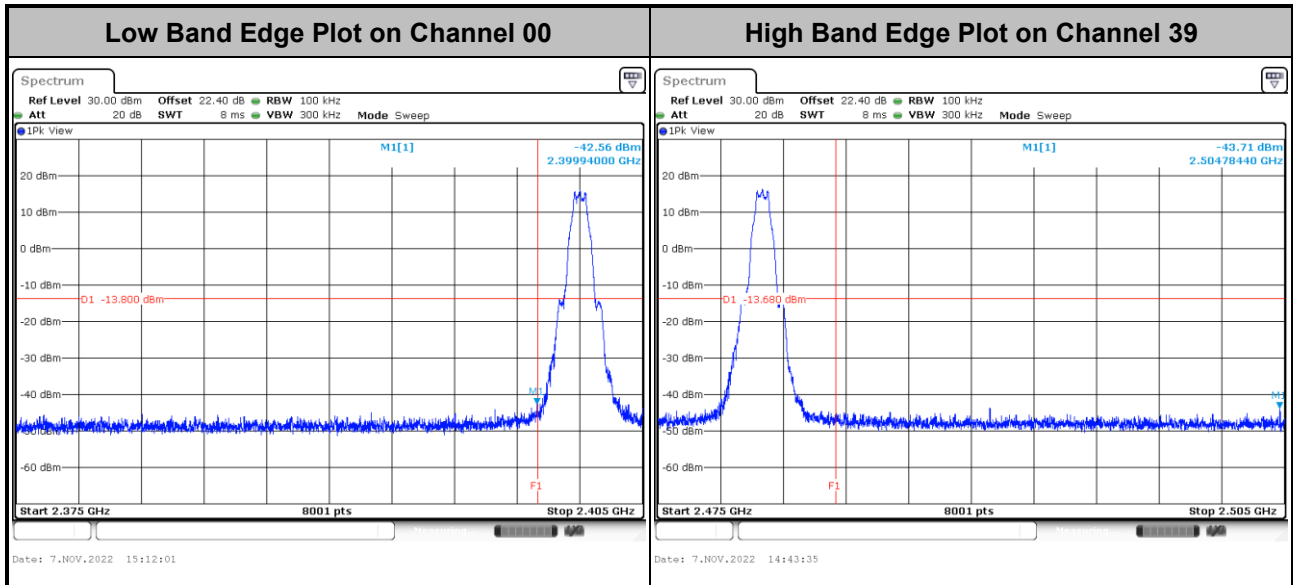


<2Mbps>

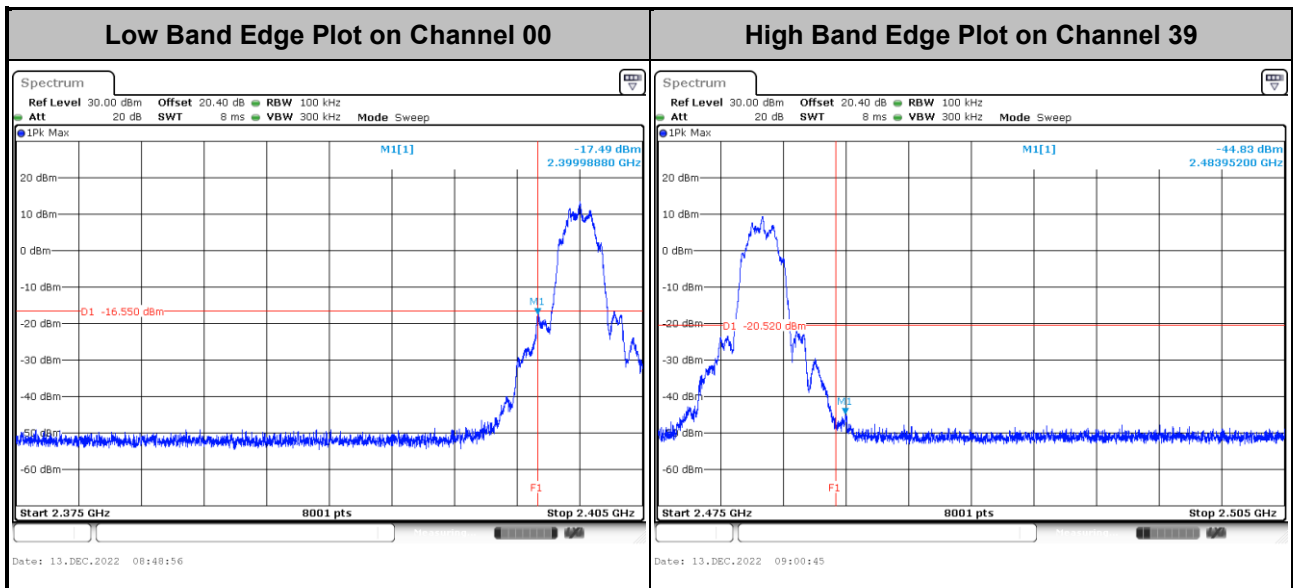




### 3.4.6 Test Result of Conducted Spurious Emission Plots

<1Mbps>

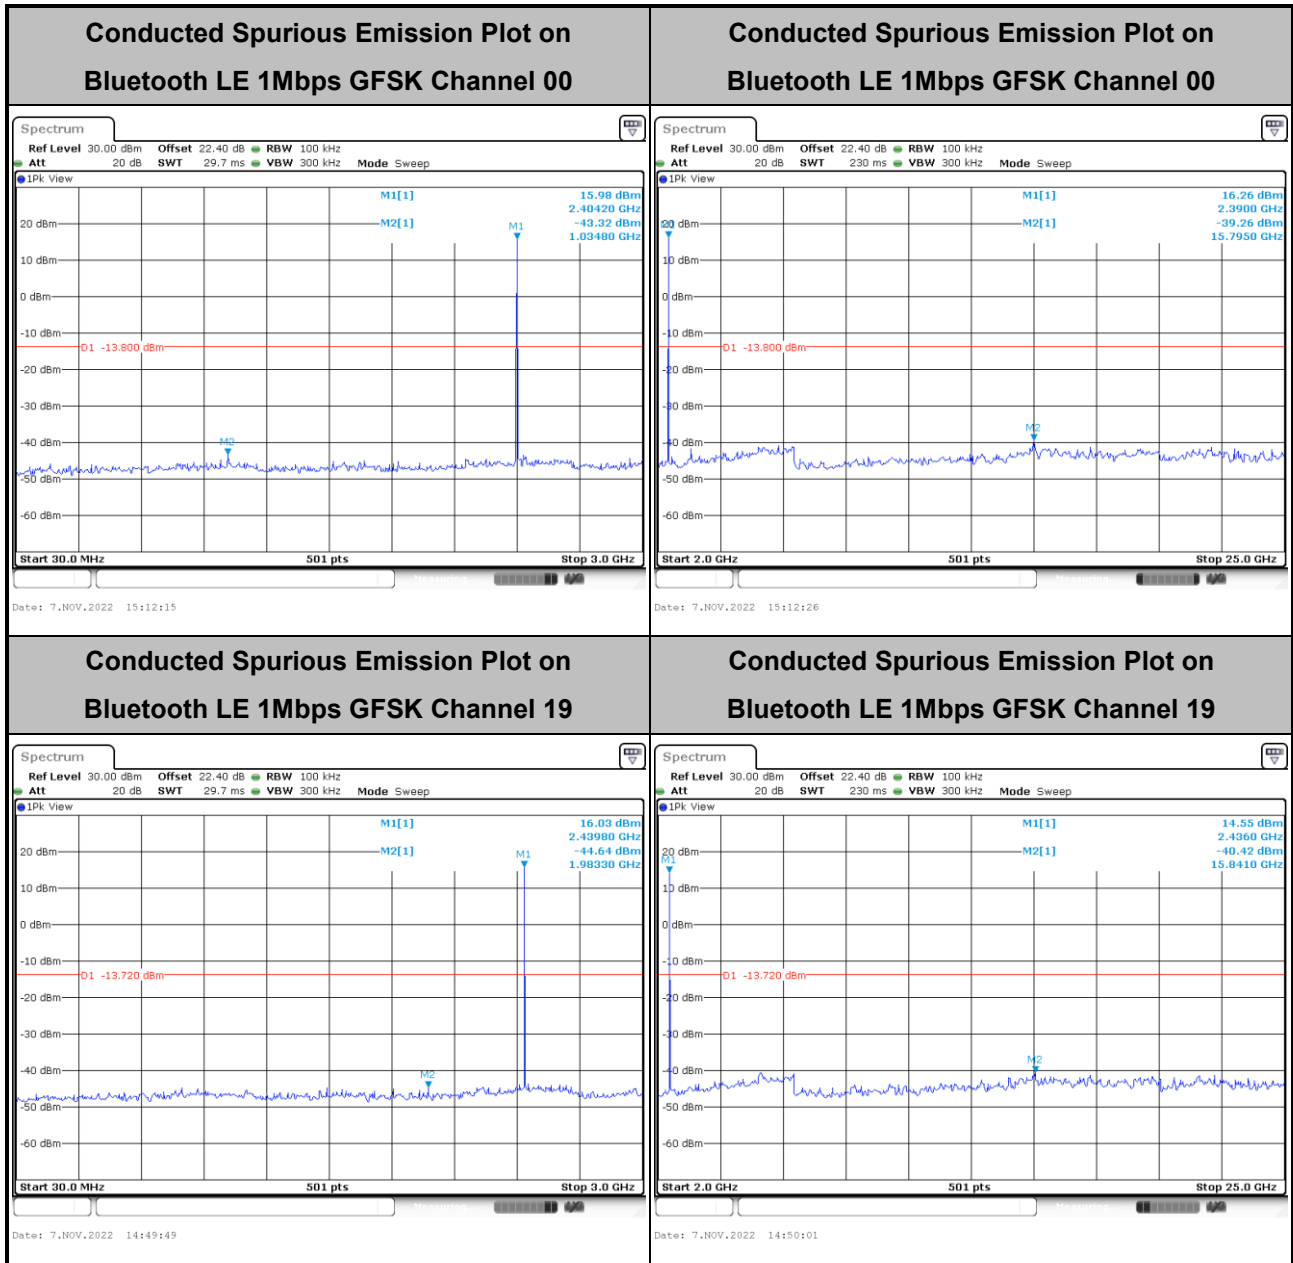





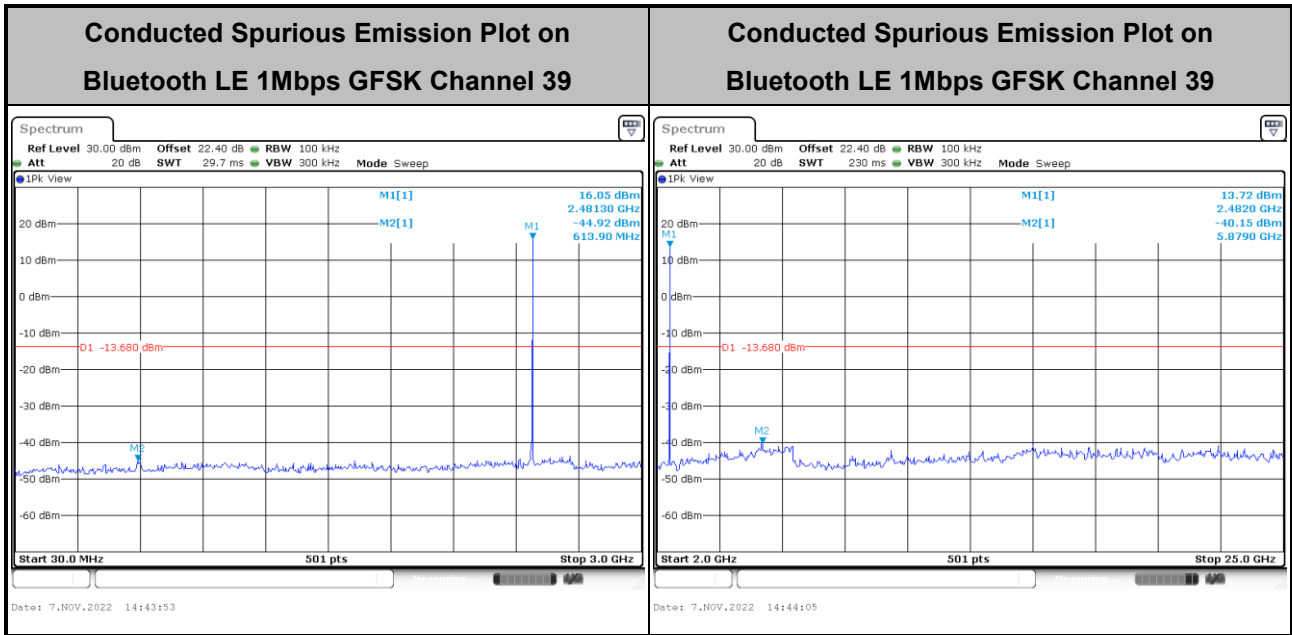



<2Mbps>

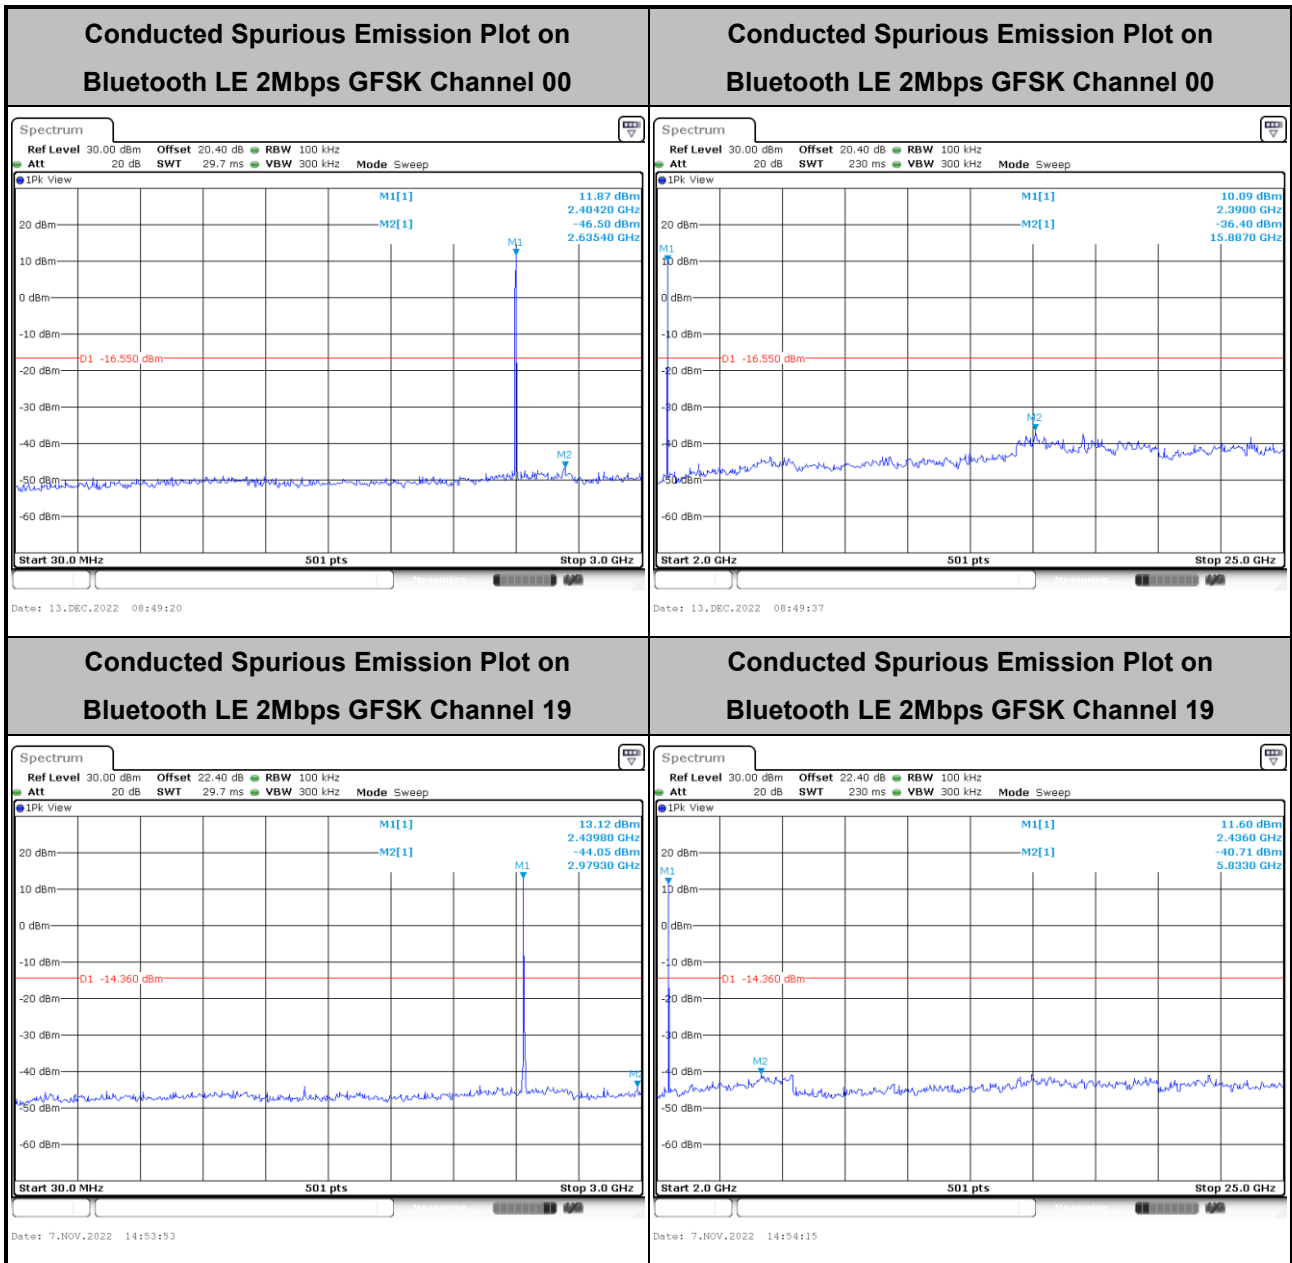

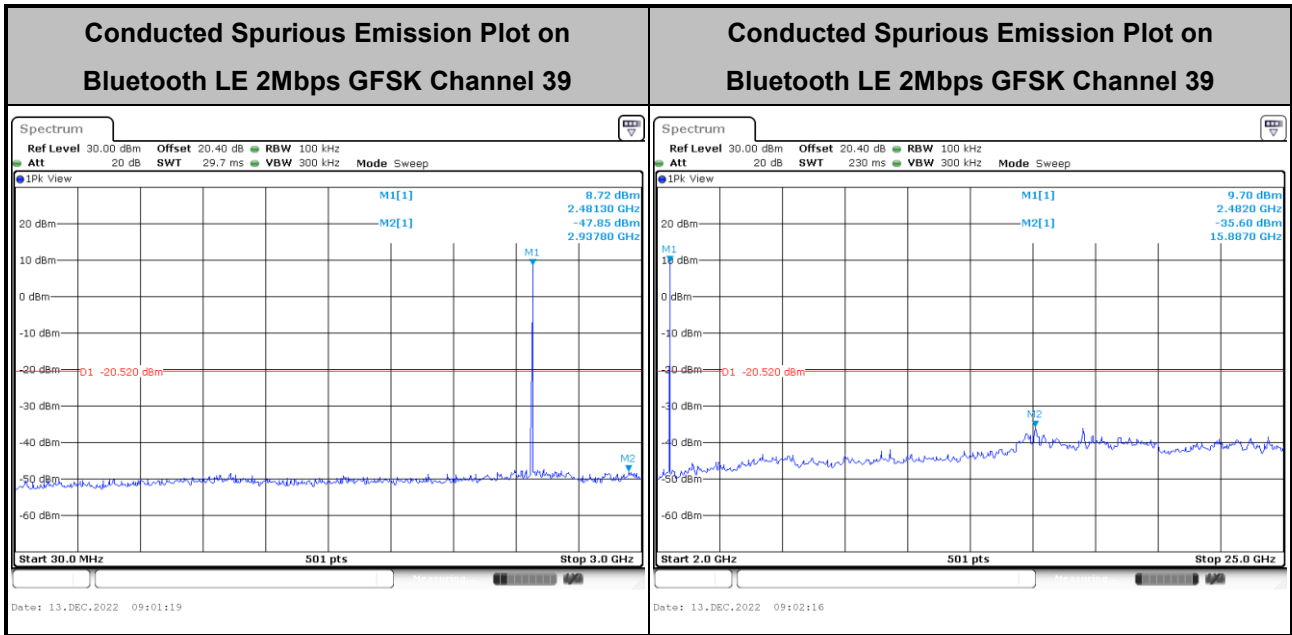



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

**3.5.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

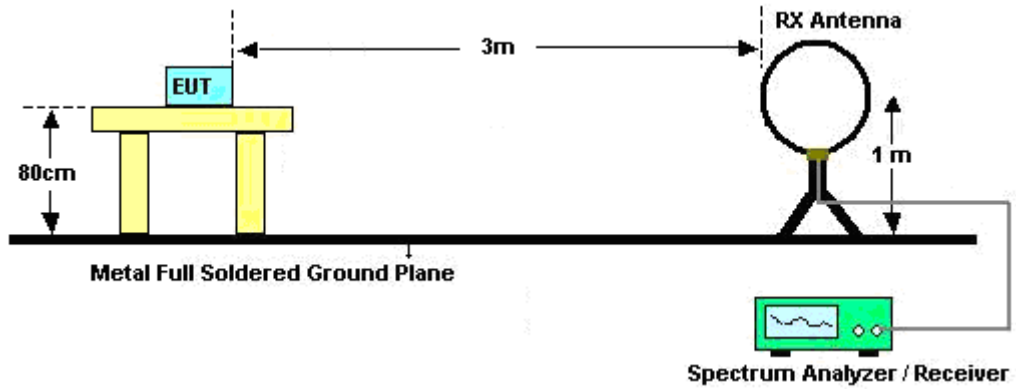


For radiated test from 30MHz to 1GHz

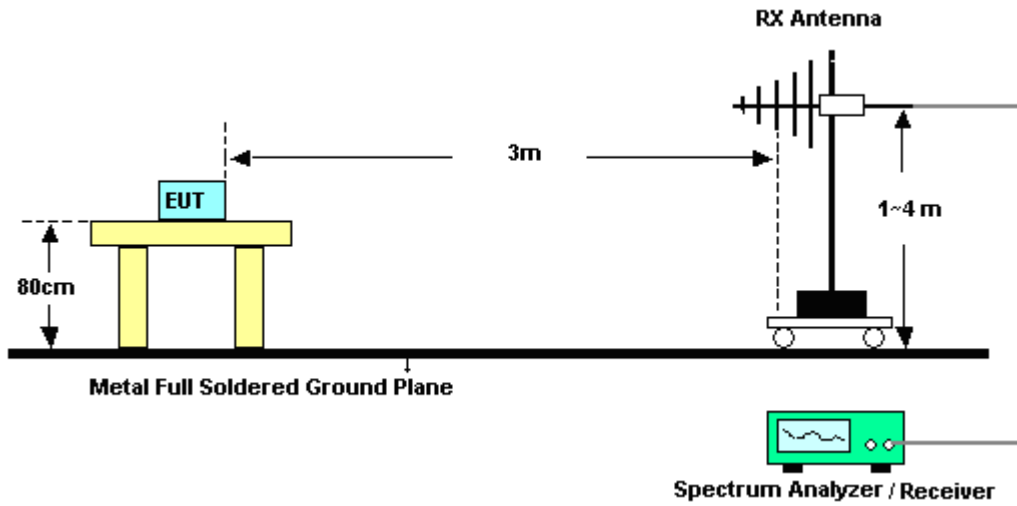

For radiated test from 1GHz to 18GHz

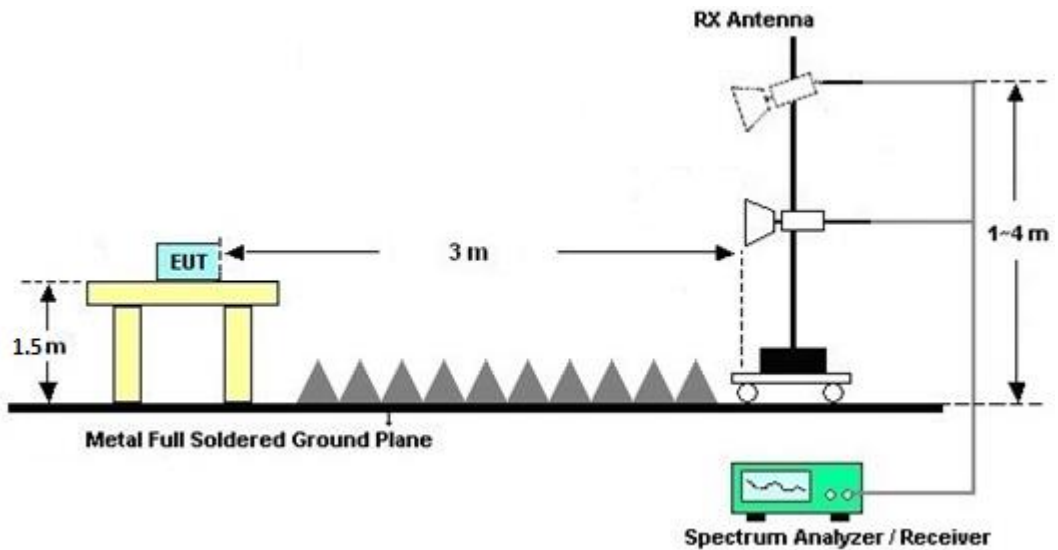

For radiated test above 18GHz

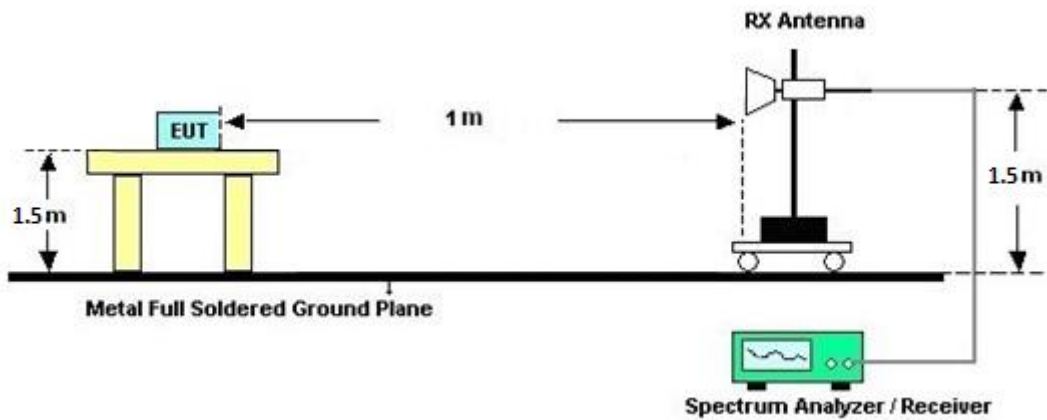

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

#### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.6.4 Test Setup

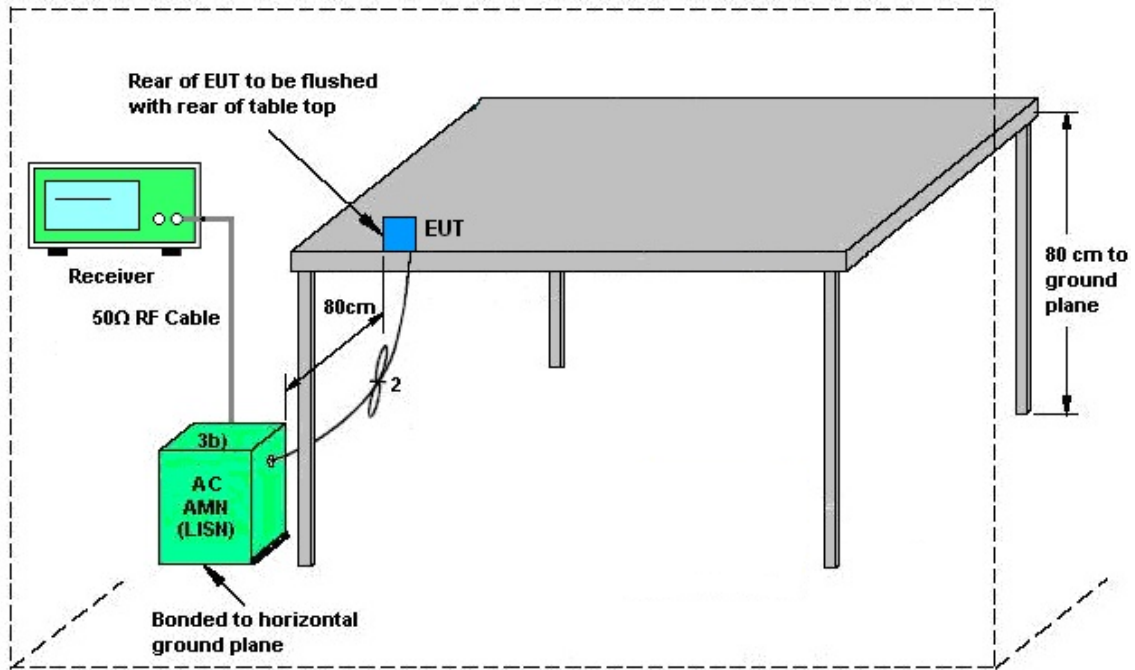

AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 10, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Nov. 10, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Nov. 10, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2021	Nov. 10, 2022	Nov. 15, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Nov. 10, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Aug. 01, 2022	Nov. 10, 2022	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Nov. 10, 2022	Dec. 29, 2022	Conduction (CO05-HY)
LOOP Antenna	TESEQ	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Oct. 28, 2022 ~ Nov. 11, 2022	Sep. 19, 2023	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 08, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Oct. 07, 2023	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	Mar. 10, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 30, 2021	Oct. 28, 2022 ~ Nov. 05, 2022	Nov. 29, 2022	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 10, 2021	Oct. 28, 2022 ~ Nov. 05, 2022	Dec. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2021	Oct. 28, 2022 ~ Nov. 08, 2022	Nov. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 09, 2022	Nov. 09, 2022~ Nov. 11, 2022	Nov. 08, 2023	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000 55007	1GHz~18GHz	Jun. 15, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Jun. 14, 2023	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 28, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Jun. 27, 2023	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 07, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Oct. 06, 2023	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 18, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Oct. 17, 2023	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 28, 2022 ~ Nov. 05, 2022	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Oct. 28, 2022 ~ Nov. 05, 2022	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Oct. 28, 2022 ~ Nov. 05, 2022	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Oct. 28, 2022 ~ Nov. 05, 2022	N/A	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53G Low Pass	Sep. 12, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Sep. 11, 2023	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 12, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Sep. 11, 2023	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 12, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Sep. 11, 2023	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900-1000-15000-60SS	SN12	1GHz High Pass Filter	Sep. 12, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Sep. 11, 2023	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303B	TP140325	N/A	Nov. 26, 2021	Oct. 28, 2022 ~ Nov. 05, 2022	Nov. 25, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 10, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 10, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30MHz-18GHz	Mar. 10, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	811852/4	30MHz-18GHz	Mar. 10, 2022	Oct. 28, 2022 ~ Nov. 05, 2022	Mar. 09, 2023	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303B	TP200886	N/A	Mar. 21, 2022	Oct. 20, 2022- Dec. 13, 2022	Mar. 20, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO10 (NO:248)	10MHz~6GHz	Dec. 29, 2021	Oct. 20, 2022- Dec. 13, 2022	Dec. 28, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Aug. 03, 2022	Oct. 20, 2022- Dec. 13, 2022	Aug. 02, 2023	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3 dB
---	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Mina Liu / Ching Chen	Temperature:	21~25	°C
Test Date:	2022/10/20-2022/12/13	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.037	0.682	0.50	Pass
BLE	1Mbps	1	19	2440	1.039	0.684	0.50	Pass
BLE	1Mbps	1	39	2480	1.037	0.690	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	15.50	30.00	2.50	18.00	36.00	Pass
BLE	1Mbps	1	19	2440	15.80	30.00	2.50	18.30	36.00	Pass
BLE	1Mbps	1	39	2480	16.20	30.00	2.50	18.70	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	16.20	1.01	2.50	8.00	Pass
BLE	1Mbps	1	19	2440	16.28	1.10	2.50	8.00	Pass
BLE	1Mbps	1	39	2480	16.32	1.44	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.074	1.352	0.50	Pass
BLE	2Mbps	1	19	2440	2.082	1.332	0.50	Pass
BLE	2Mbps	1	39	2480	2.066	1.348	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	15.70	30.00	2.50	18.20	36.00	Pass
BLE	2Mbps	1	19	2440	16.20	30.00	2.50	18.70	36.00	Pass
BLE	2Mbps	1	39	2480	11.60	30.00	2.50	14.10	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	13.45	-3.19	2.50	8.00	Pass
BLE	2Mbps	1	19	2440	15.64	-0.91	2.50	8.00	Pass
BLE	2Mbps	1	39	2480	9.48	-7.19	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%



## EUT Information

Report NO : 100605-09  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

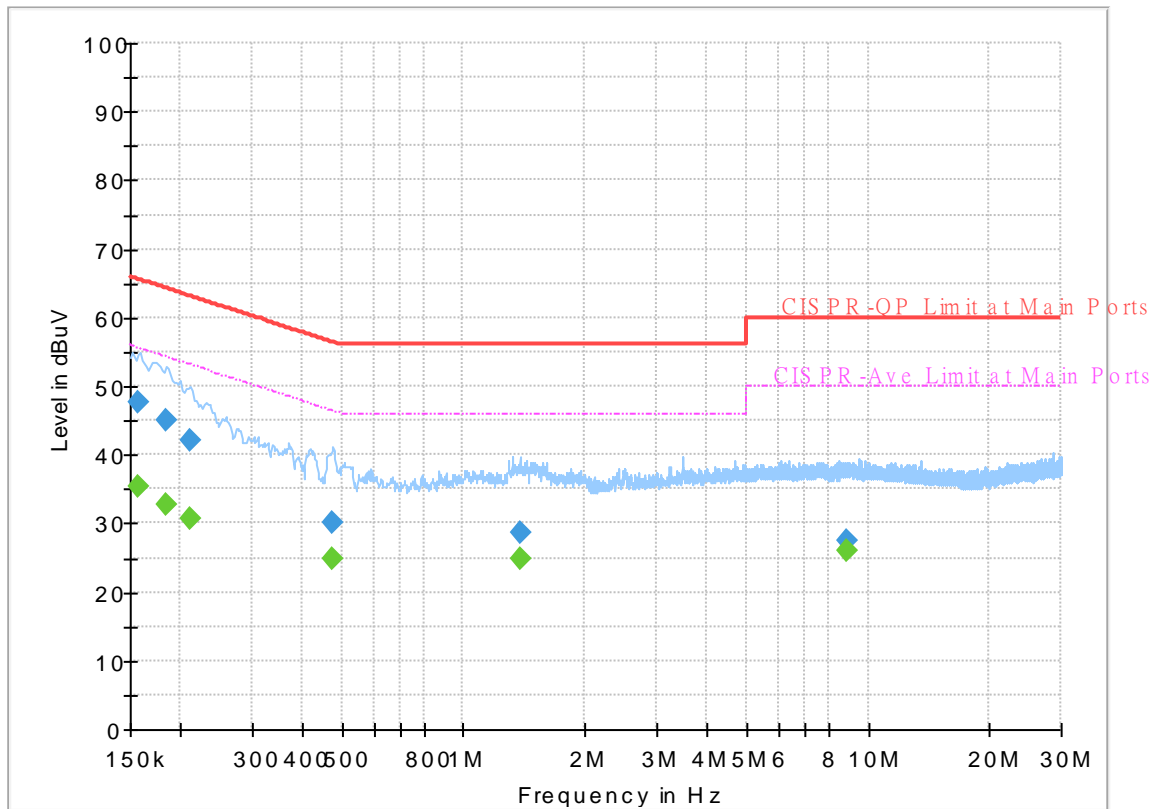


## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	35.44	55.63	20.19	L1	OFF	19.8
0.156750	47.77	---	65.63	17.86	L1	OFF	19.8
0.183750	---	32.86	54.31	21.45	L1	OFF	19.8
0.183750	44.95	---	64.31	19.36	L1	OFF	19.8
0.210750	---	30.70	53.18	22.48	L1	OFF	19.8
0.210750	42.15	---	63.18	21.03	L1	OFF	19.8
0.476250	---	24.71	46.40	21.69	L1	OFF	19.8
0.476250	30.03	---	56.40	26.37	L1	OFF	19.8
1.376250	---	24.97	46.00	21.03	L1	OFF	19.9
1.376250	28.79	---	56.00	27.21	L1	OFF	19.9
8.839500	---	25.99	50.00	24.01	L1	OFF	20.2
8.839500	27.46	---	60.00	32.54	L1	OFF	20.2

## EUT Information

Report NO : 100605-09  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

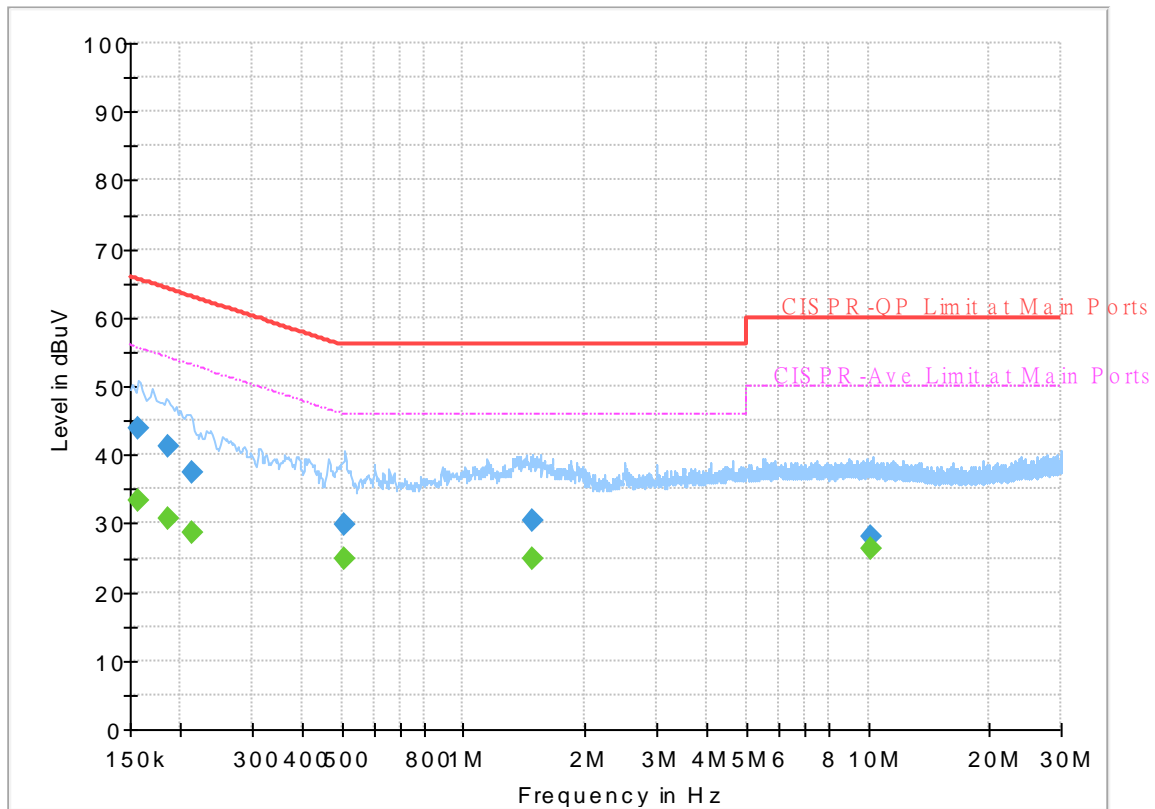

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	33.41	55.63	22.22	N	OFF	19.8
0.156750	43.95	---	65.63	21.68	N	OFF	19.8
0.186000	---	30.57	54.21	23.64	N	OFF	19.8
0.186000	41.28	---	64.21	22.93	N	OFF	19.8
0.213000	---	28.56	53.09	24.53	N	OFF	19.8
0.213000	37.33	---	63.09	25.76	N	OFF	19.8
0.507750	---	24.94	46.00	21.06	N	OFF	19.8
0.507750	29.84	---	56.00	26.16	N	OFF	19.8
1.484250	---	24.75	46.00	21.25	N	OFF	19.9
1.484250	30.32	---	56.00	25.68	N	OFF	19.9
10.144500	---	26.20	50.00	23.80	N	OFF	20.2
10.144500	27.95	---	60.00	32.05	N	OFF	20.2



### Appendix C. Radiated Spurious Emission

Test Engineer :	Yuan Lee, Fu Chen and Troye Hsieh	Temperature :	19.8~21.8°C
		Relative Humidity :	57.2~68.8%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		2344.125	52.93	-21.07	74	42.36	27.3	17.23	33.96	299	123	P	H	
		2378.565	42.89	-11.11	54	32.16	27.41	17.27	33.95	299	123	A	H	
	*	2402	110.13	-	-	99.27	27.51	17.3	33.95	299	123	P	H	
	*	2402	109.07	-	-	98.21	27.51	17.3	33.95	299	123	A	H	
													H	
													H	
			2317.14	52.62	-21.38	74	42.1	27.3	17.19	33.97	356	187	P	V
			2379.72	42.87	-11.13	54	32.13	27.42	17.27	33.95	356	187	A	V
	*		2402	105.06	-	-	94.2	27.51	17.3	33.95	356	187	P	V
	*		2402	104.07	-	-	93.21	27.51	17.3	33.95	356	187	A	V
													V	



<b>BLE CH 19 2440MHz</b>		2380.72	52.89	-21.11	74	42.15	27.42	17.27	33.95	304	226	P	H
		2370.32	42.99	-11.01	54	32.3	27.38	17.26	33.95	304	226	A	H
	*	2440	111.43	-	-	100.35	27.66	17.36	33.94	304	226	P	H
	*	2440	110.5	-	-	99.42	27.66	17.36	33.94	304	226	A	H
		2484.16	53.01	-20.99	74	41.73	27.77	17.43	33.92	304	226	P	H
		2496.8	43.5	-10.5	54	32.18	27.79	17.45	33.92	304	226	A	H
		2369.04	52.34	-21.66	74	41.65	27.38	17.26	33.95	152	166	P	V
		2381.04	42.97	-11.03	54	32.22	27.42	17.28	33.95	152	166	A	V
	*	2440	105.98	-	-	94.9	27.66	17.36	33.94	152	166	P	V
	*	2440	105.07	-	-	93.99	27.66	17.36	33.94	152	166	A	V
		2492.96	52.66	-21.34	74	41.35	27.79	17.44	33.92	152	166	P	V
		2489.52	43.63	-10.37	54	32.34	27.78	17.43	33.92	152	166	A	V
<b>BLE CH 39 2480MHz</b>	*	2480	109.61	-	-	98.36	27.76	17.42	33.93	325	213	P	H
	*	2480	108.58	-	-	97.33	27.76	17.42	33.93	325	213	A	H
		2483.52	54.92	-19.08	74	43.64	27.77	17.43	33.92	325	213	P	H
		2483.72	45.58	-8.42	54	34.3	27.77	17.43	33.92	325	213	A	H
													H
													H
	*	2480	107.42	-	-	96.17	27.76	17.42	33.93	202	177	P	V
	*	2480	106.52	-	-	95.27	27.76	17.42	33.93	202	177	A	V
		2483.56	53.48	-20.52	74	42.2	27.77	17.43	33.92	202	177	P	V
		2483.52	44.7	-9.3	54	33.42	27.77	17.43	33.92	202	177	A	V
												V	
												V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	39.55	-34.45	74	53.89	32.22	11.38	57.94	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	38.71	-35.29	74	53.05	32.22	11.38	57.94	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 19 2440MHz		4880	40.98	-33.02	74	54.71	32.62	11.65	58	-	-	P	H
		7320	41.25	-32.75	74	49.61	37.02	13.35	58.73	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	40.85	-33.15	74	54.58	32.62	11.65	58	-	-	P
		7320	41.76	-32.24	74	50.12	37.02	13.35	58.73	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	40.88	-33.12	74	54	33.02	11.92	58.06	-	-	P	H
		7440	40.49	-33.51	74	49.01	36.44	13.75	58.71	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	41.31	-32.69	74	54.43	33.02	11.92	58.06	-	-	P
		7440	40.83	-33.17	74	49.35	36.44	13.75	58.71	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		2375.835	52.83	-21.17	74	42.11	27.4	17.27	33.95	302	222	P	H	
		2368.8	44.45	-9.55	54	33.76	27.38	17.26	33.95	302	222	A	H	
	*	2402	110.03	-	-	99.17	27.51	17.3	33.95	302	222	P	H	
	*	2402	108.2	-	-	97.34	27.51	17.3	33.95	302	222	A	H	
													H	
														H
			2358.3	52.56	-21.44	74	41.94	27.33	17.25	33.96	245	187	P	V
			2381.82	44.36	-9.64	54	33.6	27.43	17.28	33.95	245	187	A	V
	*		2402	102.97	-	-	92.11	27.51	17.3	33.95	245	187	P	V
	*		2402	101.08	-	-	90.22	27.51	17.3	33.95	245	187	A	V
														V
														V
BLE CH 19 2440MHz		2376.72	51.86	-22.14	74	41.13	27.41	17.27	33.95	296	219	P	H	
		2382.16	44.4	-9.6	54	33.64	27.43	17.28	33.95	296	219	A	H	
	*	2440	112.01	-	-	100.93	27.66	17.36	33.94	296	219	P	H	
	*	2440	110.35	-	-	99.27	27.66	17.36	33.94	296	219	A	H	
			2485.2	52.96	-21.04	74	41.68	27.77	17.43	33.92	296	219	P	H
			2492.08	45	-9	54	33.7	27.78	17.44	33.92	296	219	A	H
			2361.2	52.29	-21.71	74	41.66	27.34	17.25	33.96	259	180	P	V
			2364.4	44.1	-9.9	54	33.45	27.36	17.25	33.96	259	180	A	V
	*		2440	106.39	-	-	95.31	27.66	17.36	33.94	259	180	P	V
	*		2440	104.69	-	-	93.61	27.66	17.36	33.94	259	180	A	V
			2485.2	52.49	-21.51	74	41.21	27.77	17.43	33.92	259	180	P	V
			2495.12	45.12	-8.88	54	33.81	27.79	17.44	33.92	259	180	A	V





<b>BLE CH 39 2480MHz</b>	*	2480	102.28	-	-	91.03	27.76	17.42	33.93	300	213	P	H
	*	2480	100.17	-	-	88.92	27.76	17.42	33.93	300	213	A	H
		2483.52	59.87	-14.13	74	48.59	27.77	17.43	33.92	300	213	P	H
		2483.52	52.34	-1.66	54	41.06	27.77	17.43	33.92	300	213	A	H
													H
													H
	*	2480	99.76	-	-	88.51	27.76	17.42	33.93	250	177	P	V
	*	2480	97.86	-	-	86.61	27.76	17.42	33.93	250	177	A	V
		2483.52	58.6	-15.4	74	47.32	27.77	17.43	33.92	250	177	P	V
		2483.52	50.81	-3.19	54	39.53	27.77	17.43	33.92	250	177	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	38.87	-35.13	74	53.21	32.22	11.38	57.94	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	39.13	-34.87	74	53.47	32.22	11.38	57.94	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 19 2440MHz		4880	39.5	-34.5	74	53.23	32.62	11.65	58	-	-	P	H
		7320	40.7	-33.3	74	49.06	37.02	13.35	58.73	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	40.47	-33.53	74	54.2	32.62	11.65	58	-	-	P
		7320	41.65	-32.35	74	50.01	37.02	13.35	58.73	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	40.06	-33.94	74	53.18	33.02	11.92	58.06	-	-	P	H
		7440	41.33	-32.67	74	49.85	36.44	13.75	58.71	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	42.34	-31.66	74	55.46	33.02	11.92	58.06	-	-	P
		7440	39.9	-34.1	74	48.42	36.44	13.75	58.71	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission after 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		21608	39.33	-34.67	74	58.7	38.1	-2.77	54.7	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			22532	38.82	-35.18	74	58.81	38.33	-3.85	54.47	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		30	25.64	-14.36	40	33.11	23.92	0.97	32.36	-	-	P	H	
		53.28	26.09	-13.91	40	44.85	12.63	1.09	32.48	-	-	P	H	
		120.21	25.15	-18.35	43.5	38.52	17.28	1.76	32.41	-	-	P	H	
		510.15	30.22	-15.78	46	35.2	23.76	3.48	32.22	-	-	P	H	
		948.59	33.2	-12.8	46	29.2	30.1	4.8	30.9	-	-	P	H	
		980.6	34.62	-19.38	54	30.16	30.3	4.85	30.69	-	-	P	H	
														H
														H
														H
														H
														H
														H
			42.61	31.91	-8.09	40	45.49	17.89	0.97	32.44	-	-	P	V
			120.21	26.32	-17.18	43.5	39.69	17.28	1.76	32.41	-	-	P	V
			510.15	31.58	-14.42	46	36.56	23.76	3.48	32.22	-	-	P	V
			871.96	32.23	-13.77	46	30.41	28.66	4.54	31.38	-	-	P	V
			953.44	33.17	-12.83	46	28.89	30.34	4.81	30.87	-	-	P	V
			986.42	33.92	-20.08	54	29.5	30.21	4.86	30.65	-	-	P	V
														V
														V
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Yuan Lee, Fu Chen and Troye Hsieh	Temperature :	19.8~21.8°C
		Relative Humidity :	57.2~68.8%

### Note symbol





-L	Low channel location
-R	High channel location



<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

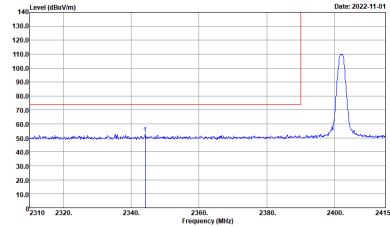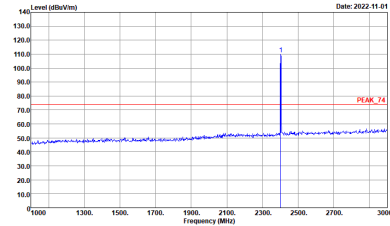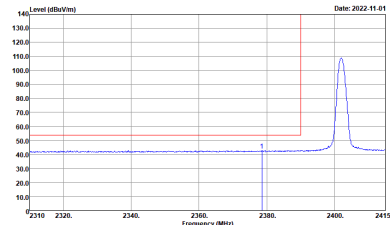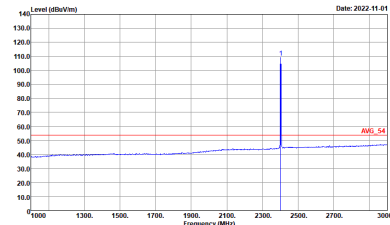BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

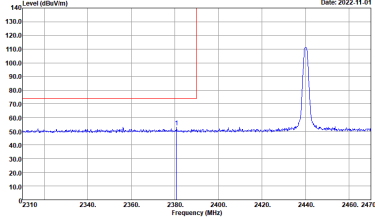
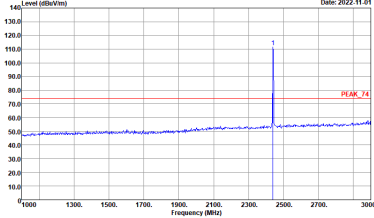
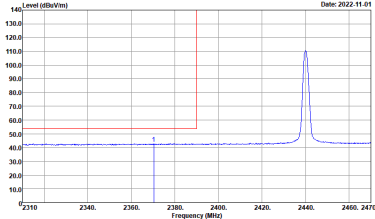
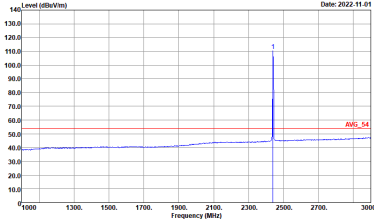


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

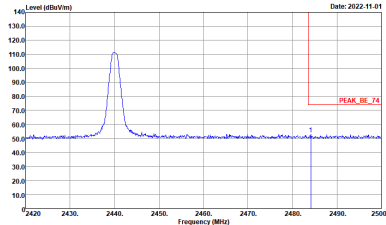
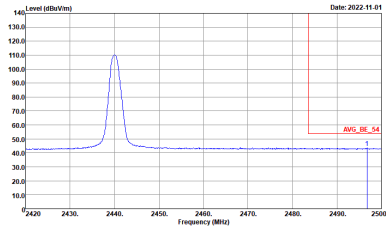


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_04 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

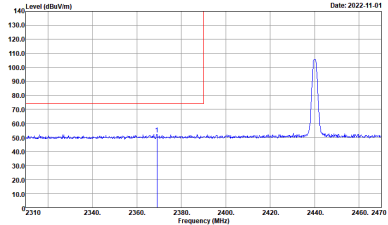
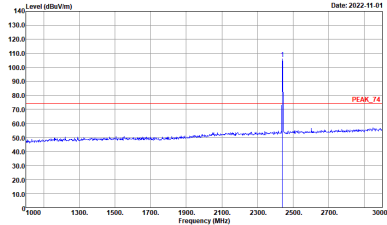
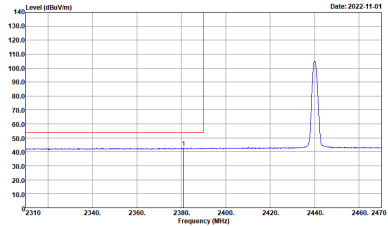
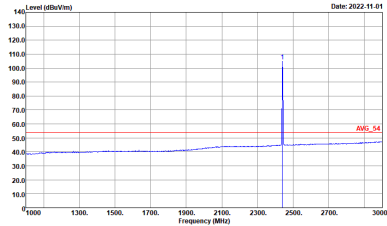


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

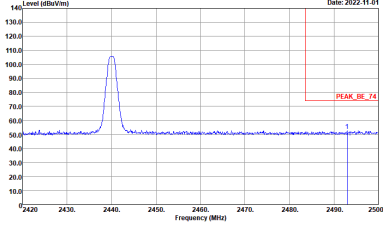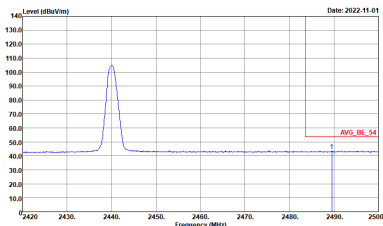

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_04 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

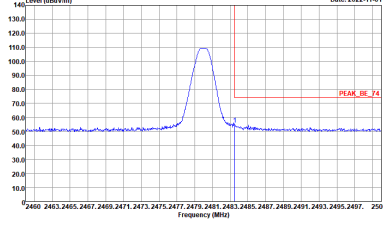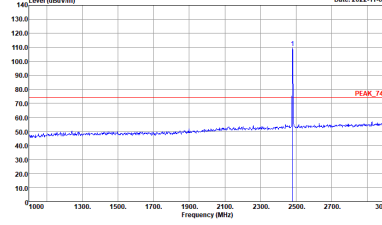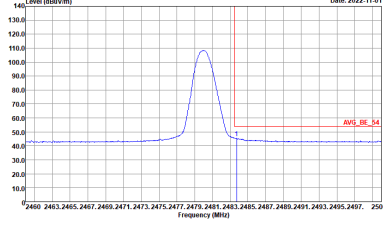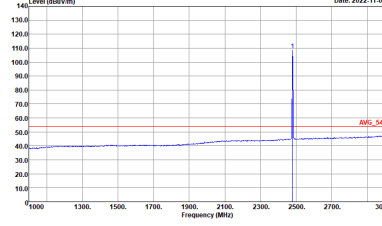

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2022-11-01</p> <p>Level (dBmV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Level (dBmV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-11-01</p> <p>Level (dBmV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Level (dBmV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p>







WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 VERTICAL</p>

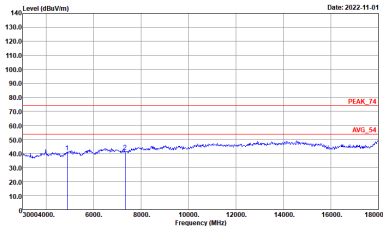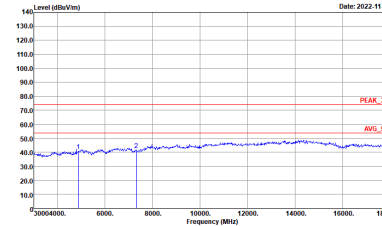

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-4Y Condition : *PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	 <p>Site : 03CH11-4Y Condition : *PEAK_74 3m 91200_1212_220310 VERTICAL</p>

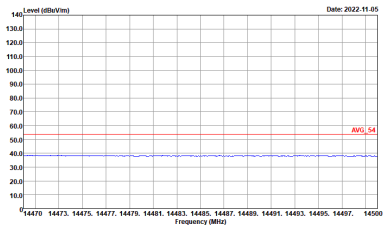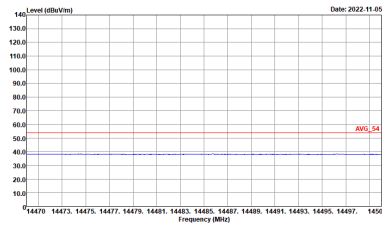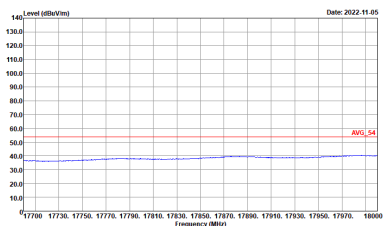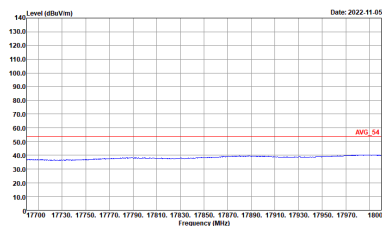

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL</p>	 <p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	 <p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL</p>	 <p>Site : 03CH11-1Y Condition : AVG_54 3m 91200_1212_220310 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-#Y Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-#Y Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Site : 03CH11-1Y Condition : AV6_54 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-1Y Condition : AV6_54 3m 91200_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Site : 03CH11-1Y Condition : AV6_54 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-1Y Condition : AV6_54 3m 91200_1212_220310 VERTICAL</p>



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

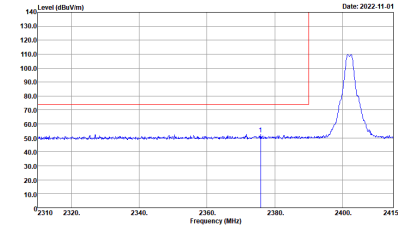
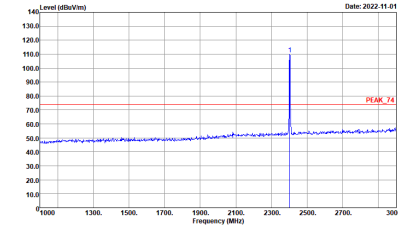
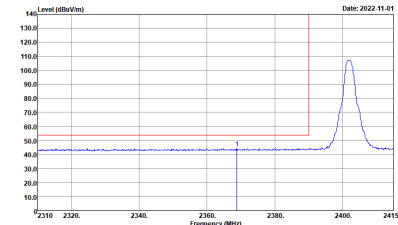
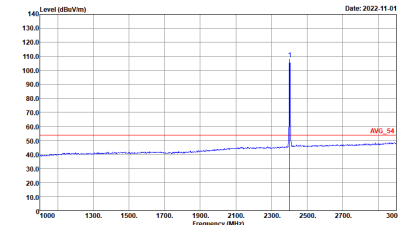
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:10000KHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:10000KHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Date: 2022-11-01</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

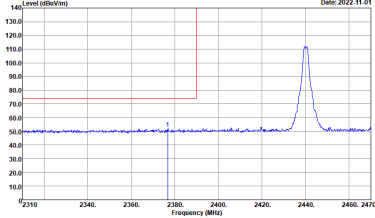
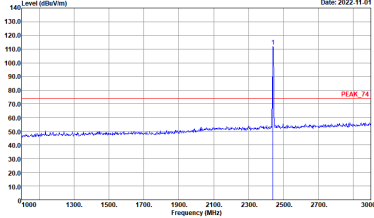
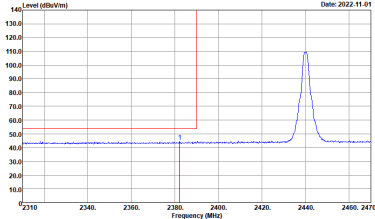
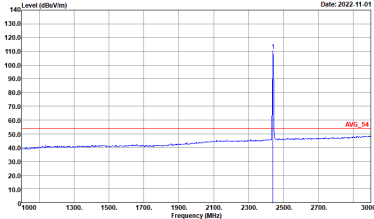


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site : 03CHI-HY Condition : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>

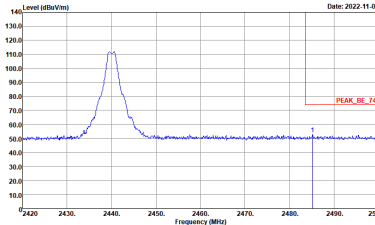
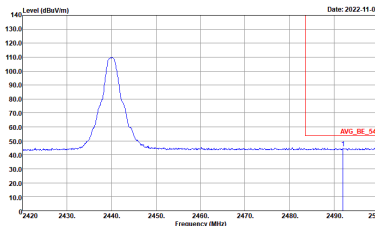


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_04 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	Left blank

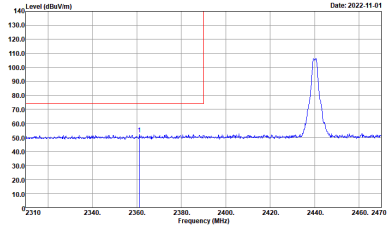
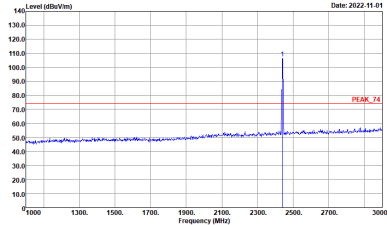
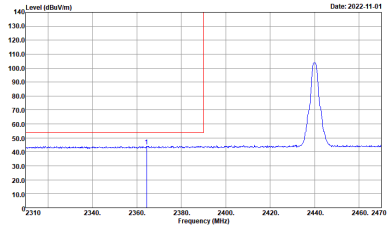
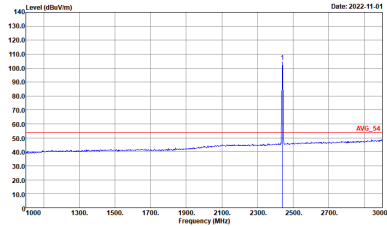


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>



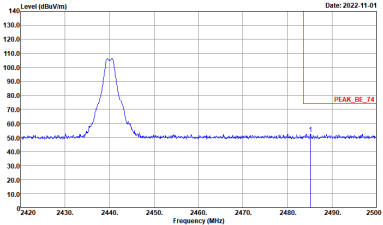
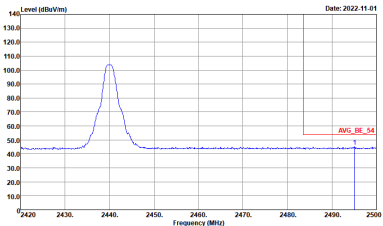


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Vertical		Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : AVG_BE_04 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Left blank</p>

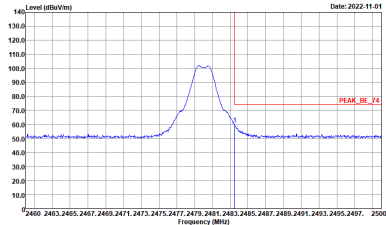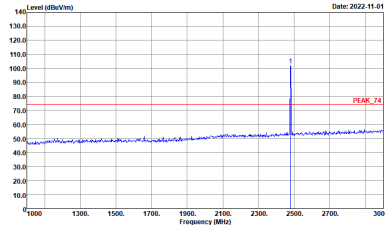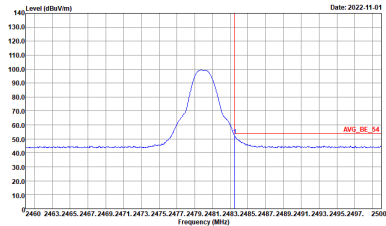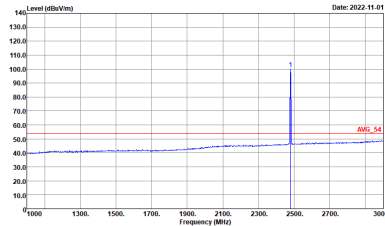

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2022-11-01</p> <p>Site Condition : 03CH11-HY : PEAK_BE_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site Condition : 03CH11-HY : PEAK_74 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2022-11-01</p> <p>Site Condition : 03CH11-HY : AVG_BE_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Date: 2022-11-01</p> <p>Site Condition : 03CH11-HY : AVG_54 3m 91200_1212_220310 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>

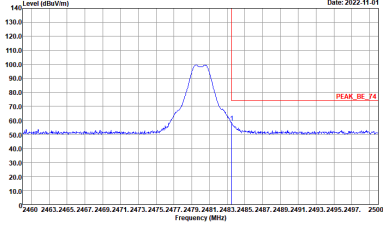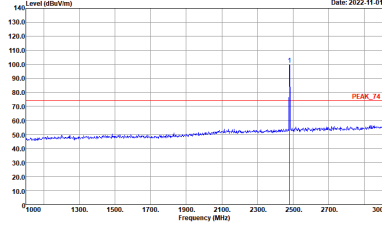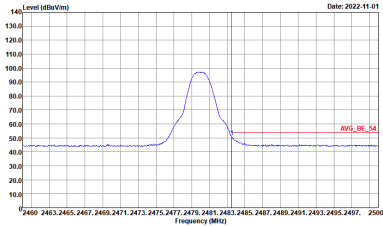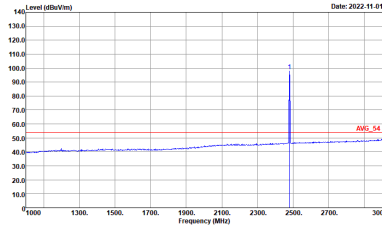

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100Hz. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 100 dBm/100Hz. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 50 dBm/100Hz. The plot includes a red horizontal line labeled 'AVG_BE_54' at the average level.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Level (dBm/100Hz) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 50 dBm/100Hz. The plot includes a red horizontal line labeled 'AVG_54' at the average level.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1212_220310 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1212_220310 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>

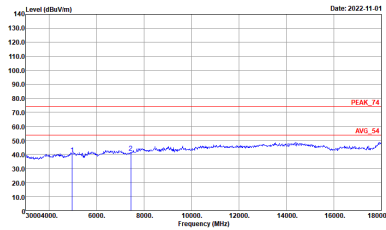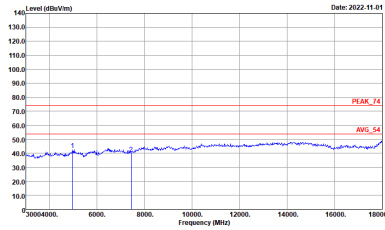

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : *PEAK_74 3m 91200_1212_220310 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition : *PEAK_74 3m 91200_1212_220310 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m 9120D_1212_220310 VERTICAL</p>



Emission after 18GHz  
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 1m SHF ANT_9170_00993 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 1m SHF ANT_9170_00993 VERTICAL</p>




Emission below 1GHz
2.4GHz BLE (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot showing Level (dBuV/m) vs Frequency (MHz) for the 2.4GHz BLE LF test. The plots show a red line for the limit and a blue line for the measured signal. The measured signal is consistently below the limit across the frequency range.

QP / Peak



Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	60.26	376	2.66	3kHz
Bluetooth - LE for 2Mbps	30.99	194	5.15	10kHz

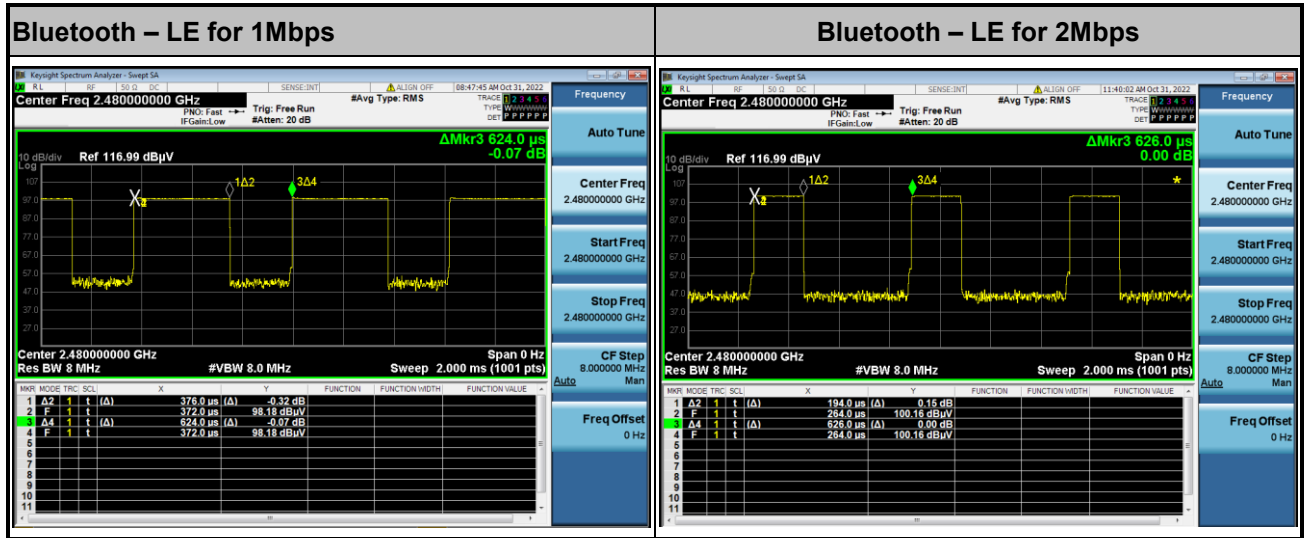

— THE END —