

## #01\_WLAN2.4GHz\_802.11b 1Mbps\_Top Side\_0mm\_Ch11

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1.016

Medium: HSL\_2450\_221108 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.801$  S/m;  $\epsilon_r = 39.202$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.05, 8.05, 8.05) @ 2462 MHz; Calibrated: 2022/1/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.89 W/kg

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.00 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.08 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.378 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 34.2%

Maximum value of SAR (measured) = 2.17 W/kg

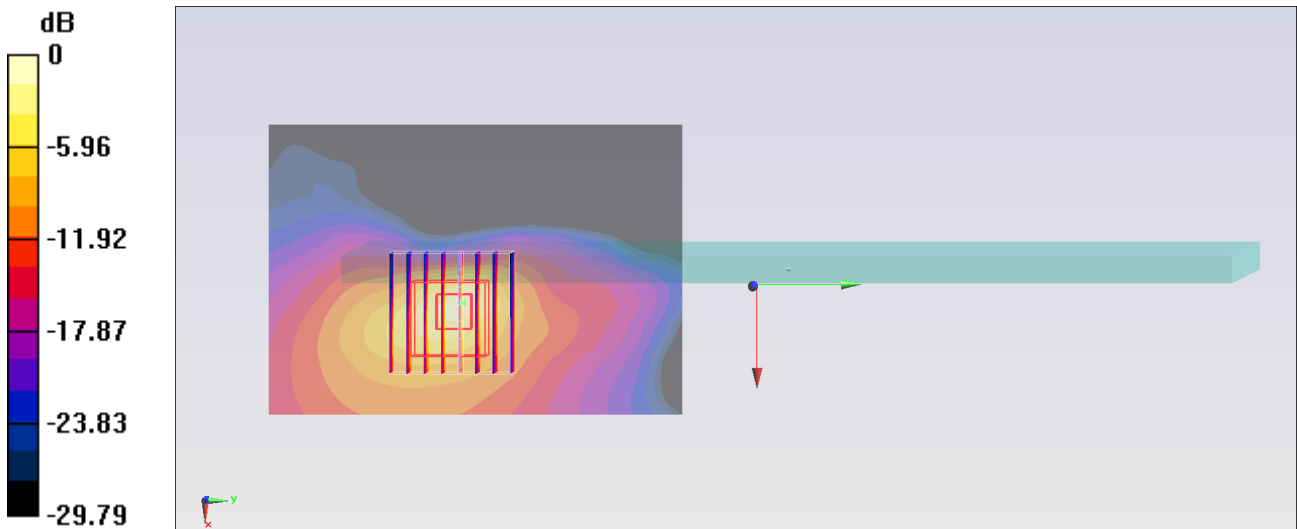

0 dB = 2.17 W/kg = 3.36 dBW/kg

**#02\_WLAN5GHz\_802.11a 6Mbps\_Top Side\_0mm\_Ch60**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.097

Medium: HSL\_5G\_221120 Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.67$  S/m;  $\epsilon_r = 36.324$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.47, 5.47, 5.47) @ 5300 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: ELI V4.0; Type: QD OVA 001 Bx; Serial: 1029
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.32 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.299 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.32 W/kg

**SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.295 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 2.03 W/kg

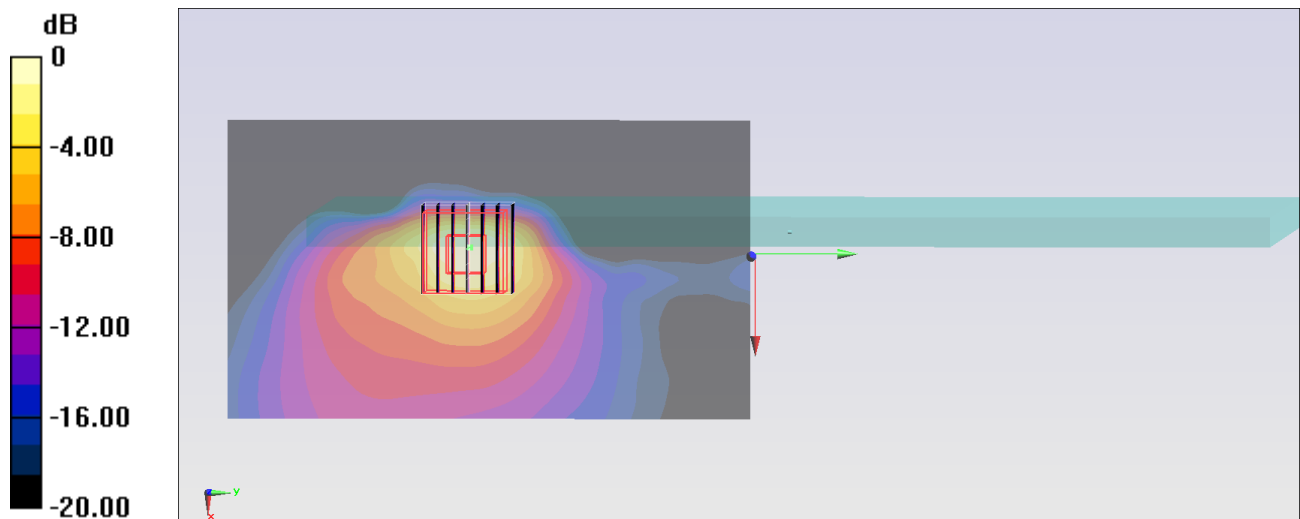

0 dB = 2.03 W/kg = 3.07 dBW/kg

**#03\_WLAN5GHz\_802.11a 6Mbps\_Top Side\_0mm\_Ch100**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.097

Medium: HSL\_5G\_221120 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.873$  S/m;  $\epsilon_r = 36.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.95, 4.95, 4.95) @ 5500 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: ELI V4.0; Type: QD OVA 001 Bx; Serial: 1029
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.76 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.07 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 3.68 W/kg

**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.299 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 2.16 W/kg

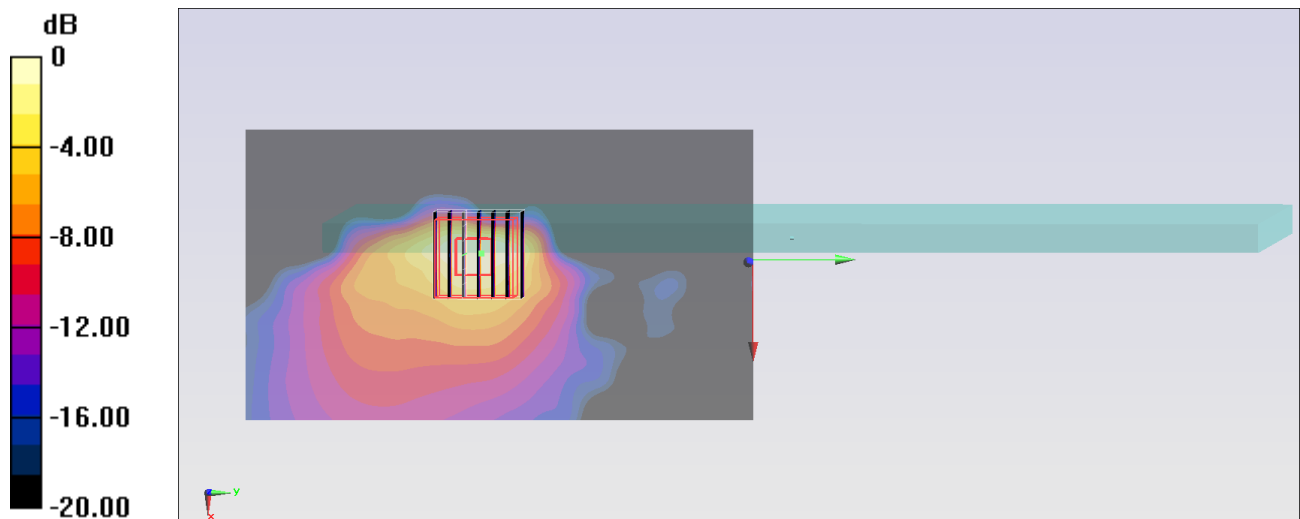

0 dB = 2.16 W/kg = 3.34 dBW/kg

### #04\_WLAN5GHz\_802.11a 6Mbps\_Bottom Side\_0mm\_Ch149


Communication System: 802.11a ; Frequency: 5745 MHz;Duty Cycle: 1:1.097  
Medium: HSL\_5G\_221114 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.171$  S/m;  $\epsilon_r = 36.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.23, 5.23, 5.23) @ 5745 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x161x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.70 W/kg

**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 14.46 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 4.37 W/kg  
**SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.319 W/kg**  
Smallest distance from peaks to all points 3 dB below = 5.6 mm  
Ratio of SAR at M2 to SAR at M1 = 61.5%  
Maximum value of SAR (measured) = 2.29 W/kg

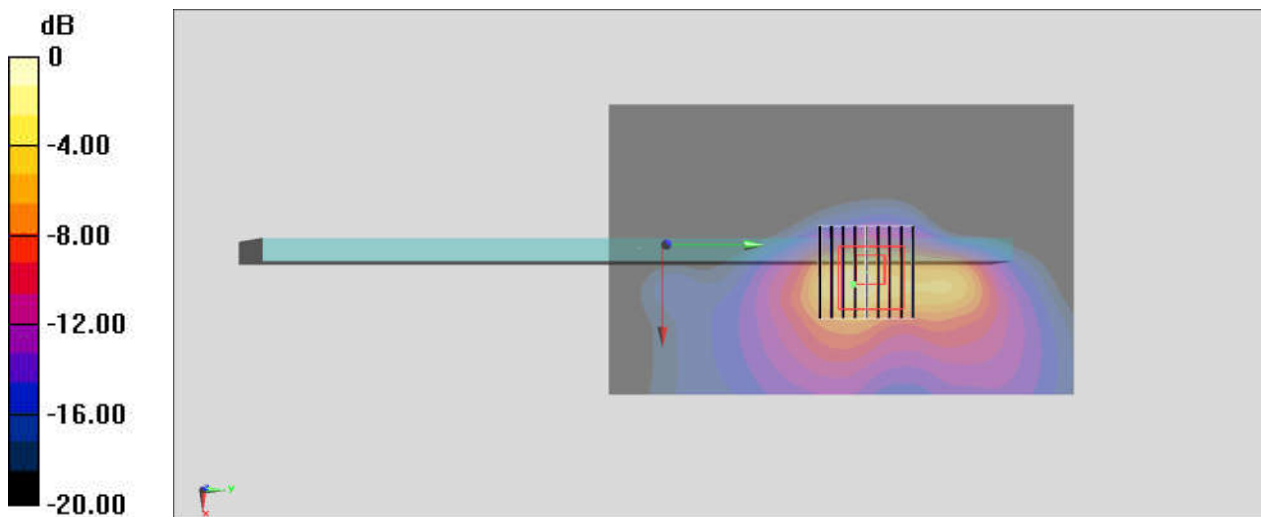

0 dB = 2.29 W/kg = 3.60 dBW/kg

### #05\_Bluetooth\_1Mbps\_Bottom Side\_0mm\_Ch78


Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.302  
Medium: HSL\_2450\_221115 Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.834$  S/m;  $\epsilon_r = 39.042$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.82, 7.82, 7.82) @ 2480 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2055
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.536 W/kg

**Zoom Scan 2 (11x11x8)/Cube 0:** Measurement grid: dx=3mm, dy=3mm, dz=1.4mm  
Reference Value = 8.600 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.751 W/kg  
**SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.094 W/kg**  
Smallest distance from peaks to all points 3 dB below = 5.1 mm  
Ratio of SAR at M2 to SAR at M1 = 72.8%  
Maximum value of SAR (measured) = 0.511 W/kg

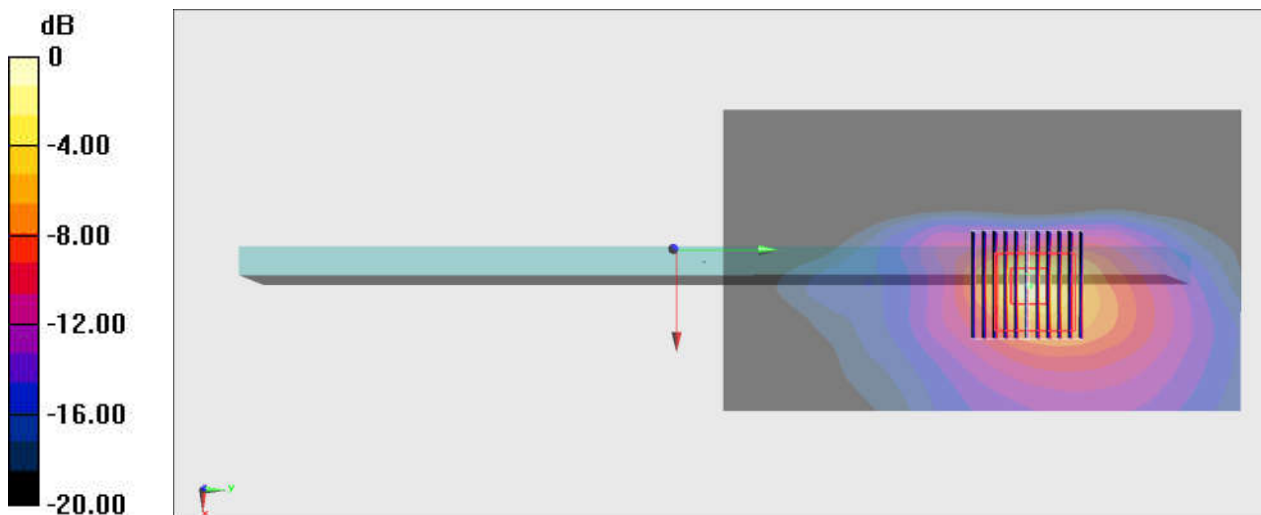

0 dB = 0.511 W/kg = -2.92 dBW/kg