

#01_GSM850_GPRS (4 Tx slots)_Right Cheek_Ch189

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2.08

Medium: HSL_850_221007 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 43.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(9.91, 9.91, 9.91) @ 836.4 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.30 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.68 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.465 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

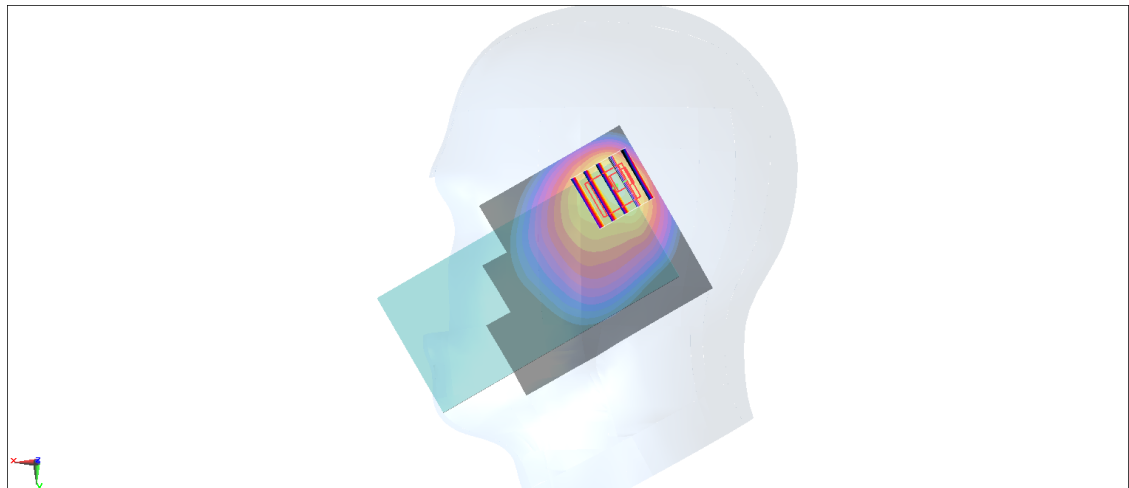

0 dB = 1.47 W/kg = 1.67 dBW/kg

#02_GSM1900_GPRS (4 Tx slots)_Left Cheek_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_221006 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 40.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(8.28, 8.28, 8.28) @ 1909.8 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.568 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.95 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.268 W/kg

Maximum value of SAR (measured) = 0.553 W/kg

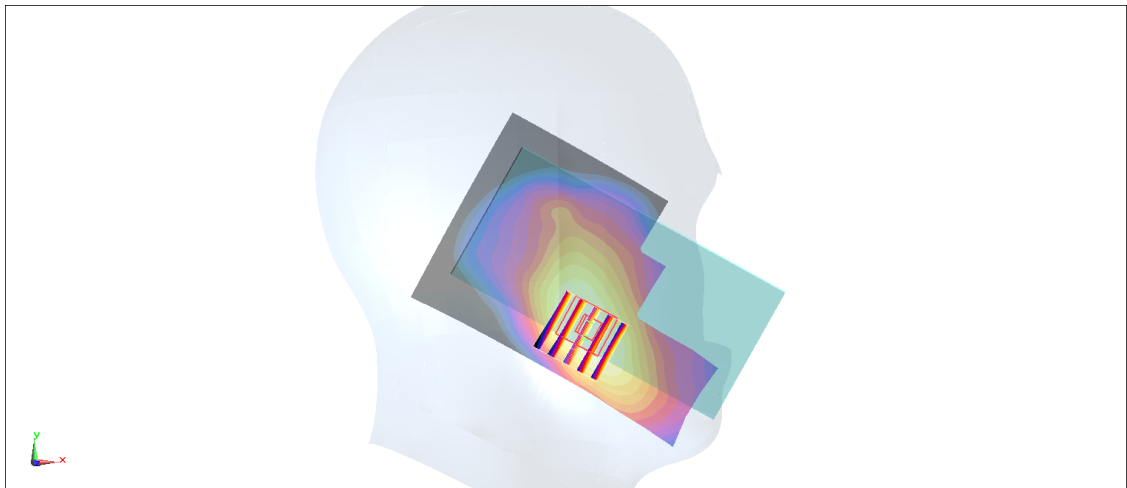

0 dB = 0.553 W/kg = -2.57 dBW/kg

#03_WCDMA II_RMC 12.2Kbps_Left Cheek_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220926 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.25, 8.25, 8.25) @ 1907.6 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.775 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.09 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 0.760 W/kg

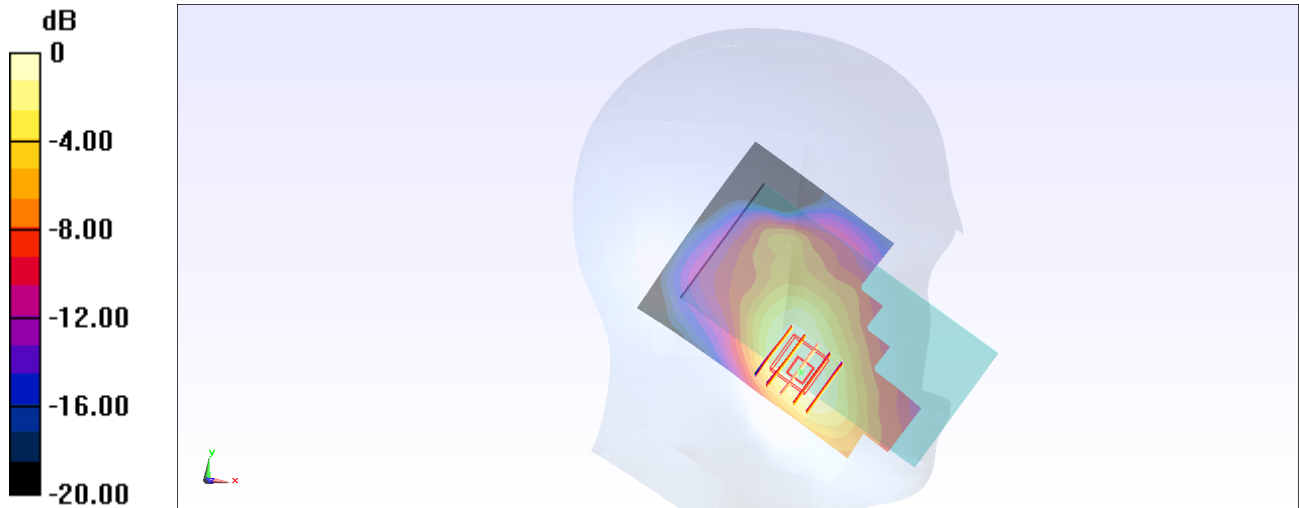

0 dB = 0.760 W/kg = -1.19 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_Ch1413

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: HSL_1750_220925 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.564$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.6, 8.6, 8.6) @ 1732.6 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.603 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.42 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

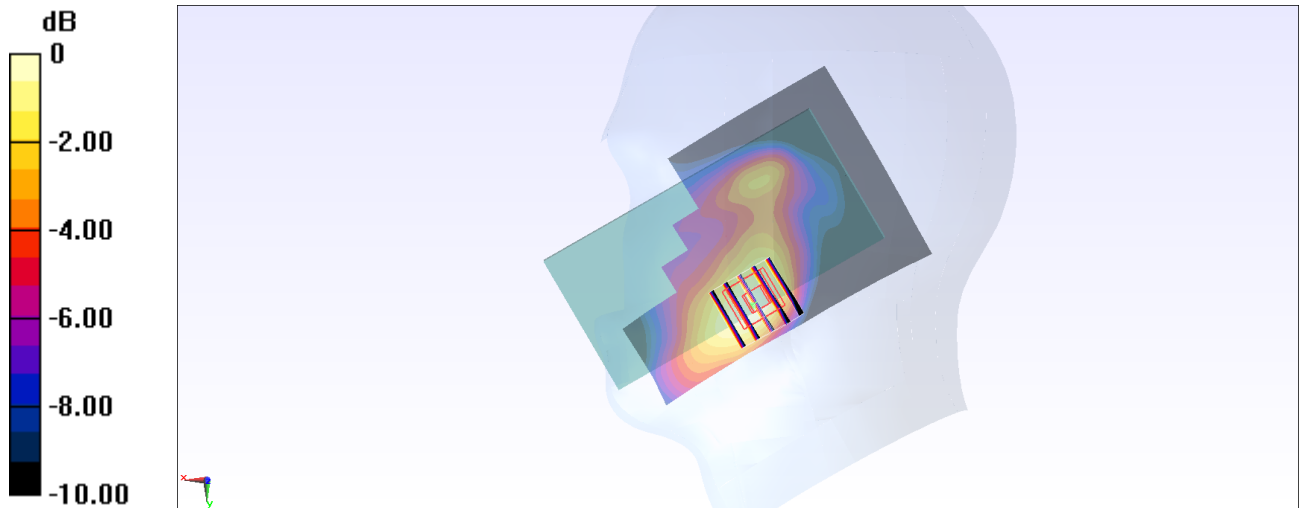

0 dB = 0.569 W/kg = -2.45 dBW/kg

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_221014 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 41.571$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.58, 6.58, 6.58) @ 826.4 MHz; Calibrated: 2022/9/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.912 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.15 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.427 W/kg

Maximum value of SAR (measured) = 0.972 W/kg

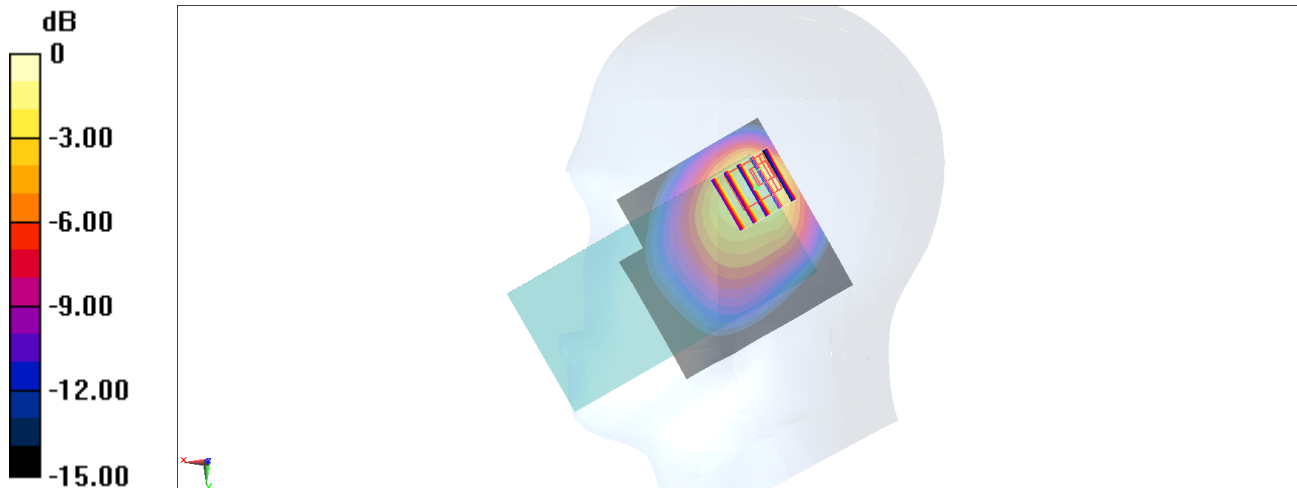

0 dB = 0.972 W/kg = -0.12 dBW/kg

#06_LTE Band 2_20M_QPSK_1_0_Right Cheek_Ch18900

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221017 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(8.56, 8.56, 8.56) @ 1880 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.26 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.99 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

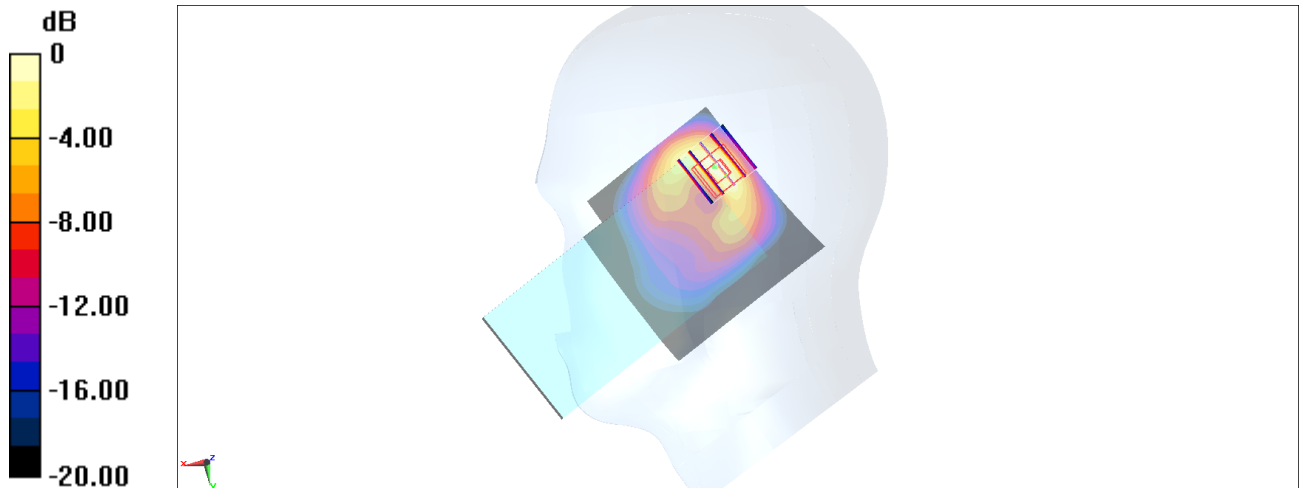

0 dB = 1.26 W/kg = 1.02 dBW/kg

#07_LTE Band 7_20M_QPSK_1_0_Right Cheek_Ch21100

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_220929 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.892$ S/m; $\epsilon_r = 39.769$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.56, 7.56, 7.56) @ 2535 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.23 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.37 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

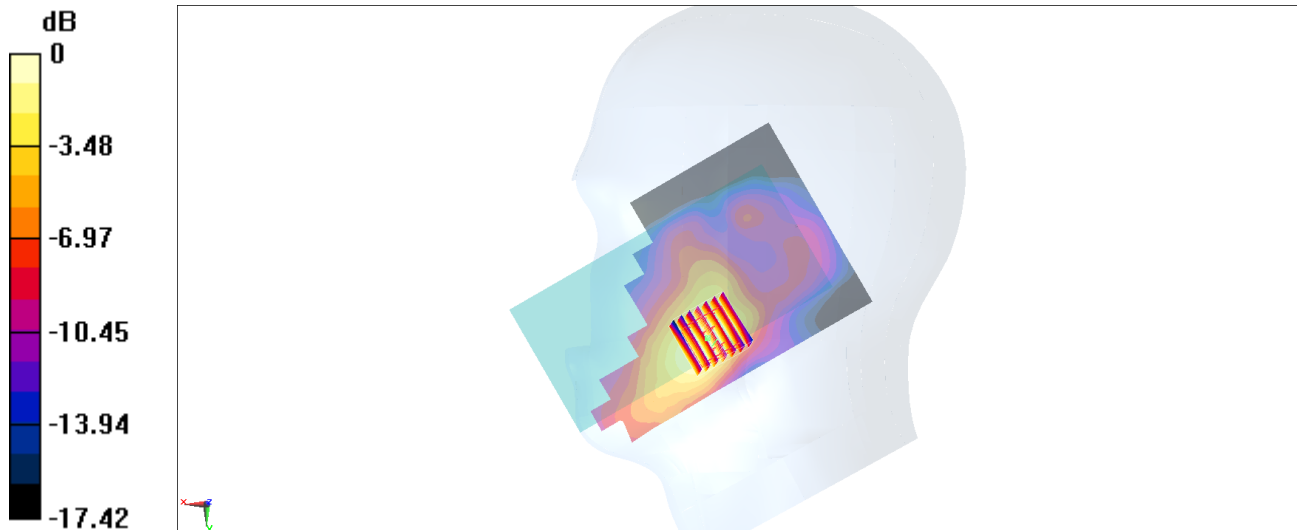

#08_LTE Band 12_10M_QPSK_1_0_Right Cheek_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 42.183$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 707.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.84 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.78 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.470 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

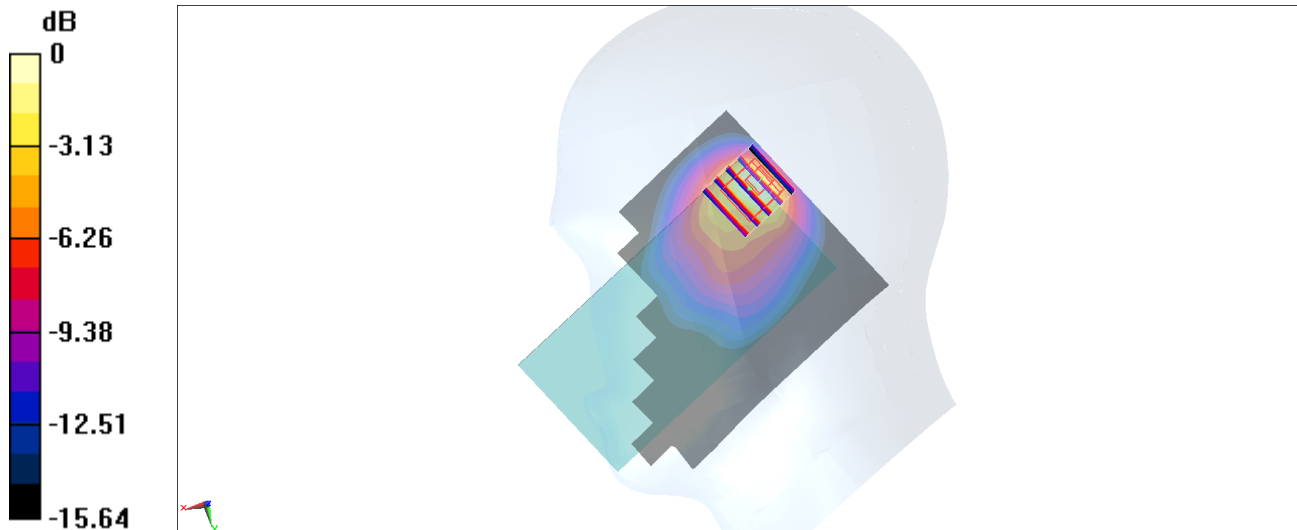

0 dB = 1.84 W/kg = 2.65 dBW/kg

#09_LTE Band 13_10M_QPSK_1_0_Right Cheek_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used: $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.708$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 782 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.74 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.11 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.465 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

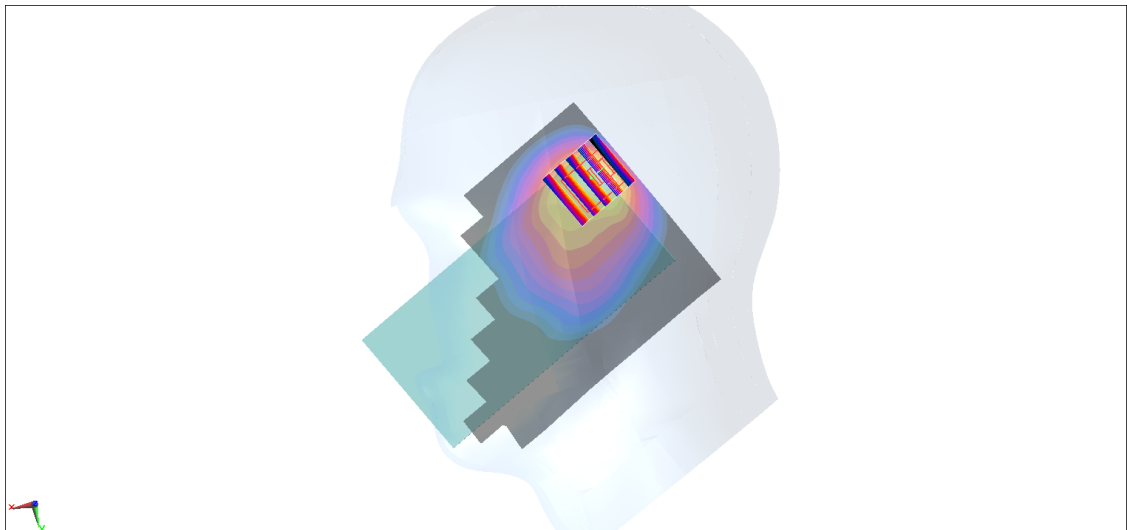

#10_LTE Band 14_10M_QPSK_1_0_Right Cheek_Ch23330

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used: $f = 793$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.67$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 793 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.93 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.64 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.468 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

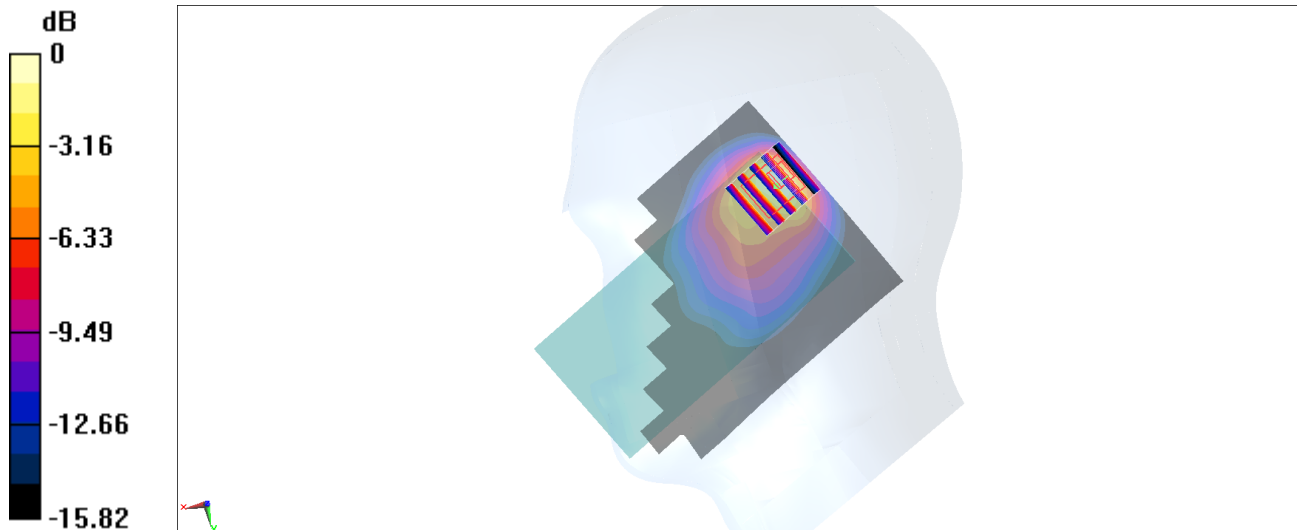

0 dB = 1.93 W/kg = 2.86 dBW/kg

#11_LTE Band 25_20M_QPSK_1_0_Left Cheek_Ch26590

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL_1900_220928 Medium parameters used : $f = 1905$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 40.771$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.57, 8.57, 8.57) @ 1905 MHz; Calibrated: 2021/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2022/1/19
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.739 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.39 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 0.666 W/kg

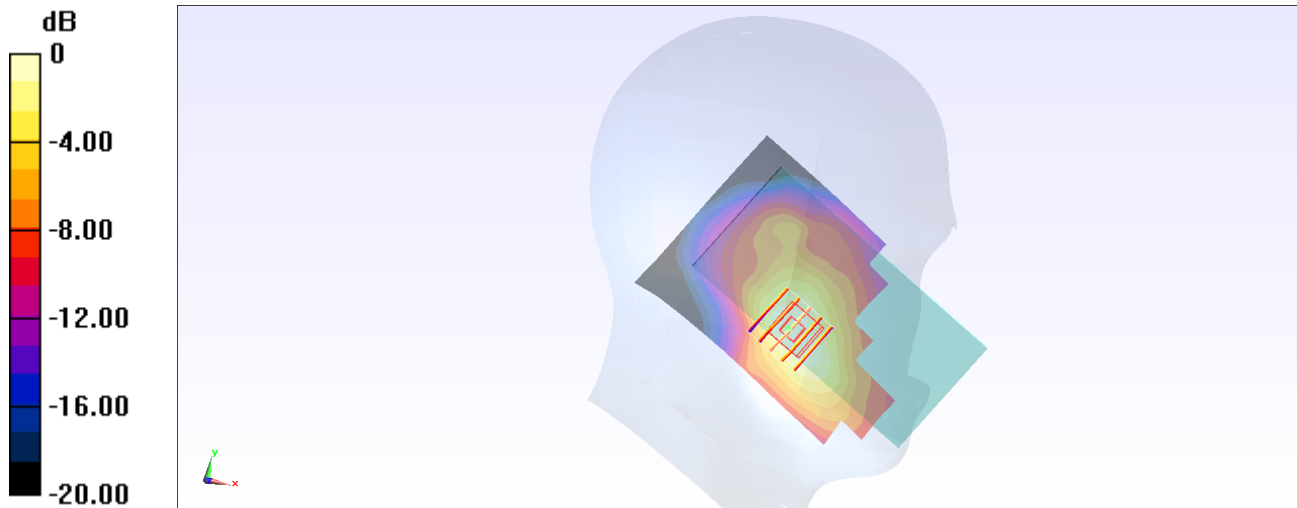

0 dB = 0.666 W/kg = -1.77 dBW/kg

#12_LTE Band 26_15M_QPSK_1_0_Right Cheek_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_221006 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 41.269$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.22, 10.22, 10.22) @ 831.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.90 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.422 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

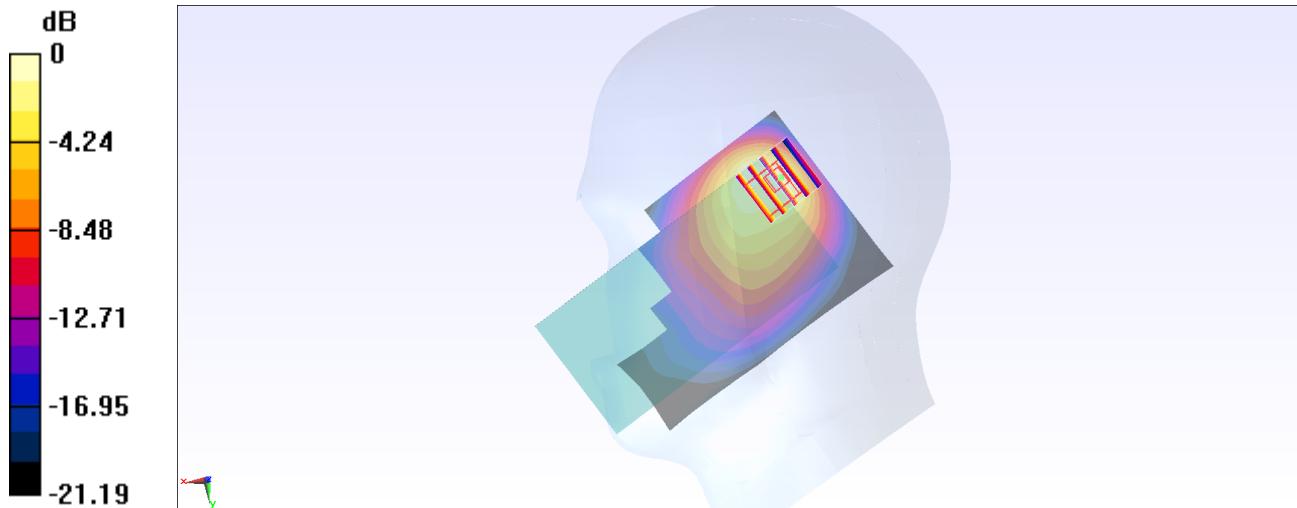

0 dB = 1.22 W/kg = 0.86 dBW/kg

#13_LTE Band 30_10M_QPSK_1_0_Left Cheek_Ch27710

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_221007 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.636$ S/m; $\epsilon_r = 39.381$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.91, 7.91, 7.91) @ 2310 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.907 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.53 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

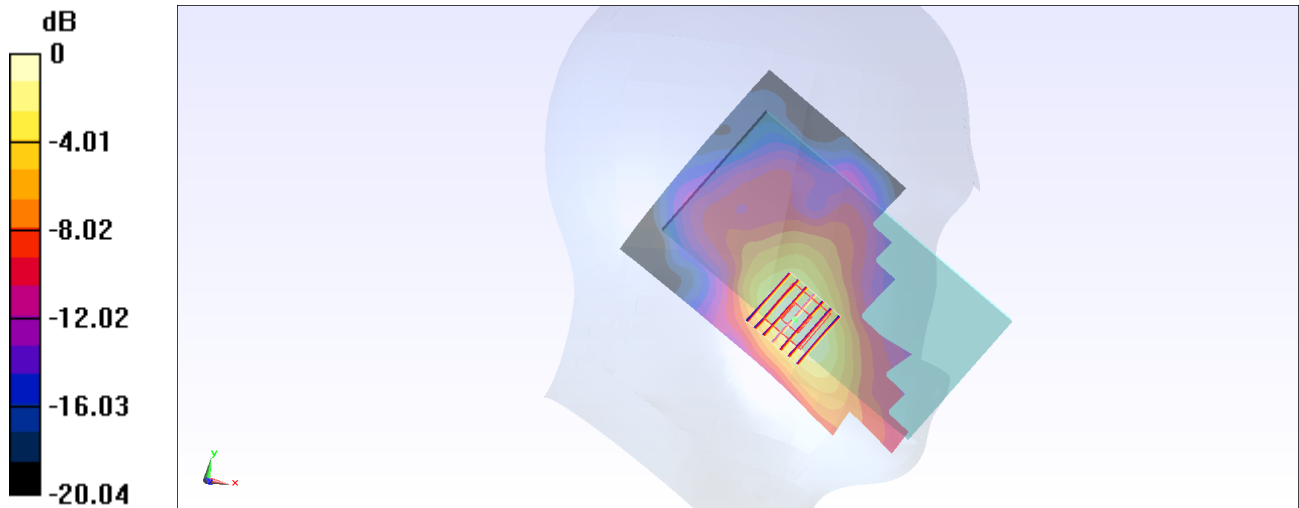

0 dB = 0.907 W/kg = -4.2 dBW/kg

#14_LTE Band 66_20M_QPSK_50_0_Left Cheek_Ch132322

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750_221017 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.337$ S/m; $\epsilon_r = 40.635$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(5.43, 5.43, 5.43) @ 1745 MHz; Calibrated: 2021/11/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.86 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

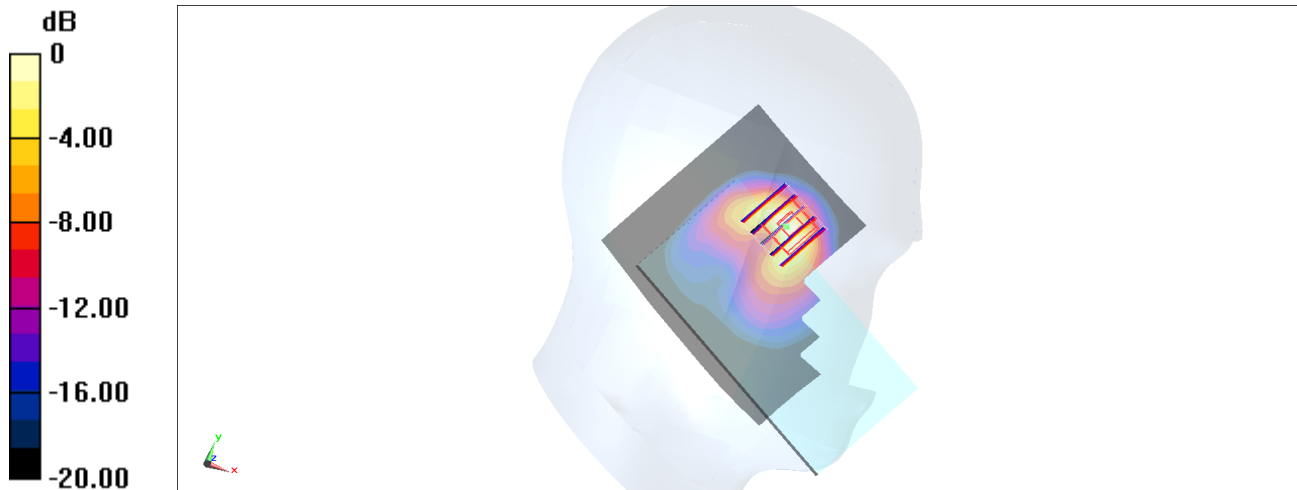

0 dB = 1.13 W/kg = 0.53 dBW/kg

#15_LTE Band 71_20M_QPSK_1_0_Right Cheek_Ch133297

Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used : $f = 680.5$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.295$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 680.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.12 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.06 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.909 W/kg; SAR(10 g) = 0.468 W/kg

Maximum value of SAR (measured) = 1.90 W/kg

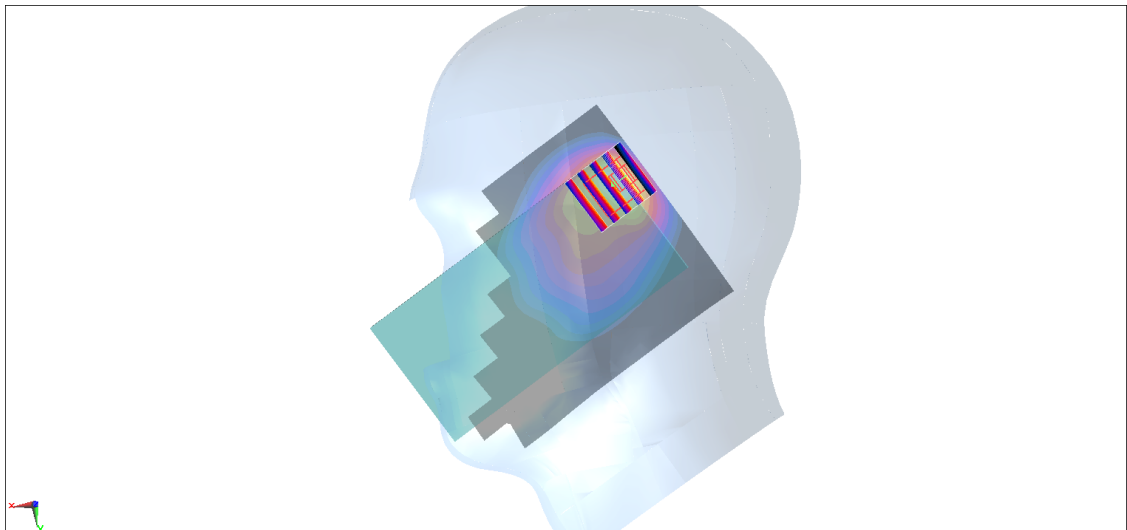

0 dB = 2.12 W/kg = 3.26 dBW/kg

#16_LTE Band 41_20M_QPSK_1_0_Right Cheek_Ch40620

Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_221005 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.58, 7.58, 7.58) @ 2593 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.14 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 0.960 W/kg

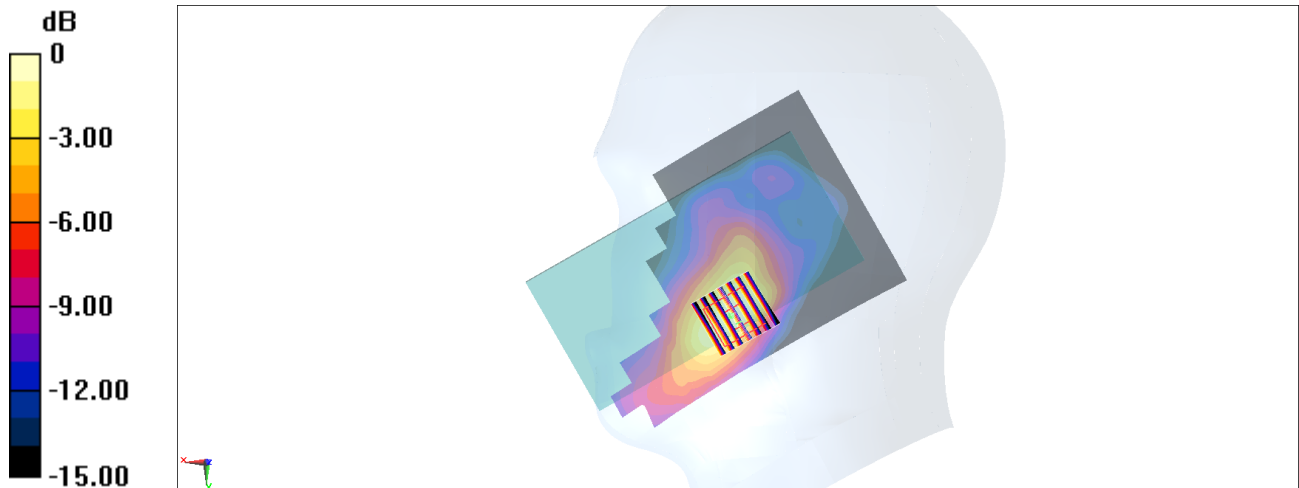

0 dB = 0.960 W/kg = -0.18 dBW/kg

#17_LTE Band 48_20M_QPSK_1_0_Right Cheek_Ch56640

Communication System: LTE; Frequency: 3690 MHz; Duty Cycle: 1:1.59

Medium: HSL_3700_221015 Medium parameters used : $f = 3690$ MHz; $\sigma = 3.137$ S/m; $\epsilon_r = 37.934$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7, 7, 7) @ 3690 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.512 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 10.69 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.599 W/kg

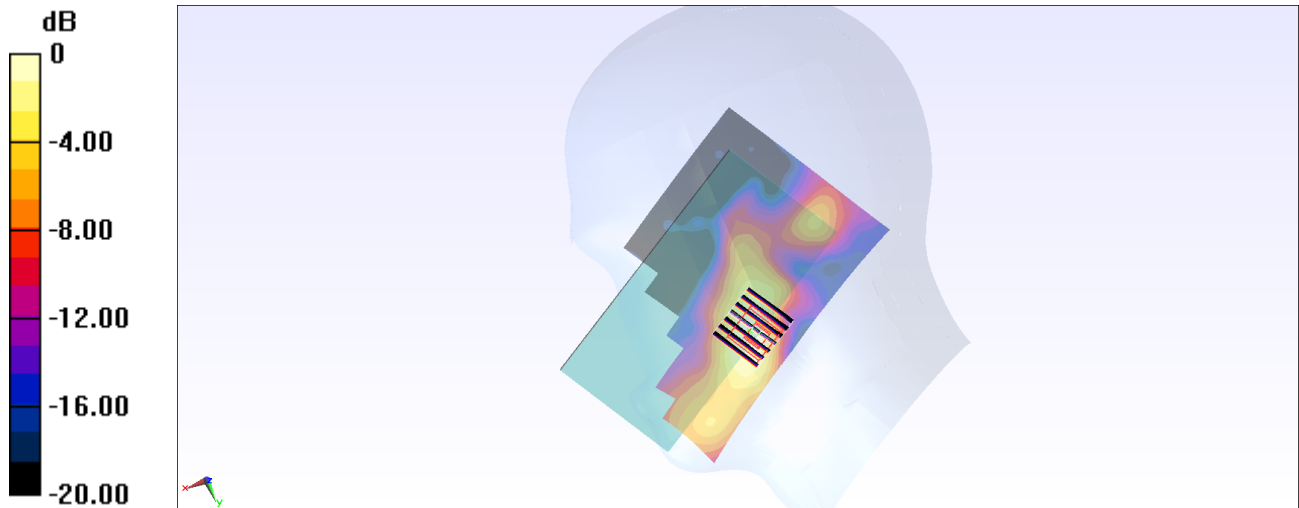

0 dB = 0.512 W/kg = -2.91 dBW/kg

#18_FR1 n5_20M_BPSK_50_28_Right Cheek_Ch167300

Communication System: NR; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_220925 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.92, 9.92, 9.92) @ 836.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.73 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.41 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.445 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

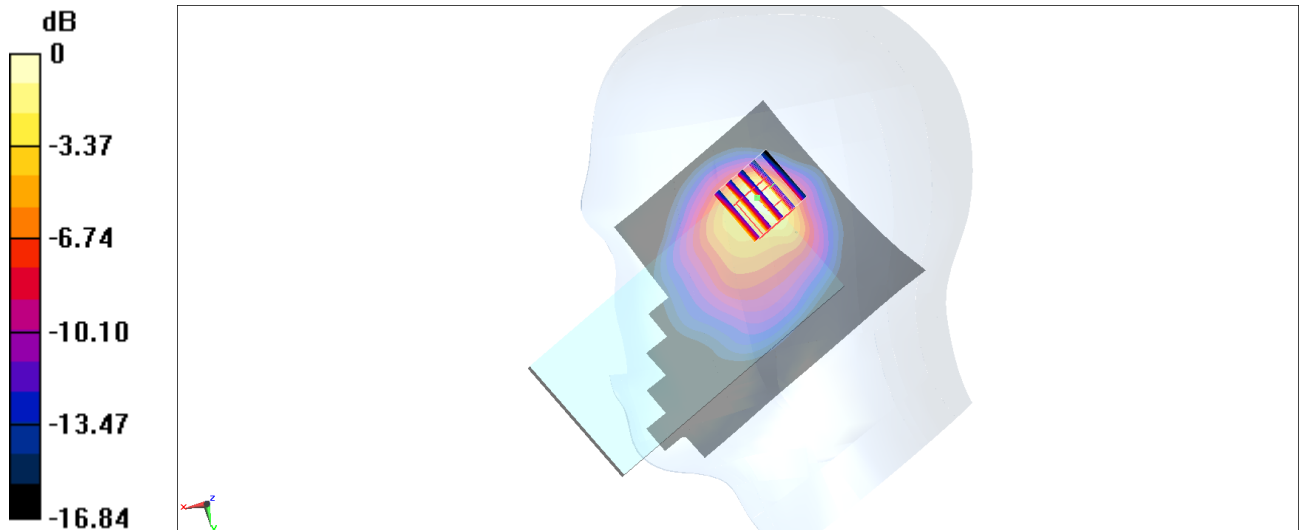

#19_FR1 n7_50M_BPSK_135_68_Right Cheek_Ch507000

Communication System: NR; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221023 Medium parameters used : $f = 2535$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 38.646$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.82, 7.82, 7.82) @ 2535 MHz; Calibrated: 2022/1/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.98 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.466 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

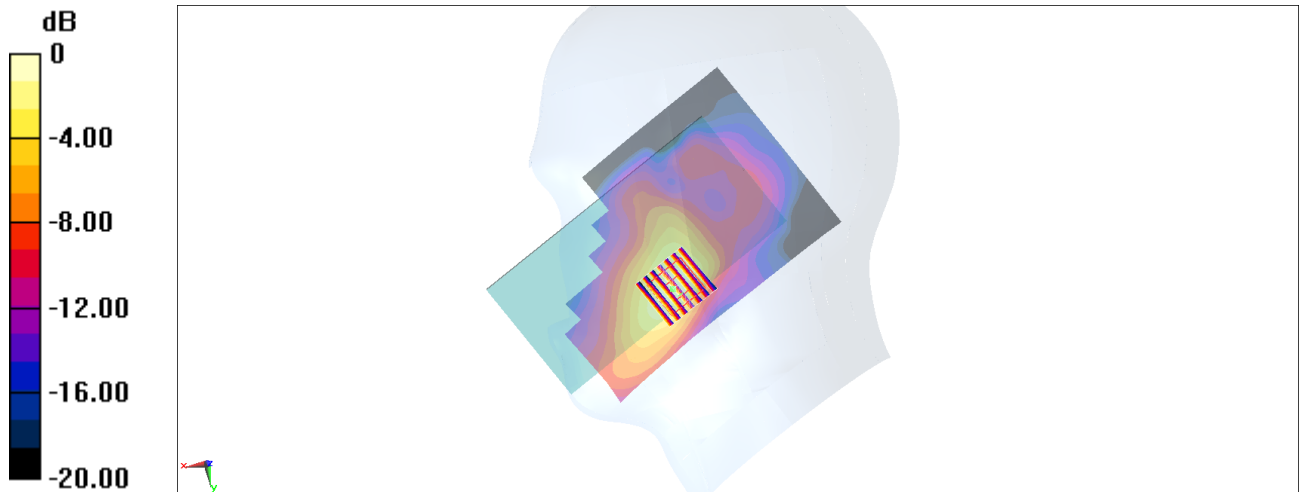

0 dB = 1.42 W/kg = 1.52 dBW/kg

#20_FR1 n12_15M_BPSK_1_1_Right Cheek_Ch141500

Communication System: NR; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_220926 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.114$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 707.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.84 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.43 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.447 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

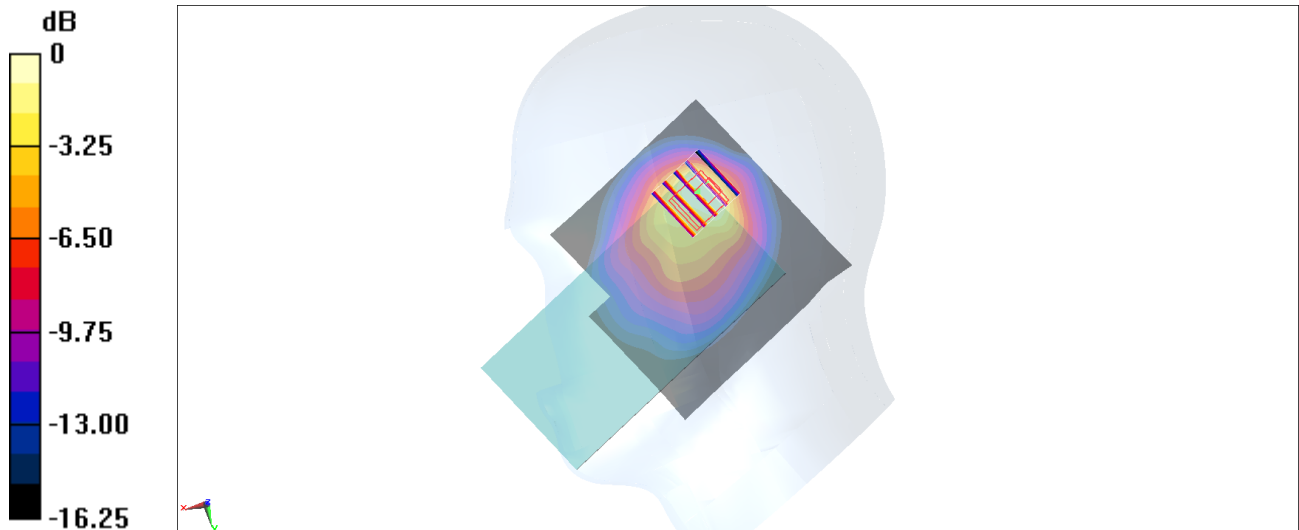

0 dB = 1.31 W/kg = 1.17 dBW/kg

#21_FR1 n14_10M_BPSK_50_0_Right Cheek_Ch158600

Communication System: NR; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_220927 Medium parameters used: $f = 793$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.783$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 793 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.81 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.03 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 1.51 W/kg

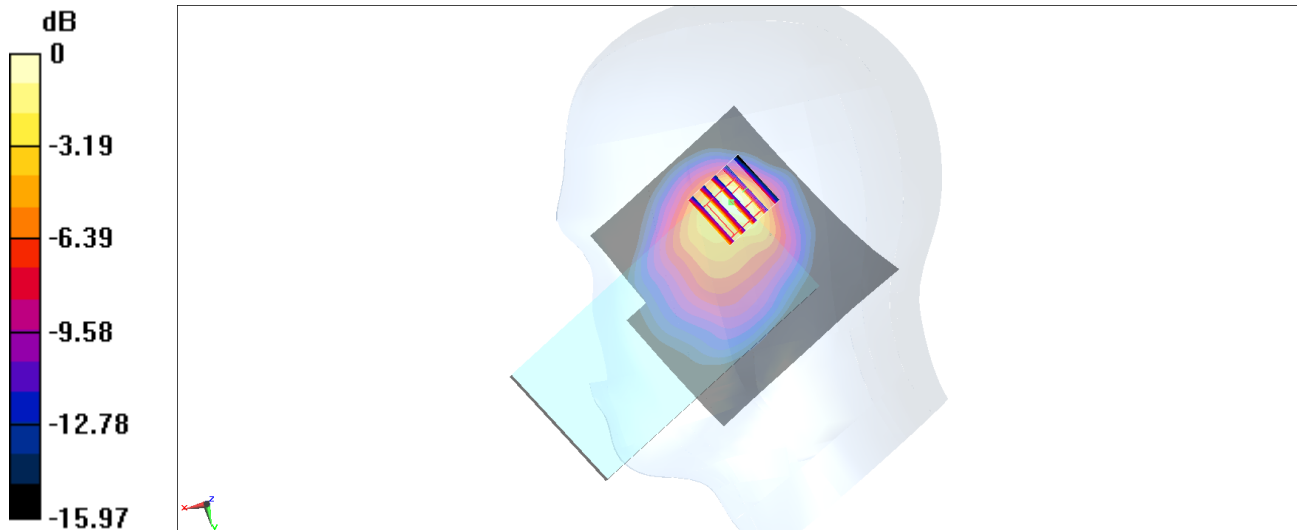

0 dB = 1.81 W/kg = 2.58 dBW/kg

#22_FR1 n25_40M_BPSK_108_54_Right Cheek_Ch376500

Communication System: NR; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221003 Medium parameters used : $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.582$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.45, 8.45, 8.45) @ 1882.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.672 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.63 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

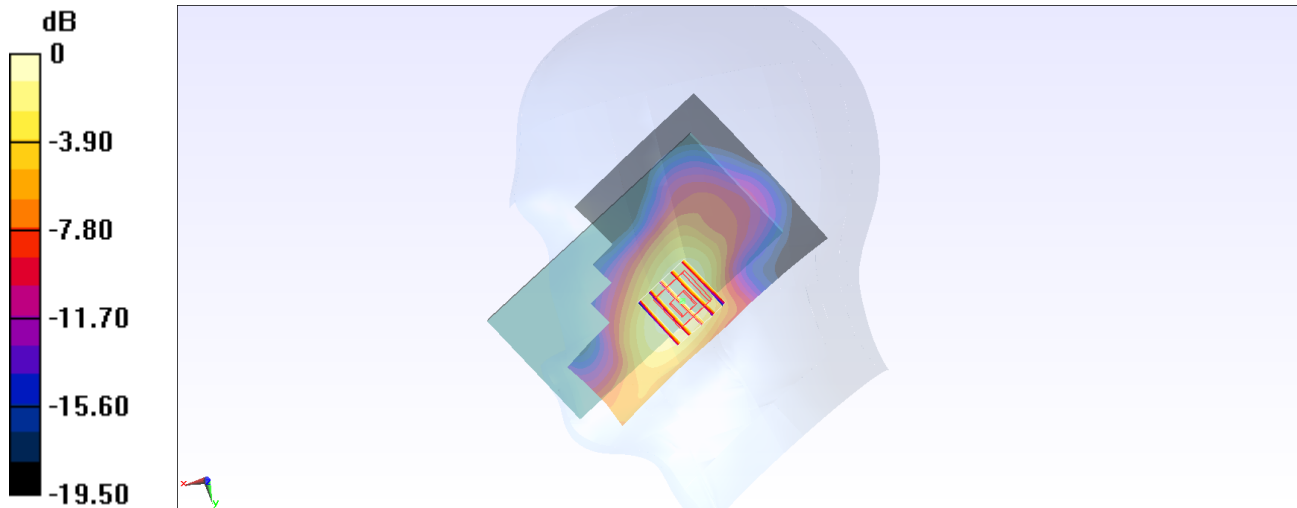

0 dB = 0.673 W/kg = -1.72 dBW/kg

#23_FR1_n30_10M_BPSK_25_14_Left Cheek_Ch462000

Communication System: NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_221008 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.621$ S/m; $\epsilon_r = 39.297$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.91, 7.91, 7.91) @ 2310 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.942 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.94 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 0.891 W/kg

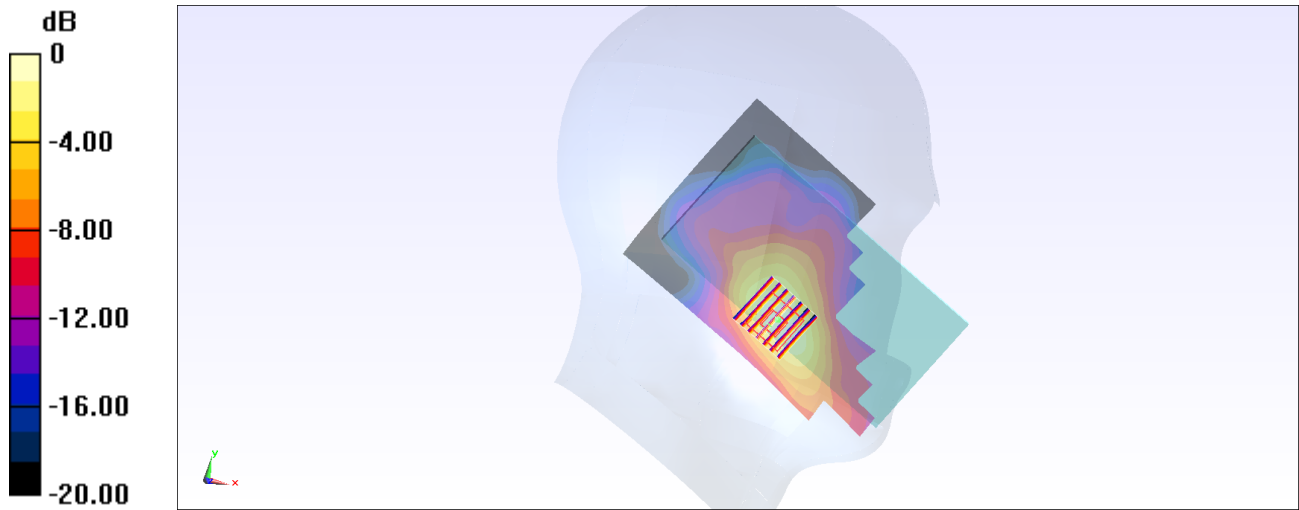

0 dB = 0.942 W/kg = -0.26 dBW/kg

#24_FR1_n41_100M_BPSK_135_69_Right Cheek_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221023 Medium parameters used : $f = 2592.99$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 38.43$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.82, 7.82, 7.82) @ 2592.99 MHz; Calibrated: 2022/1/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.55 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.94 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.522 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

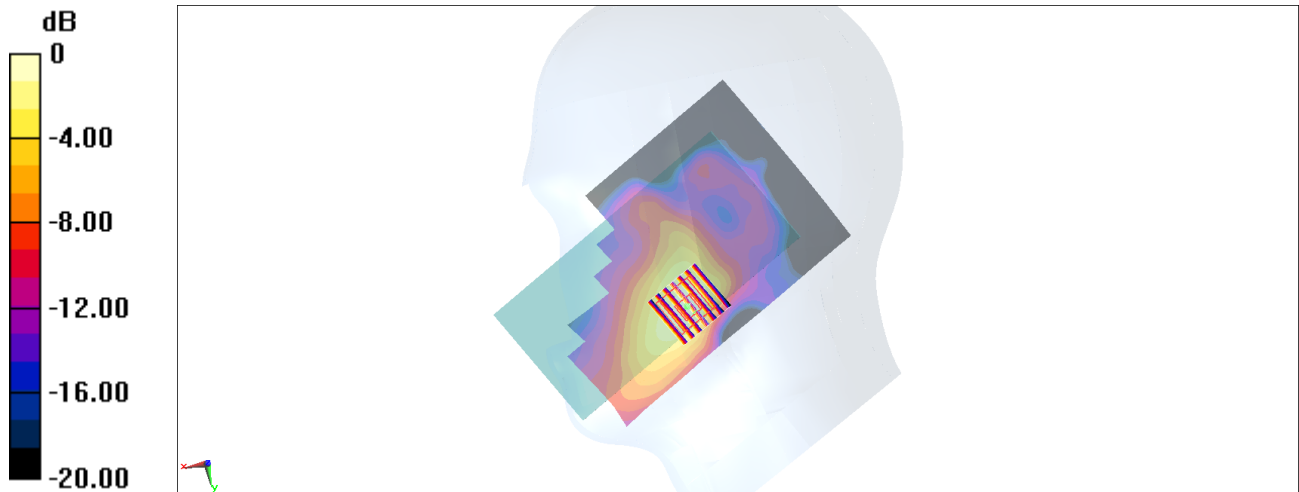

0 dB = 1.55 W/kg = 1.90 dBW/kg

#25_FR1_n48_10M_BPSK_12_6_Right Cheek_Ch637000

Communication System: NR; Frequency: 3555 MHz; Duty Cycle: 1:1

Medium: HSL_3500_221105 Medium parameters used: $f = 3555$ MHz; $\sigma = 3.053$ S/m; $\epsilon_r = 38.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.12, 7.12, 7.12) @ 3555 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: SAM_Left; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.31 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 16.37 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 g) = 0.754 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

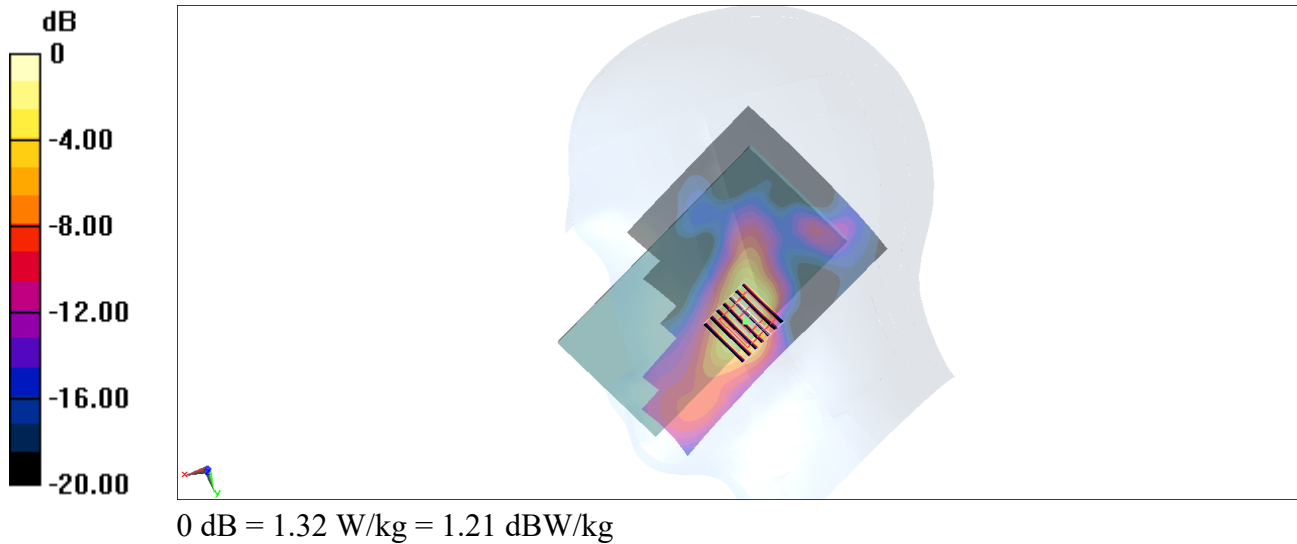

#26_FR1 n66_40M_BPSK_1_1_Left Cheek_Ch349000

Communication System: NR ; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL_1750_221002 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 39.903$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.66, 8.66, 8.66) @ 1745 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.524 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.80 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.494 W/kg

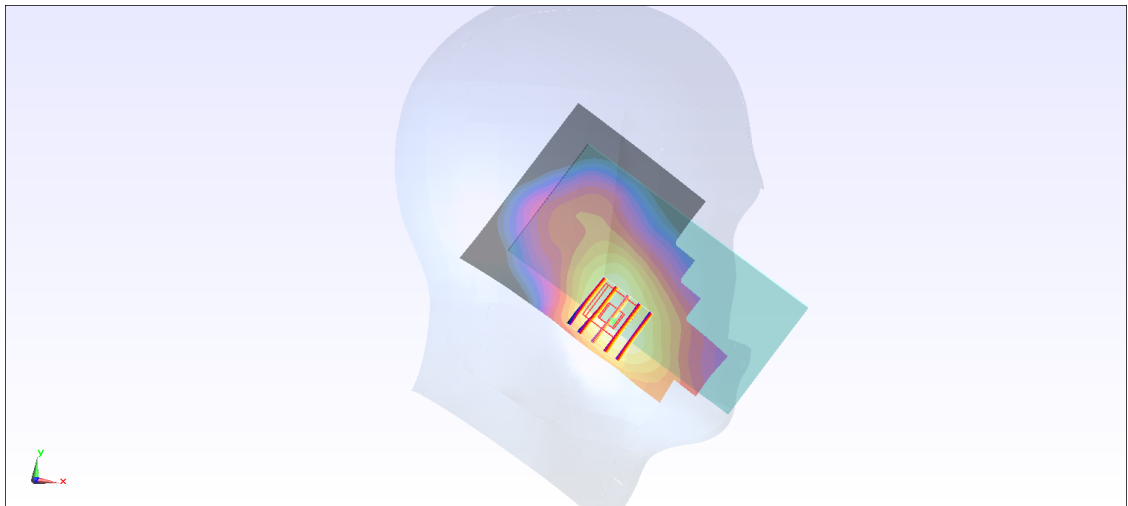

0 dB = 0.524 W/kg = -2.81 dBW/kg

#27_FR1_n71_20M_BPSK_1_1_Right Cheek_Ch136100

Communication System: NR; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_221114 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 41.905$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.55, 6.55, 6.55) @ 680.5 MHz; Calibrated: 2022/9/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 2022/5/17
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.894 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.32 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.874 W/kg

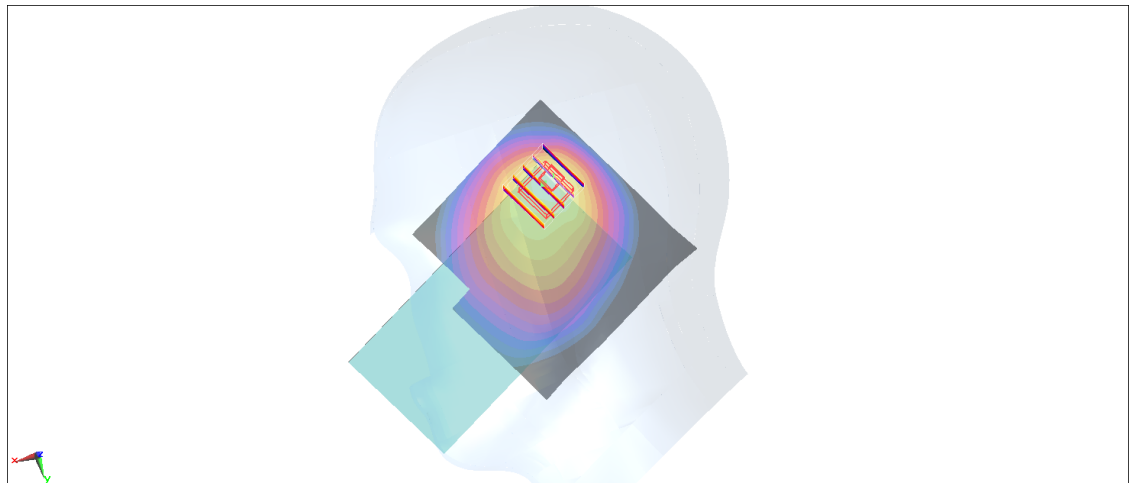

0 dB = 0.874 W/kg = -0.58 dBW/kg

#28_FR1_n77_100M_BPSK_1_1_Right Cheek_Ch656000

Communication System: NR; Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL_3900_221012 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.212$ S/m; $\epsilon_r = 37.284$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.55, 6.55, 6.55) @ 3840 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.53 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 18.34 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

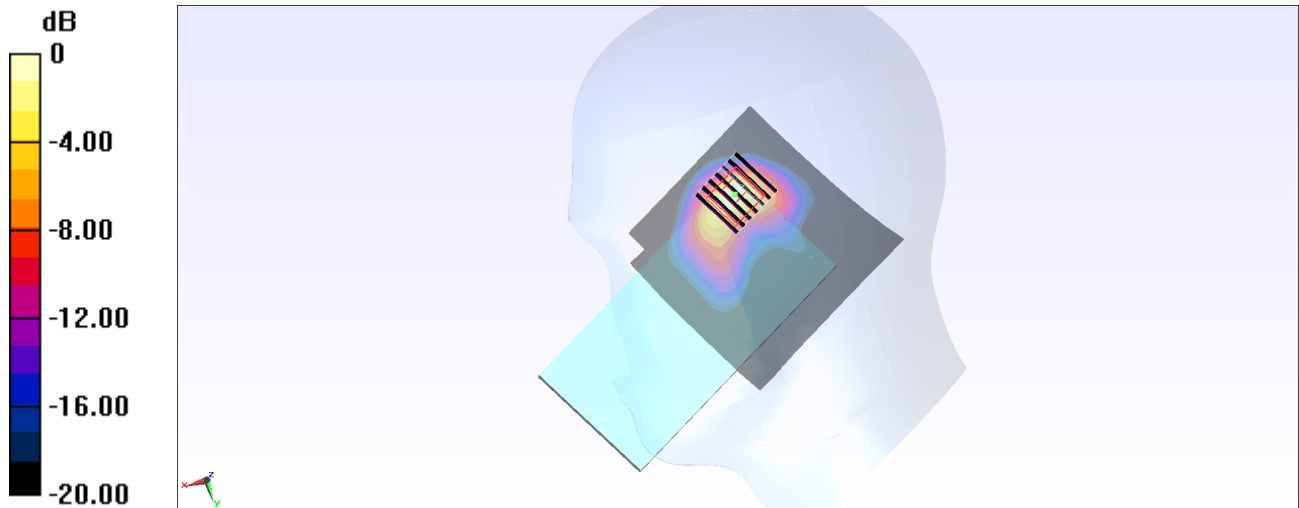

0 dB = 2.53 W/kg = 4.03 dBW/kg

#29_WLAN2.4GHz_802.11b 1Mbps_Left Tilted_Ch13

Communication System: 802.11b ; Frequency: 2472 MHz;Duty Cycle: 1:1.018

Medium: HSL_2450_221025 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.742$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.05, 8.05, 8.05) @ 2472 MHz; Calibrated: 2022/1/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.70 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.56 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.419 W/kg

Maximum value of SAR (measured) = 1.91 W/kg



Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.56 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

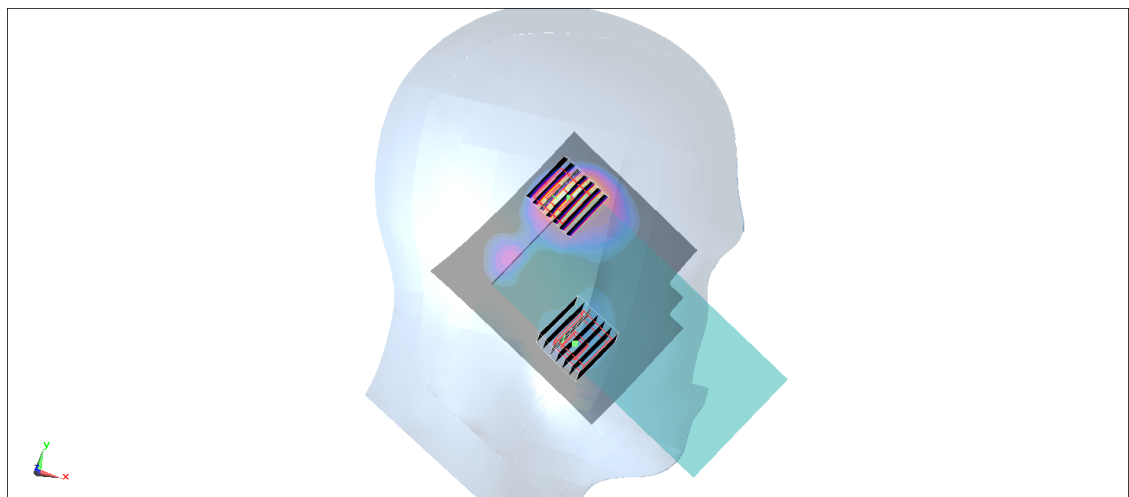

0 dB = 1.91 W/kg = 2.81 dBW/kg

#30_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch64

Communication System: 802.11a ; Frequency: 5320 MHz;Duty Cycle: 1:1
Medium: HSL_5G_221011 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.784$ S/m; $\epsilon_r = 37.243$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.23, 5.23, 5.23) @ 5320 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.51 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 12.30 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.128 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 12.30 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 4.43 W/kg
SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.271 W/kg
Maximum value of SAR (measured) = 2.85 W/kg



0 dB = 2.51 W/kg = 4.00 dBW/kg

#31_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch100

Communication System: 802.11a ; Frequency: 5500 MHz;Duty Cycle: 1:1

Medium: HSL_5G_221119 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.914$ S/m; $\epsilon_r = 35.814$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.95, 4.95, 4.95) @ 5500 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2022/9/21
- Phantom: SAM_Left; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.35 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.42 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.64 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 2.58 W/kg



Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.42 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

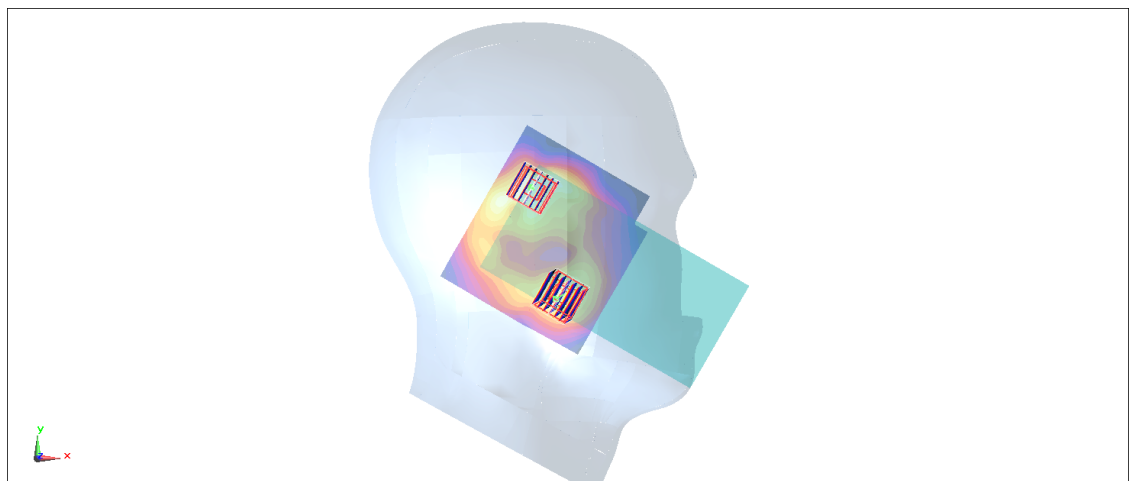

0 dB = 1.45 W/kg = 1.61 dBW/kg

#32_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch165

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium: HSL_5G_221022 Medium parameters used : $f = 5825$ MHz; $\sigma = 5.274$ S/m; $\epsilon_r = 36.574$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.74, 4.74, 4.74) @ 5825 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 12.91 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 4.05 W/kg
SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.302 W/kg
Maximum value of SAR (measured) = 2.56 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 12.91 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 2.19 W/kg
SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.150 W/kg
Maximum value of SAR (measured) = 1.48 W/kg

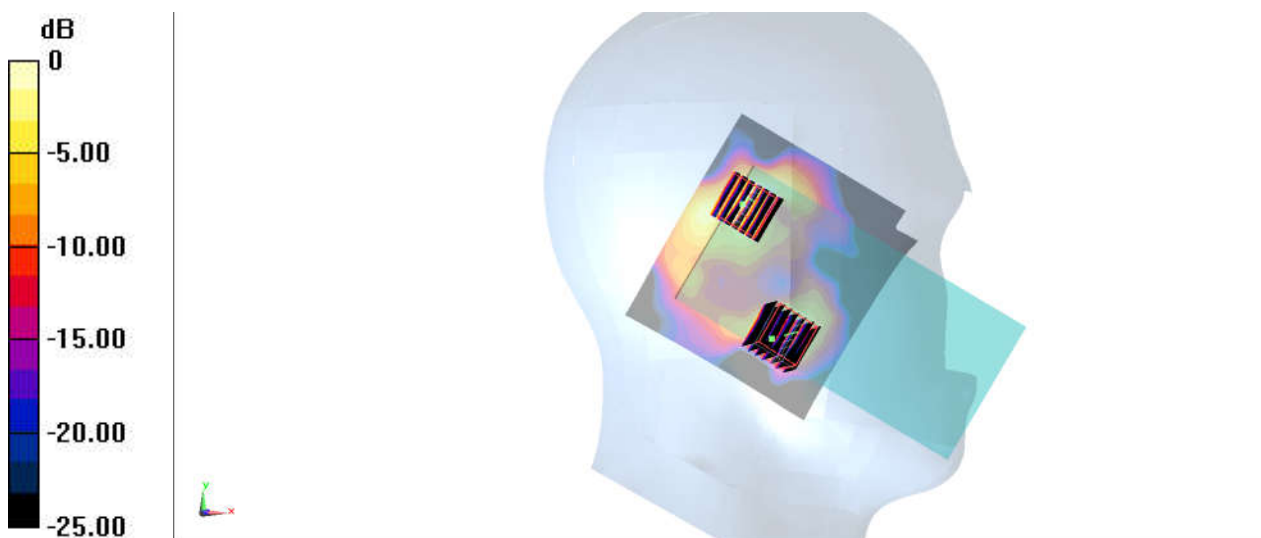

0 dB = 2.08 W/kg = 3.18 dBW/kg

#33_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch169

Communication System: 802.11a; Frequency: 5845 MHz; Duty Cycle: 1:1
Medium: HSL_5G_221025 Medium parameters used: $f = 5845$ MHz; $\sigma = 5.469$ S/m; $\epsilon_r = 36.309$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.93, 4.93, 4.93) @ 5845 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.09 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 14.90 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 4.30 W/kg
SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.346 W/kg
Maximum value of SAR (measured) = 2.59 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 14.90 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.196 W/kg
Maximum value of SAR (measured) = 1.42 W/kg

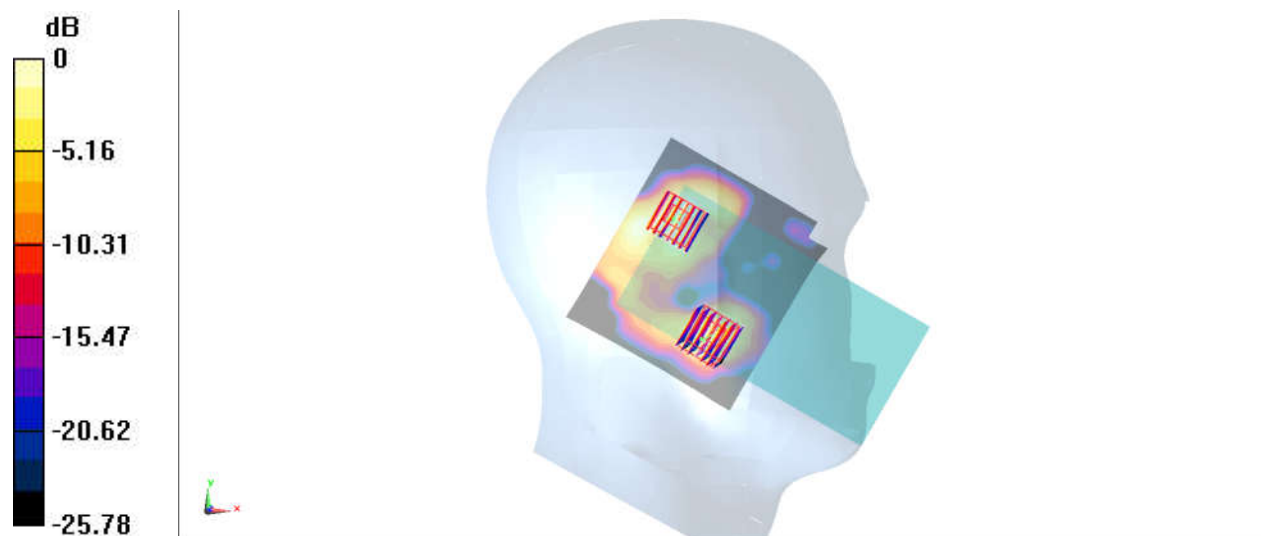

0 dB = 1.42 W/kg = 1.52 dBW/kg

#34_WLAN6GHz_802.11ax-HE80 MCS0_Right Cheek_Ch215

Communication System: U-NII-8; Frequency: 7025.0

Medium: HSL_6G_221121. Medium parameters used: $f= 7025.0$ MHz; $\sigma= 6.70$ S/m; $\epsilon_r = 33.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.0, 5.0, 5.0); Calibrated: 2022-03-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2022-01-19
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10731-AAC
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (105.0 mm x 105.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 0.338 W/kg; SAR (10g) = 0.072 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.0 mm x 2.0 mm x 1.2 mm

Power Drift = 0.11 dB

SAR (1g) = 0.025 W/kg; SAR (8g) = 0.007 W/kg; SAR (10g) = 0.005 W/kg;


psAPD (1.0cm², sq) = 0.245 [W/m²]; psAPD (4.0cm², sq) = 0.134 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.0 mm x 2.0 mm x 1.2 mm

Power Drift = 0.11 dB

SAR (1g) = 0.389 W/kg; SAR (8g) = 0.099 W/kg; SAR (10g) = 0.082 W/kg;

psAPD (1.0cm², sq) = 3.89 [W/m²]; psAPD (4.0cm², sq) = 1.97 [W/m²]

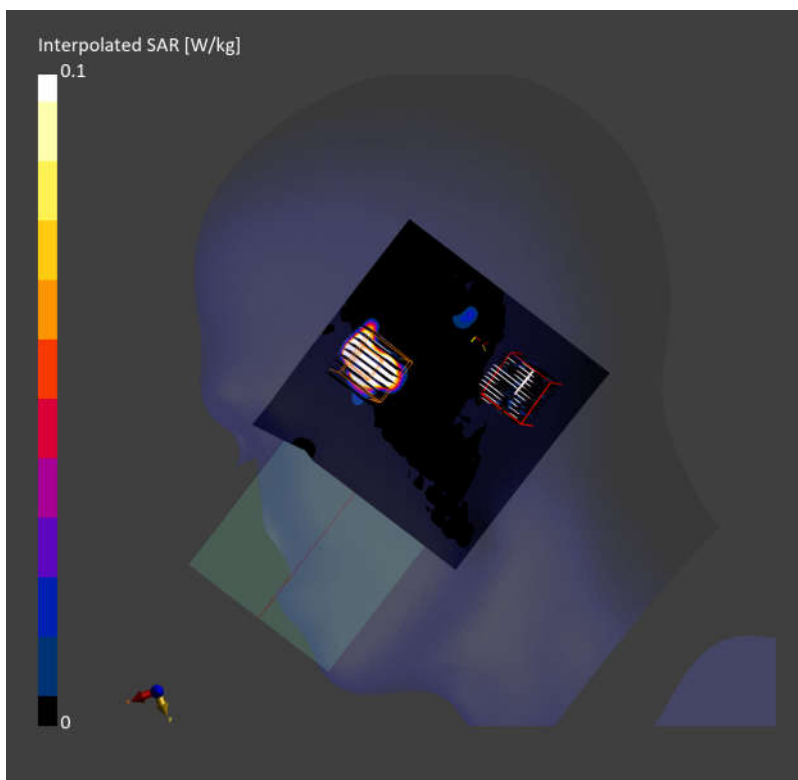

#35_Bluetooth_1Mbps_Left Tilted_Ch39


Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_221003 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 39.726$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.44, 7.44) @ 2441 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.874 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.77 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.906 W/kg
SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.140 W/kg
Maximum value of SAR (measured) = 0.647 W/kg

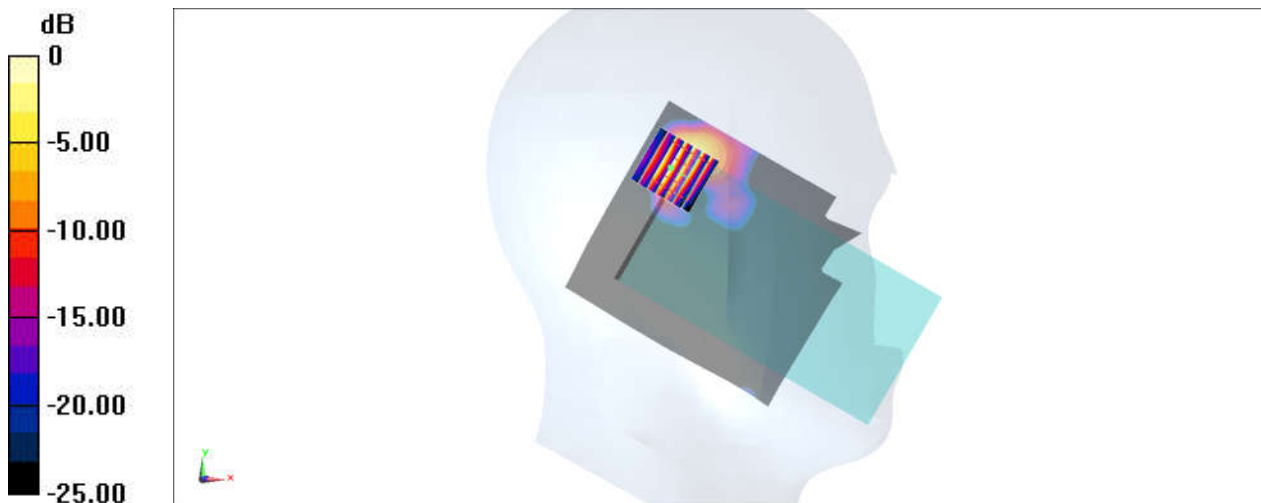

0 dB = 0.874 W/kg = -0.58 dBW/kg

#36_GSM850_GPRS (4 Tx slots)_Left Side_10mm_Ch128

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL_850_221007 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 43.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(9.91, 9.91, 9.91) @ 824.2 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.24 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.568 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

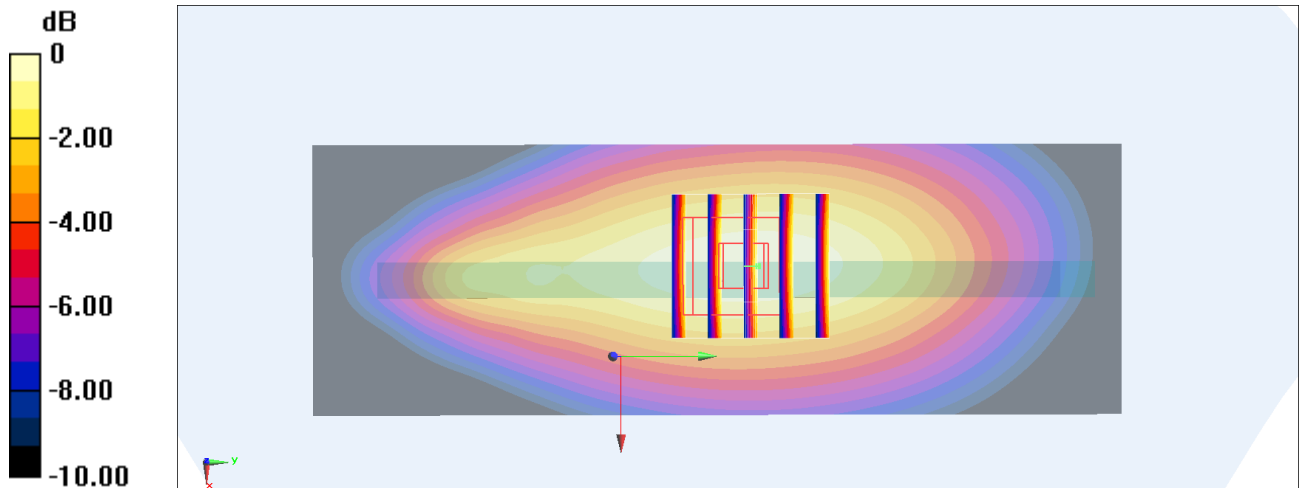

0 dB = 1.06 W/kg = 0.25 dBW/kg

#37_GSM1900_GPRS (4 Tx slots)_Back_10mm_Ch661

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_221006 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.565$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(8.28, 8.28, 8.28) @ 1880 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.44 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

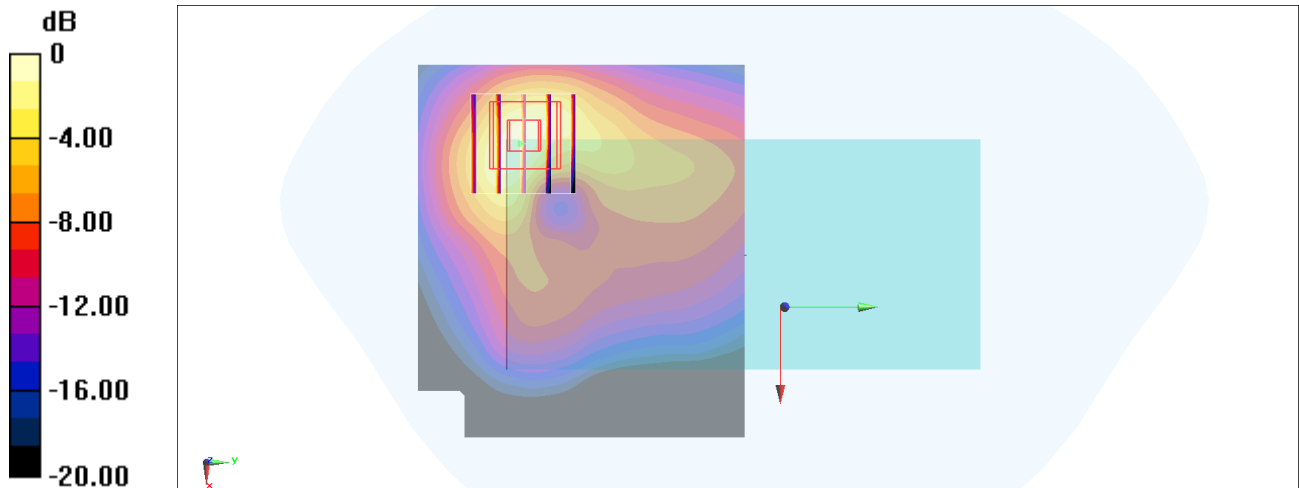

0 dB = 1.16 W/kg = 0.64 dBW/kg

#38_WCDMA II_RMC 12.2Kbps_Left Side_10mm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221003 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.451$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.45, 8.45, 8.45) @ 1907.6 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.910 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.18 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

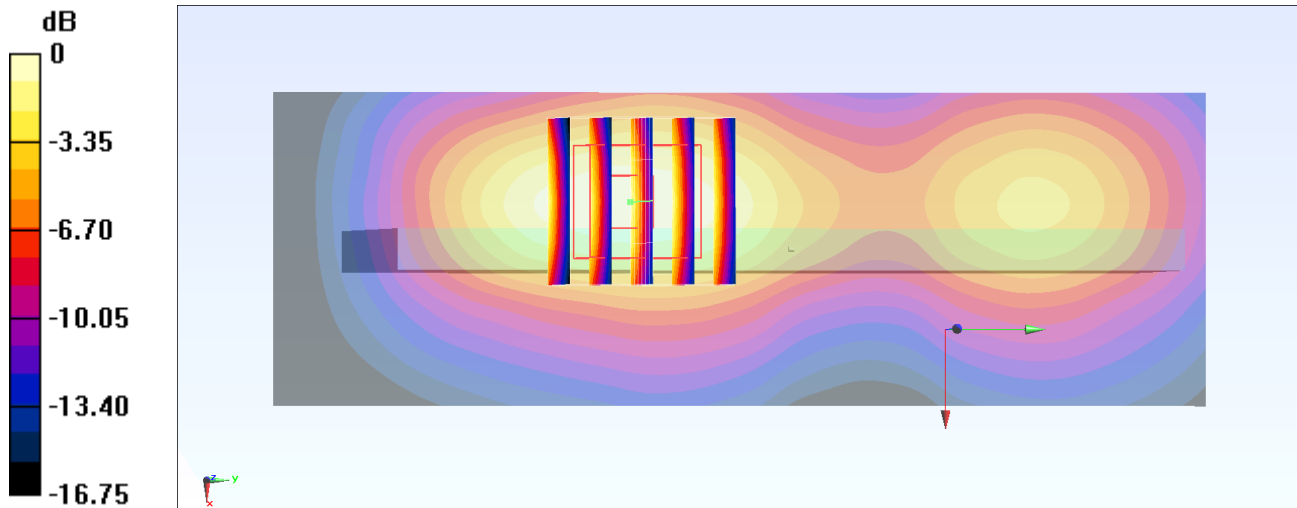

0 dB = 0.910 W/kg = -0.41 dBW/kg

#39_WCDMA IV_RMC 12.2Kbps_Right Side_10mm_Ch1312

Communication System: WCDMA ; Frequency: 1712.4 MHz;Duty Cycle: 1:1

Medium: HSL_1750_221004 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.311$ S/m; $\epsilon_r = 39.836$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.66, 8.66, 8.66) @ 1712.4 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.809 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

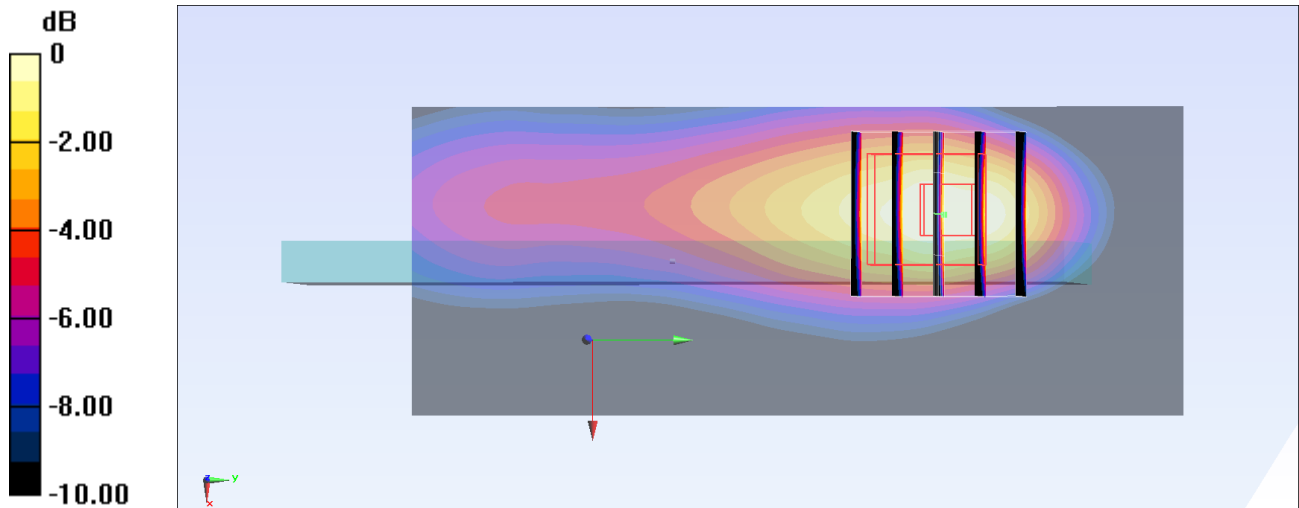

0 dB = 0.764 W/kg = -1.17 dBW/kg

#40_WCDMA V_RMC 12.2Kbps_Left Side_10mm_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_220925 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.8, 9.8, 9.8) @ 826.4 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.600 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.91 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.616 W/kg

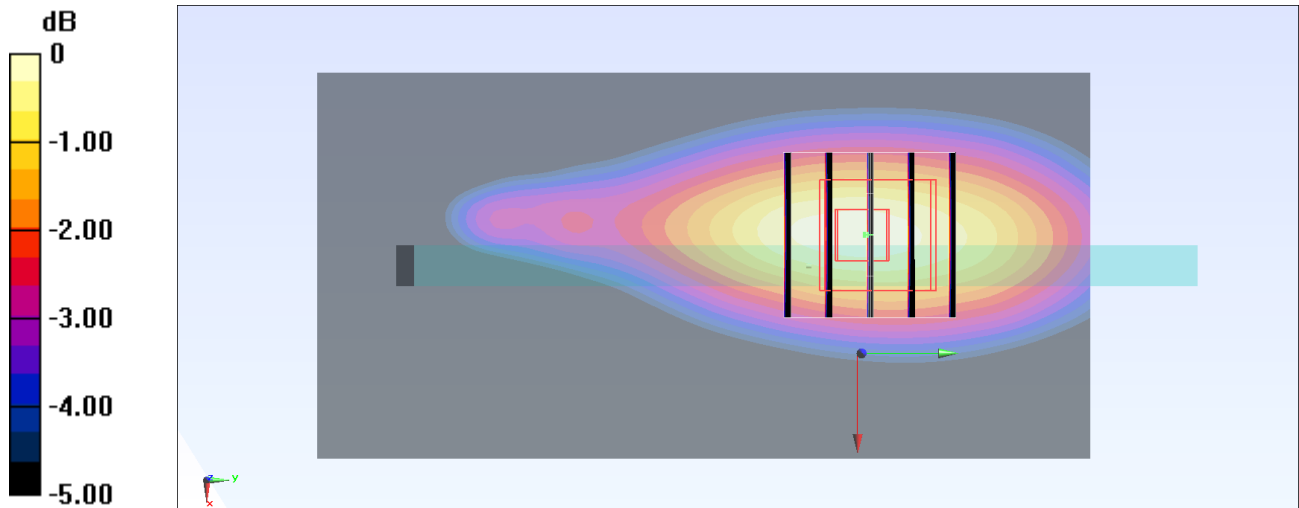

0 dB = 0.616 W/kg = -2.10 dBW/kg

#41_LTE Band 2_20M_QPSK_50_0_Top Side_10mm_Ch19100

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221017 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.998$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(8.56, 8.56, 8.56) @ 1900 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.61 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.436 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

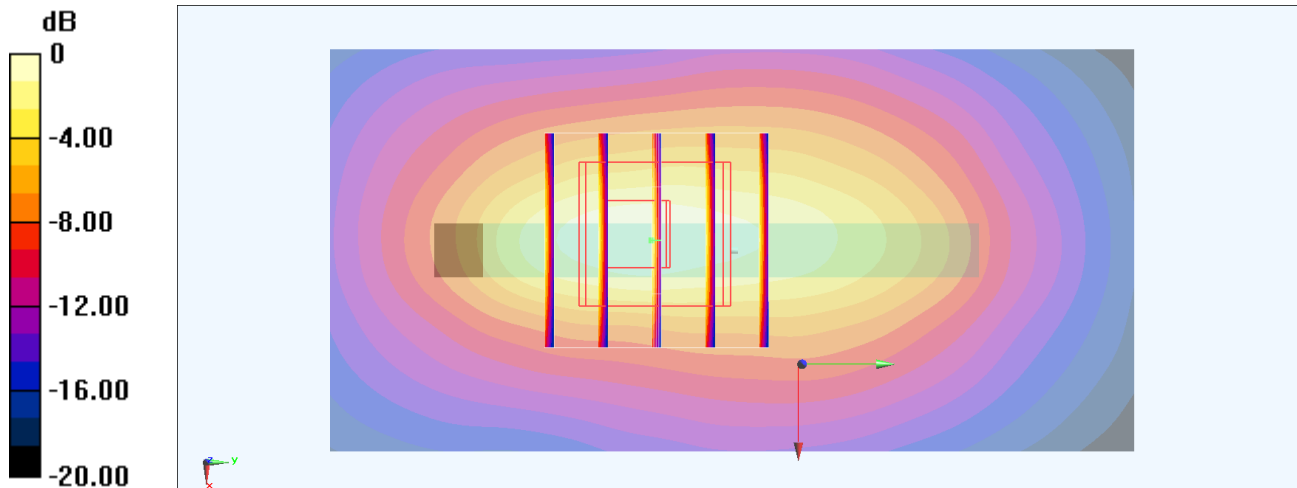

0 dB = 1.30 W/kg = 1.14 dBW/kg

#42_LTE Band 7_20M_QPSK_1_0_Right Side_10mm_Ch21100

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221006 Medium parameters used : $f = 2535$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 38.755$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.66, 7.66, 7.66) @ 2535 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.378 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

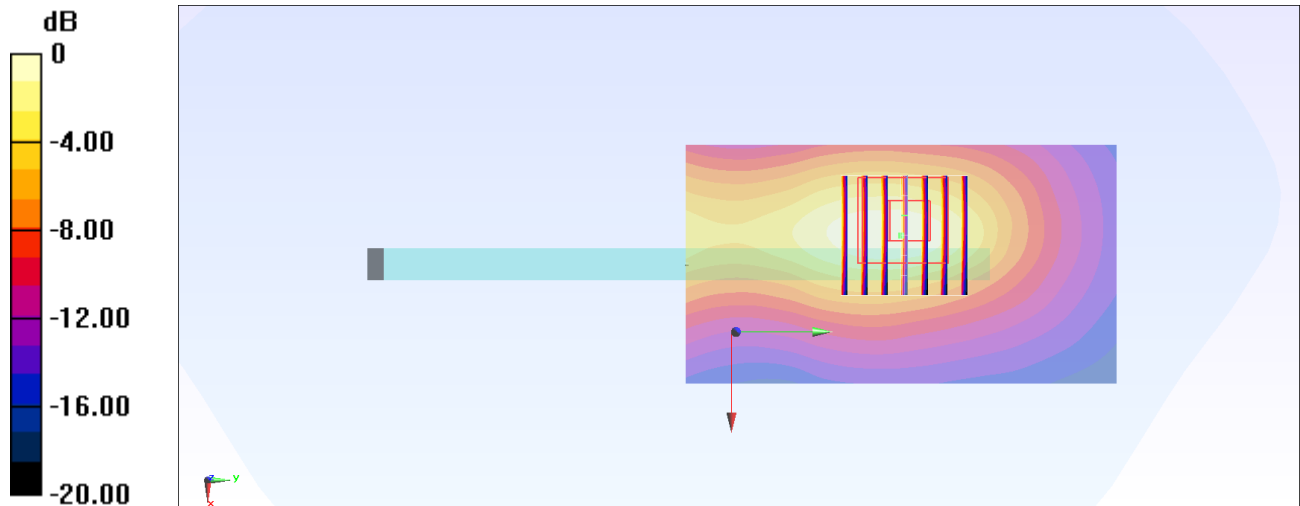

0 dB = 1.19 W/kg = 0.76 dBW/kg

#43_LTE Band 12_10M_QPSK_1_0_Left Side_10mm_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_221001 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.734$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 707.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.523 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.04 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

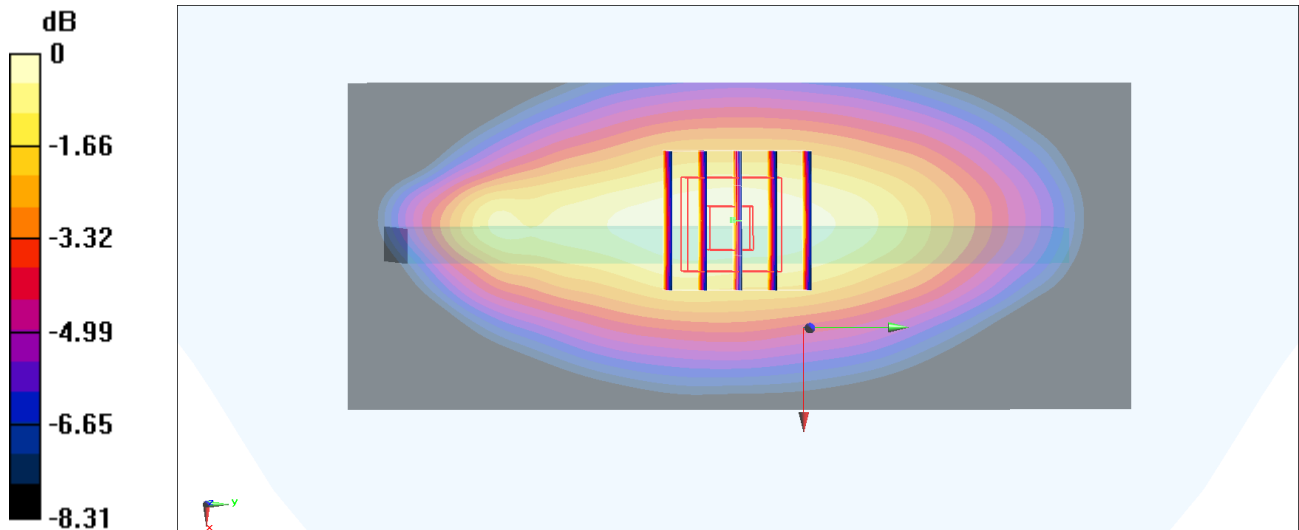

0 dB = 0.510 W/kg = -2.92 dBW/kg

#44_LTE Band 13_10M_QPSK_1_0_Left Side_10mm_Ch23230

Communication System: LTE ; Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL_750_221001 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 42.565$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 782 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (51x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.739 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.80 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.577 W/kg ; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

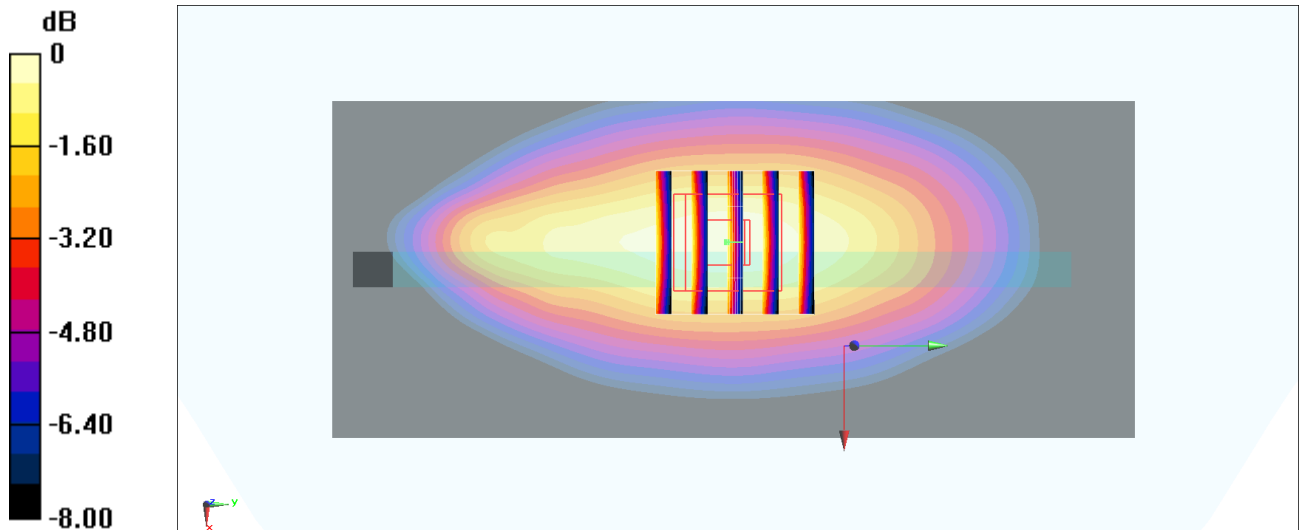

0 dB = $0.739 \text{ W/kg} = -1.31 \text{ dBW/kg}$

#45_LTE Band 14_10M_QPSK_1_0_Left Side_10mm_Ch23330

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_221002 Medium parameters used: $f = 793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.801$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 793 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.802 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.25 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 0.796 W/kg

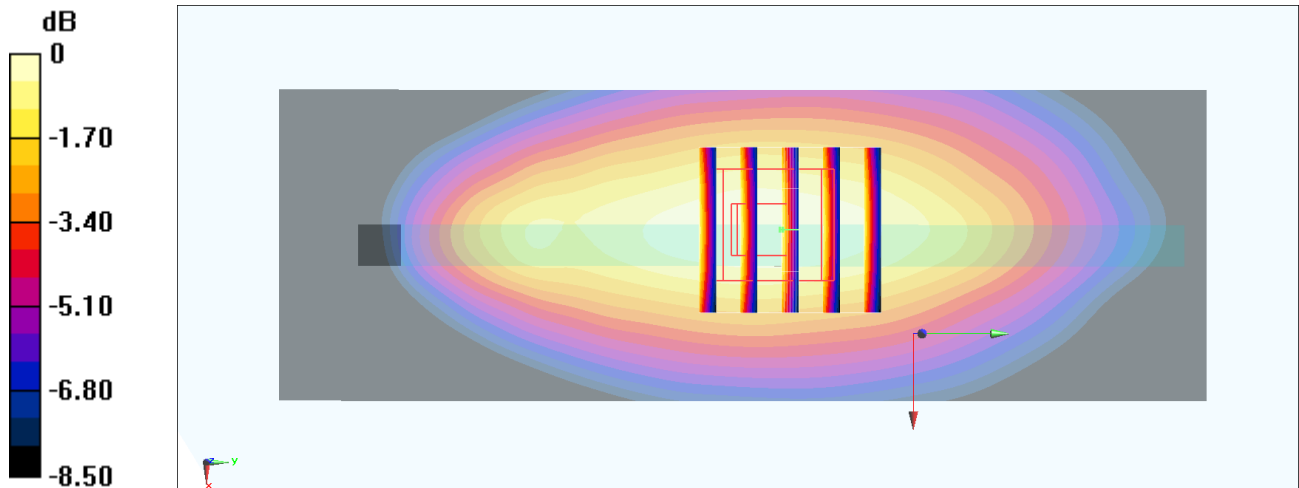

0 dB = 0.802 W/kg = -0.96 dBW/kg

#46_LTE Band 25_20M_QPSK_50_0_Front_10mm_Ch26340

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221005 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.426$ S/m; $\epsilon_r = 40.701$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.45, 8.45, 8.45) @ 1880 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.73 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

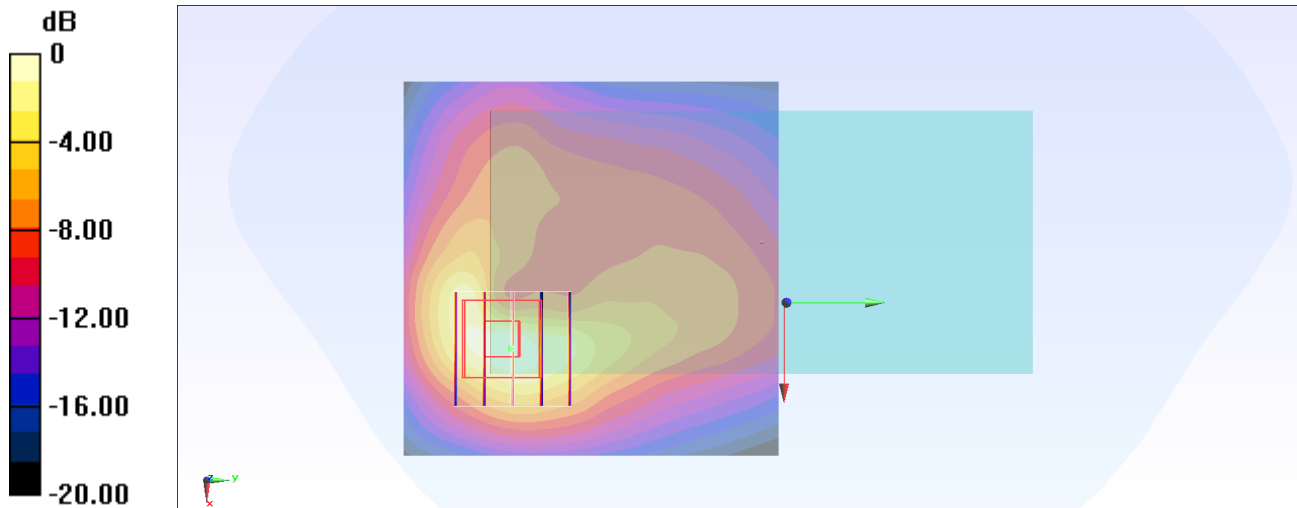

0 dB = 1.22 W/kg = 0.86 dBW/kg

#47_LTE Band 26_15M_QPSK_1_0_Left Side_10mm_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_221003 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.942$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.92, 9.92, 9.92) @ 831.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.679 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.68 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.633 W/kg

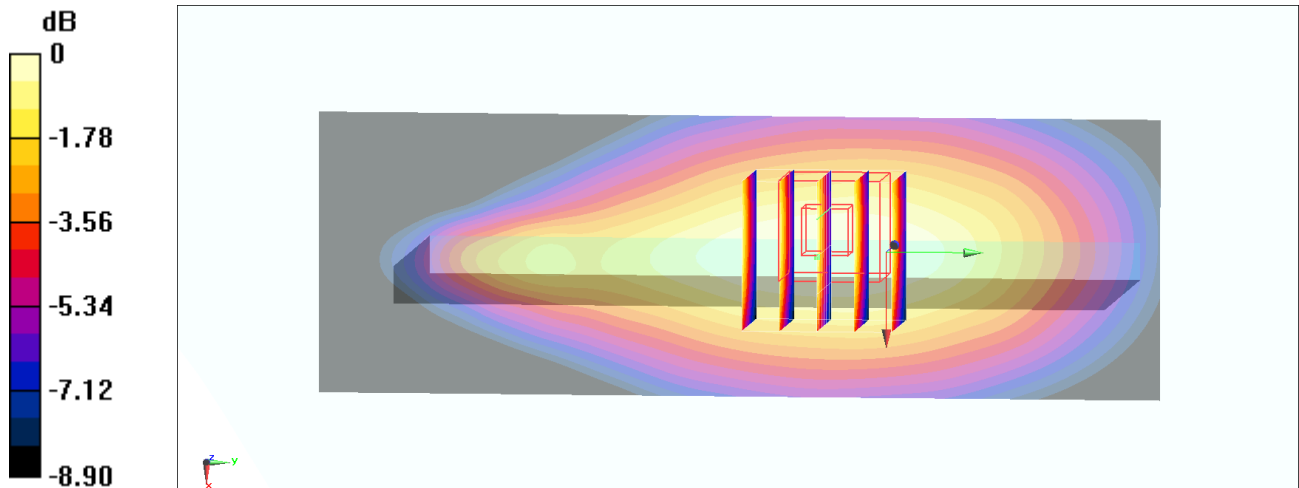

0 dB = 0.633 W/kg = -1.99 dBW/kg

#48_LTE Band 30_10M_QPSK_1_0_Left Side_10mm_Ch27710

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_221007 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.636$ S/m; $\epsilon_r = 39.381$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.91, 7.91, 7.91) @ 2310 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.11 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

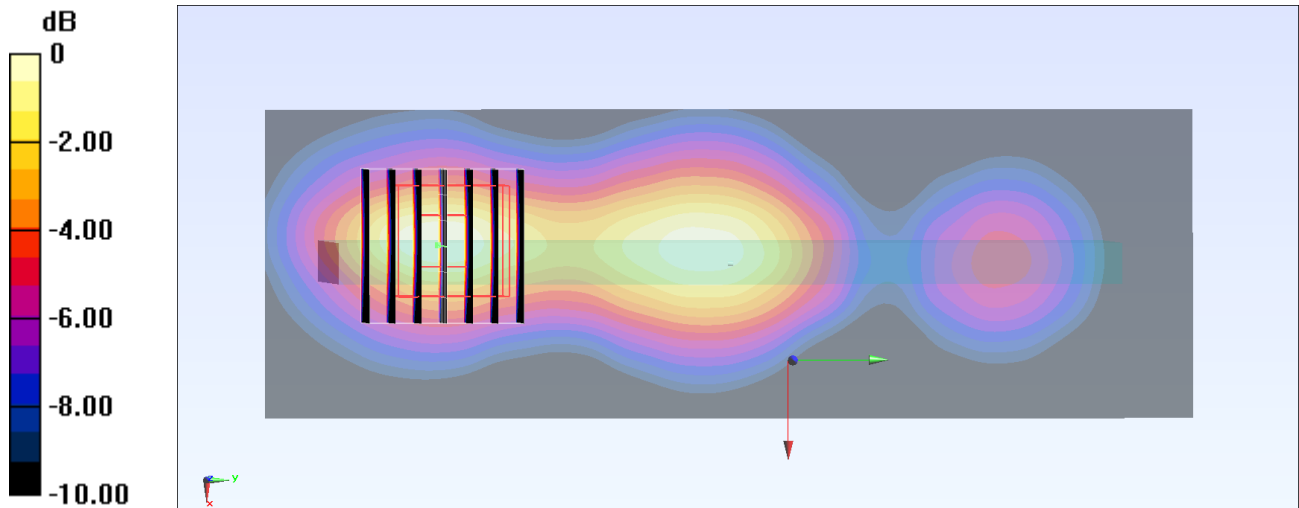

0 dB = 1.15 W/kg = 0.61 dBW/kg

#49_LTE Band 66_20M_QPSK_1_0_Right Side_10mm_Ch132572

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL_1750_221017 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 40.522$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(5.43, 5.43, 5.43) @ 1770 MHz; Calibrated: 2021/11/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1696; Calibrated: 2021/11/3
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.936 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.32 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

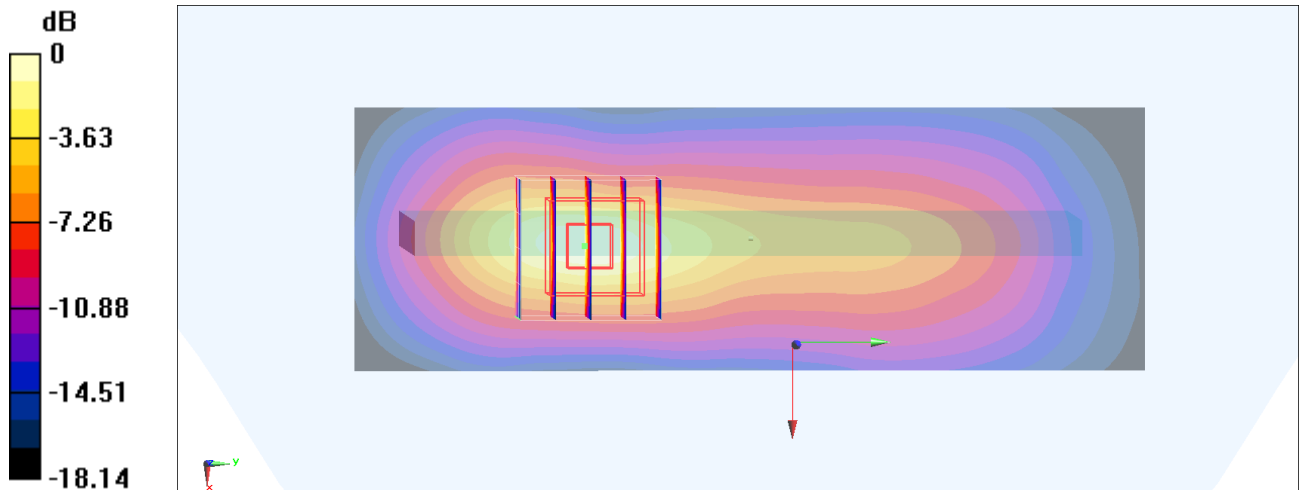

0 dB = 1.02 W/kg = 0.09 dBW/kg

#50_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133297

Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_221002 Medium parameters used : $f = 680.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.427$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(10.29, 10.29, 10.29) @ 680.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.500 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.50 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

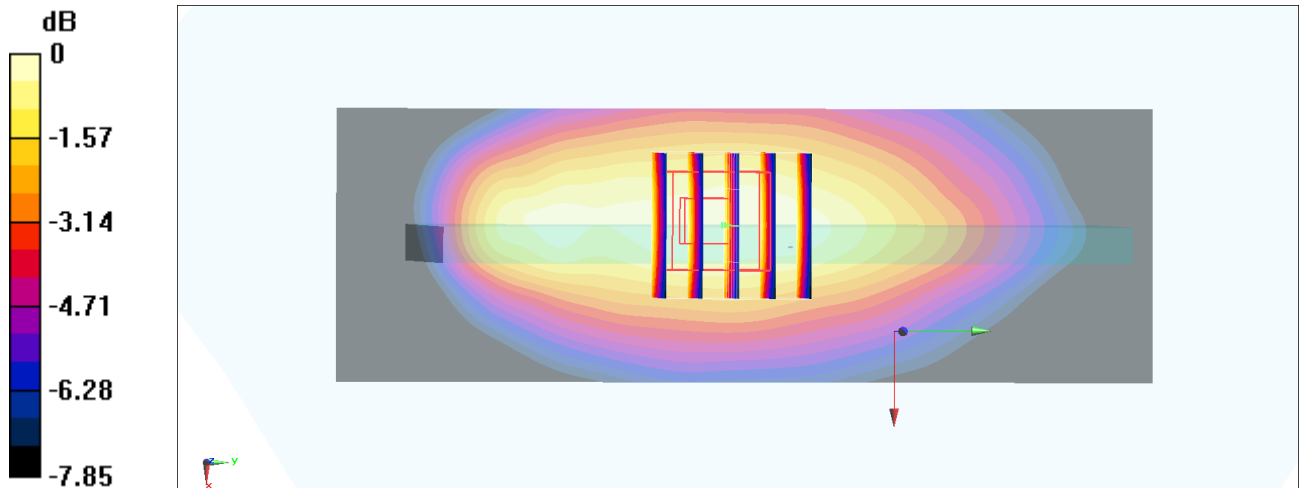

0 dB = 0.500 W/kg = -3.01 dBW/kg

#51_LTE Band 41_20M_QPSK_1_0_Left Side_10mm_Ch41055

Communication System: LTE; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_221014 Medium parameters used : $f = 2636.5$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 38.003$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(4.52, 4.52, 4.52) @ 2636.5 MHz; Calibrated: 2022/9/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.42 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

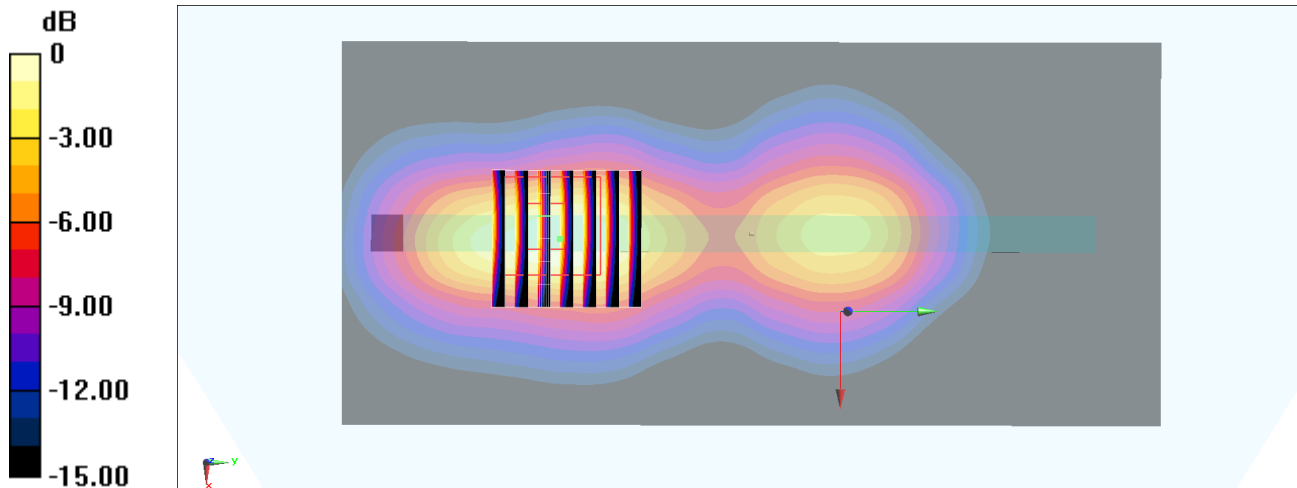

0 dB = 1.10 W/kg = 0.41 dBW/kg

#52_LTE Band 48_20M_QPSK_1_0_Right Side_10mm_Ch55340

Communication System: LTE; Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_221011 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.996$ S/m; $\epsilon_r = 37.925$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.14, 7.14, 7.14) @ 3560 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 17.10 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

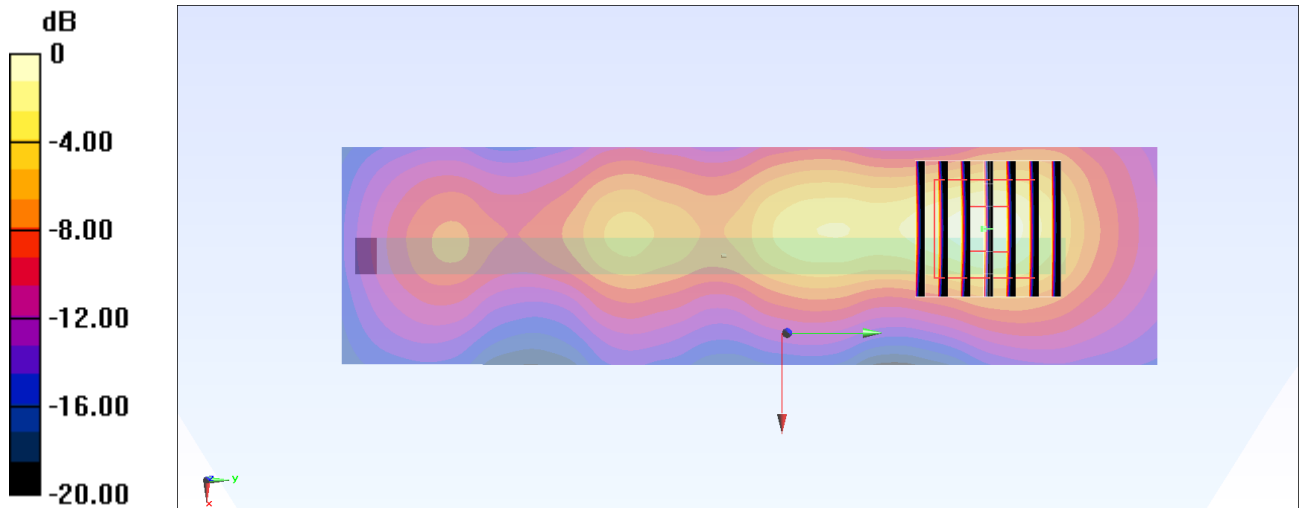

0 dB = 1.34 W/kg = 1.27 dBW/kg

#53_FR1 n5_20M_BPSK_50_28_Left Side_10mm_Ch167300

Communication System:NR; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: HSL_850_220929 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.727$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.22, 10.22, 10.22) @ 836.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.770 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.49 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.838 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.400 W/kg

Maximum value of SAR (measured) = 0.756 W/kg

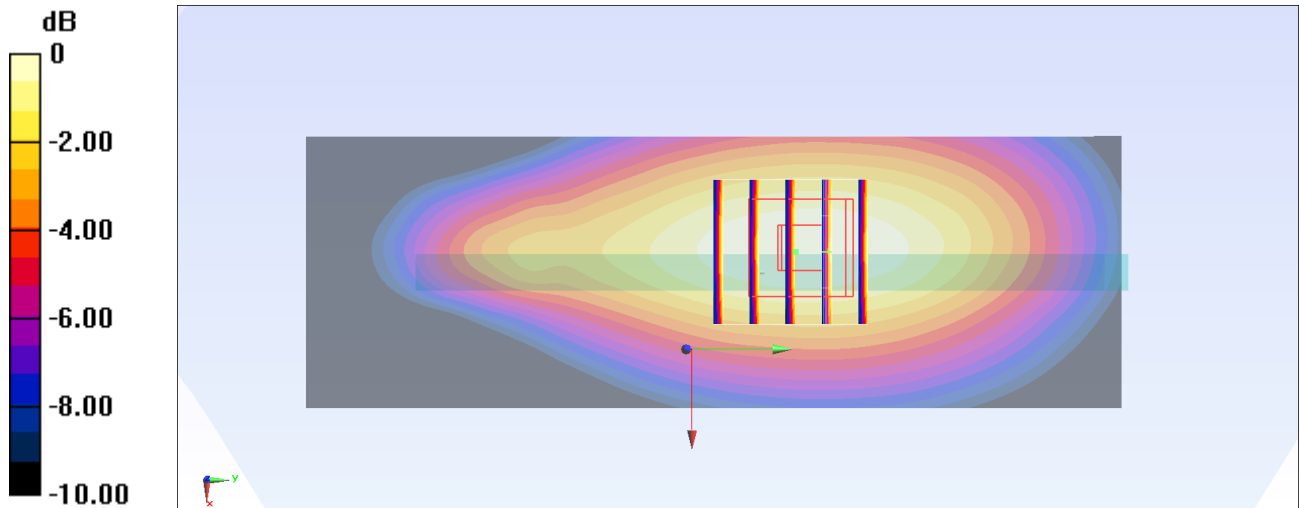

0 dB = 0.756 W/kg = -1.21 dBW/kg

#54_FR1 n7_50M_BPSK_1_1_Right Side_10mm_Ch507000

Communication System: NR; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221004 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 39.732$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(4.32, 4.32, 4.32) @ 2535 MHz; Calibrated: 2021/11/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.38 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

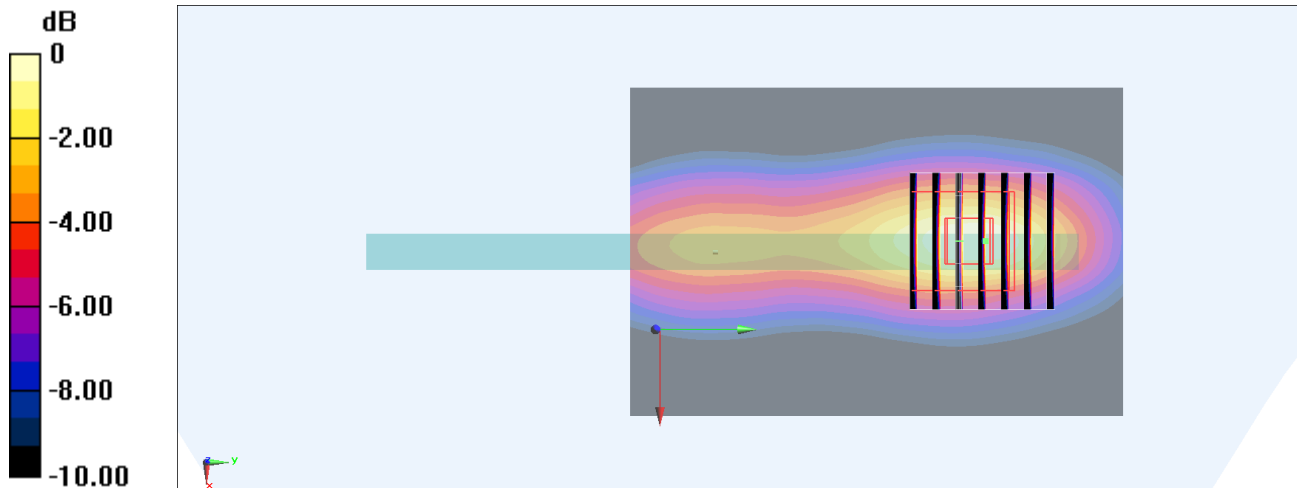

0 dB = 1.01 W/kg = 0.04 dBW/kg

#55_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500

Communication System:NR; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL_750_220929 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.62, 10.62, 10.62) @ 707.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.640 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.75 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

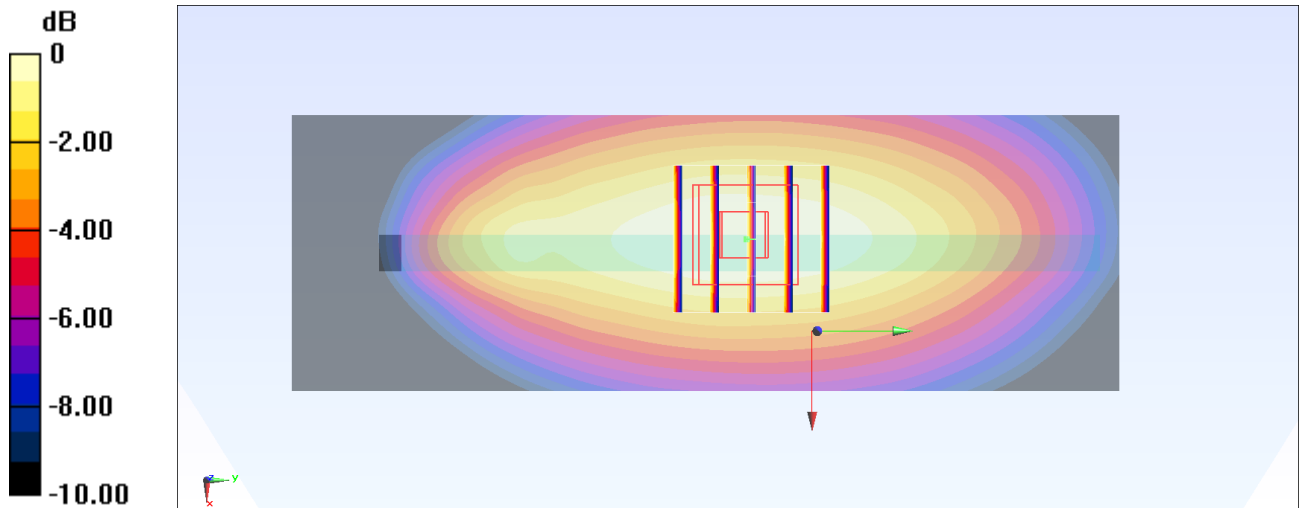

0 dB = 0.619 W/kg = -2.08 dBW/kg

#56_FR1 n14_10M_BPSK_25_14_Left Side_10mm_Ch158600

Communication System:NR; Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used: $f = 793$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.376$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.62, 10.62, 10.62) @ 793 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.857 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.60 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 0.872 W/kg

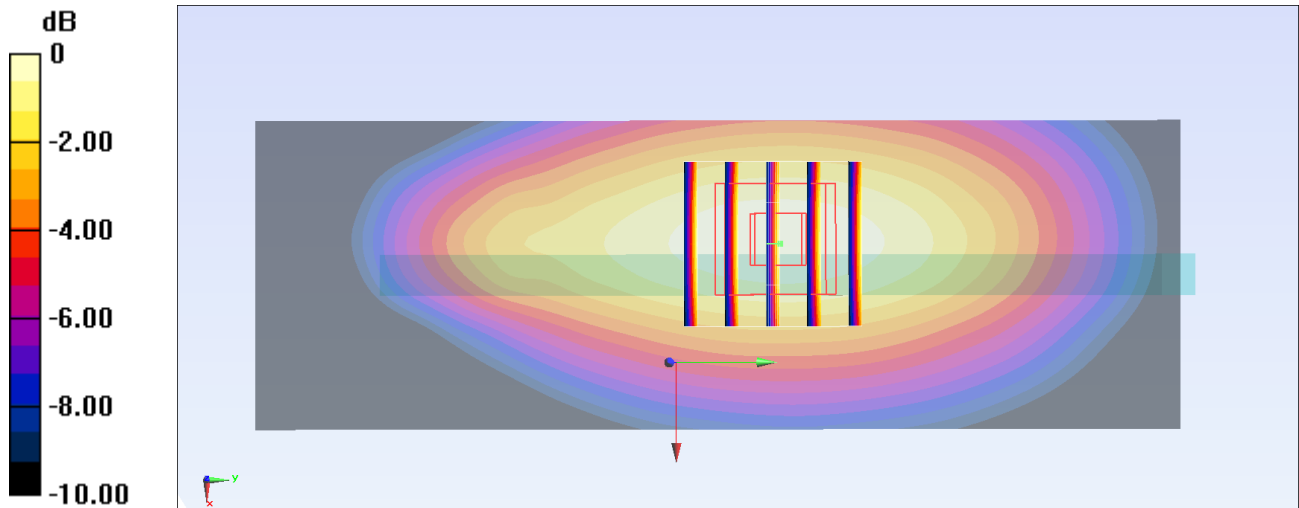

0 dB = 0.872 W/kg = -0.59 dBW/kg

#57_FR1 n25_40M_BPSK_108_54_Left Side_10mm_Ch376500

Communication System:NR; Frequency: 1882.5 MHz;Duty Cycle: 1:1

Medium: HSL_1900_221003 Medium parameters used : $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.582$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.45, 8.45, 8.45) @ 1882.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.933 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.78 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

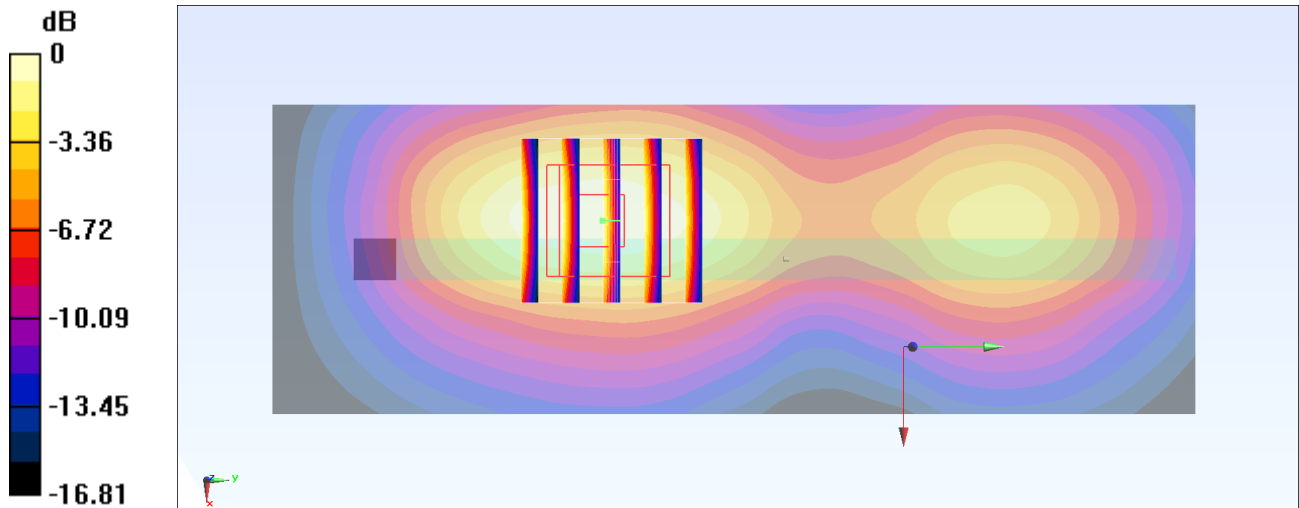

0 dB = 0.933 W/kg = -3.0 dBW/kg

#58_FR1_n30_10M_BPSK_1_1_Left Side_10mm_Ch462000

Communication System: NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_221008 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.621$ S/m; $\epsilon_r = 39.297$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.91, 7.91, 7.91) @ 2310 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.03 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.484 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

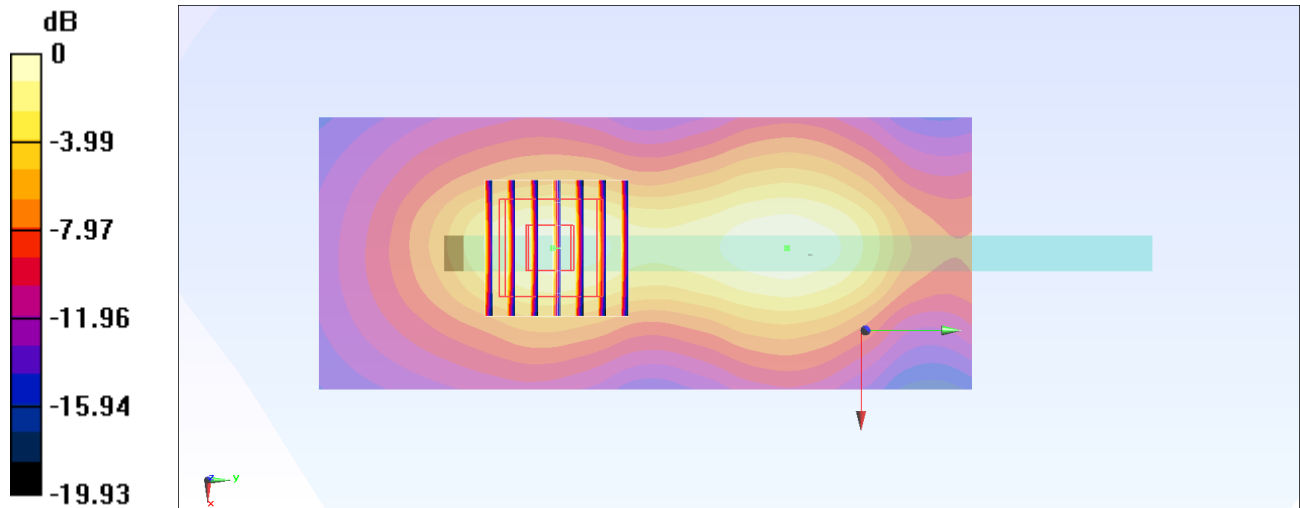

0 dB = 1.54 W/kg = 1.88 dBW/kg

#59_FR1_n41_100M_BPSK_135_69_Right Side_10mm_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221004 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 39.526$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.58, 7.58, 7.58) @ 2592.99 MHz; Calibrated: 2021/12/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.29 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.53 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

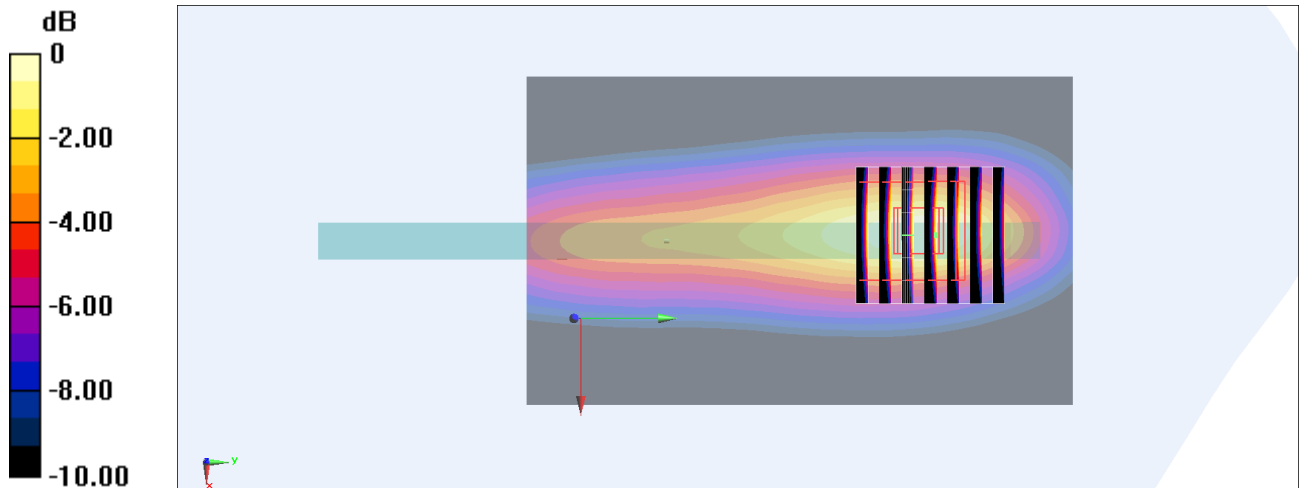

0 dB = 1.27 W/kg = 1.04 dBW/kg

#60_FR1_n48_10M_BPSK_1_1_Right Side_10mm_Ch637000

Communication System: NR; Frequency: 3555 MHz; Duty Cycle: 1:1

Medium: HSL_3500_221105 Medium parameters used: $f = 3555$ MHz; $\sigma = 3.053$ S/m; $\epsilon_r = 38.356$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.12, 7.12, 7.12) @ 3555 MHz; Calibrated: 2022/3/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: SAM_Left; Type: SAM; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 20.02 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

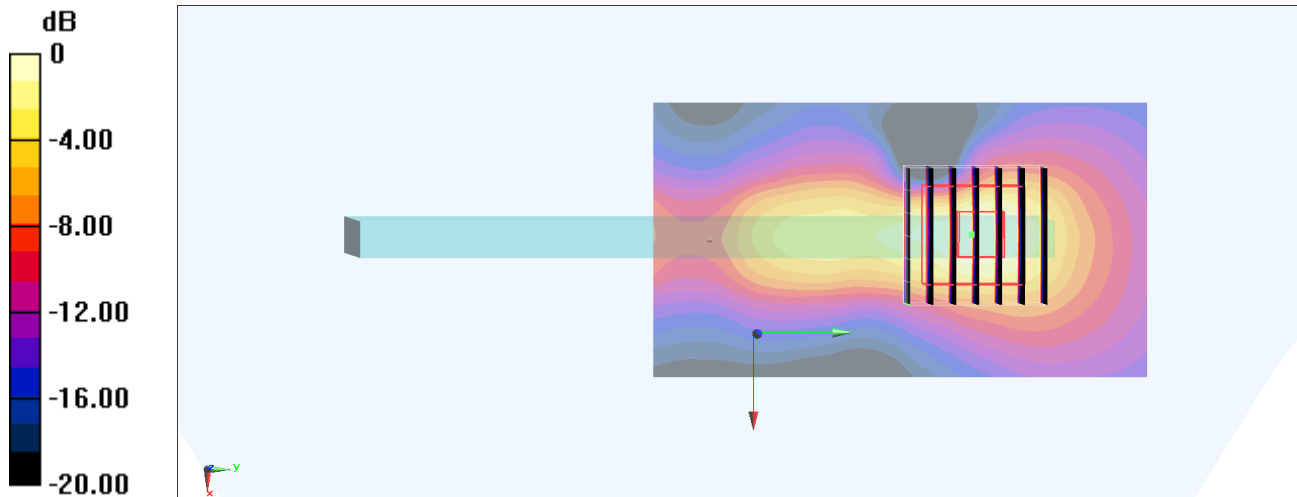

0 dB = 1.37 W/kg = 1.37 dBW/kg

#61_FR1 n66_40M_BPSK_1_1_Right Side_10mm_Ch349000

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750_221003 Medium parameters used : $f = 1745$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 41.065$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3115; ConvF(5.3, 5.3, 5.3) @ 1745 MHz; Calibrated: 2021/11/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2022/2/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.859 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.77 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 0.828 W/kg

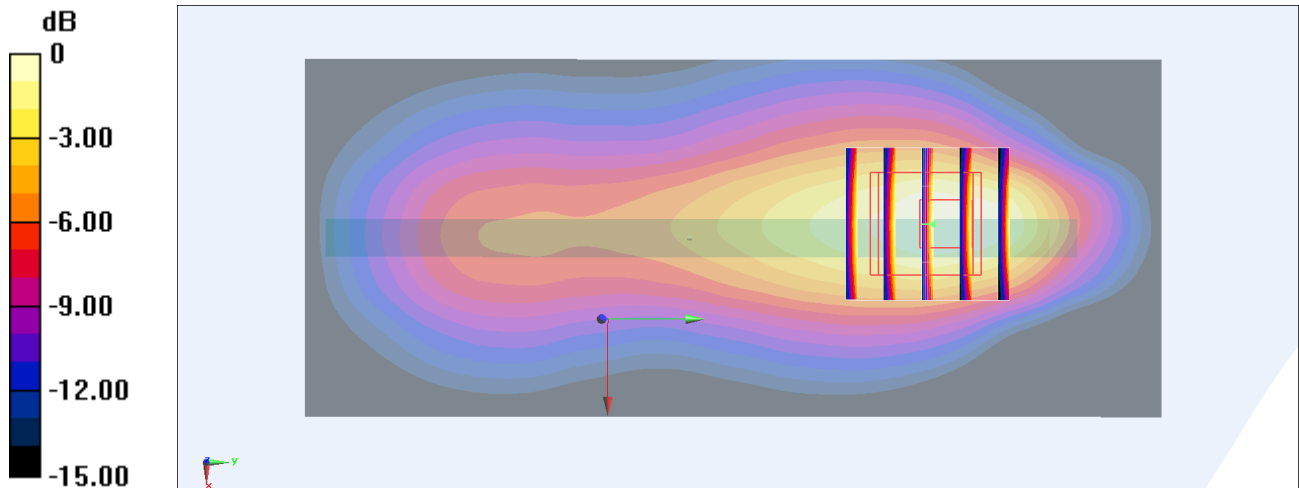

0 dB = 0.828 W/kg = -0.82 dBW/kg

#62_FR1_n71_20M_BPSK_50_28_Left Side_10mm_Ch136100

Communication System:NR; Frequency: 680.5 MHz;Duty Cycle: 1:1

Medium: HSL_750_220930 Medium parameters used : $f = 680.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.028$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.62, 10.62, 10.62) @ 680.5 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Left; Type: SAM; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.582 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.68 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

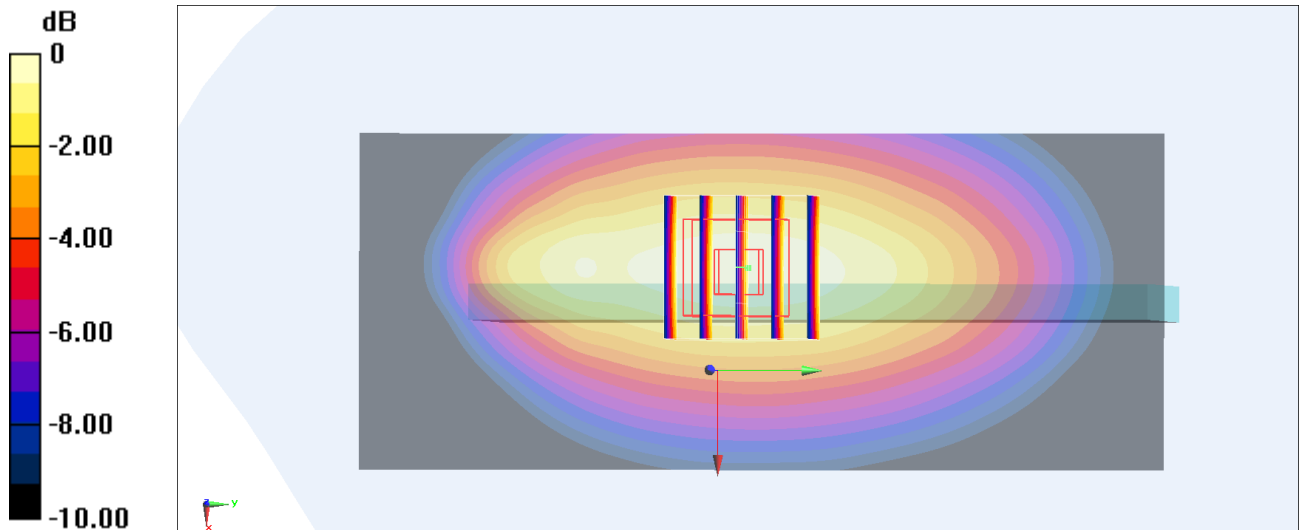

0 dB = 0.584 W/kg = -2.34 dBW/kg

#63_FR1_n77_100M_BPSK_135_69_Left Side_10mm_Ch656000

Communication System: NR; Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL_3900_221010 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.264$ S/m; $\epsilon_r = 37.708$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.89, 6.89, 6.89) @ 3840 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1707; Calibrated: 2022/1/12
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 17.02 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.976 W/kg

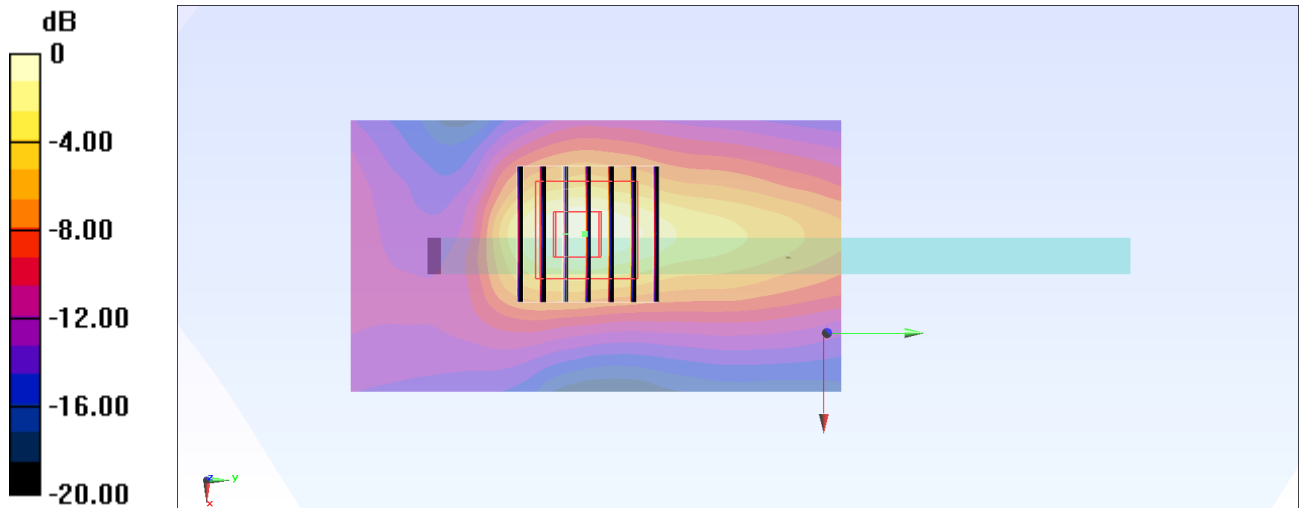

0 dB = 0.976 W/kg = -0.11 dBW/kg

#64_WLAN2.4GHz_802.11b 1Mbps_Left Side_10mm_Ch6

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.018

Medium: HSL_2450_221025 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.891$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(8.05, 8.05, 8.05) @ 2437 MHz; Calibrated: 2022/1/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2022/2/28
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1796
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.825 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.81 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.759 W/kg

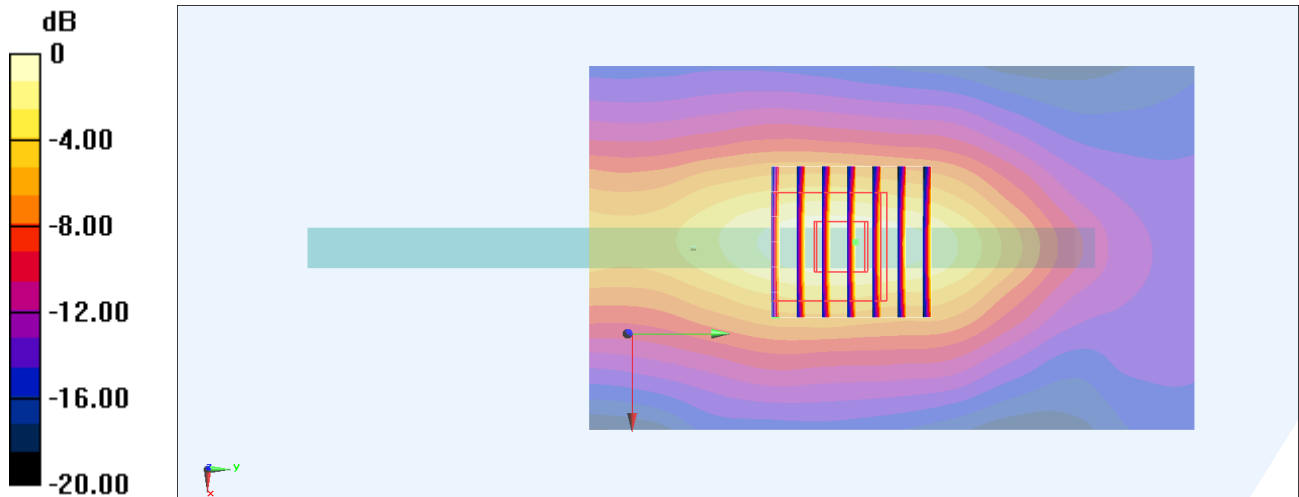

0 dB = 0.825 W/kg = -0.83 dBW/kg

#65_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch48

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
Medium: HSL_5G_221014 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.735$ S/m; $\epsilon_r = 36.782$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.45, 5.45, 5.45) @ 5240 MHz; Calibrated: 2022/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2022/1/20
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.555 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.894 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.360 W/kg
SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.047 W/kg
Maximum value of SAR (measured) = 0.231 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 7.894 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.799 W/kg
SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.114 W/kg
Maximum value of SAR (measured) = 0.534 W/kg

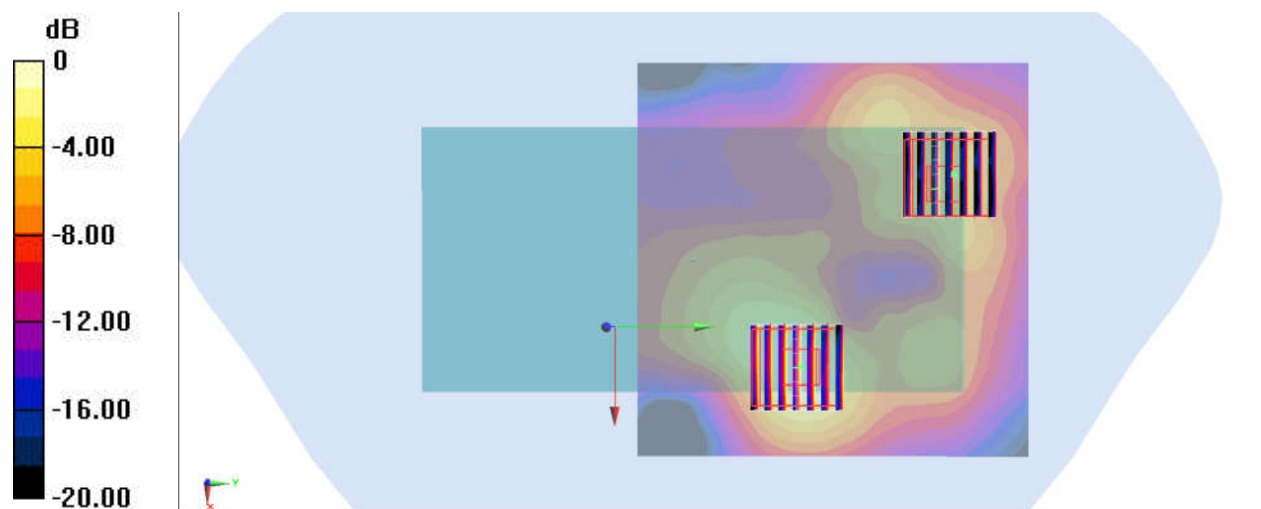

0 dB = 0.555 W/kg = -2.56 dBW/kg

#66_WLAN5GHz_802.11a 6Mbps_Top Side_10mm_Ch157

Communication System: 802.11a ; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: HSL_5G_221022 Medium parameters used : $f = 5785$ MHz; $\sigma = 5.246$ S/m; $\epsilon_r = 36.516$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.74, 4.74, 4.74) @ 5785 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.977 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 8.813 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.118 W/kg
Maximum value of SAR (measured) = 0.912 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 8.813 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.374 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.031 W/kg
Maximum value of SAR (measured) = 0.258 W/kg

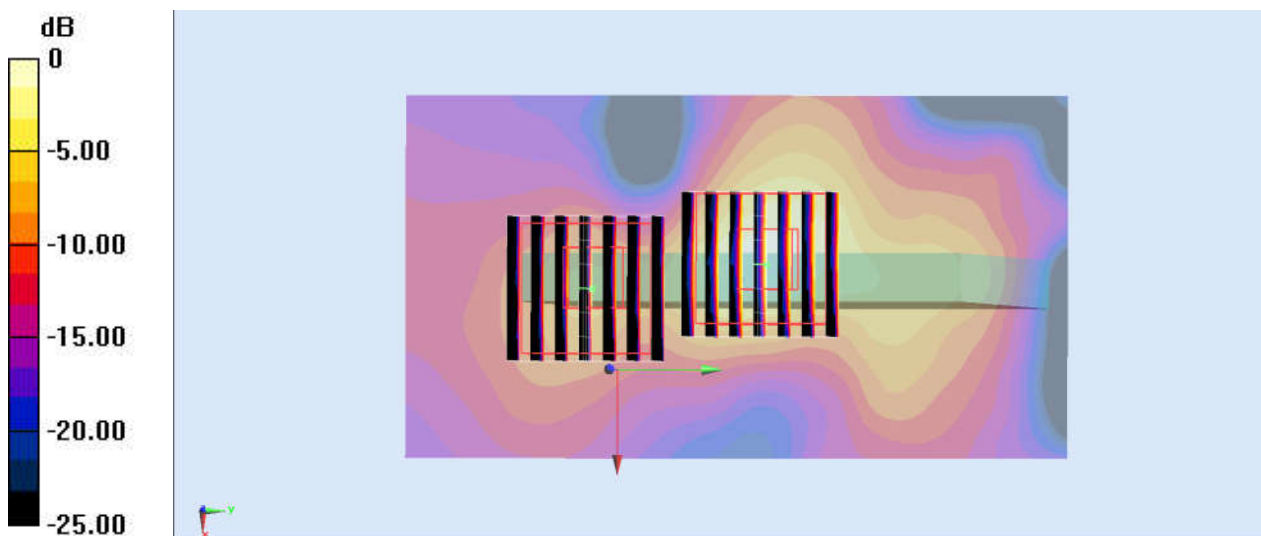

0 dB = 0.977 W/kg = -0.10 dBW/kg

#67_Bluetooth_1Mbps_Left Side_10mm_Ch39


Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_221003 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 39.726$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.44, 7.44) @ 2441 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.302 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.38 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.371 W/kg
SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.094 W/kg
Maximum value of SAR (measured) = 0.305 W/kg

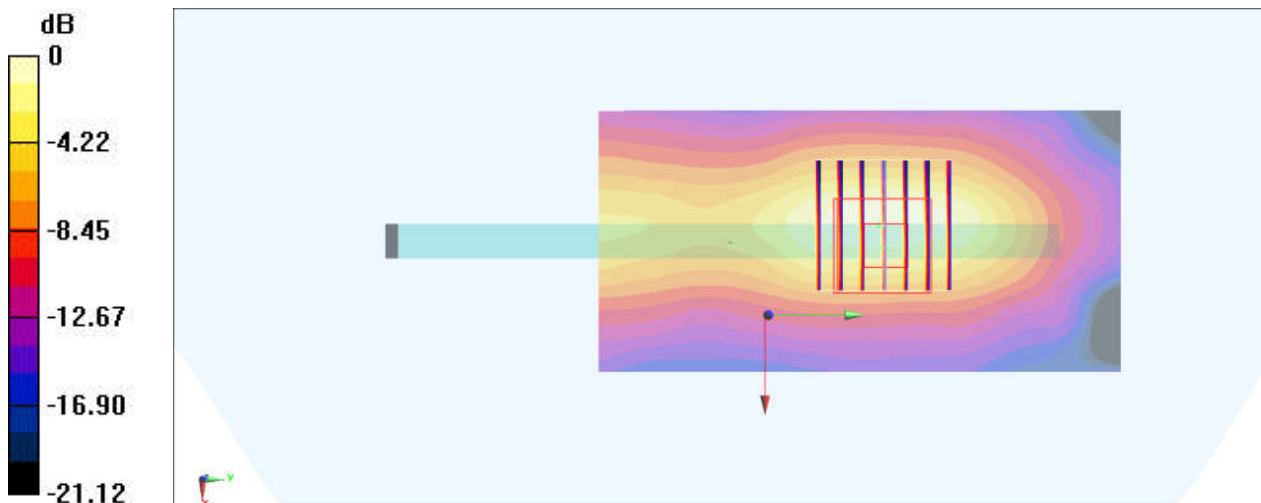

0 dB = 0.305 W/kg = -5.16 dBW/kg