

#01_LTE Band 12_10M_QPSK_1_0_Right Cheek_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_211206 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 41.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 707.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.38 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.32 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.470 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

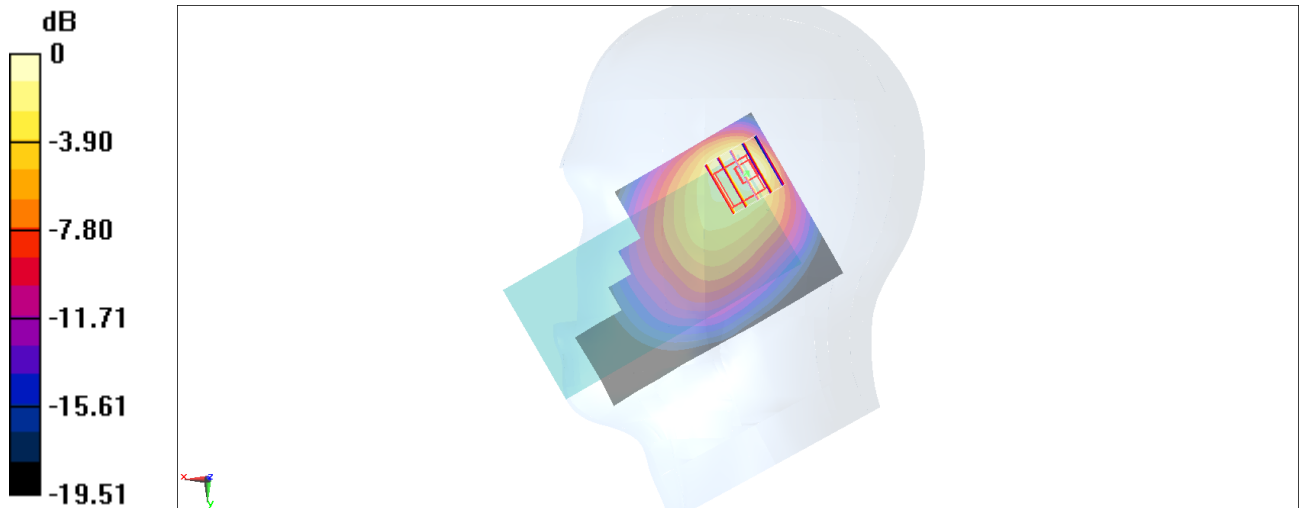

0 dB = 1.07 W/kg = 0.29 dBW/kg

#02_LTE Band 13_10M_QPSK_1_0_Right Tilted_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750_211205 Medium parameters used: $f = 782$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 782 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.78 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.844 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

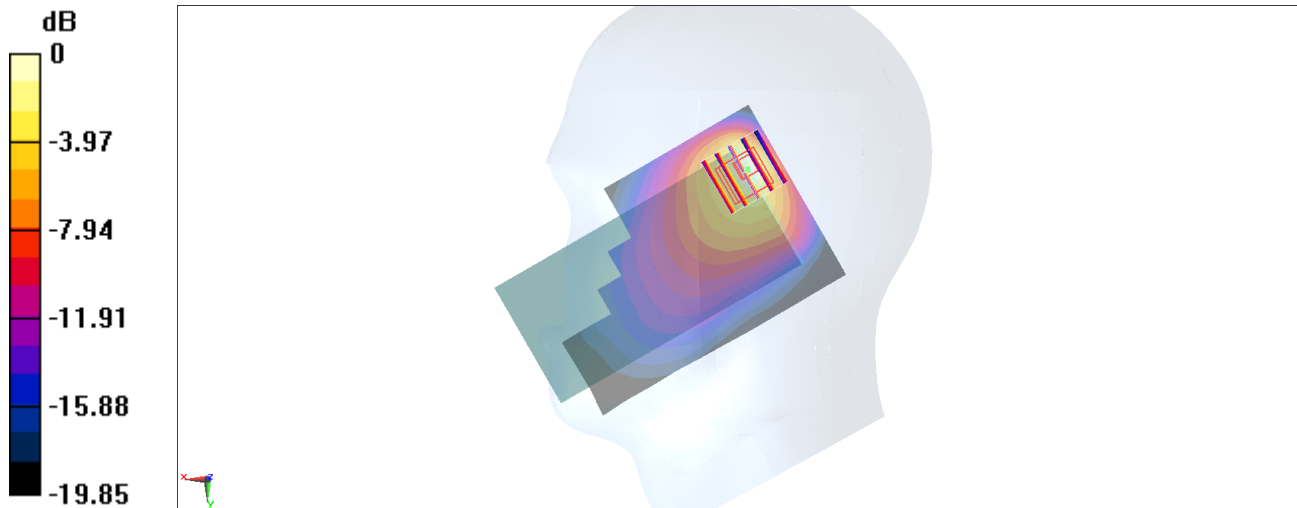

0 dB = 1.13 W/kg = 0.53 dBW/kg

#03_LTE Band 14_10M_QPSK_1_0_Right Cheek_Ch23330

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_211206 Medium parameters used: $f = 793$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 40.725$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 793 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.35 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.73 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.507 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

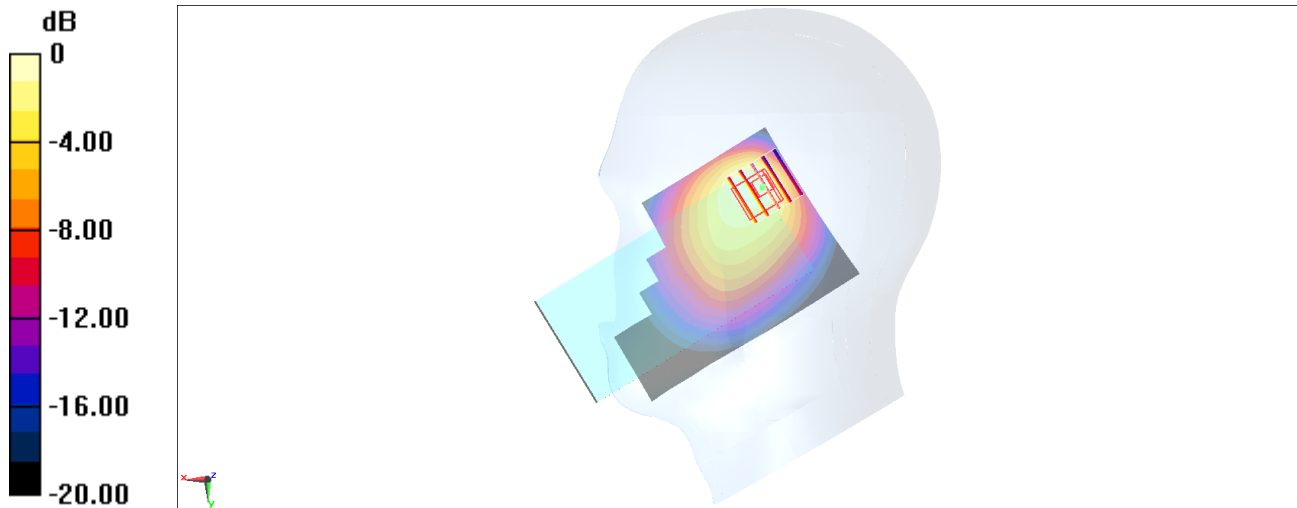

0 dB = 1.05 W/kg = 0.21 dBW/kg

#04_LTE Band 26_15M_QPSK_1_0_Right Tilted_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_211203 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.224$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.49, 6.49, 6.49) @ 831.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.83 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.472 W/kg

Maximum value of SAR (measured) = 0.972 W/kg

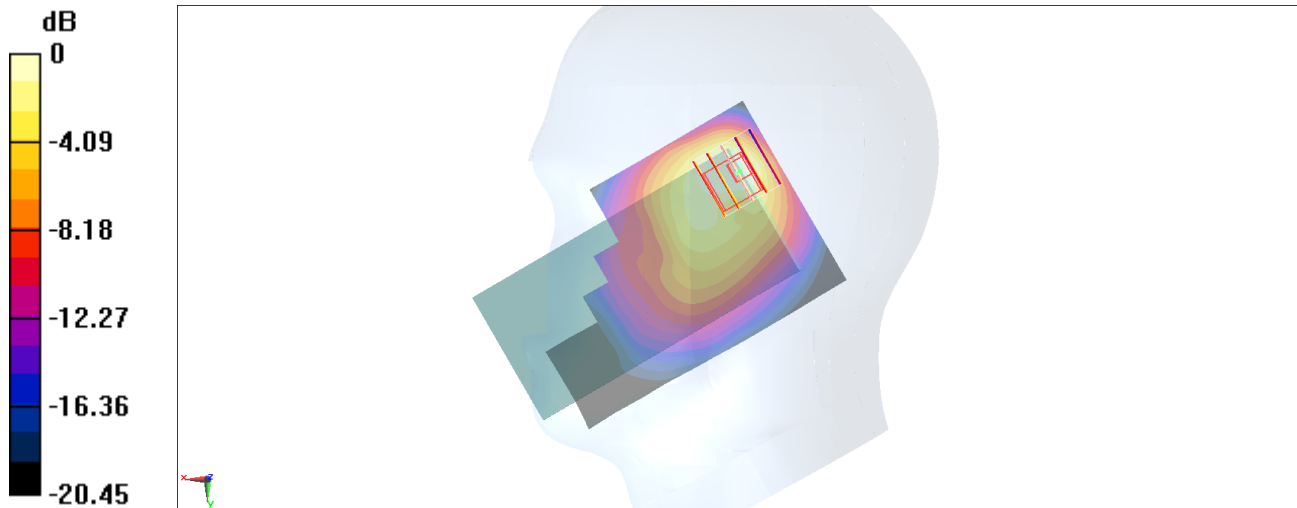

0 dB = 0.972 W/kg = -0.12 dBW/kg

#05_LTE Band 71_20M_QPSK_1_0_Right Cheek_Ch133322

Communication System: LTE; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750_211203 Medium parameters used: $f = 683$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.845$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 683 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.14 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

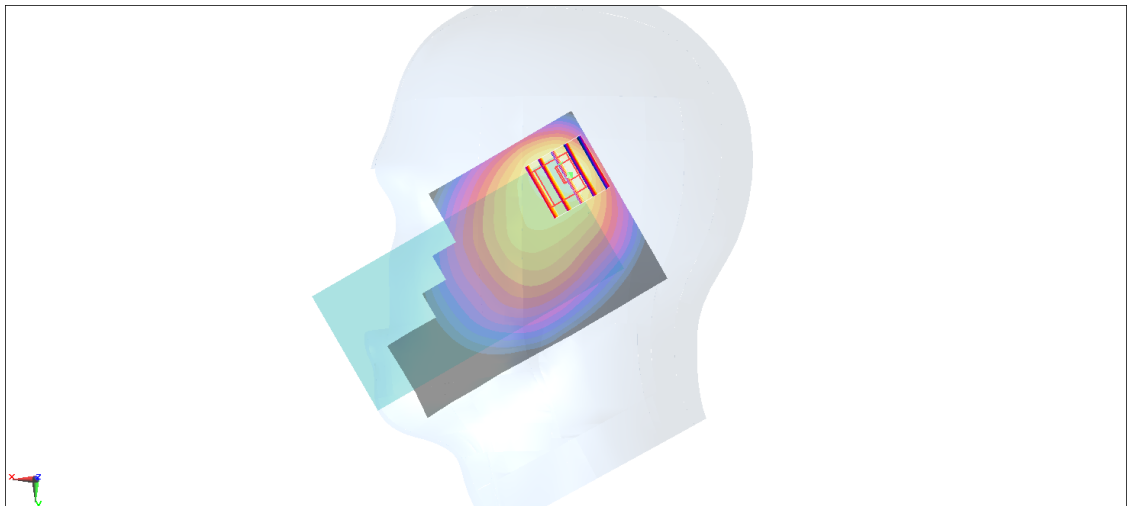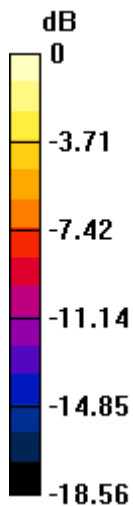

0 dB = 0.805 W/kg = -0.94 dBW/kg

#06_LTE FR1 n41_100M_BPSK_270_0_Left Cheek_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:2

Medium: HSL_2600_211130 Medium parameters used : $f = 2592.99$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 39.201$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.6, 7.6, 7.6) @ 2592.99 MHz; Calibrated: 2021/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2021/9/15
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.70 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

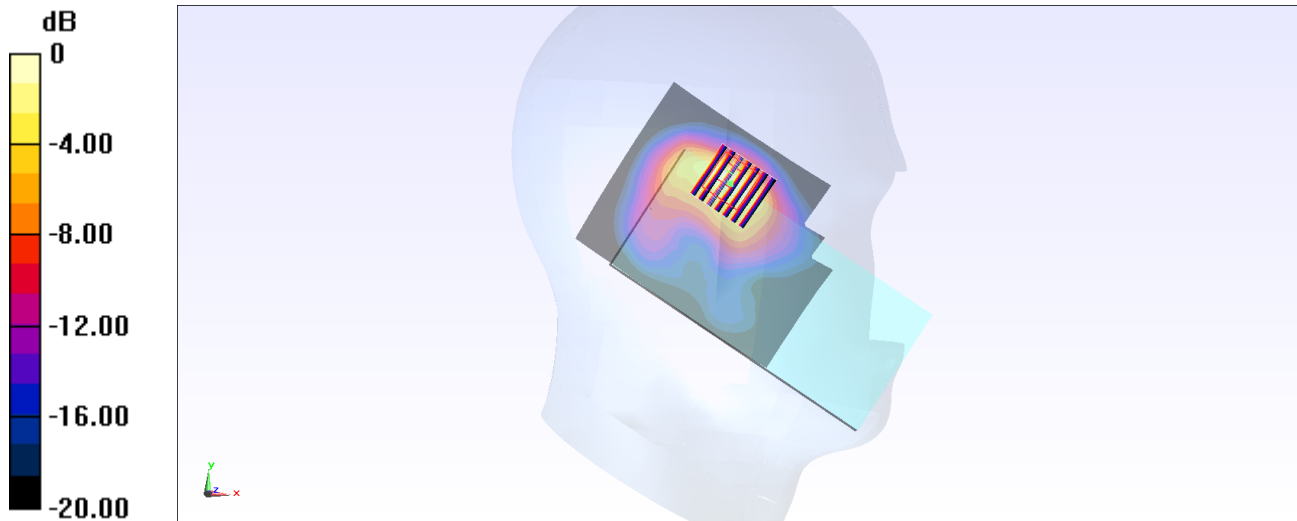

0 dB = 1.72 W/kg = 2.36 dBW/kg

#07_WLAN2.4GHz_802.11g 6Mbps_Left Tilted_Ch11;Ant 4+3

Communication System: 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1.071

Medium: HSL_2450_220105 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.493$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.6, 7.6, 7.6) @ 2462 MHz; Calibrated: 2021/6/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2021/2/11
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.26 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.76 W/kg


/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.26 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

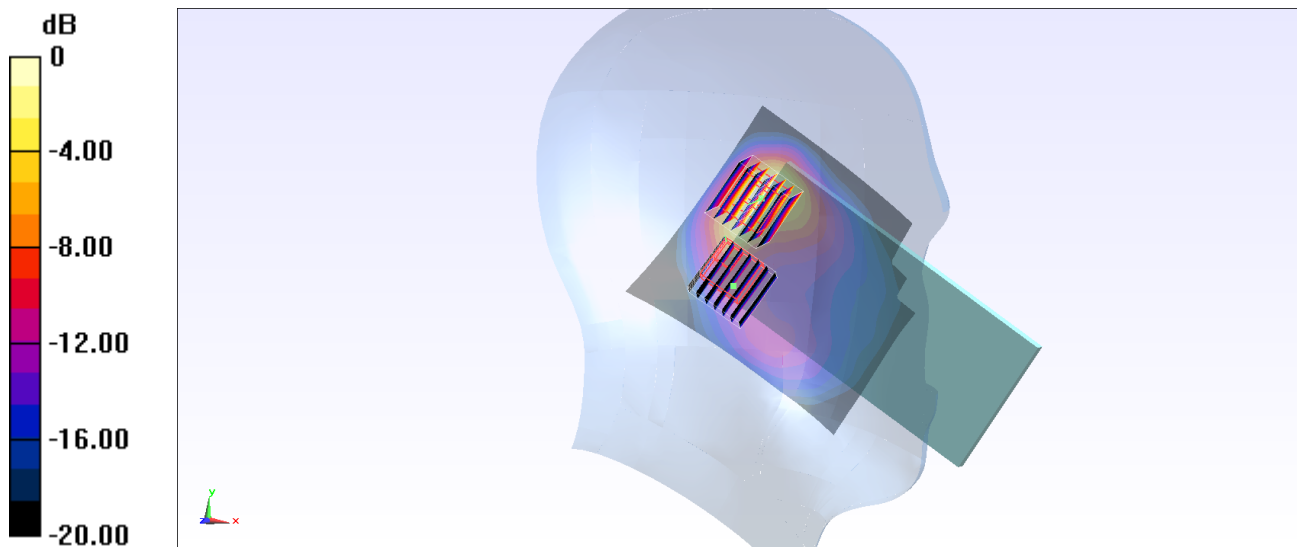

0 dB = 1.80 W/kg = 2.55 dBW/kg

#08_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_Ch58;Ant 4+3

Communication System: 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1.133
Medium: HSL_5G_220104 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.795$ S/m; $\epsilon_r = 36.494$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.1, 5.1, 5.1) @ 5290 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 17.50 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.07 W/kg
SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.240 W/kg
Maximum value of SAR (measured) = 1.95 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 17.50 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.569 W/kg
SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.064 W/kg
Maximum value of SAR (measured) = 0.357 W/kg

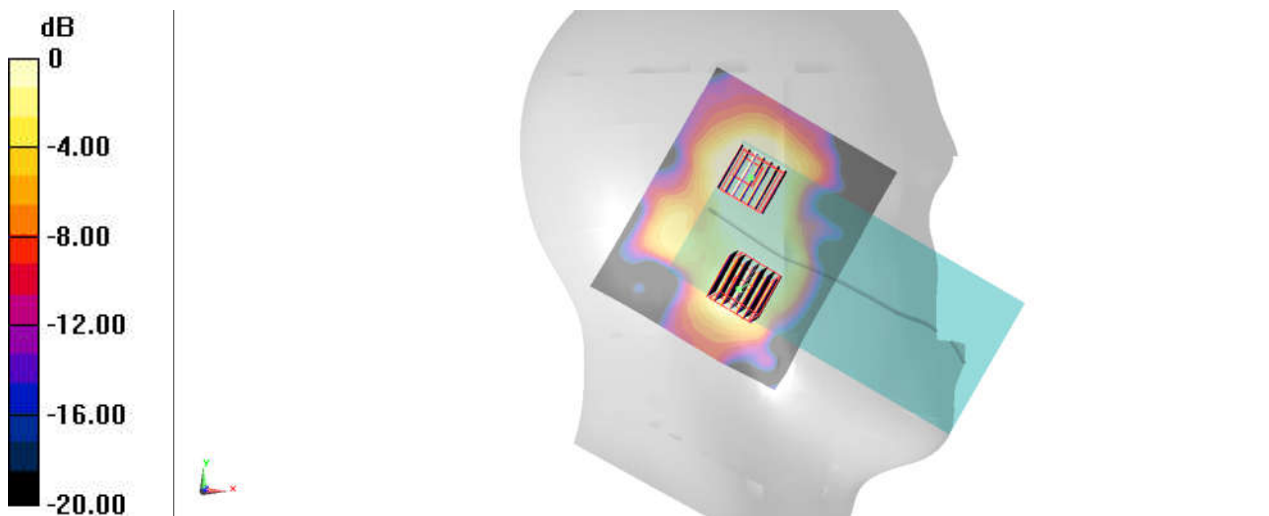

0 dB = 0.357 W/kg = -4.47 dBW/kg

#09_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_Ch114;Ant 4+3

Communication System: 802.11ac; Frequency: 5570 MHz; Duty Cycle: 1:1.134
Medium: HSL_5G_220104 Medium parameters used: $f = 5570$ MHz; $\sigma = 5.109$ S/m; $\epsilon_r = 36.097$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.39, 4.39, 4.39) @ 5570 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.63 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 15.04 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.76 W/kg
SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.224 W/kg
Maximum value of SAR (measured) = 2.07 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 15.04 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.440 W/kg
SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.044 W/kg
Maximum value of SAR (measured) = 0.263 W/kg

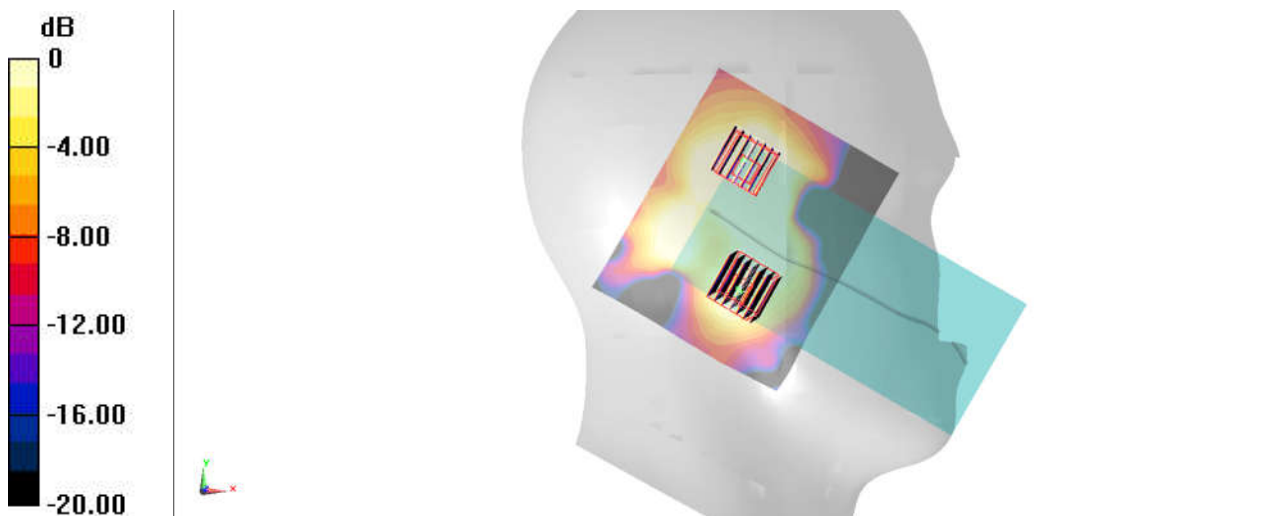

0 dB = 0.263 W/kg = -5.80 dBW/kg

#10_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_Ch155;Ant 4+3

Communication System: 802.11ac ; Frequency: 5775 MHz;Duty Cycle: 1:1.133
Medium: HSL_5G_220105 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.382$ S/m; $\epsilon_r = 36.121$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.73, 4.73, 4.73) @ 5775 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 14.91 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.73 W/kg
SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.220 W/kg
Maximum value of SAR (measured) = 2.04 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 14.91 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.625 W/kg
SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.052 W/kg
Maximum value of SAR (measured) = 0.355 W/kg

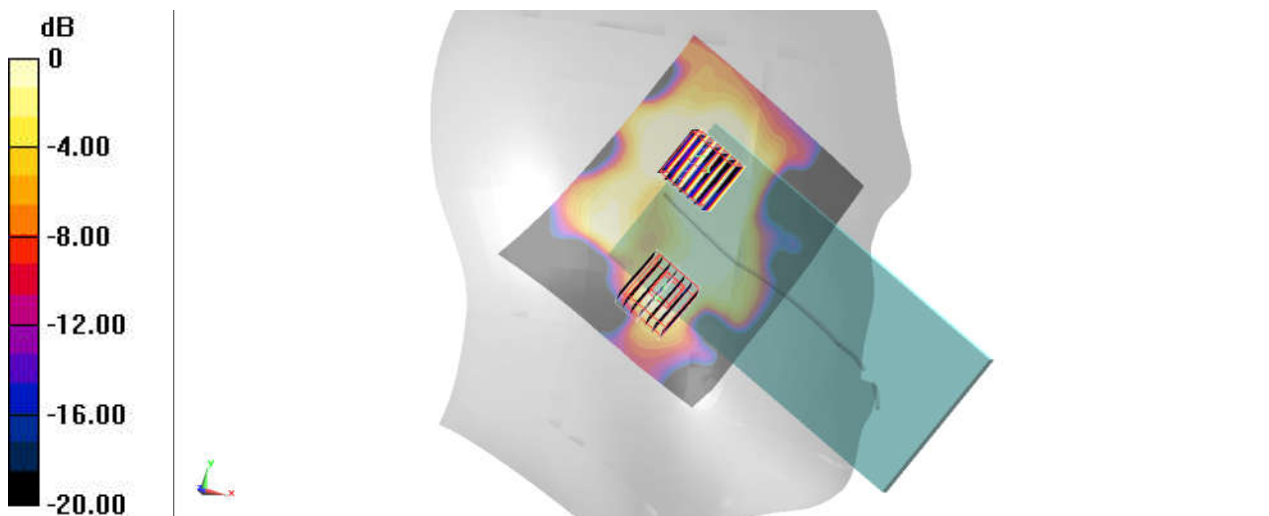

0 dB = 0.355 W/kg = -4.50 dBW/kg

#11_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_Ch171

Communication System: 802.11ac; Frequency: 5855 MHz; Duty Cycle: 1:1.134

Medium: HSL_5G_220106 Medium parameters used: $f = 5855$ MHz; $\sigma = 5.499$ S/m; $\epsilon_r = 36.033$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.18, 4.18, 4.18) @ 5855 MHz; Calibrated: 2021/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.50 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.41 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 2.46 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

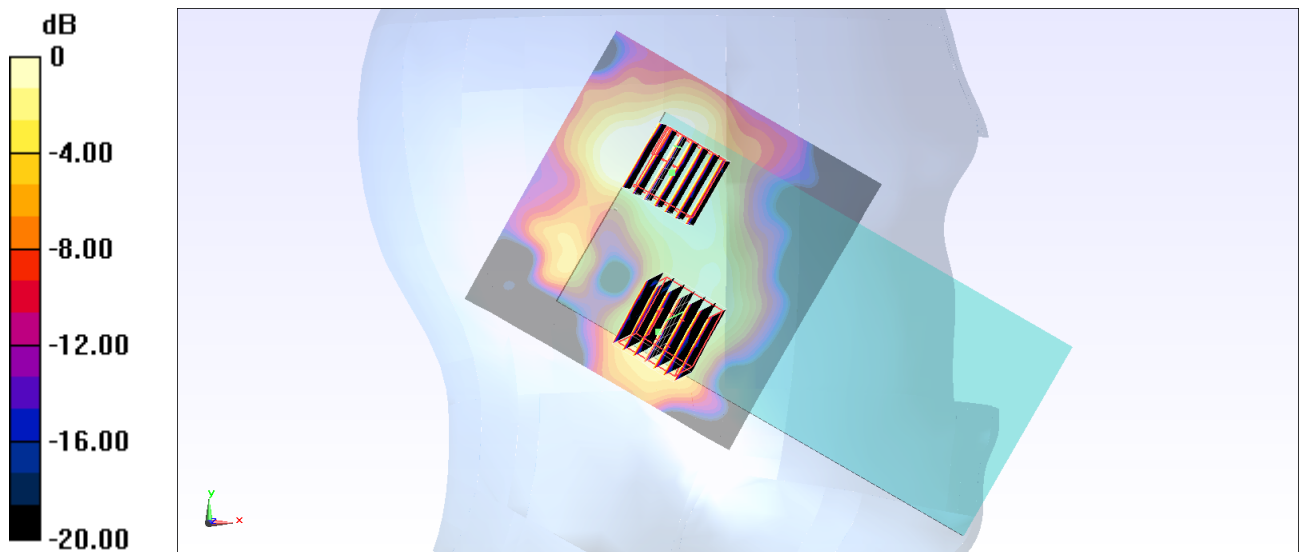

0 dB = 0.645 W/kg = -1.90 dBW/kg

Date: 2022-01-06

#12_WLAN6GHz_802.11ax-HE160 MCS0_Right Cheek_Ch47;Ant 4+3

Communication System: U-NII-5; Frequency: 6185.0

Medium: HSL_6500_220106. Medium parameters used: $f = 6185.0$ MHz; $\sigma = 5.60$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.95, 4.95, 4.95); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2021-09-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (102.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.266 W/kg; SAR (10g) = 0.084 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.14 dB

SAR (1g) = 0.048 W/kg; SAR (10g) = 0.016 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.14 dB

SAR (1g) = 0.310 W/kg; SAR (10g) = 0.092 W/kg;

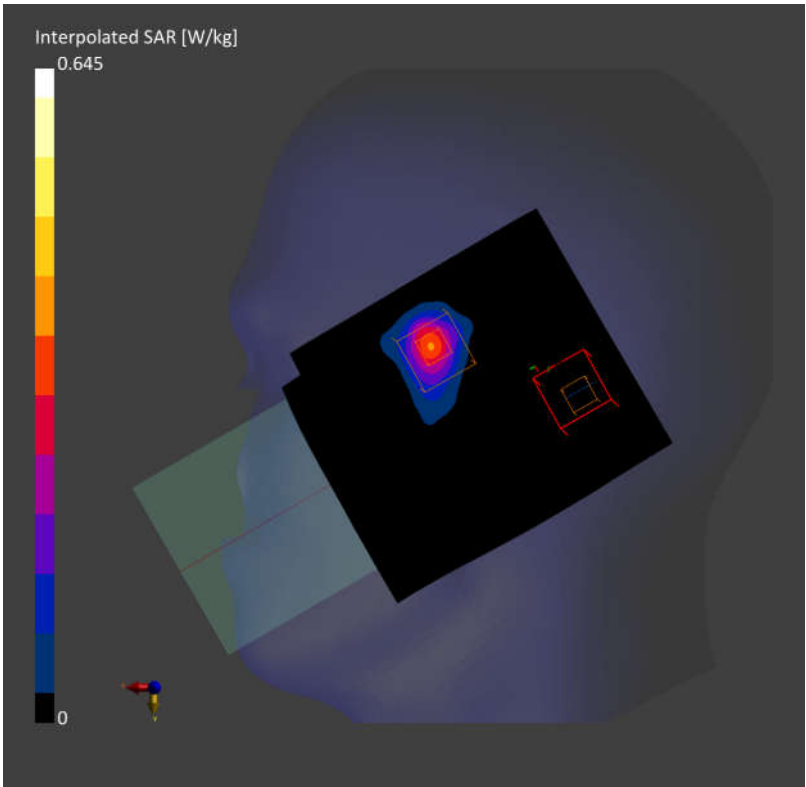

#13_Bluetooth_1Mbps_Right Cheek_Ch39;Ant 4+3

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_220102 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.779$ S/m; $\epsilon_r = 40.127$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2441 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.183 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.115 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.110 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.115 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

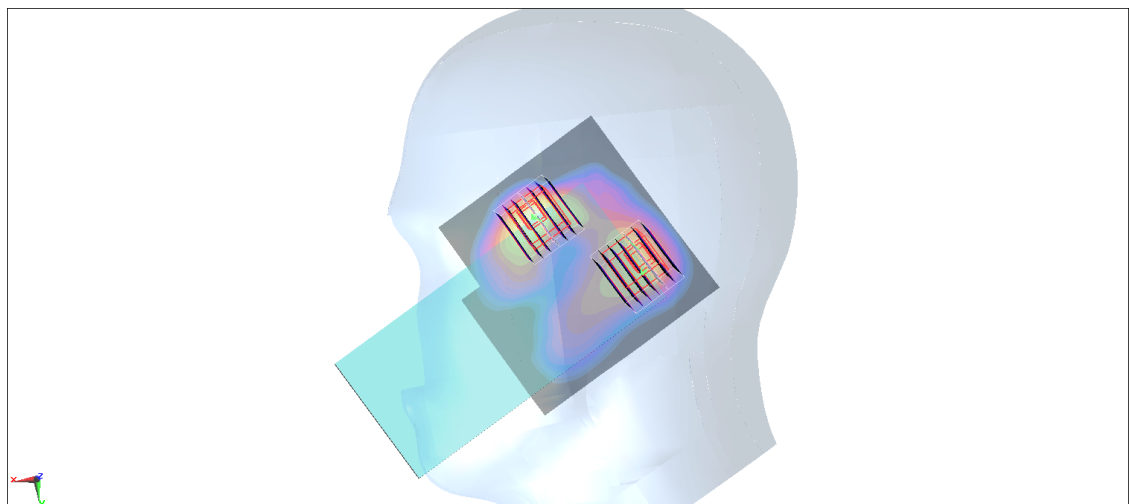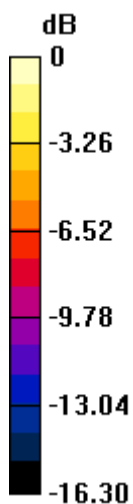

0 dB = 0.218 W/kg = -6.62 dBW/kg

#14_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_211203 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.756$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 707.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.253 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.69 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

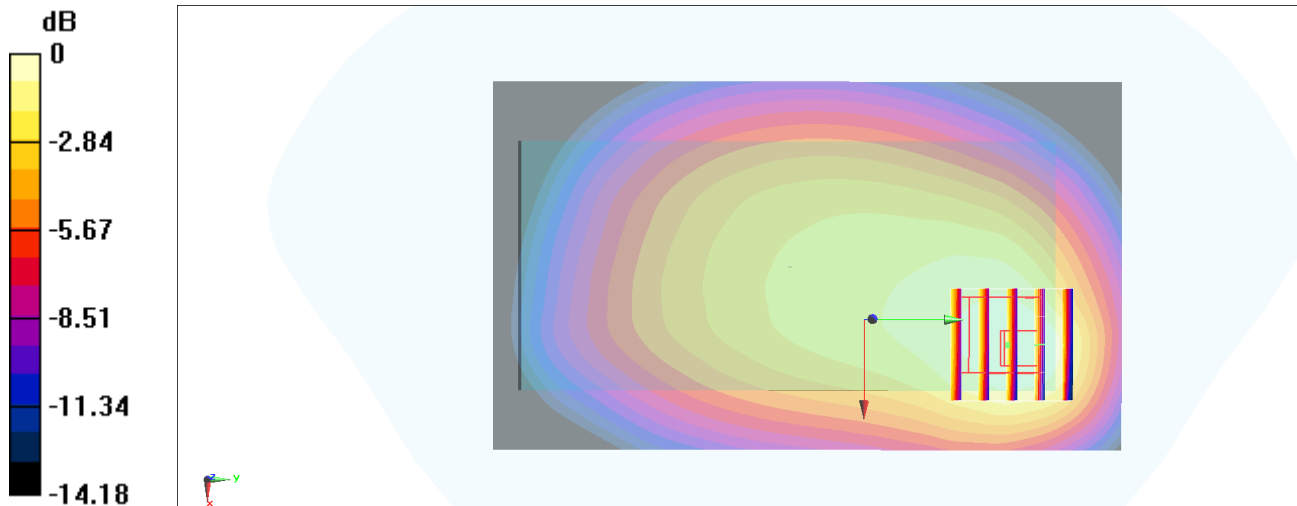

0 dB = 0.240 W/kg = -6.20 dBW/kg

#15_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750_211205 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.913 \text{ S/m}$; $\epsilon_r = 41.651$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 782 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.277 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.53 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.220 W/kg ; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

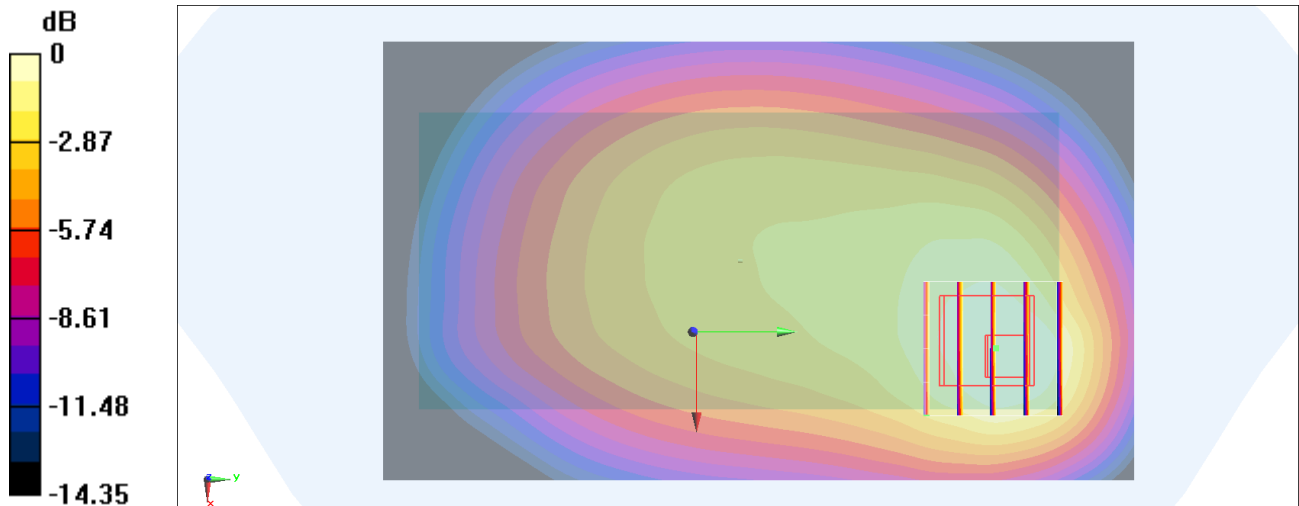

$0 \text{ dB} = 0.256 \text{ W/kg} = -5.92 \text{ dBW/kg}$

#16_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_211203 Medium parameters used: $f = 793$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.561$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 793 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.27 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

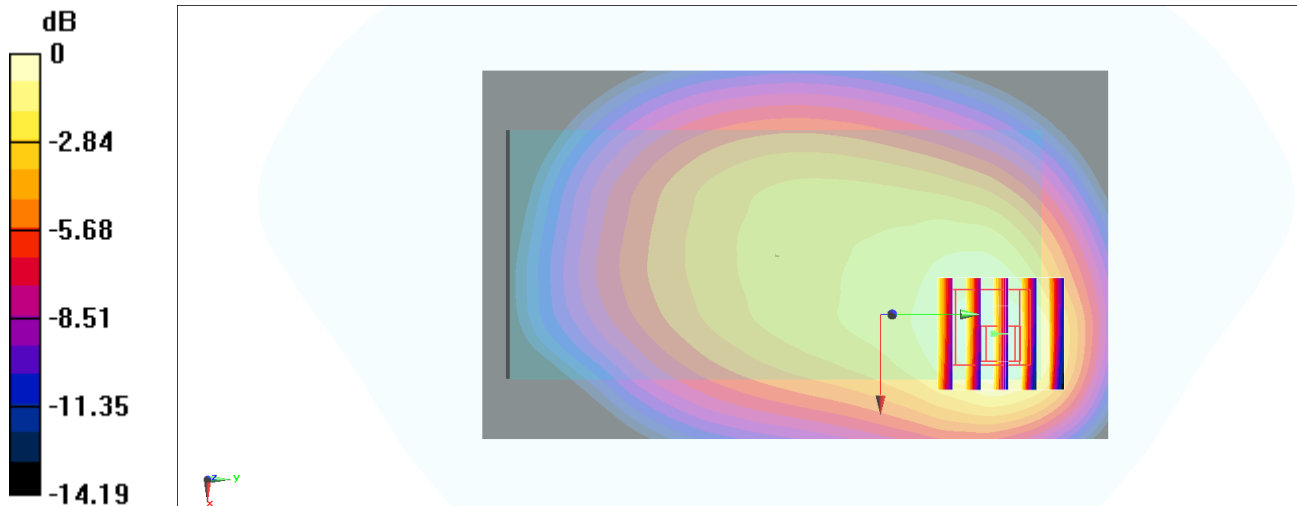

0 dB = 0.305 W/kg = -5.16 dBW/kg

#17_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_211204 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.551$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.49, 6.49, 6.49) @ 831.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.329 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.10 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

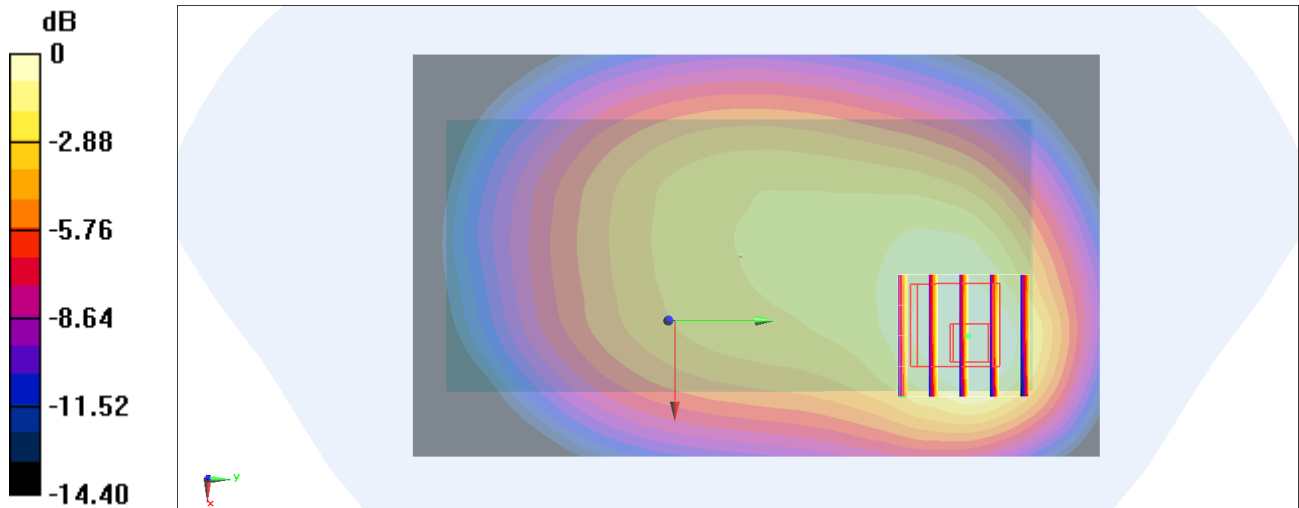

0 dB = 0.304 W/kg = -5.17 dBW/kg

#18_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133322

Communication System: LTE; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750_211205 Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 42.015$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 683 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.255 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.79 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.222 W/kg ; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

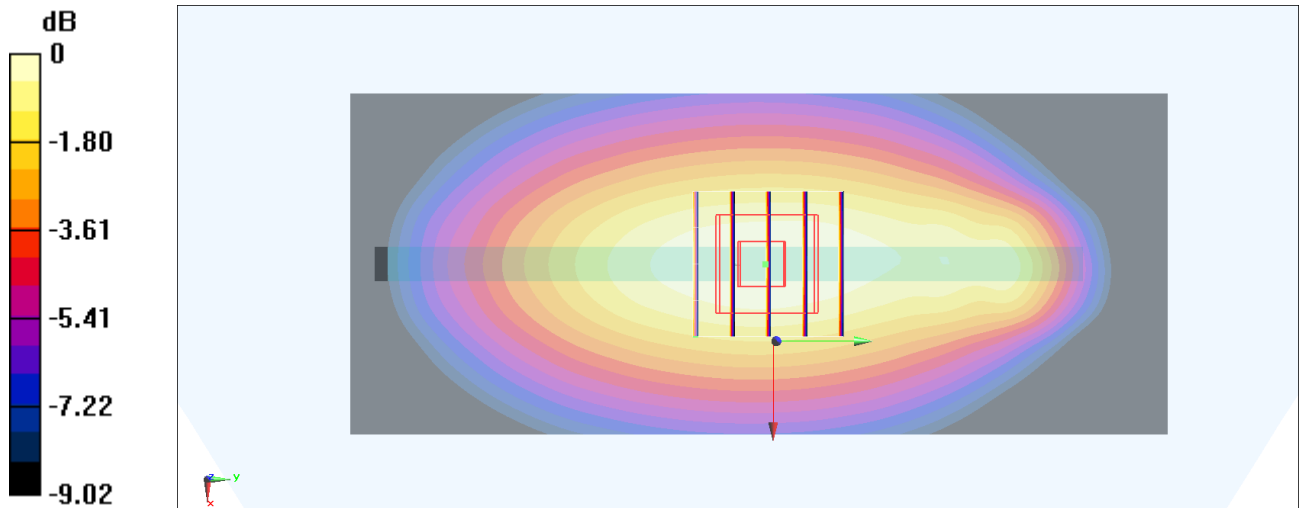

0 dB = 0.254 W/kg = -5.95 dBW/kg

#19_LTE FR1 n41_100M_BPSK_135_69_Right Side_10mm_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:2

Medium: HSL_2600_211201 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.211$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.6, 7.6, 7.6) @ 2592.99 MHz; Calibrated: 2021/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2021/9/15
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.54 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.29 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

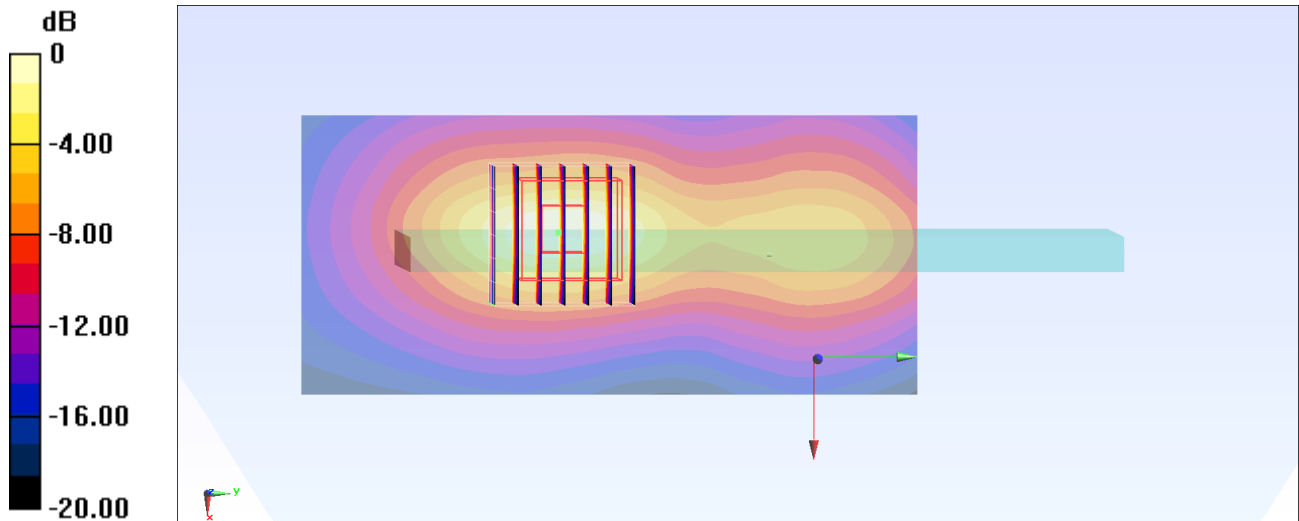

0 dB = 1.52 W/kg = 1.82 dBW/kg

#20_WLAN2.4GHz_802.11b 1Mbps_Left Side_10mm_Ch11;Ant 3

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.011

Medium: HSL_2450_220105 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.863$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2462 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.708 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.61 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

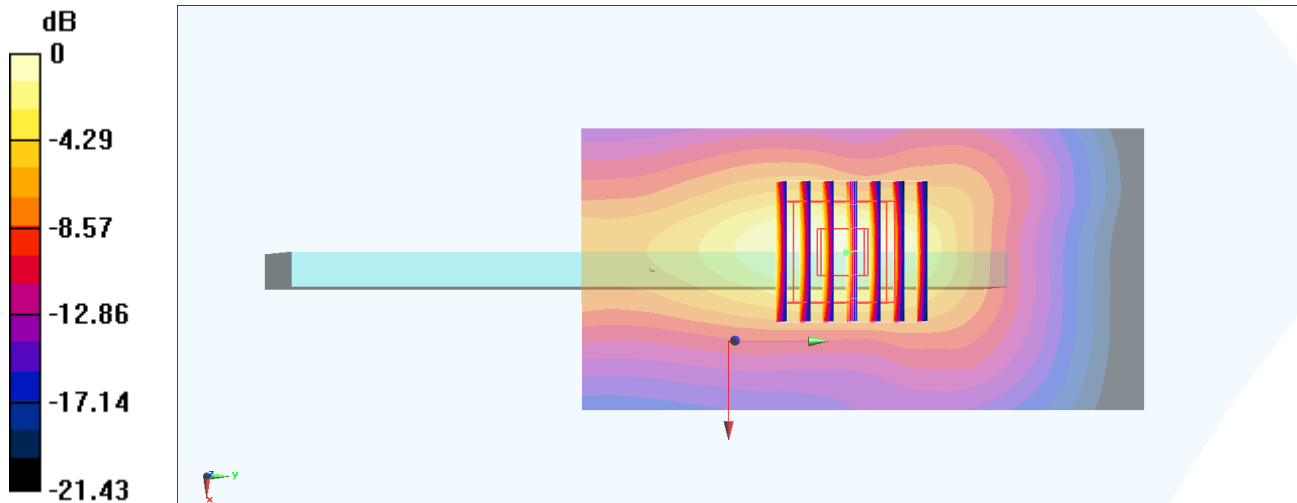

0 dB = 0.716 W/kg = -1.45 dBW/kg

#21_WLAN5GHz_802.11n-HT40 MCS0_Front_10mm_Ch46;Ant 4+3 EU

Communication System: 802.11n; Frequency: 5230 MHz; Duty Cycle: 1:1.033
Medium: HSL_5G_220101 Medium parameters used: $f = 5230$ MHz; $\sigma = 4.733$ S/m; $\epsilon_r = 36.592$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.1, 5.1, 5.1) @ 5230 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.857 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.054 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.824 W/kg
SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.089 W/kg
Maximum value of SAR (measured) = 0.519 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.054 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.152 W/kg
Maximum value of SAR (measured) = 0.820 W/kg

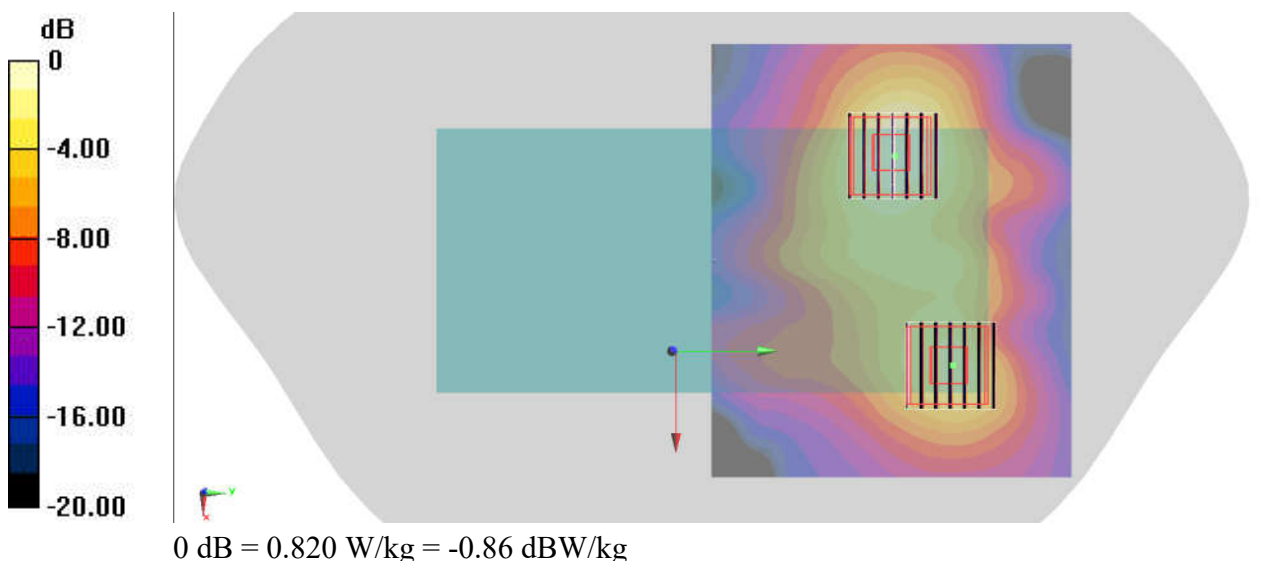

#22_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155;Ant 4+3

Communication System: 802.11ac ; Frequency: 5775 MHz;Duty Cycle: 1:1.133
Medium: HSL_5G_211230 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.293$ S/m; $\epsilon_r = 35.971$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.73, 4.73, 4.73) @ 5775 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.166 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.555 W/kg
SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.046 W/kg
Maximum value of SAR (measured) = 0.318 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.166 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 0.945 W/kg

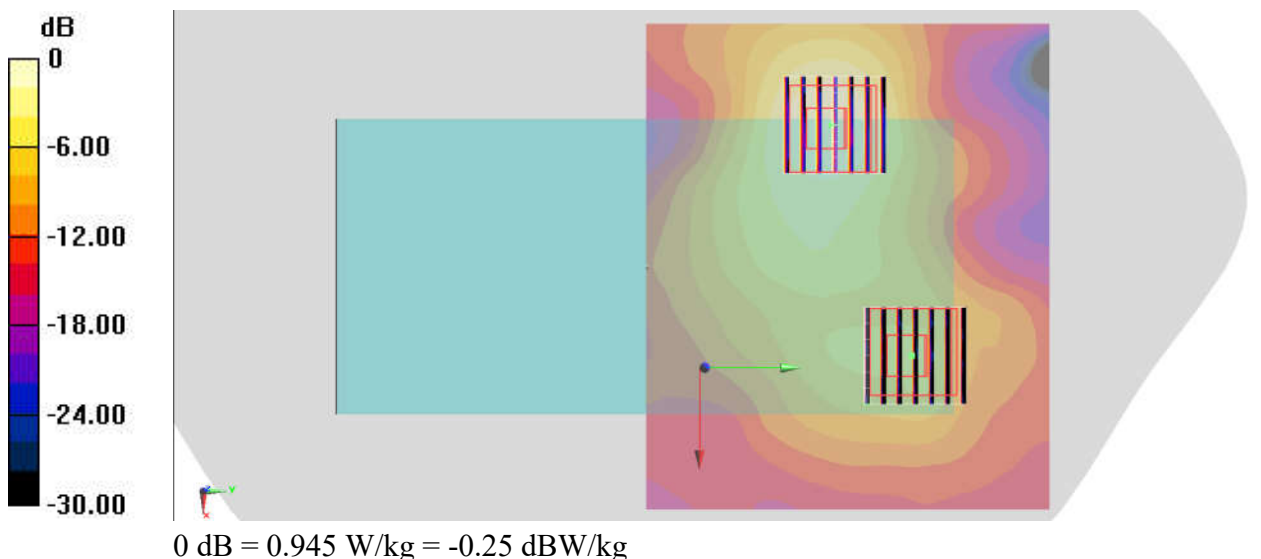

#23_Bluetooth_1Mbps_Top Side_10mm_Ch78;Ant 4+3

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.302

Medium: HSL_2450_220105 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.829$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2480 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.177 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.801 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

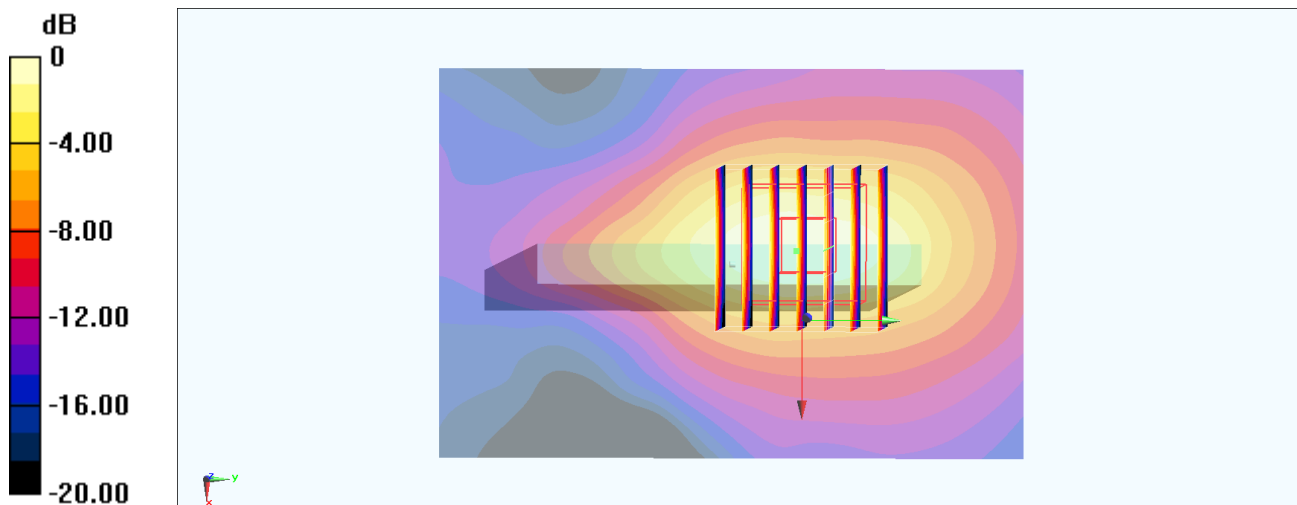

0 dB = 0.171 W/kg = -7.67 dBW/kg

#24_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_211203 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.756$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 707.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.253 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.69 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

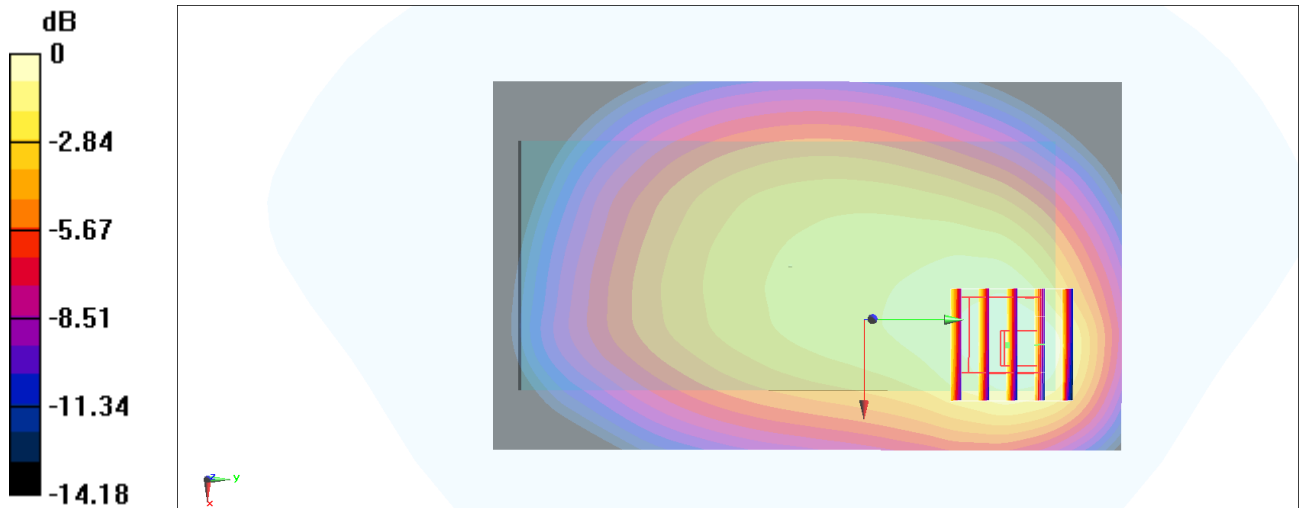

0 dB = 0.240 W/kg = -6.20 dBW/kg

#25_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750_211205 Medium parameters used: $f = 782$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 782 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.277 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.53 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

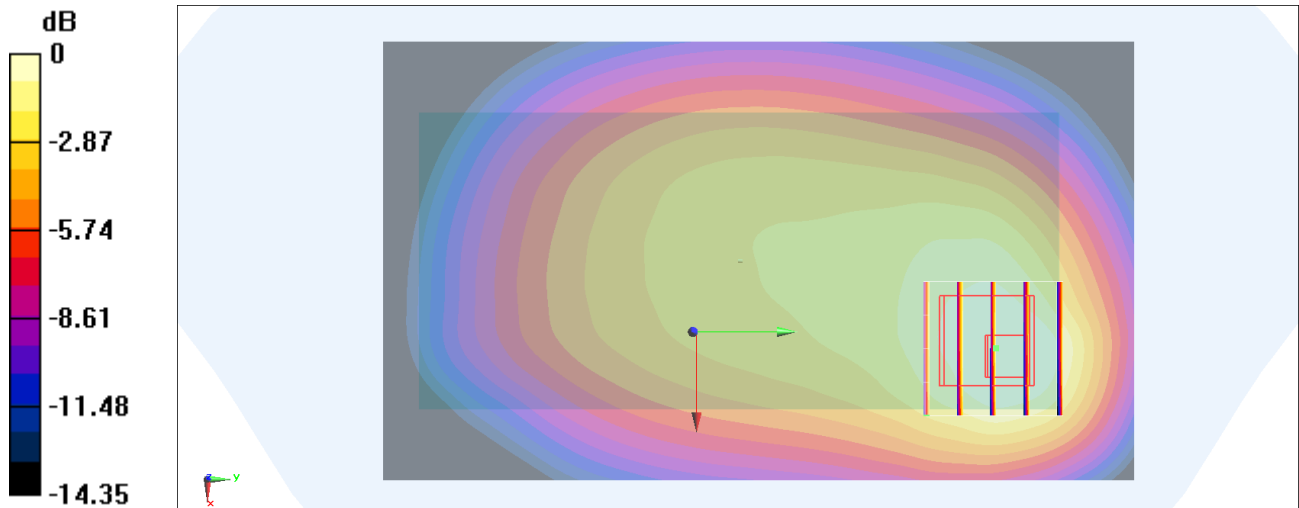

0 dB = 0.256 W/kg = -5.92 dBW/kg

#26_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750_211203 Medium parameters used: $f = 793$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.561$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 793 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.27 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.305 W/kg

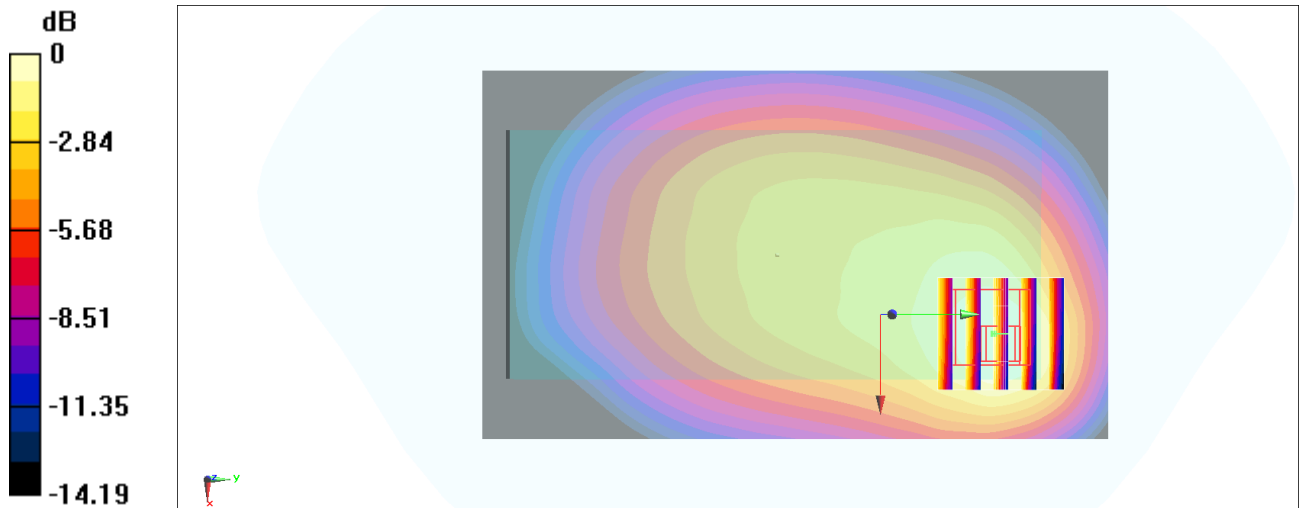

0 dB = 0.305 W/kg = -5.16 dBW/kg

#27_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_211204 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.614$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.49, 6.49, 6.49) @ 831.5 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.332 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.25 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

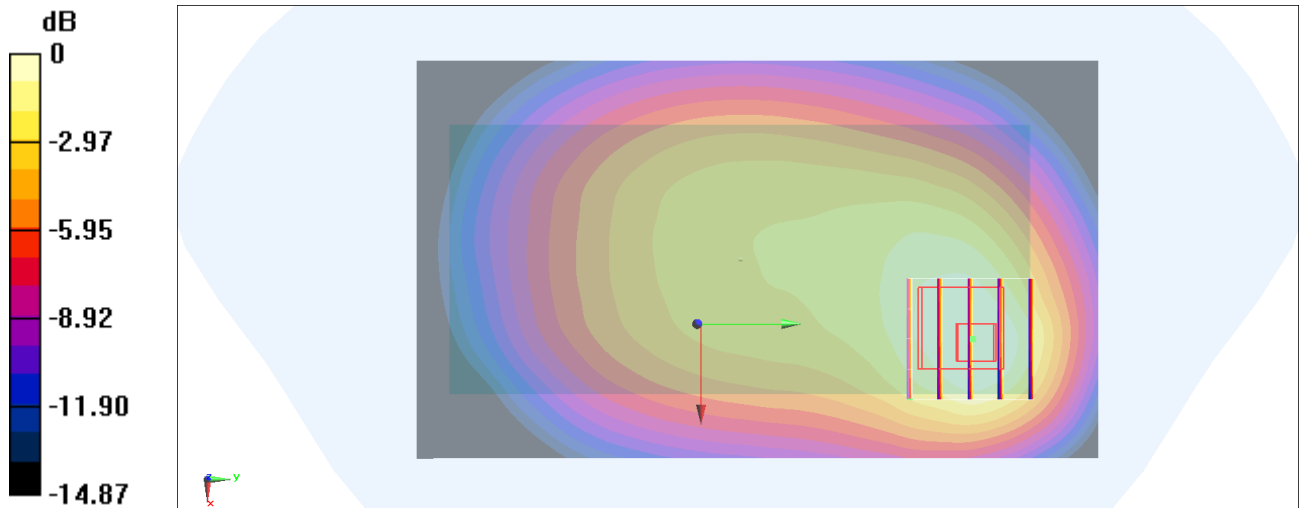

0 dB = 0.306 W/kg = -5.14 dBW/kg

#28_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133322

Communication System: LTE; Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750_211205 Medium parameters used: $f = 683$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.015$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3184; ConvF(6.59, 6.59, 6.59) @ 683 MHz; Calibrated: 2021/9/23
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.237 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.14 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

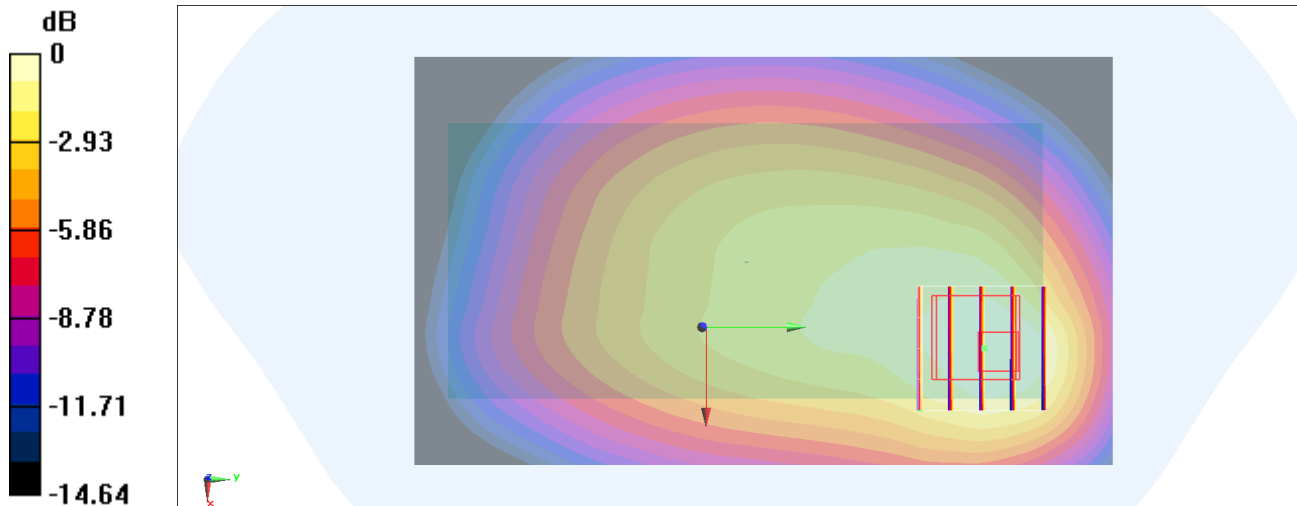

0 dB = 0.224 W/kg = -6.50 dBW/kg

#29_LTE FR1 n41_100M_BPSK_135_69_Back_10mm_Ch518598

Communication System: NR; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600_211201 Medium parameters used : $f = 2592.99$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 39.211$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.6, 7.6, 7.6) @ 2592.99 MHz; Calibrated: 2021/1/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2021/9/15
- Phantom: SAM-Middle; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.741 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.98 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.922 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

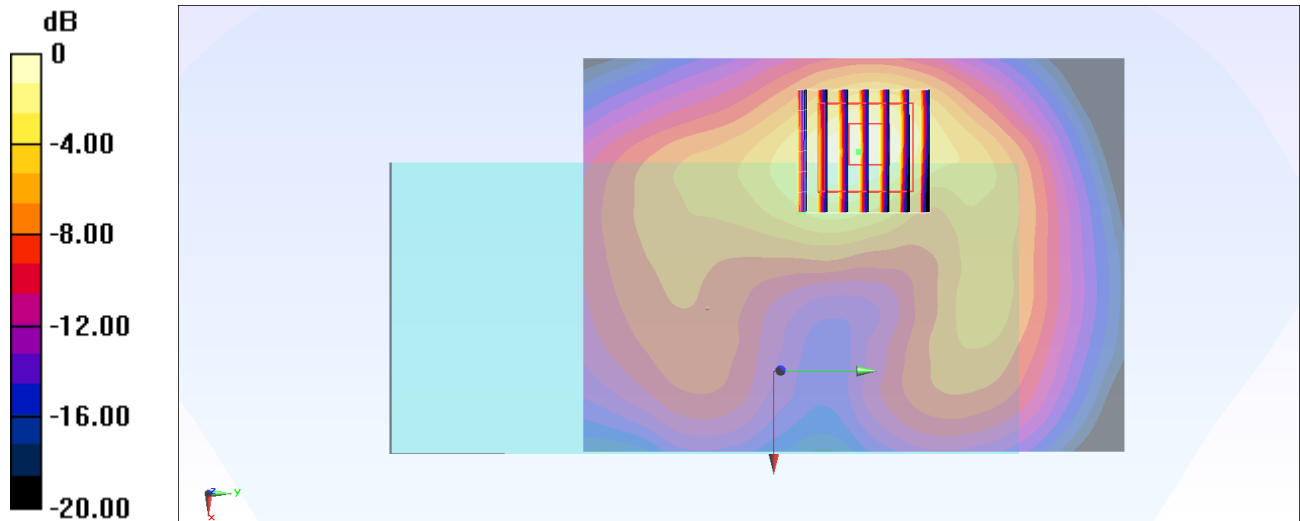

0 dB = 0.741 W/kg = -1.30 dBW/kg

#30_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch11;Ant 3

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_211220 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.814$ S/m; $\epsilon_r = 39.194$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2462 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.781 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.64 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

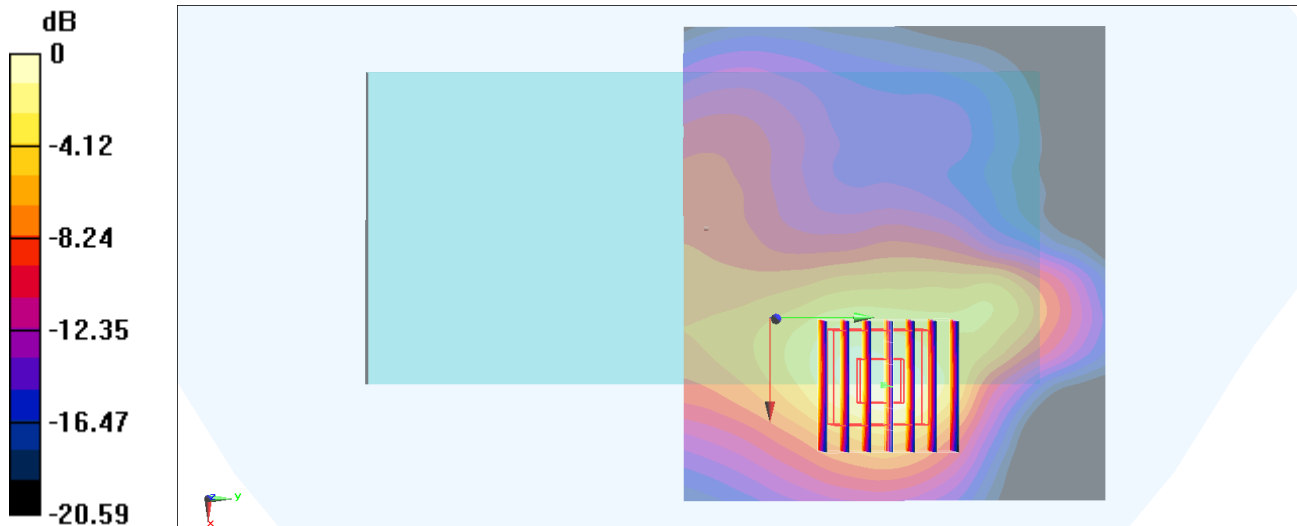

0 dB = 0.774 W/kg = -1.11 dBW/kg

#31_WLAN5GHz_802.11a_6Mbps_Front_10mm_Ch56

Communication System: 802.11a; Frequency: 5280 MHz; Duty Cycle: 1:1.070

Medium: HSL_5G_211220 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.608$ S/m; $\epsilon_r = 35.941$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.42, 4.42, 4.42) @ 5280 MHz; Calibrated: 2021/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.98 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 1.14 W/kg


Zoom Scan (9x9x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.98 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

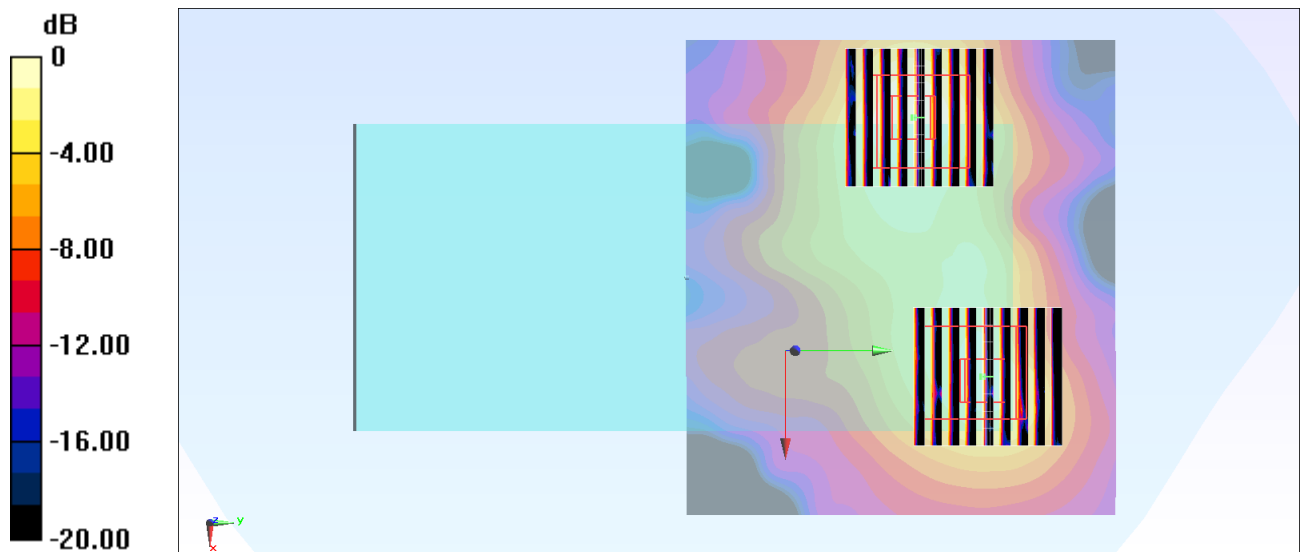

0 dB = 1.32 W/kg = 1.21 dBW/kg

#32_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch144;Ant 4+3

Communication System: 802.11a; Frequency: 5720 MHz; Duty Cycle: 1:1.068
Medium: HSL_5G_211230 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.226$ S/m; $\epsilon_r = 36.089$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.73, 4.73, 4.73) @ 5720 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.77 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 13.44 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 2.91 W/kg
SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.272 W/kg
Maximum value of SAR (measured) = 1.78 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 13.44 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 2.24 W/kg
SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.194 W/kg
Maximum value of SAR (measured) = 1.30 W/kg

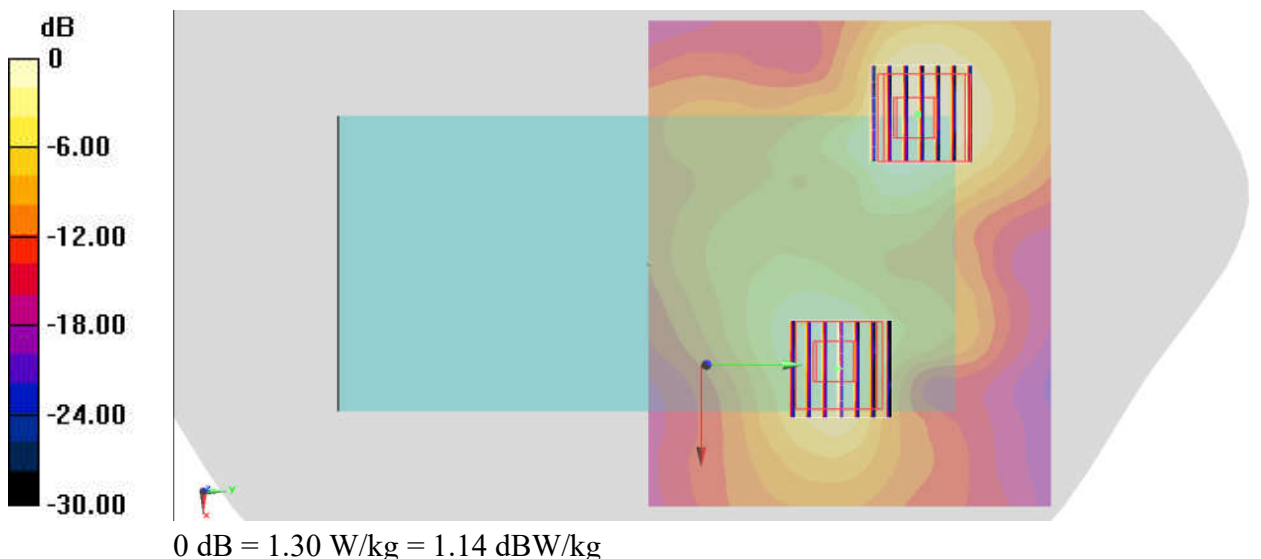

#33_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch165;Ant 4+3

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.035
Medium: HSL_5G_220101 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.387$ S/m; $\epsilon_r = 35.733$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.73, 4.73, 4.73) @ 5825 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.81 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.805 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.309 W/kg
Maximum value of SAR (measured) = 2.11 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 9.805 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.146 W/kg
Maximum value of SAR (measured) = 0.954 W/kg



0 dB = 0.954 W/kg = -0.20 dBW/kg

#34_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch177

Communication System: 802.11a; Frequency: 5885 MHz; Duty Cycle: 1:1.068

Medium: HSL_5G_220104 Medium parameters used: $f = 5885$ MHz; $\sigma = 5.559$ S/m; $\epsilon_r = 36.171$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.06, 4.06, 4.06) @ 5885 MHz; Calibrated: 2021/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.55 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.50 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 2.53 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.50 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

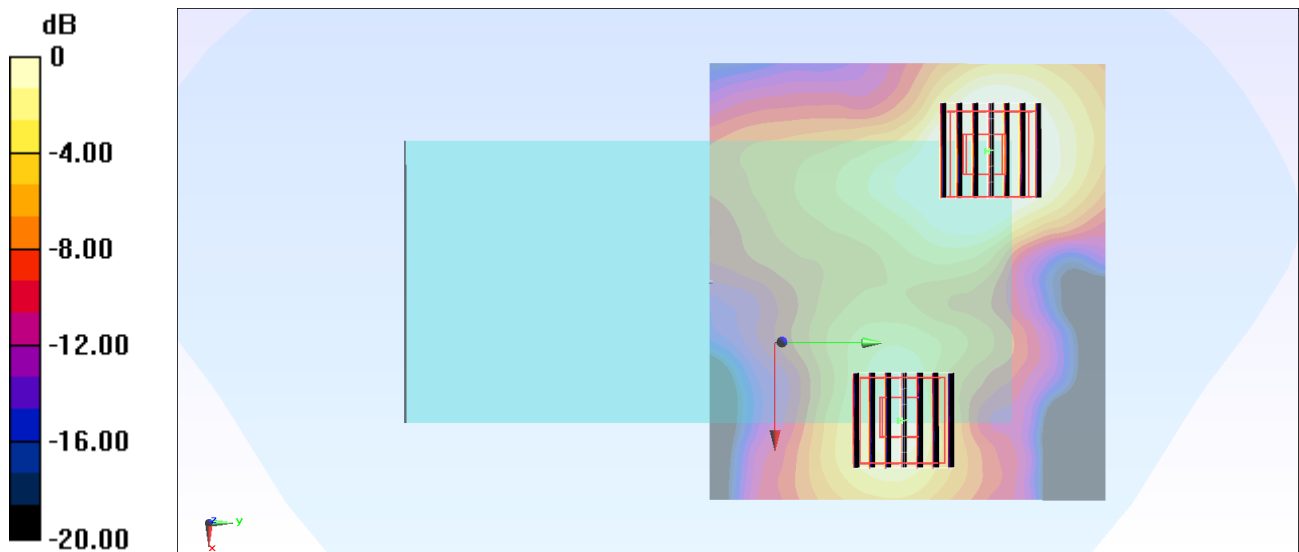

0 dB = 1.05 W/kg = 0.21 dBW/kg

Date: 2022-01-06

#35_WLAN6GHz_802.11ax-HE160 MCS0_Back_10mm_Ch207;Ant 4+3

Communication System: U-NII-8; Frequency: 6985.0

Medium: HSL_6500_220106. Medium parameters used: $f = 6985.0$ MHz; $\sigma = 6.54$ S/m; $\epsilon_r = 33.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.95, 4.95, 4.95); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2021-09-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: Y; Zoom Scan: Y

Area Scan (102.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.043 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 0.044 W/kg; SAR (10g) = 0.015 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.144 W/kg; SAR (10g) = 0.048 W/kg;

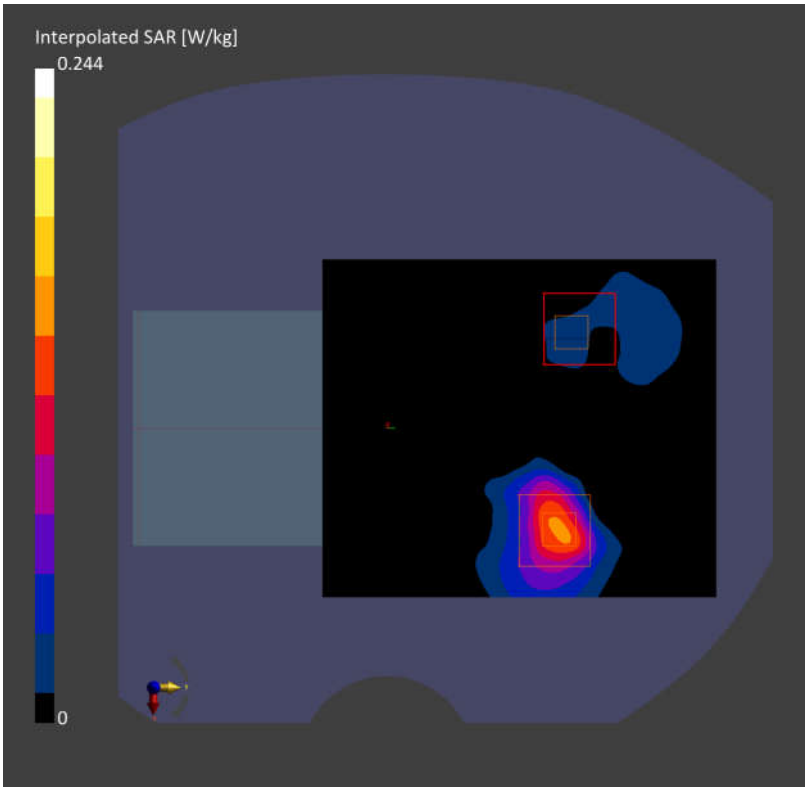

#36_Bluetooth_1Mbps_Back_10mm_Ch78;Ant 3

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.295

Medium: HSL_2450_211220 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.119$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.62, 4.62, 4.62) @ 2480 MHz; Calibrated: 2021/9/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2021/1/19
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1684
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.304 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.271 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

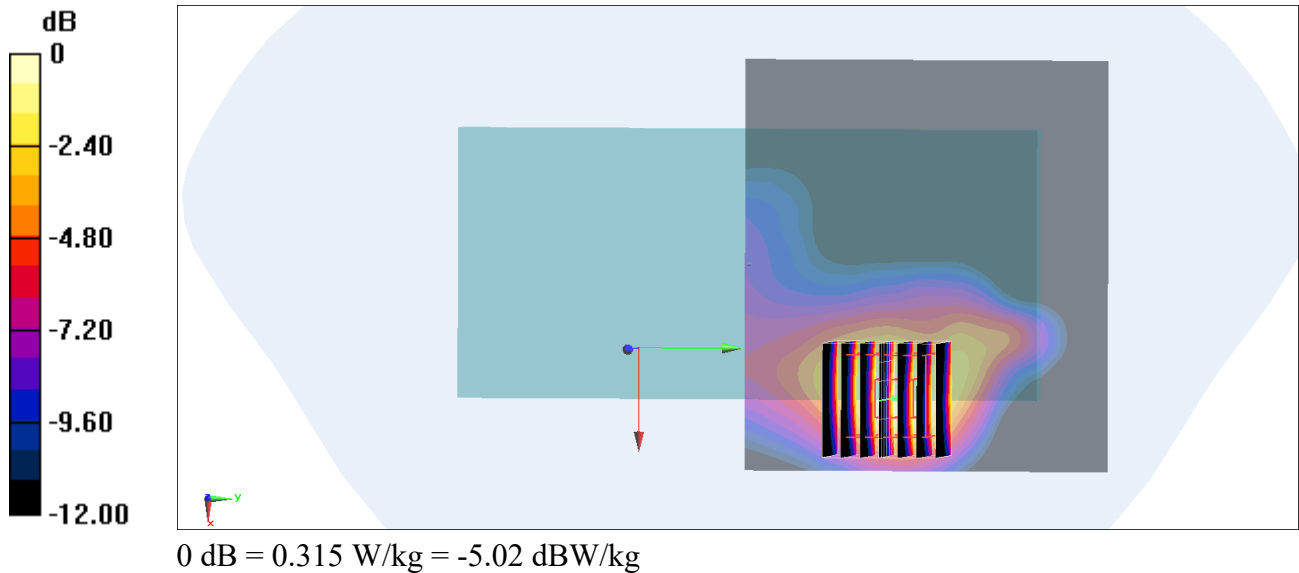

#37_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch56

Communication System: 802.11a; Frequency: 5280 MHz; Duty Cycle: 1:1.070

Medium: HSL_5G_211220 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.608$ S/m; $\epsilon_r = 35.941$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.42, 4.42, 4.42) @ 5280 MHz; Calibrated: 2021/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn656; Calibrated: 2021/1/22
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.4 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.70 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 41.5 W/kg

SAR(1 g) = 7.16 W/kg; SAR(10 g) = 1.86 W/kg

Maximum value of SAR (measured) = 19.5 W/kg


Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.70 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 34.5 W/kg

SAR(1 g) = 6.75 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

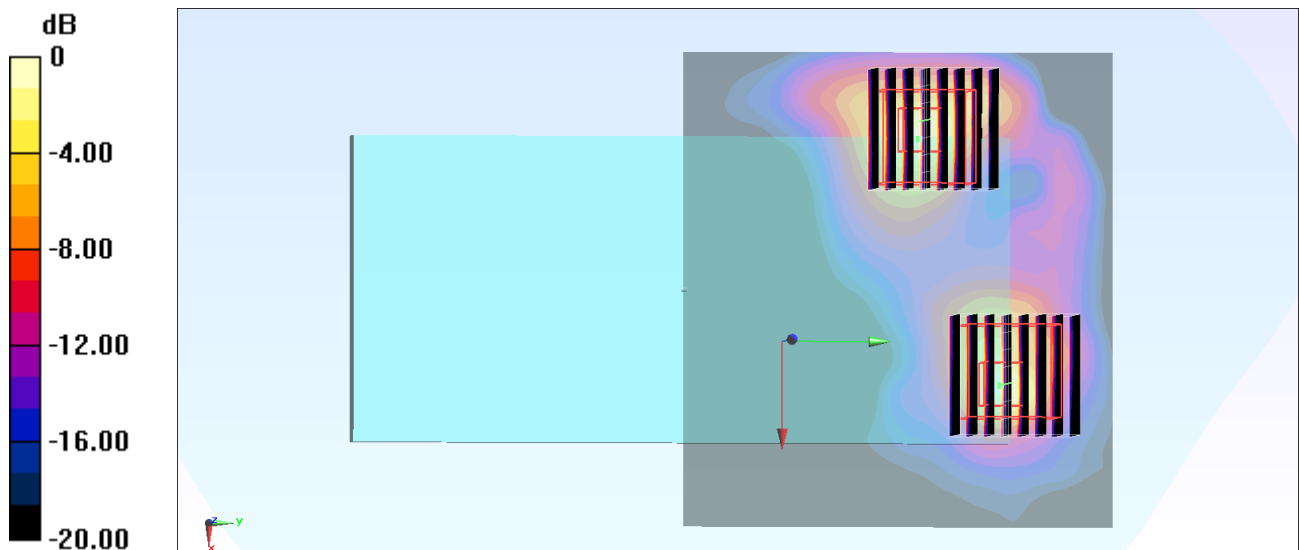

0 dB = 18.7 W/kg = 12.72 dBW/kg

#38_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch144;Ant 4+3

Communication System: 802.11a; Frequency: 5720 MHz; Duty Cycle: 1:1.068

Medium: HSL_5G_220107 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.211$ S/m; $\epsilon_r = 35.86$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.73, 4.73, 4.73) @ 5720 MHz; Calibrated: 2021/10/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2021/2/16
- Phantom: P1aP2a_Twin-SAM_V4.0_(30deg)_Right; Type: QD 000 P40 CC; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.6 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.80 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 3.67 W/kg; SAR(10 g) = 1.02 W/kg

Maximum value of SAR (measured) = 12.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.80 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 41.8 W/kg

SAR(1 g) = 7.38 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

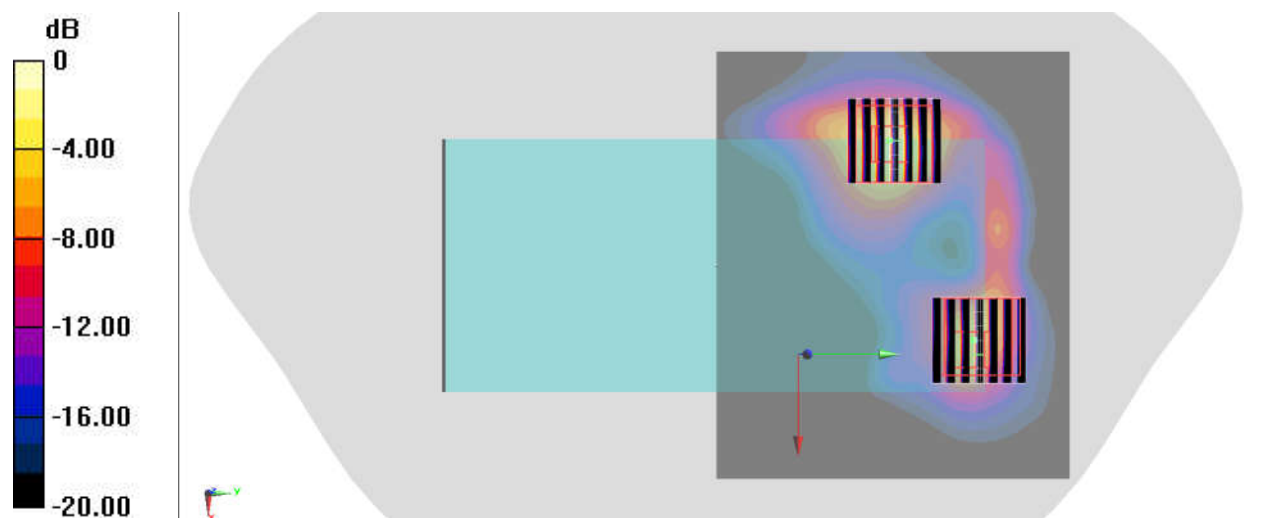

0 dB = 21.2 W/kg = 13.26 dBW/kg

#39_WLAN5GHz_802.11a 6Mbps_Front_0mm_Ch173

Communication System: 802.11a; Frequency: 5865 MHz; Duty Cycle: 1:1.068

Medium: HSL_5G_220107 Medium parameters used : $f = 5865$ MHz; $\sigma = 5.491$ S/m; $\epsilon_r = 35.975$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.06, 4.06, 4.06) @ 5865 MHz; Calibrated: 2021/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn699; Calibrated: 2021/2/16
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 16.8 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 25.60 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 19.0 W/kg
SAR(1 g) = 2.9 W/kg; SAR(10 g) = 0.806 W/kg
 Maximum value of SAR (measured) = 9.75 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 25.60 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 43.1 W/kg
SAR(1 g) = 7.13 W/kg; SAR(10 g) = 2.04 W/kg
 Maximum value of SAR (measured) = 20.4 W/kg

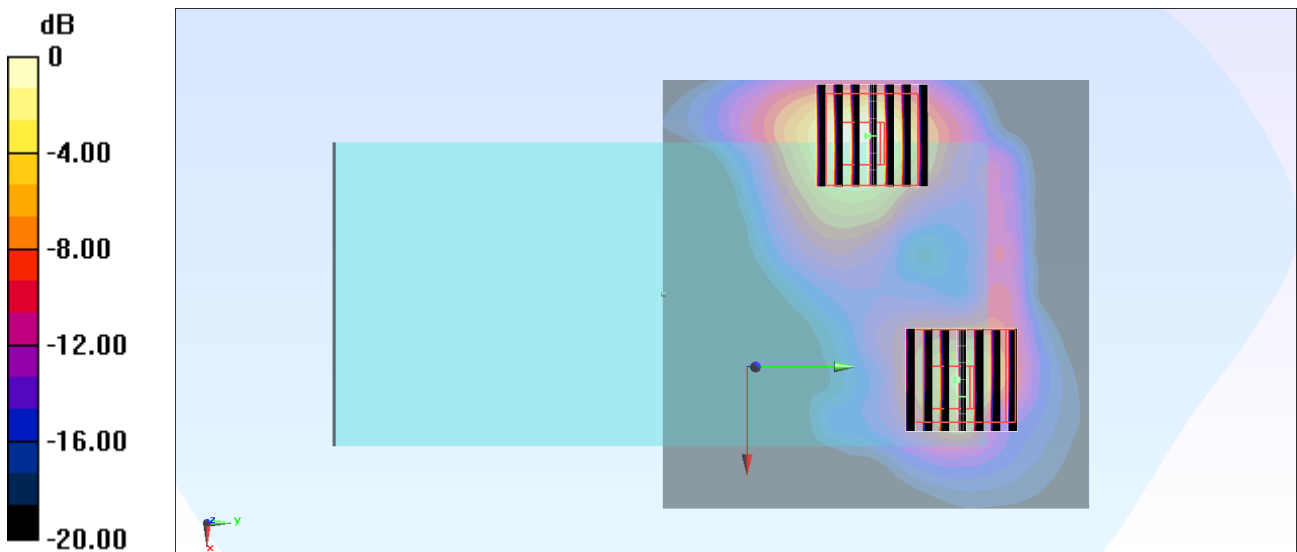

0 dB = 16.8 W/kg = 12.25 dBW/kg

Date: 2022-01-06

#40_WLAN6GHz_802.11ax-HE160 MCS0_Back_0mm_Ch207;Ant 4+3

Communication System: U-NII-8; Frequency: 6985.0

Medium: HSL_6500_220106. Medium parameters used: $f=6985.0$ MHz; $\sigma=6.54$ S/m; $\epsilon_r=33.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.95, 4.95, 4.95); Calibrated: 2021-02-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2021-09-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAC
- MAIA: Area Scan: Y; Zoom Scan: N/A

Area Scan (102.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.29 W/kg; SAR (10g) = 0.331 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.163 W/kg;

Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 1.740 W/kg; SAR (10g) = 0.379 W/kg;

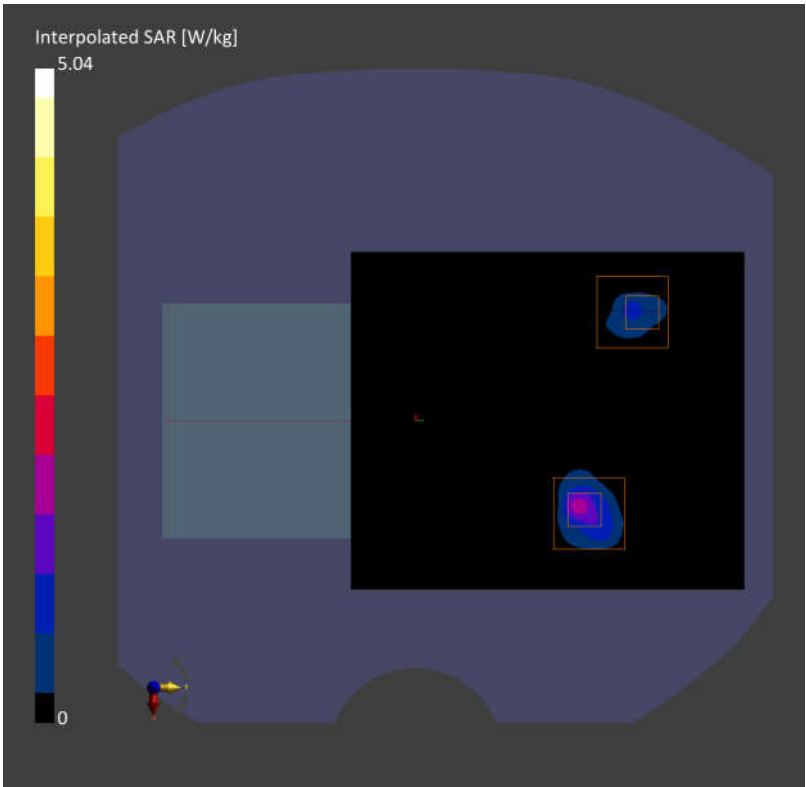

Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	153.0 x 71.0 x 10.0		Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	6505.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1044	Air -	EUmmWV3 - SN9424_F1-55GHz, 2021-03-23	DAE3 Sn577, 2021-09-15

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 100.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2021-12-30, 04:07
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.99
psPDtot+ [W/m ²]	4.15
H _{max} [A/m]	0.174
E _{max} [V/m]	59.7
max _(Sto) [W/m ²]	7.57
Power Drift [dB]	-0.03

