

#30_FR1 n77_100M_BPSK_1_1_Right Cheek_0mm_Ch656000


Communication System: 5G NR; Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL_3900_230605 Medium parameters used: $f=3840.000$ MHz; $\sigma=3.26$ S/m; $\epsilon_r=37.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(6.67, 6.67, 6.67); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.621 W/kg; SAR (10g) = 0.238 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.637 W/kg; SAR (8g) = 0.272 W/kg; SAR (10g) = 0.241 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 77.8 %

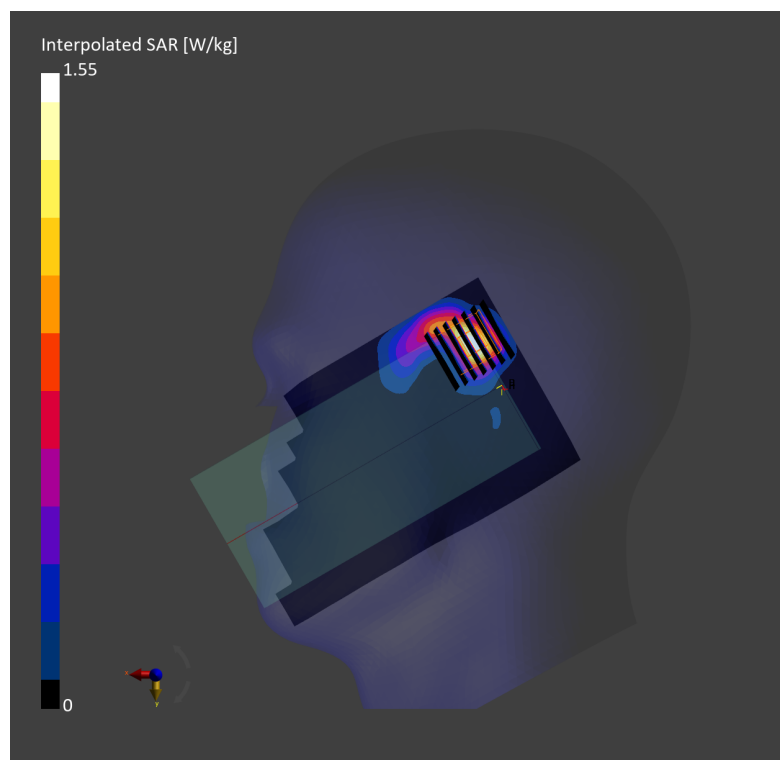

#31_WLAN2.4GHz_802.11b 1Mbps_Left Tilted_Ch11


Communication System: 802.11b; Frequency: 2462.0 MHz; Duty Cycle: 1:1.010
Medium: HSL_2450_230514 Medium parameters used: $f= 2462.0$ MHz; $\sigma= 1.77$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.673 W/kg; SAR (10g) = 0.248 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.18 dB
SAR (1g) = 0.681 W/kg; SAR (8g) = 0.285 W/kg; SAR (10g) = 0.251 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 76.3 %

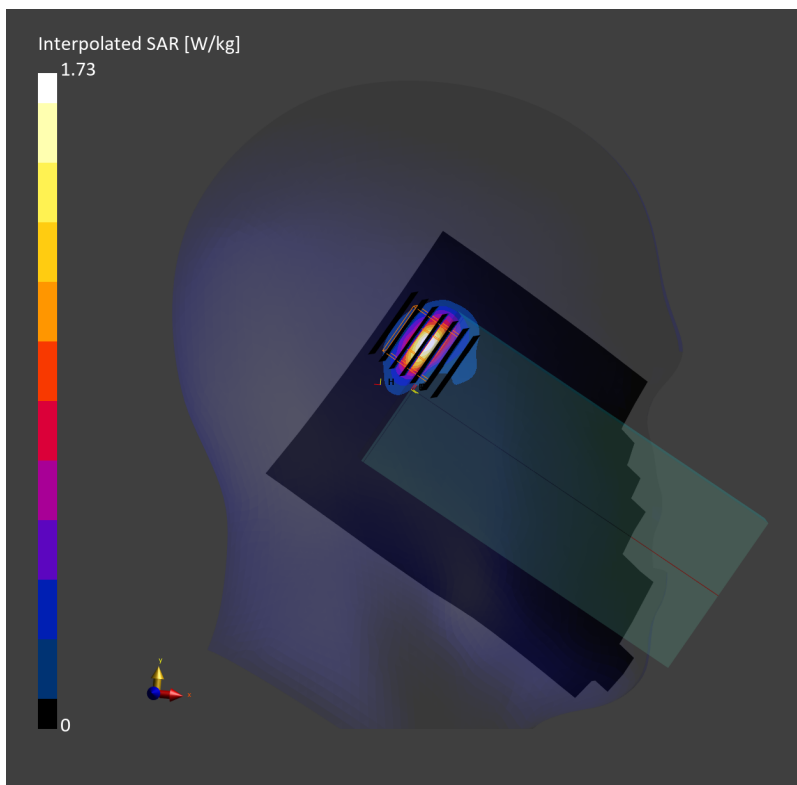

#32_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_Ch50

Communication System: 802.11ac ; Frequency: 5250.0 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230516 Medium parameters used: $f = 5250.0$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 35.7$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.316 W/kg; SAR (10g) = 0.106 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.111 W/kg; SAR (8g) = 0.034 W/kg; SAR (10g) = 0.028 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 63.7 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.339 W/kg; SAR (8g) = 0.127 W/kg; SAR (10g) = 0.111 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 63.7 %

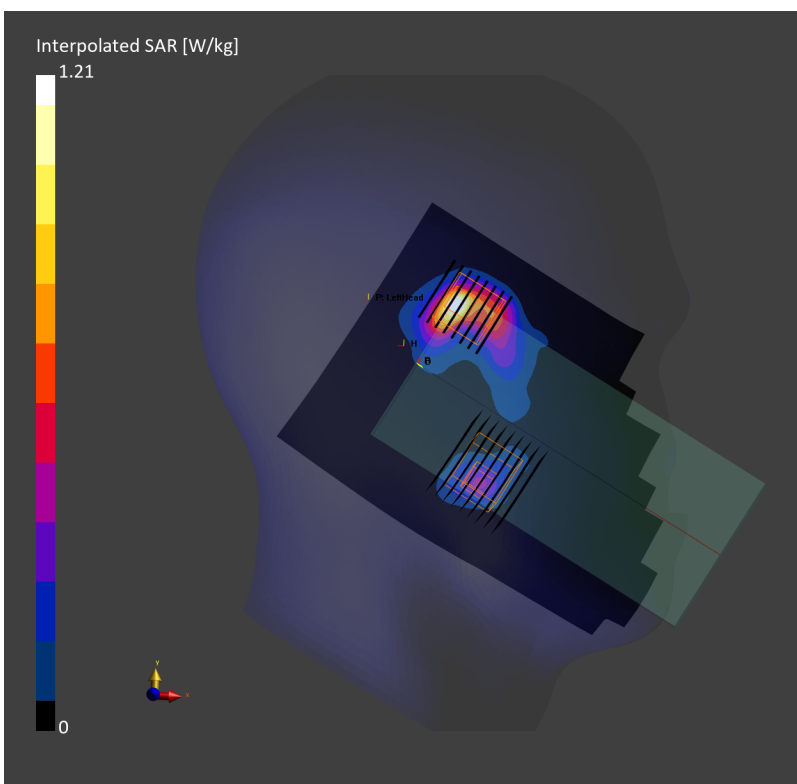

#33_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch114

Communication System: 802.11ac; Frequency: 5570.0 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230516 Medium parameters used: $f = 5570.0$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.88, 4.88, 4.88); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.404 W/kg; SAR (10g) = 0.127 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.16 dB
SAR (1g) = 0.453 W/kg; SAR (8g) = 0.162 W/kg; SAR (10g) = 0.141 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 65.3 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.16 dB
SAR (1g) = 0.204 W/kg; SAR (8g) = 0.074 W/kg; SAR (10g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 65.3 %

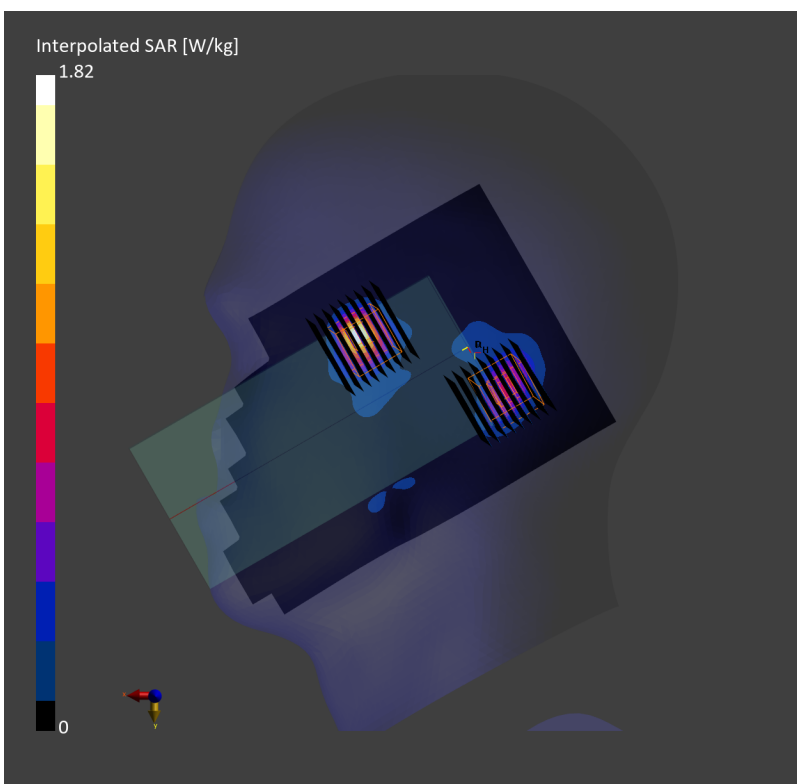

#34_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_Ch155

Communication System: 802.11ac; Frequency: 5775.0 MHz; Duty Cycle: 1:1.088
Medium: HSL_5G_230516 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 34.7$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2448
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.394 W/kg; SAR (10g) = 0.123 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.17 dB
SAR (1g) = 0.515 W/kg; SAR (8g) = 0.174 W/kg; SAR (10g) = 0.151 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 64.6 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.17 dB
SAR (1g) = 0.215 W/kg; SAR (8g) = 0.078 W/kg; SAR (10g) = 0.065 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 64.6 %

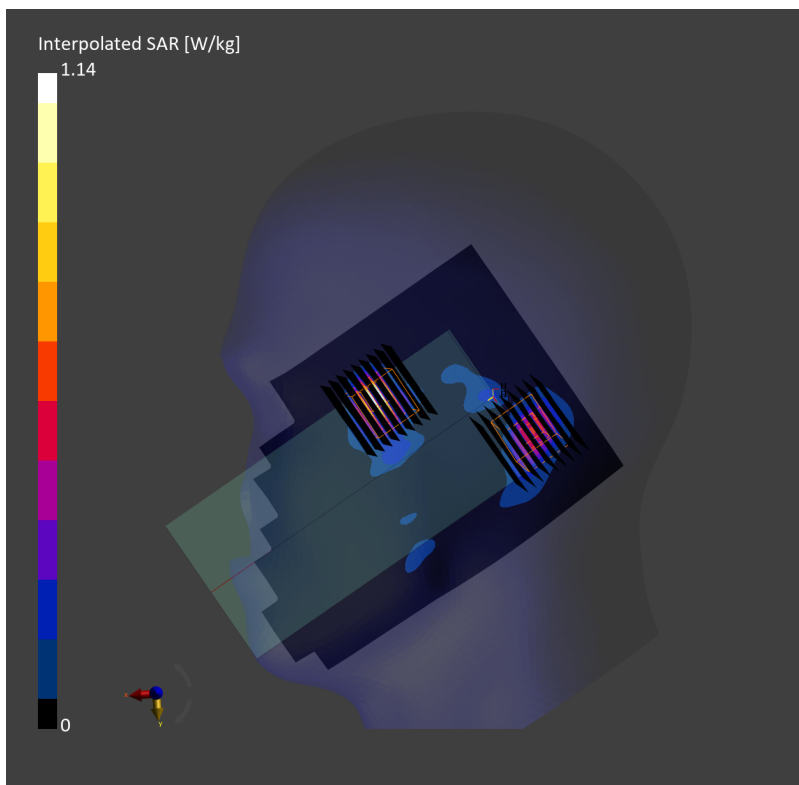

#35_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch163

Communication System: 802.11ac ; Frequency: 5815.0 MHz; Duty Cycle: 1:1.137
Medium: HSL_5G_230517 Medium parameters used: $f= 5815.0$ MHz; $\sigma= 5.34$ S/m; $\epsilon_r = 34.7$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2448
- UID: CW, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.461 W/kg; SAR (10g) = 0.161 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.19 dB
SAR (1g) = 0.306 W/kg; SAR (8g) = 0.125 W/kg; SAR (10g) = 0.110 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 60.2 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.19 dB
SAR (1g) = 0.505 W/kg; SAR (8g) = 0.201 W/kg; SAR (10g) = 0.178 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 60.2 %

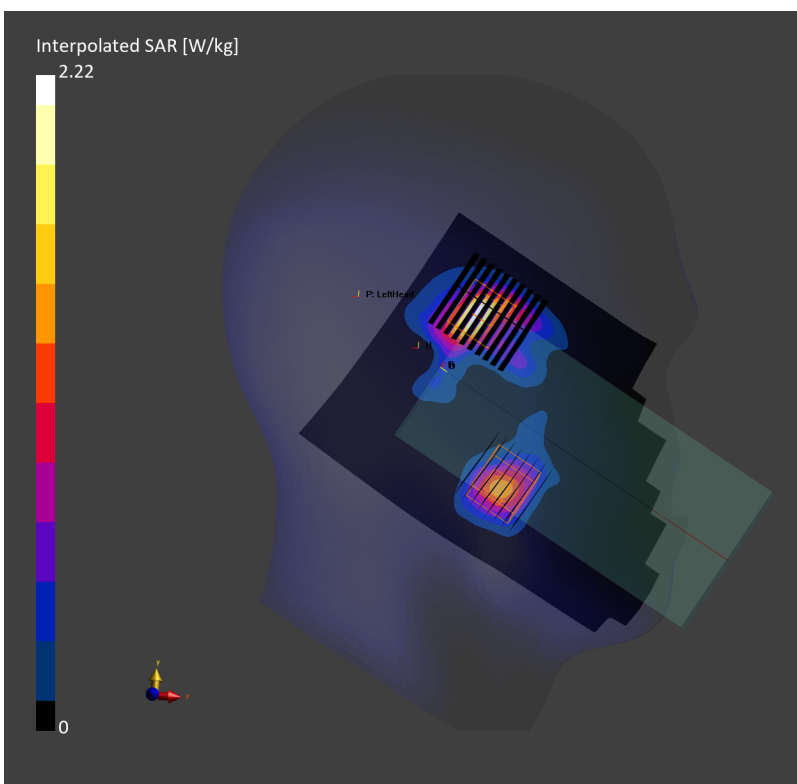

#36_WLAN6GHz_802.11ax-HE160 MCS0_Left Cheek_0mm_Ch15

Communication System: 802.11ax; Frequency: 6025.0 MHz; Duty Cycle: 1:1.159
Medium: HSL_6G_230518 Medium parameters used: $f = 6025.0$ MHz; $\sigma = 5.60$ S/m; $\epsilon_r = 35.5$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.072 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.13 dB

SAR (1g) = 0.138 W/kg; SAR (8g) = 0.058 W/kg; SAR (10g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.4 %

psAPD (1.0cm², sq) = 1.38 [W/m²]; psAPD (4.0cm², sq) = 1.17 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.13 dB

SAR (1g) = 0.228 W/kg; SAR (8g) = 0.082 W/kg; SAR (10g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.4 %

psAPD (1.0cm², sq) = 2.35 [W/m²]; psAPD (4.0cm², sq) = 1.64 [W/m²]

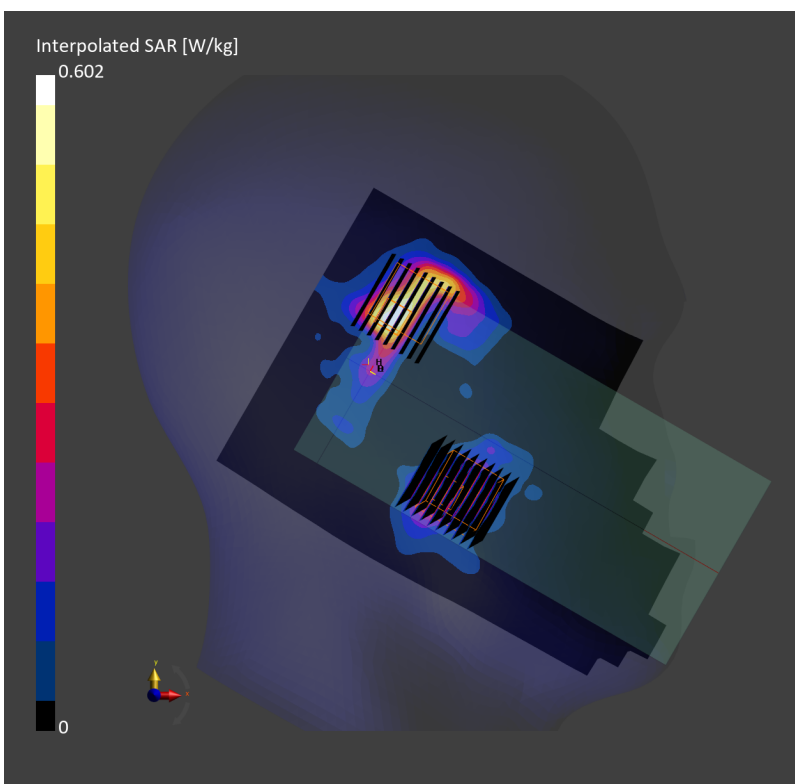

#37_WLAN6GHz_802.11ax-HE160 MCS0_Left Cheek_0mm_Ch47

Communication System: 802.11ax; Frequency: 6185.000 MHz; Duty Cycle: 1:1.159
 Medium: HSL_6G_230518 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.80$ S/m; $\epsilon_r = 35.2$
 Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.5, 5.5, 5.5); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.214 W/kg; SAR (10g) = 0.070 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.171 W/kg; SAR (8g) = 0.065 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.4 %

psAPD (1.0cm², sq) = 1.71 [W/m²]; psAPD (4.0cm², sq) = 1.29 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.086 W/kg; SAR (10g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.4 %

psAPD (1.0cm², sq) = 2.39 [W/m²]; psAPD (4.0cm², sq) = 1.72 [W/m²]

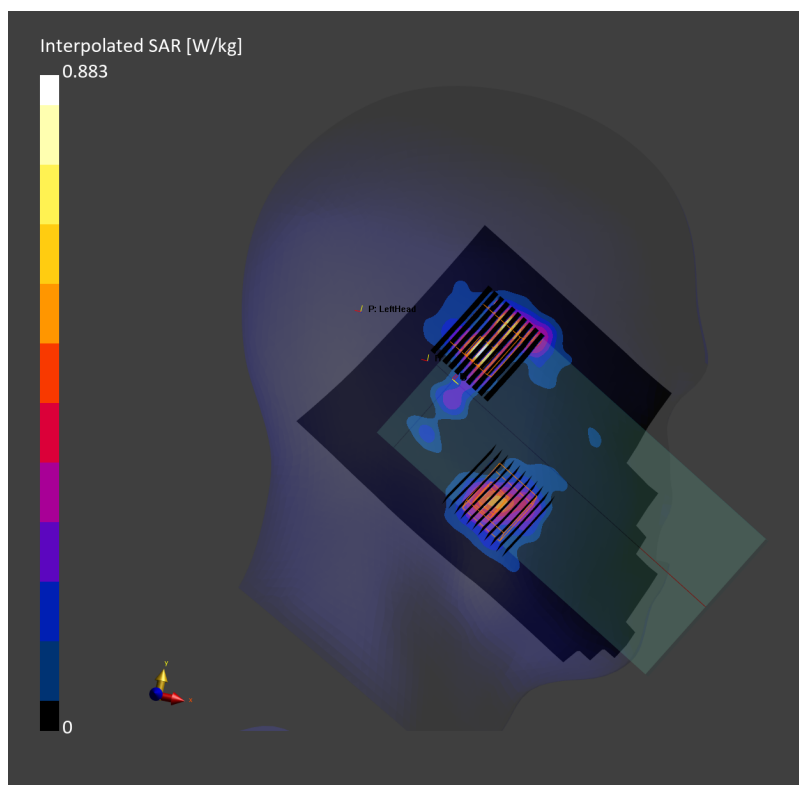

#38_Bluetooth_1Mbps_Left Tilted_Ch39


Communication System: Bluetooth; Frequency: 2441.0 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_230512 Medium parameters used: $f=2441.0$ MHz; $\sigma=1.82$ S/m; $\epsilon_r=38.5$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: LeftHead
- Measurement Software: 16.2.4.2448
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.184 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.189 W/kg; SAR (8g) = 0.078 W/kg; SAR (10g) = 0.068 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 77.4 %

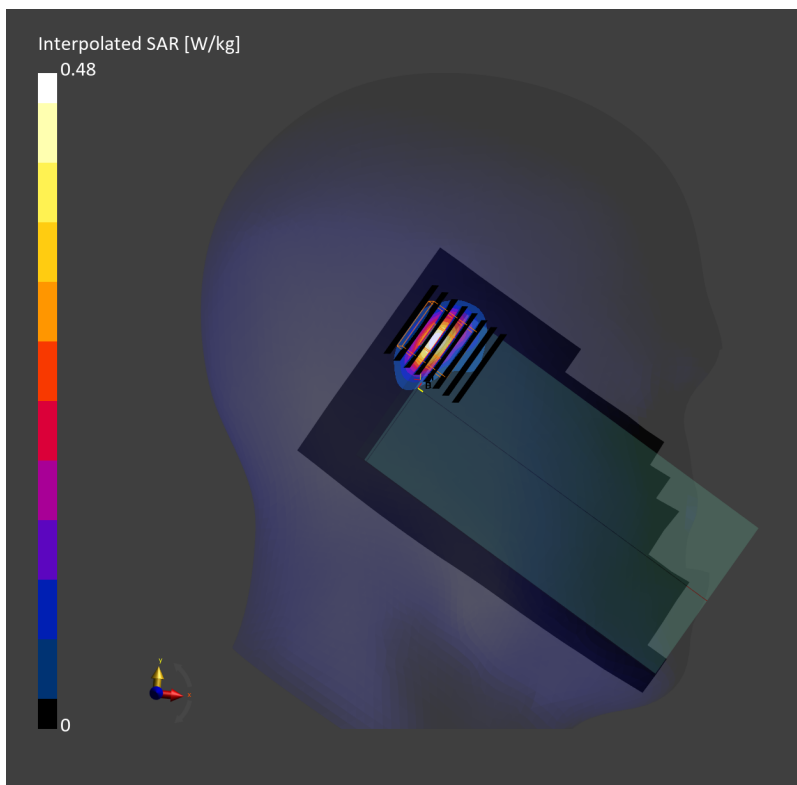

#39_GSM850_GPRS (4 Tx slots)_Bottom Side_10mm_Ch189


Communication System: GPRS; Frequency: 836.400 MHz; Duty Cycle: 1:2.08
Medium: HSL_850_230523 Medium parameters used: $f= 836.400$ MHz; $\sigma= 0.930$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.676 W/kg; SAR (10g) = 0.377 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.672 W/kg; SAR (8g) = 0.375 W/kg; SAR (10g) = 0.345 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

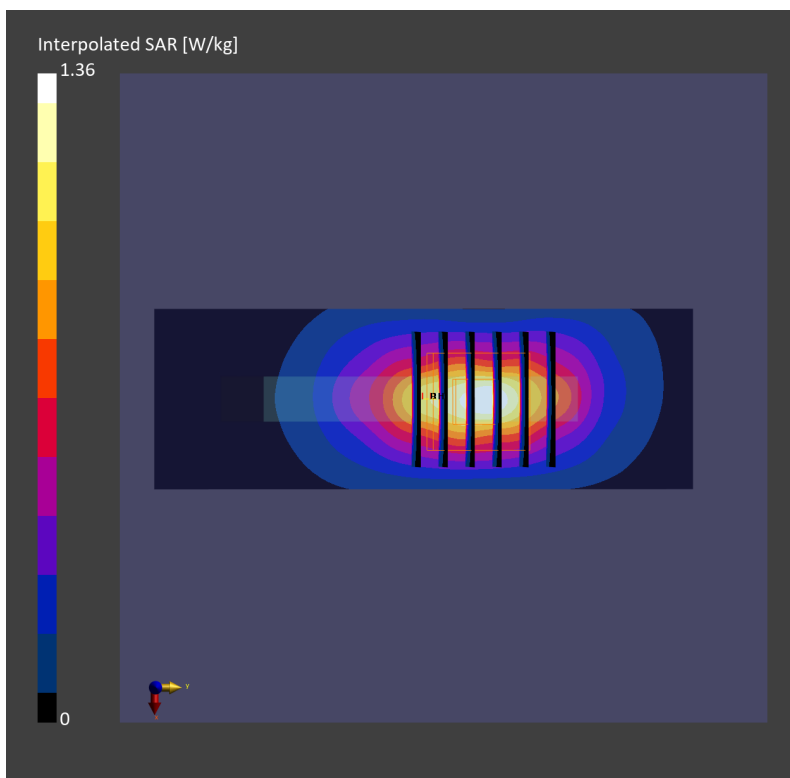

#40_GSM1900_GPRS (4 Tx slots)_Bottom Side_10mm_Ch810

Communication System: GPRS; Frequency: 1909.800 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_230524 Medium parameters used: $f = 1909.800$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (40.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.598 W/kg; SAR (10g) = 0.305 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.632 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

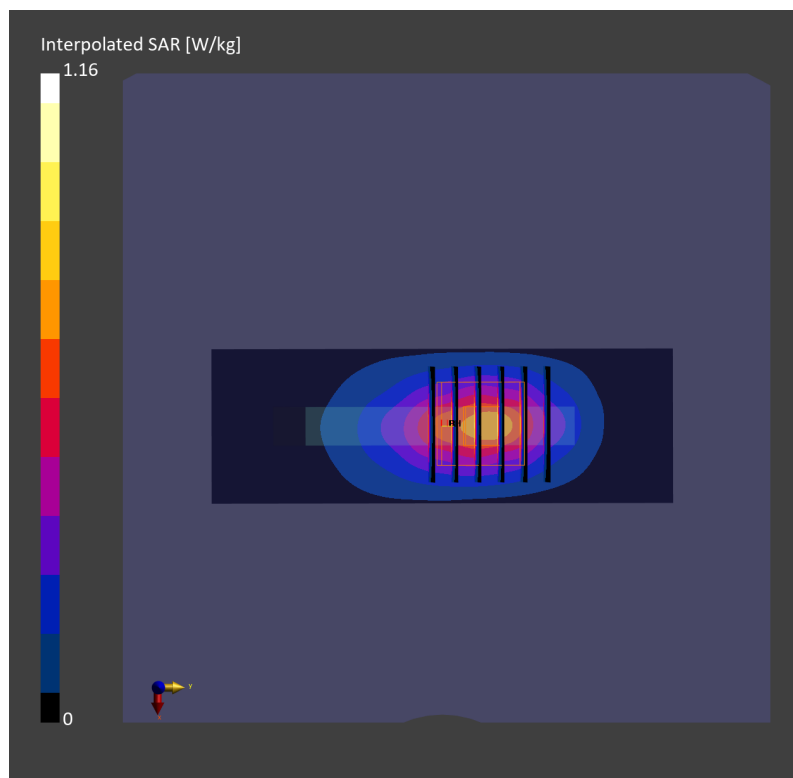

#41_WCDMA II_RMC 12.2Kbps_Bottom Side_10mm_Ch9400


Communication System: WCDMA; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230517 Medium parameters used: $f= 1880.000$ MHz; $\sigma= 1.43$ S/m; $\epsilon_r = 38.9$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.764 W/kg; SAR (10g) = 0.396 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.788 W/kg; SAR (8g) = 0.445 W/kg; SAR (10g) = 0.408 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.6 %

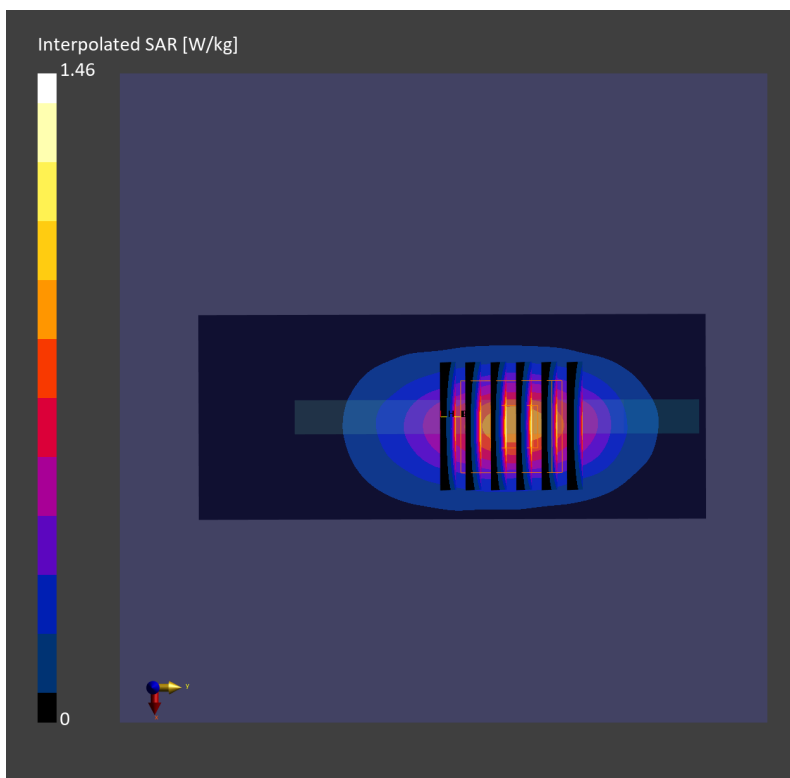

#42_WCDMA IV_RMC 12.2Kbps_Botton Side_10mm_Ch1312


Communication System: WCDMA; Frequency: 1712.400 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230517 Medium parameters used: $f= 1712.400$ MHz; $\sigma= 1.33$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.821 W/kg; SAR (10g) = 0.418 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.727 W/kg; SAR (8g) = 0.410 W/kg; SAR (10g) = 0.376 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.7 %

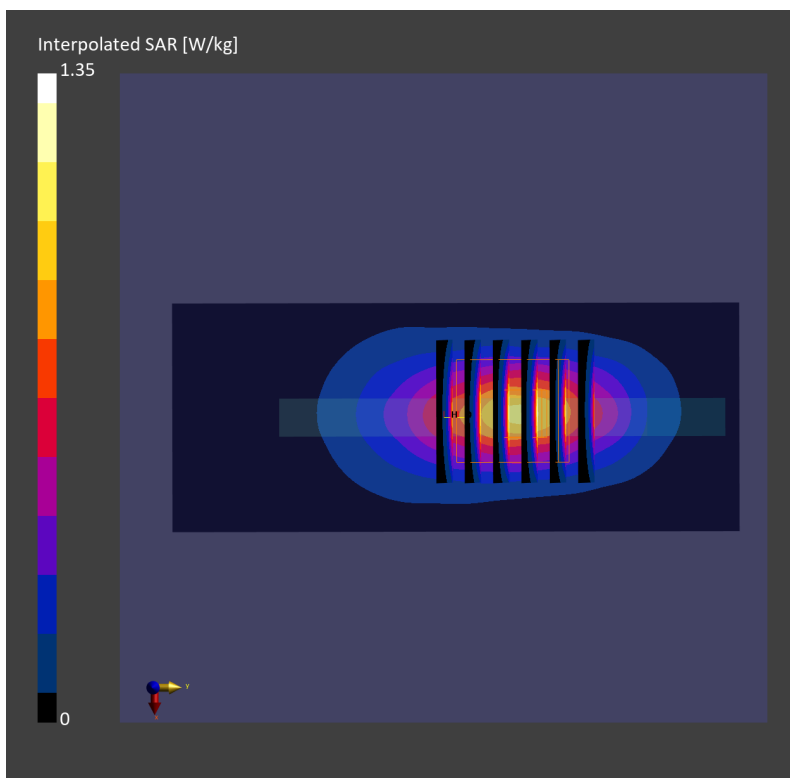

#43_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_230505 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.411 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.651 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

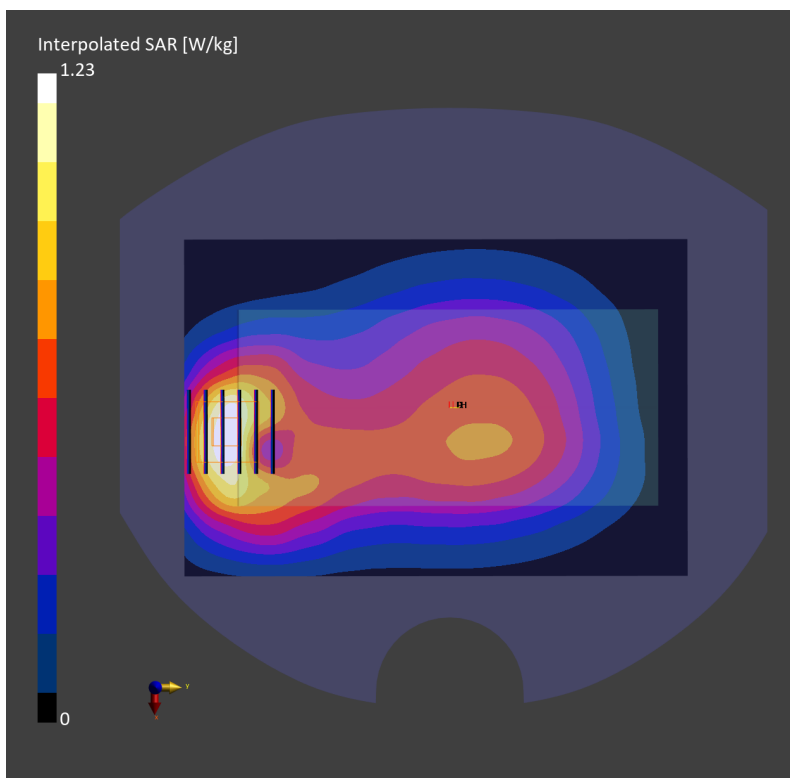

#44_LTE Band 2_20M_QPSK_50_0_Top Side_10mm_Ch19100


Communication System: LTE-FDD; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230605 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.41$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.721 W/kg; SAR (10g) = 0.332 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.751 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.360 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.3 %

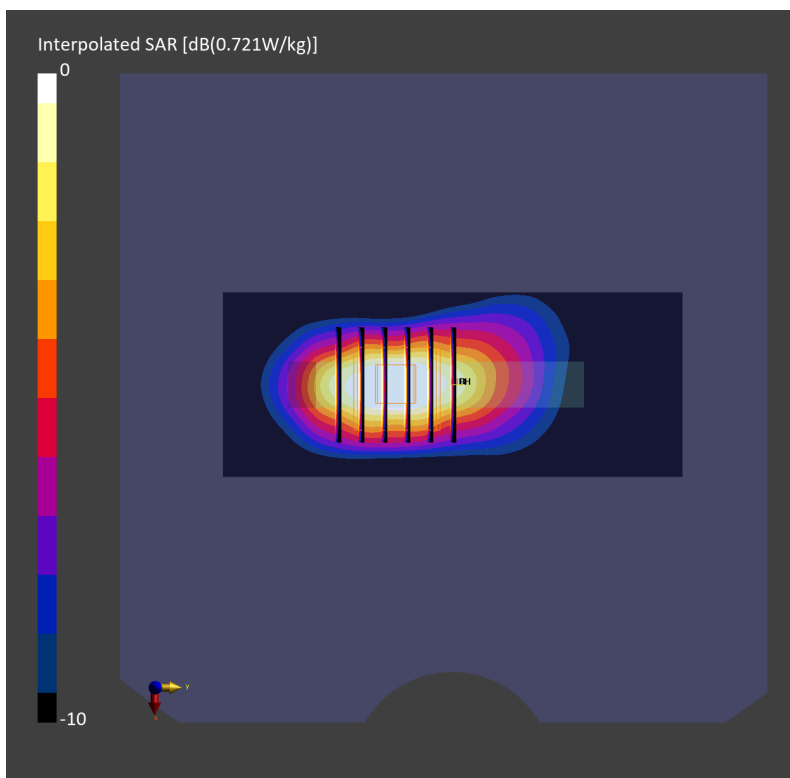

#45_LTE Band 7_20M_QPSK_1_0_Bottom Side_10mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f= 2510$ MHz; $\sigma= 1.83$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.290 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.627 W/kg; SAR (8g) = 0.330 W/kg; SAR (10g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

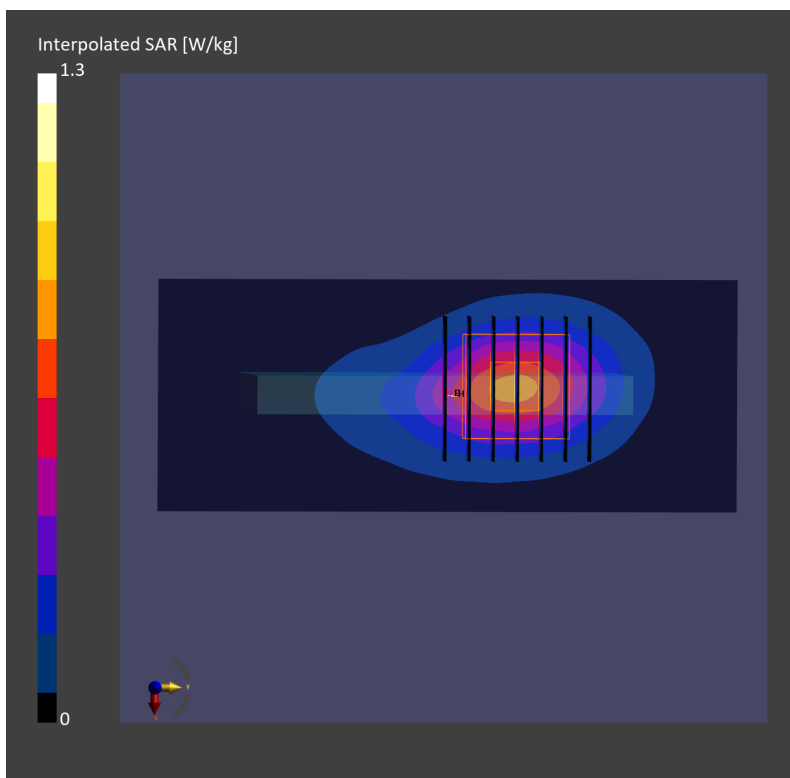

#46_LTE Band 12_10M_QPSK_1_0_Bottom Side_10mm_Ch23095


Communication System: LTE-FDD ; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=707.5$ MHz; $\sigma=0.875$ S/m; $\epsilon_r=41.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (72.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.423 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 0.418 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.209 W/kg
Smallest distance from peaks to all points 3 dB below = 8.3 mm
Ratio of SAR at M2 to SAR at M1 = 79.2 %

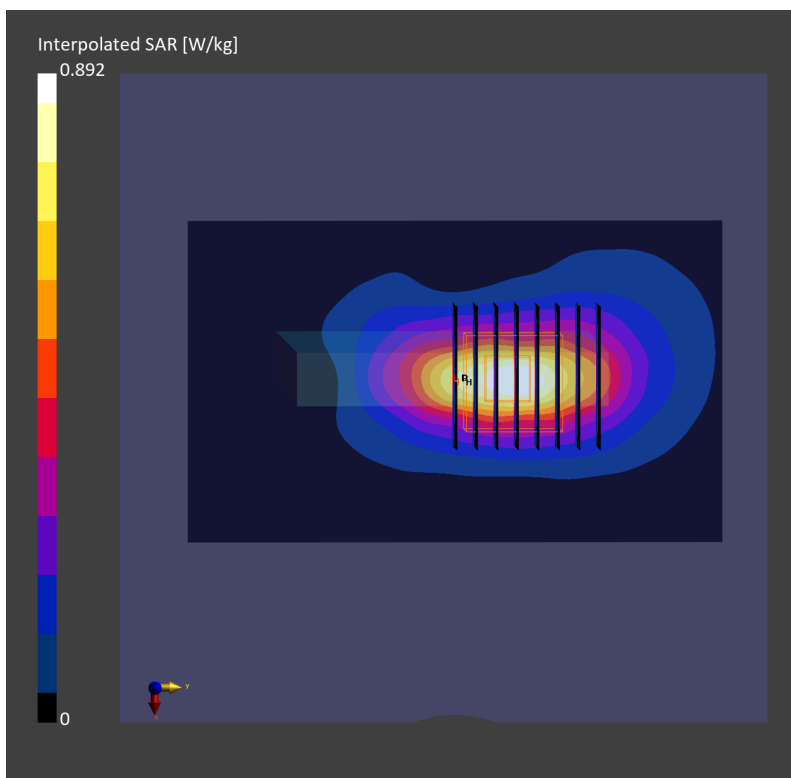

#47_LTE Band 13_10M_QPSK_1_0_Left Side_10mm_Ch23230


Communication System: LTE-FDD; Frequency: 782.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=782.0$ MHz; $\sigma=0.898$ S/m; $\epsilon_r=41.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.697 W/kg; SAR (10g) = 0.473 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 0.696 W/kg; SAR (8g) = 0.497 W/kg; SAR (10g) = 0.474 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.5 %

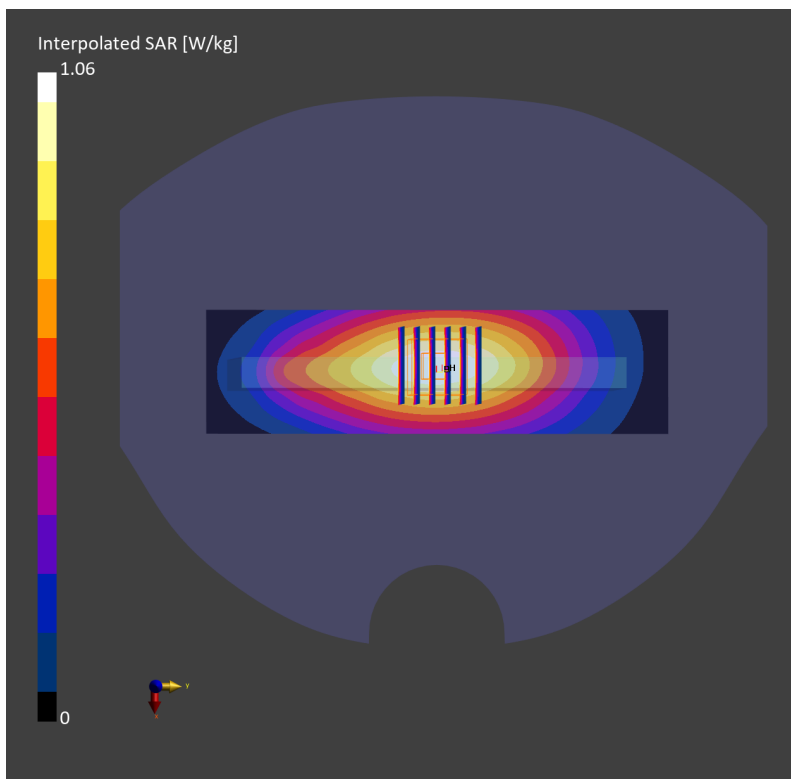

#48_LTE Band 14_10M_QPSK_1_0_Left Side_10mm_Ch23330


Communication System: LTE-FDD; Frequency: 793.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=793.0$ MHz; $\sigma=0.902$ S/m; $\epsilon_r=41.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.782 W/kg; SAR (10g) = 0.531 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.631 W/kg; SAR (8g) = 0.492 W/kg; SAR (10g) = 0.468 W/kg
Smallest distance from peaks to all points 3 dB below = 14.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.3 %

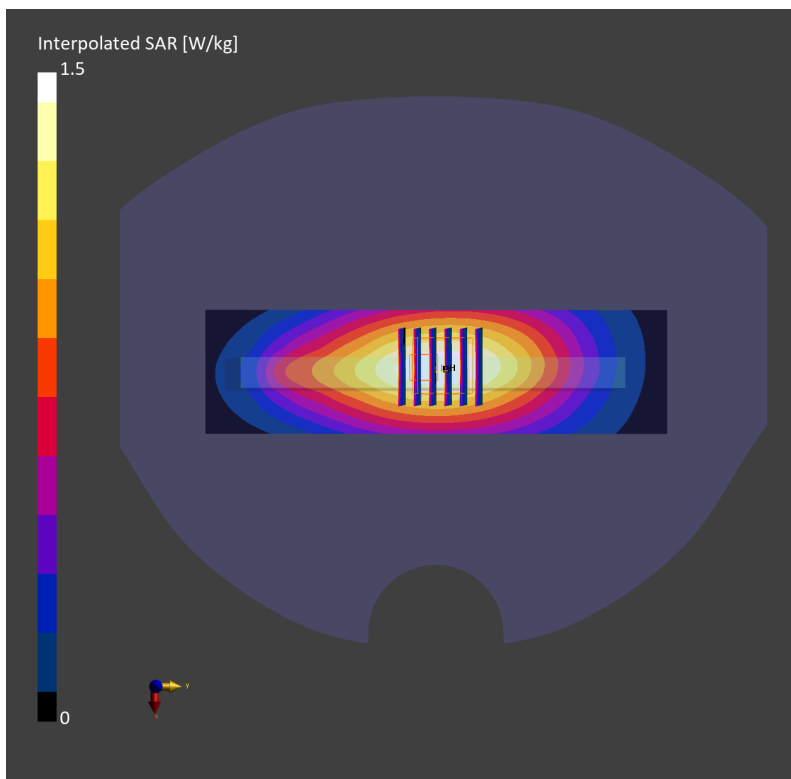

#49_LTE Band 25_20M_QPSK_1_0_Bottom Side_10mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230521 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.637 W/kg; SAR (10g) = 0.330 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.655 W/kg; SAR (8g) = 0.375 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

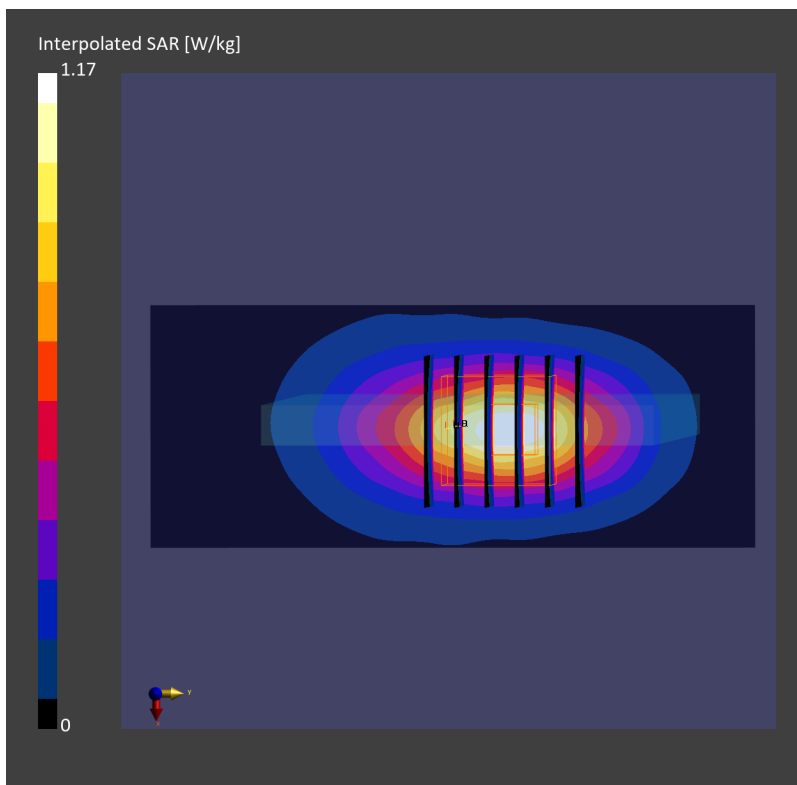

#50_LTE Band 26_15M_QPSK_1_0_Bottom Side_10mm_Ch26865


Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230425 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.593 W/kg; SAR (10g) = 0.323 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.589 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.296 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 77.5 %

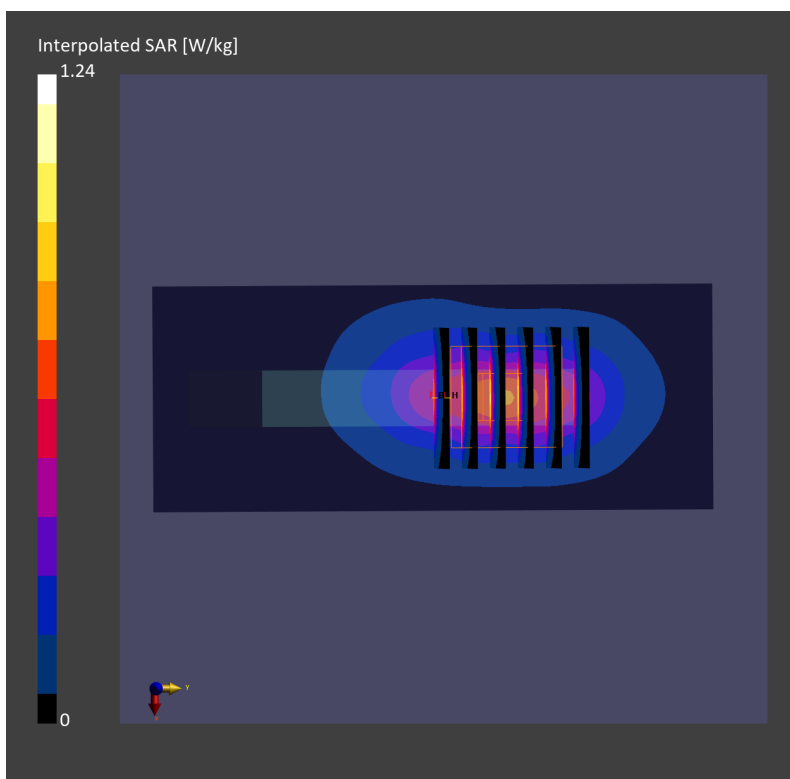

#51_LTE Band 30_10M_QPSK_1_49_Bottom Side_10mm_Ch27710


Communication System: LTE-FDD; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.68$ S/m; $\epsilon_r=39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.635 W/kg; SAR (10g) = 0.309 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.663 W/kg; SAR (8g) = 0.357 W/kg; SAR (10g) = 0.326 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.5 %

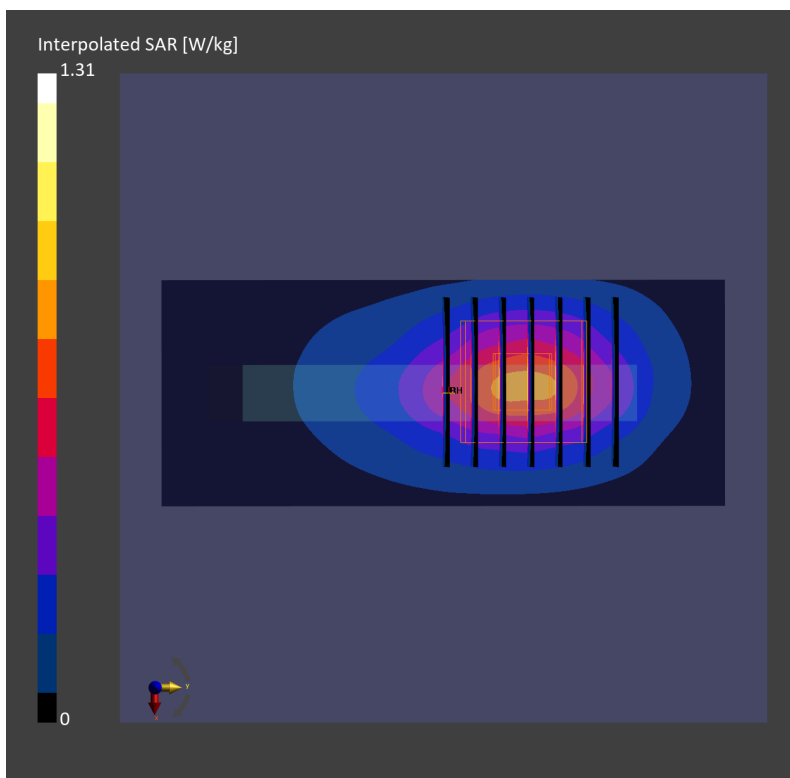

#52_LTE Band 66_20M_QPSK_1_0_Bottom Side_10mm_Ch132072


Communication System: LTE-FDD ; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230525 Medium parameters used: $f= 1720.000$ MHz; $\sigma= 1.32$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.534 W/kg; SAR (10g) = 0.274 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 0.544 W/kg; SAR (8g) = 0.308 W/kg; SAR (10g) = 0.283 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

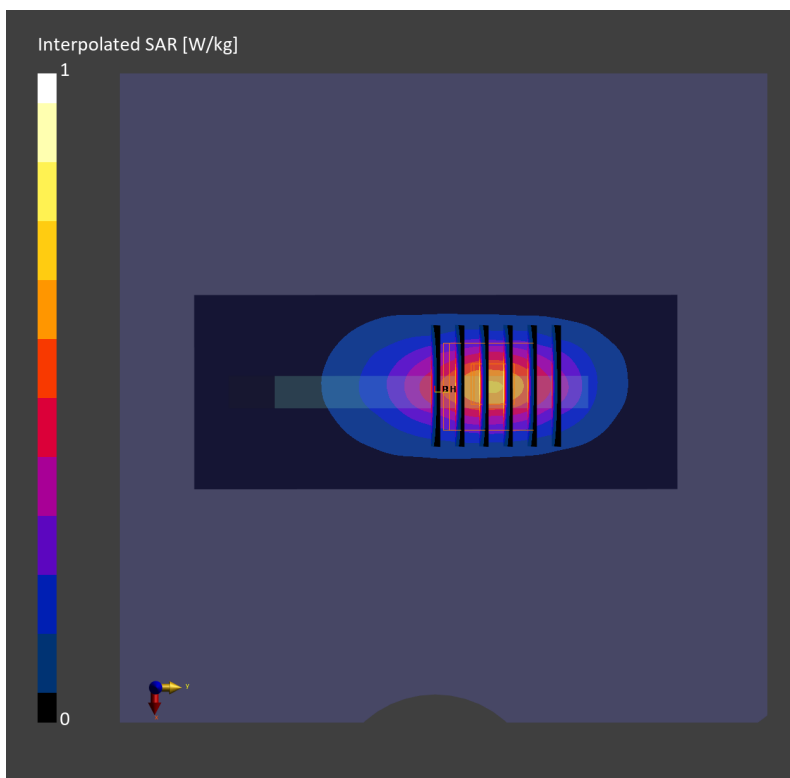

#53_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133297


Communication System: LTE-FDD; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230424 Medium parameters used: $f=680.5$ MHz; $\sigma=0.852$ S/m; $\epsilon_r=43.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.396 W/kg; SAR (10g) = 0.273 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.400 W/kg; SAR (8g) = 0.288 W/kg; SAR (10g) = 0.275 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.5 %

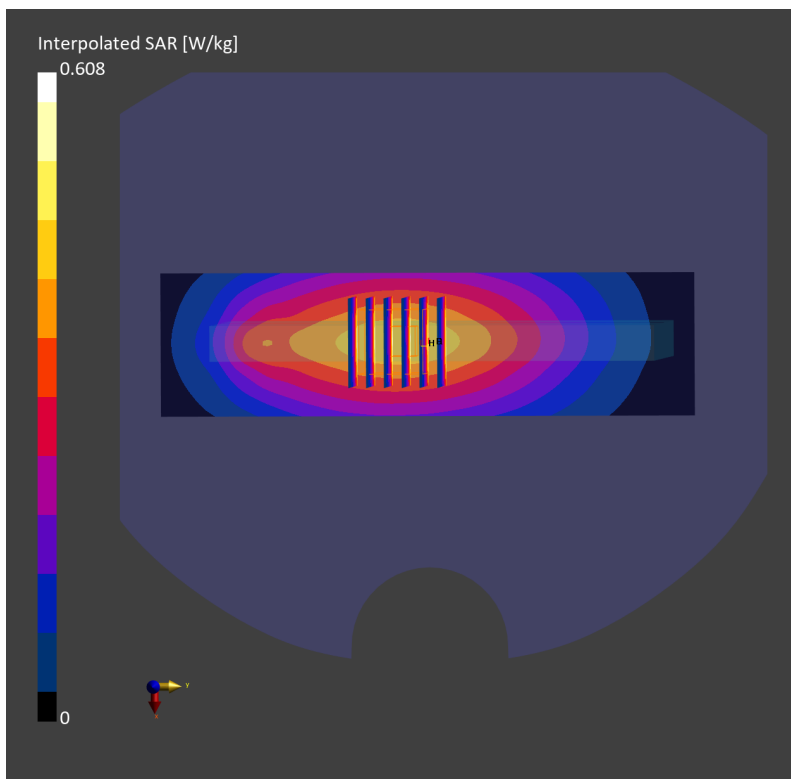

#54_LTE Band 41_20M_QPSK_1_0_Bottom Side_10mm_Ch39750

Communication System: LTE; Frequency: 2506.000 MHz; Duty Cycle: 1:2.33
Medium: HSL_2600_230526 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (40.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.210 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.462 W/kg; SAR (8g) = 0.245 W/kg; SAR (10g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

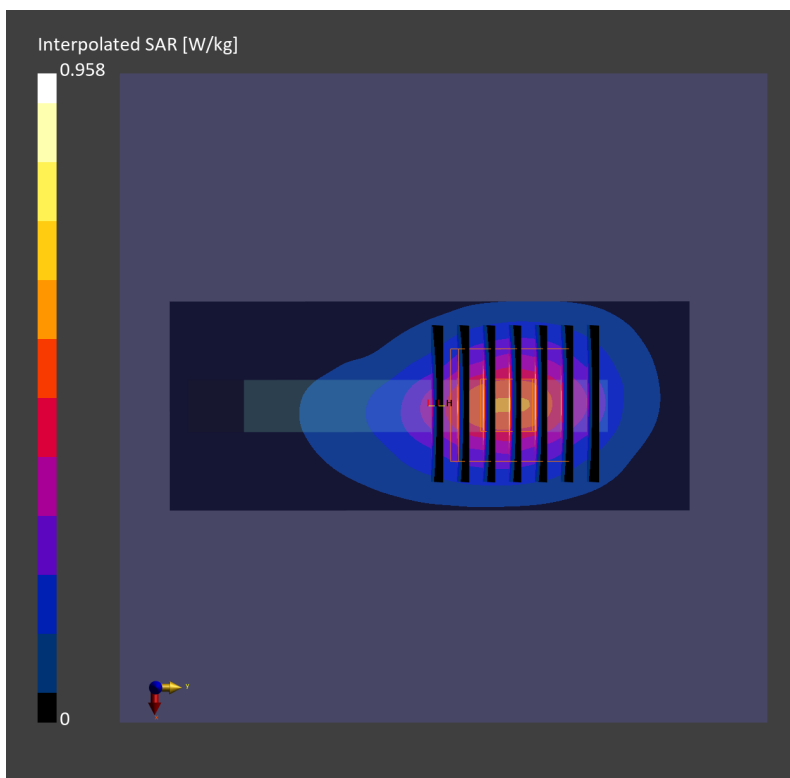

#55_LTE Band 48_20M_QPSK_1_0_Left Side_10mm_Ch56640


Communication System: LTE; Frequency: 3690.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_3700_230528 Medium parameters used: $f= 3690.000$ MHz; $\sigma= 3.24$ S/m; $\epsilon_r = 38.4$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.06, 7.06, 7.06); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.658 W/kg; SAR (10g) = 0.279 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.699 W/kg; SAR (8g) = 0.330 W/kg; SAR (10g) = 0.297 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 75.9 %

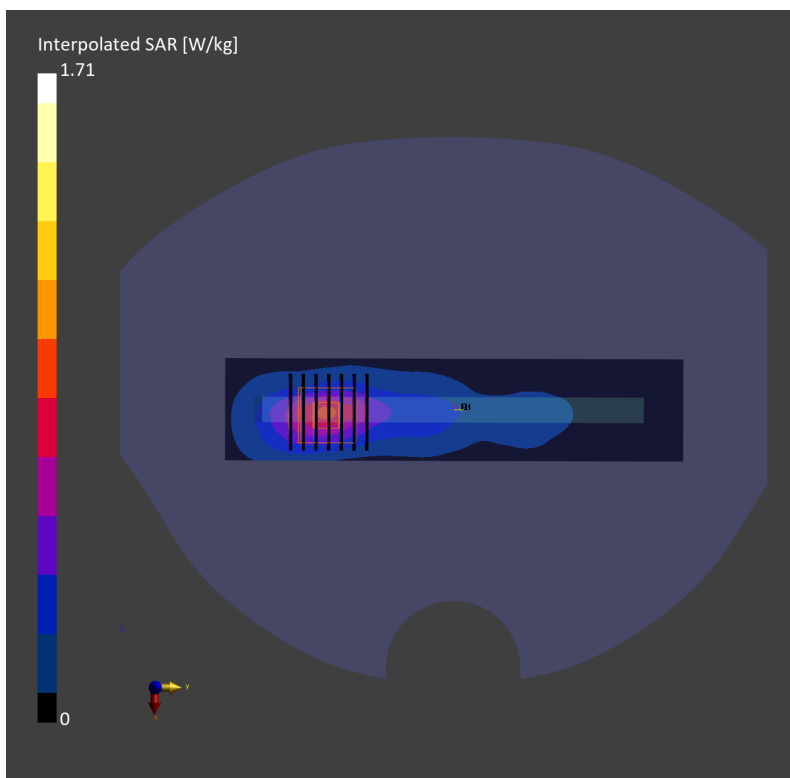

#56_FR1 n2_20M_BPSK_1_53_Top Side_10mm_Ch380000


Communication System: 5G NR; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230605 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.41$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.557 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.580 W/kg; SAR (8g) = 0.306 W/kg; SAR (10g) = 0.278 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.3 %

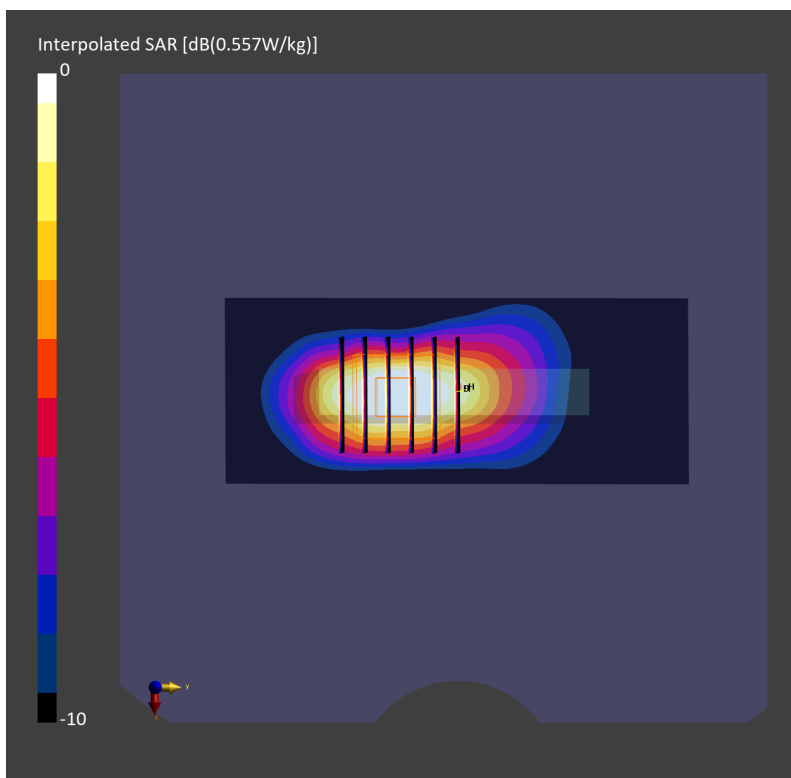

#57_FR1 n7_50M_BPSK_1_1_Bottom Side_10mm_Ch507000


Communication System: 5G NR; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230520 Medium parameters used: $f=2535.000$ MHz; $\sigma=1.91$ S/m; $\epsilon_r=38.3$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.615 W/kg; SAR (10g) = 0.291 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.628 W/kg; SAR (8g) = 0.329 W/kg; SAR (10g) = 0.299 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.1 %

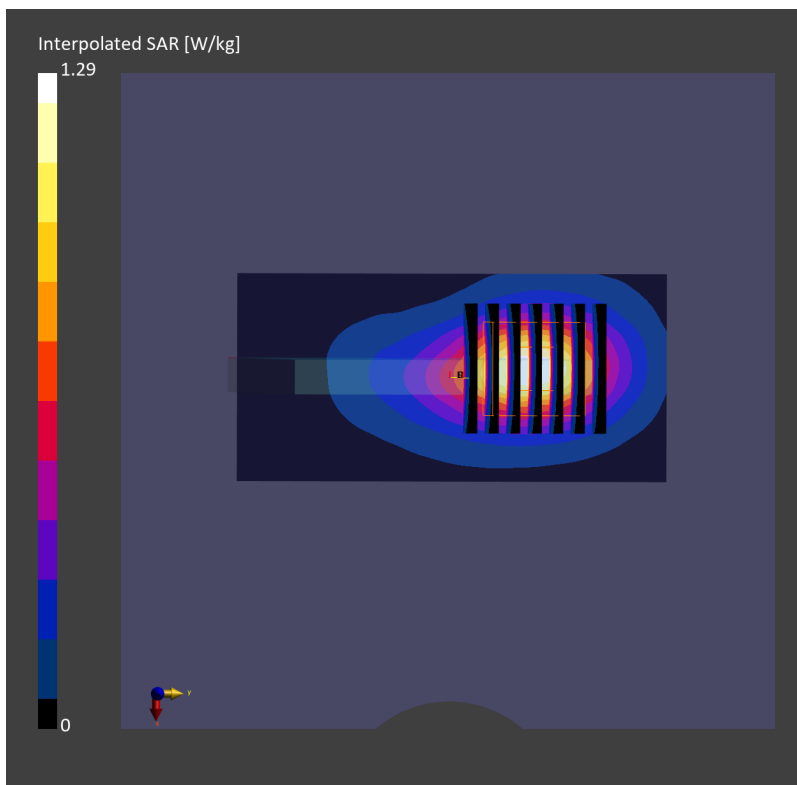

#58_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500


Communication System: 5G NR; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.438 W/kg; SAR (10g) = 0.302 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.450 W/kg; SAR (8g) = 0.325 W/kg; SAR (10g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 83.0 %

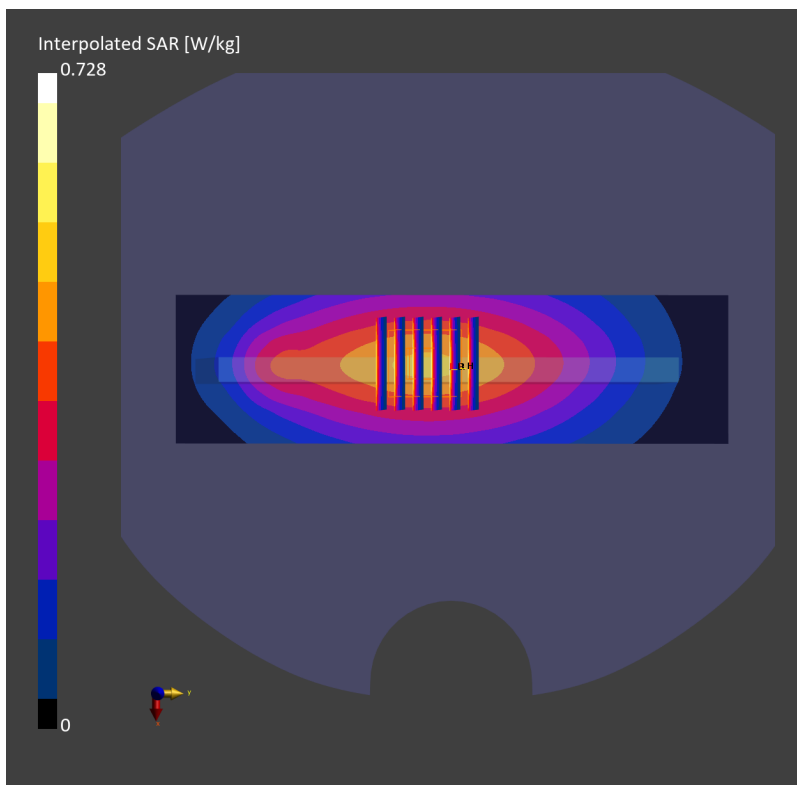

#59_FR1 n25_40M_BPSK_1_1_Bottom Side_10mm_Ch376500


Communication System: 5G NR ; Frequency: 1882.500 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230522 Medium parameters used: $f=$ 1882.500 MHz; $\sigma=$ 1.42 S/m; $\epsilon_r =$ 39.1
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.33, 7.51); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.834 W/kg; SAR (10g) = 0.429 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.846 W/kg; SAR (8g) = 0.480 W/kg; SAR (10g) = 0.440 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

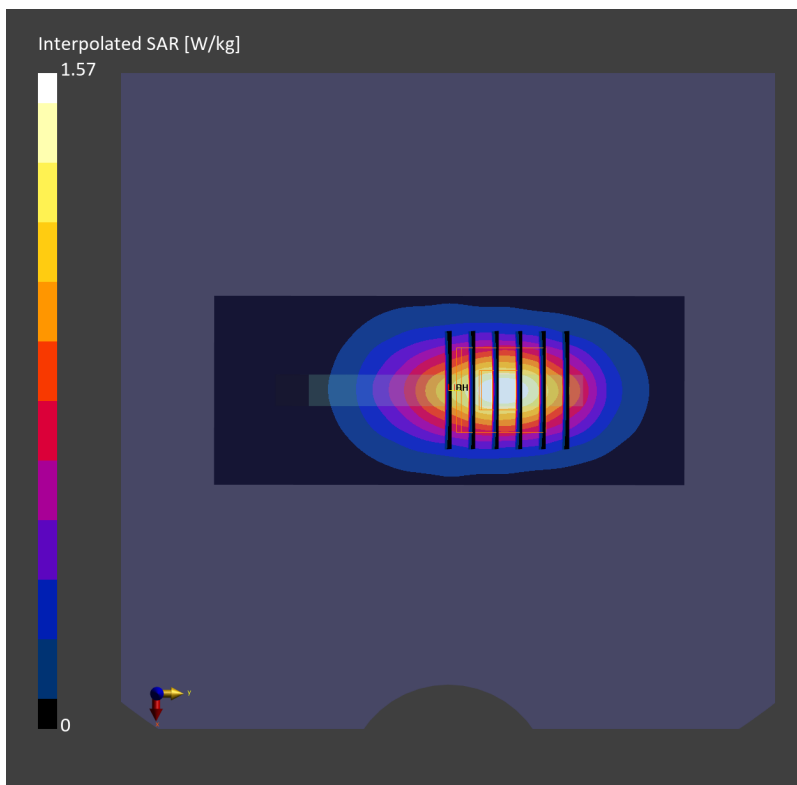

#60_FR1 n26_20M_BPSK_1_1_Bottom Side_10mm_Ch166300


Communication System: 5G NR ; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_850_230515 Medium parameters used: $f= 831.500$ MHz; $\sigma= 0.906$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.73, 9.71, 8.75); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.711 W/kg; SAR (10g) = 0.404 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.704 W/kg; SAR (8g) = 0.384 W/kg; SAR (10g) = 0.353 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 74.4 %

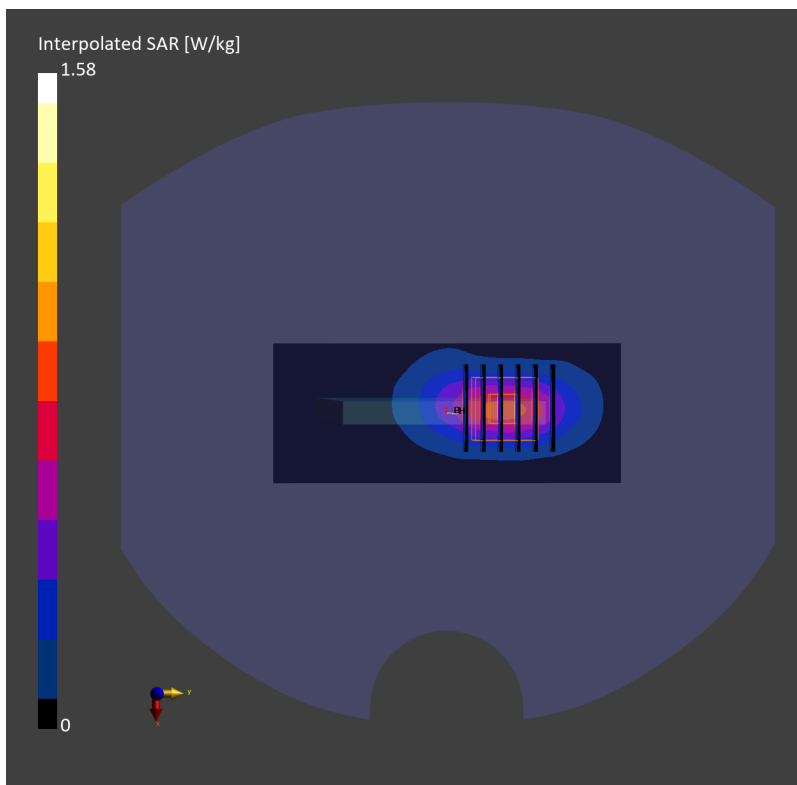

#61_FR1 n30_10M_BPSK_1_26_Bottom Side_10mm_Ch462000


Communication System: 5G NR ; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230519 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.63$ S/m; $\epsilon_r=39.2$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.88, 7.66, 6.92); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (48.0 mm x 100.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.627 W/kg; SAR (10g) = 0.303 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.641 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 80.1 %

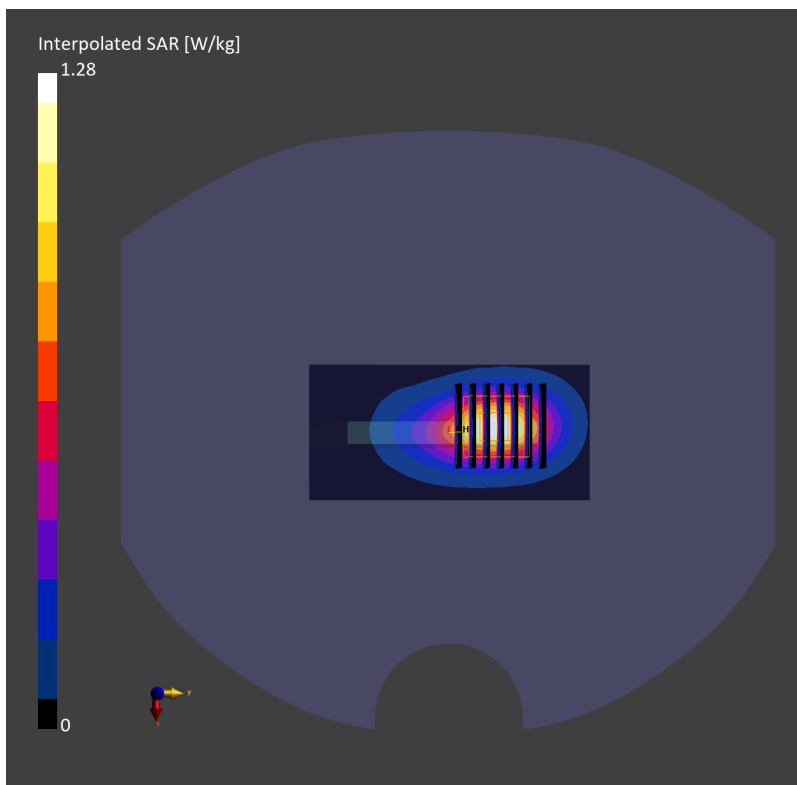

#62_FR1 n66_40M_BPSK_108_0_Bottom Side_10mm_Ch349000


Communication System: 5G NR; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1745$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.734 W/kg; SAR (10g) = 0.378 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.749 W/kg; SAR (8g) = 0.423 W/kg; SAR (10g) = 0.389 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.2 %

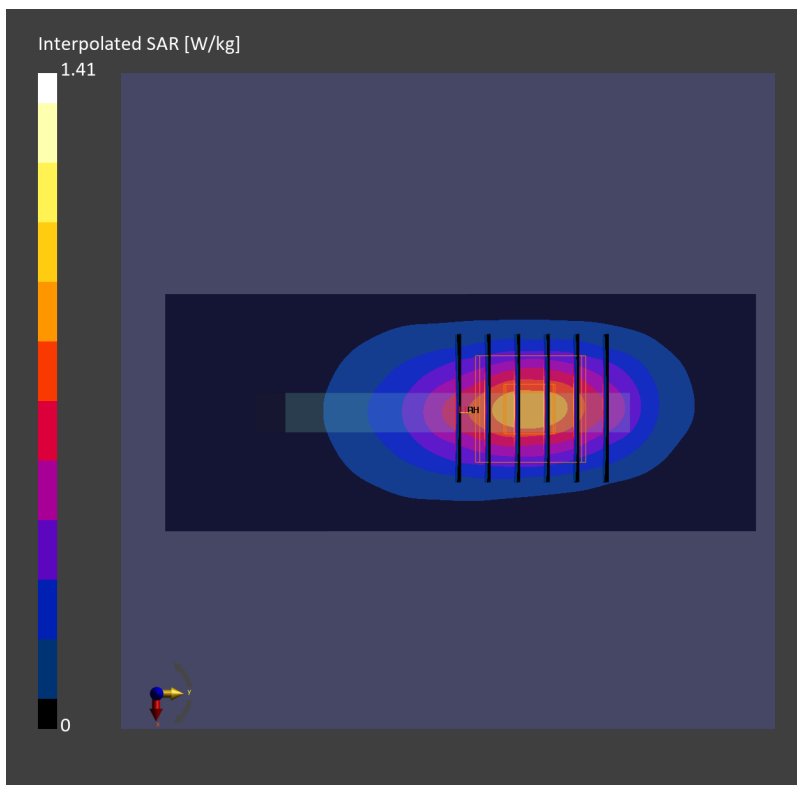

#65_FR1 n70_15M_BPSK_36_22_Bottom Side_10mm_Ch340500


Communication System: 5G NR; Frequency: 1702.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230523 Medium parameters used: $f=1702.5$ MHz; $\sigma=1.36$ S/m; $\epsilon_r=40.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.49, 8.47, 7.6); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.723 W/kg; SAR (10g) = 0.374 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.738 W/kg; SAR (8g) = 0.419 W/kg; SAR (10g) = 0.385 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.4 %

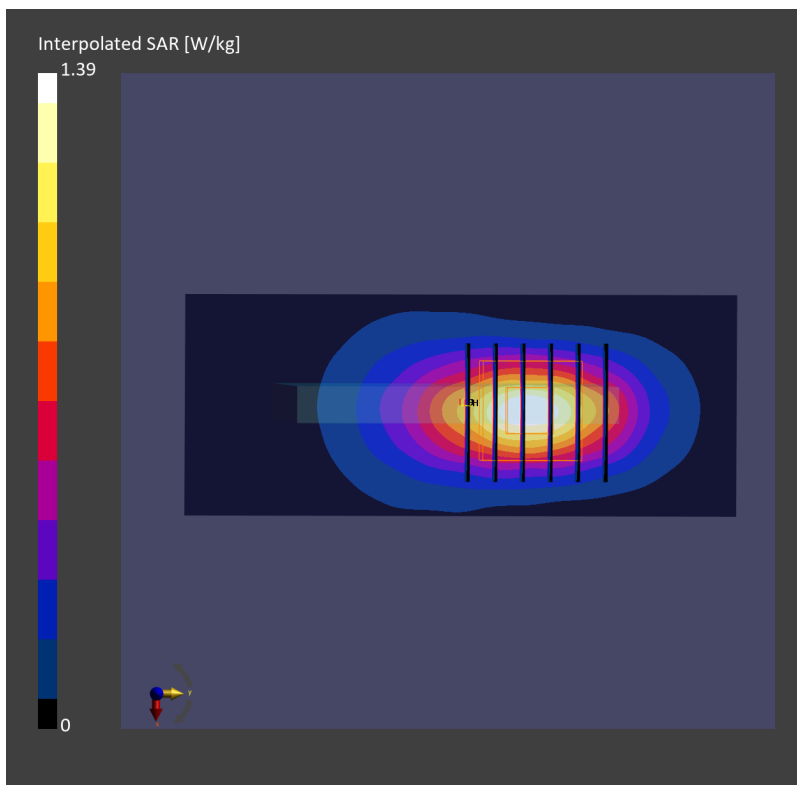

#64_FR1 n71_20M_BPSK_1_1_Left Side_10mm_Ch136100


Communication System: 5G NR ; Frequency: 680.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230513 Medium parameters used: $f=680.500$ MHz; $\sigma=0.863$ S/m; $\epsilon_r=42.1$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.85, 9.89, 8.98); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.491 W/kg; SAR (10g) = 0.339 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.499 W/kg; SAR (8g) = 0.361 W/kg; SAR (10g) = 0.345 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 83.1 %

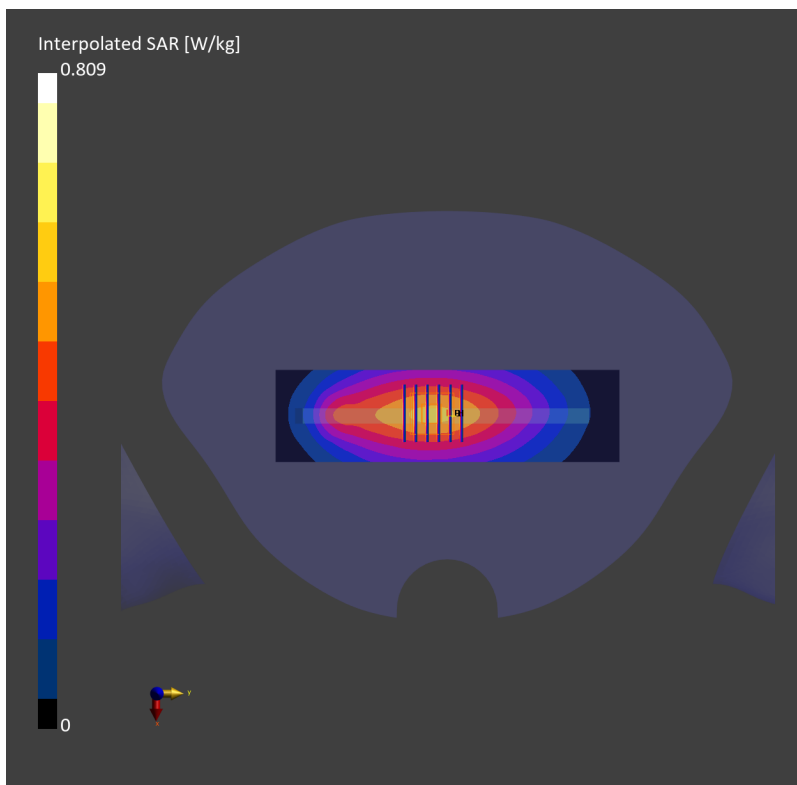

#65_FR1 n41_100M_BPSK_135_0_Top Side_10mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230530 Medium parameters used: $f=2592.990$ MHz; $\sigma=1.96$ S/m; $\epsilon_r=38.2$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.89, 7.46, 6.94); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.637 W/kg; SAR (10g) = 0.266 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.655 W/kg; SAR (8g) = 0.306 W/kg; SAR (10g) = 0.273 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 77.1 %

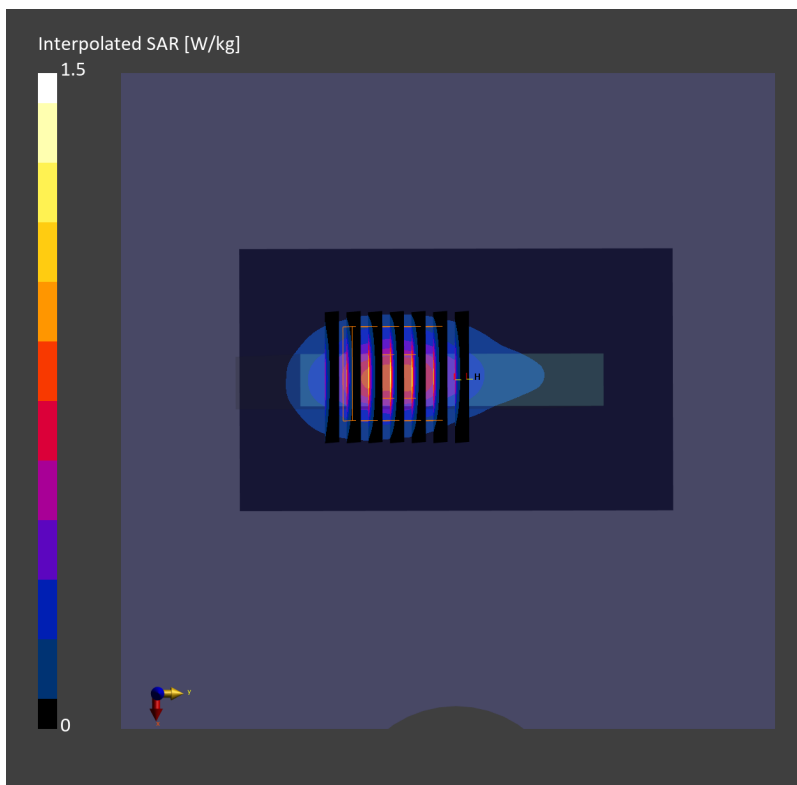

#66_FR1 n48_20M_BPSK_1_49_Left Side_10mm_Ch637334


Communication System: 5G NR; Frequency: 3560.005 MHz; Duty Cycle: 1:1
Medium: HSL_3500_230602 Medium parameters used: $f = 3560.005$ MHz; $\sigma = 2.96$ S/m; $\epsilon_r = 37.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.19, 7.19, 7.19); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10900-AAC

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.689 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.715 W/kg; SAR (8g) = 0.340 W/kg; SAR (10g) = 0.306 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 77.2 %

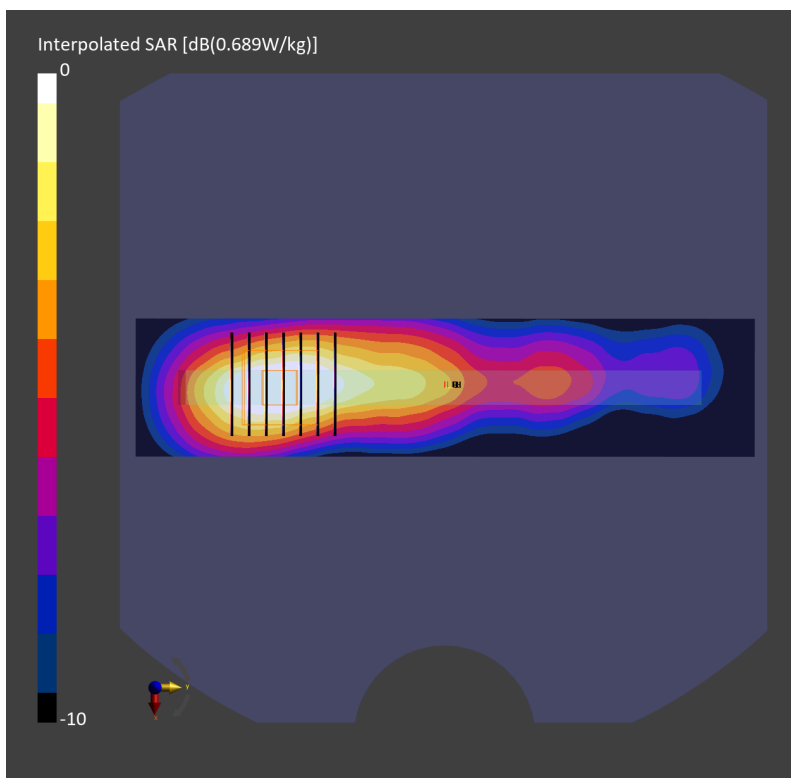

#67_FR1 n77_100M_BPSK_1_1_Right Side_10mm_Ch656000


Communication System: 5G NR ; Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL_3900_230605 Medium parameters used: $f= 3840.000$ MHz; $\sigma= 3.34$ S/m; $\epsilon_r = 37.2$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.83, 6.5, 5.84); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2022-11-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.529 W/kg; SAR (10g) = 0.221 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.543 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.226 W/kg
Smallest distance from peaks to all points 3 dB below = 8.3 mm
Ratio of SAR at M2 to SAR at M1 = 73.9 %

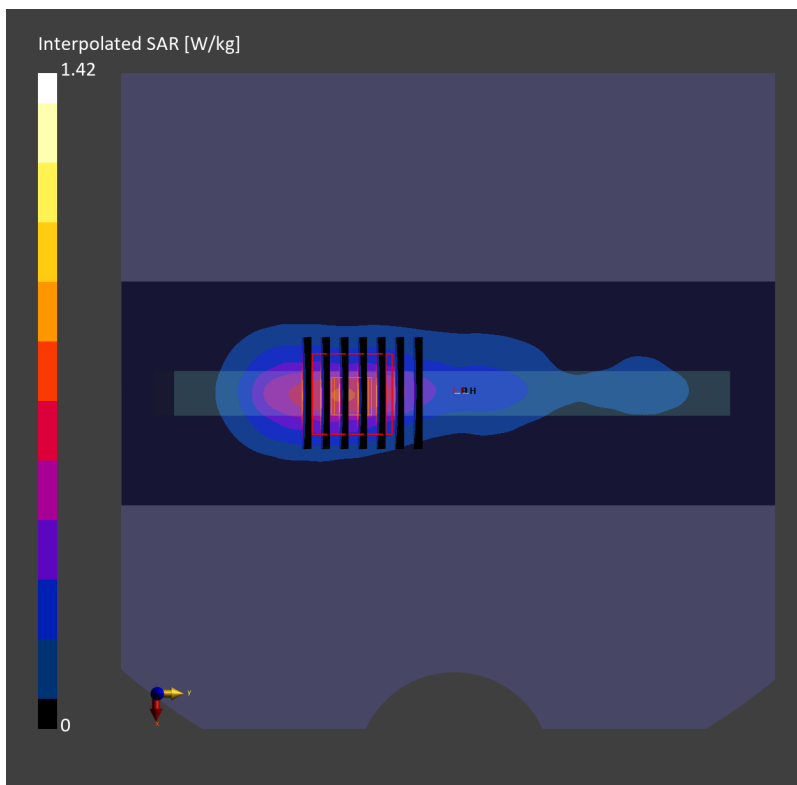

#68_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch12


Communication System: 802.11b ; Frequency: 2467.0 MHz; Duty Cycle: 1:1.010
Medium: HSL_2450_230519 Medium parameters used: $f= 2467.0$ MHz; $\sigma= 1.84$ S/m; $\epsilon_r = 38.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10515-AAA

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.660 W/kg; SAR (10g) = 0.281 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.680 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.294 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

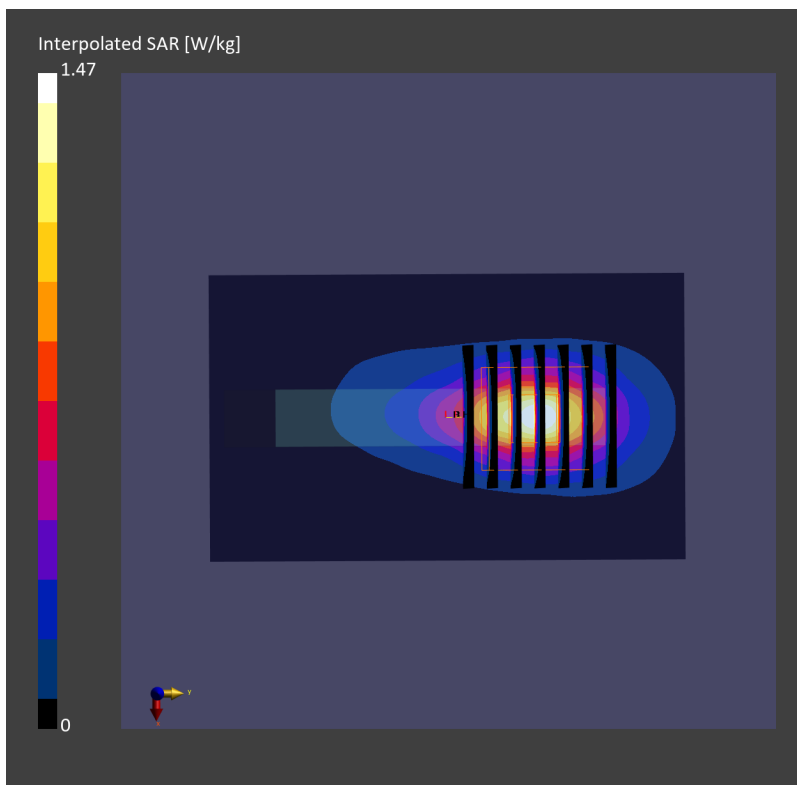

#69_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_10mm_Ch42


Communication System: 802.11ac; Frequency: 5210.0 MHz; Duty Cycle: 1:1.088
Medium: HSL_5G_230503 Medium parameters used: $f= 5210.0$ MHz; $\sigma= 4.56$ S/m; $\epsilon_r = 35.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.91, 5.91, 5.91); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.150 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.156 W/kg; SAR (8g) = 0.063 W/kg; SAR (10g) = 0.055 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 66.9 %

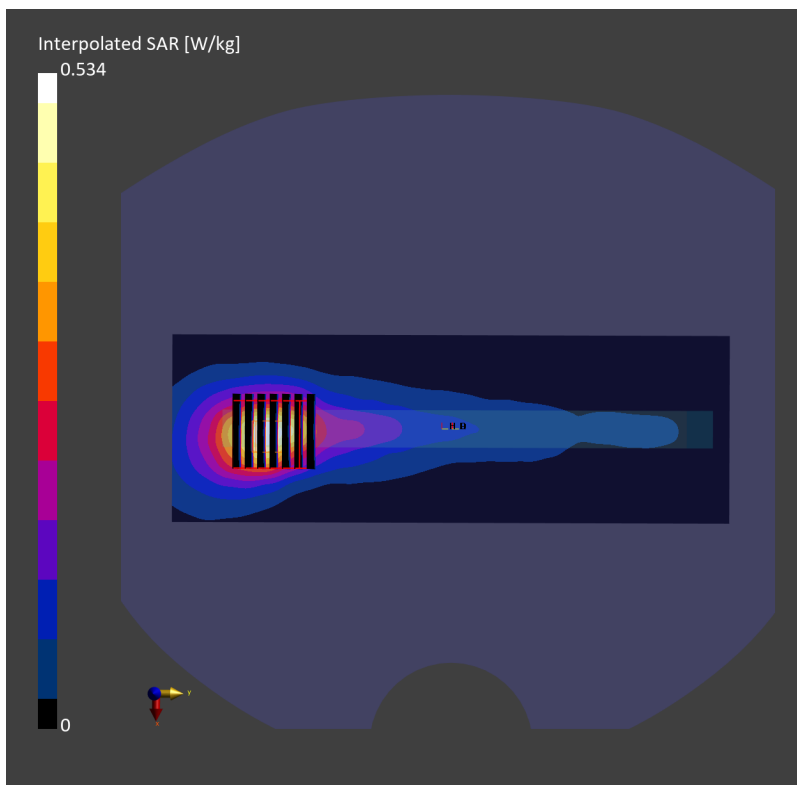

#70_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_10mm_Ch155


Communication System: 802.11ac; Frequency: 5775.0 MHz; Duty Cycle: 1:1.088
Medium: HSL_5G_230503 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.24, 5.24, 5.24); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.239 W/kg; SAR (10g) = 0.091 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 0.225 W/kg; SAR (8g) = 0.093 W/kg; SAR (10g) = 0.083 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 60.1 %

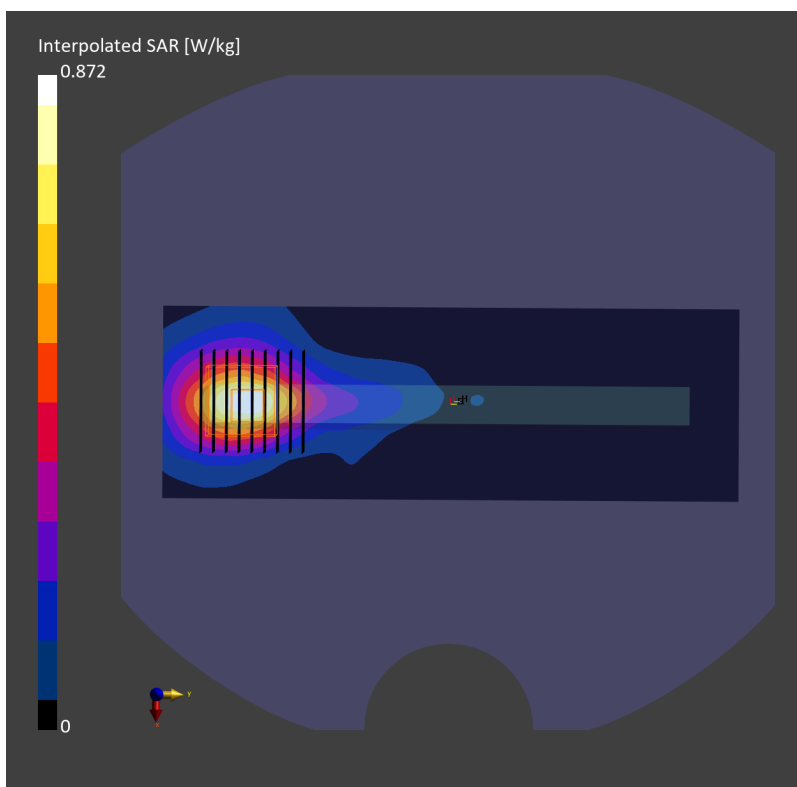

#71_Bluetooth_1Mbps_Top Side_10mm_Ch78


Communication System: Bluetooth; Frequency: 2480.0 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_230512 Medium parameters used: $f=2480.0$ MHz; $\sigma=1.87$ S/m; $\epsilon_r=38.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.92, 7.92, 7.92); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: Bluetooth, 10032-CAA

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.196 W/kg; SAR (10g) = 0.082 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.238 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.107 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.5 %

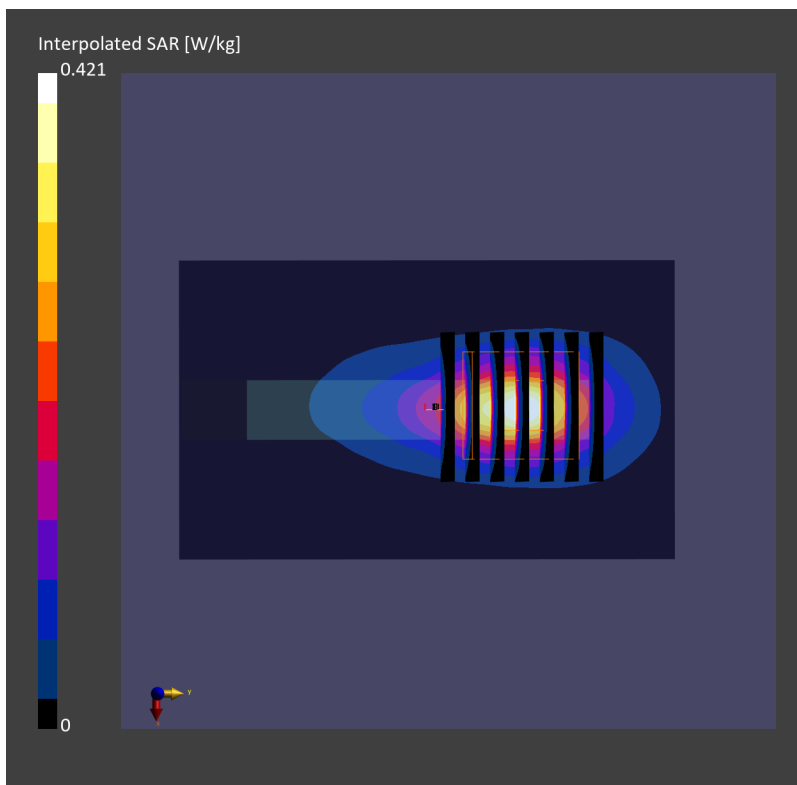

#72_GSM850_GPRS (4 Tx slots)_Front_10mm_Ch189


Communication System: GPRS; Frequency: 836.400 MHz; Duty Cycle: 1:2.08
Medium: HSL_850_230523 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.638 W/kg; SAR (10g) = 0.413 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.701 W/kg; SAR (8g) = 0.431 W/kg; SAR (10g) = 0.402 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 80.0 %

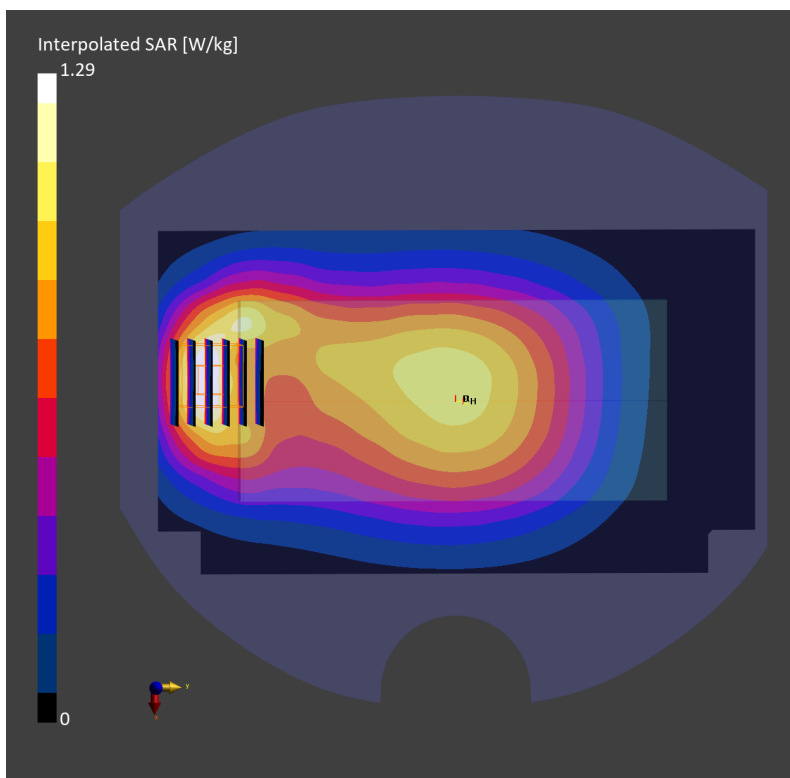

#73_GSM1900_GPRS (4 Tx slots)_Front_10mm_Ch661


Communication System: GPRS; Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_230521 Medium parameters used: $f=1880$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.447 W/kg; SAR (10g) = 0.253 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.17 dB
SAR (1g) = 0.547 W/kg; SAR (8g) = 0.314 W/kg; SAR (10g) = 0.289 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 83.3 %

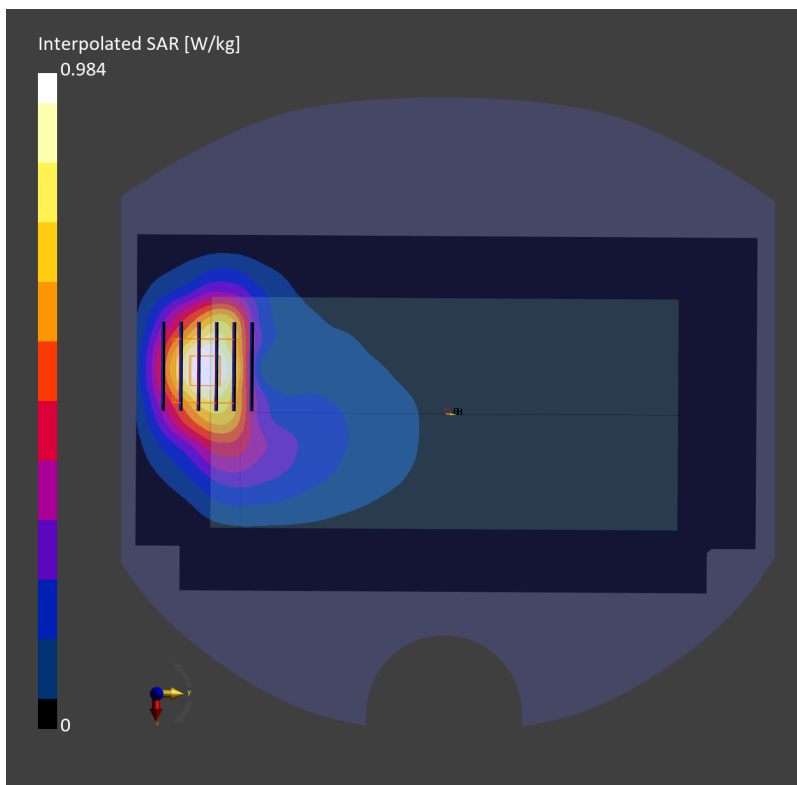

#74_WCDMA II_RMC 12.2Kbps_Front_10mm_Ch9538


Communication System: WCDMA; Frequency: 1907.600 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230517 Medium parameters used: $f=1907.600$ MHz; $\sigma=1.46$ S/m; $\epsilon_r=38.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.518 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.0 %

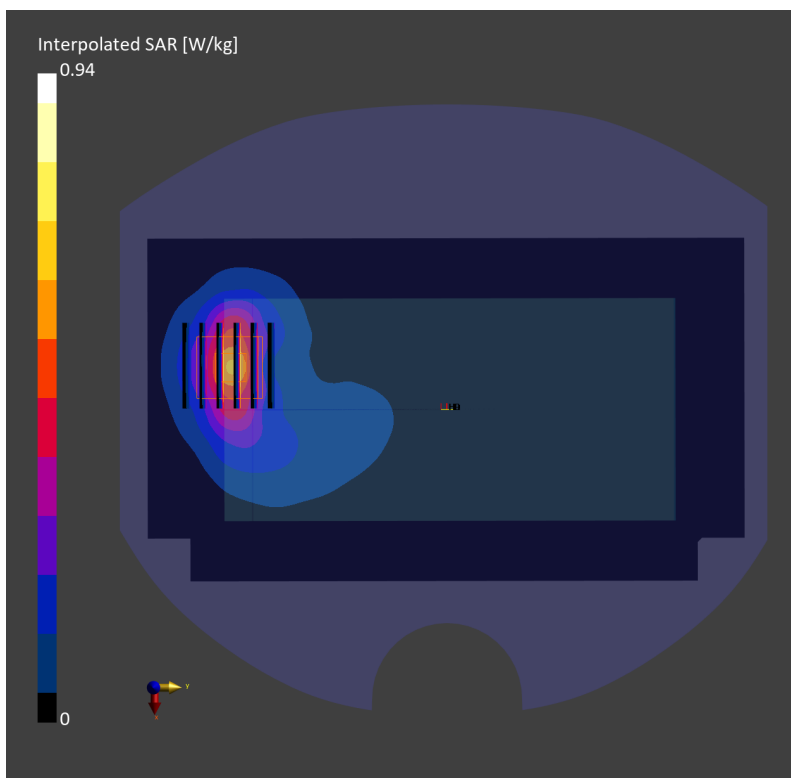

#75_WCDMA IV_RMC 12.2Kbps_Front_10mm_Ch1413


Communication System: WCDMA; Frequency: 1732.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230517 Medium parameters used: $f= 1732.600$ MHz; $\sigma= 1.36$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2448
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.390 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.409 W/kg; SAR (8g) = 0.241 W/kg; SAR (10g) = 0.223 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.8 %

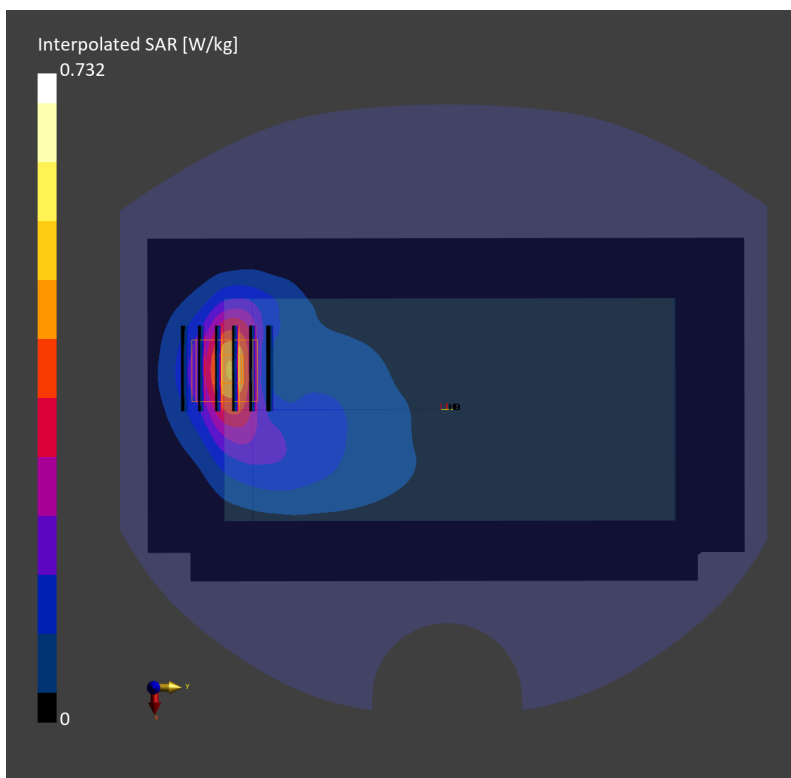

#76_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182


Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_230505 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.642 W/kg; SAR (10g) = 0.411 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.651 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.370 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 79.8 %

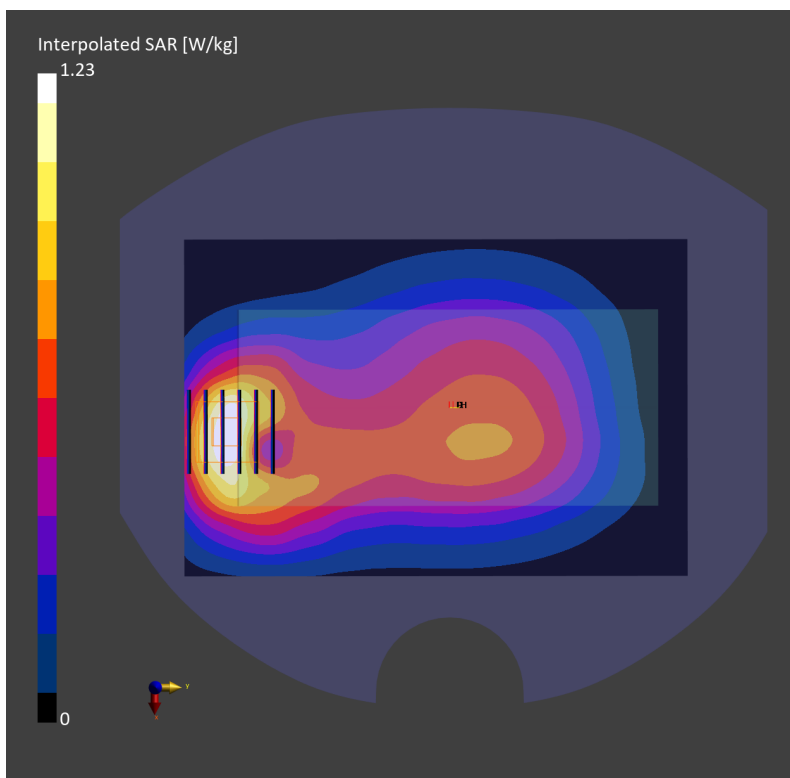

#77_LTE Band 2_20M_QPSK_50_0_Back_10mm_Ch19100


Communication System: LTE-FDD; Frequency: 1900.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230605 Medium parameters used: $f=1900.000$ MHz; $\sigma=1.41$ S/m; $\epsilon_r=38.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.36, 8.36, 8.36); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.308 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.387 W/kg; SAR (8g) = 0.216 W/kg; SAR (10g) = 0.199 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 84.6 %

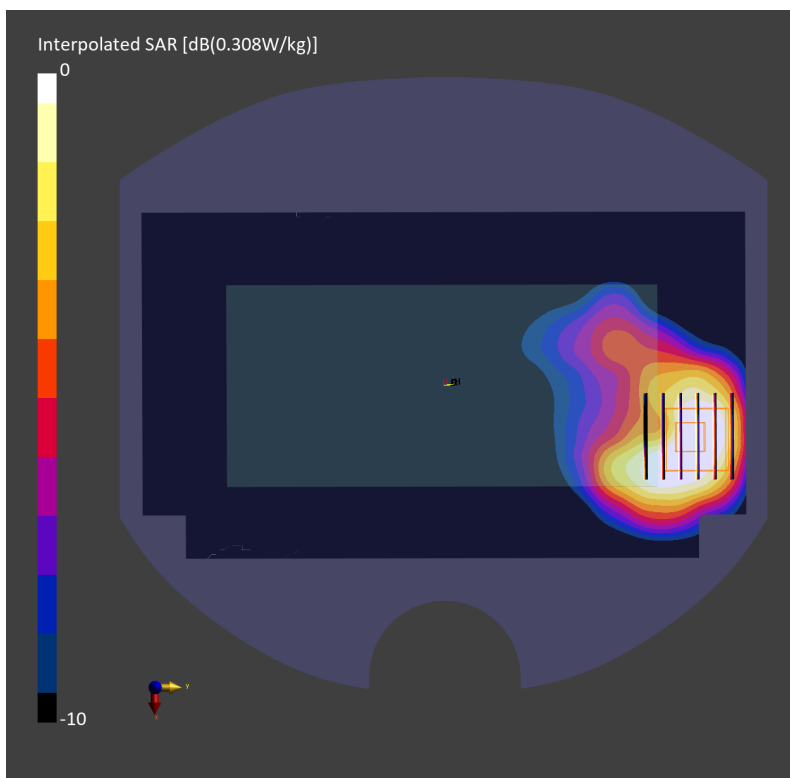

#78_LTE Band 7_20M_QPSK_1_0_Front_10mm_Ch21100


Communication System: LTE; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230522 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.590 W/kg; SAR (10g) = 0.299 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.625 W/kg; SAR (8g) = 0.345 W/kg; SAR (10g) = 0.316 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.8 %

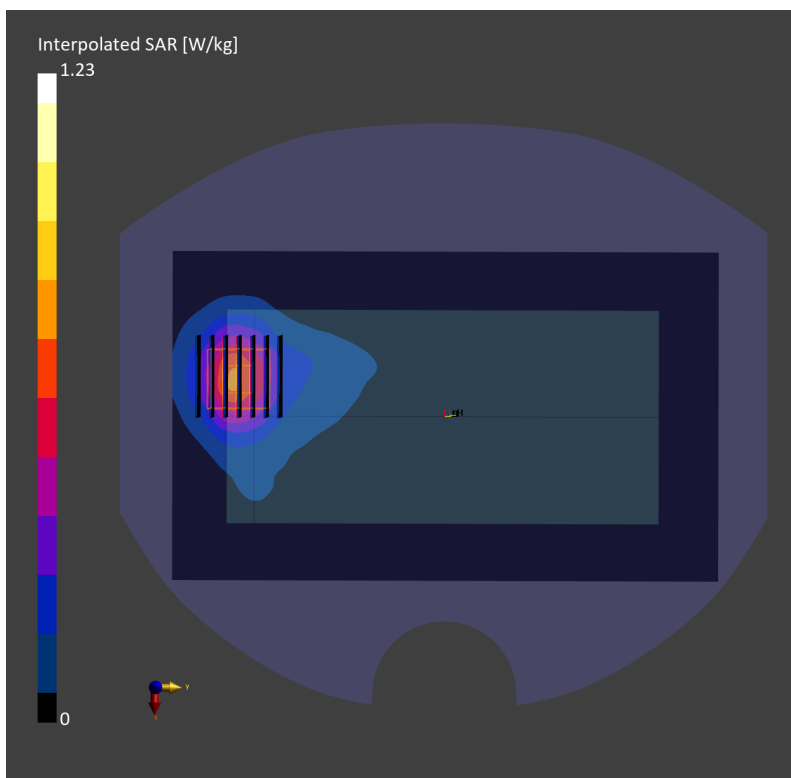

#79_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095


Communication System: LTE-FDD ; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f=707.500$ MHz; $\sigma=0.875$ S/m; $\epsilon_r=41.4$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.372 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.380 W/kg; SAR (8g) = 0.233 W/kg; SAR (10g) = 0.218 W/kg
Smallest distance from peaks to all points 3 dB below = 13.5 mm
Ratio of SAR at M2 to SAR at M1 = 79.3 %

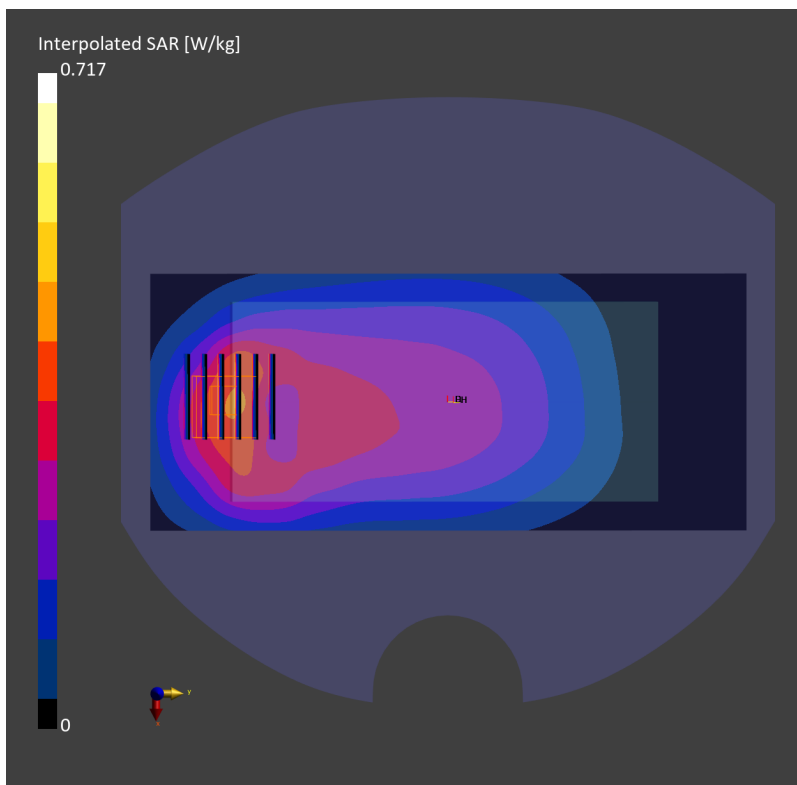

#80_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: LTE-FDD ; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_230422 Medium parameters used: $f= 782.000$ MHz; $\sigma= 0.898$ S/m; $\epsilon_r = 41.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.292 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.440 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

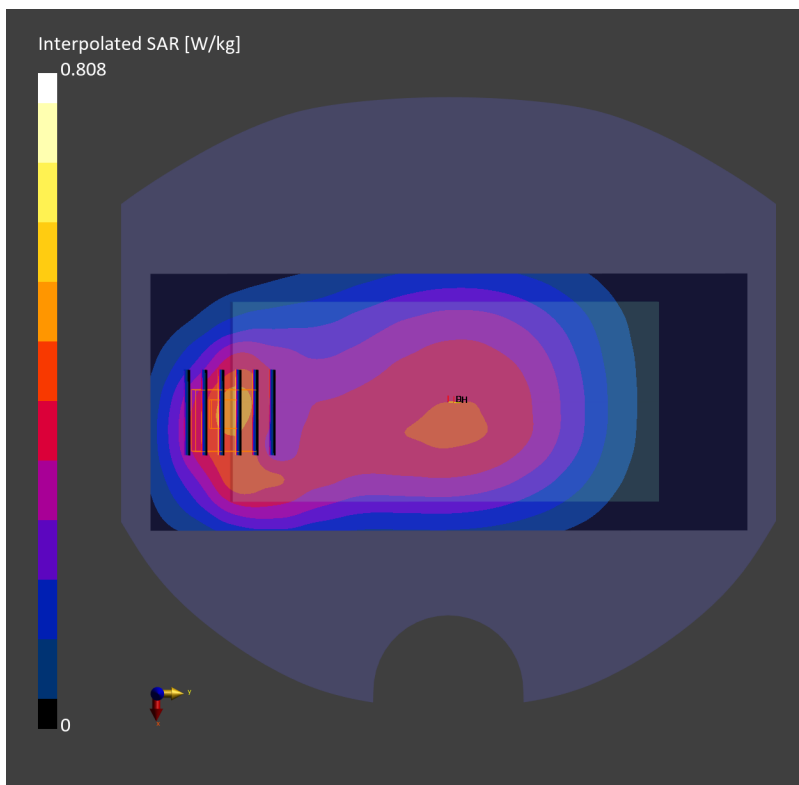

#81_LTE Band 14_10M_QPSK_1_0_Front_10mm_Ch23330


Communication System: LTE-FDD; Frequency: 793.0 MHz; Duty Cycle: 1:1
Medium: HSL_750_230423 Medium parameters used: $f=793.0$ MHz; $\sigma=0.907$ S/m; $\epsilon_r=41.1$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.521 W/kg; SAR (10g) = 0.371 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.450 W/kg; SAR (8g) = 0.327 W/kg; SAR (10g) = 0.312 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 90.1 %

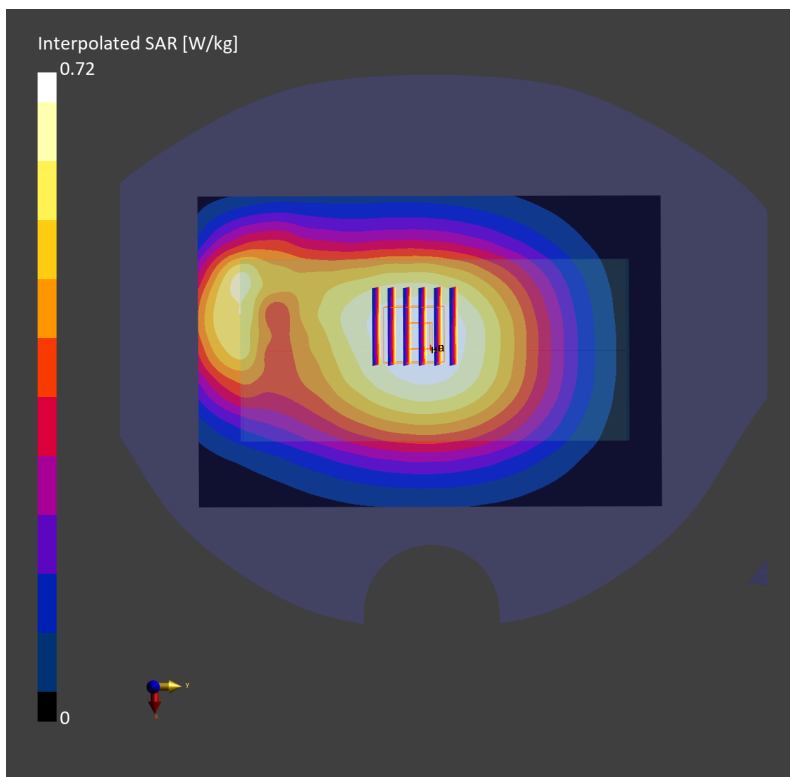

#82_LTE Band 25_20M_QPSK_1_0_Front_10mm_Ch26340


Communication System: LTE-FDD; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230521 Medium parameters used: $f=1880.000$ MHz; $\sigma=1.42$ S/m; $\epsilon_r=40.0$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(8.25, 8.25, 8.25); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2023-01-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.399 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.511 W/kg; SAR (8g) = 0.299 W/kg; SAR (10g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.3 %

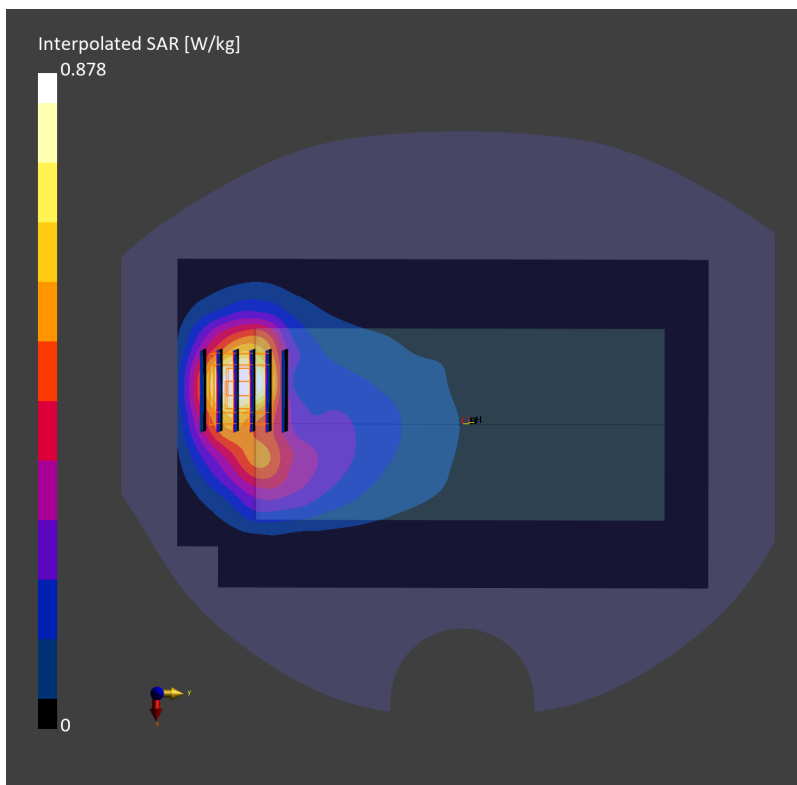

#83_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865


Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_230425 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(9.85, 9.85, 9.85); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.475 W/kg; SAR (10g) = 0.316 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.515 W/kg; SAR (8g) = 0.315 W/kg; SAR (10g) = 0.294 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

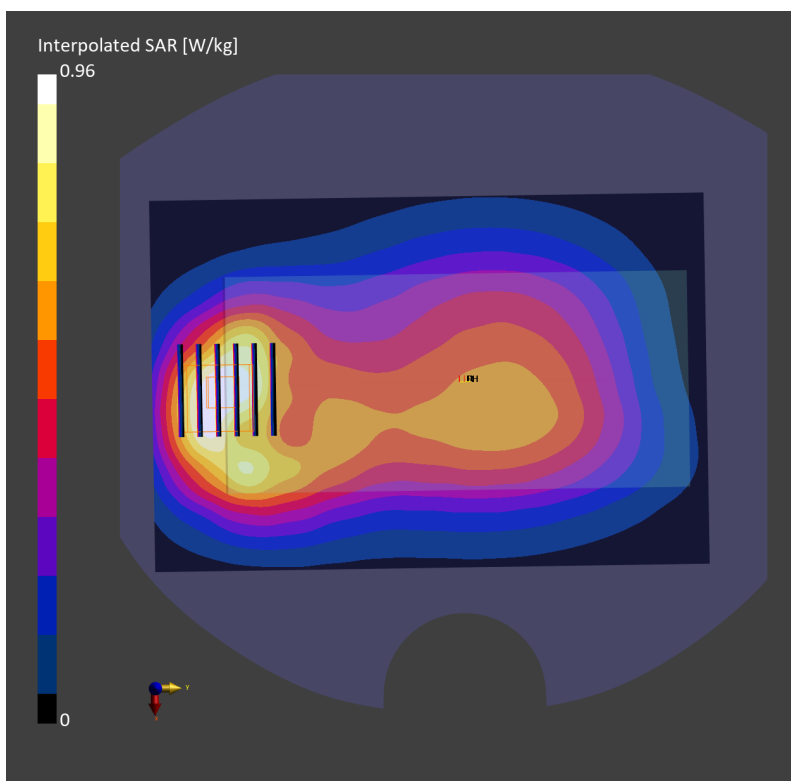

#84_LTE Band 30_10M_QPSK_1_0_Front_10mm_Ch27710


Communication System: LTE-FDD; Frequency: 2310.000 MHz; Duty Cycle: 1:1
Medium: HSL_2300_230527 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.68$ S/m; $\epsilon_r=39.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.93, 7.93, 7.93); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.717 W/kg; SAR (10g) = 0.371 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.13 dB
SAR (1g) = 0.763 W/kg; SAR (8g) = 0.427 W/kg; SAR (10g) = 0.392 W/kg
Smallest distance from peaks to all points 3 dB below = 11.1 mm
Ratio of SAR at M2 to SAR at M1 = 81.7 %

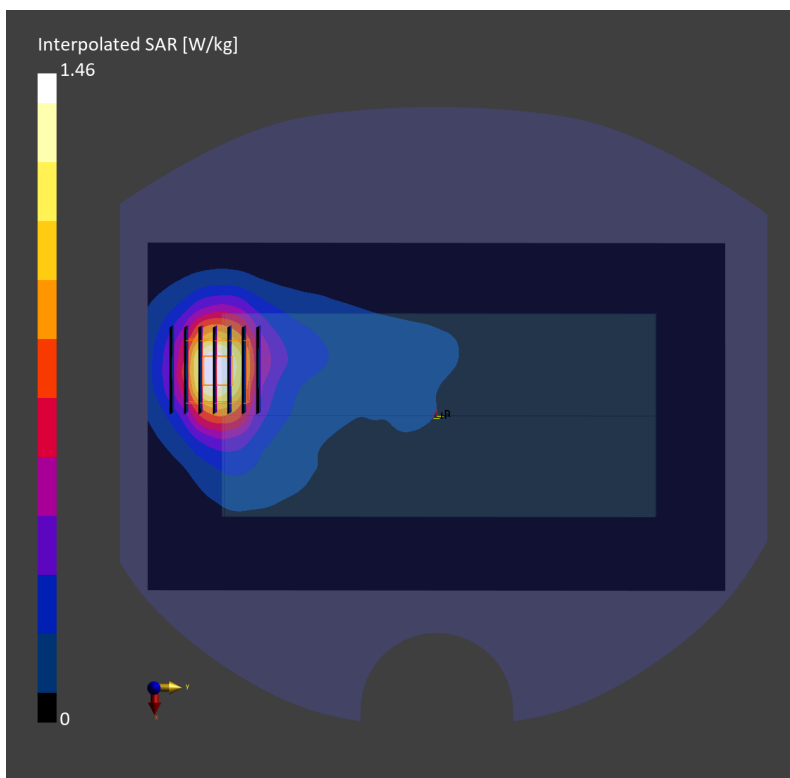

#85_LTE Band 66_20M_QPSK_1_0_Front_10mm_Ch132072


Communication System: LTE-FDD ; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230525 Medium parameters used: $f= 1720.000$ MHz; $\sigma= 1.32$ S/m; $\epsilon_r = 40.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(8.66, 8.66, 8.66); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.504 W/kg; SAR (10g) = 0.290 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.598 W/kg; SAR (8g) = 0.353 W/kg; SAR (10g) = 0.326 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 82.8 %

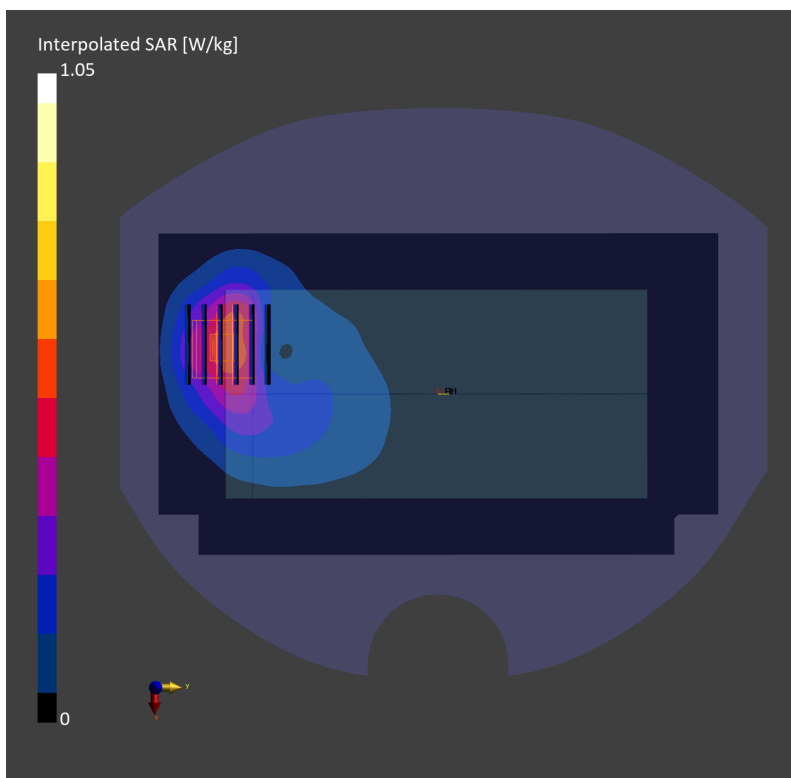

#86_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133297


Communication System: LTE-FDD; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_230424 Medium parameters used: $f=680.5$ MHz; $\sigma=0.852$ S/m; $\epsilon_r=43.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.434 W/kg; SAR (10g) = 0.285 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.417 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.237 W/kg
Smallest distance from peaks to all points 3 dB below = 13.6 mm
Ratio of SAR at M2 to SAR at M1 = 79.5 %

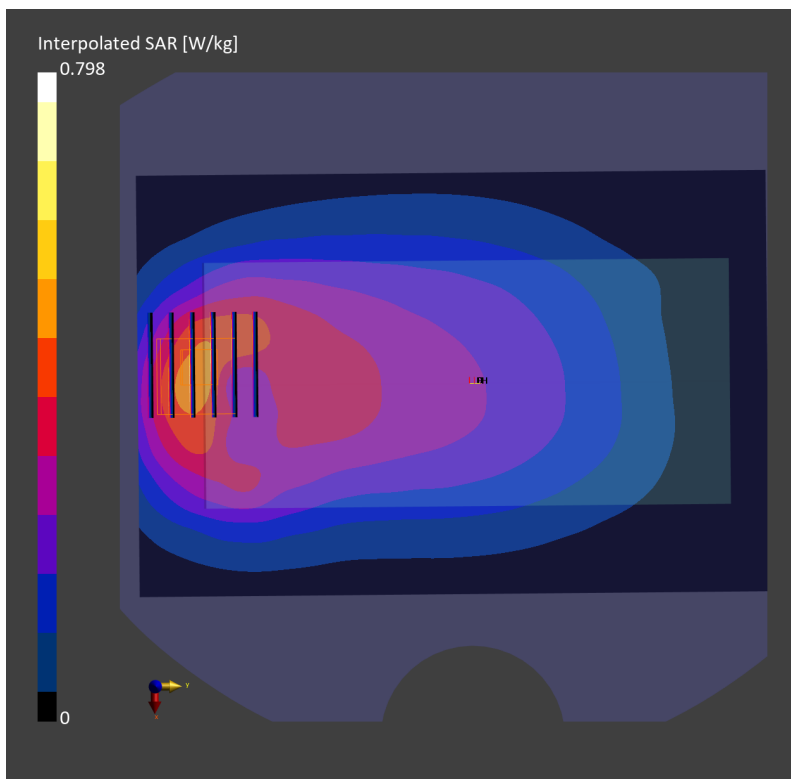

#87_LTE Band 41_20M_QPSK_1_0_Back_10mm_Ch41055

Communication System: LTE; Frequency: 2636.500 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_230526 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10172-CAH

Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.541 W/kg; SAR (10g) = 0.268 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.490 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.245 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 79.3 %

