



FCC RADIO TEST REPORT

FCC ID : A4RGZRNL
Equipment : Interactive Media Streaming Device
Model Name : GZRNL
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 30, 2020 and testing was started from Feb. 03, 2020 and completed on Mar. 25, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission	24
3.7 Antenna Requirements.....	25
4 List of Measuring Equipment.....	26
5 Uncertainty of Evaluation.....	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 4.49 dB at 5649.200 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 6.13 dB at 0.806 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Vivian Hsu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Interactive Media Streaming Device
Model Name	GZRNL
FCC ID	A4RGZRNL
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
WIP01061HFDD0009G	Conducted Measurement
01091HFDD013AA	Radiated Spurious Emission
01161HFDD012HJ	Conducted Emission

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	802.11a : 16.90 dBm / 0.0490 W 802.11n HT20 : 16.90 dBm / 0.0490 W 802.11n HT40 : 14.70 dBm / 0.0295 W 802.11ac VHT20: 16.80 dBm / 0.0479 W 802.11ac VHT40: 14.60 dBm / 0.0288 W 802.11ac VHT80: 14.70 dBm / 0.0295 W
99% Occupied Bandwidth	802.11a : 17.50 MHz 802.11n HT20 : 18.35 MHz 802.11n HT40 : 36.80 MHz 802.11ac VHT80 : 77.4 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain 4.58 dBi

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth link controller + WLAN (5GHz) Link + H-Pattern + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, the tests were performed with Adapter 1	

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

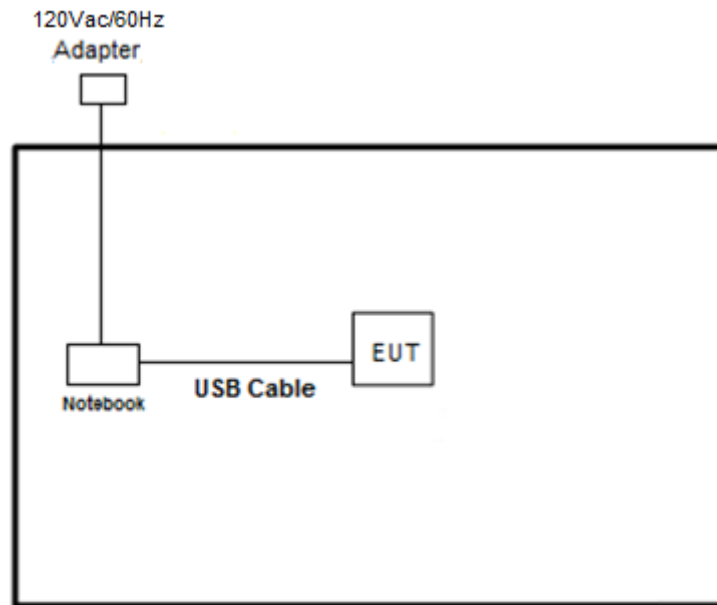

<AC Conducted Emission Mode>

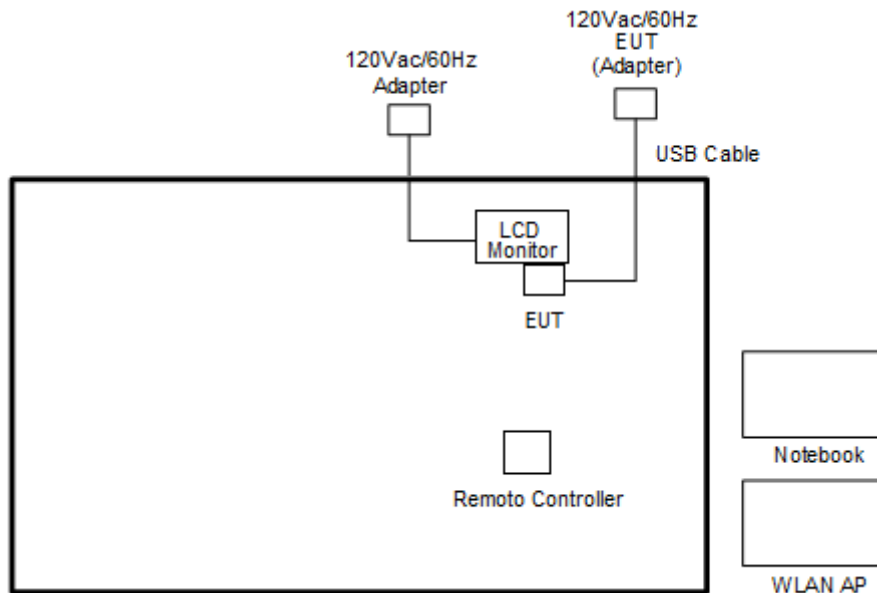



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	LCD Monitor	DELL	P2715Qt	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
4.	Remote control	Google	AEVM1-RCX1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “CMD” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

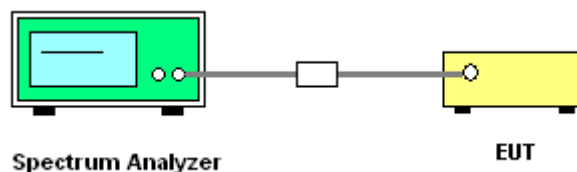

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

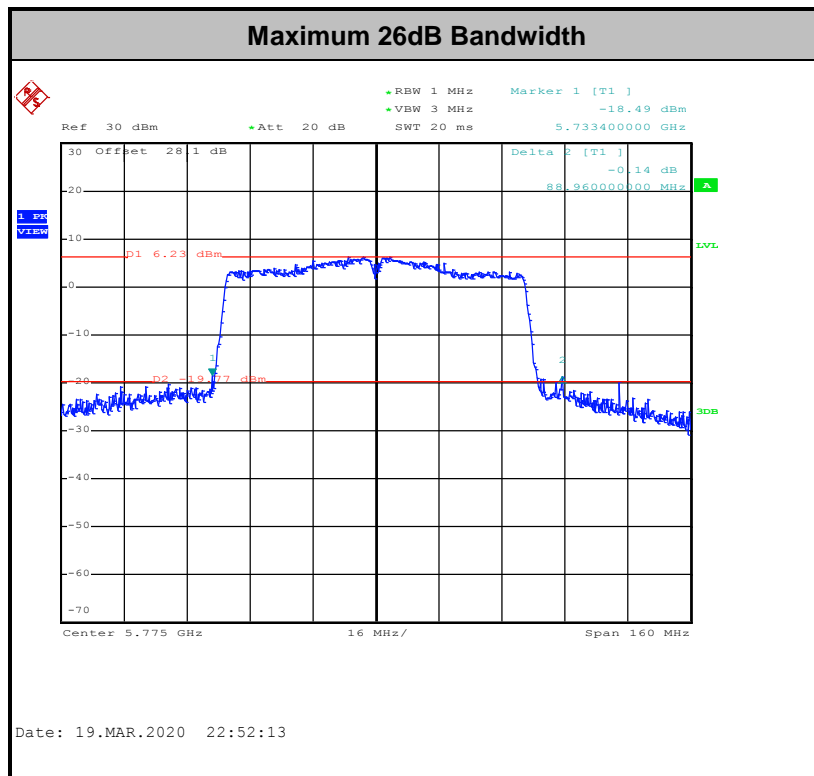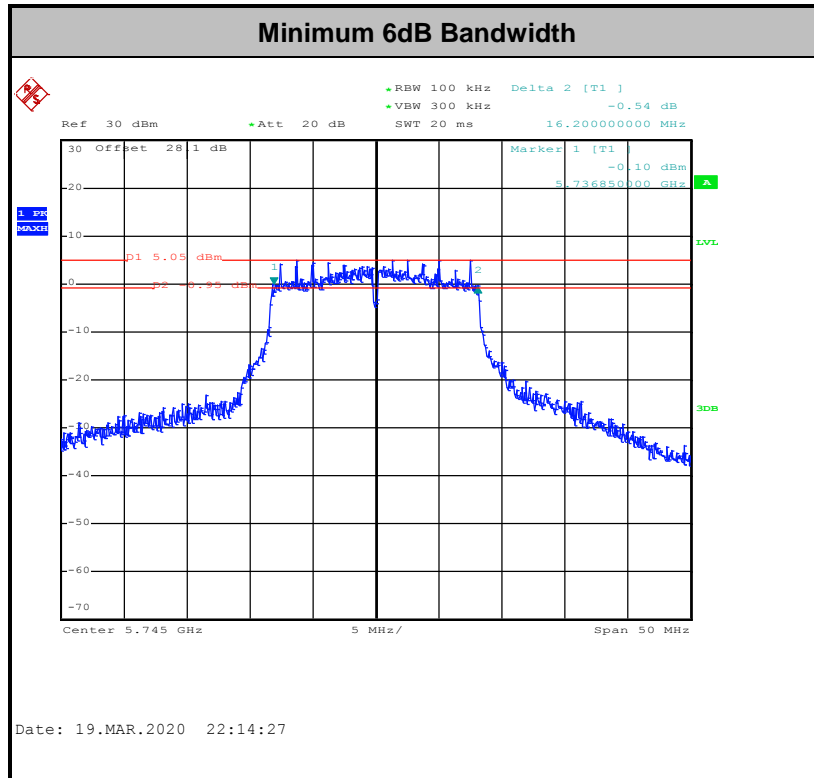

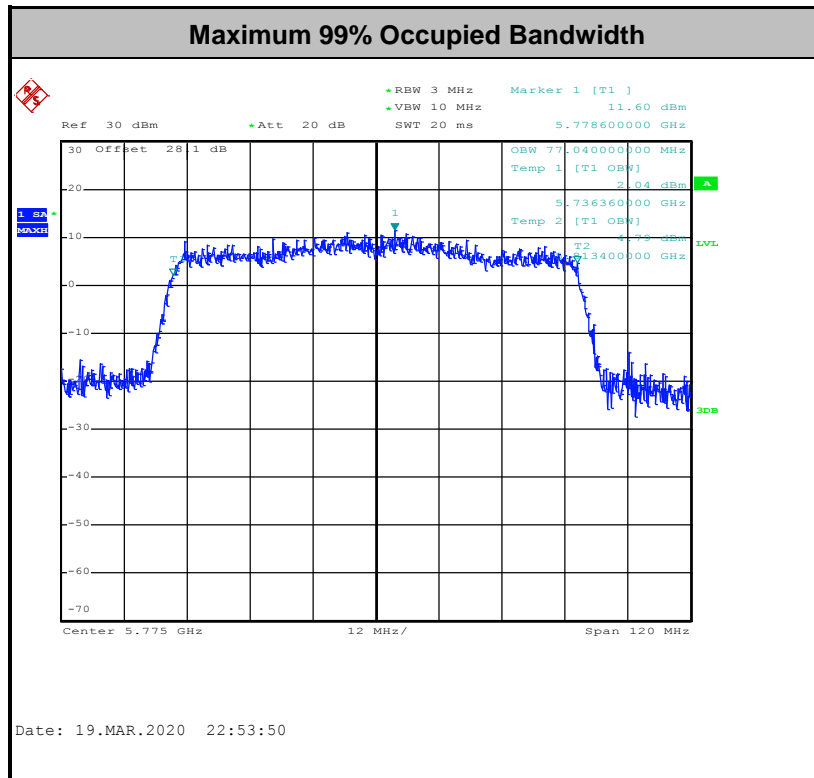

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

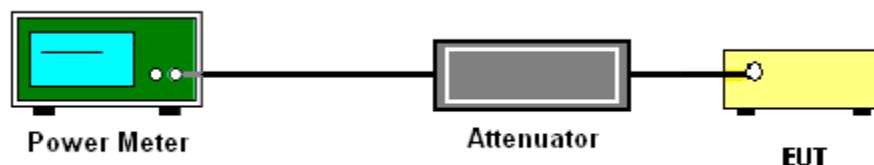

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-3

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

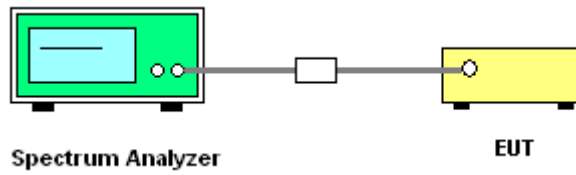

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

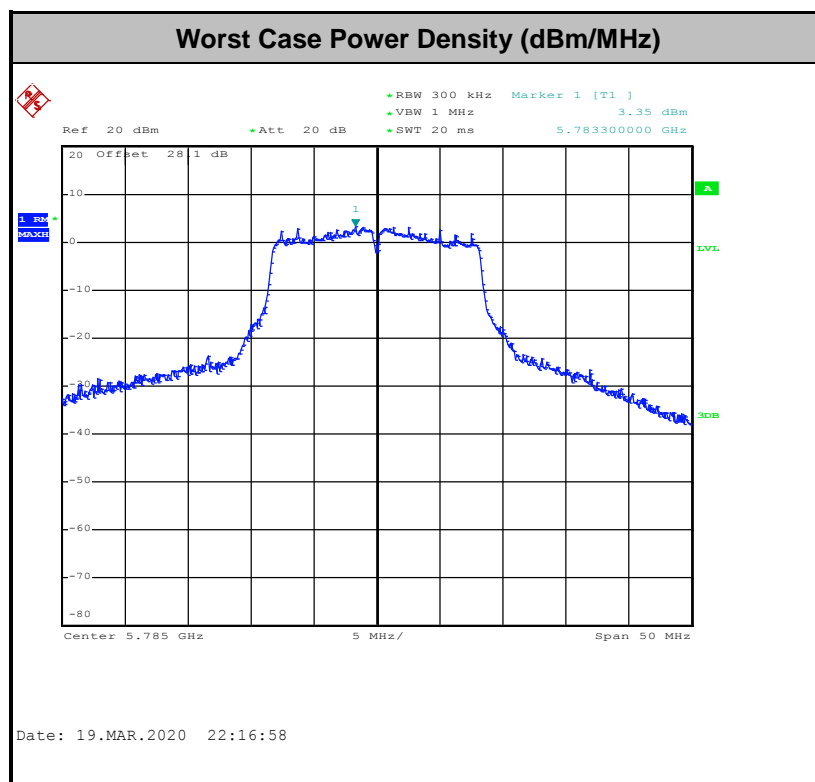



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

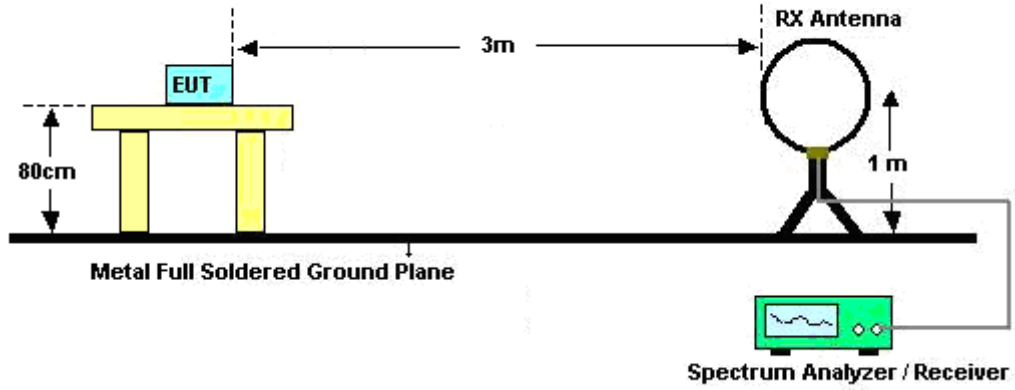

For radiated emissions from 30MHz to 1GHz

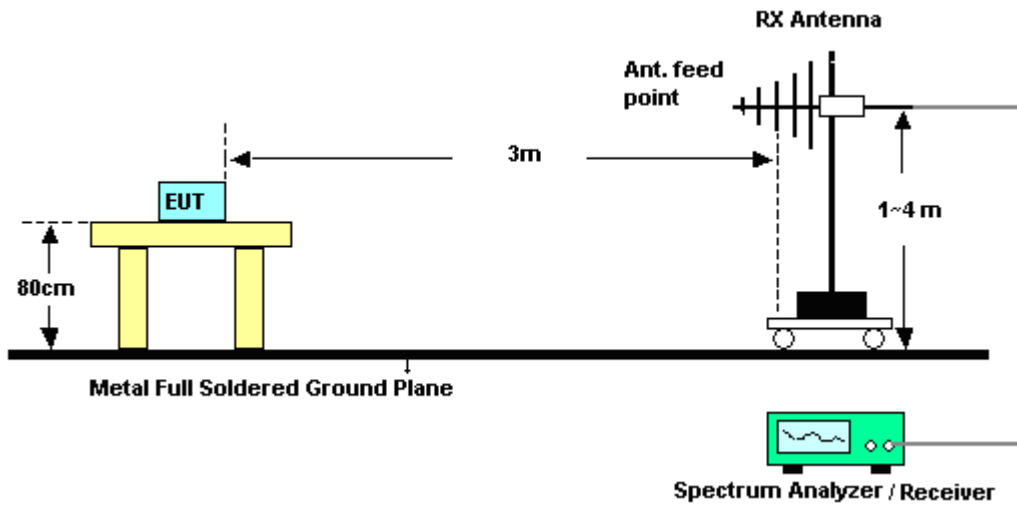

For radiated emissions above 1GHz

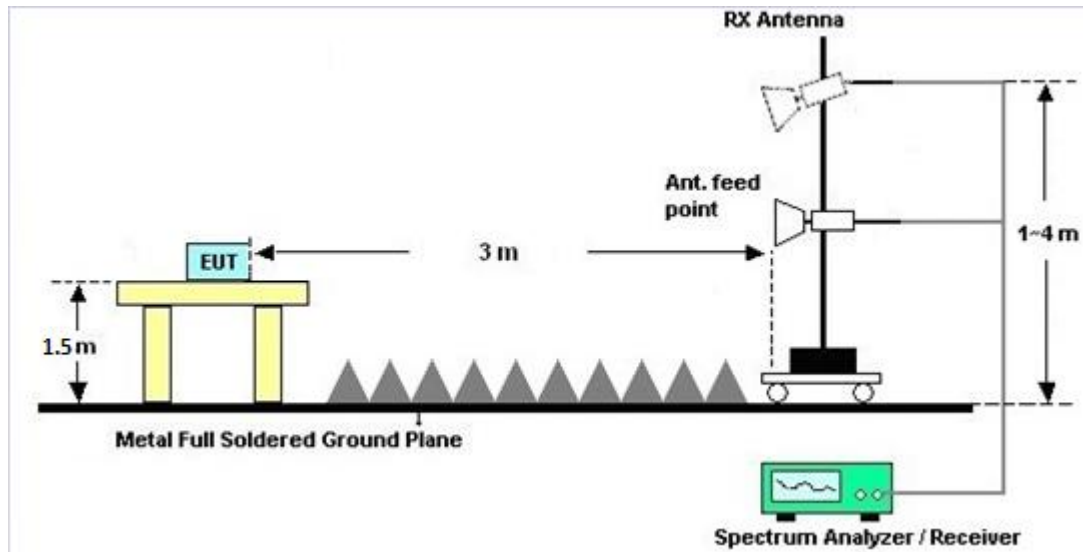

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

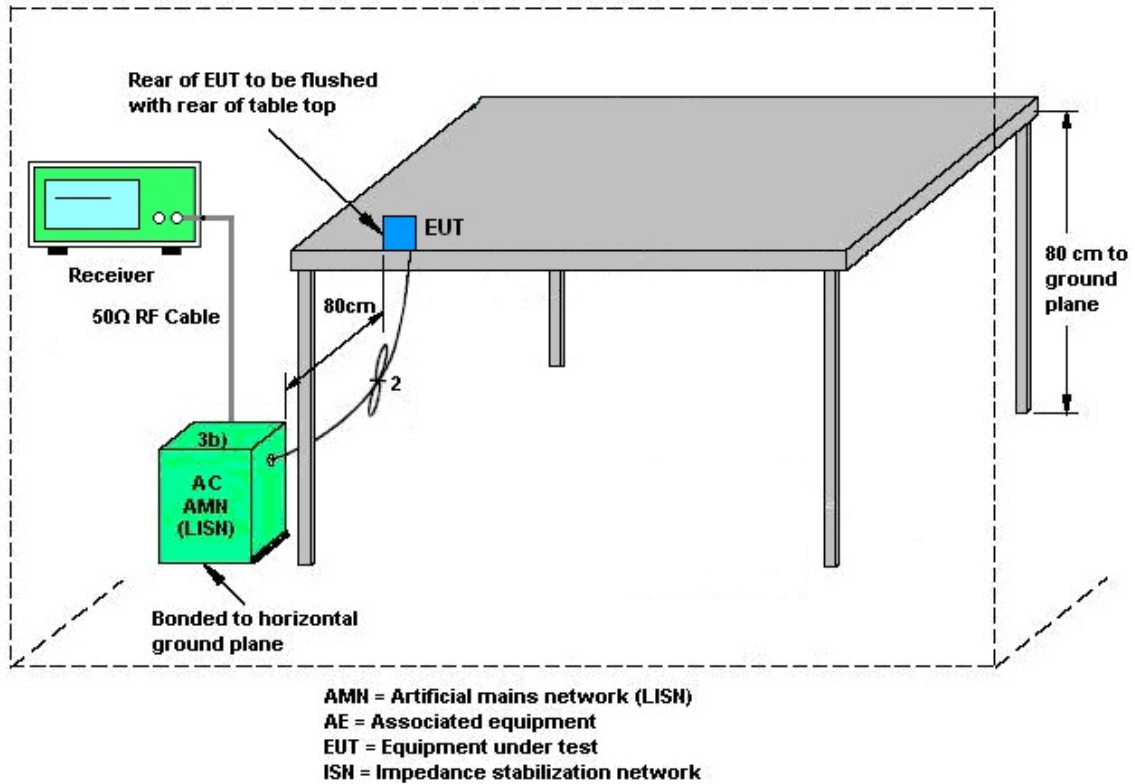

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Feb. 14, 2020~ Mar. 25, 2020	Oct. 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-132 8	1GHz ~ 18GHz	Nov. 14, 2019	Feb. 14, 2020~ Mar. 25, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz ~ 40GHz	Dec. 10, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
Preamplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 02, 2020	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JAP00101800 -30-10P	160118550 004	1GHz~18GHz	Sep. 27, 2019	Feb. 14, 2020~ Mar. 25, 2020	Sep. 26, 2020	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Dec. 20, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Aug. 13, 2019	Feb. 14, 2020~ Mar. 25, 2020	Aug. 12, 2020	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP161243	N/A	May 11, 2020	Feb. 14, 2020~ Mar. 25, 2020	May 10, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Dec. 12, 2019	Feb. 14, 2020~ Mar. 25, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2019	Feb. 14, 2020~ Feb. 19, 2020	Feb. 24, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Feb. 25, 2020~ Mar. 25, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 25, 2019	Feb. 14, 2020~ Feb. 19, 2020	Feb. 24, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 25, 2020	Feb. 25, 2020~ Mar. 25, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 14, 2020~ Mar. 25, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Feb. 14, 2020~ Mar. 25, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 14, 2020~ Mar. 25, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-00098 9	N/A	N/A	Feb. 14, 2020~ Mar. 25, 2020	N/A	Radiation (03CH12-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53GHz Low Pass Filter	Sep. 15, 2019	Feb. 14, 2020~ Mar. 25, 2020	Sep. 14, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000 -40ST	SN6	6.75GHz High Pass Filter	Jul. 02, 2019	Feb. 14, 2020~ Mar. 25, 2020	Jul. 01, 2020	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Feb. 03, 2020~ Mar. 24, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Feb. 03, 2020~ Mar. 24, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	Feb. 03, 2020~ Mar. 24, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Feb. 03, 2020~ Mar. 24, 2020	Mar. 26, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 26, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Feb. 26, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Feb. 26, 2020	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Feb. 26, 2020	Nov. 19, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Feb. 26, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 26, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Feb. 26, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Feb. 26, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kathy Chen/Derek Hsu	Temperature:	21~25	°C
Test Date:	2020/02/03~2020/03/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	17.05	-	39.00	-	16.20	-	0.5	Pass
11a	6Mbps	1	157	5785	17.20	-	32.60	-	16.30	-	0.5	Pass
11a	6Mbps	1	165	5825	17.50	-	39.40	-	16.25	-	0.5	Pass
HT20	MCS0	1	149	5745	18.15	-	37.70	-	17.50	-	0.5	Pass
HT20	MCS0	1	157	5785	18.35	-	37.35	-	17.60	-	0.5	Pass
HT20	MCS0	1	165	5825	18.30	-	38.70	-	17.55	-	0.5	Pass
HT40	MCS0	1	151	5755	36.60	-	61.92	-	35.82	-	0.5	Pass
HT40	MCS0	1	159	5795	36.80	-	68.04	-	36.00	-	0.5	Pass
VHT80	MCS0	1	155	5775	77.04	-	88.96	-	75.20	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	16.80	-		30.00	-	4.58	-	Pass
11a	6Mbps	1	157	5785	16.90	-		30.00	-	4.58	-	Pass
11a	6Mbps	1	165	5825	16.80	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	149	5745	16.80	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	157	5785	16.90	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	165	5825	16.80	-		30.00	-	4.58	-	Pass
HT40	MCS0	1	151	5755	14.70	-		30.00	-	4.58	-	Pass
HT40	MCS0	1	159	5795	14.60	-		30.00	-	4.58	-	Pass
VHT20	MCS0	1	149	5745	16.70	-		30.00	-	4.58	-	Pass
VHT20	MCS0	1	157	5785	16.80	-		30.00	-	4.58	-	Pass
VHT20	MCS0	1	165	5825	16.70	-		30.00	-	4.58	-	Pass
VHT40	MCS0	1	151	5755	14.60	-		30.00	-	4.58	-	Pass
VHT40	MCS0	1	159	5795	14.60	-		30.00	-	4.58	-	Pass
VHT80	MCS0	1	155	5775	14.70	-		30.00	-	4.58	-	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	5.44	-		30.00	-	4.58	-	Pass
11a	6Mbps	1	157	5785	2.22	-	5.57	-		30.00	-	4.58	-	Pass
11a	6Mbps	1	165	5825	2.22	-	5.46	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	149	5745	2.22	-	5.31	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	157	5785	2.22	-	5.32	-		30.00	-	4.58	-	Pass
HT20	MCS0	1	165	5825	2.22	-	5.38	-		30.00	-	4.58	-	Pass
HT40	MCS0	1	151	5755	2.22	-	0.20	-		30.00	-	4.58	-	Pass
HT40	MCS0	1	159	5795	2.22	-	-0.26	-		30.00	-	4.58	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-1.93	-		30.00	-	4.58	-	Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	24~25°C
		Relative Humidity :	40~45%

EUT Information

Report NO : 971035-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

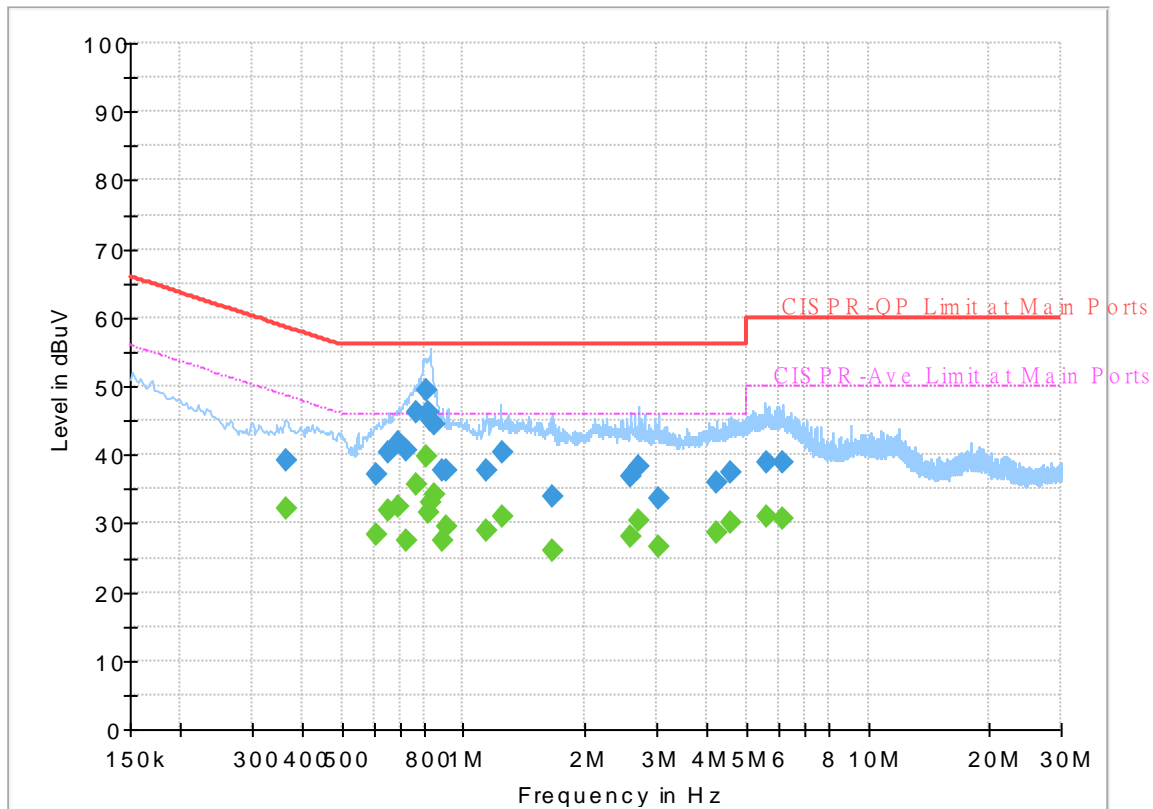

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.362760	---	32.24	48.67	16.43	L1	OFF	19.5
0.362760	39.04	---	58.67	19.63	L1	OFF	19.5
0.605850	---	28.39	46.00	17.61	L1	OFF	19.5
0.605850	37.13	---	56.00	18.87	L1	OFF	19.5
0.653280	---	31.95	46.00	14.05	L1	OFF	19.5
0.653280	40.45	---	56.00	15.55	L1	OFF	19.5
0.690360	---	32.38	46.00	13.62	L1	OFF	19.5
0.690360	41.72	---	56.00	14.28	L1	OFF	19.5
0.724920	---	27.57	46.00	18.43	L1	OFF	19.5
0.724920	40.57	---	56.00	15.43	L1	OFF	19.5
0.768750	---	35.80	46.00	10.20	L1	OFF	19.6
0.768750	46.25	---	56.00	9.75	L1	OFF	19.6
0.806280	---	39.87	46.00	6.13	L1	OFF	19.6
0.806280	49.47	---	56.00	6.53	L1	OFF	19.6
0.822750	---	31.45	46.00	14.55	L1	OFF	19.6
0.822750	46.09	---	56.00	9.91	L1	OFF	19.6
0.832560	---	33.01	46.00	12.99	L1	OFF	19.6
0.832560	45.05	---	56.00	10.95	L1	OFF	19.6
0.852000	---	34.26	46.00	11.74	L1	OFF	19.6
0.852000	44.51	---	56.00	11.49	L1	OFF	19.6
0.888360	---	27.45	46.00	18.55	L1	OFF	19.6

0.888360	37.77	---	56.00	18.23	L1	OFF	19.6
0.911400	---	29.63	46.00	16.37	L1	OFF	19.6
0.911400	37.87	---	56.00	18.13	L1	OFF	19.6
1.136220	---	29.05	46.00	16.95	L1	OFF	19.6
1.136220	37.71	---	56.00	18.29	L1	OFF	19.6
1.243500	---	30.99	46.00	15.01	L1	OFF	19.6
1.243500	40.44	---	56.00	15.56	L1	OFF	19.6
1.669740	---	25.95	46.00	20.05	L1	OFF	19.6
1.669740	33.97	---	56.00	22.03	L1	OFF	19.6
2.592510	---	28.08	46.00	17.92	L1	OFF	19.7
2.592510	36.93	---	56.00	19.07	L1	OFF	19.7
2.706000	---	30.46	46.00	15.54	L1	OFF	19.7
2.706000	38.44	---	56.00	17.56	L1	OFF	19.7
3.030000	---	26.61	46.00	19.39	L1	OFF	19.7
3.030000	33.66	---	56.00	22.34	L1	OFF	19.7
4.227000	---	28.73	46.00	17.27	L1	OFF	19.7
4.227000	35.88	---	56.00	20.12	L1	OFF	19.7
4.599870	---	30.15	46.00	15.85	L1	OFF	19.7
4.599870	37.30	---	56.00	18.70	L1	OFF	19.7
5.587620	---	31.06	50.00	18.94	L1	OFF	19.8
5.587620	38.75	---	60.00	21.25	L1	OFF	19.8
6.162000	---	30.71	50.00	19.29	L1	OFF	19.8
6.162000	38.94	---	60.00	21.06	L1	OFF	19.8

EUT Information

Report NO : 971035-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

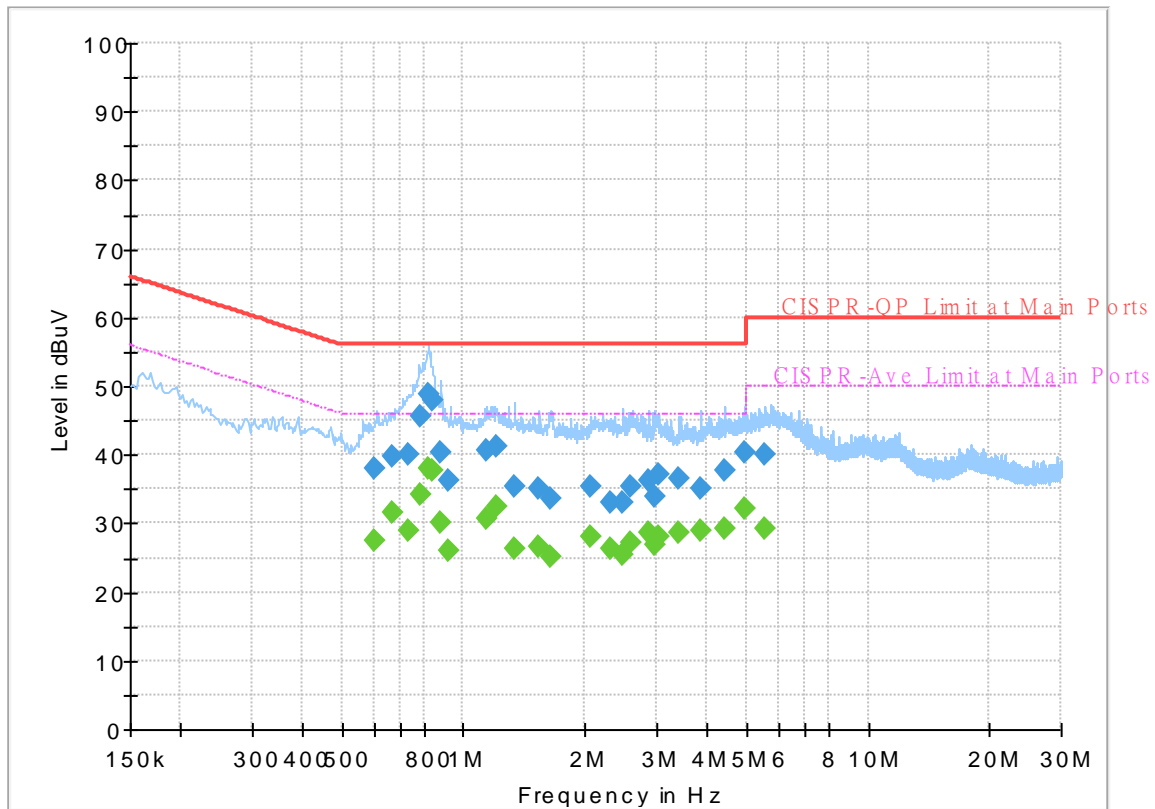

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.604500	---	27.47	46.00	18.53	N	OFF	19.6
0.604500	37.95	---	56.00	18.05	N	OFF	19.6
0.664440	---	31.50	46.00	14.50	N	OFF	19.6
0.664440	39.81	---	56.00	16.19	N	OFF	19.6
0.730770	---	28.93	46.00	17.07	N	OFF	19.6
0.730770	40.20	---	56.00	15.80	N	OFF	19.6
0.782250	---	34.32	46.00	11.68	N	OFF	19.6
0.782250	45.58	---	56.00	10.42	N	OFF	19.6
0.822750	---	37.98	46.00	8.02	N	OFF	19.6
0.822750	48.91	---	56.00	7.09	N	OFF	19.6
0.834000	---	37.70	46.00	8.30	N	OFF	19.6
0.834000	47.83	---	56.00	8.17	N	OFF	19.6
0.874500	---	30.21	46.00	15.79	N	OFF	19.6
0.874500	40.34	---	56.00	15.66	N	OFF	19.6
0.921750	---	25.96	46.00	20.04	N	OFF	19.6
0.921750	36.35	---	56.00	19.65	N	OFF	19.6
1.142250	---	30.60	46.00	15.40	N	OFF	19.6
1.142250	40.78	---	56.00	15.22	N	OFF	19.6
1.205250	---	32.58	46.00	13.42	N	OFF	19.6
1.205250	41.27	---	56.00	14.73	N	OFF	19.6
1.343310	---	26.28	46.00	19.72	N	OFF	19.6

1.343310	35.24	---	56.00	20.76	N	OFF	19.6
1.537530	---	26.75	46.00	19.25	N	OFF	19.6
1.537530	35.06	---	56.00	20.94	N	OFF	19.6
1.648500	---	25.02	46.00	20.98	N	OFF	19.6
1.648500	33.50	---	56.00	22.50	N	OFF	19.6
2.058720	---	27.93	46.00	18.07	N	OFF	19.6
2.058720	35.49	---	56.00	20.51	N	OFF	19.6
2.321250	---	26.21	46.00	19.79	N	OFF	19.6
2.321250	33.14	---	56.00	22.86	N	OFF	19.6
2.470650	---	25.48	46.00	20.52	N	OFF	19.6
2.470650	33.14	---	56.00	22.86	N	OFF	19.6
2.592780	---	27.21	46.00	18.79	N	OFF	19.6
2.592780	35.24	---	56.00	20.76	N	OFF	19.6
2.880780	---	28.67	46.00	17.33	N	OFF	19.6
2.880780	36.38	---	56.00	19.62	N	OFF	19.6
2.976270	---	26.80	46.00	19.20	N	OFF	19.7
2.976270	33.78	---	56.00	22.22	N	OFF	19.7
3.051600	---	28.06	46.00	17.94	N	OFF	19.7
3.051600	37.09	---	56.00	18.91	N	OFF	19.7
3.388290	---	28.57	46.00	17.43	N	OFF	19.7
3.388290	36.63	---	56.00	19.37	N	OFF	19.7
3.851250	---	28.93	46.00	17.07	N	OFF	19.7
3.851250	35.20	---	56.00	20.80	N	OFF	19.7
4.425000	---	29.16	46.00	16.84	N	OFF	19.7
4.425000	37.64	---	56.00	18.36	N	OFF	19.7
4.974990	---	32.09	46.00	13.91	N	OFF	19.8
4.974990	40.22	---	56.00	15.78	N	OFF	19.8
5.583750	---	29.31	50.00	20.69	N	OFF	19.8
5.583750	40.14	---	60.00	19.86	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Jack Cheng, Lance Chiang and Chuan Chu	Temperature :	20~24°C
		Relative Humidity :	50~56%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5603.2	57.11	-11.09	68.2	43.7	31.79	10.43	28.81	100	31	P	H	
		5698.4	68.74	-35.28	104.02	55.33	31.79	10.48	28.86	100	31	P	H	
		5720	75.62	-35.18	110.8	62.11	31.88	10.5	28.87	100	31	P	H	
		5723.4	80	-38.55	118.55	66.49	31.89	10.5	28.88	100	31	P	H	
	*	5745	112.7	-	-	99.1	31.98	10.51	28.89	100	31	P	H	
	*	5745	103.3	-	-	89.7	31.98	10.51	28.89	100	31	A	H	
														H
														H
			5646.8	57.17	-11.03	68.2	43.93	31.61	10.46	28.83	400	160	P	V
			5698.6	61.27	-42.9	104.17	47.86	31.79	10.48	28.86	400	160	P	V
			5719.6	67.66	-43.03	110.69	54.15	31.88	10.5	28.87	400	160	P	V
			5723.6	71.81	-47.2	119.01	58.3	31.89	10.5	28.88	400	160	P	V
	*	5745	108.2	-	-	94.6	31.98	10.51	28.89	400	160	P	V	
	*	5745	98.4	-	-	84.8	31.98	10.51	28.89	400	160	A	V	
														V
														V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5634.2	56.03	-12.17	68.2	42.75	31.66	10.45	28.83	107	33	P	H
		5698	58.65	-45.08	103.73	45.24	31.79	10.48	28.86	107	33	P	H
		5719.8	61.94	-48.8	110.74	48.43	31.88	10.5	28.87	107	33	P	H
		5723.8	64.3	-55.16	119.46	50.78	31.9	10.5	28.88	107	33	P	H
	*	5785	112.8	-	-	99.11	32.07	10.53	28.91	107	33	P	H
	*	5785	103.17	-	-	89.48	32.07	10.53	28.91	107	33	A	H
		5850.2	62.8	-58.94	121.74	48.96	32.2	10.59	28.95	107	33	P	H
		5855	61.13	-49.67	110.8	47.28	32.21	10.59	28.95	107	33	P	H
		5876.4	58.72	-45.44	104.16	44.82	32.25	10.61	28.96	107	33	P	H
		5946	57.74	-10.46	68.2	43.59	32.48	10.67	29	107	33	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5603.4	56.44	-11.76	68.2	43.03	31.79	10.43	28.81	399	176	P	V
		5661.8	56.17	-20.79	76.96	42.9	31.65	10.46	28.84	399	176	P	V
		5718	57.26	-52.98	110.24	43.77	31.87	10.49	28.87	399	176	P	V
		5723.8	57.73	-61.73	119.46	44.21	31.9	10.5	28.88	399	176	P	V
	*	5785	109.52	-	-	95.83	32.07	10.53	28.91	399	176	P	V
	*	5785	99.91	-	-	86.22	32.07	10.53	28.91	399	176	A	V
		5851.2	58.67	-60.79	119.46	44.83	32.2	10.59	28.95	399	176	P	V
		5860.8	58.37	-50.8	109.17	44.51	32.22	10.59	28.95	399	176	P	V
		5914.6	57.62	-18.25	75.87	43.6	32.36	10.64	28.98	399	176	P	V
		5943.8	57.44	-10.76	68.2	43.29	32.48	10.67	29	399	176	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	112.84	-	-	99.06	32.15	10.56	28.93	127	33	P	H	
	*	5825	103.23	-	-	89.45	32.15	10.56	28.93	127	33	A	H	
		5851	76.92	-43	119.92	63.08	32.2	10.59	28.95	127	33	P	H	
		5857.6	73.31	-36.76	110.07	59.45	32.22	10.59	28.95	127	33	P	H	
		5879.6	67.33	-34.45	101.78	53.42	32.26	10.61	28.96	127	33	P	H	
		5935.8	58.73	-9.47	68.2	44.62	32.44	10.66	28.99	127	33	P	H	
														H
														H
	*	5825	109.11	-	-	95.33	32.15	10.56	28.93	395	175	P	V	
	*	5825	99.44	-	-	85.66	32.15	10.56	28.93	395	175	A	V	
		5850	70.6	-51.6	122.2	56.76	32.2	10.59	28.95	395	175	P	V	
		5856.8	68.84	-41.46	110.3	54.99	32.21	10.59	28.95	395	175	P	V	
		5876.8	60.89	-42.97	103.86	46.99	32.25	10.61	28.96	395	175	P	V	
		5934	57.77	-10.43	68.2	43.66	32.44	10.66	28.99	395	175	P	V	
														V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		11490	44.91	-29.09	74	52.62	39.99	15.8	63.5	100	0	P	H	
		17235	48	-20.2	68.2	48.9	40.81	19.96	61.67	100	0	P	H	
													H	
													H	
			11490	43.78	-30.22	74	51.49	39.99	15.8	63.5	100	0	P	V
			17235	47.01	-21.19	68.2	47.91	40.81	19.96	61.67	100	0	P	V
														V
802.11a CH 157 5785MHz		11570	44.15	-29.85	74	52.07	39.72	15.86	63.5	100	0	P	H	
		17355	47.86	-20.34	68.2	47.85	41.39	20.12	61.5	100	0	P	H	
													H	
													H	
			11570	45.27	-28.73	74	53.19	39.72	15.86	63.5	100	0	P	V
			17355	47.6	-20.6	68.2	47.59	41.39	20.12	61.5	100	0	P	V
														V
802.11a CH 165 5825MHz		11650	44.51	-29.49	74	52.68	39.4	15.93	63.5	100	0	P	H	
		17475	47.18	-21.02	68.2	46.23	42	20.28	61.33	100	0	P	H	
													H	
													H	
			11650	44.92	-29.08	74	53.09	39.4	15.93	63.5	100	0	P	V
			17475	47.2	-21	68.2	46.25	42	20.28	61.33	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 149 5745MHz		5643.4	56.52	-11.68	68.2	43.27	31.63	10.45	28.83	111	34	P	H	
		5691.8	67.36	-31.79	99.15	53.97	31.77	10.48	28.86	111	34	P	H	
		5718.4	75.15	-35.2	110.35	61.65	31.87	10.5	28.87	111	34	P	H	
		5722.6	80.98	-35.75	116.73	67.46	31.89	10.5	28.87	111	34	P	H	
	*	5745	113.24	-	-	99.64	31.98	10.51	28.89	111	34	P	H	
	*	5745	102.8	-	-	89.2	31.98	10.51	28.89	111	34	A	H	
														H
														H
			5601.6	55.78	-12.42	68.2	42.37	31.79	10.43	28.81	400	120	P	V
			5699	60.66	-43.8	104.46	47.24	31.8	10.48	28.86	400	120	P	V
			5717.6	69.57	-40.56	110.13	56.08	31.87	10.49	28.87	400	120	P	V
			5724.2	74.66	-45.72	120.38	61.14	31.9	10.5	28.88	400	120	P	V
	*		5745	109.23	-	-	95.63	31.98	10.51	28.89	400	120	P	V
	*		5745	98.8	-	-	85.2	31.98	10.51	28.89	400	120	A	V
														V
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5630.2	56.34	-11.86	68.2	43.03	31.68	10.45	28.82	101	41	P	H
		5699.8	57.75	-47.3	105.05	44.33	31.8	10.48	28.86	101	41	P	H
		5719.8	62.07	-48.67	110.74	48.56	31.88	10.5	28.87	101	41	P	H
		5723.4	65.69	-52.86	118.55	52.18	31.89	10.5	28.88	101	41	P	H
	*	5785	113.16	-	-	99.47	32.07	10.53	28.91	101	41	P	H
	*	5785	102.27	-	-	88.58	32.07	10.53	28.91	101	41	A	H
		5853.4	61.18	-53.27	114.45	47.33	32.21	10.59	28.95	101	41	P	H
		5856.8	60.74	-49.56	110.3	46.89	32.21	10.59	28.95	101	41	P	H
		5911.2	58.28	-20.1	78.38	44.28	32.34	10.64	28.98	101	41	P	H
		5932.2	58.44	-9.76	68.2	44.34	32.43	10.66	28.99	101	41	P	H
802.11n													H
HT20													H
CH 157		5613.4	56.26	-11.94	68.2	42.88	31.75	10.44	28.81	400	168	P	V
5785MHz		5667.6	56.75	-24.51	81.26	43.45	31.67	10.47	28.84	400	168	P	V
		5719.4	60.06	-50.57	110.63	46.55	31.88	10.5	28.87	400	168	P	V
		5724.6	58.69	-62.6	121.29	45.17	31.9	10.5	28.88	400	168	P	V
	*	5785	111.1	-	-	97.41	32.07	10.53	28.91	400	168	P	V
	*	5785	99.78	-	-	86.09	32.07	10.53	28.91	400	168	A	V
		5851	57.39	-62.53	119.92	43.55	32.2	10.59	28.95	400	168	P	V
		5858	57.48	-52.48	109.96	43.62	32.22	10.59	28.95	400	168	P	V
		5876.4	57.73	-46.43	104.16	43.83	32.25	10.61	28.96	400	168	P	V
		5933.2	57.78	-10.42	68.2	43.68	32.43	10.66	28.99	400	168	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz	*	5825	112.61	-	-	98.83	32.15	10.56	28.93	100	36	P	H	
	*	5825	102.3	-	-	88.52	32.15	10.56	28.93	100	36	A	H	
		5850.6	73.24	-47.59	120.83	59.4	32.2	10.59	28.95	100	36	P	H	
		5855.6	70.96	-39.67	110.63	57.11	32.21	10.59	28.95	100	36	P	H	
		5875.2	66.75	-38.3	105.05	52.85	32.25	10.61	28.96	100	36	P	H	
		5928.4	58.31	-9.89	68.2	44.23	32.41	10.66	28.99	100	36	P	H	
														H
														H
	*	5825	110.69	-	-	96.91	32.15	10.56	28.93	392	168	P	V	
	*	5825	99.38	-	-	85.6	32.15	10.56	28.93	392	168	A	V	
		5853.2	70.21	-44.69	114.9	56.36	32.21	10.59	28.95	392	168	P	V	
		5858.8	68.95	-40.78	109.73	55.09	32.22	10.59	28.95	392	168	P	V	
		5876.4	62.75	-41.41	104.16	48.85	32.25	10.61	28.96	392	168	P	V	
		5926.2	57.78	-10.42	68.2	43.72	32.4	10.65	28.99	392	168	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	45.35	-28.65	74	53.06	39.99	15.8	63.5	100	0	P	H
		17235	48.38	-19.82	68.2	49.28	40.81	19.96	61.67	100	0	P	H
													H
													H
		11490	44.72	-29.28	74	52.43	39.99	15.8	63.5	100	0	P	V
		17235	47.48	-20.72	68.2	48.38	40.81	19.96	61.67	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	44.24	-29.76	74	52.16	39.72	15.86	63.5	100	0	P	H
		17355	47.48	-20.72	68.2	47.47	41.39	20.12	61.5	100	0	P	H
													H
													H
		11570	44.33	-29.67	74	52.25	39.72	15.86	63.5	100	0	P	V
		17355	47.42	-20.78	68.2	47.41	41.39	20.12	61.5	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	44.6	-29.4	74	52.77	39.4	15.93	63.5	100	0	P	H
		17475	46.32	-21.88	68.2	45.37	42	20.28	61.33	100	0	P	H
													H
													H
		11650	44.73	-29.27	74	52.9	39.4	15.93	63.5	100	0	P	V
		17475	46.69	-21.51	68.2	45.74	42	20.28	61.33	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5648.8	58.36	-9.84	68.2	45.13	31.6	10.46	28.83	122	31	P	H
		5699.6	66.52	-38.39	104.91	53.1	31.8	10.48	28.86	122	31	P	H
		5718.4	75.75	-34.6	110.35	62.25	31.87	10.5	28.87	122	31	P	H
		5724.4	77.16	-43.67	120.83	63.64	31.9	10.5	28.88	122	31	P	H
	*	5755	108.76	-	-	95.12	32.01	10.52	28.89	122	31	P	H
	*	5755	98.69	-	-	85.05	32.01	10.52	28.89	122	31	A	H
		5851	58.06	-61.86	119.92	44.22	32.2	10.59	28.95	122	31	P	H
		5861.6	58.42	-50.53	108.95	44.55	32.22	10.6	28.95	122	31	P	H
		5893.6	58.42	-32.98	91.4	44.48	32.29	10.62	28.97	122	31	P	H
		5929.4	57.58	-10.62	68.2	43.49	32.42	10.66	28.99	122	31	P	H
802.11n													H
HT40													H
CH 151		5627.8	56.8	-11.4	68.2	43.48	31.69	10.45	28.82	384	168	P	V
5755MHz		5693.8	59.46	-41.17	100.63	46.06	31.78	10.48	28.86	384	168	P	V
		5720	68.86	-41.94	110.8	55.35	31.88	10.5	28.87	384	168	P	V
		5725	71.36	-50.84	122.2	57.84	31.9	10.5	28.88	384	168	P	V
	*	5755	105.32	-	-	91.68	32.01	10.52	28.89	384	168	P	V
	*	5755	95.1	-	-	81.46	32.01	10.52	28.89	384	168	A	V
		5853.8	56.99	-56.55	113.54	43.14	32.21	10.59	28.95	384	168	P	V
		5873.2	57.15	-48.55	105.7	43.25	32.25	10.61	28.96	384	168	P	V
		5893.4	57.55	-34	91.55	43.61	32.29	10.62	28.97	384	168	P	V
		5945	58.01	-10.19	68.2	43.86	32.48	10.67	29	384	168	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5620	56.41	-11.79	68.2	43.07	31.72	10.44	28.82	109	33	P	H
		5700	64.16	-41.04	105.2	50.73	31.8	10.49	28.86	109	33	P	H
		5718.8	67.25	-43.21	110.46	53.74	31.88	10.5	28.87	109	33	P	H
		5720.2	65.44	-45.82	111.26	51.93	31.88	10.5	28.87	109	33	P	H
	*	5795	108.18	-	-	94.47	32.09	10.54	28.92	109	33	P	H
	*	5795	98.13	-	-	84.42	32.09	10.54	28.92	109	33	A	H
		5851	67.88	-52.04	119.92	54.04	32.2	10.59	28.95	109	33	P	H
		5855	67.22	-43.58	110.8	53.37	32.21	10.59	28.95	109	33	P	H
		5878	64.33	-38.64	102.97	50.42	32.26	10.61	28.96	109	33	P	H
		5931.8	57.86	-10.34	68.2	43.76	32.43	10.66	28.99	109	33	P	H
802.11n													H
HT40													H
CH 159		5647.8	56.3	-11.9	68.2	43.06	31.61	10.46	28.83	399	168	P	V
5795MHz		5699.4	60.13	-44.63	104.76	46.71	31.8	10.48	28.86	399	168	P	V
		5718.8	61.53	-48.93	110.46	48.02	31.88	10.5	28.87	399	168	P	V
		5720	59.33	-51.47	110.8	45.82	31.88	10.5	28.87	399	168	P	V
	*	5795	104.19	-	-	90.48	32.09	10.54	28.92	399	168	P	V
	*	5795	94.65	-	-	80.94	32.09	10.54	28.92	399	168	A	V
		5851.4	61.34	-57.67	119.01	47.5	32.2	10.59	28.95	399	168	P	V
		5858.8	60.01	-49.72	109.73	46.15	32.22	10.59	28.95	399	168	P	V
		5878.4	59.44	-43.23	102.67	45.53	32.26	10.61	28.96	399	168	P	V
		5936.6	58.58	-9.62	68.2	44.46	32.45	10.66	28.99	399	168	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	43.71	-30.29	74	51.44	39.96	15.81	63.5	100	0	P	H
		17265	46.66	-21.54	68.2	47.39	40.9	20	61.63	100	0	P	H
													H
													H
		11510	44.27	-29.73	74	52	39.96	15.81	63.5	100	0	P	V
		17265	47.16	-21.04	68.2	47.89	40.9	20	61.63	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	43.8	-30.2	74	51.78	39.64	15.88	63.5	100	0	P	H
		17385	45.89	-22.31	68.2	45.59	41.6	20.16	61.46	100	0	P	H
													H
													H
		11590	43.39	-30.61	74	51.37	39.64	15.88	63.5	100	0	P	V
		17385	45.63	-22.57	68.2	45.33	41.6	20.16	61.46	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5649.2	63.71	-4.49	68.2	50.48	31.6	10.46	28.83	107	34	P	H
		5699.4	72.75	-32.01	104.76	59.33	31.8	10.48	28.86	107	34	P	H
		5704.8	74.3	-32.25	106.55	60.85	31.82	10.49	28.86	107	34	P	H
		5721.8	73.73	-41.17	114.9	60.21	31.89	10.5	28.87	107	34	P	H
	*	5775	105.35	-	-	91.67	32.05	10.53	28.9	107	34	P	H
	*	5775	96.24	-	-	82.56	32.05	10.53	28.9	107	34	A	H
		5851.2	67.67	-51.79	119.46	53.83	32.2	10.59	28.95	107	34	P	H
		5858.2	66.93	-42.97	109.9	53.07	32.22	10.59	28.95	107	34	P	H
		5884.8	63.55	-34.37	97.92	49.63	32.27	10.62	28.97	107	34	P	H
		5930.2	61.39	-6.81	68.2	47.3	32.42	10.66	28.99	107	34	P	H
802.11ac													H
VHT80													H
CH 155		5647.4	59.71	-8.49	68.2	46.47	31.61	10.46	28.83	400	176	P	V
5775MHz		5698.6	63.64	-40.53	104.17	50.23	31.79	10.48	28.86	400	176	P	V
		5719.4	66.35	-44.28	110.63	52.84	31.88	10.5	28.87	400	176	P	V
		5723.8	67.23	-52.23	119.46	53.71	31.9	10.5	28.88	400	176	P	V
	*	5775	102.46	-	-	88.78	32.05	10.53	28.9	400	176	P	V
	*	5775	93.33	-	-	79.65	32.05	10.53	28.9	400	176	A	V
		5850.2	61.93	-59.81	121.74	48.09	32.2	10.59	28.95	400	176	P	V
		5860	60.02	-49.38	109.4	46.16	32.22	10.59	28.95	400	176	P	V
		5898.6	59.81	-27.89	87.7	45.85	32.3	10.63	28.97	400	176	P	V
		5928	59.63	-8.57	68.2	45.55	32.41	10.66	28.99	400	176	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	43.77	-30.23	74	51.62	39.8	15.85	63.5	100	0	P	H	
		17325	46.89	-21.31	68.2	47.19	41.17	20.07	61.54	100	0	P	H	
													H	
													H	
			11550	43.89	-30.11	74	51.74	39.8	15.85	63.5	100	0	P	V
			17325	45.76	-22.44	68.2	46.06	41.17	20.07	61.54	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11ac VHT80 LF		62.01	30.01	-9.99	40	47.7	11.61	1.16	30.46	-	-	P	H	
		204.6	29.11	-14.39	43.5	42.35	15.07	2	30.31	-	-	P	H	
		218.18	29.5	-16.5	46	42.68	15.08	2.03	30.29	-	-	P	H	
		666.32	36.86	-9.14	46	36.45	26.23	3.74	29.56	100	0	P	H	
		870.99	34.4	-11.6	46	30.14	29.02	4.42	29.18	-	-	P	H	
		956.35	35.97	-10.03	46	29.45	30.81	4.69	28.98	-	-	P	H	
														H
														H
														H
														H
														H
														H
			32.91	30.26	-9.74	40	36.64	22.97	0.88	30.23	-	-	P	V
			215.27	25.39	-18.11	43.5	38.78	14.87	2.03	30.29	-	-	P	V
			663.41	37.6	-8.4	46	37.2	26.23	3.73	29.56	100	0	P	V
			764.29	33.15	-12.85	46	30.32	28.11	4.09	29.37	-	-	P	V
			858.38	34.97	-11.03	46	30.72	29.06	4.39	29.2	-	-	P	V
			956.35	35.87	-10.13	46	29.35	30.81	4.69	28.98	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jack Cheng, Lance Chiang and Chuan Chu	Temperature :	20~24°C
		Relative Humidity :	50~56%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-1HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-1HY Condition : PEAK(UNL) 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>


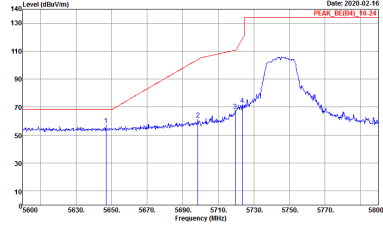
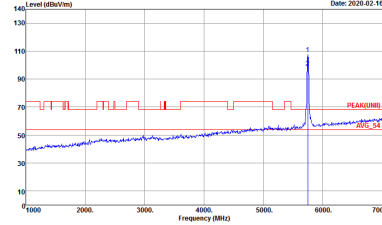


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_SEC04_16-24 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH2-HY Condition : PEAK_UNIT_3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH2-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH2-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>
Peak	<p>Site : 03CH2-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	Left blank

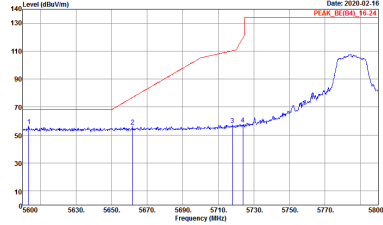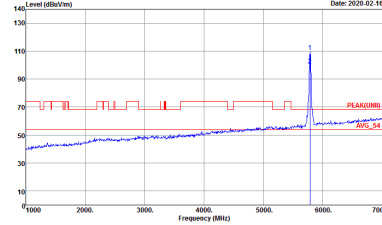
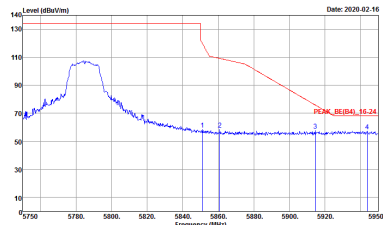


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	Left blank

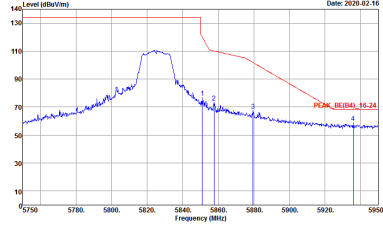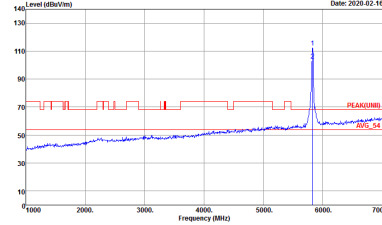

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_SEC04_16-24 3m HORN_91200_1338 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH2-HY Condition : PEAK_UNIT1 3m HORN_91200_1338 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>

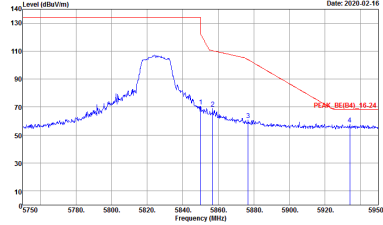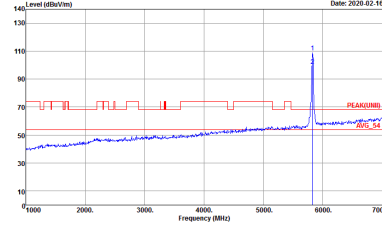



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_SEC04_16-24 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH2-HY Condition : PEAK_UNIT_3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 2 columns: Horizontal and Fundamental. Includes spectral plots and technical details like Site, Condition, Detector, Project, and Setting.


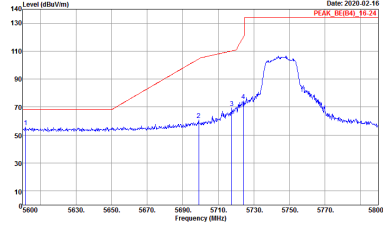
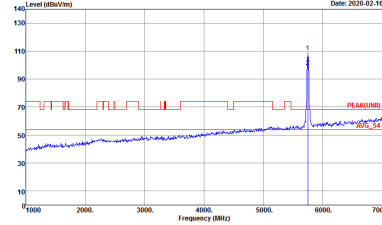


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_SEC04_16-24 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH2-HY Condition : PEAK_UNIT_3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	Left blank

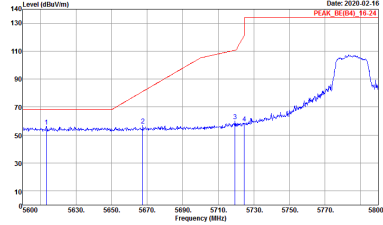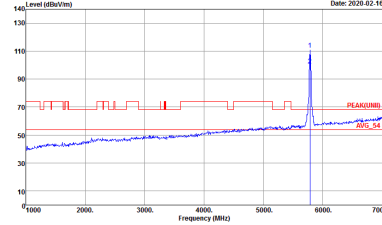
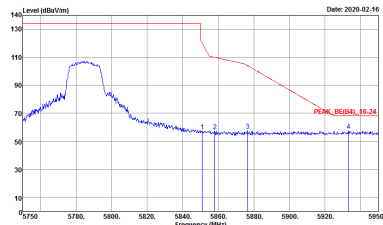


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 17</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH2-HY Condition : PEAK_SEC04)_16-24 3m HORN_ 91200_ 1338 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH2-HY Condition : PEAK(UNIT) 3m HORN_ 91200_ 1338 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>

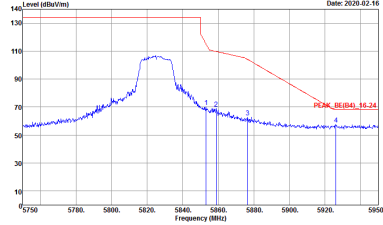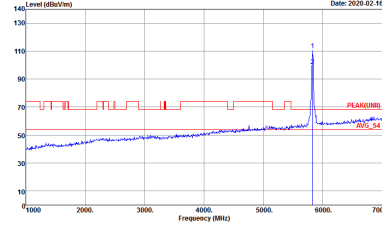

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH2-HY Condition : PEAK_8E(B4)_16-24 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH2-HY Condition : PEAK(UNIT) 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	<p>Site : 03CH12-HY Condition : PEAK(LINE) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	Left blank

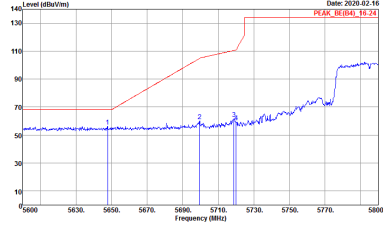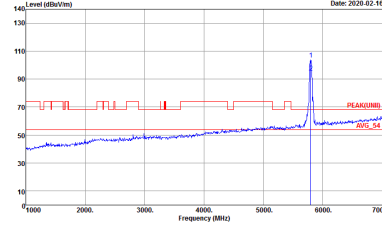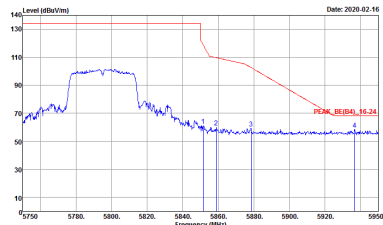




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>
<p>Peak</p>	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 14</p>	<p>Left blank</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 15</p>	<p>Site : 03CH12-HY Condition : PEAK(FUN1) 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 15</p>
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 971035-01 Setting : 15</p>	Left blank

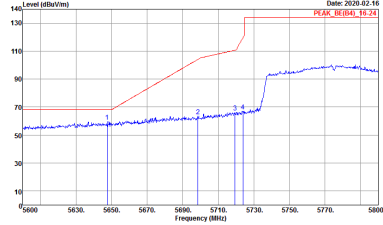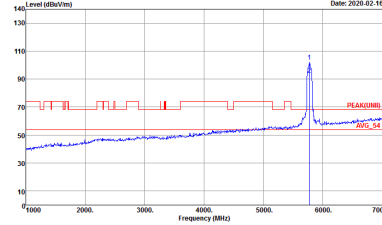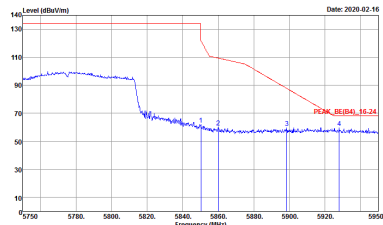

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 15</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 15</p>
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 15</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_91200_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_91200_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	<p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>

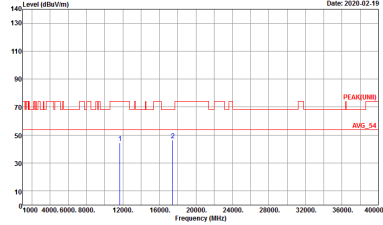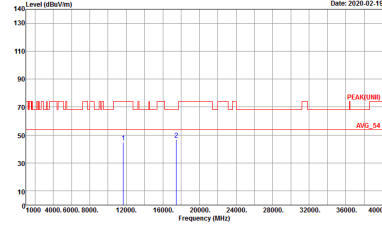



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 17</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 17</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 14</p>	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 14</p>

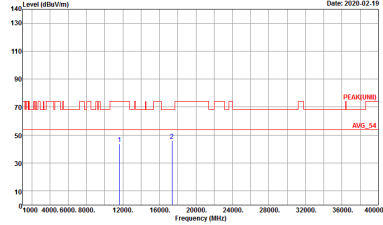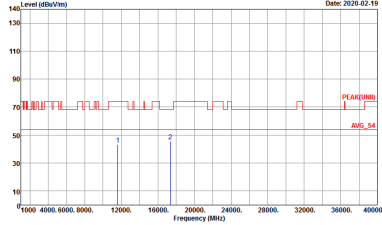

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 14</p>	 <p>Site : 03CH12-HY Condition : PEAK(UNIT) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 14</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 15</p>	<p>Site : 03CH12-1HY Condition : PEAK(UNII) 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 971035-01 Setting : 15</p>



**Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)**

WIFI	5GHz 5725-5850MHz	
ANT	802.11ac VHT80 LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH12-4Y Condition : QP 3m BIL06_6111D_37059 HORIZONTAL Detector : Peak Project : 971035-01 Setting : 15</p>	<p>Site : 03CH12-4Y Condition : QP 3m BIL05_6111D_37059 VERTICAL Detector : Peak Project : 971035-01 Setting : 15</p>




Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	91.59	1415	0.71	1kHz	0.38
5GHz 802.11n HT20	91.35	1320	0.76	1kHz	0.39
5GHz 802.11n HT40	84.79	652	1.53	3kHz	0.72
5GHz 802.11ac VHT80	74.55	328	3.05	10kHz	1.28




802.11a

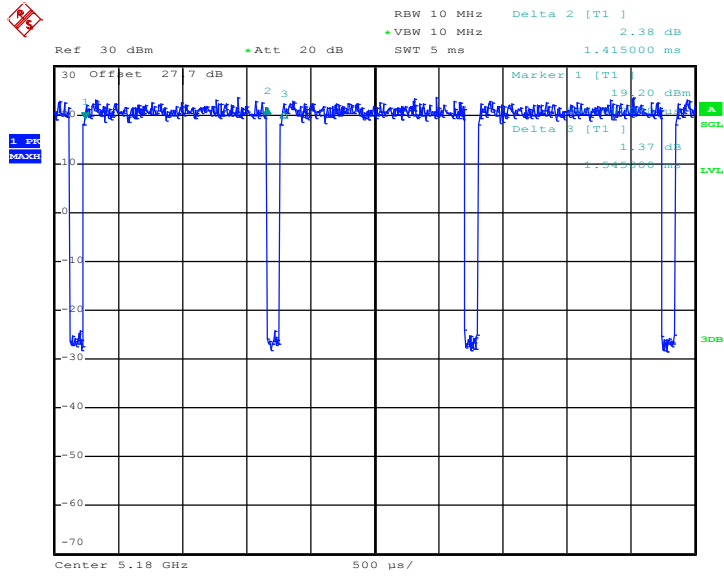

Date: 4.JAN.2003 06:02:26


802.11n HT20

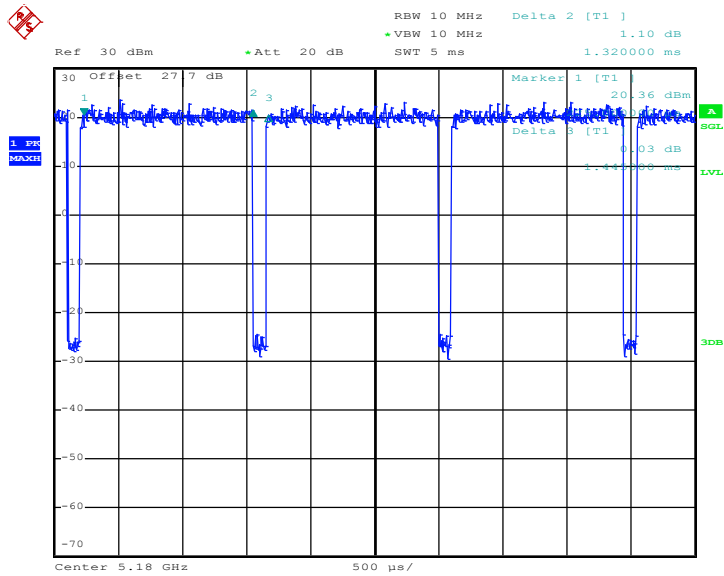

Date: 4.JAN.2003 06:04:21




802.11n HT40

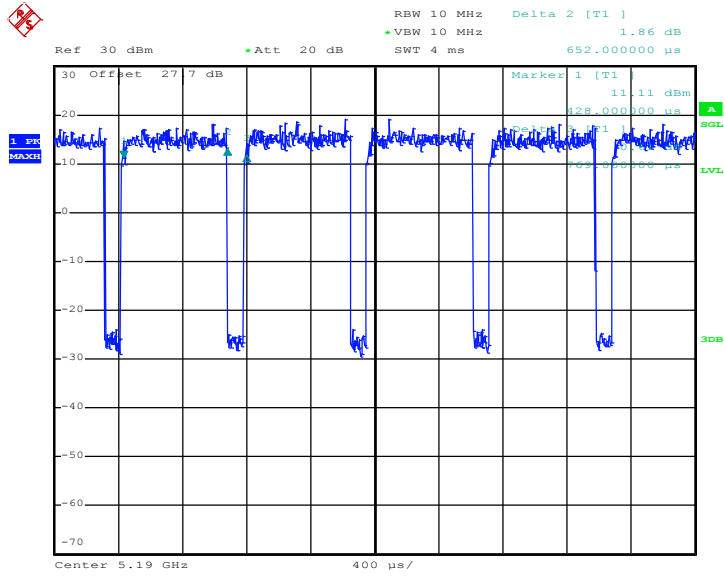

Date: 4.JAN.2003 06:08:12

802.11ac VHT80

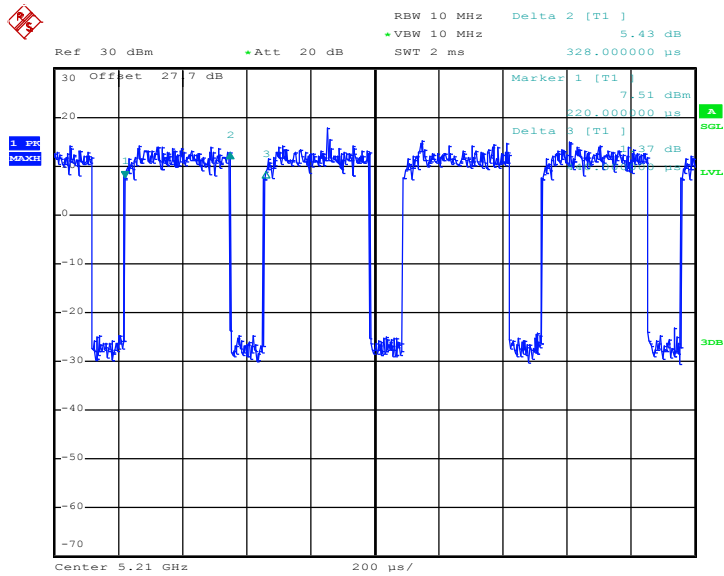

Date: 4.JAN.2003 06:13:55

—THE END—