

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Google Inc.
Applicant Address	1600 Amphitheater Parkway, Mountain View, CA 94043
FCC ID	A4RNLS-1304-25
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

Product Name	Dual band WiFi Router
Brand Name	Google
Model Name	NLS-1304-25
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Sep. 14, 2016
Final Test Date	Oct. 11, 2016
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth BR/EDR of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013**, **DA-00705** and

47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





Table of Contents

1.`	VERIFI	ICATION OF COMPLIANCE	1
2.	SUMN	/ARY OF THE TEST RESULT	2
3.	GENE	RAL INFORMATION	3
	3.1.	Product Details	3
	3.2.	Accessories	3
	3.3.	Table for Filed Antenna	4
	3.4.	Table for Carrier Frequencies	4
	3.5.	Table for Test Modes	5
	3.6.	Table for Testing Locations	
	3.7.	Table for Multiple source Listing	6
	3.8.	Table for Supporting Units	7
	3.9.	Table for Parameters of Test Software Setting	8
	3.10.	EUT Operation during Test	8
	3.11.	Duty Cycle	8
	3.12.	Test Configurations	9
4 . '	test r	RESULT	.12
	4.1.	AC Power Line Conducted Emissions Measurement	12
	4.2.	Maximum Conducted Output Power Measurement	18
	4.3.	Hopping Channel Separation Measurement	20
	4.4.	Number of Hopping Frequency Measurement	31
	4.5.	Dwell Time Measurement	33
	4.6.	Radiated Emissions Measurement	40
	4.7.	Emissions Measurement	55
	4.8.	Antenna Requirements	73
5.	list o	OF MEASURING EQUIPMENTS	. 74
6.	MEAS		75
AP	PEND	IX A. TEST PHOTOS A1 \sim	A4



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR690910AC	Rev. 01	Initial issue of report	Oct. 24, 2016
	1		



Project No: CB10510078

1. VERIFICATION OF COMPLIANCE

Product Name	:	Dual band WiFi Router
Brand Name	:	Google
Model No.	:	NLS-1304-25
Applicant	:	Google Inc.
Test Rule Part(s)	:	47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 14, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Im

Sam Chen SPORTON INTERNATIONAL INC.



2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C							
Part	Part Rule Section Description of Test						
4.1	15.207	AC Power Line Conducted Emissions	Complies				
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies				
4.3	15.247(a)(1)	Hopping Channel Separation	Complies				
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies				
4.5	15.247(a)(1)	Dwell Time	Complies				
4.6	15.247(d)	Radiated Emissions	Complies				
4.7	15.247(d)	Band Edge Emissions	Complies				
4.8	15.203	Antenna Requirements	Complies				



3. GENERAL INFORMATION

3.1. Product Details

Items	Description			
Power Type	From power adapter			
Modulation	FHSS (GFSK / π/4-DQPSK / 8DPSK)			
Data Rate (Mbps)	GFSK: 1 ; <i>π</i> /4-DQPSK: 2 ; 8DPSK: 3			
Frequency Range	2402 ~ 2480MHz			
Channel Number	79			
Channel Bandwidth (99%)	BR (GFSK) 1 Mbps: 0.8769 MHz			
	EDR (π/4-DQPSK) 2 Mbps: 1.1840 MHz			
	EDR (8DPSK) 3 Mbps: 1.1900 MHz			
Maximum Conducted Peak Output	BR (GFSK) 1 Mbps: 7.68 dBm			
Power	EDR (π /4-DQPSK) 2 Mbps: 9.79 dBm			
	EDR (8DPSK) 3 Mbps: 10.32 dBm			
Maximum Conducted Average	BR (GFSK) 1 Mbps: 7.52 dBm			
Output Power	EDR (π/4-DQPSK) 2 Mbps: 7.59 dBm			
	EDR (8DPSK) 3 Mbps: 7.61 dBm			
Carrier Frequencies	Please refer to section 3.4			
Antenna	Please refer to section 3.3			
Note 1: Bluetooth BR uses a combination	on of GFSK (1Mbps).			
Note 2: Bluetooth EDR uses a combina	tion of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).			

3.2. Accessories

Power	Brand	Model	Rating				
Adaptor	Salcomp	GL0102	Input: 100-240V~50/60Hz, 0.4A				
Adapter	Salcomp	GLUTUZ	Output: 5V, 3A				
	Other						
RJ-45 cable*1, Non-shielded, 2m							



3.3. Table for Filed Antenna

	Ch	ain						Gain	(dBi)			
Ant.	2.4 GHz	5 GHz	Brand	Model No.		Antenna Type	Connector	2.4 GHz	5 GHz	BT	Zigbee	Remark
1	1	2	WNC	N/A	LG material	I-PEX	3.72	4.86	-	-	TX/RX	
2	2	-	WNC	N/A	LG material	I-PEX	3.72	-	-	-	TX/RX	
3	-	1	WNC	N/A	LG material	I-PEX	-	4.86	-	-	TX/RX	
4	3	3	WNC	N/A	LG material	I-PEX	-	4.86	-	2.89	For Zigbee TX/RX.	
4	3	3	WINC	IN/A	Le malenai	IFEA					For 5GHz only RX.	
5	4	-	WNC	N/A	LG material	I-PEX	-	-	5.84	-	TX/RX	

Note: The EUT has five antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n/ac mode (2TX/2RX):

Chain.1 and Chain.2 can be used as transmitting/receiving antenna.

Chain.1 and Chain.2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (2TX/3RX):

Chain.1 and Chain.2 can be use as transmitting antenna.

Chain 1 and chain 2 can transmitting simultaneously.

Chain 1, Chain 2 and Chain 3 can be used as receiving antennas.

Chain 1, Chain 2 and Chain 3 could receive simultaneously.

For Zigbee function:

Only Chain.3 can be used as transmitting/receiving antenna.

For Bluetooth function:

Only Chain.4 can be used as transmitting/receiving antenna.

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
2400~2483.5MHz	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-



3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	BR (GFSK)	1 Mbps	0/39/78	4
	EDR (π/4-DQPSK)	2 Mbps	0/39/78	4
	EDR (8DPSK)	3 Mbps	0/39/78	4
Hopping Channel Separation	BR (GFSK)	1 Mbps	0~1	4
			39~40	
			77~78	
	EDR (π/4-DQPSK)	2 Mbps	0~1	4
			39~40	
			77~78	
	EDR (8DPSK)	3 Mbps	0~1	4
			39~40	
			77~78	
Number of Hopping Frequency	EDR (8DPSK)	3 Mbps	0~78	4
Dwell Time	BR (GFSK)	1 Mbps	0/39/78	4
	(DH1, DH3, DH5)			
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	BR (GFSK)	1 Mbps	0/39/78	4
	EDR (8DPSK)	3 Mbps	0/39/78	4
Band Edge Emissions	BR (GFSK)	1 Mbps	0/39/78	4
	EDR (8DPSK)	3 Mbps	0/39/78	4

Note1: The EUT can be used at Z-axis only.

The following test modes were performed for all tests:

For Conducted Emission test:

- Mode 1. Normal Link Main Source
- Mode 2. Normal Link Second Source

Both modes were record in this test report

Note2: There two source for the EUT. It has influence for Conducted Emission and Radiated Emission (Below 1GHz). Thus both sources were tested. It has no influence for the others test and the EUT with main source was selected to test.



For Radiated Emission test (Below 1GHz):

Mode 1. Normal Link - Main Source

Mode 2. Normal Link – Second Source

Both modes were record in this test report

For Radiated Emission test (Above 1GHz):

Mode 1. CTX - Main Source

For Co-location MPE Test:

The EUT could be applied with 2.4GHz/5GHz WLAN function, Zigbee function and Bluetooth function; therefore Co-location Maximum Permissible Exposure (Please refer to FA690910) tests is added for simultaneously transmit among 2.4GHz/5GHz WLAN function, Zigbee function and Bluetooth function.

3.6. Table for Testing Locations

Test Site Location										
Address:	No.	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.								
TEL:	886	5-3-656-9065								
FAX:	886	886-3-656-9085								
Test Site No.		Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No				
03CH01-CB		SAC	Hsin Chu	TW0006	IC 4086D	-				
CO01-CB		CO01-CB Conduction		TW0006	IC 4086D	-				
TH01-CB		OVEN Room	Hsin Chu	-	-	-				

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple source Listing

There two sources for PHY.

Source	Model Name
Main source	QCA8072
Second source	QCA8075



3.8. Table for Supporting Units

For Test Site No: 03CH01-CB / <Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
NB*2	Apple	Mac Book	DoC
iPad	Apple	A1430	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
iPad	Apple	A1430	DoC

For Test Site No: TH01-CB and 03CH01-CB / <Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC



3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product. **Power Parameters of Bluetooth**

For BR (GFSK) 1 Mbps:

Test Software Version	Putty		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	8	8	8

For EDR (π /4-DQPSK) 2 Mbps:

Test Software Version	Putty		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	8	8	8

For EDR (8DPSK) 3 Mbps:

Test Software Version	Putty			
Frequency	2402 MHz 2441 MHz 2480 MHz			
Power Parameters	8	8	8	

3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
BR (GFSK)	2.899	3.754	77.22%	1.12	0.34
EDR (π/4-DQPSK)	2.913	3.754	77.61%	1.10	0.34
EDR (8DPSK)	2.841	3.754	75.68%	1.21	0.35



3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Test Configuration

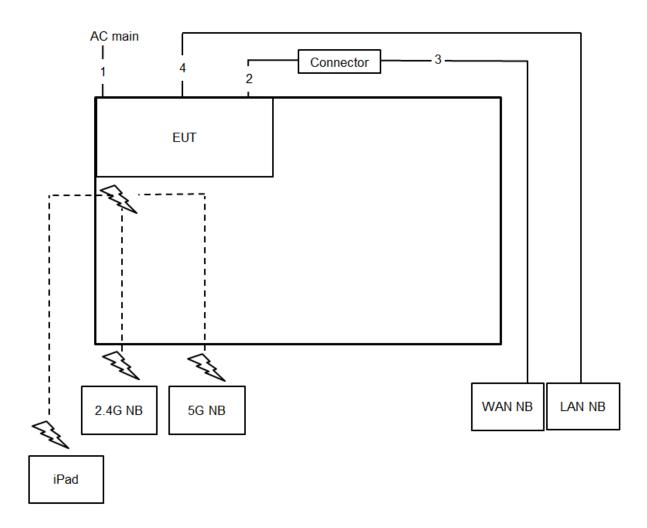


ltem	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	2m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m



3.12.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

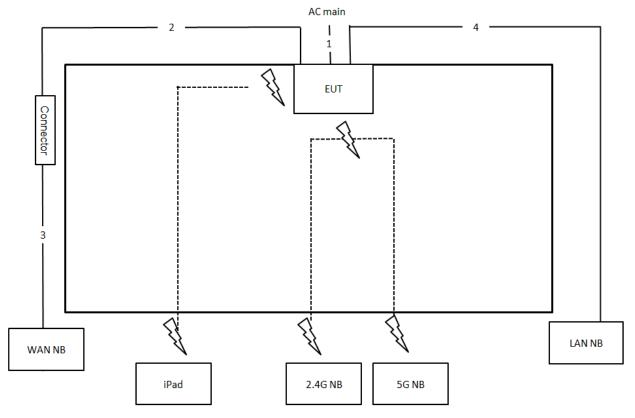

ltem	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	2m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m



Test Configuration: above 1GHz

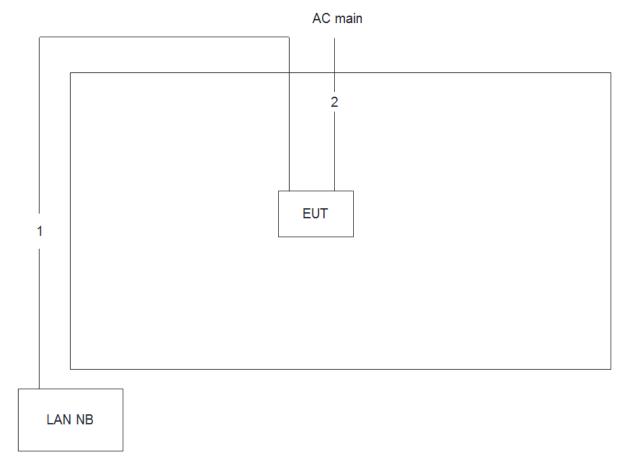

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m





4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

- 1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- 4. The frequency range from 150 kHz to 30 MHz was searched.
- 5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6. The measurement has to be done between each power line and ground at the power terminal.



4.1.4. Test Setup Layout

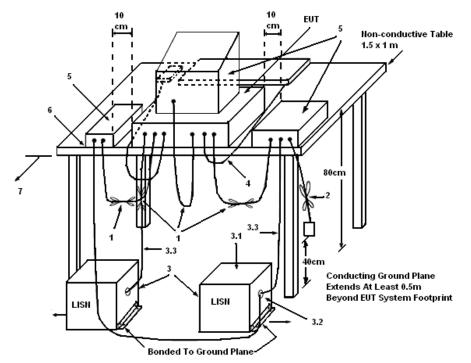

LEGEND:

(1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

(2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

(3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.

- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

(7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test


The EUT was placed on the test table and programmed in normal function.



4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22° C	Humidity	52%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

Line

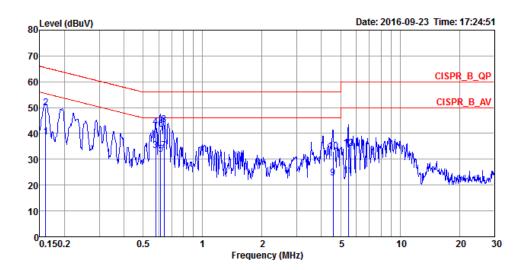


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		·
1	0.1607	38.62	-16.81	55.43	28.43	10.02	0.17	LINE	Average
2	0.1607	49.99	-15.44	65.43	39.80	10.02	0.17	LINE	QP
3	0.5792	33.25	-12.75	46.00	23.02	9.93	0.30	LINE	Average
4	0.5792	42.38	-13.62	56.00	32.15	9.93	0.30	LINE	QP
5	0.6140	31.77	-14.23	46.00	21.49	9.93	0.35	LINE	Average
6	0.6140	41.62	-14.38	56.00	31.34	9.93	0.35	LINE	QP
7	0.6372	33.33	-12.67	46.00	23.02	9.93	0.38	LINE	Average
8	0.6372	43.48	-12.52	56.00	33.17	9.93	0.38	LINE	QP
9	4.5736	22.63	-23.37	46.00	12.52	10.01	0.10	LINE	Average
10	4.5736	33.01	-22.99	56.00	22.90	10.01	0.10	LINE	QP
11	5.4763	23.62	-26.38	50.00	13.48	10.03	0.11	LINE	Average
12	5.4763	34.34	-25.66	60.00	24.20	10.03	0.11	LINE	QP



Temperature	22 °C	Humidity	52%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1

Neutral

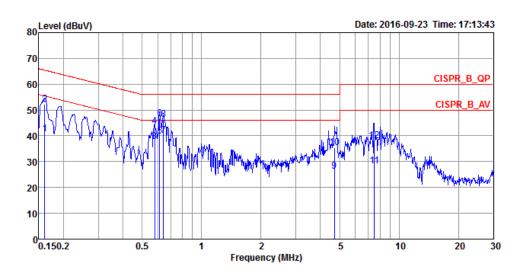


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1607	40.66	-14.77	55.43	30.47	10.02	0.17	NEUTRAL	Average
2	0.1607	52.36	-13.07	65.43	42.17	10.02	0.17	NEUTRAL	QP
3	0.5792	37.75	-8.25	46.00	27.52	9.93	0.30	NEUTRAL	Average
4	0.5792	43.82	-12.18	56.00	33.59	9.93	0.30	NEUTRAL	QP
5	0.6140	39.77	-6.23	46.00	29.49	9.93	0.35	NEUTRAL	Average
6	0.6140	46.51	-9.49	56.00	36.23	9.93	0.35	NEUTRAL	QP
7	0.6406	40.21	-5.79	46.00	29.90	9.93	0.38	NEUTRAL	Average
8	0.6406	46.33	-9.67	56.00	36.02	9.93	0.38	NEUTRAL	QP
9	4.6964	26.14	-19.86	46.00	16.03	10.01	0.10	NEUTRAL	Average
10	4.6964	35.34	-20.66	56.00	25.23	10.01	0.10	NEUTRAL	QP
11	7.4860	28.44	-21.56	50.00	18.23	10.08	0.13	NEUTRAL	Average
12	7.4860	38.05	-21.95	60.00	27.84	10.08	0.13	NEUTRAL	QP

Note: Level = Read Level + LISN Factor + Cable Loss.



Temperature	22° C	Humidity	52%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

Line

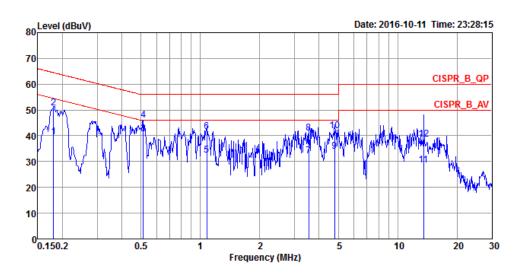


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1806		-14.95	54.46	29.38	9.95		Average	LINE
2	0.1806	50.90	-13.56	64.46	40.77	9.95	0.18	QP	LINE
3	0.5128	40.80	-5.20	46.00	30.58	10.02	0.20	Average	LINE
4	0.5128	46.04	-9.96	56.00	35.82	10.02	0.20	QP	LINE
5	1.0767	32.50	-13.50	46.00	22.25	10.05	0.20	Average	LINE
6	1.0767	41.55	-14.45	56.00	31.30	10.05	0.20	QP	LINE
7	3.5466	32.12	-13.88	46.00	21.71	10.10	0.31	Average	LINE
8	3.5466	41.17	-14.83	56.00	30.76	10.10	0.31	QP	LINE
9	4.7969	33.84	-12.16	46.00	23.38	10.12	0.34	Average	LINE
10	4.7969	42.05	-13.95	56.00	31.59	10.12	0.34	QP	LINE
11	13.5509	28.58	-21.42	50.00	17.95	10.21	0.42	Average	LINE
12	13.5509	38.57	-21.43	60.00	27.94	10.21	0.42	QP	LINE



Temperature	22° C	Humidity	52%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

Neutral

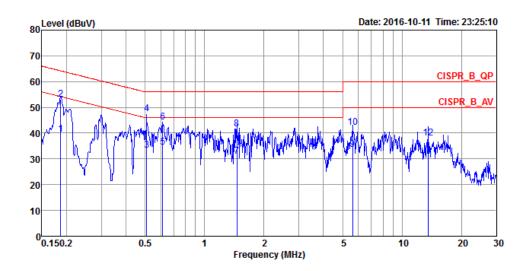

			0ver	Limit	Read	LISN	Cable		
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1864	39.60	-14.60	54.20	29.46	9.96	0.18	Average	NEUTRAL
2	0.1864	53.06	-11.14	64.20	42.92	9.96	0.18	QP	NEUTRAL
3	0.5101	33.49	-12.51	46.00	23.32	9.97	0.20	Average	NEUTRAL
4	0.5101	47.40	-8.60	56.00	37.23	9.97	0.20	QP	NEUTRAL
5	0.6140	34.43	-11.57	46.00	24.26	9.97	0.20	Average	NEUTRAL
6	0.6140	44.30	-11.70	56.00	34.13	9.97	0.20	QP	NEUTRAL
7	1.4562	31.14	-14.86	46.00	20.94	9.98	0.22	Average	NEUTRAL
8	1.4562	41.65	-14.35	56.00	31.45	9.98	0.22	QP	NEUTRAL
9	5.6234	33.72	-16.28	50.00	23.31	10.07	0.34	Average	NEUTRAL
10	5.6234	42.36	-17.64	60.00	31.95	10.07	0.34	QP	NEUTRAL
11	13.5509	29.48	-20.52	50.00	18.85	10.21	0.42	Average	NEUTRAL
12	13.5509	38.22	-21.78	60.00	27.59	10.21	0.42	QP	NEUTRAL



4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm).

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak and Average

4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout



4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.2.7. Test Result of Maximum Conducted Output Power

Temperature	Temperature 22°C		54%	
Test Engineer	Wen Chao	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK	
Test Date	Sep. 14, 2016 ~ Oct. 06,	2016		

For BR (GFSK) 1 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	6.32	6.12	21.00	Complies
39	2441 MHz	6.75	6.56	21.00	Complies
78	2480 MHz	7.68	7.52	21.00	Complies

For EDR (π /4-DQPSK) 2 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	8.59	6.25	21.00	Complies
39	2441 MHz	8.96	6.71	21.00	Complies
78	2480 MHz	9.79	7.59	21.00	Complies

For EDR (8DPSK) 3 Mbps:

Channel	Frequency	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	9.02	6.25	21.00	Complies
39	2441 MHz	9.47	6.69	21.00	Complies
78	2480 MHz	10.32	7.61	21.00	Complies



4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VBW	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
- 3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.3.7. Test Result of Hopping Channel Separation

Temperature	22℃	Humidity	54%
Test Engineer	Wen Chao	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For BR (GFSK) 1 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	0.9391	0.8769	1.00	0.626	Complies
2441 MHz	0.9275	0.8654	1.00	0.618	Complies
2480 MHz	0.9362	0.8712	1.00	0.624	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR (π /4-DQPSK) 2 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.2750	1.1780	1.00	0.850	Complies
2441 MHz	1.2810	1.1720	1.00	0.854	Complies
2480 MHz	1.2780	1.1840	1.00	0.852	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For EDR (8DPSK) 3 Mbps:

Frequency	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Ch. Separation (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	Result
2402 MHz	1.2960	1.1780	1.00	0.864	Complies
2441 MHz	1.2840	1.1750	1.00	0.856	Complies
2480 MHz	1.2960	1.1900	1.00	0.864	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth




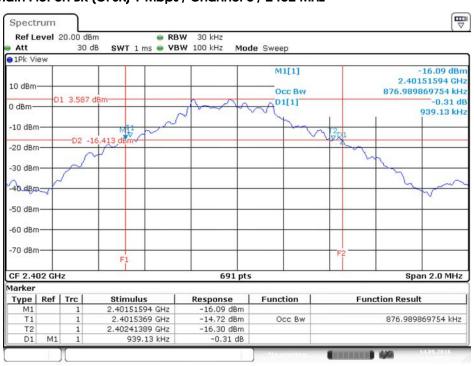

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 0 / 2402 MHz


Date: 14.SEP.2016 19:55:42

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 39 / 2441 MHz

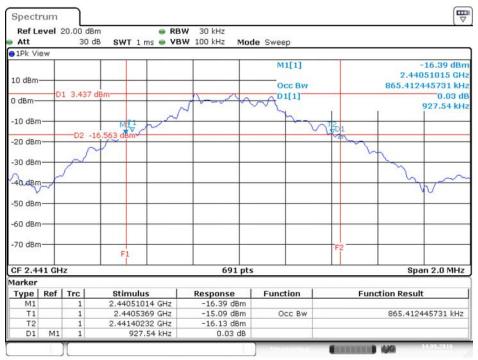

Date: 14.SEP.2016 19:57:52




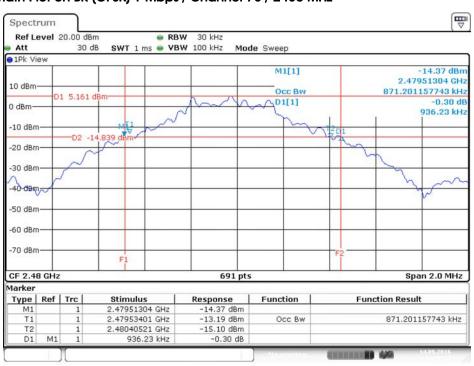

20 dB Bandwidth Plot on BR (GFSK) 1 Mbps / Channel 78 / 2480 MHz


Date: 14.SEP.2016 19:58:44

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel $0 \sim 1$ / 2402 MHz \sim 2403 MHz

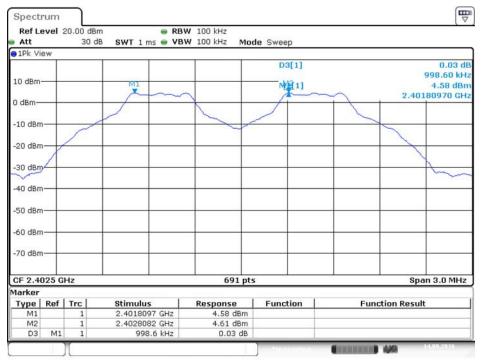

Date: 14.SEP.2016 21:51:37




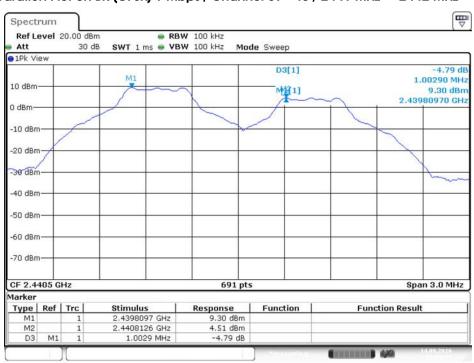

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz


Date: 14.SEP.2016 21:52:51

Channel Separation Plot on BR (GFSK) 1 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

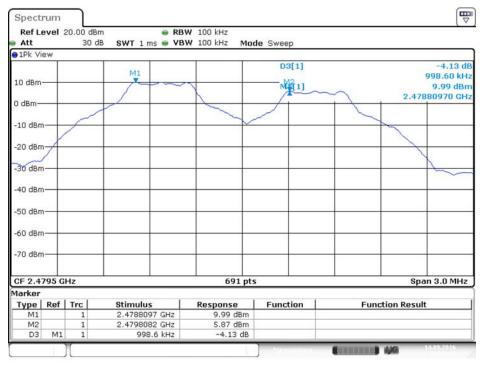

Date: 14.SEP.2016 21:55:25



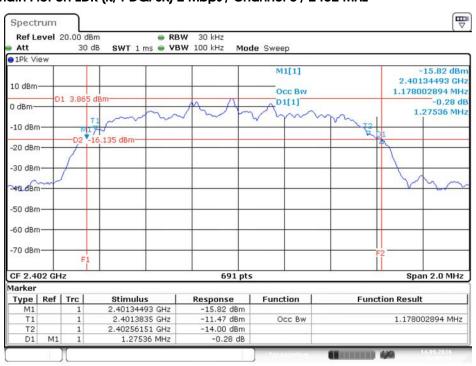

20 dB Bandwidth Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 0 / 2402 MHz


Date: 14.SEP.2016 20:02:18

20 dB Bandwidth Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 39 / 2441 MHz

Ref Lo	evel 3	20.00 d 30			le Sweep		
1Pk Vi	ew		of one interest of the		e oncep		
10 dBm·					M1[1]		-15.76 dB 2.44034493 GF 1.172214182 MF
) dBm—	D	1 3.605		M		m I	-0.58 d 1.28116 MF
10 dBm		M				T2 D1	
20 dBm		-D2	-16.395 dBm				
-30 dBm	-	\square					
48 dBm	~						when
-50 dBm	-					+	
60 dBm	+	_					
-70 dBm	+	F1				F2	3
CF 2.44	41 GH	z		691 pts			Span 2.0 MH;
larker							
Type	Ref	Trc	Stimulus	Response	Function	Functio	n Result
M1		1	2.44034493 GHz	-15.76 dBm			
Τ1		1	2.4403864 GHz	-11.28 dBm	Occ Bw		1.172214182 MH
T2		1	2.44155861 GHz	-14.15 dBm			
D1	M1	1	1.28116 MHz	-0.58 dB			

Date: 14.SEP.2016 20:01:38




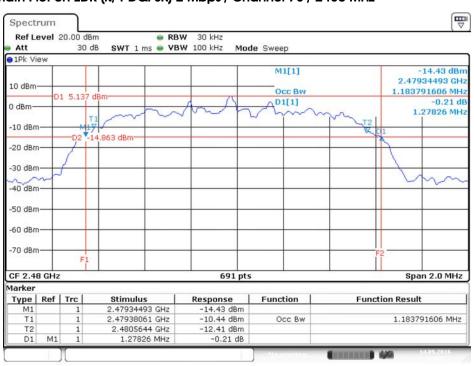

20 dB Bandwidth Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 78 / 2480 MHz


Date: 14.SEP.2016 20:00:21

Channel Separation Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 0~1 / 2402 MHz ~ 2403 MHz

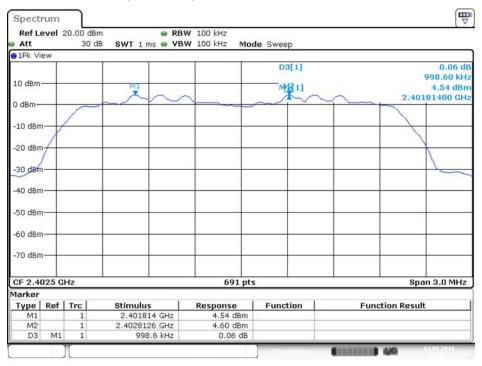

Date: 14.SEP.2016 21:41:51




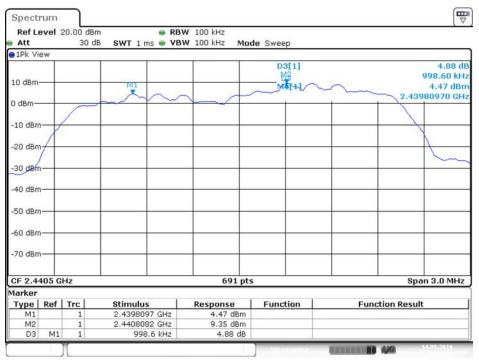

Channel Separation Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 39~40 / 2441 MHz ~ 2442 MHz


Date: 14.SEP.2016 21:43:06

Channel Separation Plot on EDR (π /4-DQPSK) 2 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

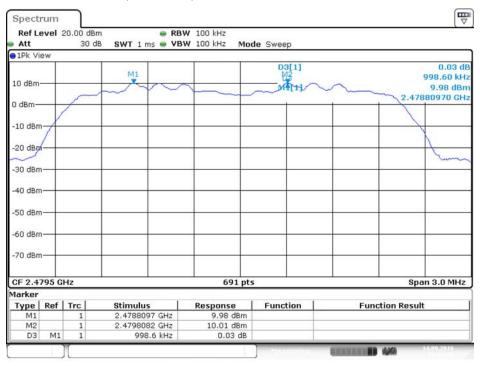

Date: 14.SEP.2016 21:44:09



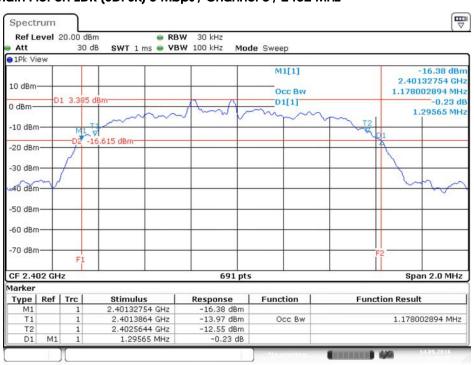

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 0 / 2402 MHz


Date: 14.SEP.2016 20:03:56

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 39 / 2441 MHz

Ref Le	evel 3	20.00 di 30			le Sweep		
1Pk Vi	ЭW	50000					
10 dBm·					M1[1]		-15.94 dB 2.44033044 GF 1.175108538 MF
0 dBm—	D	1 3.787	/ dBm	Ant	D1[1]		-0.07 d 1.28406 MH
-10 dBm	-	MI	The second secon			T2	1
-20 dBm	-	-D2 -	-16.213 dBm			4	2
-30 dBm	-	/	_			_	1
40 dBm	\sim	(_	how
-50 dBm	-			_			
-60 dBm	-		_			_	
-70 dBm	_	F1		_		F	2
CF 2.44	+1 GH	1		691 pts			Span 2.0 MHz
1arker							
Type	Ref	Trc	Stimulus	Response	Function	Funct	ion Result
M1		1	2.44033043 GHz	-15.94 dBm	0		
Τ1		1	2.4403864 GHz	-12.96 dBm	Occ Bw		1.175108538 MH:
T2		1	2.44156151 GHz	-12.78 dBm			
D1	M1	1	1.28406 MHz	-0.07 dB			

Date: 14.SEP.2016 20:04:47




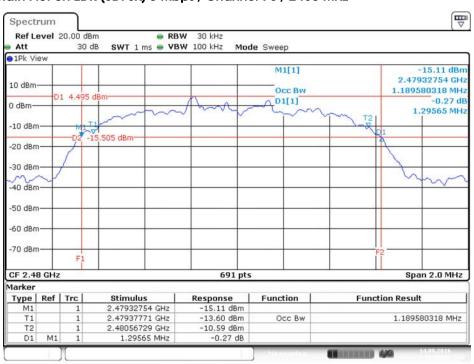

20 dB Bandwidth Plot on EDR (8DPSK) 3 Mbps / Channel 78 / 2480 MHz


Date: 14.SEP.2016 20:05:32

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel $0\sim1$ / 2402 MHz \sim 2403 MHz

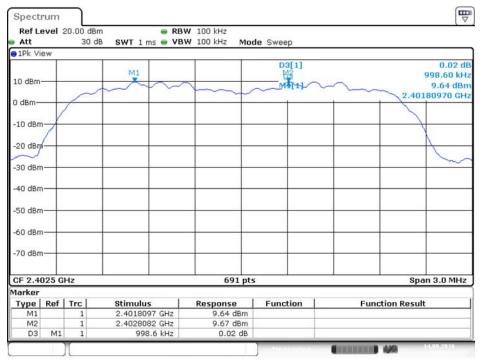

Date: 14.SEP.2016 21:50:13




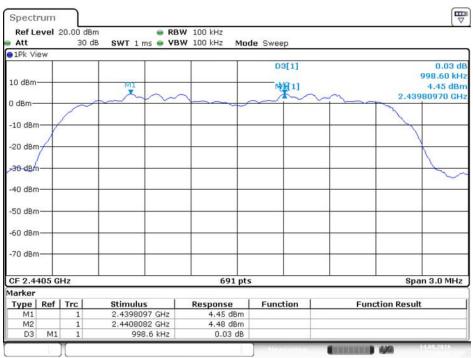

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 39 \sim 40 / 2441 MHz \sim 2442 MHz

Date: 14.SEP.2016 21:49:01

Channel Separation Plot on EDR (8DPSK) 3 Mbps / Channel 77~78 / 2479 MHz ~ 2480 MHz

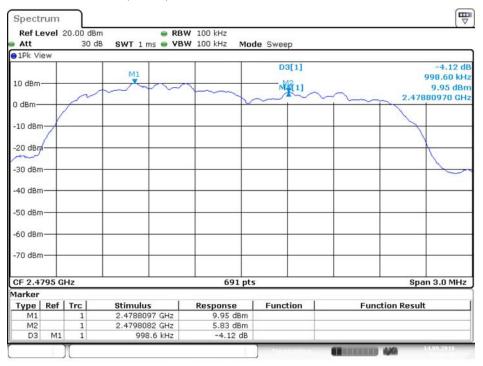

Date: 14.SEP.2016 21:48:00



4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
- 3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




4.4.7. Test Result of Number of Hopping Frequency

Temperature	22℃	Humidity	54%
Test Engineer	Wen Chao	Configurations	EDR (8DPSK)

Modulation	Channel	Frequency	Hopping Ch.	Min. Limit	Test Result
Type	No.	(MHz)	(Channels)	(Channels)	
EDR (8DPSK)	0 ~ 78	$2402 \sim 2480 \text{MHz}$	79	15	Complies

Number of Hopping Channel Plot on EDR (8DPSK) / Channel 0~78 / 2402 MHz ~ 2480 MHz

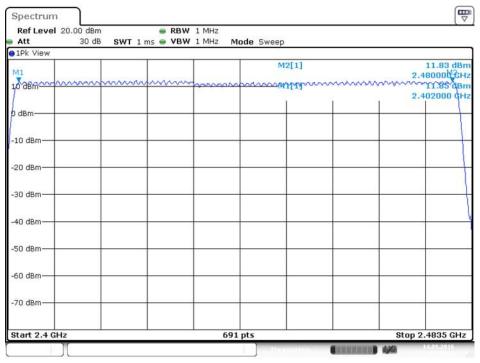

Date: 14.SEP.2016 22:08:23



4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW	1000 kHz
VBW	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer
- 2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
- 3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- 4. Sweep Time is more than once pulse time.
- 5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- 6. Measure the maximum time duration of one single pulse.
- 7. Set the EUT for DH1, DH3, DH5 packet transmitting.
- 8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout



4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.5.7. Test Result of Dwell Time

Temperature	22°C		Humidity			54%			
Test Engineer	Wen Chao		Configurations			BR (GFSK) / DH1, DH3, DH5			
	-		-						
Data Packet	Frequency	Pulse Du	uration	Dwell		Linoita (a)	Tost Dogult		
Dala Packel	(MHz)	(ms)		Time (s)		Limits (s)	Test Result		
DH1	2402 MHz	0.40	29	0.1289		0.4000	Complies		
DH3	2402 MHz	1.6580		0.2653		0.4000	Complies		
DH5	2402 MHz	2.85	36	6 0.3044		0.4000	Complies		
DH1	2441 MHz	0.40	29	0.1289		0.4000	Complies		
DH3	2441 MHz	1.65	22	0.2643		0.4000	Complies		
DH5	2441 MHz	2.85	51	0.3045		0.4000	Complies		
DH1	2480 MHz	0.40	29	0.1289		0.4000	Complies		
DH3	2480 MHz	1.6638		0.2662		0.4000	Complies		
DH5	2480 MHz	2.84	06	0.3030		0.4000	Complies		

Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)


Remark:

Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.

Average Hopping Channel = hops / sweep time




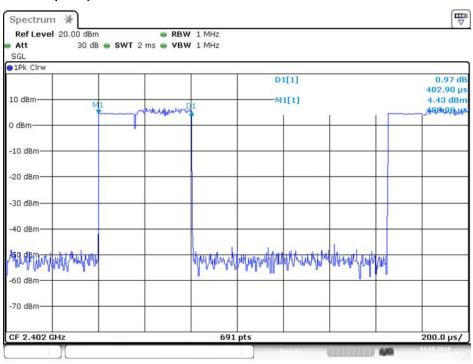

Dwell Time Plot on BR (GFSK) / Channel 0 / DH1 / 2402 MHz


Date: 14.SEP.2016 22:04:39

Dwell Time Plot on BR (GFSK) / Channel 39 / DH1 / 2441 MHz

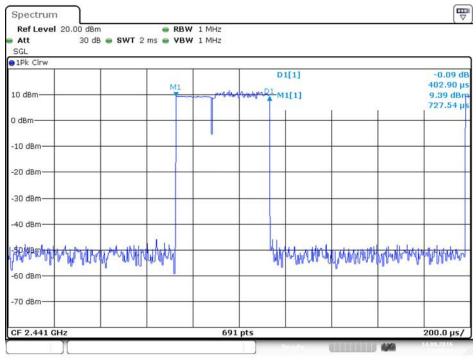

Date: 14.SEP.2016 22:03:43




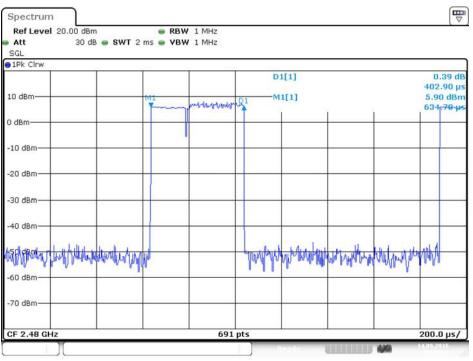

Dwell Time Plot on BR (GFSK) / Channel 78 / DH1 / 2480 MHz


Date: 14.SEP.2016 21:57:32

Dwell Time Plot on BR (GFSK) / Channel 0 / DH3 / 2402 MHz

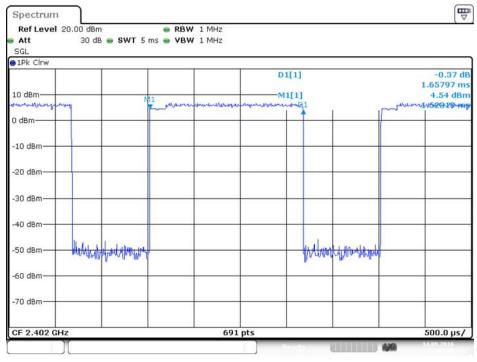

Date: 14.SEP.2016 22:05:20




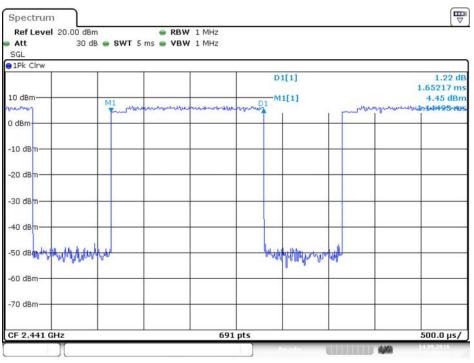

Dwell Time Plot on BR (GFSK) / Channel 39 / DH3 / 2441 MHz


Date: 14.SEP.2016 22:02:32

Dwell Time Plot on BR (GFSK) / Channel 78 / DH3 / 2480 MHz

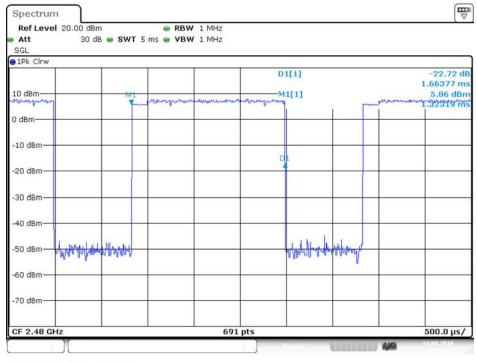

Date: 14.SEP.2016 21:58:54




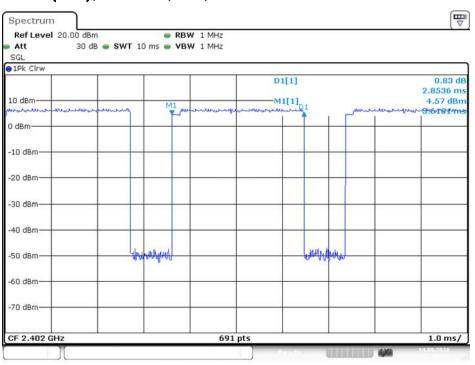

Dwell Time Plot on BR (GFSK) / Channel 0 / DH5 / 2402 MHz


Date: 14.SEP.2016 22:06:21

Dwell Time Plot on BR (GFSK) / Channel 39 / DH5 / 2441 MHz

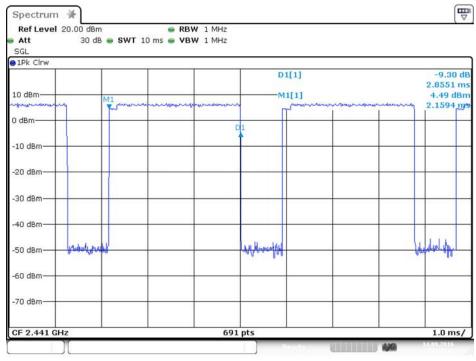

Date: 14.SEP.2016 22:01:40



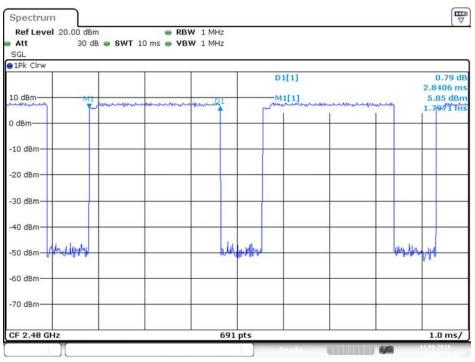

Dwell Time Plot on BR (GFSK) / Channel 78 / DH5 / 2480 MHz

Date: 14.SEP.2016 22:00:37



4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak,
	1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz, 300kHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz, RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz, RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz, RBW 120kHz for QP




4.6.3. Test Procedures

- 1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz \sim 30MHz

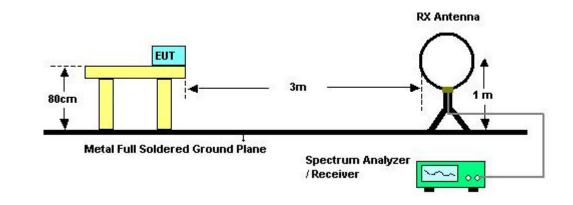

For Radiated Emissions: 30MHz~1GHz

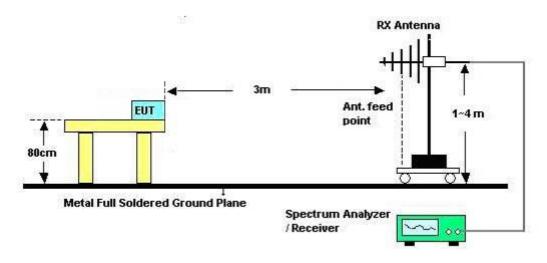



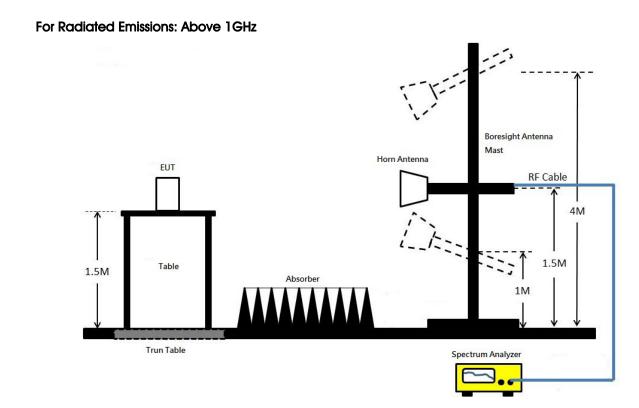

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.





4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22° C	Humidity	54%				
Test Engineer	Stim Sung / Jay Lo	Test Date	Sep. 22, 2016, Oct. 09, 2016				
Configurations	Normal Link	Test Mode	Mode 1~Mode 2				

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	22 °C	Humidity	54%
Test Engineer	Stim Sung/Jay Lo	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

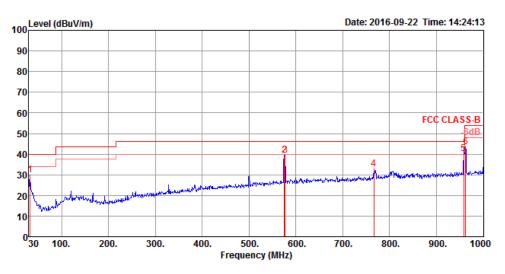


	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	32.91	29.78	40.00	-10.22	37.91	0.54	24.24	32.91	100	358	Peak	HORIZONTAL
2	575.14	39.54	46.00	-6.46	44.47	2.36	25.10	32.39	100	212	Peak	HORIZONTAL
3	577.08	39.61	46.00	-6.39	44.52	2.36	25.12	32.39	100	212	Peak	HORIZONTAL
4	766.23	32.77	46.00	-13.23	35.67	2.82	26.53	32.25	150	95	Peak	HORIZONTAL
5	958.29	40.29	46.00	-5.71	40.19	3.02	28.20	31.12	200	78	QP	HORIZONTAL
6	962.17	43.62	54.00	-10.38	43.44	3.03	28.23	31.08	200	63	Peak	HORIZONTAL






Vertical

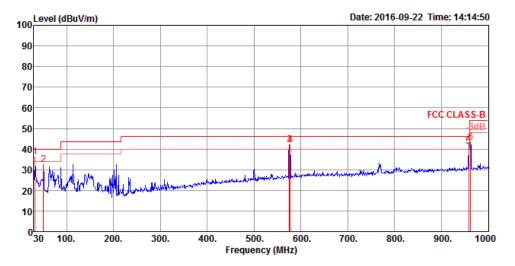

	Freq	Level						Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	32.91	36.24	40.00	-3.76	44.37	0.54	24.24	32.91	150	126	Peak	VERTICAL
2	50.37	32.35	40.00	-7.65	49.20	0.68	14.85	32.38	100	215	Peak	VERTICAL
3	575.14	42.04	46.00	-3.96	46.97	2.36	25.10	32.39	150	134	Peak	VERTICAL
4	577.08	42.16	46.00	-3.84	47.07	2.36	25.12	32.39	125	166	Peak	VERTICAL
5	958.29	41.15	46.00	-4.85	41.05	3.02	28.20	31.12	112	142	QP	VERTICAL
6	962.17	43.22	54.00	-10.78	43.04	3.03	28.23	31.08	150	232	Peak	VERTICAL




Temperature	22℃	Humidity	54%
Test Engineer	Stim Sung/Jay Lo	Configurations	Normal Link
Test Mode	Mode 2		

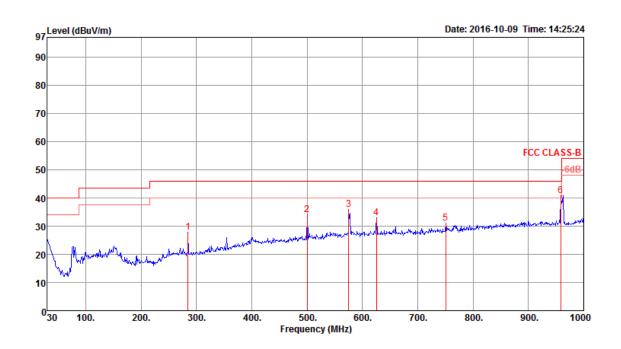

	Freq	Level	Limit Line	Over Limit				Preamp Factor		T/Pos	Rema rk	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Cm	deg		
1 2 3 4 5	285.11 500.45 575.14 625.58 750.71 958.29	34.05 35.97 32.90 31.08	46.00 46.00 46.00	-14.92	37.42 38.11 34.39 30.89	2.17 2.33 2.44 2.70		29.46 29.27 29.14	125 150 200 100 125 100	28 214 304 264	Peak Peak Peak Peak Peak Peak	HOR IZONTAL HOR IZONTAL HOR IZONTAL HOR IZONTAL HOR IZONTAL HOR IZONTAL



Vertical

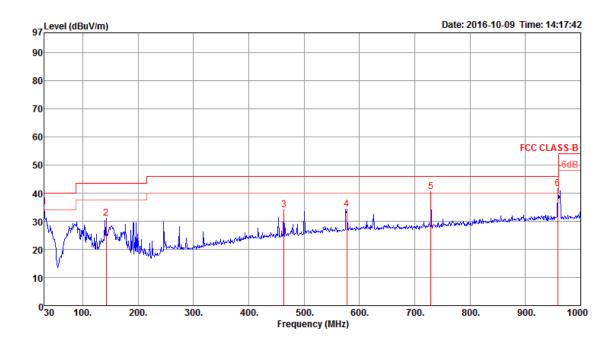

	Freq	Level	Limit Line	Over Limit	Read Level			Preamp Factor	A/Pos	T/Pos	Rema rk	Pol/Phase
	MHz	dBuV/m	$\overline{dBuV/m}$	dB	dBuV	dB	dB/m	dB	Cm	deg		
1 2 3 4 5 6	30.00 142.52 463.59 577.08 729.37 958.29	34.08 34.43 40.43	43.50 46.00	-4.94 -12.45 -11.92 -11.57 -5.57 -4.26	38.60 41.63 38.00 36.54 40.63 38.40	1.16 2.09 2.34 2.65	25.50 17.40 23.34 24.82 26.02 27.84	29.60 29.14 29.35 29.27 28.87 27.55	100 125 125 200 150 100	355 99 265 278	Peak Peak Peak Peak Peak Peak	VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = $20 \log Emission level (uV/m)$.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4.6.9. Results for Radiated Emissions (1GHz \sim 10th Harmonic)

Temperature	22°C	Humidity	54%
Test Engineer	Stim Sung/Jay Lo	Configurations	BR (GFSK) / Channel 0
Test Date	Sep. 16, 2016 ~ Sep. 2	2, 2016	
lle de ceter			

Horizontal

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4803.67 4803.95								234 234		Peak Average	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level						Preamp Factor		T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4803.70 4803.96											VERTICAL VERTICAL



Temperature	22℃	Humidity	54%							
Test Engineer	Stim Sung/Jay Lo	Configurations	BR (GFSK) / Channel 39							
Test Date	Sep. 16, 2016 ~ Sep. 22, 2016									

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4881.58 4881.90										Peak Average	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level						Preamp Factor		T/Pos	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
	4881.94 4882.27										Average Peak	VERTICAL VERTICAL



Temperature	22 °C	Humidity	54%						
Test Engineer	Stim Sung/Jay Lo	Configurations	BR (GFSK) / Channel 78						
Test Date	Sep. 16, 2016 ~ Sep. 22, 2016								

	Freq	Level						Preamp Factor	-	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4959.94 4960.11										Average Peak	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level		Over Limit					-	-	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4960.00 4960.35										-	VERTICAL VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = $20 \log Emission level (uV/m)$.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	22° C	Humidity	54%						
Test Engineer	Stim Sung/Jay Lo	Configurations	EDR (8DPSK) / Channel 0						
Test Date	Sep. 16, 2016 ~ Sep. 22, 2016								

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4803.92 4804.03										Average Peak	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level						Preamp Factor	-	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4803.95 4804.05										Peak Average	VERTICAL VERTICAL



Temperature	22℃	Humidity	54%				
Test Engineer	Stim Sung/Jay Lo	Configurations	EDR (8DPSK) / Channel 39				
Test Date	Sep. 16, 2016 ~ Sep. 22, 2016						

	Freq	Level						Preamp Factor		T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4881.95 4882.26										Average Peak	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level						Preamp Factor	-	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4881.92 4882.16										Average Peak	VERTICAL VERTICAL



Temperature	22 °C	Humidity	54%			
Test Engineer	Engineer Stim Sung/Jay Lo		EDR (8DPSK) / Channel 78			
Test Date	Sep. 16, 2016 ~ Sep. 22, 2016					

	Freq	Level		Over Limit					-	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4959.76 4959.90										Peak Average	HORIZONTAL HORIZONTAL

Vertical

	Freq	Level		Over Limit							Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2	4959.97 4960.03									186 186	Average Peak	VERTICAL VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = $20 \log Emission level (uV/m)$.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4.7. Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance				
(MHz)	(micorvolts/meter)	(meters)				
0.009~0.490	2400/F(kHz)	300				
0.490~1.705	24000/F(kHz)	30				
1.705~30.0	30	30				
30~88	100	3				
88~216	150	3				
216~960	200	3				
Above 960	500	3				

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak,
	1MHz / 1/T for Average
RBW / VBW (20dBc in any 100 kHz bandwidth emission)	100 kHz /100 kHz for Peak

4.7.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.6.3.

For Radiated Out of Band Emission Measurement:

1. The test procedure is follow 15.247(d).



4.7.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.





4.7.7. Test Result of Band Edge and Fundamental Emissions


Temperature	22° C	Humidity	54%
Test Engineer	Stim Sung/Jay Lo	Configurations	BR (GFSK) / Channel 0, 39, 78

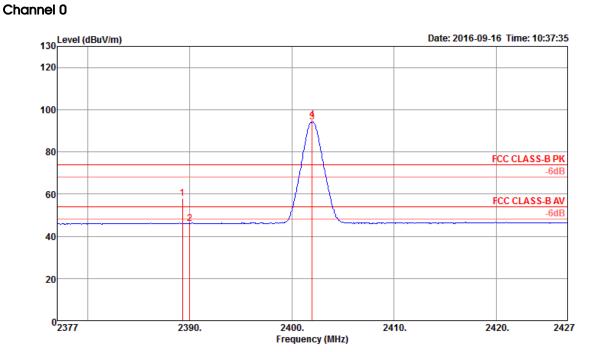

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.26	58.02	74.00	-15.98	26.11	3.60	28.31	0.00	103	156	Peak	VERTICAL
2	2390.00	46.17	54.00	-7.83	14.26	3.60	28.31	0.00	103	156	Average	VERTICAL
3 @	2402.00	94.31			62.36	3.61	28.34	0.00	103	156	Average	VERTICAL
4 @	2402.00	95.34			63.39	3.61	28.34	0.00	103	156	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.




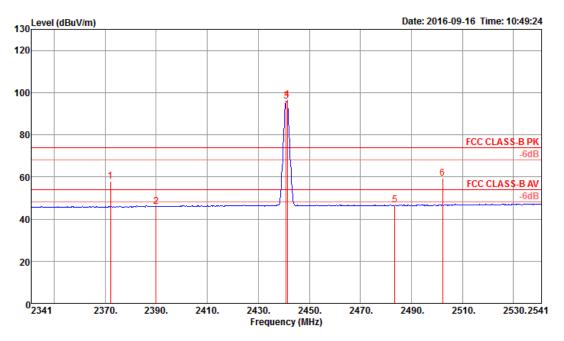

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2 3 @ 4 @ 5 6	2372.09 2390.00 2441.00 2441.32 2483.50 2502.22	45.89 95.82 96.77 46.77	54.00	-8.11	13.98 63.77 64.72 14.61	3.60 3.64 3.64	28.31 28.41 28.41 28.43	0.00 0.00 0.00 0.00	111 111 111 111 111 111	151 151 151 151	Peak Average Average Peak Average Peak	VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.



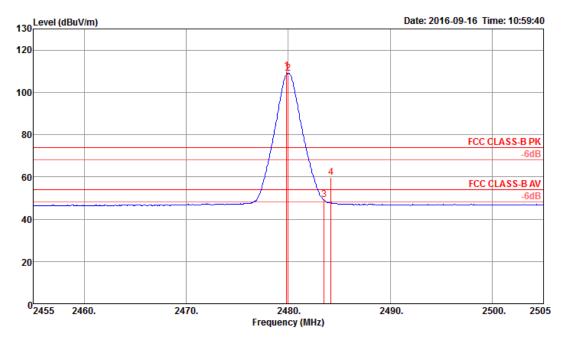

	Freq	Level		Over Limit				Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
· · ·	2479.84 2480.00 2483.50 2484.17	109.07 49.09	54.00		76.94 16.93	3.67 3.68	28.46 28.48	0.00	286 286 286 286	266 266	Peak Average Average Peak	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.


Note:

Emission level (dBuV/m) = $20 \log Emission level (uV/m)$.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




Temperature	22℃	Humidity	54%
Test Engineer	Stim Sung/Jay Lo	Configurations	EDR (8DPSK) / Channel 0, 39, 78

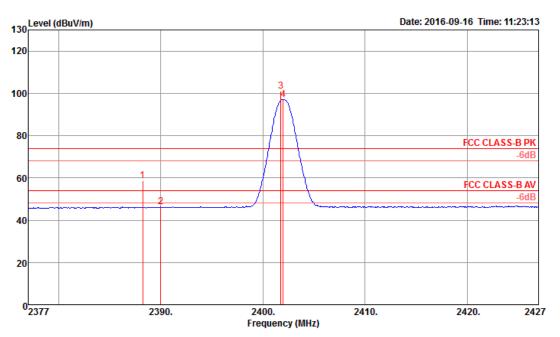

	Freq	Level		Over Limit						T/Pos	Remark	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.22	58.71	74.00	-15.29	26.80	3.60	28.31	0.00	103	156	Peak	VERTICAL
2	2390.00	46.19	54.00	-7.81	14.28	3.60	28.31	0.00	103	156	Average	VERTICAL
3 @	2401.76	101.18			69.23	3.61	28.34	0.00	103	156	Peak	VERTICAL
4 @	2402.00	97.13			65.18	3.61	28.34	0.00	103	156	Average	VERTICAL





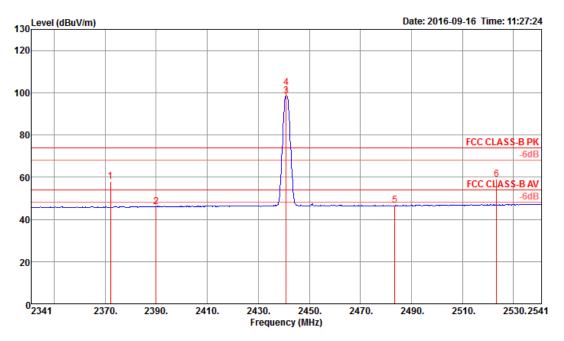


	Freq	Level						Preamp Factor		T/Pos	Remark	Pol/Phase
_	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 2 3 @ 4 @ 5 6	2372.09 2390.00 2441.00 2441.00 2483.50 2523.37	45.91 98.52 102.65 46.55	54.00 54.00	-8.09	14.00 66.47 70.60 14.39		28.31 28.41 28.41 28.48	0.00 0.00 0.00 0.00	112 112 112 112 112 112 112	137 137 137 137	Peak Average Average Peak Average Peak	VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.





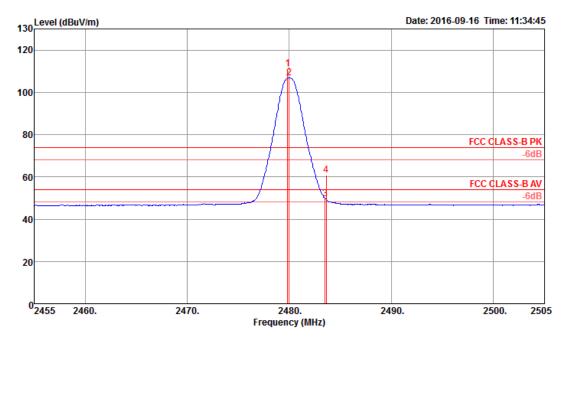

	Freq	Level						Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
	2479.84 2480.00				78.91 74.86		28.46		284 284		Peak Average	HORIZONTAL HORIZONTAL
3	2483.50								284		Average	HORIZONTAL
4	2483.61	60.69	74.00	-13.31	28.53	3.68	28.48	0.00	284	270	Peak	HORIZONTAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = $20 \log Emission level (uV/m)$.


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



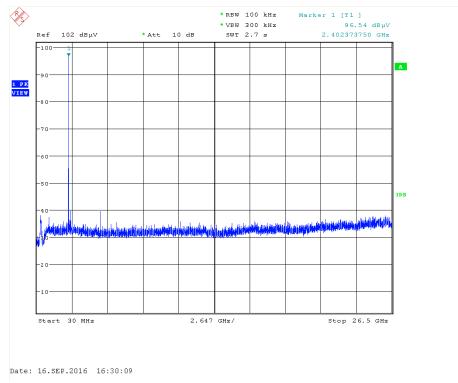


Plot on Configuration For BR (GFSK) / Channel 0 / Reference Level

Plot on Configuration For BR (GFSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

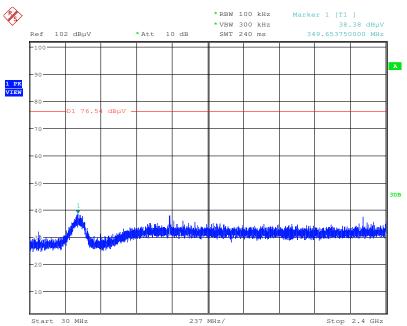

Date: 16.SEP.2016 16:31:05




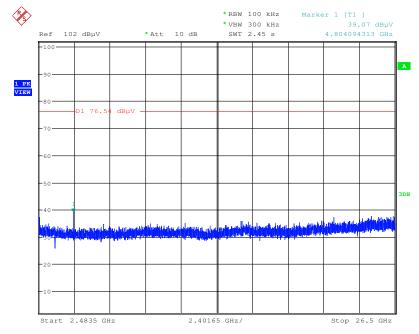


Plot on Configuration For BR (GFSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)

Date: 16.SEP.2016 16:31:41

Plot on Configuration For BR (GFSK) / Channel 78 / Reference Level

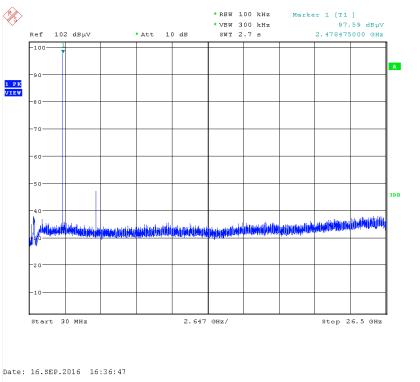




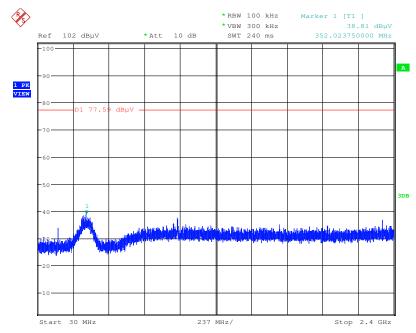

Plot on Configuration For BR (GFSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)


Date: 16.SEP.2016 16:37:41

Plot on Configuration For BR (GFSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

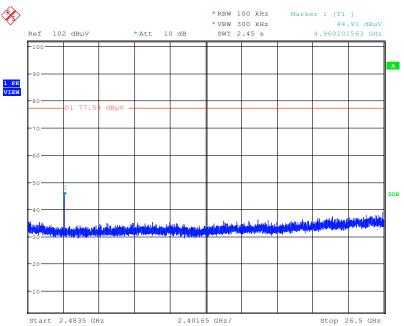

Date: 16.SEP.2016 16:50:57




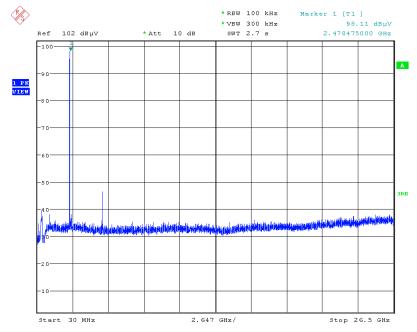

Plot on Configuration For BR (GFSK) / Hopping / Reference Level


Date: 16.SEP.2016 17:04:10

Plot on Configuration For BR (GFSK) / Hopping / 30MHz~2400MHz (down 20dBc)

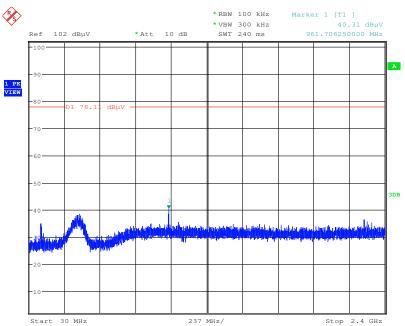

Date: 16.SEP.2016 17:04:54




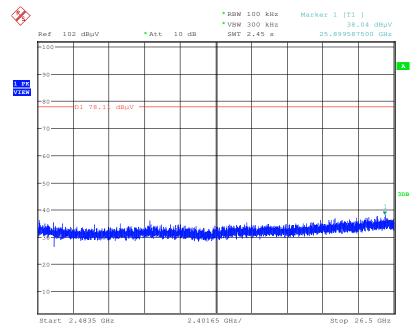

Plot on Configuration For BR (GFSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

Date: 16.SEP.2016 17:05:37




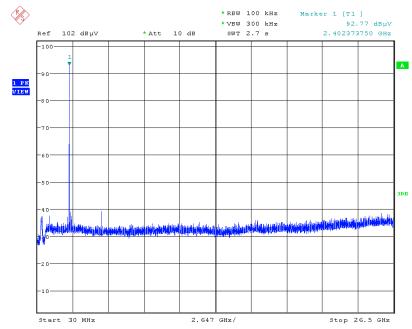

Plot on Configuration For EDR (8DPSK) / Channel 0 / Reference Level


Date: 16.SEP.2016 16:54:01

Plot on Configuration For EDR (8DPSK) / Channel 0 / 30MHz~2400MHz (down 20dBc)

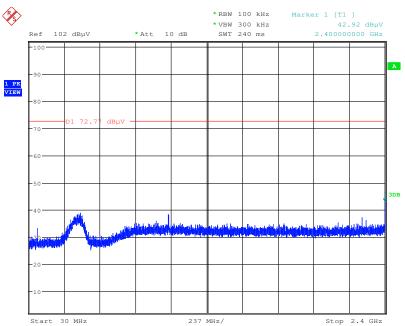

Date: 16.SEP.2016 16:54:55




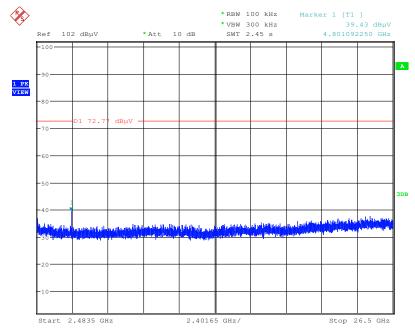

Plot on Configuration For EDR (8DPSK) / Channel 0 / 2483.5MHz~26500MHz (down 20dBc)


Date: 16.SEP.2016 16:57:20

Plot on Configuration For EDR (8DPSK) / Channel 78 / Reference Level

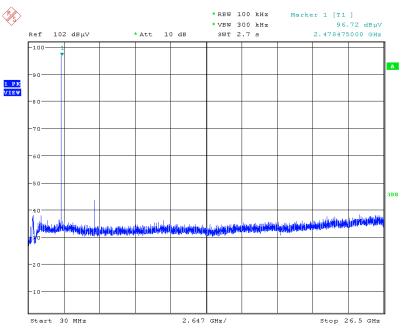

Date: 16.SEP.2016 16:59:19




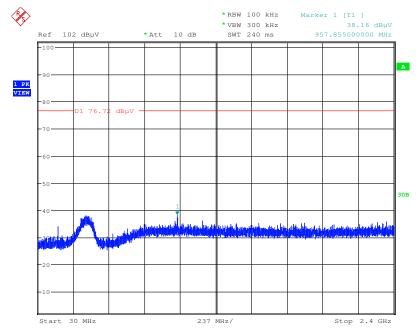

Plot on Configuration For EDR (8DPSK) / Channel 78 / 30MHz~2400MHz (down 20dBc)

Date: 16.SEP.2016 17:00:48


Plot on Configuration For EDR (8DPSK) / Channel 78 / 2483.5MHz~26500MHz (down 20dBc)

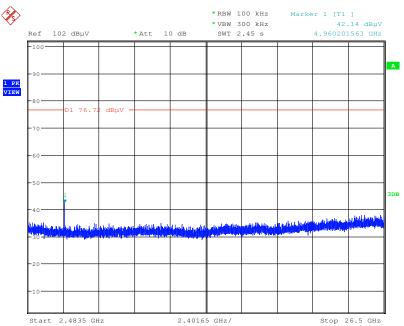

Date: 16.SEP.2016 17:01:31






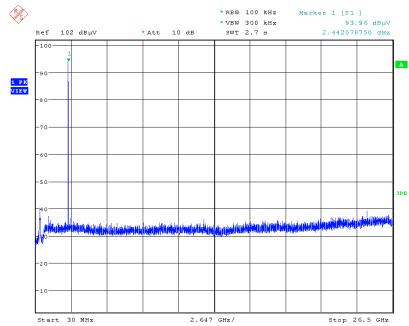

Plot on Configuration For EDR (8DPSK) / Hopping / Reference Level


Date: 16.SEP.2016 17:07:01

Plot on Configuration For EDR (8DPSK) / Hopping / 30MHz~2400MHz (down 20dBc)

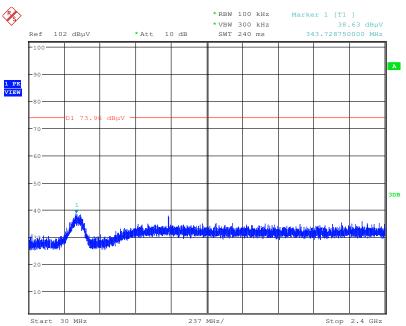

Date: 16.SEP.2016 17:07:41



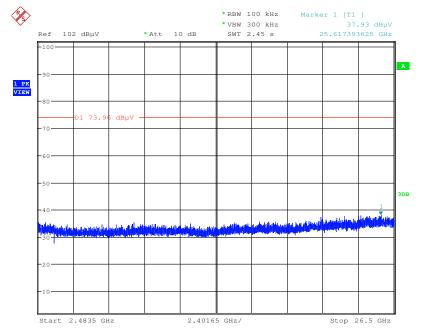

Plot on Configuration For EDR (8DPSK) / Hopping / 2483.5MHz~26500MHz (down 20dBc)

Date: 16.SEP.2016 17:09:14



4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.



5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 0216	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20 MHz ~ 2 GHz	Aug. 30, 2016	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	$750 \text{MHz} \sim 18 \text{GHz}$	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	$30 \text{ MHz} \sim 1 \text{ GHz}$	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

*Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz \sim 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz \sim 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%