

EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS



Model: L3160 (Battery LR1865SK-3 (11NR19/66-2), 3.65V, 5200mAh)



EUT Housing and Board View 1




EUT Housing and Board View 2

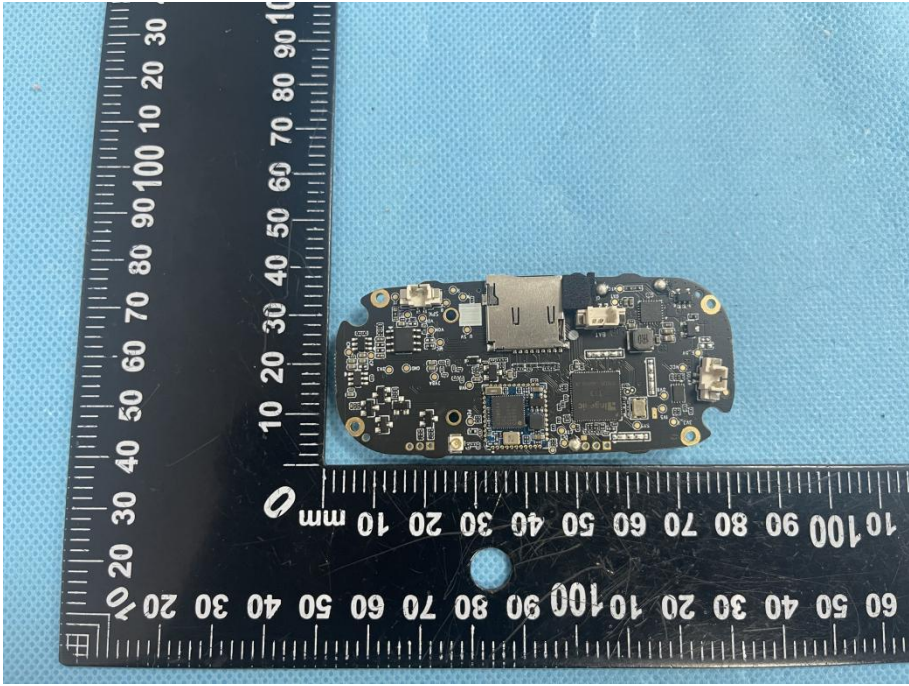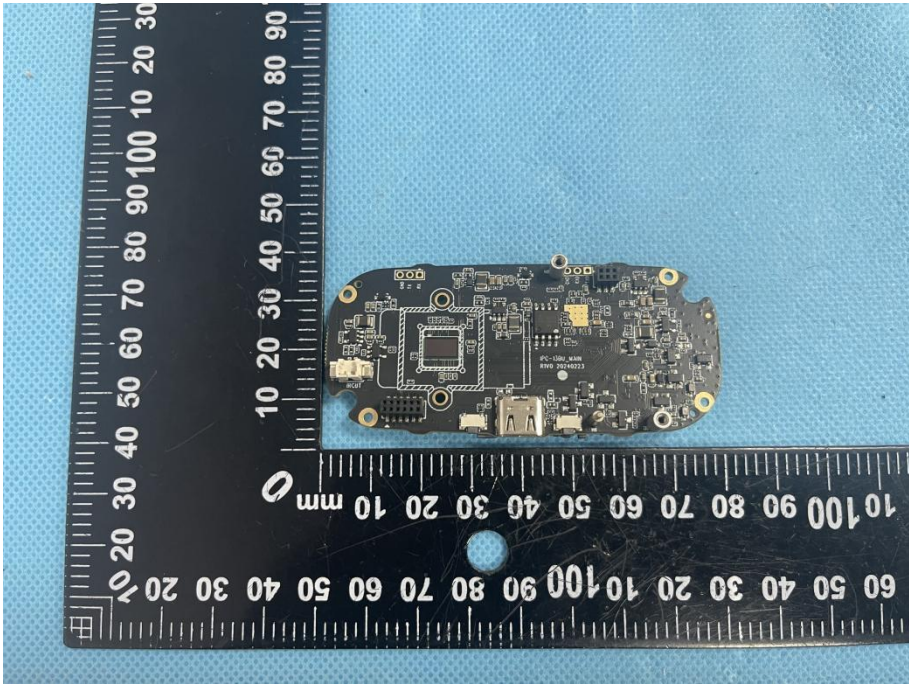


<p>Solder Board-Component View 1</p>	 A photograph of a small, dark-colored printed circuit board (PCB) component. The board is irregularly shaped with rounded corners and features various electronic components, including a central microcontroller, several integrated circuits, and surface-mount components. It is placed on a blue textured surface next to a black L-shaped ruler for scale. The ruler has white markings in millimeters and centimeters, with the vertical scale on the left and the horizontal scale on the bottom.
<p>Solder Board-Component View 2</p>	 A photograph of the same PCB component from a different perspective. This view shows the reverse side of the board, revealing the solder joints and the underside of the components. The board is again placed on a blue textured surface next to the same black L-shaped ruler for scale.
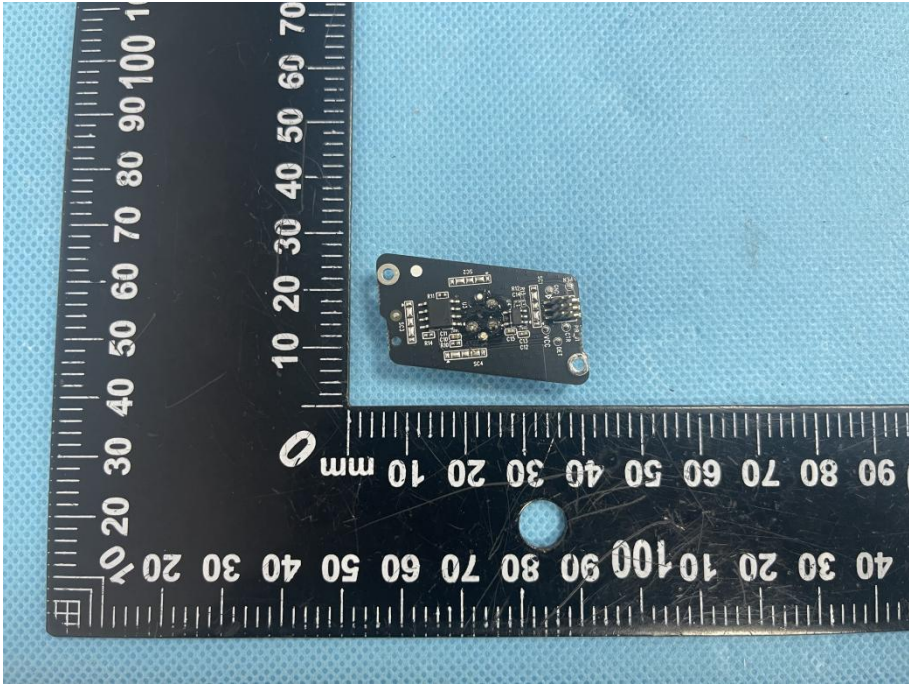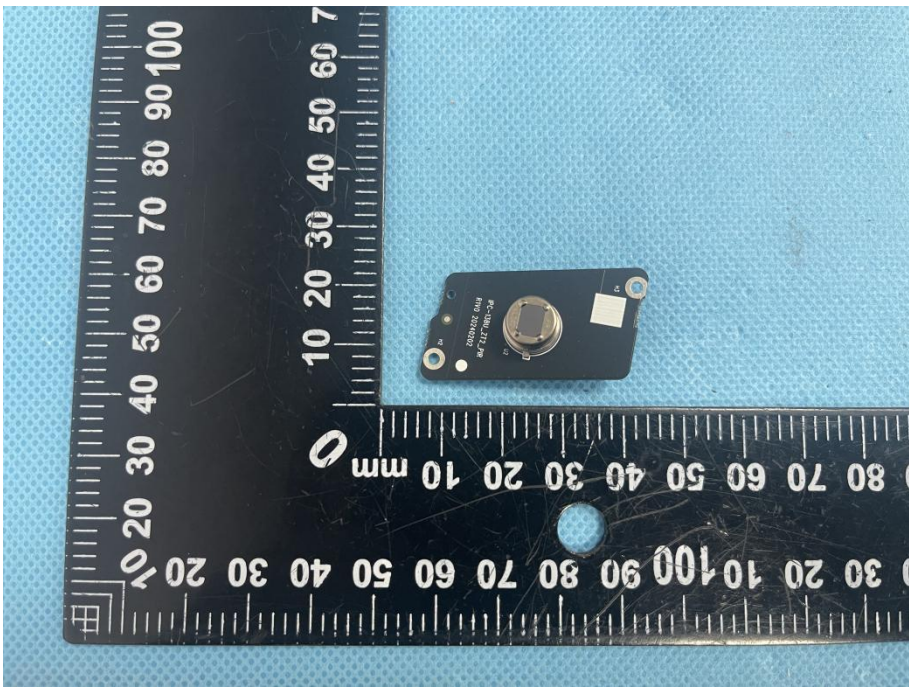
<p>Solder Board-Component View 3</p>	 A photograph showing a small, dark-colored solder board component. The component is rectangular with several small components and solder joints on its surface. It is placed on a blue textured background next to a black L-shaped ruler. The ruler has white markings in millimeters, with the horizontal scale ranging from 0 to 100 mm and the vertical scale from 0 to 70 mm. The component is positioned approximately between the 40-60 mm mark on the horizontal axis and the 10-20 mm mark on the vertical axis.
<p>Solder Board-Component View 4</p>	 A photograph showing the same solder board component from a different perspective. This view shows a circular component, possibly a lens or a sensor, mounted on the board. The component is dark with a lighter circular area in the center. It is placed on the same blue textured background next to the same black L-shaped ruler. The component is positioned approximately between the 40-60 mm mark on the horizontal axis and the 10-20 mm mark on the vertical axis.

**Solder
Board-Component
View 5**

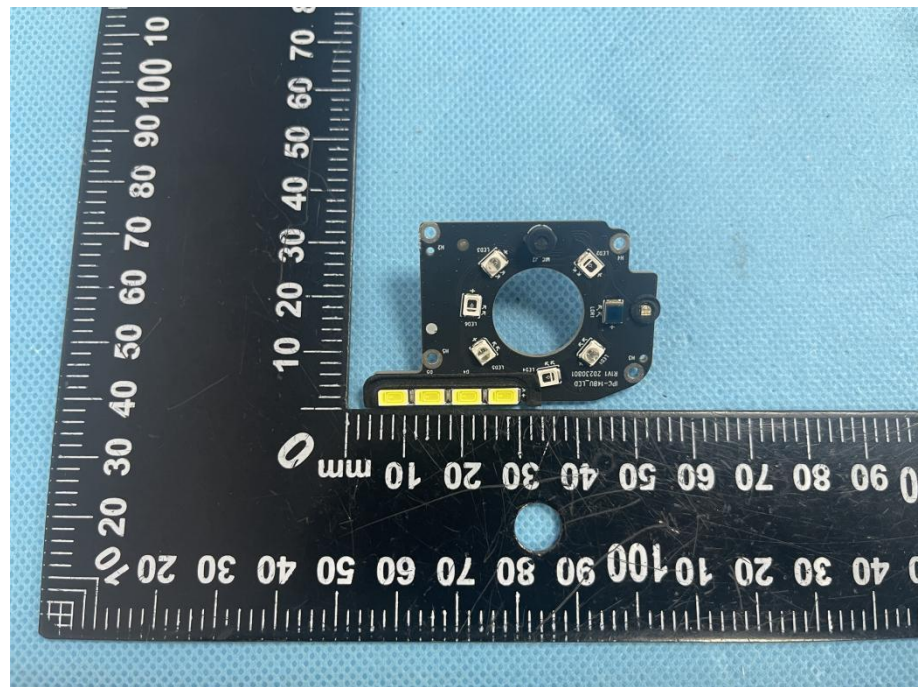

**Solder
Board-Component
View 6**


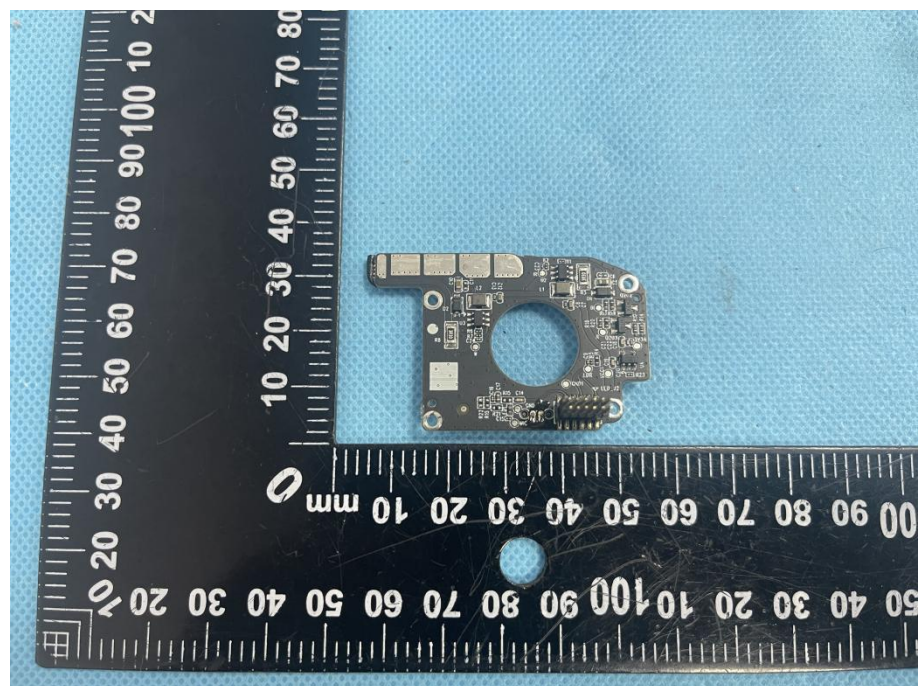


**Solder
Board-Component
View 7**




**Solder
Board-Component
View 8**

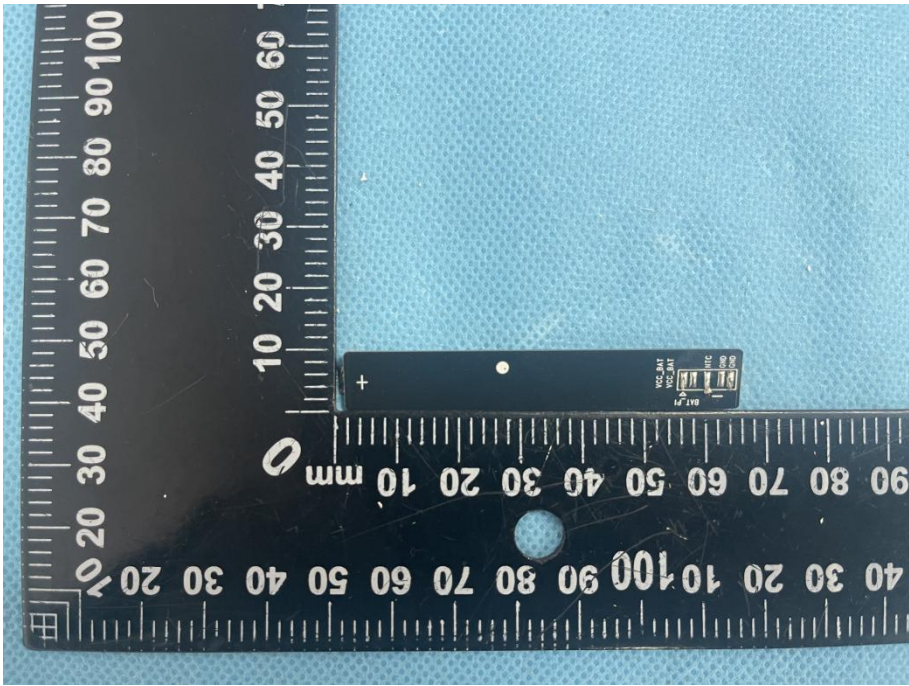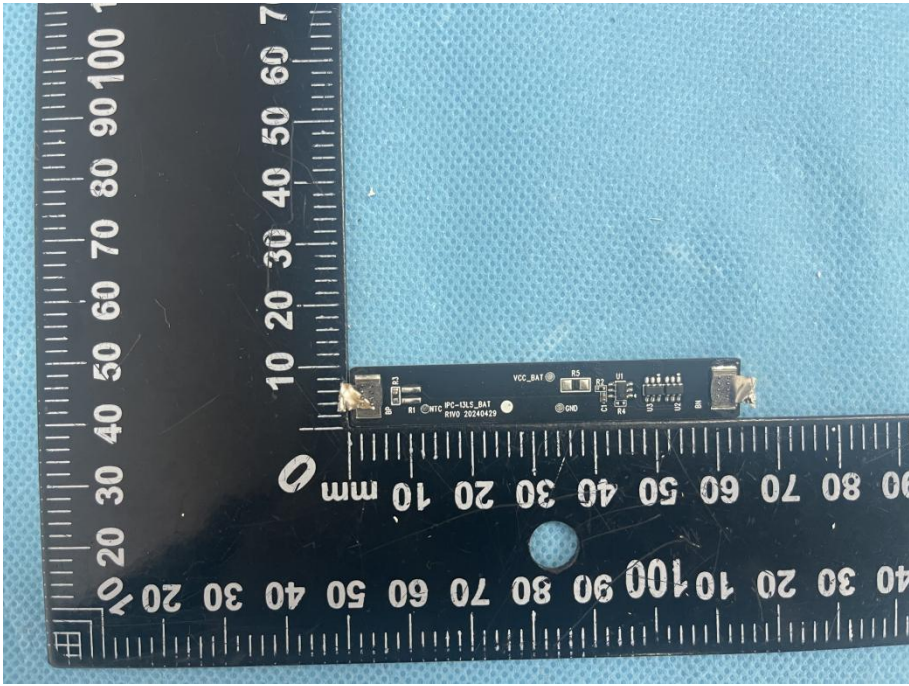

<p>Solder Board-Component View 9</p>	 A photograph of a small, dark, rectangular solder board component. The component is positioned horizontally above a black ruler with white markings. The ruler shows measurements in millimeters, with the component's length spanning approximately from the 35 mm mark to the 65 mm mark. The component has a small white '+' sign on its left side and some faint markings on its right side, including 'VCC_BAT' and 'GND'. The background is a light blue textured surface.
<p>Solder Board-Component View 10</p>	 A photograph of the same solder board component from a different perspective. The component is positioned horizontally above a black ruler with white markings. The ruler shows measurements in millimeters, with the component's length spanning approximately from the 35 mm mark to the 65 mm mark. The component has a small white '+' sign on its left side and some faint markings on its right side, including 'VCC_BAT', 'GND', and 'ES'. The background is a light blue textured surface.

**Solder
Board-Component
View 11**

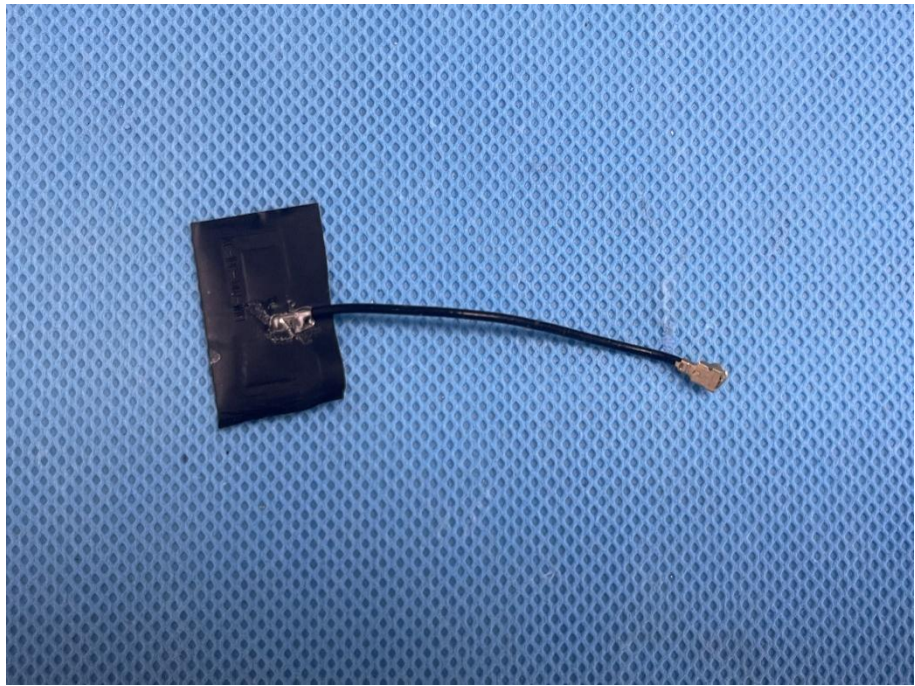

**Solder
Board-Component
View 12**



