

# TEST REPORT

Reference No..... : WTX24X06144508W001  
FCC ID..... : A4X-L3160  
Applicant..... : CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Manufacturer..... : Dongguan CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Product Name..... : Solar Battery Camera  
Model No..... : L3160  
Standards..... : 47 CFR FCC Part 15.247, Subpart C  
Date of Receipt sample..... : 2024-06-20  
Date of Test..... : 2024-06-20 to 2024-07-01  
Date of Issue..... : 2024-07-01  
Test Report Form No..... : WTX\_Part 15\_247W  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

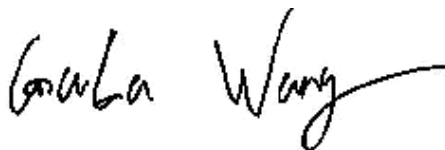

Gala Wang

Approved by:



Jason Su

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION .....4**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

1.2 TEST STANDARDS .....6

1.3 TEST METHODOLOGY .....6

1.4 TEST FACILITY .....6

1.5 EUT SETUP AND TEST MODE .....7

1.6 MEASUREMENT UNCERTAINTY .....8

1.7 TEST EQUIPMENT LIST AND DETAILS .....9

**2. SUMMARY OF TEST RESULTS ..... 12**

**3. ANTENNA REQUIREMENT ..... 13**

3.1 STANDARD APPLICABLE .....13

3.2 EVALUATION INFORMATION .....13

**4. POWER SPECTRAL DENSITY ..... 14**

4.1 STANDARD APPLICABLE .....14

4.2 TEST SETUP BLOCK DIAGRAM .....14

4.3 TEST PROCEDURE .....14

4.4 SUMMARY OF TEST RESULTS/PLOTS .....14

**5. DTS BANDWIDTH ..... 15**

5.1 STANDARD APPLICABLE .....15

5.2 TEST SETUP BLOCK DIAGRAM .....15

5.3 TEST PROCEDURE .....15

5.4 SUMMARY OF TEST RESULTS/PLOTS .....15

**6. RF OUTPUT POWER ..... 16**

6.1 STANDARD APPLICABLE .....16

6.2 TEST SETUP BLOCK DIAGRAM .....16

6.3 TEST PROCEDURE .....16

6.4 SUMMARY OF TEST RESULTS/PLOTS .....16

**7. FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 17**

7.1 STANDARD APPLICABLE .....17

7.2 TEST PROCEDURE .....17

7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION .....19

7.4 SUMMARY OF TEST RESULTS/PLOTS .....19

**8. OUT OF BAND EMISSIONS ..... 23**

8.1 STANDARD APPLICABLE .....23

8.2 TEST PROCEDURE .....23

8.3 SUMMARY OF TEST RESULTS/PLOTS .....24

**9. CONDUCTED EMISSIONS ..... 31**

9.1 TEST PROCEDURE .....31

9.2 BASIC TEST SETUP BLOCK DIAGRAM .....31

9.3 TEST RECEIVER SETUP .....31

9.4 SUMMARY OF TEST RESULTS/PLOTS .....31

**APPENDIX SUMMARY .....34**

**APPENDIX A .....35**

**APPENDIX B .....39**

**APPENDIX C .....43**

**APPENDIX D .....47**

**APPENDIX PHOTOGRAPHS ..... 53**

**Report version**

Version No.	Date of issue	Description
Rev.00	2024-07-01	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory 1#: ANFU CE LINK LIMITED  
 Address of factory: Anfu County Industrial Zone, Ji'an city, Jiangxi Province, P.R. China.

Factory 2#: CE LINK VIET NAM COMPANY LIMITED  
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Solar Battery Camera
Trade Name:	CE-LINK
Model No.:	L3160
Adding Model(s):	IPC-13BU-YT2, L3160-L, L3160-K, L3160-A
Rated Voltage:	External power supply: 5V Solar power supply: 5.4V Powered by rechargeable lithium-ion battery LR1865SK-3 (1INR19/66-2):3.65V
Rated Current:	External power supply: 1.0A Solar power supply: 0.23A
Battery Capacity:	Powered by rechargeable lithium-ion battery LR1865SK-3 (1INR19/66-2): 5200mAh
Power Adapter:	Model: ADS-6RA-06 05050EPCU Input: 100-240V~ 50/60Hz Max. 0. 3A Output : 5.0V=1.0A 5.0W
Software Version:	ATBM6441-BURN--TUYA-FW-IPC-13BU-ZT1-V0.0.9-20240511 T23ZN-BURN-TUYA2-IPC-13BU-ZT1-V0.0.9-20240511
Hardware Version:	IPC-13BU_MAIN R1V0 20240223 IPC-13BU_ZT2_PIR R1V0 20240202 IPC-14BU_LED R1V1 20230801 IPC-BAT R1V0 20240429
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model L3160, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20)
RF Output Power:	16.04dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20)
Channel Separation:	5MHz
Type of Antenna:	FPC Antenna
Antenna Gain:	3.01dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The tests were performed according to following standards:

**47 CFR FCC Part 15.247, Subpart C:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Type-C Cable	0.5	Shielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Xenon Lamp	SHILAN	9005	/
iPhone	Apple	MGC33CH/A	/
TF Card	Samsung	MB-MC128	/
WiFi Router	TP-LINK	TL-WR842N	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-26GHz ±3.92dB



**1.7 Test Equipment List and Details**

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23

WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input checked="" type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an FPC antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

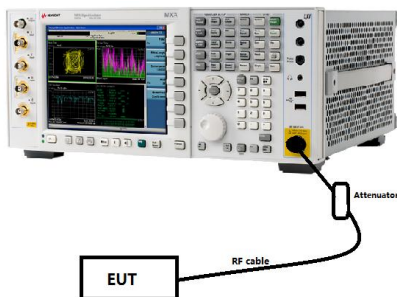

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram

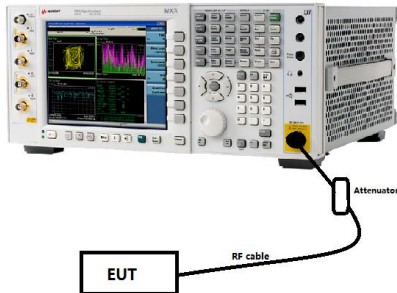

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

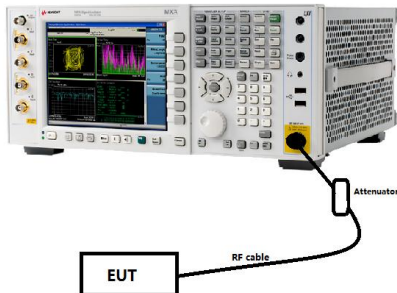

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Sub clause 8.3.2.2 and ANSI C63.10-2013 Sub clause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C



## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

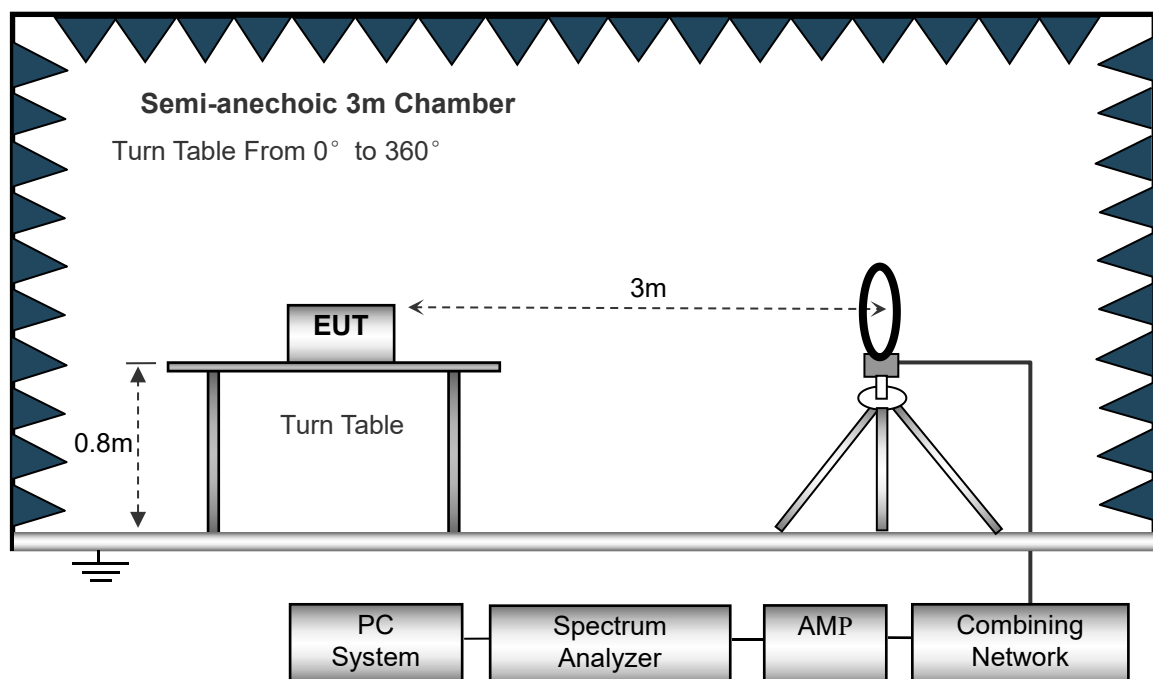

The test setup for emission measurement from 30MHz to 1GHz.

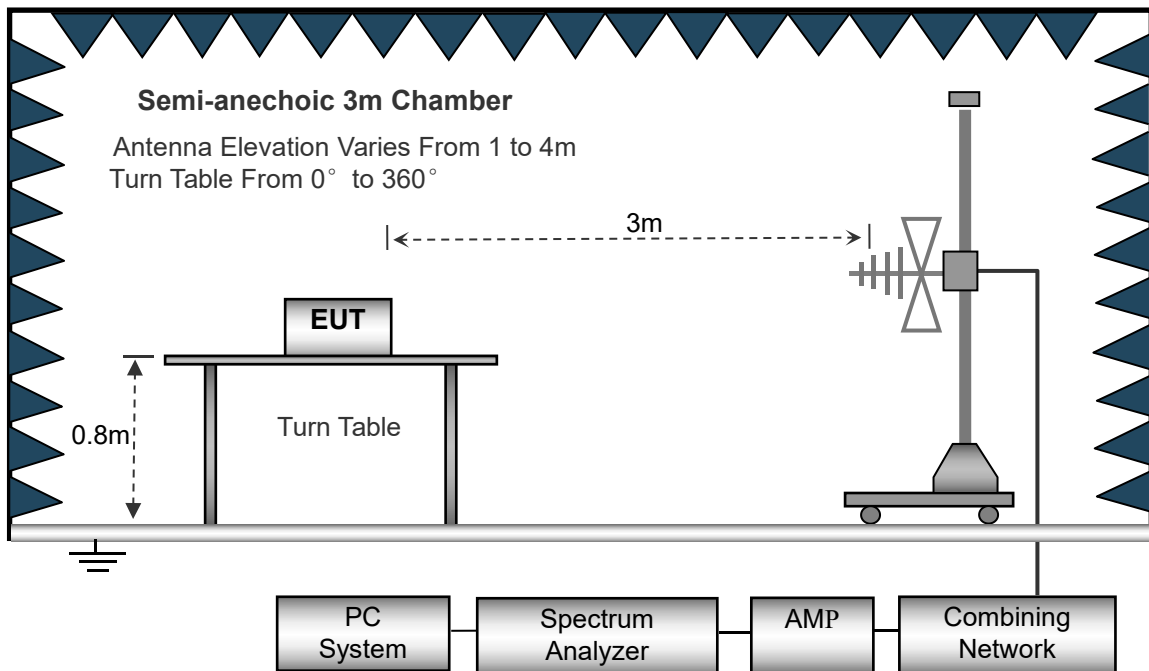

The test setup for emission measurement above 1GHz.

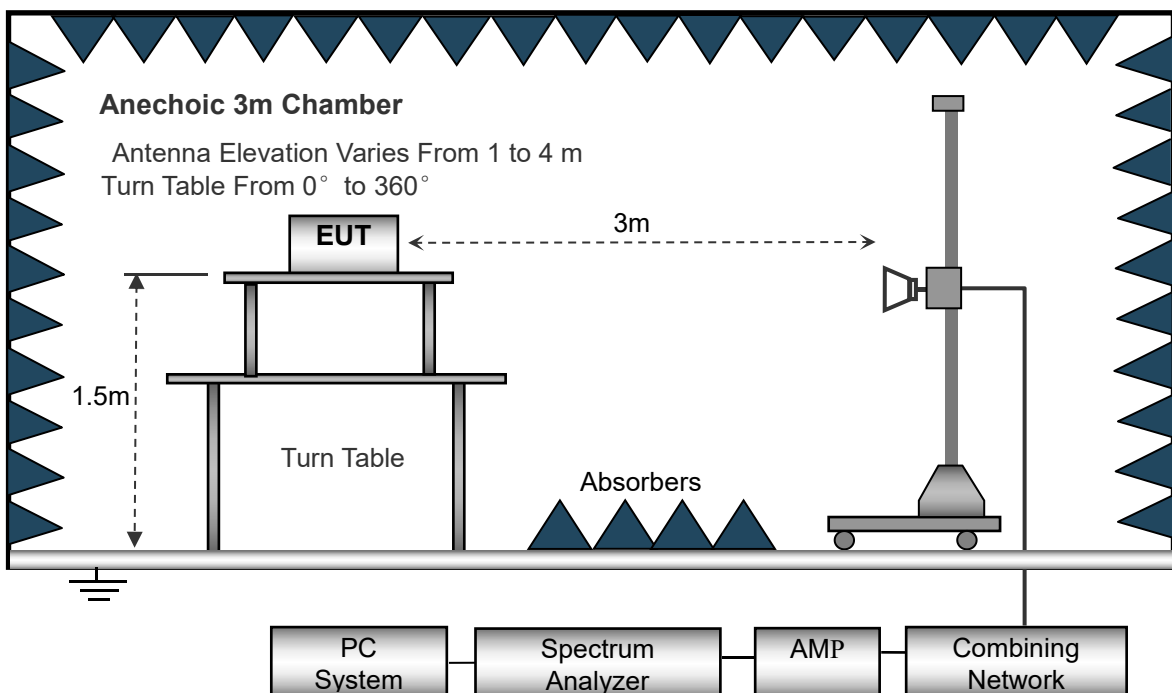

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b\_11Mbps) is recorded in this report.*


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Horizontal

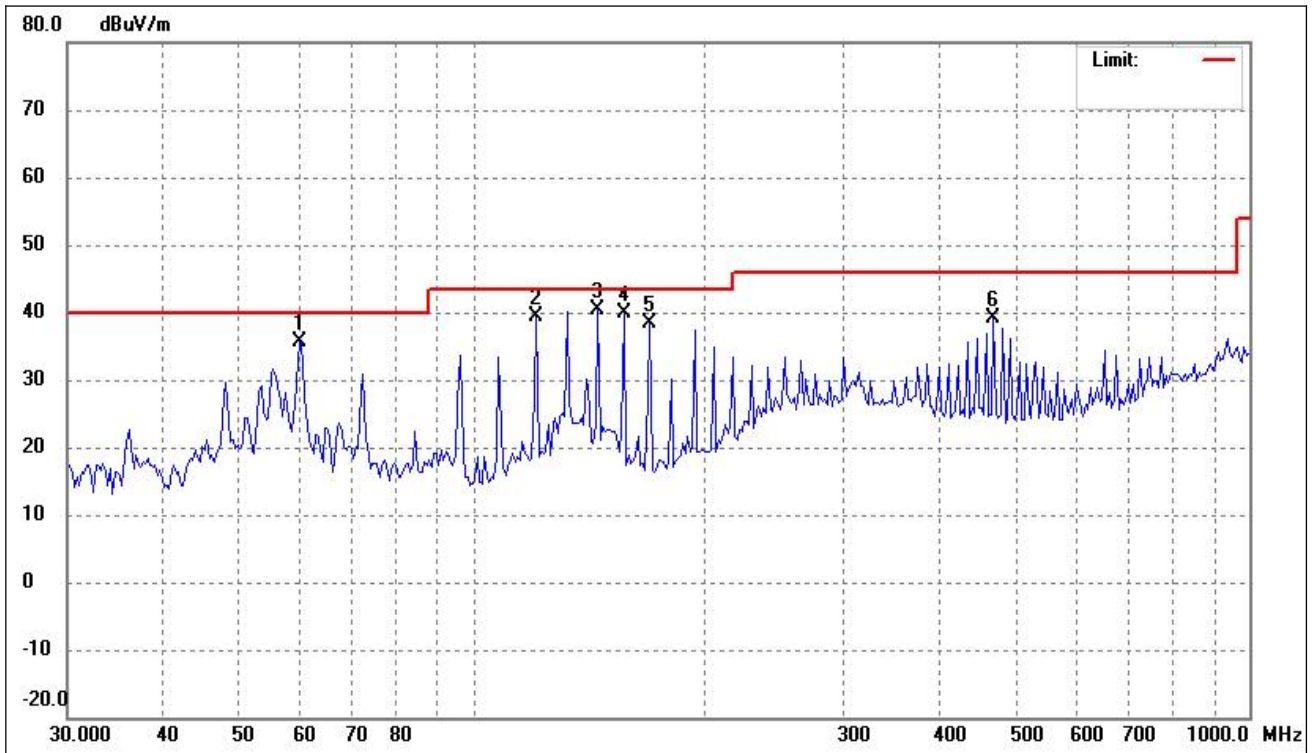

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	59.7315	44.11	-8.41	35.70	40.00	-4.30	-	-	peak
2	120.6118	49.37	-9.97	39.40	43.50	-4.10	-	-	peak
3	144.7899	48.94	-8.49	40.45	43.50	-3.05	-	-	peak
4	156.4259	47.94	-8.05	39.89	43.50	-3.61	-	-	peak
5	168.9970	46.55	-8.29	38.26	43.50	-5.24	-	-	peak
6	468.1651	44.13	-5.05	39.08	46.00	-6.92	-	-	peak

802.11b_11Mbps			
Test Channel	Low(worst case)	Polarity:	Vertical

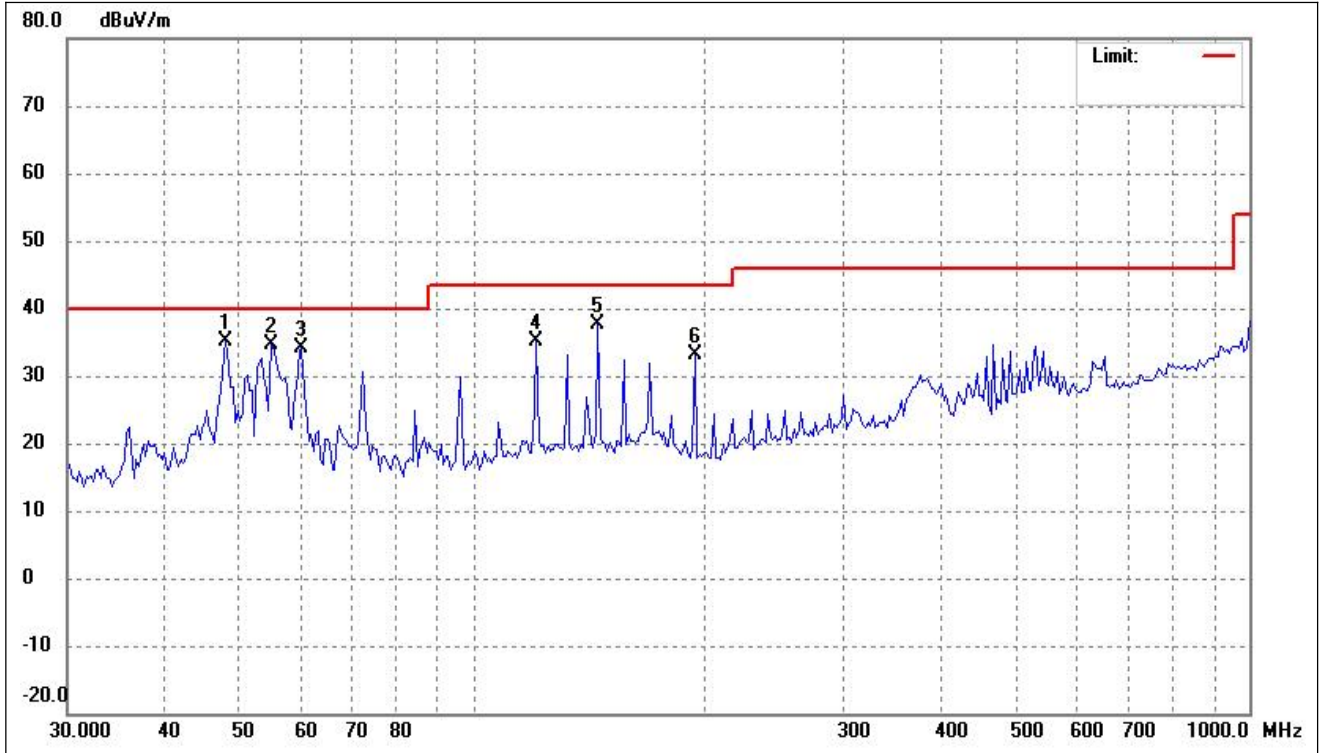

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	48.0392	42.85	-7.73	35.12	40.00	-4.88	-	-	peak
2	54.9011	42.64	-8.12	34.52	40.00	-5.48	-	-	peak
3	60.1528	42.67	-8.46	34.21	40.00	-5.79	-	-	peak
4	120.6118	45.13	-9.97	35.16	43.50	-8.34	-	-	peak
5	144.7899	46.22	-8.49	37.73	43.50	-5.77	-	-	peak
6	193.1366	44.12	-11.00	33.12	43.50	-10.38	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b\_11Mbps (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4820.583	66.20	-13.49	52.71	74.00	-21.29	H	PK
7236.000	54.72	-7.46	47.26	74.00	-26.74	H	PK
4820.583	66.32	-13.49	52.83	74.00	-21.17	V	PK
7236.000	54.29	-7.46	46.83	74.00	-27.17	V	PK
Middle Channel-2437MHz							
4870.396	66.17	-13.44	52.73	74.00	-21.27	H	PK
7311.000	54.44	-7.69	46.75	74.00	-27.25	H	PK
4870.396	66.34	-13.44	52.90	74.00	-21.10	V	PK
7311.000	53.64	-7.69	45.95	74.00	-28.05	V	PK
High Channel-2462MHz							
4920.723	66.29	-13.37	52.92	74.00	-21.08	H	PK
7386.000	55.52	-7.93	47.59	74.00	-26.41	H	PK
4920.723	65.40	-13.37	52.03	74.00	-21.97	V	PK
7386.000	54.13	-7.93	46.20	74.00	-27.80	V	PK

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots



➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

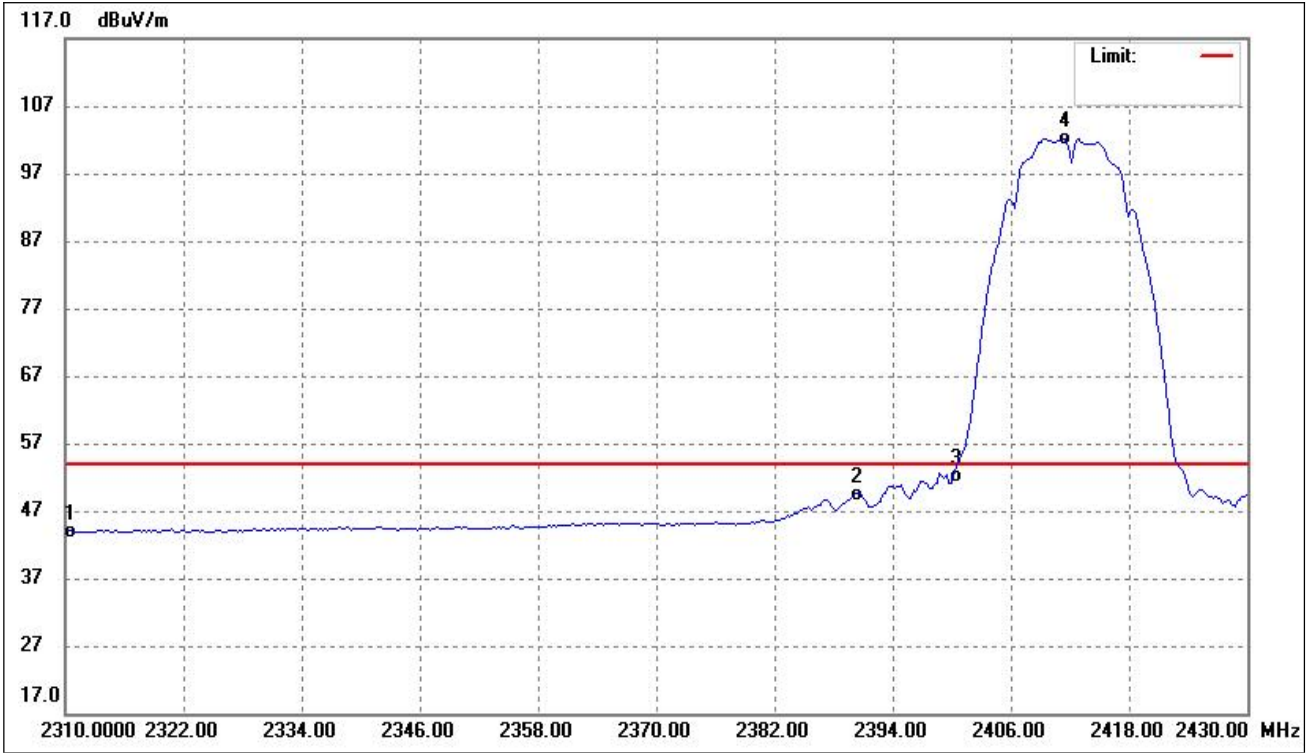

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.67	0.33	44.00	54.00	-10.00	Average Detector
		55.67	0.33	56.00	74.00	-18.00	Peak Detector
2	2390.000	48.76	0.51	49.27	54.00	-4.73	Average Detector
		59.47	0.51	59.98	74.00	-14.02	Peak Detector
3	2400.000	51.51	0.52	52.03	Delta=50.11dBc		Average Detector
4	2411.242	101.59	0.55	102.14			Peak Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.222	97.99	0.66	98.65	/	/	Average Detector
	2460.421	102.68	0.66	103.34	/	/	Peak Detector
2	2483.500	47.90	0.71	48.61	54.00	-5.39	Average Detector
	2483.500	58.77	0.71	59.48	74.00	-14.52	Peak Detector
3	2500.000	43.67	0.75	44.42	54.00	-9.58	Average Detector
	2500.000	55.92	0.75	56.67	74.00	-17.33	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)




No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.44	0.33	43.77	54.00	-10.23	Average Detector
		55.65	0.33	55.98			74.00
2	2390.000	48.66	0.51	49.17	54.00	-4.83	Average Detector
		65.33	0.51	65.84			74.00
3	2400.000	56.68	0.52	57.20	Delta=39.42dBc		Average Detector
4	2406.914	96.07	0.55	96.62			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

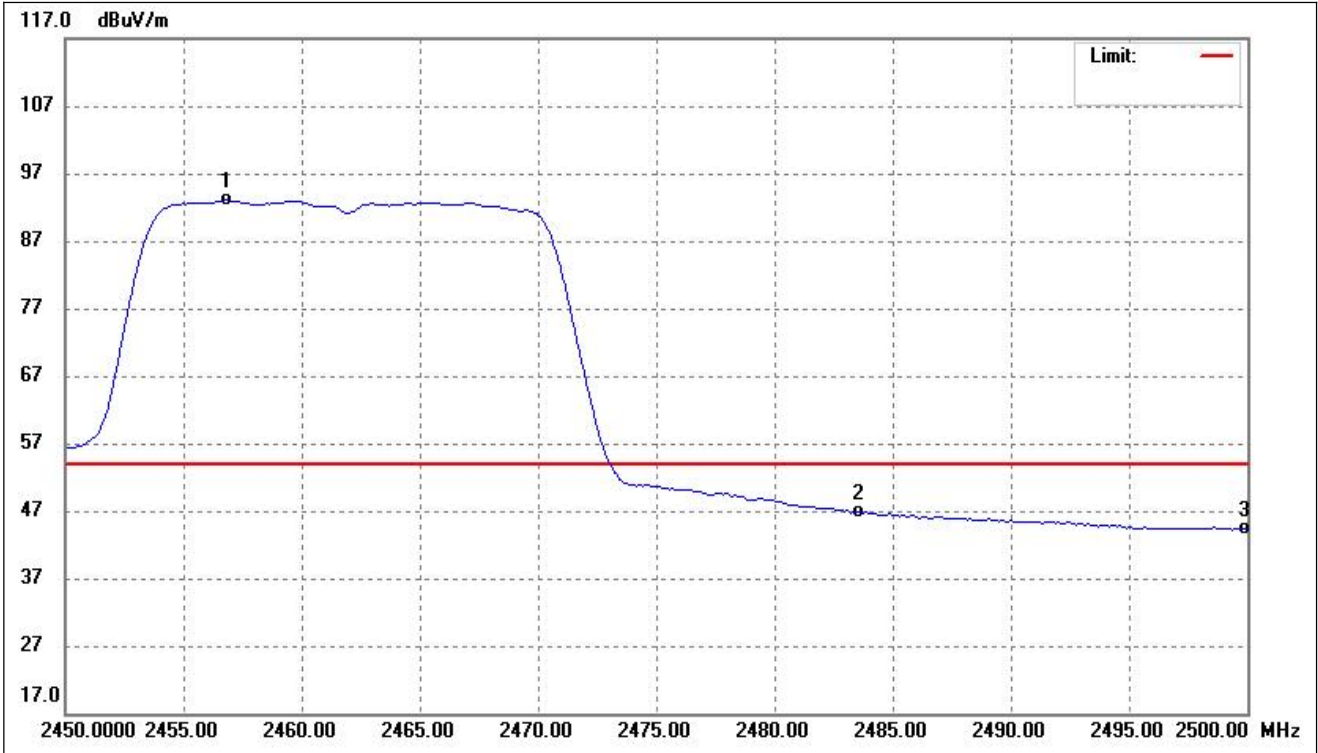

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.814	92.37	0.65	93.02	/	/	Average Detector
	2457.214	103.69	0.66	104.35	/	/	Peak Detector
2	2483.500	46.17	0.71	46.88	54.00	-7.12	Average Detector
	2483.500	61.29	0.71	62.00	74.00	-12.00	Peak Detector
3	2500.000	43.64	0.75	44.39	54.00	-9.61	Average Detector
	2500.000	56.20	0.75	56.95	74.00	-17.05	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

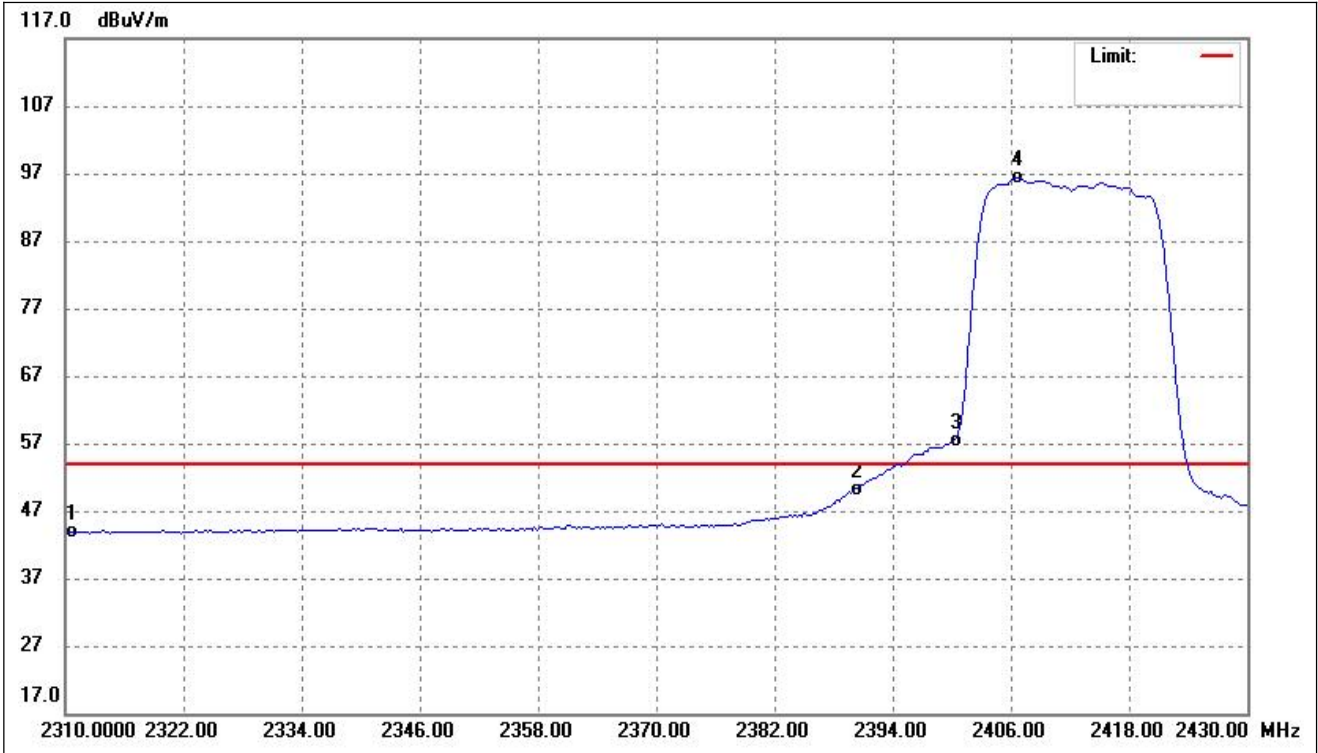

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.43	0.33	43.76	54.00	-10.24	Average Detector
		55.44	0.33	55.77			74.00
2	2390.000	49.60	0.51	50.11	54.00	-3.89	Average Detector
		67.07	0.51	67.58			74.00
3	2400.000	56.98	0.52	57.50	Delta=38.82dBc		Average Detector
4	2406.673	95.78	0.54	96.32			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.613	92.17	0.65	92.82	/	/	Average Detector
	2457.816	103.50	0.66	104.16	/	/	Peak Detector
2	2483.500	46.34	0.71	47.05	54.00	-6.95	Average Detector
	2483.500	58.64	0.71	59.35	74.00	-14.65	Peak Detector
3	2500.000	43.52	0.75	44.27	54.00	-9.73	Average Detector
	2500.000	56.09	0.75	56.84	74.00	-17.16	Peak Detector

➤ Conducted test

**Please refer to Appendix D**


## 9. Conducted Emissions

### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

### 9.2 Basic Test Setup Block Diagram

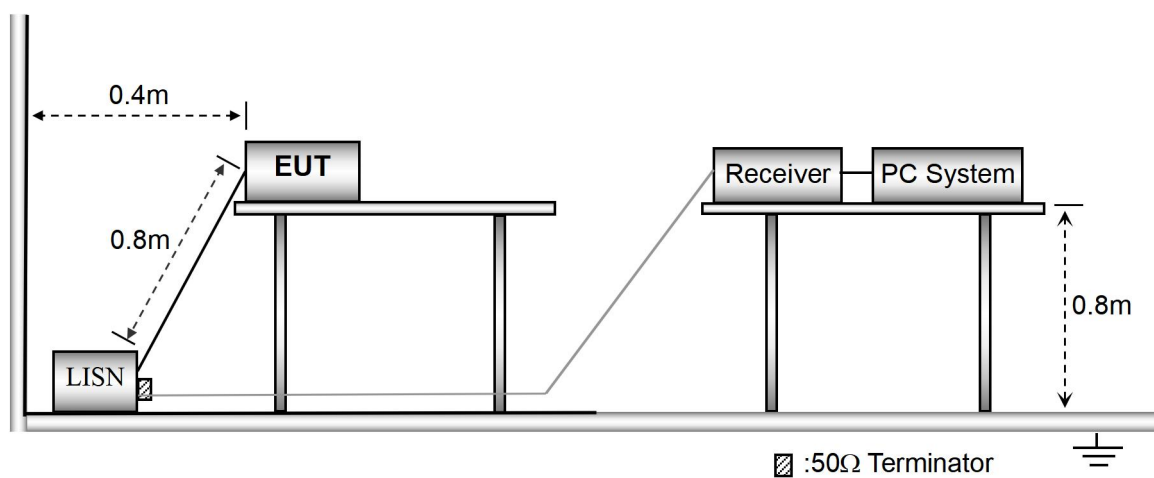


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal

### 9.4 Summary of Test Results/Plots


Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

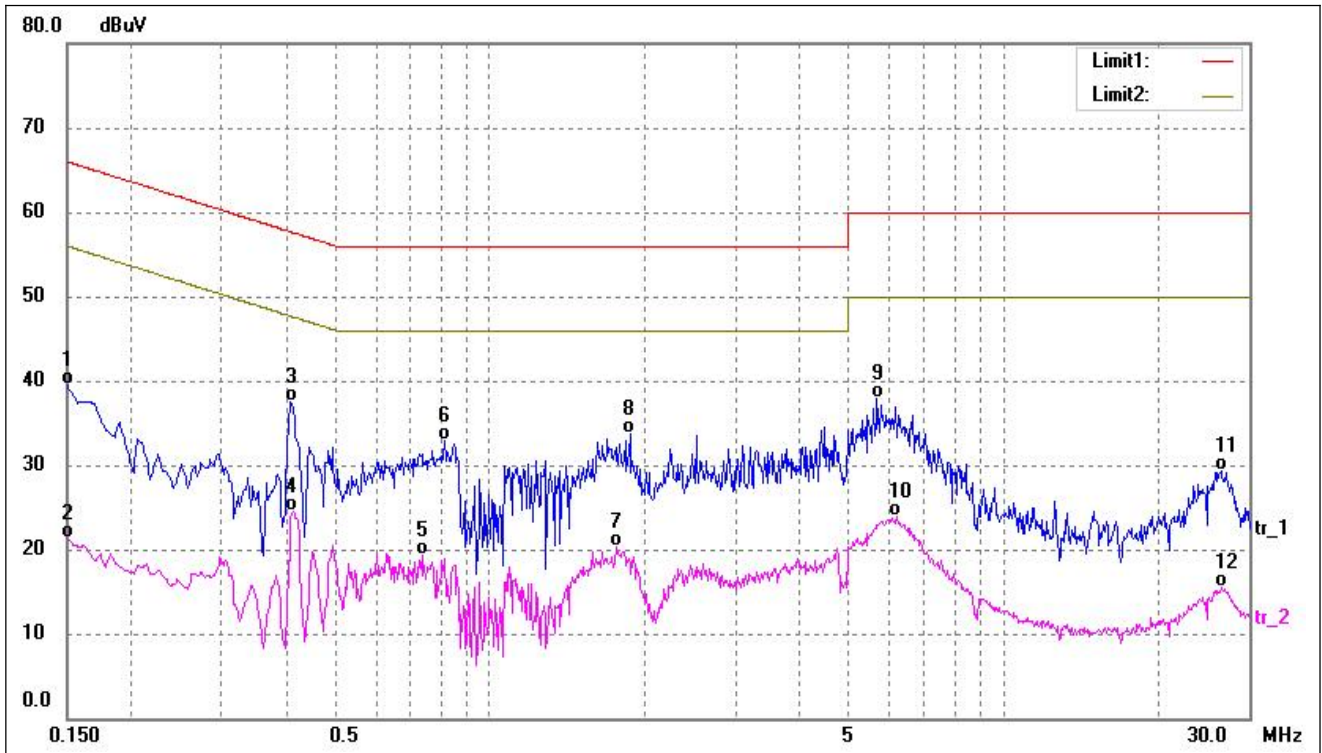

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	29.05	10.36	39.41	65.99	-26.58	QP
2	0.1500	11.01	10.36	21.37	55.99	-34.62	AVG
3*	0.4100	27.31	10.23	37.54	57.65	-20.11	QP
4	0.4140	14.34	10.23	24.57	47.57	-23.00	AVG
5	0.7380	9.11	10.19	19.30	46.00	-26.70	AVG
6	0.8139	22.74	10.18	32.92	56.00	-23.08	QP
7	1.7620	10.45	9.95	20.40	46.00	-25.60	AVG
8	1.8700	23.69	9.92	33.61	56.00	-22.39	QP
9	5.6620	27.67	10.27	37.94	60.00	-22.06	QP
10	6.2140	13.69	10.28	23.97	50.00	-26.03	AVG
11	26.4620	19.02	10.38	29.40	60.00	-30.60	QP
12	26.4620	5.20	10.38	15.58	50.00	-34.42	AVG



Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

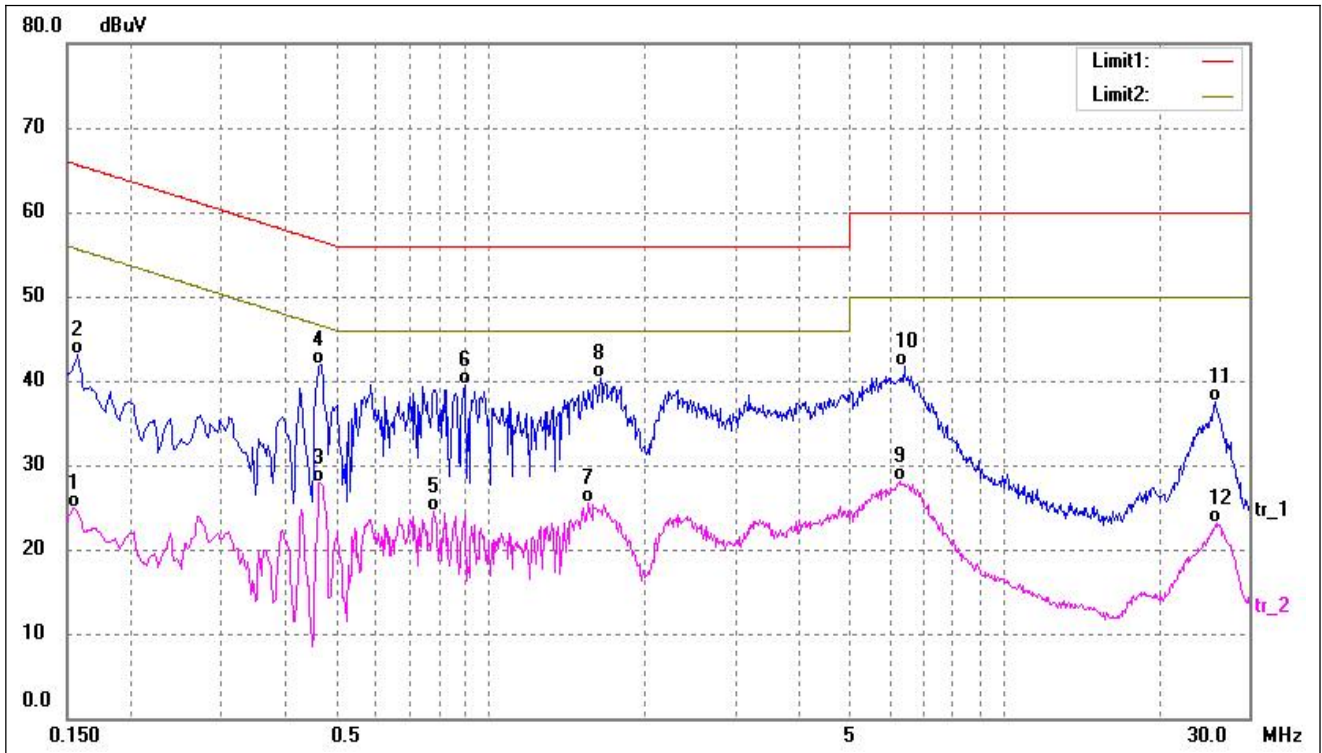

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	14.58	10.36	24.94	55.78	-30.84	AVG
2	0.1580	32.69	10.35	43.04	65.56	-22.52	QP
3	0.4660	17.73	10.23	27.96	46.58	-18.62	AVG
4*	0.4700	31.68	10.23	41.91	56.51	-14.60	QP
5	0.7780	14.28	10.18	24.46	46.00	-21.54	AVG
6	0.8900	29.32	10.17	39.49	56.00	-16.51	QP
7	1.5540	15.46	10.01	25.47	46.00	-20.53	AVG
8	1.6420	30.23	9.98	40.21	56.00	-15.79	QP
9	6.2699	17.75	10.28	28.03	50.00	-21.97	AVG
10	6.4179	31.48	10.28	41.76	60.00	-18.24	QP
11	25.7620	27.03	10.38	37.41	60.00	-22.59	QP
12	25.9140	12.70	10.38	23.08	50.00	-26.92	AVG

## APPENDIX SUMMARY




---




Project No.	WTX24X06144508W	Test Engineer	Timi Huang
Start date	2024/6/25	Finish date	2024/6/25
Temperature	23°C	Humidity	54%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

**APPENDIX A**

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	0.515	8
	2437	3.924	8
	2462	3.403	8
802.11g_54Mbps	2412	-4.327	8
	2437	-4.146	8
	2462	-3.815	8
802.11n-HT20_MCS7	2412	-5.207	8
	2437	-4.526	8
	2462	-4.115	8

<p>802.11b-Low</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.41200 GHz</p> <p>#Res BW 30 kHz</p> <p>Mkr1 2.410 86 GHz 0.515 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p> <p>RBW Control [Gaussian, -3 dB]</p>
<p>802.11b-Middle</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.43700 GHz</p> <p>#Res BW 30 kHz</p> <p>Mkr1 2.434 99 GHz 3.924 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p> <p>RBW Control [Gaussian, -3 dB]</p>
<p>802.11b-High</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.46200 GHz</p> <p>#Res BW 30 kHz</p> <p>Mkr1 2.459 99 GHz 3.403 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p> <p>RBW Control [Gaussian, -3 dB]</p>
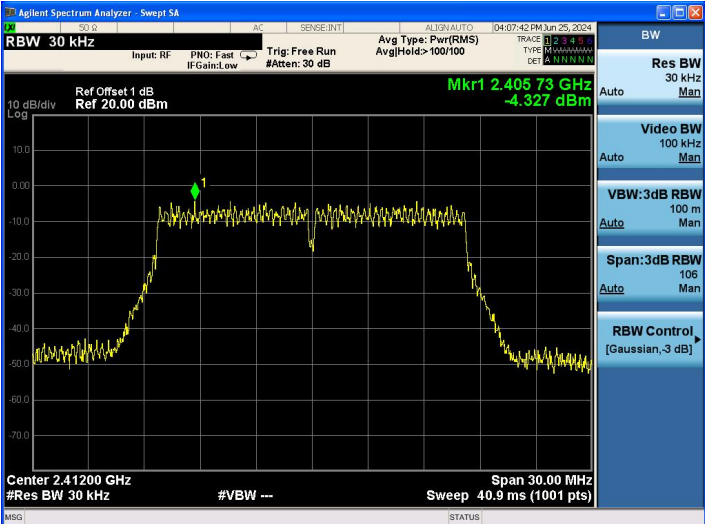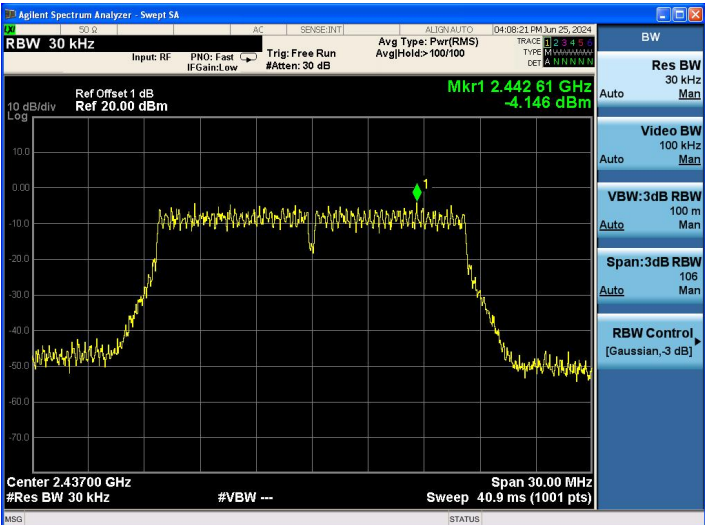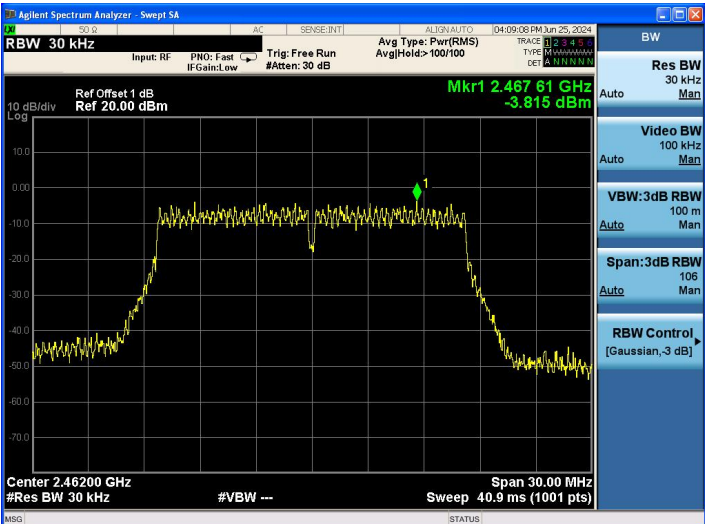
<p>802.11g-Low</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.41200 GHz</p> <p>Mkr1 2.405 73 GHz -4.327 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>
<p>802.11g-Middle</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.43700 GHz</p> <p>Mkr1 2.442 61 GHz -4.146 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>
<p>802.11g-High</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.46200 GHz</p> <p>Mkr1 2.467 61 GHz -3.815 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>

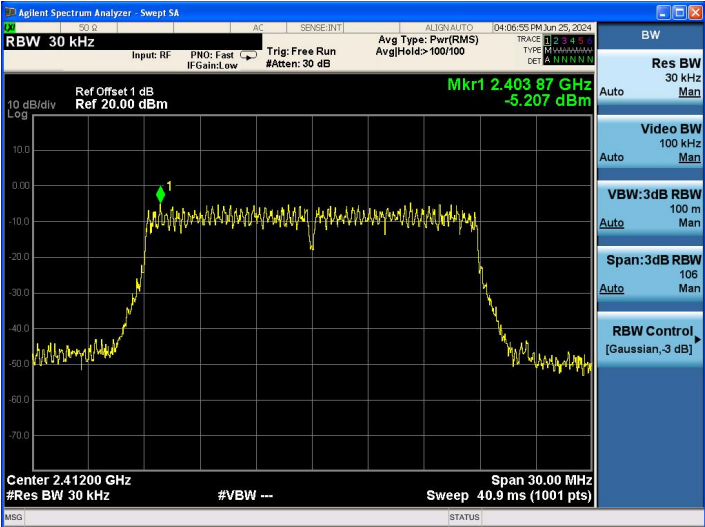
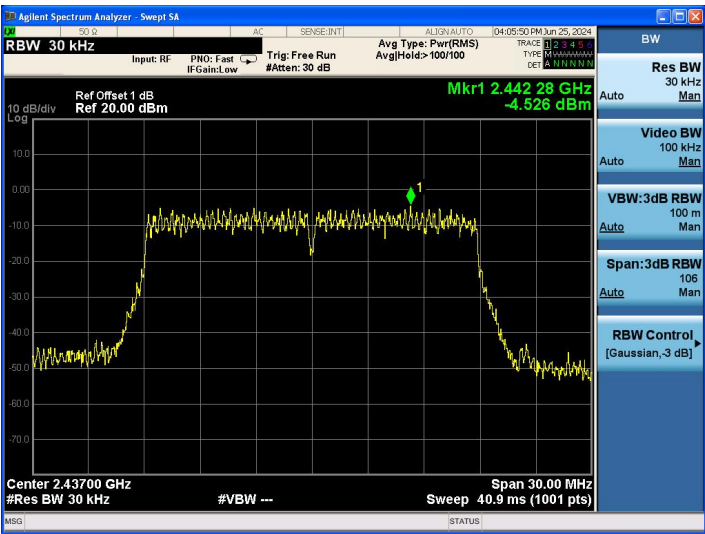
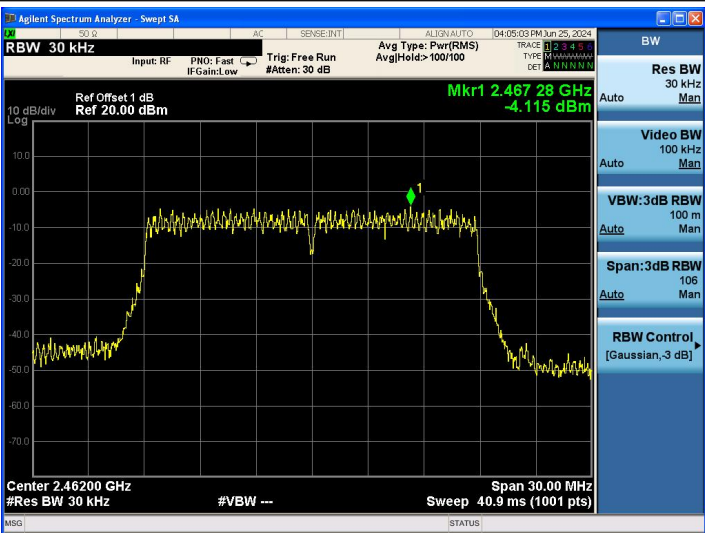
<p>802.11n-HT20-Low</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.41200 GHz</p> <p>Mkr1 2.403 87 GHz -5.207 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.43700 GHz</p> <p>Mkr1 2.442 28 GHz -4.526 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>RBW 30 kHz</p> <p>Center 2.46200 GHz</p> <p>Mkr1 2.467 28 GHz -4.115 dBm</p> <p>Span 30.00 MHz</p> <p>Sweep 40.9 ms (1001 pts)</p>




**APPENDIX B**

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.12	≥500
	2437	10.12	≥500
	2462	10.10	≥500
802.11g_54Mbps	2412	16.38	≥500
	2437	16.38	≥500
	2462	16.39	≥500
802.11n-HT20_MCS7	2412	17.08	≥500
	2437	17.07	≥500
	2462	17.08	≥500

<p>802.11b-Low</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Occupied Bandwidth: 13.213 MHz</p> <p>Total Power: 22.19 dBm</p> <p>Transmit Freq Error: 9.492 kHz</p> <p>x dB Bandwidth: 10.12 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>802.11b-Middle</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Occupied Bandwidth: 13.190 MHz</p> <p>Total Power: 22.00 dBm</p> <p>Transmit Freq Error: 15.291 kHz</p> <p>x dB Bandwidth: 10.12 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>802.11b-High</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Occupied Bandwidth: 13.256 MHz</p> <p>Total Power: 22.42 dBm</p> <p>Transmit Freq Error: 13.556 kHz</p> <p>x dB Bandwidth: 10.10 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>

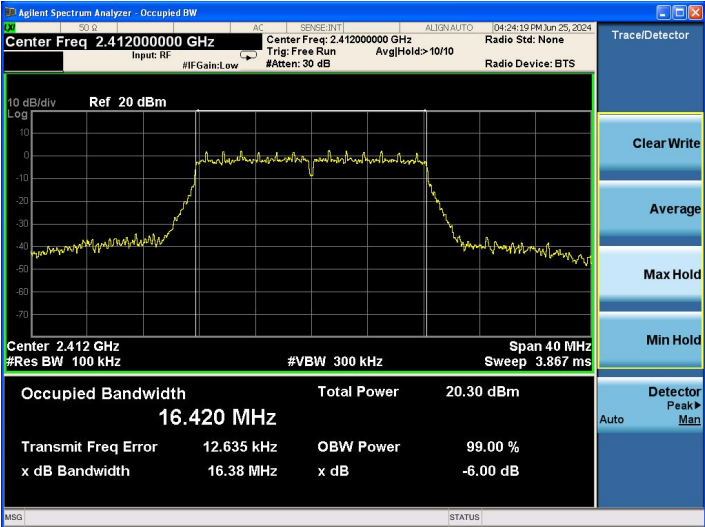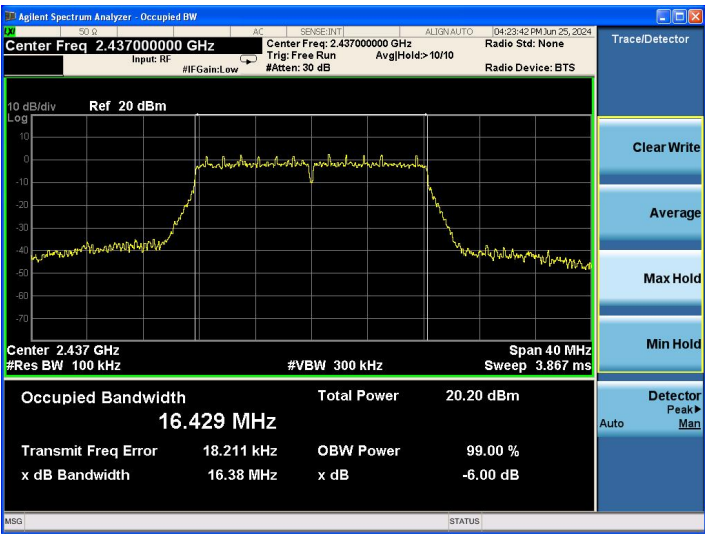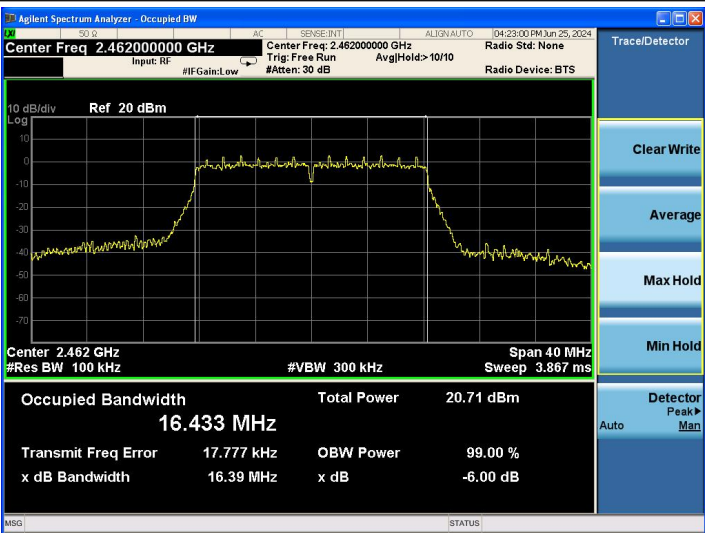

<p>802.11g-Low</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz          Center Freq: 2.41200000 GHz          Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center: 2.412 GHz Span 40 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.420 MHz Total Power 20.30 dBm</p> <p>Transmit Freq Error 12.635 kHz OBW Power 99.00 %          x dB Bandwidth 16.38 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>
<p>802.11g-Middle</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz          Center Freq: 2.43700000 GHz          Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center: 2.437 GHz Span 40 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.429 MHz Total Power 20.20 dBm</p> <p>Transmit Freq Error 18.211 kHz OBW Power 99.00 %          x dB Bandwidth 16.38 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>
<p>802.11g-High</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz          Center Freq: 2.46200000 GHz          Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Std: None          Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center: 2.462 GHz Span 40 MHz          #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.433 MHz Total Power 20.71 dBm</p> <p>Transmit Freq Error 17.777 kHz OBW Power 99.00 %          x dB Bandwidth 16.39 MHz x dB -6.00 dB</p> <p>MSG STATUS</p>

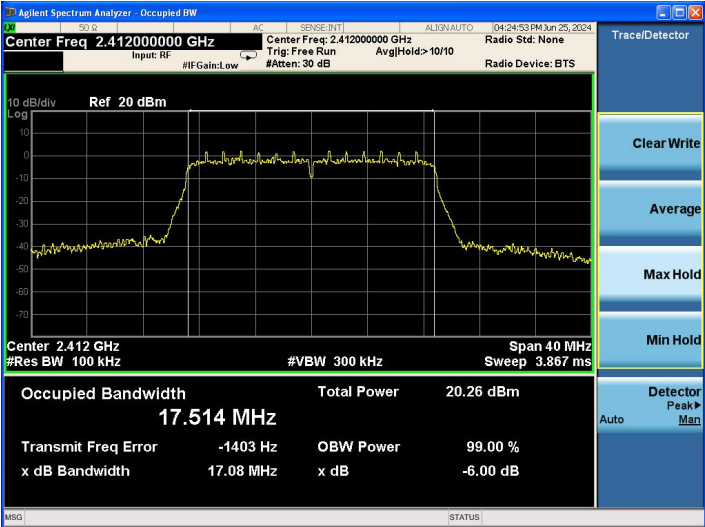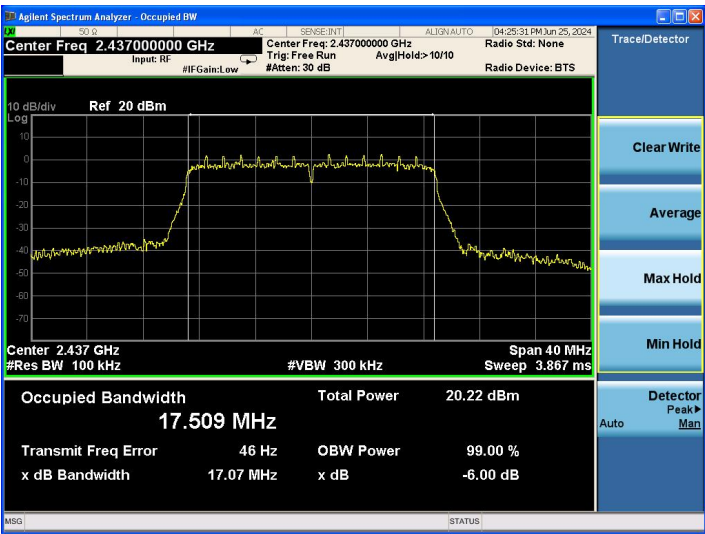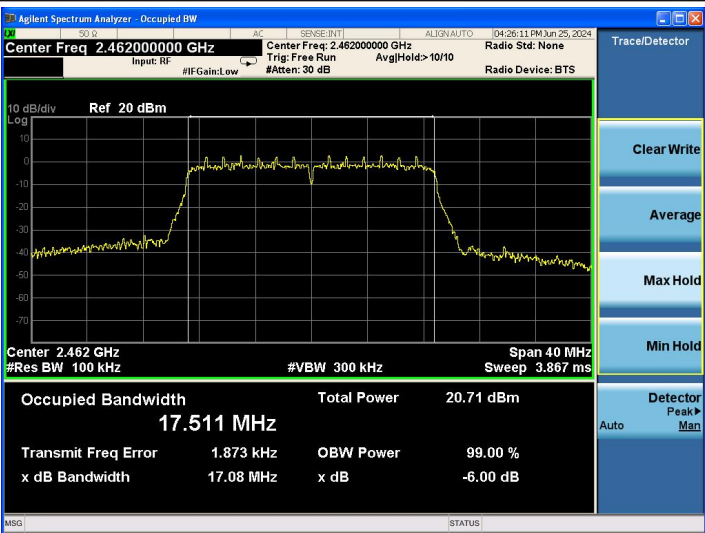


<p>802.11n-HT20-Low</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Radio Std: None      Input: RF #IFGain:Low #Atten: 30 dB Avg Hold&gt; 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.412 GHz Span 40 MHz      #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.514 MHz Total Power 20.26 dBm</p> <p>Transmit Freq Error -1403 Hz OBW Power 99.00 %      x dB Bandwidth 17.08 MHz x dB -6.00 dB</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None      Input: RF #IFGain:Low #Atten: 30 dB Avg Hold&gt; 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.437 GHz Span 40 MHz      #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.509 MHz Total Power 20.22 dBm</p> <p>Transmit Freq Error 46 Hz OBW Power 99.00 %      x dB Bandwidth 17.07 MHz x dB -6.00 dB</p>
<p>802.11n-HT20-High</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None      Input: RF #IFGain:Low #Atten: 30 dB Avg Hold&gt; 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.462 GHz Span 40 MHz      #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.511 MHz Total Power 20.71 dBm</p> <p>Transmit Freq Error 1.873 kHz OBW Power 99.00 %      x dB Bandwidth 17.08 MHz x dB -6.00 dB</p>



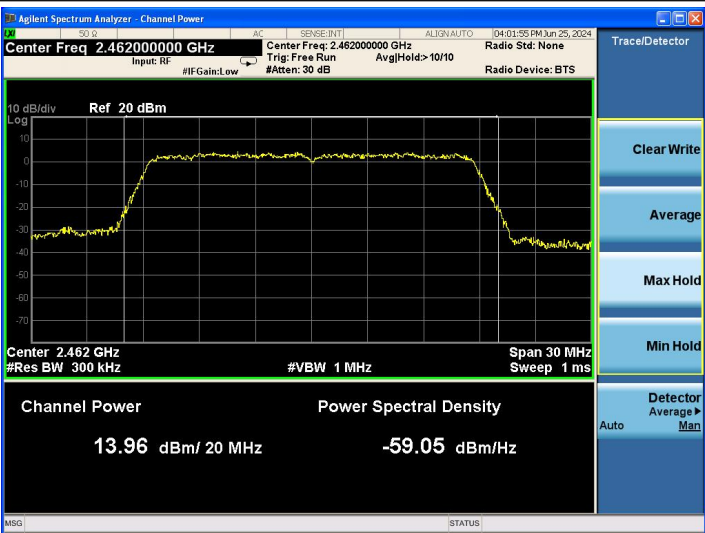
**APPENDIX C**

---

<b>Test Mode</b>	<b>Frequency MHz</b>	<b>Reading dBm</b>	<b>Limit dBm</b>
802.11b _ 11Mbps	2412	15.73	30.00
	2437	15.51	30.00
	2462	16.04	30.00
802.11g_54Mbps	2412	13.75	30.00
	2437	13.66	30.00
	2462	14.12	30.00
802.11n HT20_MCS7	2412	13.52	30.00
	2437	13.47	30.00
	2462	13.96	30.00

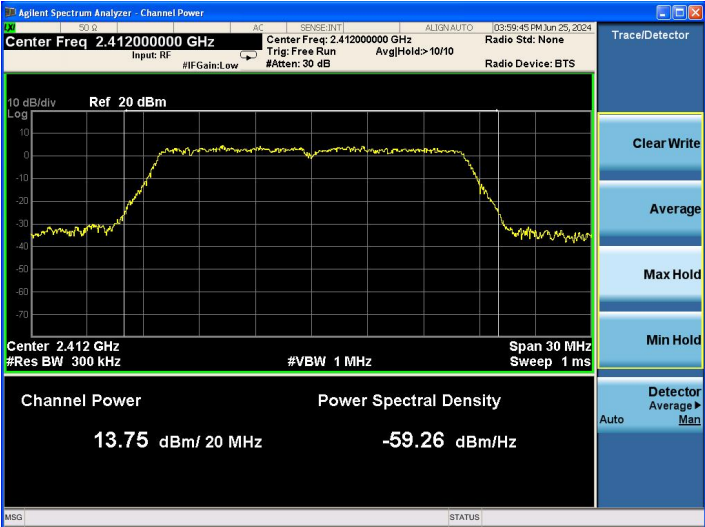


<p>802.11b-Low</p>	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Sweep Time 1.00 ms Center Freq: 2.41200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power: 15.73 dBm/20 MHz</p> <p>Power Spectral Density: -57.28 dBm/Hz</p>
<p>802.11b-Middle</p>	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power: 15.51 dBm/20 MHz</p> <p>Power Spectral Density: -57.50 dBm/Hz</p>
<p>802.11b-High</p>	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power: 16.04 dBm/20 MHz</p> <p>Power Spectral Density: -56.97 dBm/Hz</p>

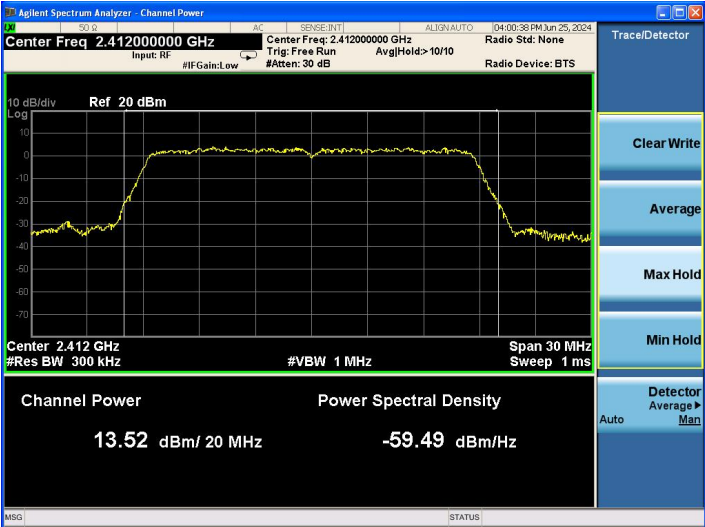
<p>802.11g-Low</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 13.75 dBm/ 20 MHz</p> <p>Power Spectral Density -59.26 dBm/Hz</p>
<p>802.11g-Middle</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 13.66 dBm/ 20 MHz</p> <p>Power Spectral Density -59.35 dBm/Hz</p>
<p>802.11g-High</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 14.12 dBm/ 20 MHz</p> <p>Power Spectral Density -58.89 dBm/Hz</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 13.52 dBm/20 MHz Power Spectral Density -59.49 dBm/Hz</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 13.47 dBm/20 MHz Power Spectral Density -59.54 dBm/Hz</p>
<p>802.11n-HT20-High</p>	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None</p> <p>Input: RF #IFGain: Low #Atten: 30 dB Avg Hold: 10/10 Radio Device: BTS</p> <p>10 dB/div Ref 20 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 1 ms</p> <p>Channel Power 13.96 dBm/20 MHz Power Spectral Density -59.05 dBm/Hz</p>

# APPENDIX D


## Conducted Out of Band Emissions
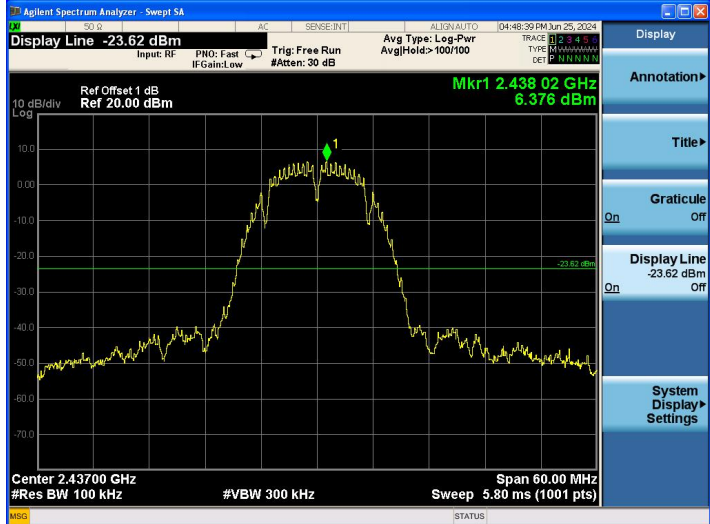
<p>802.11b-Low</p>	
	
<p>802.11b-Middle</p>	

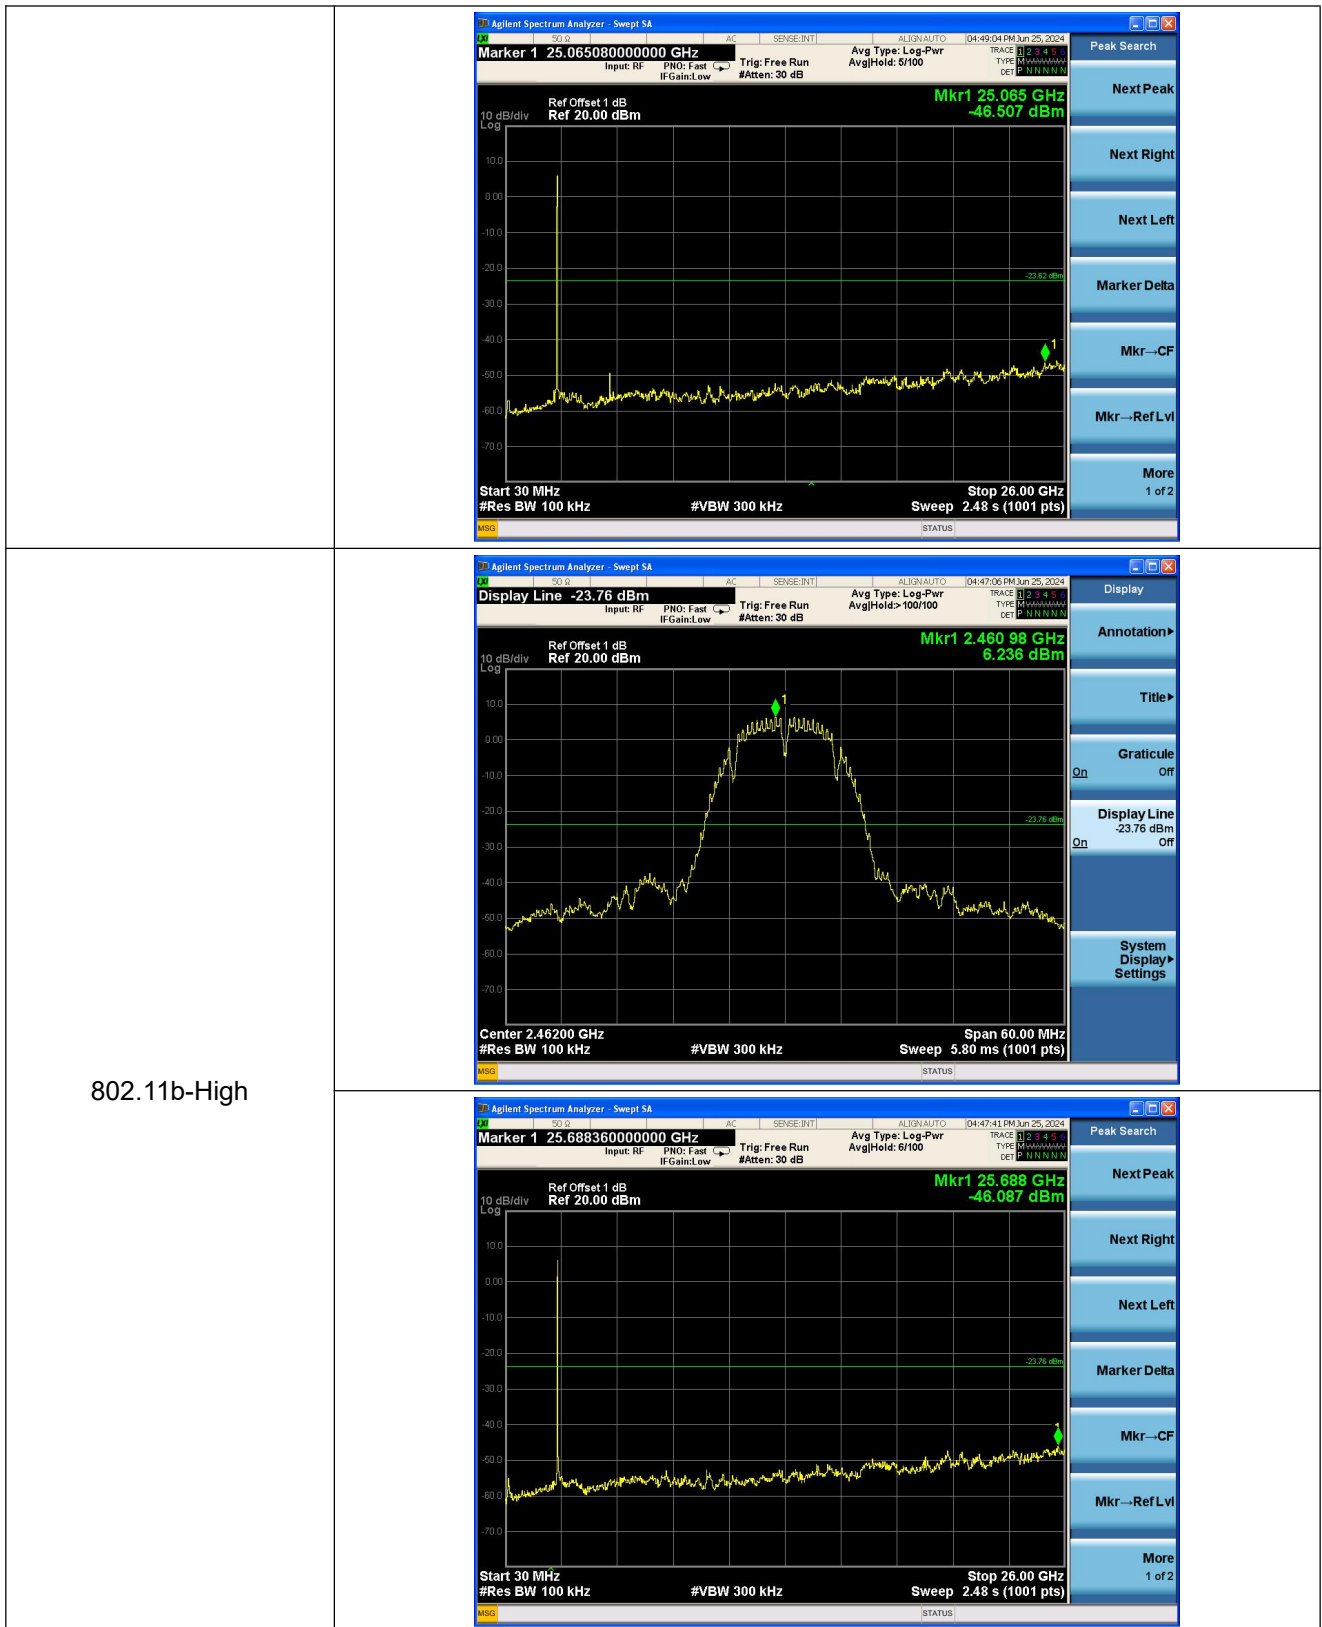



802.11g-Low

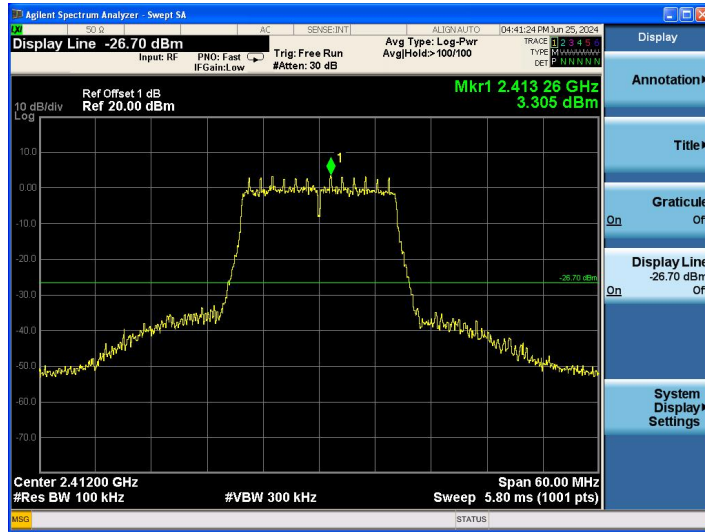

802.11g-Middle

