



Shenzhen Lxc Electronics Technology Co ., Ltd

APPROVAL SHEET
For
DONGGUAN CE LINK LIMITED
IPC-14NS-ZT project
Antenna componentst

频率范围(Frequency range)	WIFI:2400-2500 (MHz)
驻波比系数(VSWR)	<2.0
输入阻抗(Input Impedance)	50 (Ω)
极化方式(Polarization)	垂直极化 Vertical Polarization
半功率波束 (3dB) HPW	180° H-plane 120° E-plane
天线类型(Antenna type)	内置 FPC 天线 (Built-in FPC antenna)
天线增益峰值(Antenna gain MAX (dBi)	2DBi
天线供应商 (Antenna supplier)	Shenzhen Lxc Electronics Technology Co ., Ltd
天线制造商地址 (Antenna manufacturer address)	4 / F, Building C, Jinruihua Industrial Park, No.12 Huafang Road, Dalang Street, Longhua District, Shenzhen
天线型号 (Antenna Model)	LXC-FPC-088

RF by		Checked by	
ME by		Date	2023-06-30
Customer Confirm			

Project:WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30		Check: Wang	
TEST:	Language:		
A	English		
Shenzhen Lxc Electronics Technology Co ., Ltd			

Revision History

Date	Revision	Description of Changes
2023-06-30	RA	Measured with FPC sample.

1 TECHNICAL SUMMARY	3
2 GENERAL DESCRIPTION	3
2.1 Components/Part revisions	3
3 MECHANICAL DESCRIPTION	3
4 ELECTRICAL PERFORMANCE	3
4.1 Set-up	3
4.1.1 VSWR	3
4.1.2 Gain & Radiation Patterns	3
5 PLOTS	4
6 MECHANICAL DRAWING	7
7 RELIABILITY TESTS	7
7.1 Test content	7
7.2 Test results	8
8 CONCLUSION	8

Project: WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co., Ltd			

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the WIFI program. We test the antenna with the latest version handset. And it seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S21) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.


4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the HUMAN's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 800 MHz through 3 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.


Project: WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co., Ltd			

5 Plots

5.1 VSWR (S11)

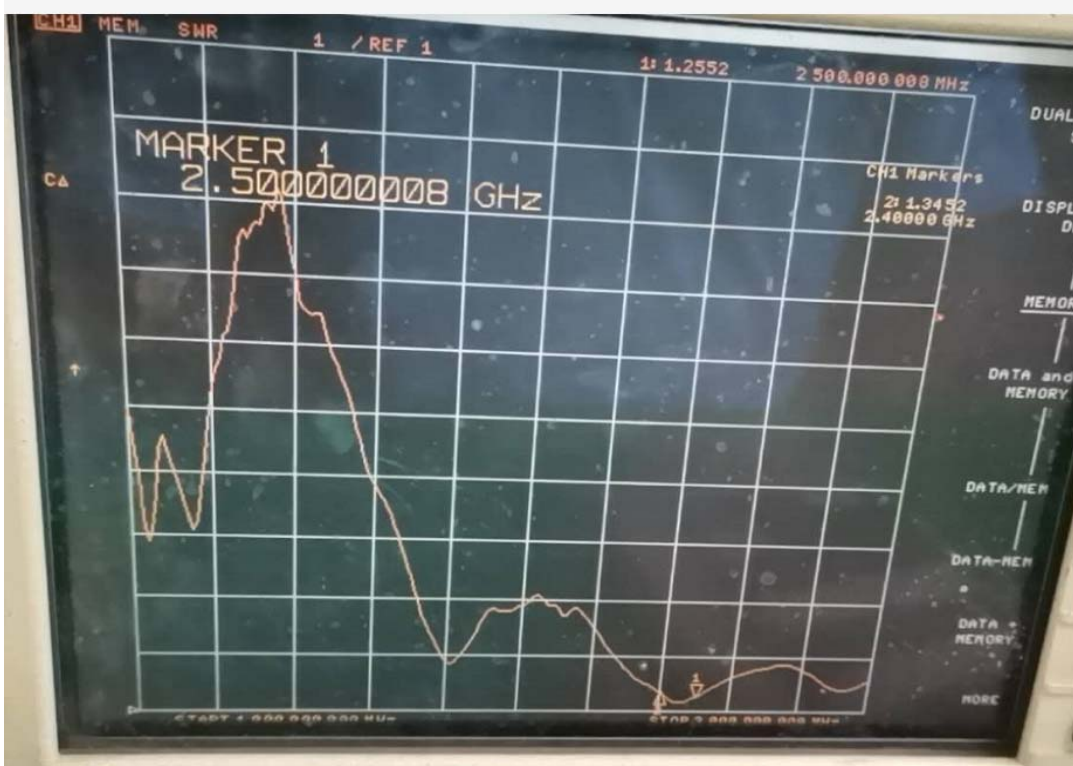

LOG MAG (S11)

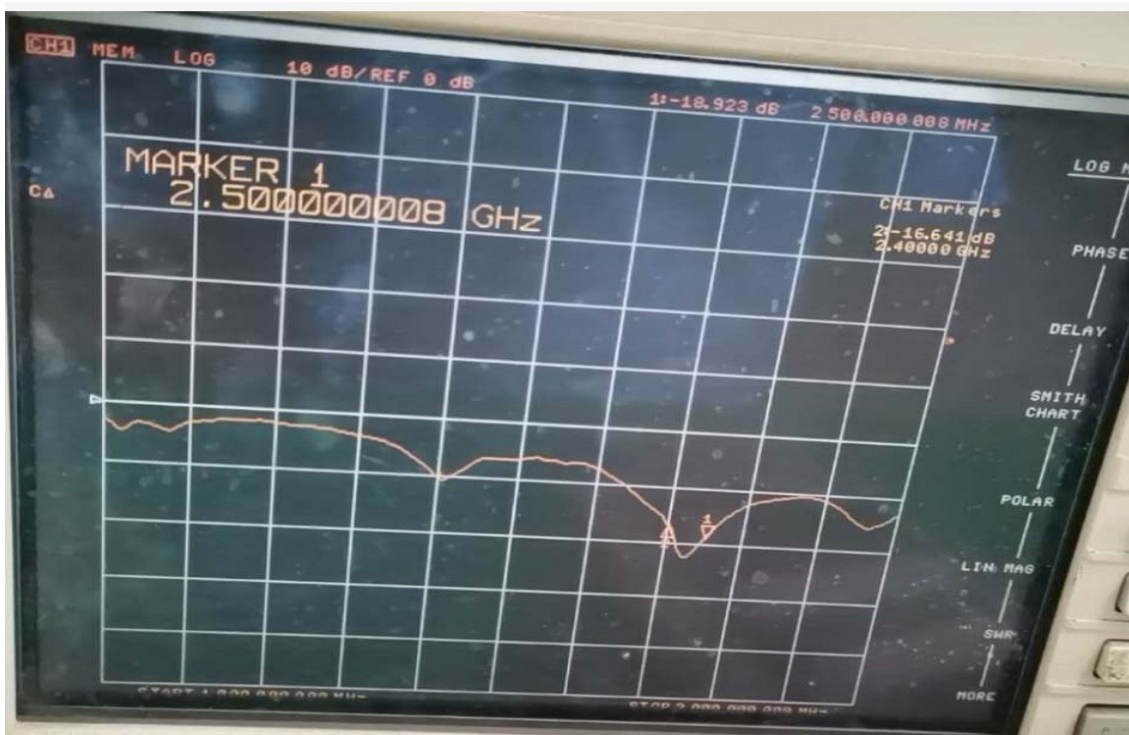

Project:WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co., Ltd			





5.2 Gain efficiency
2400-2480 (MHz)

Freq(MHz)	Effi(%)	Gain(dBi)
2400	53.98	1.73
2410	55.47	1.96
2420	59.65	1.88
2430	60.47	1.77
2440	60.55	1.93
2450	61.66	2.00
2460	63.19	1.94
2470	65.62	1.63
2480	64.61	1.86
2490	65.06	1.63
2500	65.86	1.72

有源测试数据
Active test data

天线测试报告 Antenna test report	802. 11B Antenna Performance Table			802. 11G Antenna Performance Table		
	CH 1	CH 6	CH11	CH 1	CH 6	CH 11
Channel						
TRP(dBm)	13. 8	13. 8	14. 3	11. 2	12. 3	12. 5
TIS(dBm)	-87. 3	-86. 3	-87. 1	-71. 4	-72. 3	-71. 3
天线测试报告 Antenna test report	802. 11N Antenna Performance Table					
	CH1	CH6	CH11			
Channel						
TRP(dBm)	11. 4	11. 8	12. 3			
TIS(dBm)	-65. 3	-65. 7	-65. 2			


Project:WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30		Check: Wang	
TEST:	Language:		
A	English		
Shenzhen Lxc Electronics Technology Co ., Ltd			

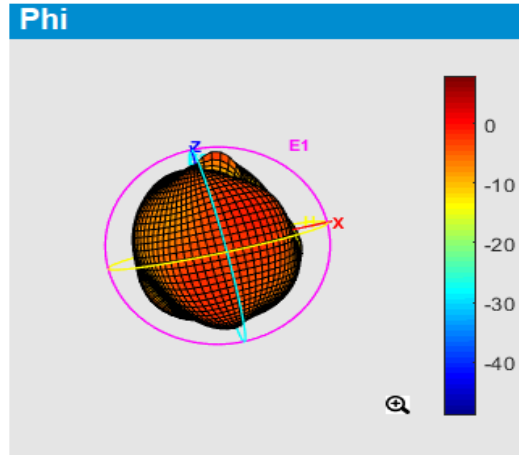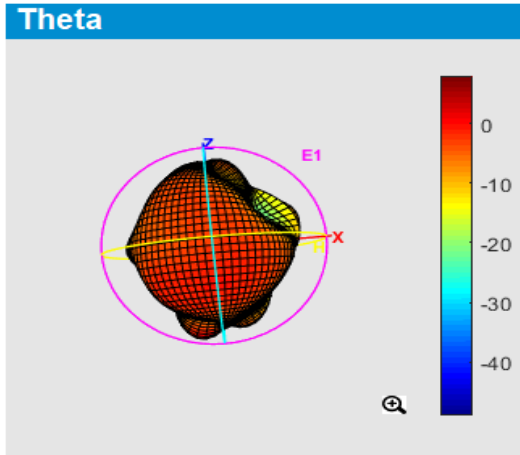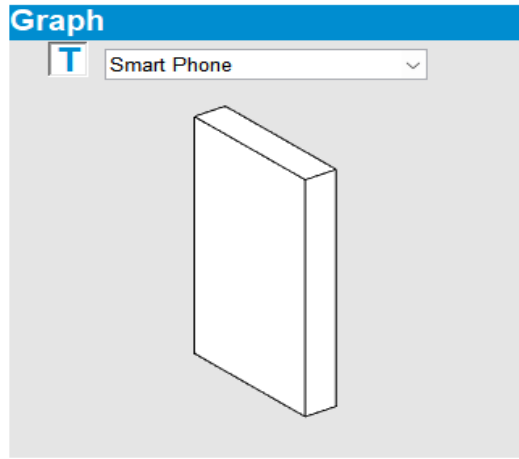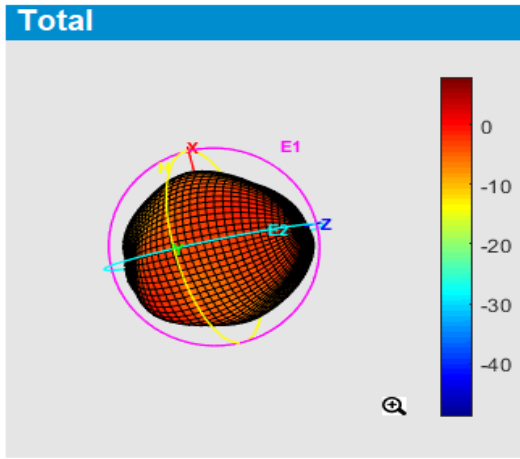

Project: WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co., Ltd			

6 Mechanical drawing

MD

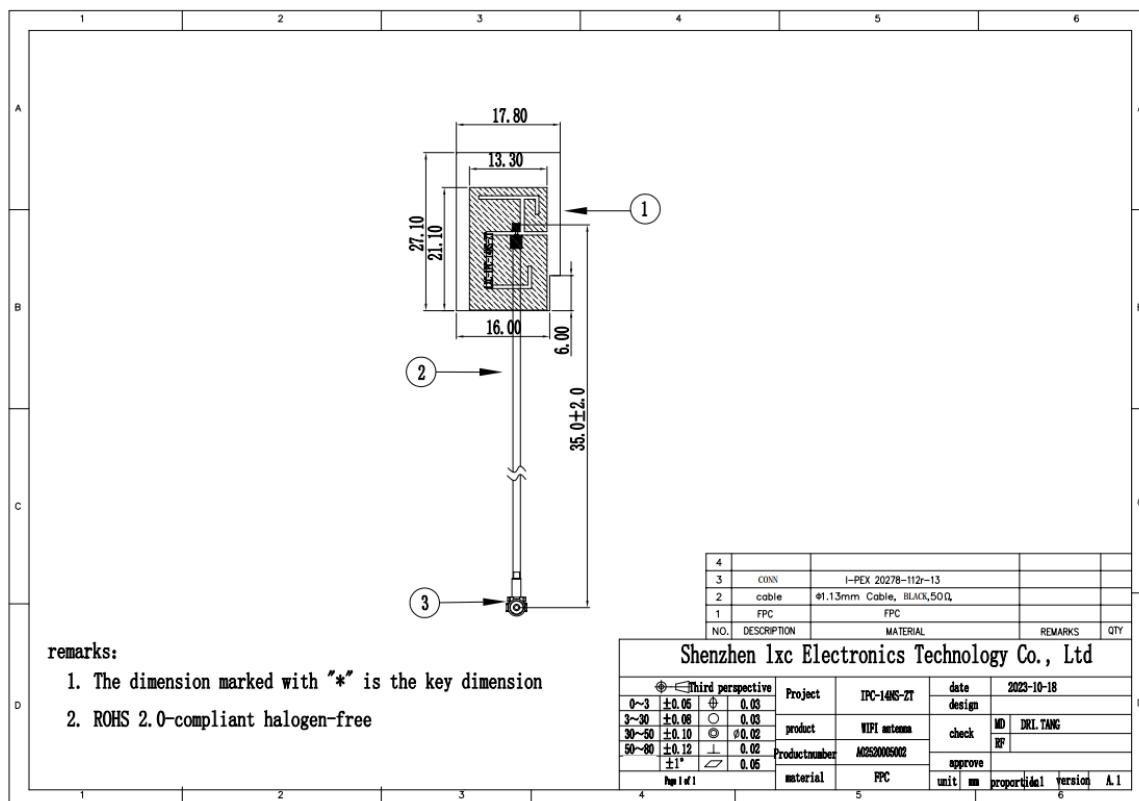

7 Reliability tests

7.1 Test content

No	试验项目 (pilot projects)	试验方法 (test mode)	判定基准 (defining principle)
1	盐水喷雾试验 (salt spray test)	把盐浓度 5% 的溶液喷雾 48HR (Spray the solution with salt concentration of 5% for 48H)	不能有变色, 歪 (变形) 脱落等的缺点 腐蚀面积不能过大 (Spray the solution with salt concentration of 5% for 48H without discoloration, deflection (deformation), falling off, etc. The corrosion area shall not be too large)
2	工作温度 (Operational Temperature)	-40°C~+65°C	
3	储存温度 (Storage Temperature)	-50°C~+85°C	
4	湿度 (Humidity)	40%~95%	

Project:WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co., Ltd			

7.2 Test results

NO	样品数 (Number of samples)	试验期间 (During the test)	实验结果 (experimental result)	备注 (remarks)
1	50	24 hour	OK	技术等级为 9 级 腐蚀<0.4mm(Remarks The technical level is Level 9 Corrosion<0.4mm)
2	50	48 hour	OK	技术等级为 9 级 腐蚀<0.4mm(Remarks The technical level is Level 9 Corrosion<0.4mm)

8 Conclusion

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Lxc Electronics Technology Co ., Ltd ,look forward to your confirmation, thank you for your cooperation !

Project: WIFI Antennae		Author: Zhu	File Name: IPC-14NS-ZT-APP-RA
Date: 2023-06-30			
TEST:	Language:	Check: Wang	
A	English		
Shenzhen Lxc Electronics Technology Co ., Ltd			