

# TEST REPORT

Reference No..... : WTX24X01018810W001  
FCC ID..... : A4X-MPP15-1LCNB-J  
Applicant..... : CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Manufacturer..... : DONGGUAN CE LINK LIMITED  
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Product Name..... : QI2 Wireless Charger  
Model No..... : MPP15-1LCNB-J  
Standards..... : FCC Part 18  
Date of Receipt sample.... : 2024-01-23  
Date of Test..... : 2024-04-22 to 2024-05-10  
Date of Issue..... : 2024-05-10  
Test Report Form No. .... : WTX\_Part 18W  
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

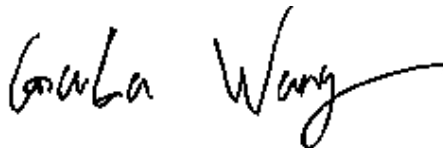

Gala Wang

Approved by:



Jason Su

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 TEST STANDARDS.....5  
1.3 TEST METHODOLOGY.....5  
1.4 TEST FACILITY.....5  
1.5 EUT SETUP AND OPERATION MODE.....6  
1.6 MEASUREMENT UNCERTAINTY.....7  
1.7 TEST EQUIPMENT LIST AND DETAILS.....8

**2. SUMMARY OF TEST RESULTS .....9**

**3. CONDUCTED EMISSIONS .....10**  
3.1 STANDARD APPLICABLE.....10  
3.2 TEST PROCEDURE.....10  
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10  
3.4 ENVIRONMENTAL CONDITIONS.....10  
3.5 TEST RECEIVER SETUP.....11  
3.6 SUMMARY OF TEST RESULTS/PLOTS.....11

**4. RADIATED EMISSIONS.....16**  
4.1 TEST PROCEDURE.....16  
4.2 TEST RECEIVER SETUP.....17  
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....17  
4.4 ENVIRONMENTAL CONDITIONS.....18  
4.5 SUMMARY OF TEST RESULTS/PLOTS.....18

**APPENDIX PHOTOGRAPHS.....24**

**Report version**

Version No.	Date of issue	Description
Rev.00	2024-05-10	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory#1: SuiChuan CE LINK LIMITED  
 Address of factory: SuiChuan county industrial park east zone, Ji'an city, Jiangxi Province, China.

Factory#2: CE LINK VIET NAM COMPANY LIMITED.  
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	QI2 Wireless Charger
Trade Name:	CE-LINK
Model No.:	MPP15-1LCNB-J
Adding Model(s):	CQIP15-CHA
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MPP15-1LCNB-J, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110-205kHz@5W 127.85/359.99kHz@15W
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Voltage:	Input: DC5V/9V
Rated Current:	Input: 3A/2.22A
Rated Power:	Output: 5W/15W

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Part 18 Subpart C**: Industrial, Scientific, and medical medical equipment.

**ANSI C63.4-2014**: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

***Maintenance of compliance*** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the Adapter	AC120V 60Hz for adapter, Wireless Charging (5W)
TM2	Wireless Charging	Connect to the Adapter	AC120V 60Hz for adapter, Wireless Charging (15W)

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	1.5	Shielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	Iotie	CHCRIO160	/
Wireless Charging Load	YBZ	YBZ wireless charging tester	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74$ dB
		0.15-30MHz $\pm 3.34$ dB
Radiated Emissions	Radiated	30-200MHz $\pm 4.52$ dB
		0.2-1GHz $\pm 5.56$ dB
		1-6GHz $\pm 3.84$ dB
		6-18GHz $\pm 3.92$ dB

## 1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2024-02-24	2025-02-23
EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
Amplifier	HP	8447F	2805A0347 5	2024-02-24	2025-02-23
Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
Amplifier	Agilent	8447D	2944A1045 7	2024-02-24	2025-02-23
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

\*Remark: indicates software version used in the compliance certification testing



## 2. SUMMARY OF TEST RESULTS

---

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

### 3. Conducted Emissions

#### 3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

#### 3.3 Basic Test Setup Block Diagram

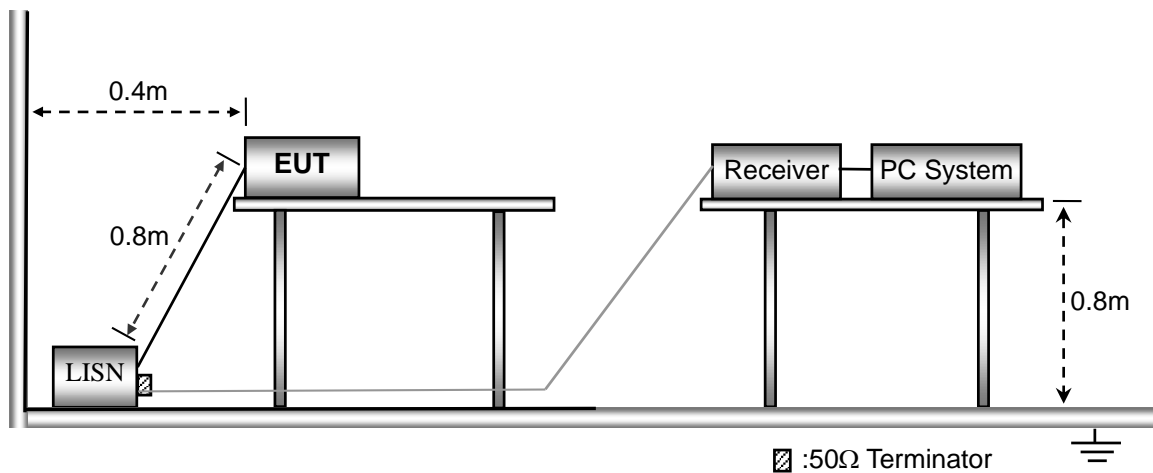

#### 3.4 Environmental Conditions

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1016 mbar


### 3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth .....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


### 3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

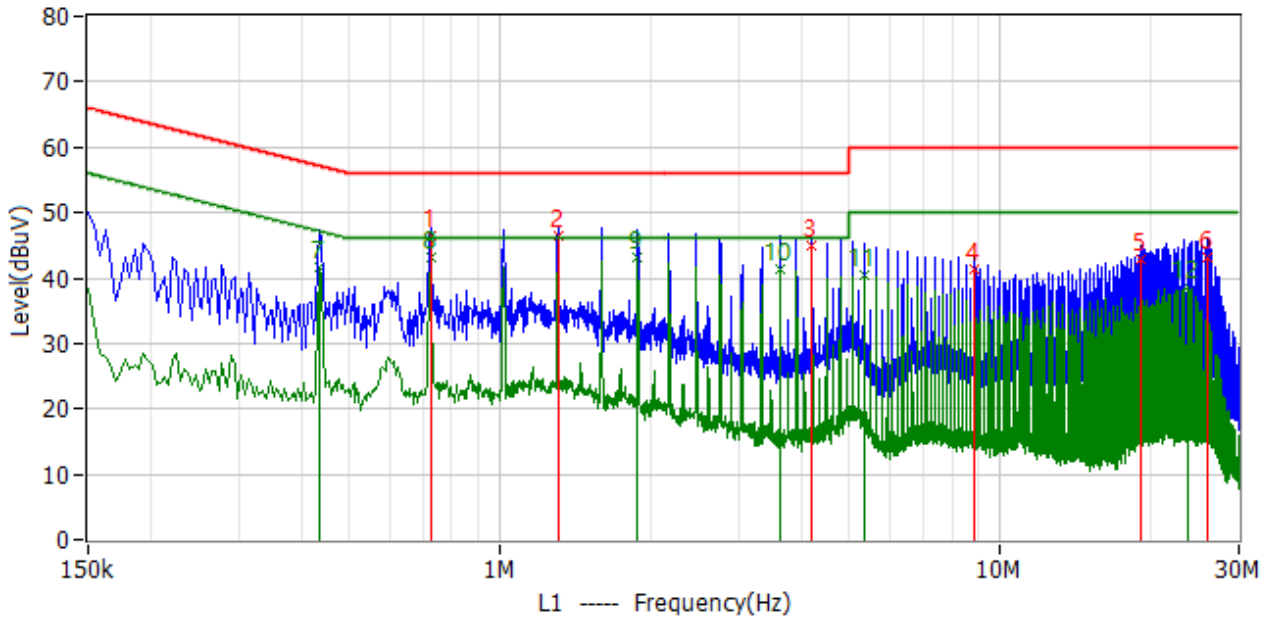


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	726.000kHz	36.7	9.8	46.5	56.0	-9.5	QP
2	1.306MHz	36.7	9.8	46.5	56.0	-9.5	QP
3	4.206MHz	35.1	9.9	45.0	56.0	-11.0	QP
4	8.846MHz	31.5	9.8	41.3	60.0	-18.7	QP
5	19.142MHz	32.7	10.0	42.7	60.0	-17.3	QP
6	25.958MHz	33.1	10.0	43.1	60.0	-16.9	QP
7*	434.000kHz	31.7	9.8	41.5	47.2	-5.7	AV
8*	726.000kHz	33.2	9.8	43.0	46.0	-3.0	AV
9*	1.886MHz	33.4	9.8	43.2	46.0	-2.8	AV
10*	3.626MHz	31.4	9.9	41.3	46.0	-4.7	AV
11*	5.366MHz	30.4	9.9	40.3	50.0	-9.7	AV
12*	23.638MHz	28.7	10.1	38.8	50.0	-11.2	AV

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

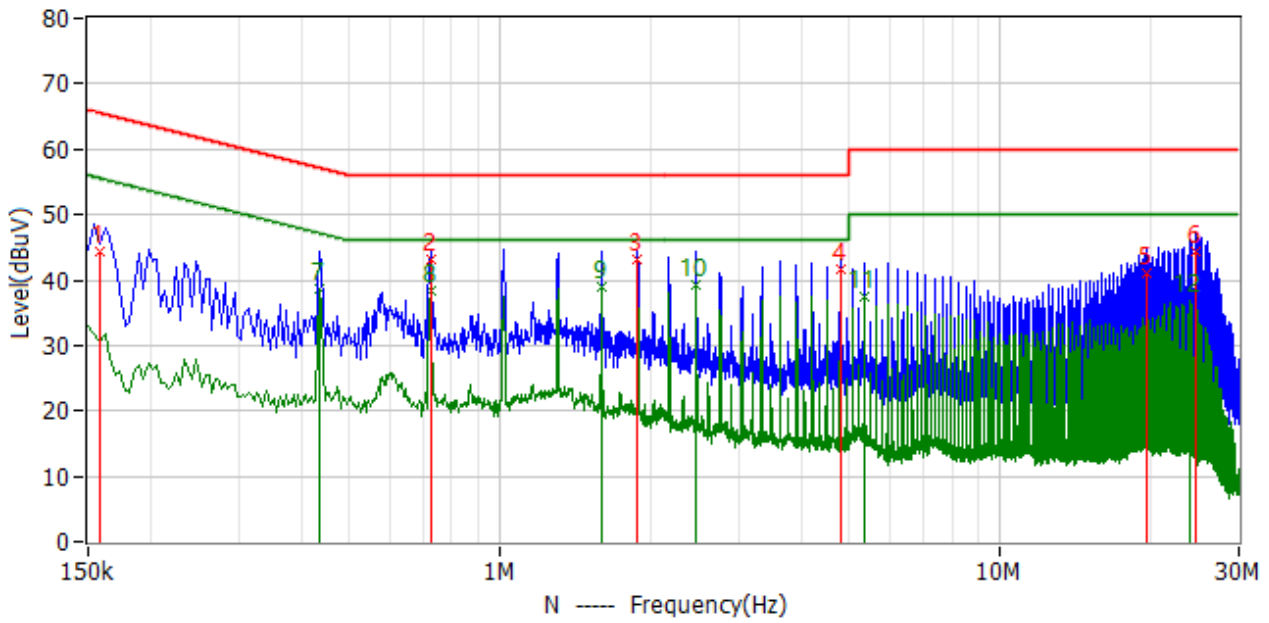


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	158.000kHz	34.5	9.7	44.2	65.6	-21.3	QP
2	726.000kHz	33.5	9.7	43.2	56.0	-12.8	QP
3	1.886MHz	33.5	9.7	43.2	56.0	-12.8	QP
4	4.786MHz	31.7	9.8	41.5	56.0	-14.5	QP
5	19.578MHz	31.1	9.8	40.9	60.0	-19.1	QP
6	24.506MHz	34.0	10.4	44.4	60.0	-15.6	QP
7*	434.000kHz	28.9	9.8	38.7	47.2	-8.5	AV
8*	726.000kHz	28.8	9.7	38.5	46.0	-7.5	AV
9*	1.594MHz	29.3	9.7	39.0	46.0	-7.0	AV
10*	2.466MHz	29.5	9.7	39.2	46.0	-6.8	AV
11*	5.366MHz	27.8	9.8	37.6	50.0	-12.4	AV
12*	23.926MHz	26.6	10.3	36.9	50.0	-13.1	AV

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

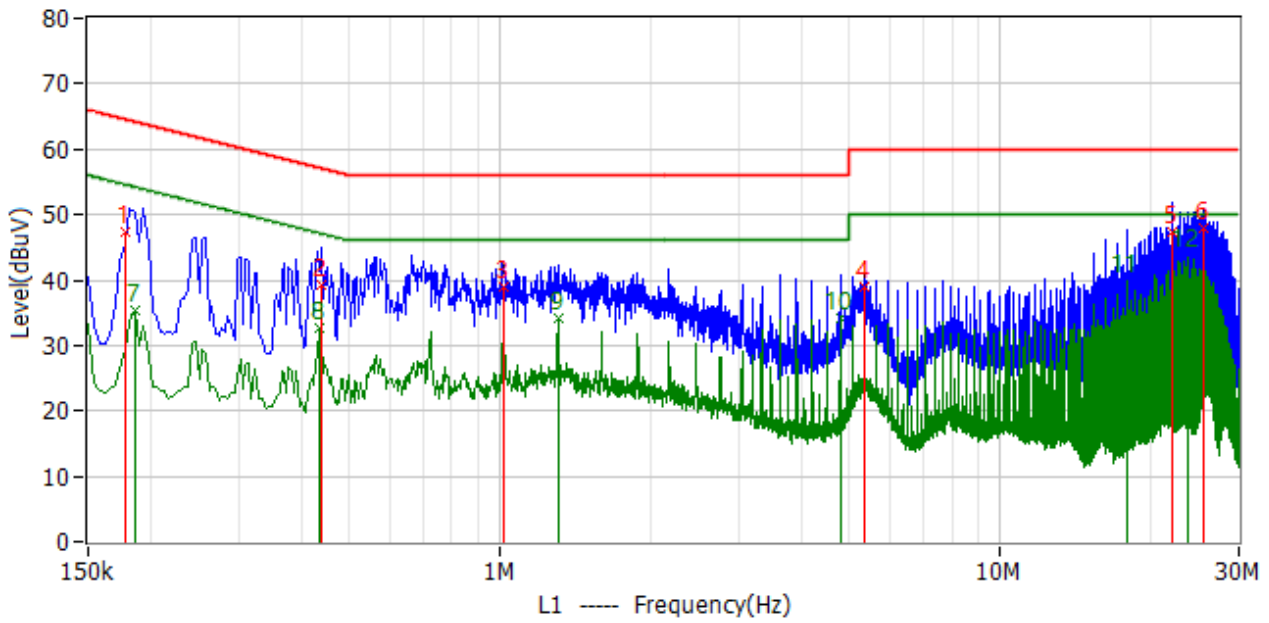

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	178.000kHz	37.6	9.8	47.4	64.6	-17.2	QP
2	438.000kHz	29.4	9.8	39.2	57.1	-17.9	QP
3	1.014MHz	29.1	9.8	38.9	56.0	-17.1	QP
4	5.366MHz	29.1	9.9	39.0	60.0	-21.0	QP
5	22.042MHz	37.3	10.0	47.3	60.0	-12.7	QP
6	25.522MHz	37.7	10.1	47.8	60.0	-12.2	QP
7*	186.000kHz	25.7	9.7	35.4	54.2	-18.8	AV
8*	434.000kHz	22.9	9.8	32.7	47.2	-14.5	AV
9*	1.306MHz	24.4	9.8	34.2	46.0	-11.8	AV
10*	4.786MHz	24.4	9.9	34.3	46.0	-11.7	AV
11*	17.982MHz	29.9	9.9	39.8	50.0	-10.2	AV
12*	23.782MHz	33.5	10.1	43.6	50.0	-6.4	AV

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

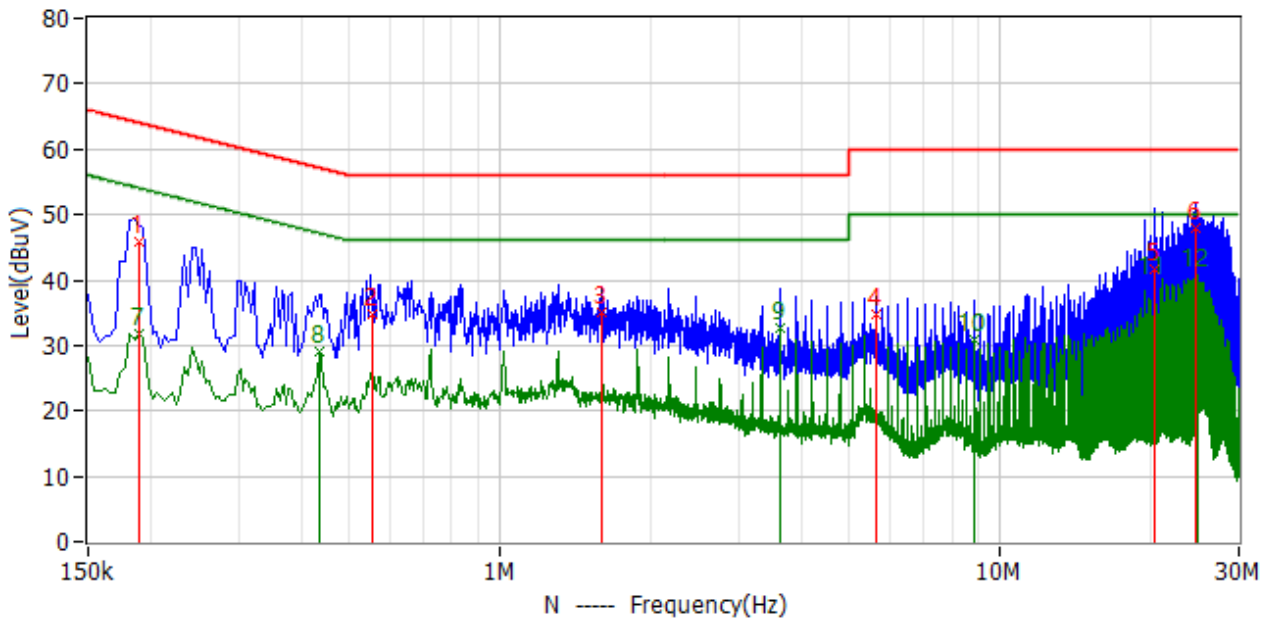

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	190.000kHz	36.0	9.7	45.7	64.0	-18.3	QP
2	554.000kHz	25.2	9.7	34.9	56.0	-21.1	QP
3	1.594MHz	25.3	9.7	35.0	56.0	-21.0	QP
4	5.654MHz	24.9	9.8	34.7	60.0	-25.3	QP
5	20.306MHz	31.6	9.9	41.5	60.0	-18.5	QP
6	24.650MHz	37.6	10.4	48.0	60.0	-12.0	QP
7*	190.000kHz	22.1	9.7	31.8	54.0	-22.2	AV
8*	434.000kHz	19.3	9.8	29.1	47.2	-18.1	AV
9*	3.626MHz	22.8	9.8	32.6	46.0	-13.4	AV
10*	8.846MHz	20.9	9.9	30.8	50.0	-19.2	AV
11*	20.302MHz	29.7	9.9	39.6	50.0	-10.4	AV
12*	24.798MHz	30.3	10.4	40.7	50.0	-9.3	AV


## 4. Radiated Emissions

### 4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

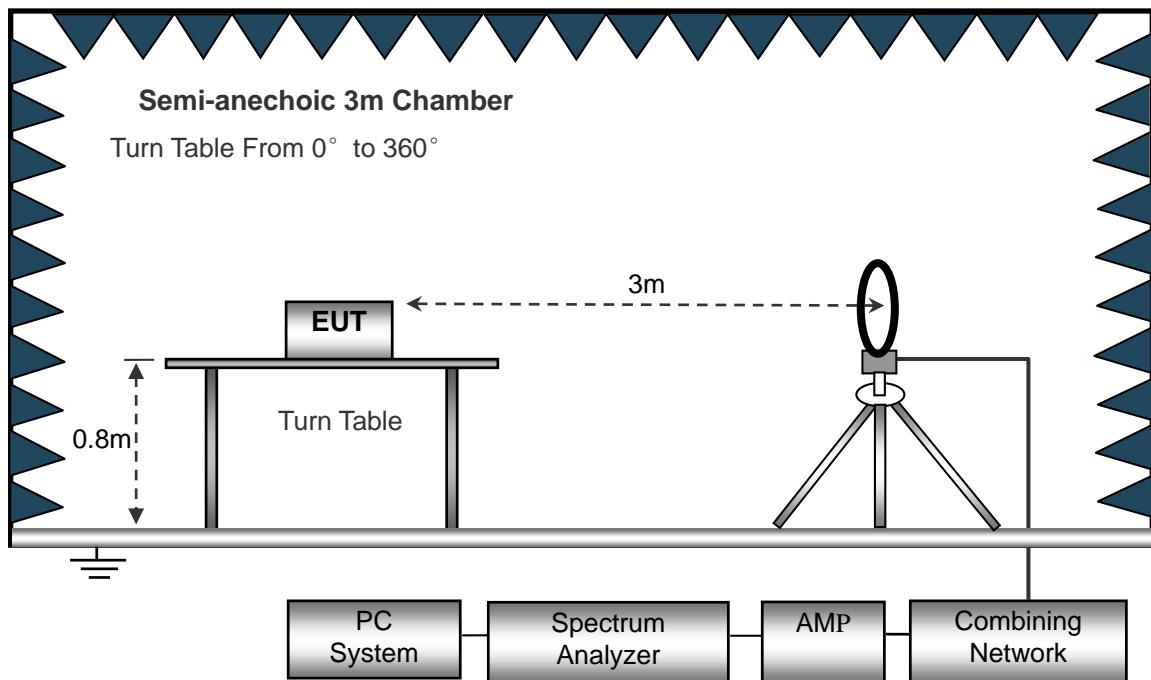



The test setup for emission measurement from 30 MHz to 1 GHz..

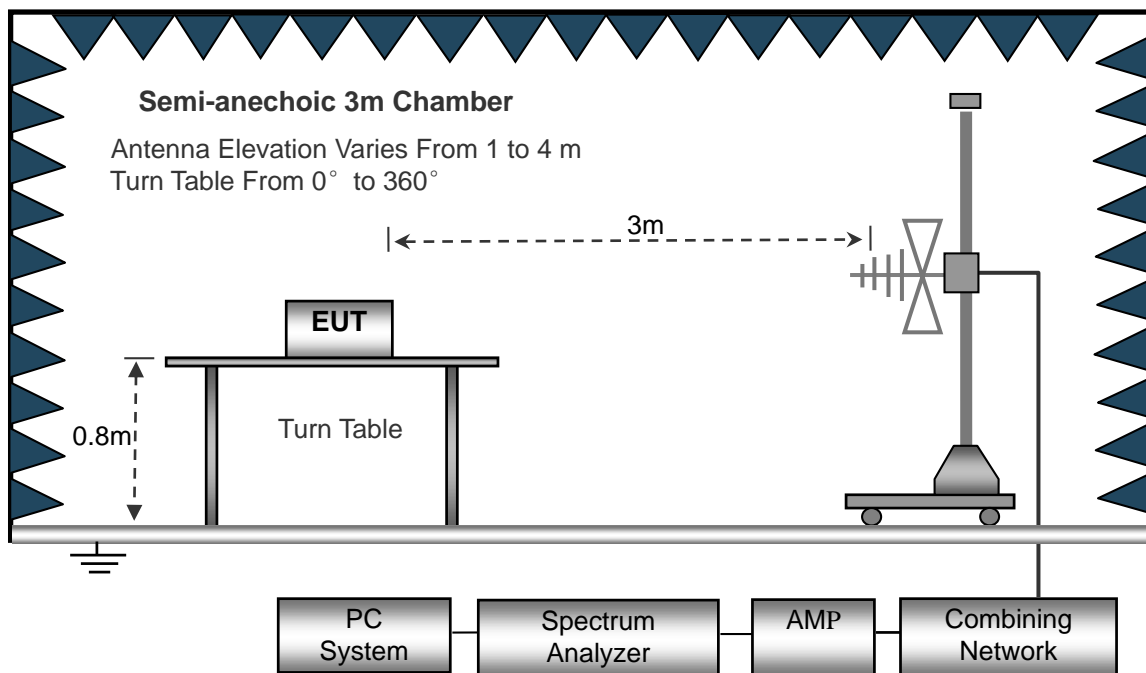

#### 4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

#### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


### 4.4 Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

### 4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

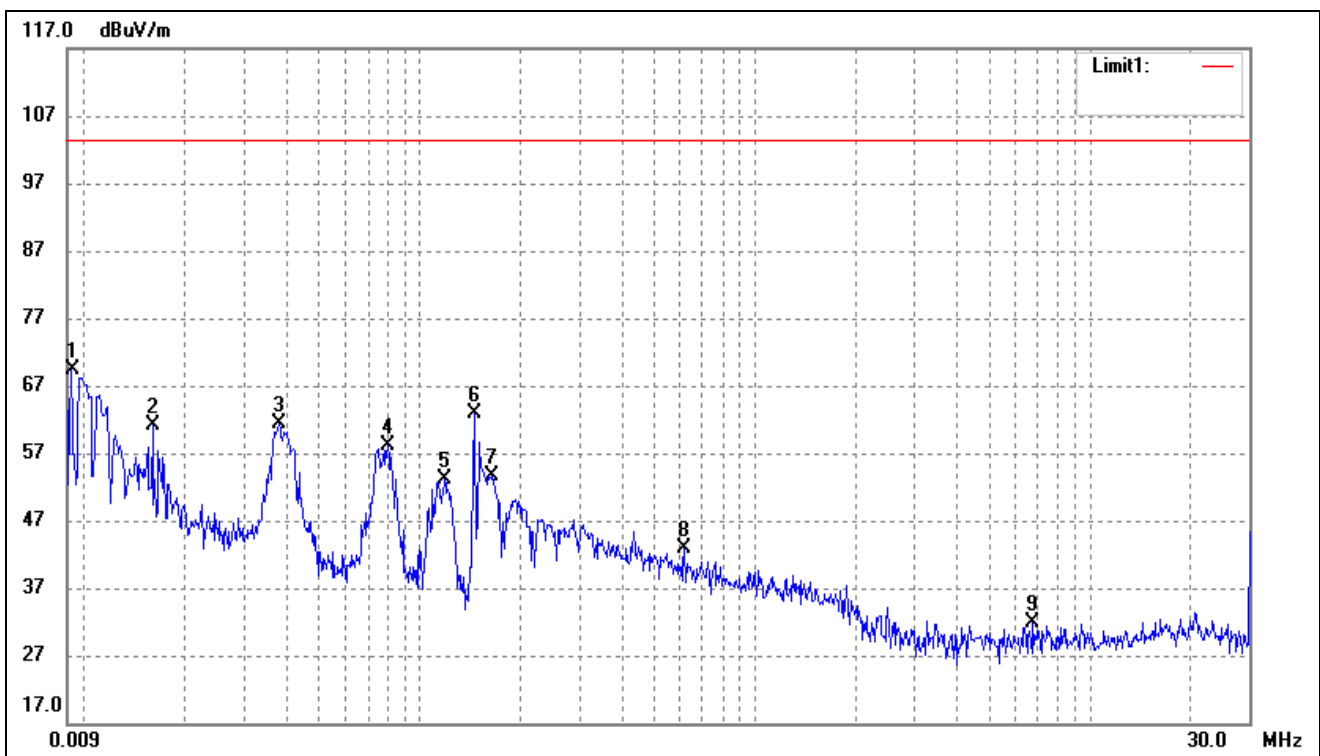

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0092	75.93	-6.49	69.44	103.50	-34.06	-	-	peak
2	0.0159	68.19	-7.02	61.17	103.50	-42.33	-	-	peak
3	0.0382	67.38	-6.07	61.31	103.50	-42.19	-	-	peak
4	0.0801	64.70	-6.46	58.24	103.50	-45.26	-	-	peak
5	0.1188	59.68	-6.50	53.18	103.50	-50.32	-	-	peak
6	0.1450	69.19	-6.36	62.83	103.50	-40.67	-	-	peak
7	0.1633	60.06	-6.51	53.55	103.50	-49.95	-	-	peak
8	0.6173	49.99	-7.00	42.99	103.50	-60.51	-	-	peak
9	6.7691	37.47	-5.54	31.93	103.50	-71.57	-	-	peak


Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

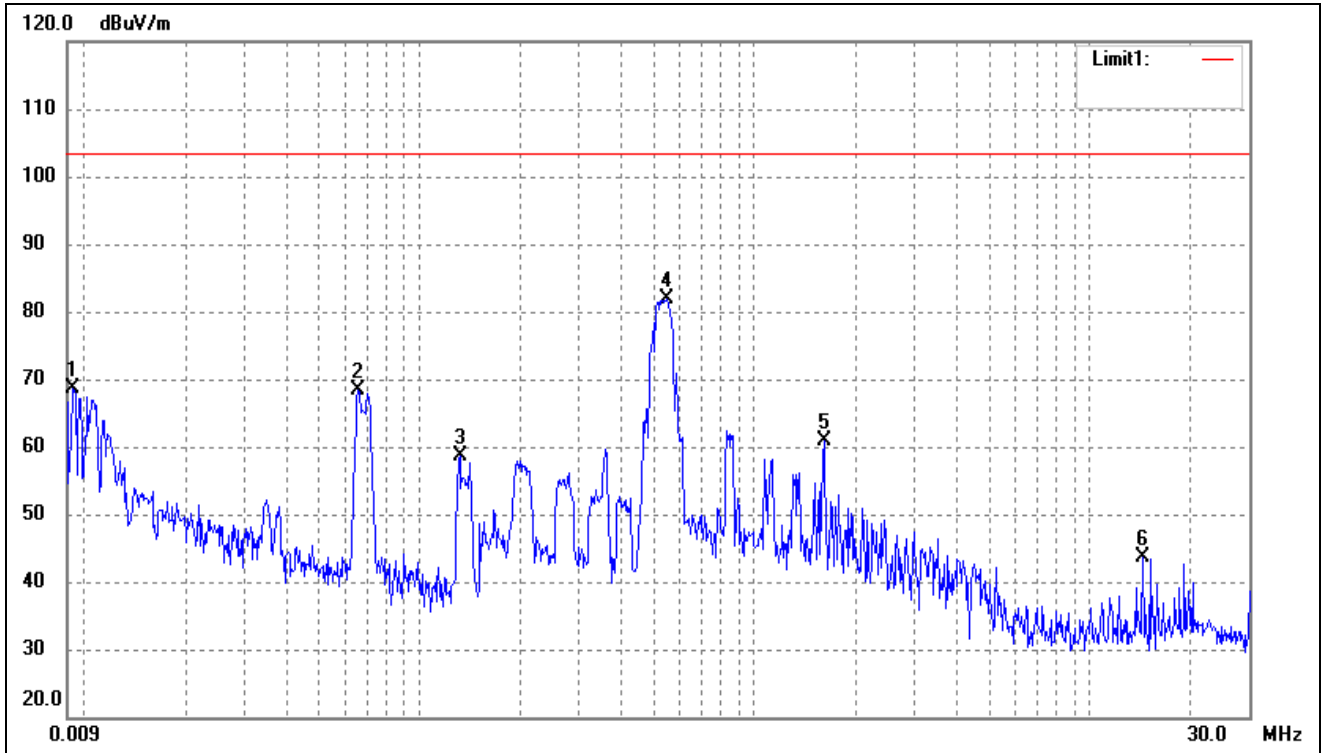

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0093	75.12	-6.55	68.57	103.50	-34.93	-	-	peak
2	0.0656	74.37	-6.05	68.32	103.50	-35.18	-	-	peak
3	0.1314	65.02	-6.44	58.58	103.50	-44.92	-	-	peak
4	0.5464	89.11	-7.34	81.77	103.50	-21.73	-	-	peak
5	1.6019	67.07	-6.10	60.97	103.50	-42.53	-	-	peak
6	14.4404	48.36	-4.81	43.55	103.50	-59.95	-	-	peak


**Plot of Radiated Emissions Test Data ( Above 30MHz)**

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

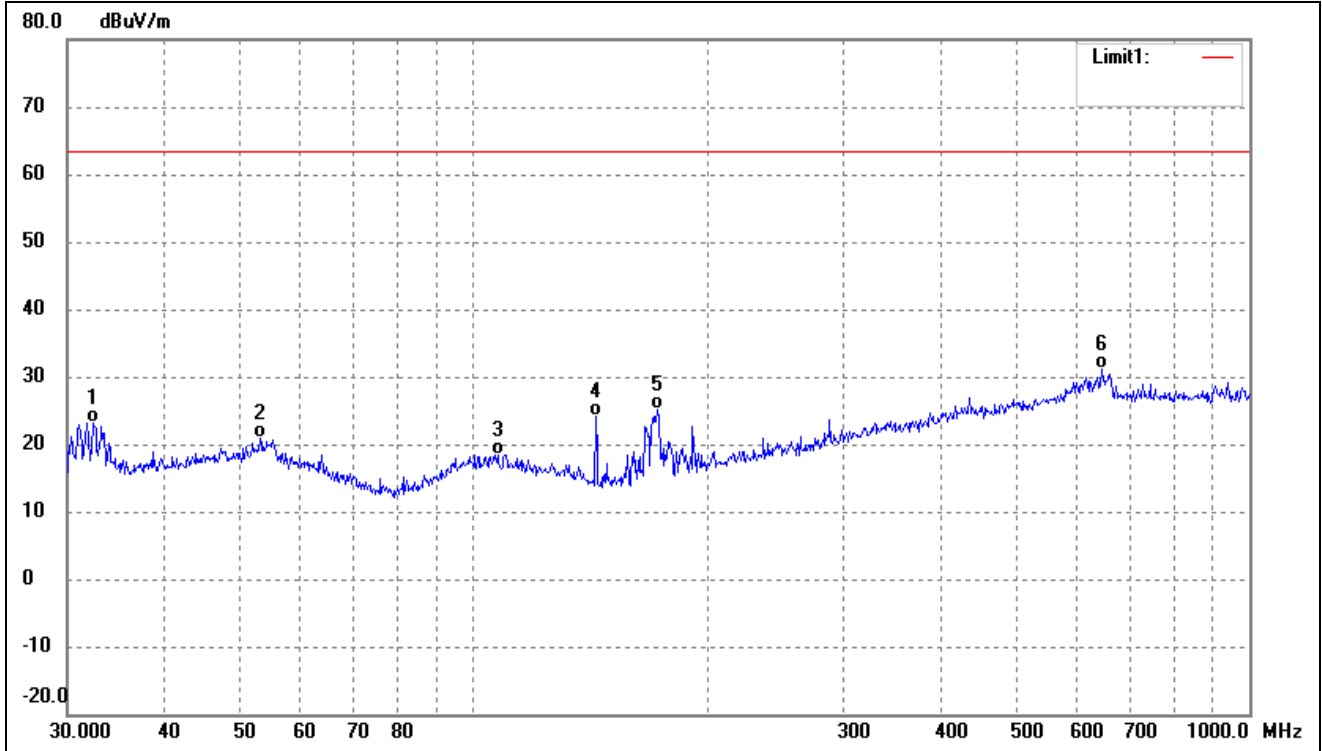


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.4059	34.16	-11.02	23.14	63.50	-40.36	-	-	QP
2	53.1313	28.79	-8.03	20.76	63.50	-42.74	-	-	QP
3	107.5101	27.06	-8.65	18.41	63.50	-45.09	-	-	QP
4	143.8295	36.07	-11.94	24.13	63.50	-39.37	-	-	QP
5	172.5988	35.82	-10.64	25.18	63.50	-38.32	-	-	QP
6	645.1195	29.31	1.79	31.10	63.50	-32.40	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

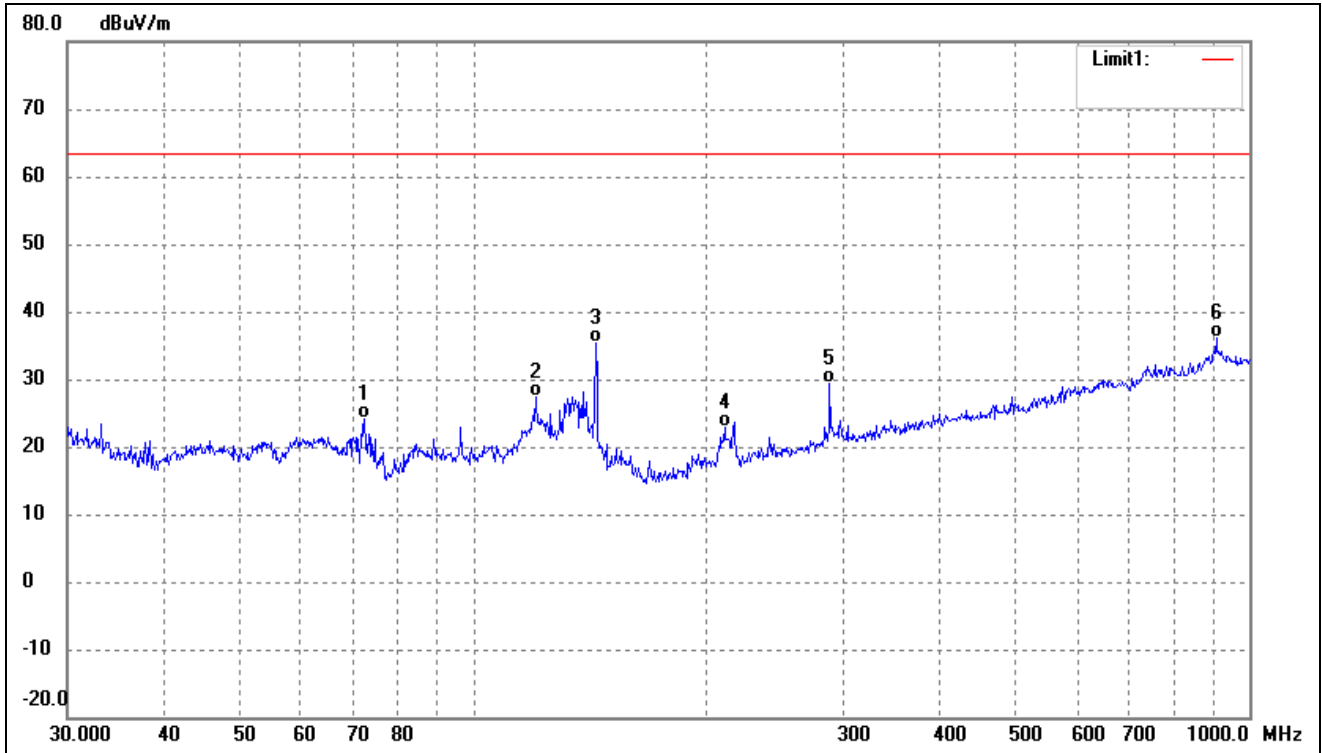


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.2925	35.11	-11.06	24.05	63.50	-39.45	-	-	QP
2	52.2079	32.15	-7.98	24.17	63.50	-39.33	-	-	QP
3	136.9392	38.63	-11.83	26.80	63.50	-36.70	-	-	QP
4	170.7926	38.14	-10.74	27.40	63.50	-36.10	-	-	QP
5	435.5898	29.03	-2.21	26.82	63.50	-36.68	-	-	QP
6	645.1195	29.31	1.79	31.10	63.50	-32.40	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

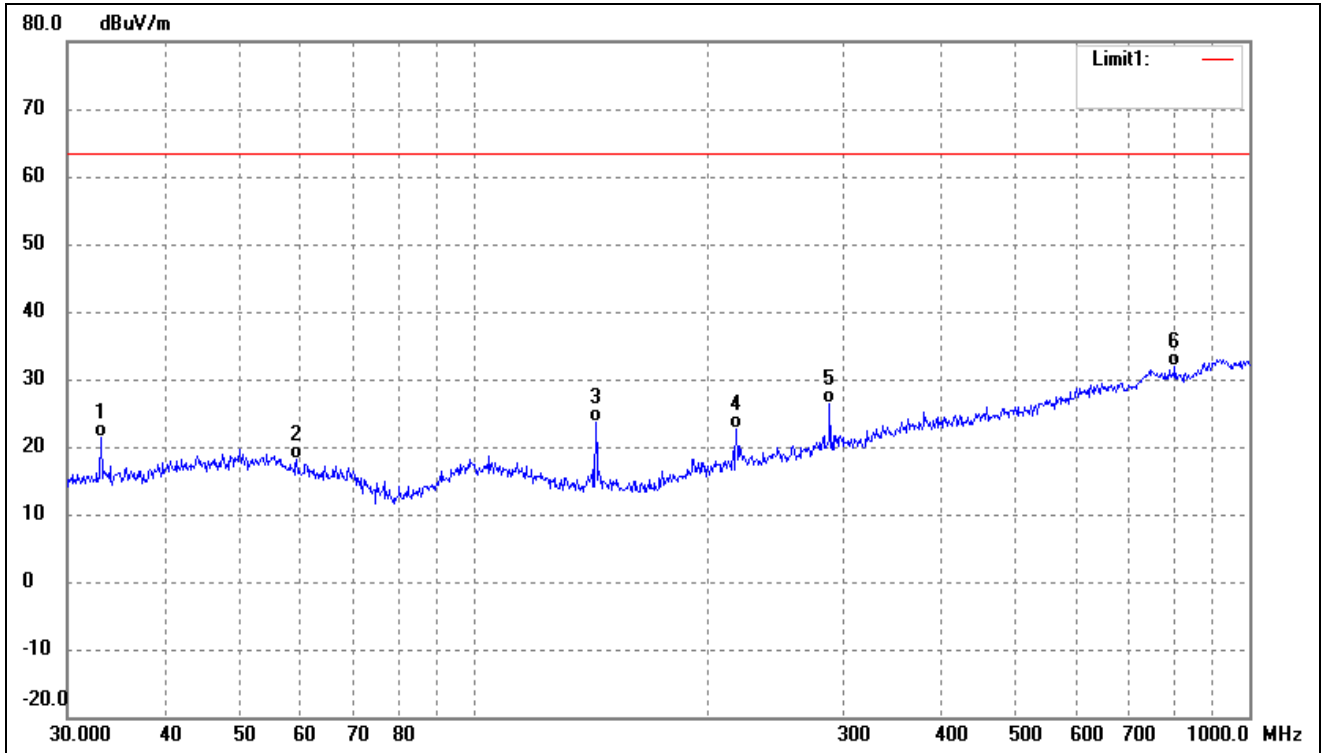

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.1795	38.61	-11.09	27.52	63.50	-35.98	-	-	QP
2	53.6932	33.63	-8.07	25.56	63.50	-37.94	-	-	QP
3	144.3348	39.79	-11.94	27.85	63.50	-35.65	-	-	QP
4	169.0054	39.55	-10.83	28.72	63.50	-34.78	-	-	QP
5	287.9904	29.23	-5.20	24.03	63.50	-39.47	-	-	QP
6	649.6597	28.89	1.85	30.74	63.50	-32.76	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

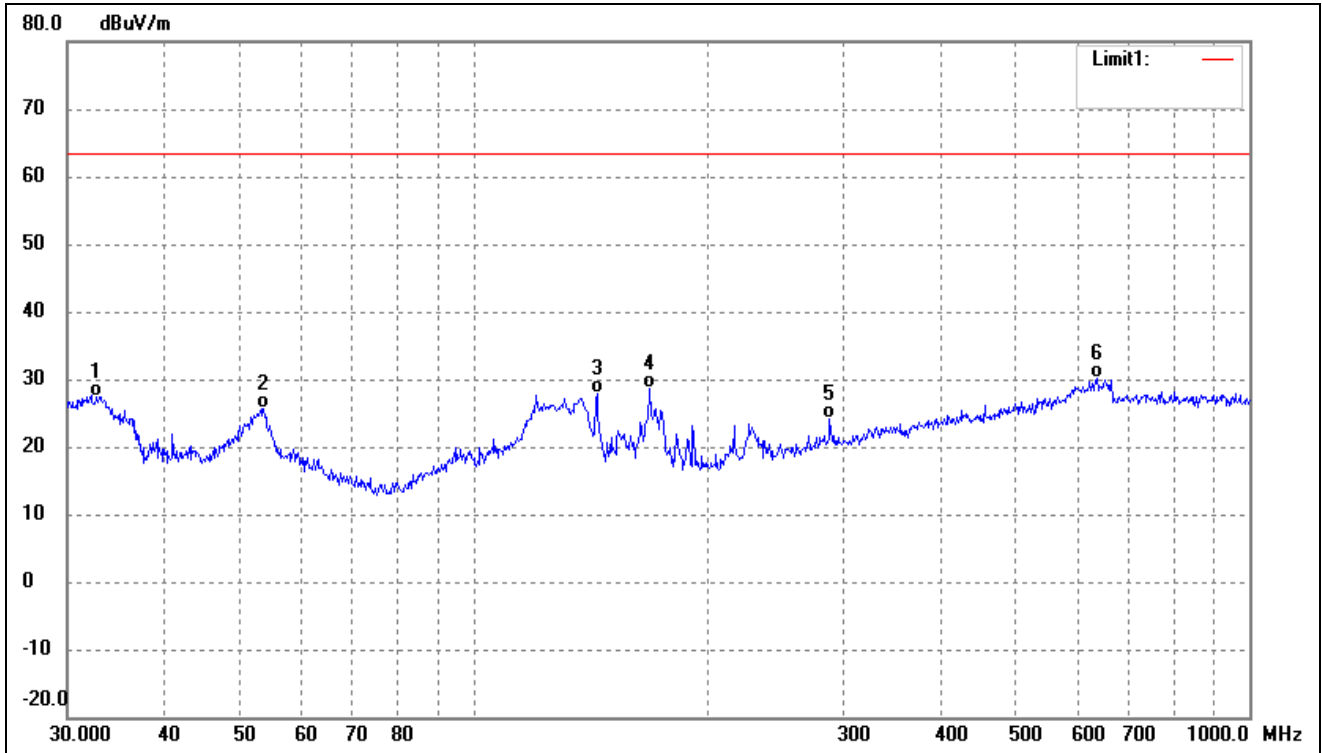

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.7486	38.41	-10.93	27.48	63.50	-36.02	-	-	QP
2	53.6932	33.63	-8.07	25.56	63.50	-37.94	-	-	QP
3	144.3348	39.79	-11.94	27.85	63.50	-35.65	-	-	QP
4	169.0054	39.55	-10.83	28.72	63.50	-34.78	-	-	QP
5	287.9904	29.23	-5.20	24.03	63.50	-39.47	-	-	QP
6	636.1340	28.73	1.51	30.24	63.50	-33.26	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## APPENDIX PHOTOGRAPHS

---

Please refer to “ANNEX”

\*\*\*\* END OF REPORT \*\*\*\*