

TEST REPORT

Reference No..... : WTX24X05107809W001
FCC ID..... : A4X-SQ2WLCH310WE
Applicant..... : CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Manufacturer..... : DONGGUAN CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Product Name..... : QI2 3-IN-1 WIRELESS CHARGER
Model No..... : SQ2WLCH310WE
Standards..... : FCC Part 18
Date of Receipt sample.... : 2024-05-10
Date of Test..... : 2024-05-10 to 2024-05-29
Date of Issue..... : 2024-05-29
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

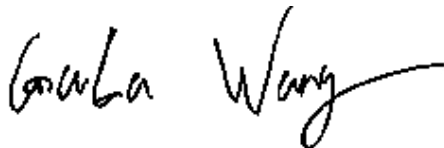

Gala Wang

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND OPERATION MODE6
1.6 MEASUREMENT UNCERTAINTY7
1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. CONDUCTED EMISSIONS10
3.1 STANDARD APPLICABLE.....10
3.2 TEST PROCEDURE.....10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10
3.4 ENVIRONMENTAL CONDITIONS10
3.5 TEST RECEIVER SETUP11
3.6 SUMMARY OF TEST RESULTS/PLOTS11

4. RADIATED EMISSIONS.....18
4.1 TEST PROCEDURE.....18
4.2 TEST RECEIVER SETUP19
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....19
4.4 ENVIRONMENTAL CONDITIONS20
4.5 SUMMARY OF TEST RESULTS/PLOTS20

APPENDIX PHOTOGRAPHS.....29

Report version

Version No.	Date of issue	Description
Rev.00	2024-05-29	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory#1: SuiChuan CE LINK LIMITED
 Address of factory: SuiChuan county industrial park east zone, Ji'an city, Jiangxi Province, China.

Factory#2: CE LINK VIET NAM COMPANY LIMITED.
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	QI2 3-IN-1 WIRELESS CHARGER
Trade Name:	Sprout
Model No.:	SQ2WLCH310WE
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110-205kHz@5W 128/360kHz@15W
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Voltage:	Input: 9V/12V/15V
Rated Current:	Input: 3A/2.5A/2A
Rated Power:	Output 1: 5W/15W Output 2: 5W Output 3: 5W Total:25W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the Adapter	AC120V/60Hz; Input:DC9V3A; Wireless charging output:5W Phone
TM2	Wireless Charging	Connect to the Adapter	AC120V/60Hz; Input:DC12V2.5A; Wireless charging output:5W Phone+5W AirPods
TM3	Wireless Charging	Connect to the Adapter	AC120V/60Hz; Input:DC15V2A; Wireless charging output:15W Phone+5W AirPods

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.5	Shielded	Without Core

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	/	SACPD30WE	/
iPhone	Apple Inc	A3104	/
AriPods Pro2	Apple Inc	A2968	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2024-02-24	2025-02-23
EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
Amplifier	HP	8447F	2805A0347 5	2024-02-24	2025-02-23
Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
Amplifier	Agilent	8447D	2944A1045 7	2024-02-24	2025-02-23
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

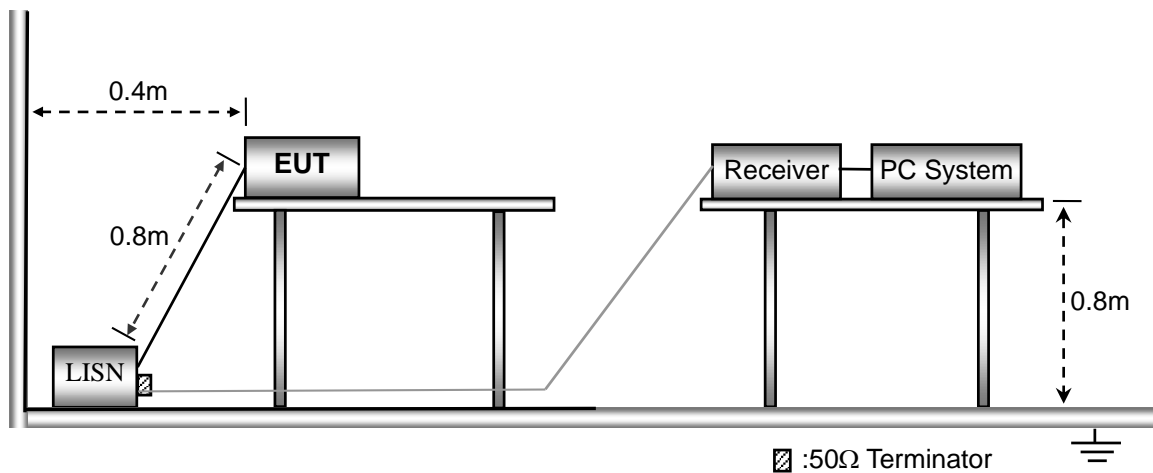

3.4 Environmental Conditions

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

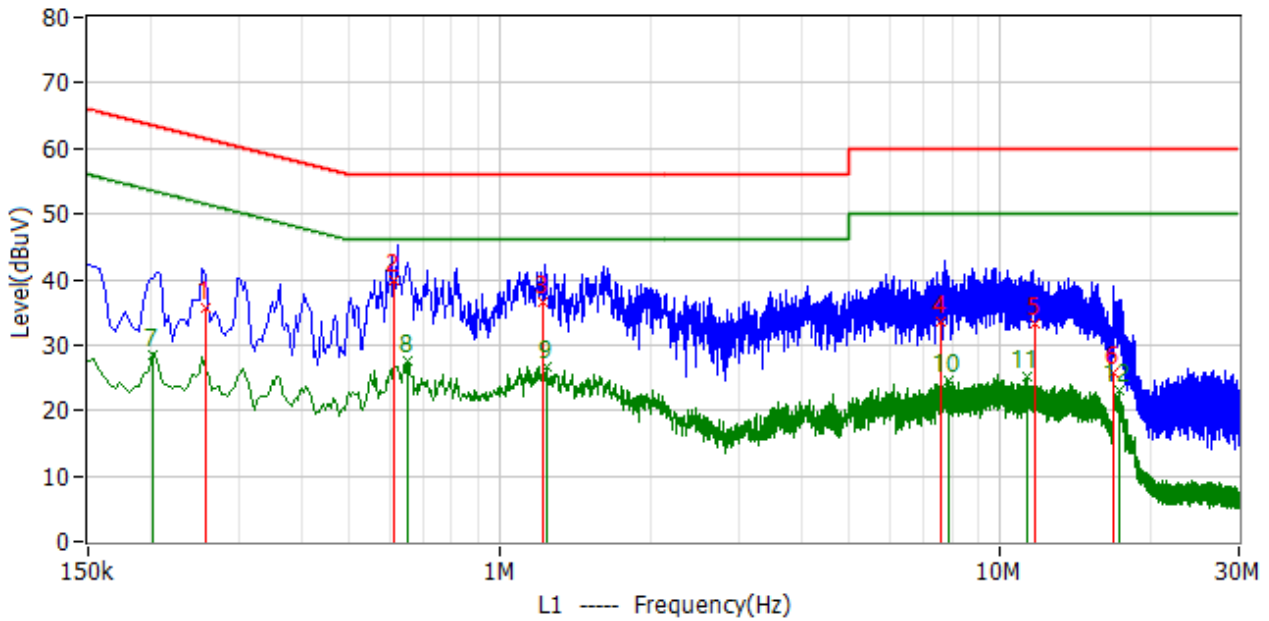


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	258.000kHz	25.9	9.9	35.8	61.5	-25.7	QP
2	614.000kHz	30.2	9.7	39.9	56.0	-16.1	QP
3	1.222MHz	26.7	9.8	36.5	56.0	-19.5	QP
4	7.642MHz	23.8	9.7	33.5	60.0	-26.5	QP
5	11.682MHz	23.6	9.8	33.4	60.0	-26.6	QP
6	16.762MHz	15.9	9.8	25.7	60.0	-34.3	QP
7*	202.000kHz	19.0	9.6	28.6	53.5	-24.9	AV
8*	654.000kHz	18.0	9.7	27.7	46.0	-18.3	AV
9*	1.238MHz	16.9	9.8	26.7	46.0	-19.3	AV
10*	7.874MHz	14.9	9.7	24.6	50.0	-25.4	AV
11*	11.334MHz	15.3	9.8	25.1	50.0	-24.9	AV
12*	17.234MHz	13.1	9.9	23.0	50.0	-27.0	AV

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

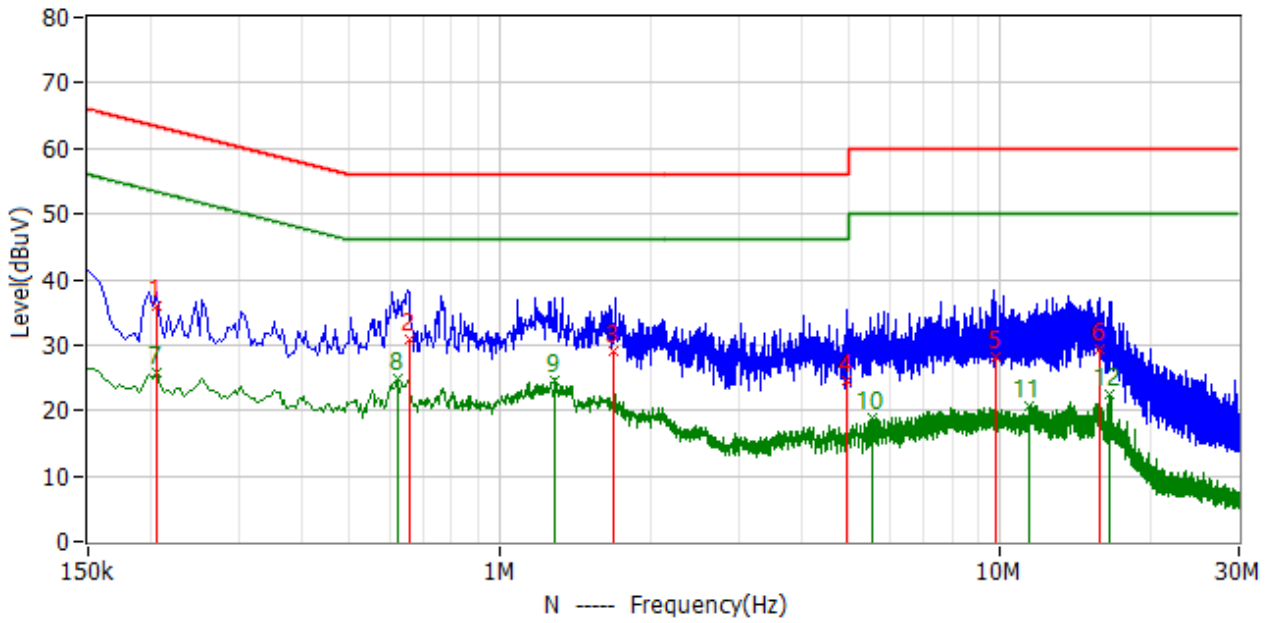


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	206.000kHz	26.2	9.7	35.9	63.4	-27.5	QP
2	658.000kHz	21.3	9.7	31.0	56.0	-25.0	QP
3	1.686MHz	19.3	9.7	29.0	56.0	-27.0	QP
4	4.946MHz	14.9	9.8	24.7	56.0	-31.3	QP
5	9.774MHz	18.4	9.9	28.3	60.0	-31.7	QP
6	15.754MHz	19.8	9.7	29.5	60.0	-30.5	QP
7*	206.000kHz	16.0	9.7	25.7	53.4	-27.7	AV
8*	622.000kHz	15.3	9.7	25.0	46.0	-21.0	AV
9*	1.290MHz	15.0	9.7	24.7	46.0	-21.3	AV
10*	5.558MHz	9.1	9.8	18.9	50.0	-31.1	AV
11*	11.454MHz	10.9	9.8	20.7	50.0	-29.3	AV
12*	16.602MHz	12.7	9.8	22.5	50.0	-27.5	AV

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

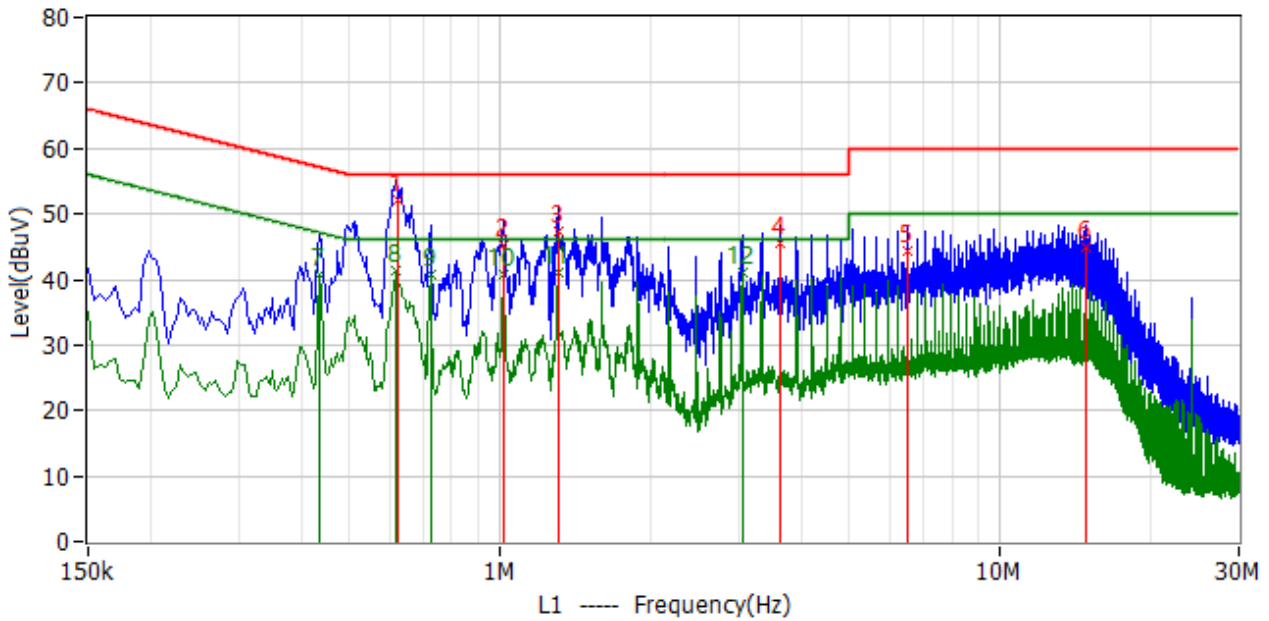


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	622.000kHz	42.4	9.7	52.1	56.0	-3.9	QP
2	1.018MHz	35.5	9.6	45.1	56.0	-10.9	QP
3	1.306MHz	37.8	9.6	47.4	56.0	-8.6	QP
4	3.626MHz	35.9	9.6	45.5	56.0	-10.5	QP
5	6.526MHz	34.5	9.7	44.2	60.0	-15.8	QP
6	14.790MHz	35.1	9.8	44.9	60.0	-15.1	QP
7*	434.000kHz	31.0	9.7	40.7	47.2	-6.5	AV
8*	618.000kHz	31.7	9.7	41.4	46.0	-4.6	AV
9*	726.000kHz	31.0	9.6	40.6	46.0	-5.4	AV
10*	1.014MHz	31.1	9.6	40.7	46.0	-5.3	AV
11*	1.306MHz	31.5	9.6	41.1	46.0	-4.9	AV
12*	3.046MHz	31.5	9.6	41.1	46.0	-4.9	AV

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

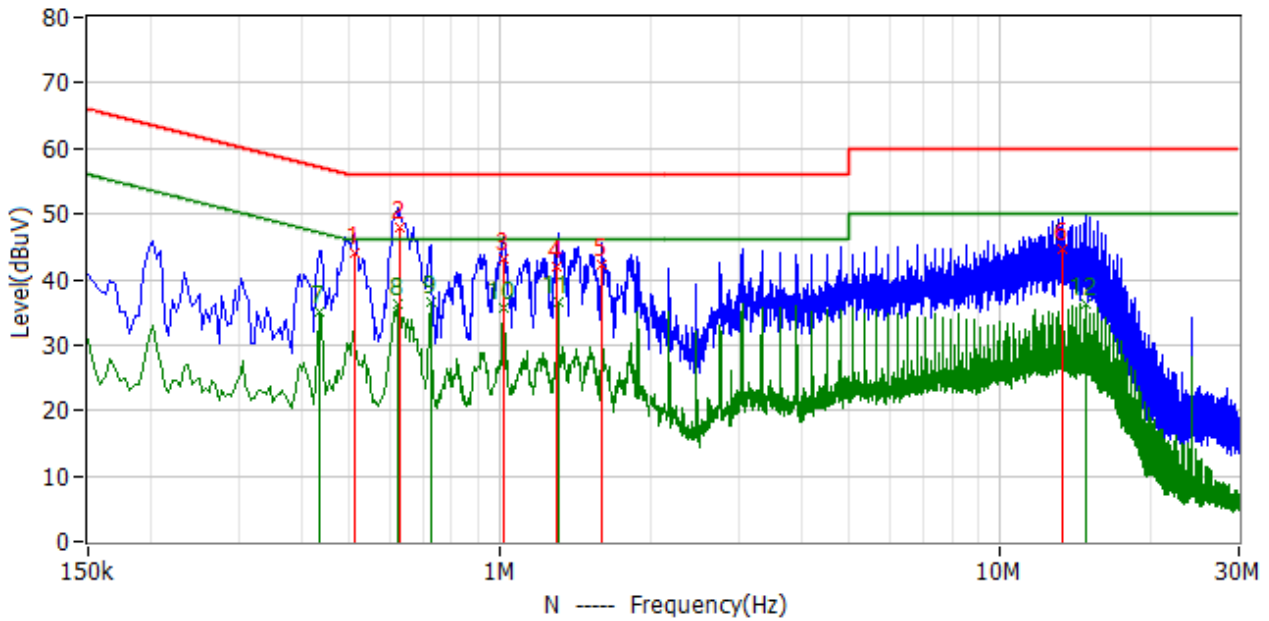


No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	510.000kHz	34.4	9.7	44.1	56.0	-11.9	QP
2	630.000kHz	38.1	9.7	47.8	56.0	-8.2	QP
3	1.014MHz	33.5	9.6	43.1	56.0	-12.9	QP
4	1.302MHz	32.4	9.6	42.0	56.0	-14.0	QP
5	1.594MHz	32.7	9.6	42.3	56.0	-13.7	QP
6	13.342MHz	34.9	9.8	44.7	60.0	-15.3	QP
7*	434.000kHz	25.4	9.7	35.1	47.2	-12.1	AV
8*	626.000kHz	26.7	9.7	36.4	46.0	-9.6	AV
9*	726.000kHz	27.0	9.6	36.6	46.0	-9.4	AV
10*	1.014MHz	26.2	9.6	35.8	46.0	-10.2	AV
11*	1.306MHz	27.0	9.6	36.6	46.0	-9.4	AV
12*	14.790MHz	26.5	9.9	36.4	50.0	-13.6	AV

Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

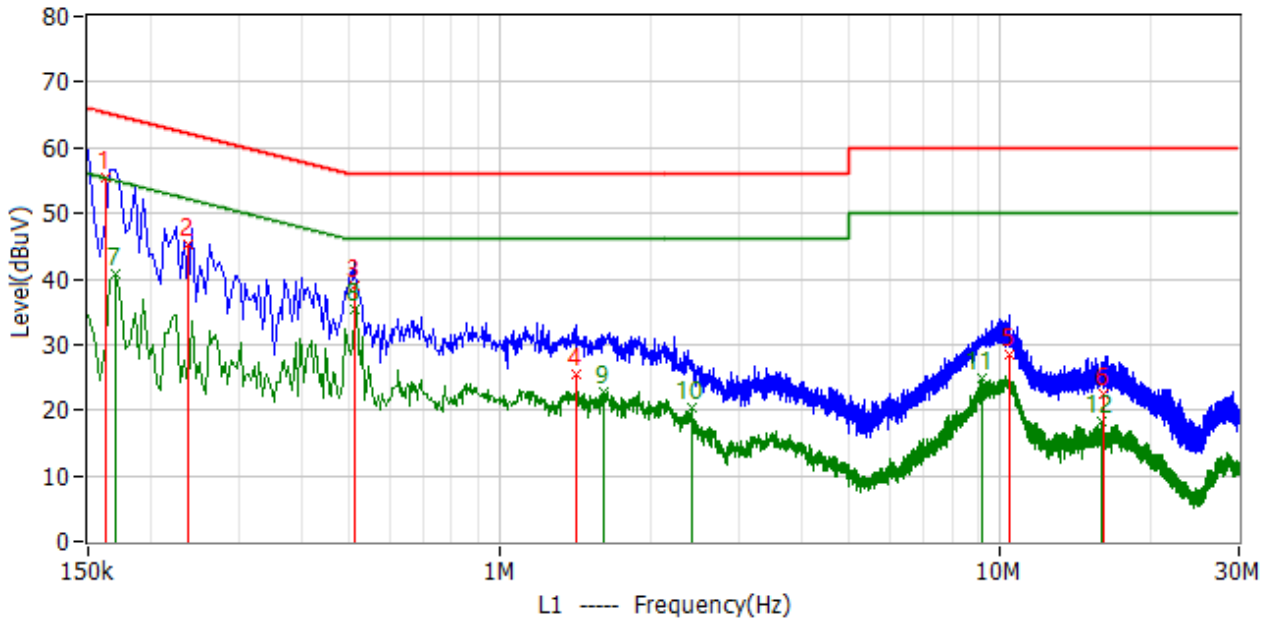

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	162.000kHz	45.5	9.9	55.4	65.4	-10.0	QP
2	238.000kHz	35.4	9.8	45.2	62.2	-17.0	QP
3	510.000kHz	29.3	9.7	39.0	56.0	-17.0	QP
4	1.426MHz	15.8	9.8	25.6	56.0	-30.4	QP
5	10.470MHz	18.8	9.8	28.6	60.0	-31.4	QP
6	16.138MHz	12.6	9.8	22.4	60.0	-37.6	QP
7*	170.000kHz	30.9	9.8	40.7	55.0	-14.2	AV
8*	514.000kHz	25.7	9.7	35.4	46.0	-10.6	AV
9*	1.614MHz	13.0	9.8	22.8	46.0	-23.2	AV
10*	2.422MHz	10.4	9.9	20.3	46.0	-25.7	AV
11*	9.194MHz	15.2	9.8	25.0	50.0	-25.0	AV
12*	15.914MHz	8.5	9.8	18.3	50.0	-31.7	AV

Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

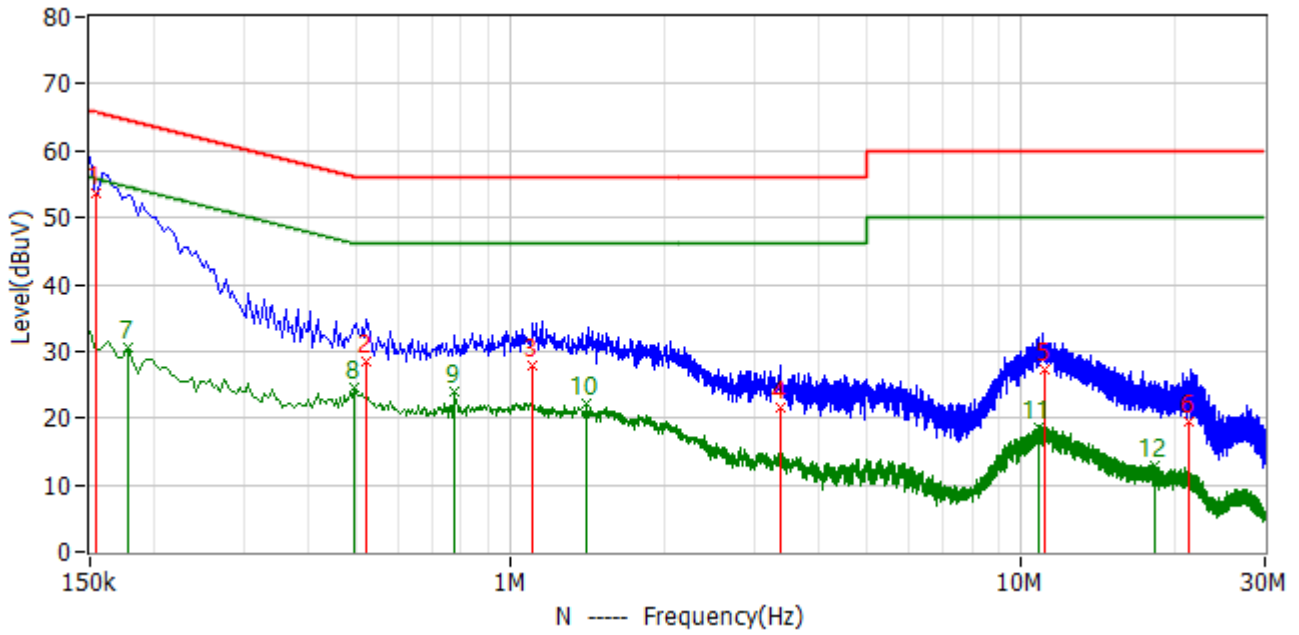

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	154.000kHz	44.0	9.7	53.7	65.8	-12.1	QP
2	522.000kHz	18.8	9.6	28.4	56.0	-27.6	QP
3	1.102MHz	18.2	9.7	27.9	56.0	-28.1	QP
4	3.374MHz	11.7	9.8	21.5	56.0	-34.5	QP
5	11.090MHz	17.4	9.8	27.2	60.0	-32.8	QP
6	21.366MHz	9.5	10.0	19.5	60.0	-40.5	QP
7*	178.000kHz	20.9	9.7	30.6	54.6	-24.0	AV
8*	494.000kHz	15.0	9.6	24.6	46.1	-21.5	AV
9*	778.000kHz	14.3	9.7	24.0	46.0	-22.0	AV
10*	1.410MHz	12.4	9.7	22.1	46.0	-23.9	AV
11*	10.774MHz	8.9	9.8	18.7	50.0	-31.3	AV
12*	18.182MHz	3.2	9.8	13.0	50.0	-37.0	AV


4. Radiated Emissions

4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

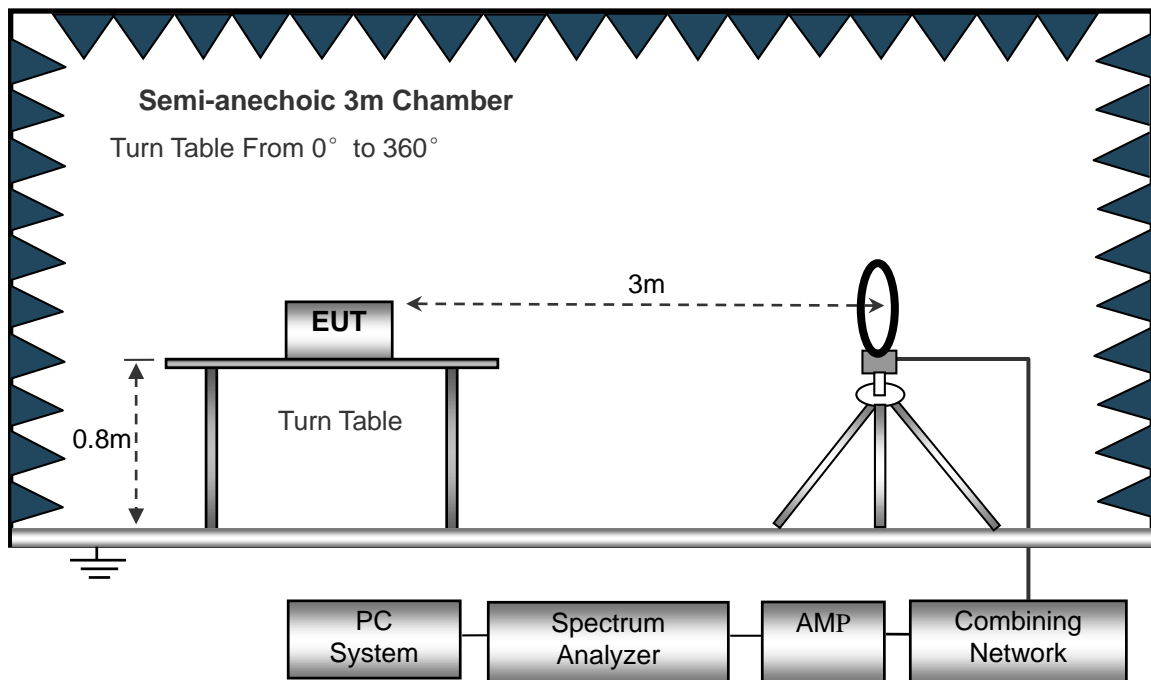

The test setup for emission measurement from 30 MHz to 1 GHz..

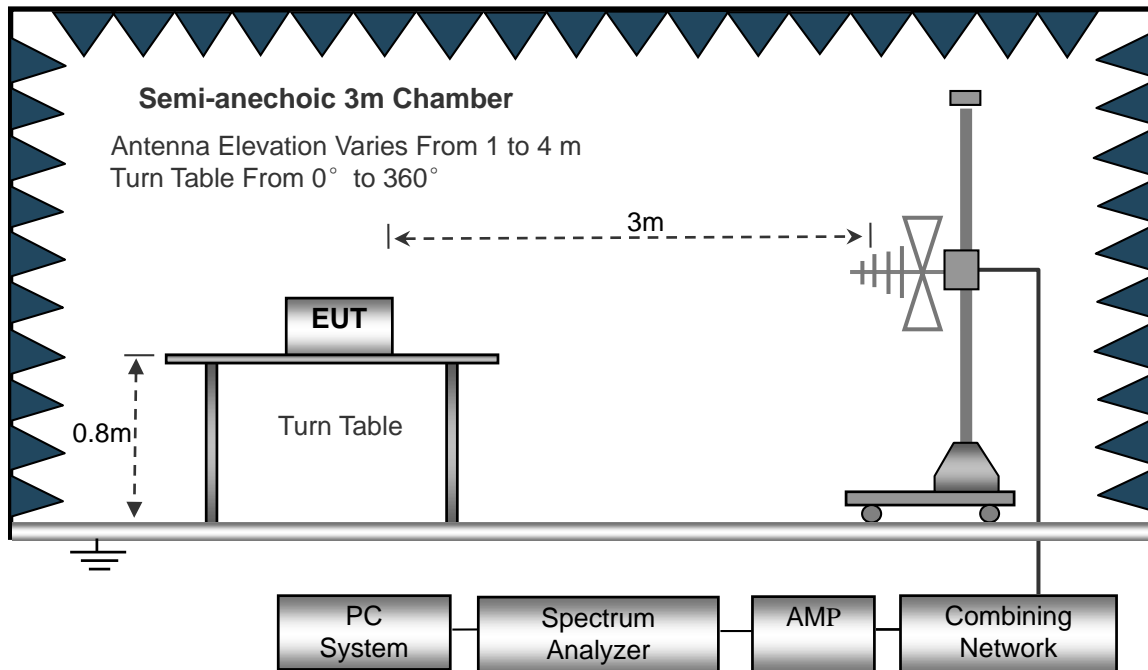

4.2 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

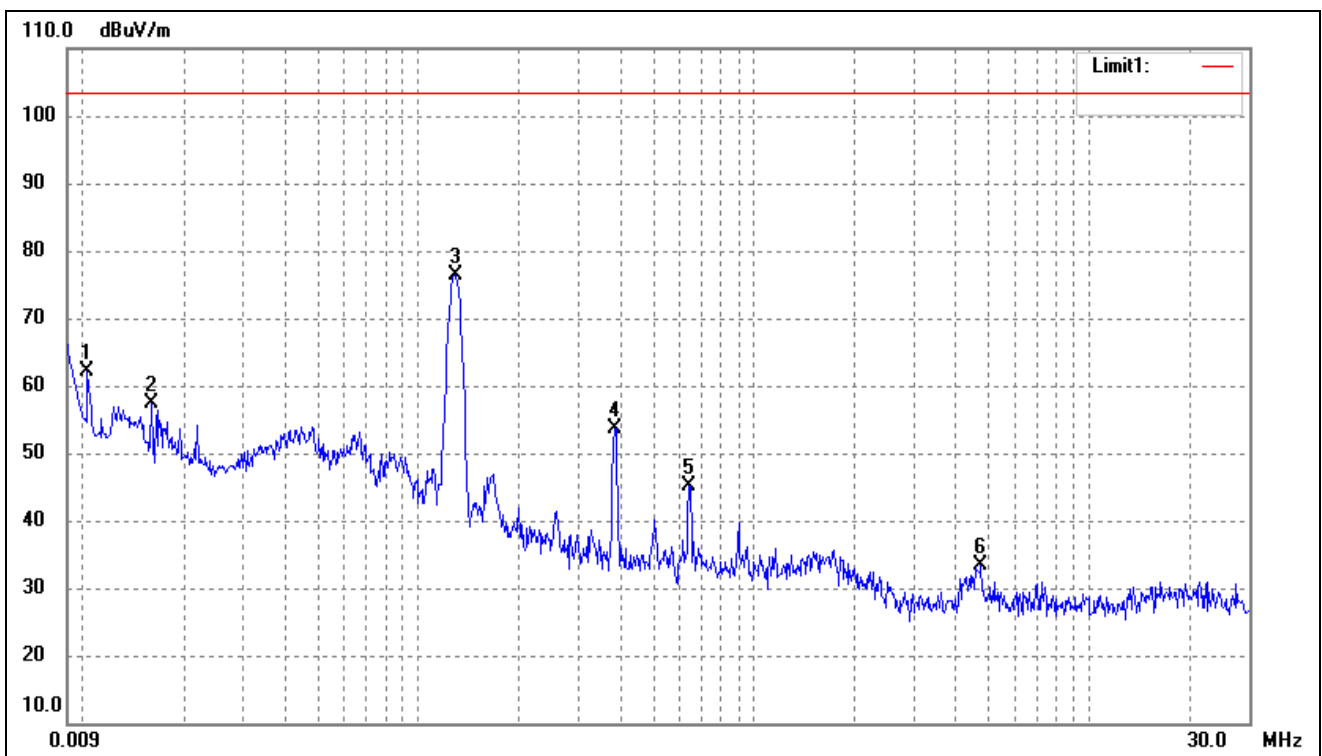


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0103	69.21	-7.01	62.20	103.50	-41.30	-	-	peak
2	0.0160	64.28	-7.02	57.26	103.50	-46.24	-	-	peak
3	0.1287	82.91	-6.44	76.47	103.50	-27.03	-	-	peak
4	0.3849	61.34	-7.71	53.63	103.50	-49.87	-	-	peak
5	0.6416	52.08	-6.90	45.18	103.50	-58.32	-	-	peak
6	4.7580	38.87	-5.57	33.30	103.50	-70.20	-	-	peak

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

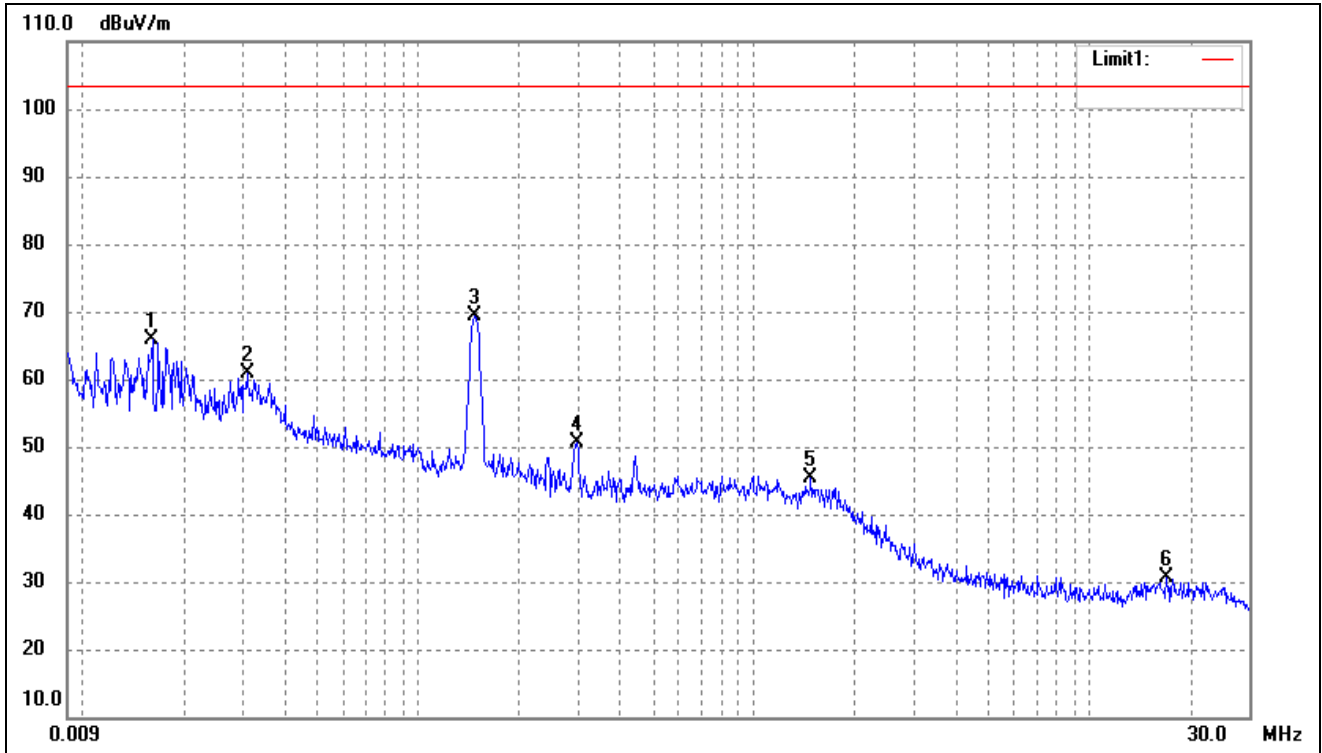

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0160	72.80	-7.02	65.78	103.50	-37.72	-	-	peak
2	0.0309	67.33	-6.46	60.87	103.50	-42.63	-	-	peak
3	0.1477	75.72	-6.34	69.38	103.50	-34.12	-	-	peak
4	0.2968	58.52	-7.82	50.70	103.50	-52.80	-	-	peak
5	1.4796	51.50	-6.12	45.38	103.50	-58.12	-	-	peak
6	17.0028	35.22	-4.54	30.68	103.50	-72.82	-	-	peak


Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

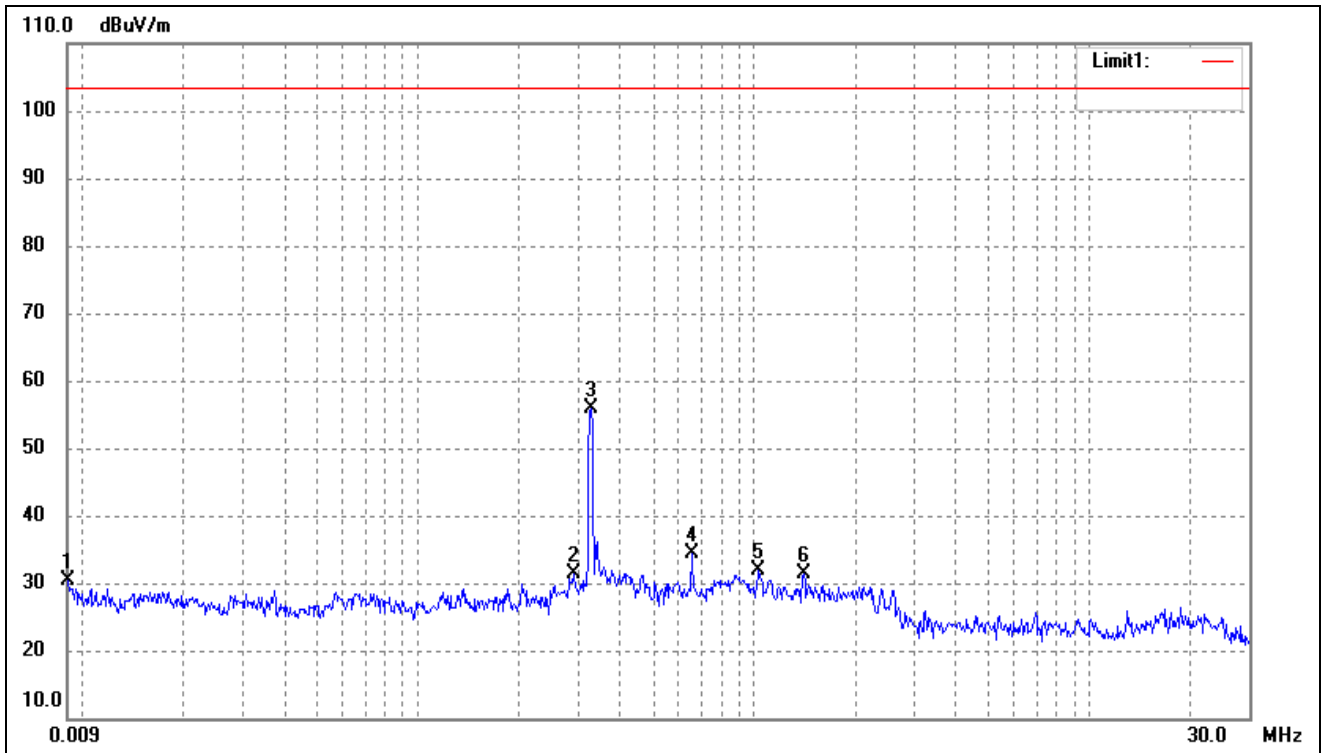

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0090	35.36	-4.90	30.46	103.50	-73.04	-	-	peak
2	0.2898	36.39	-4.91	31.48	103.50	-72.02	-	-	peak
3	0.3272	60.65	-4.84	55.81	103.50	-47.69	-	-	peak
4	0.6521	38.12	-3.68	34.44	103.50	-69.06	-	-	peak
5	1.0354	34.61	-2.84	31.77	103.50	-71.73	-	-	peak
6	1.4093	34.19	-2.80	31.39	103.50	-72.11	-	-	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

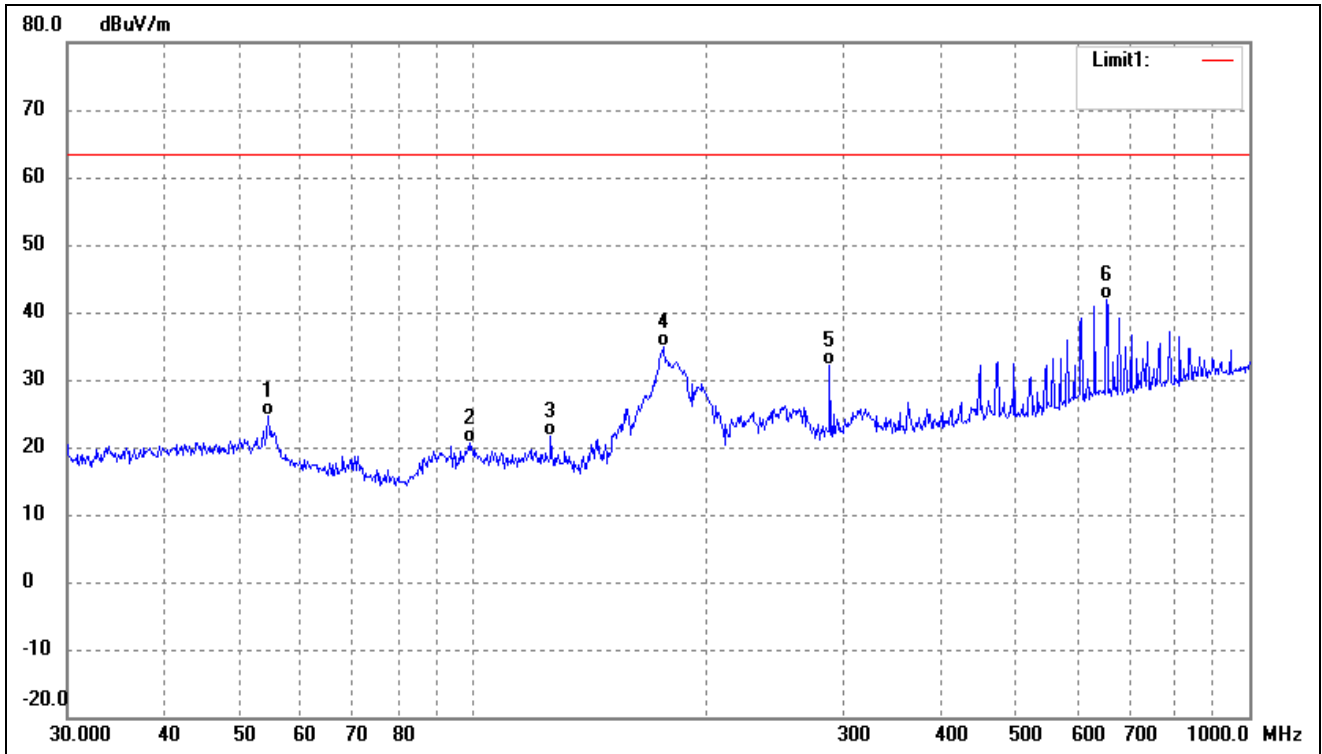


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.4516	32.62	-8.09	24.53	63.50	-38.97	-	-	QP
2	98.8326	29.09	-8.38	20.71	63.50	-42.79	-	-	QP
3	125.8864	31.54	-9.87	21.67	63.50	-41.83	-	-	QP
4	175.6516	45.21	-10.36	34.85	63.50	-28.65	-	-	QP
5	287.9904	37.52	-5.42	32.10	63.50	-31.40	-	-	QP
6	654.2318	41.20	0.64	41.84	63.50	-21.66	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

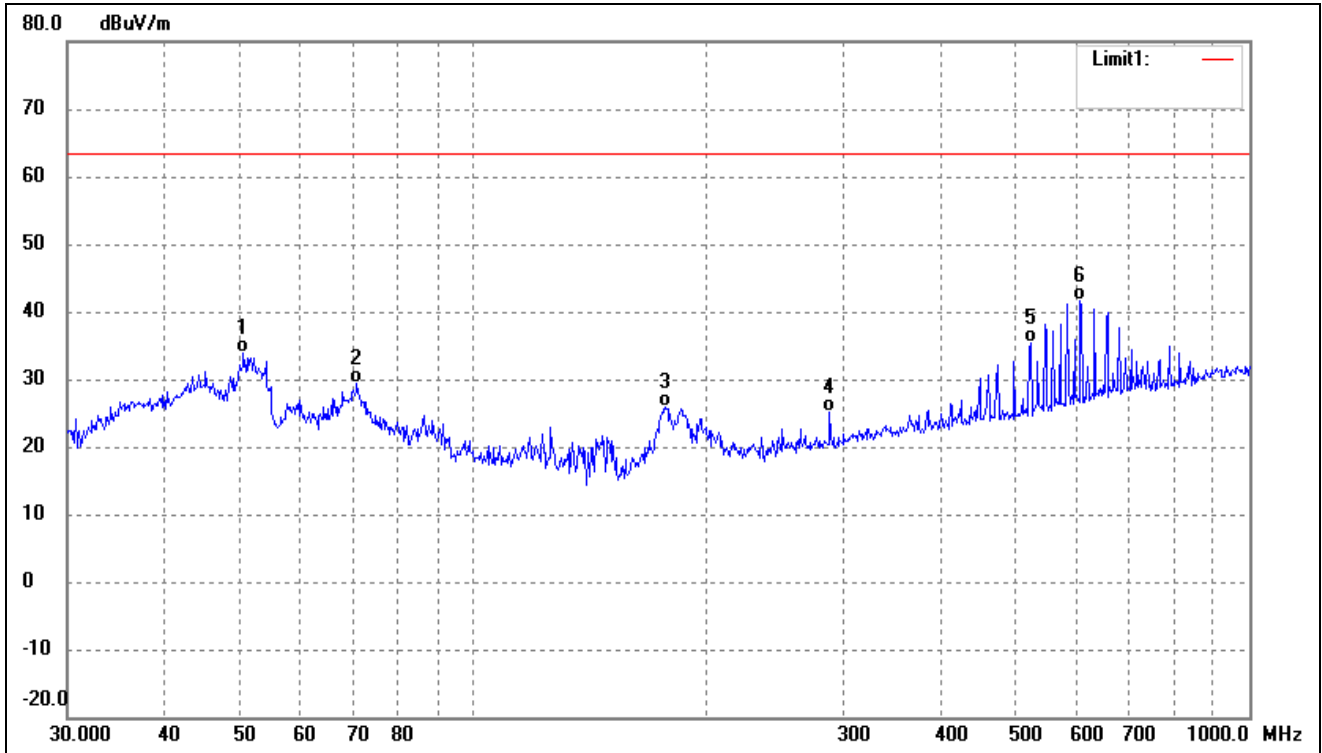


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.5860	41.22	-7.42	33.80	63.50	-29.70	-	-	QP
2	70.8315	40.50	-11.14	29.36	63.50	-34.14	-	-	QP
3	176.8878	36.30	-10.30	26.00	63.50	-37.50	-	-	QP
4	287.9904	30.62	-5.42	25.20	63.50	-38.30	-	-	QP
5	522.7180	37.13	-1.70	35.43	63.50	-28.07	-	-	QP
6	605.6592	41.58	-0.06	41.52	63.50	-21.98	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

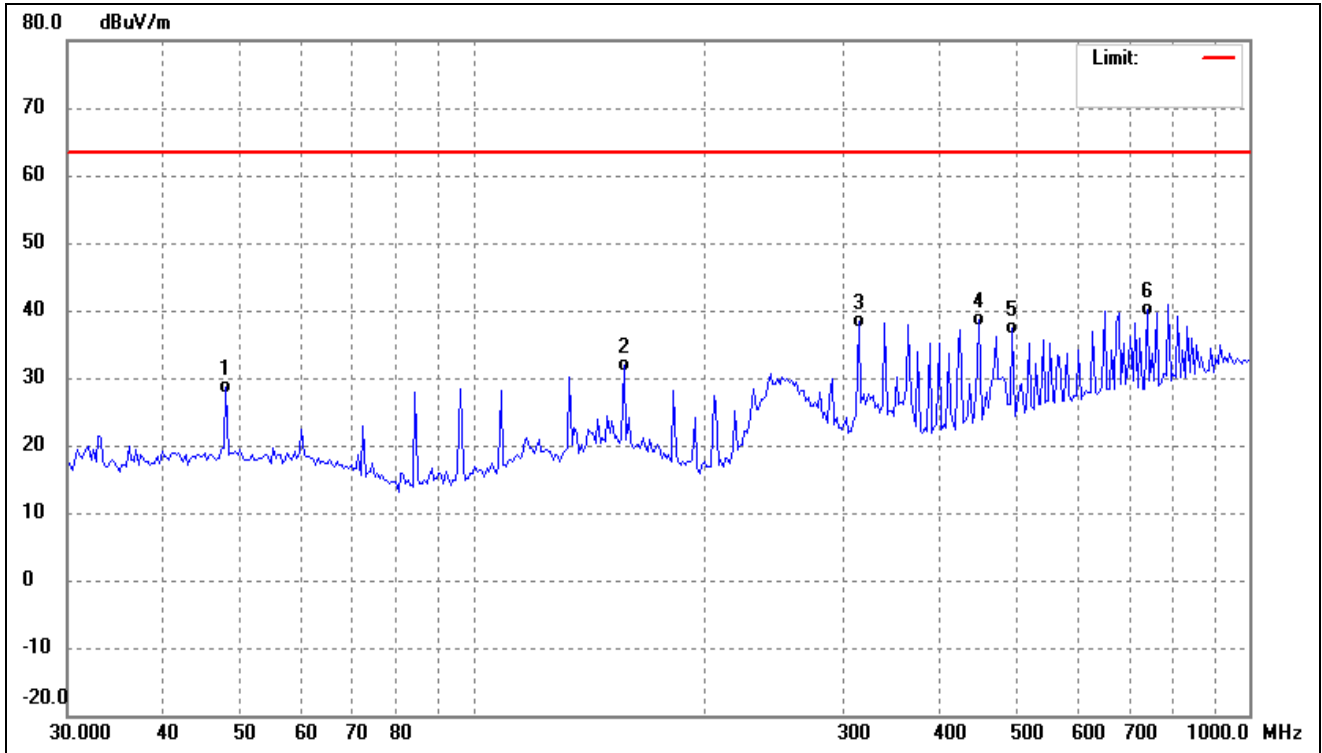


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	36.88	-8.23	28.65	63.50	-34.85	-	-	QP
2	156.4259	40.40	-8.60	31.80	63.50	-31.70	-	-	QP
3	313.6482	46.36	-7.87	38.49	63.50	-25.01	-	-	QP
4	448.8361	43.32	-4.61	38.71	63.50	-24.79	-	-	QP
5	495.2379	41.43	-3.97	37.46	63.50	-26.04	-	-	QP
6	739.2136	40.61	-0.37	40.24	63.50	-23.26	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

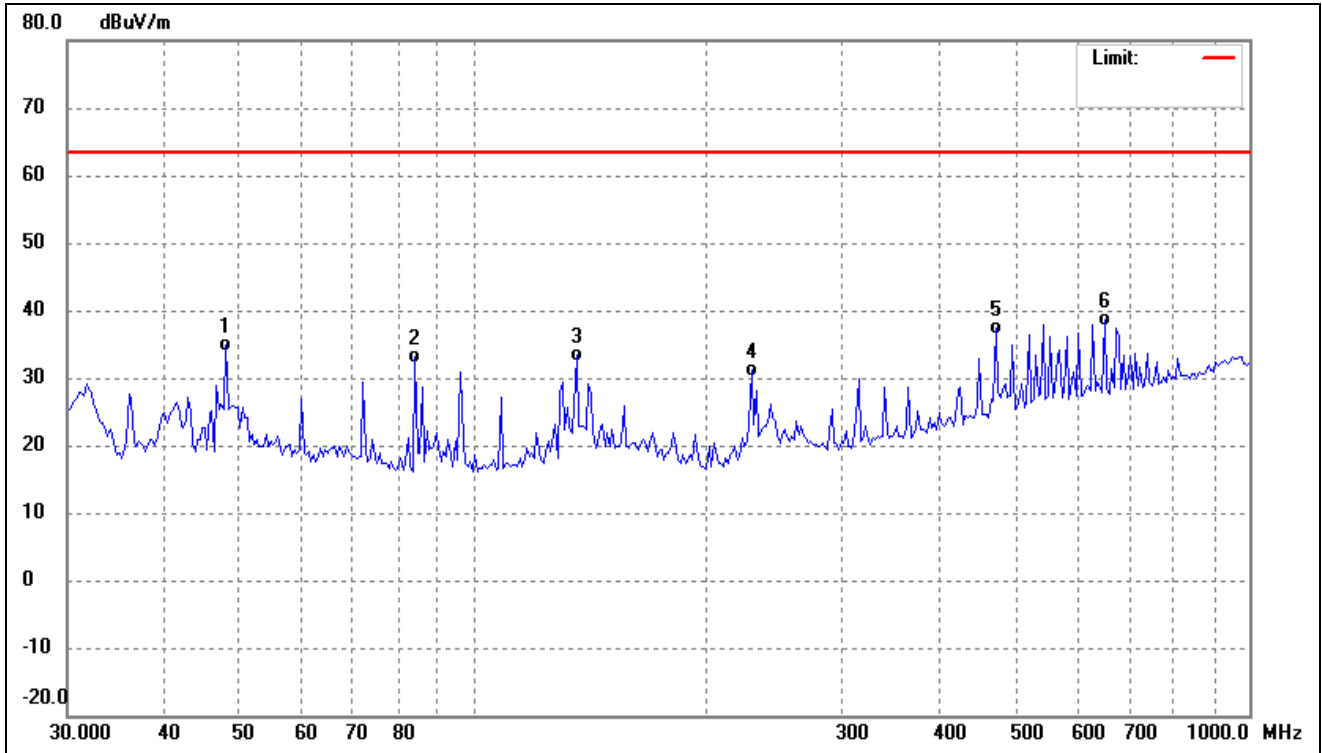


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.0392	43.18	-8.23	34.95	63.50	-28.55	-	-	QP
2	84.2839	46.09	-13.03	33.06	63.50	-30.44	-	-	QP
3	135.9163	42.90	-9.61	33.29	63.50	-30.21	-	-	QP
4	228.6173	42.76	-11.70	31.06	63.50	-32.44	-	-	QP
5	471.4665	41.56	-4.29	37.27	63.50	-26.23	-	-	QP
6	651.3831	39.90	-1.30	38.60	63.50	-24.90	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

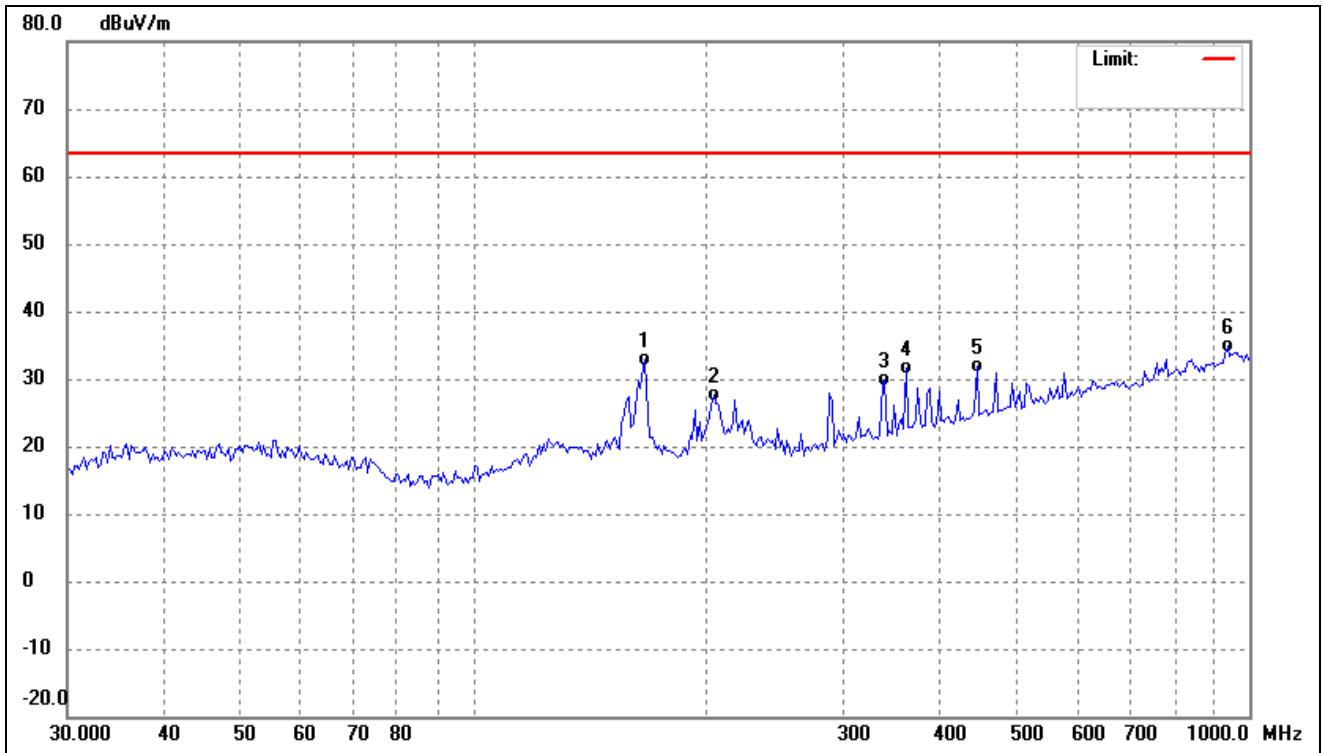

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	166.6385	41.56	-8.79	32.77	63.50	-30.73	-	-	QP
2	204.3052	39.59	-12.06	27.53	63.50	-35.97	-	-	QP
3	338.8546	37.20	-7.31	29.89	63.50	-33.61	-	-	QP
4	360.9775	38.41	-6.83	31.58	63.50	-31.92	-	-	QP
5	445.6932	36.55	-4.71	31.84	63.50	-31.66	-	-	QP
6	938.7139	32.86	2.01	34.87	63.50	-28.63	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

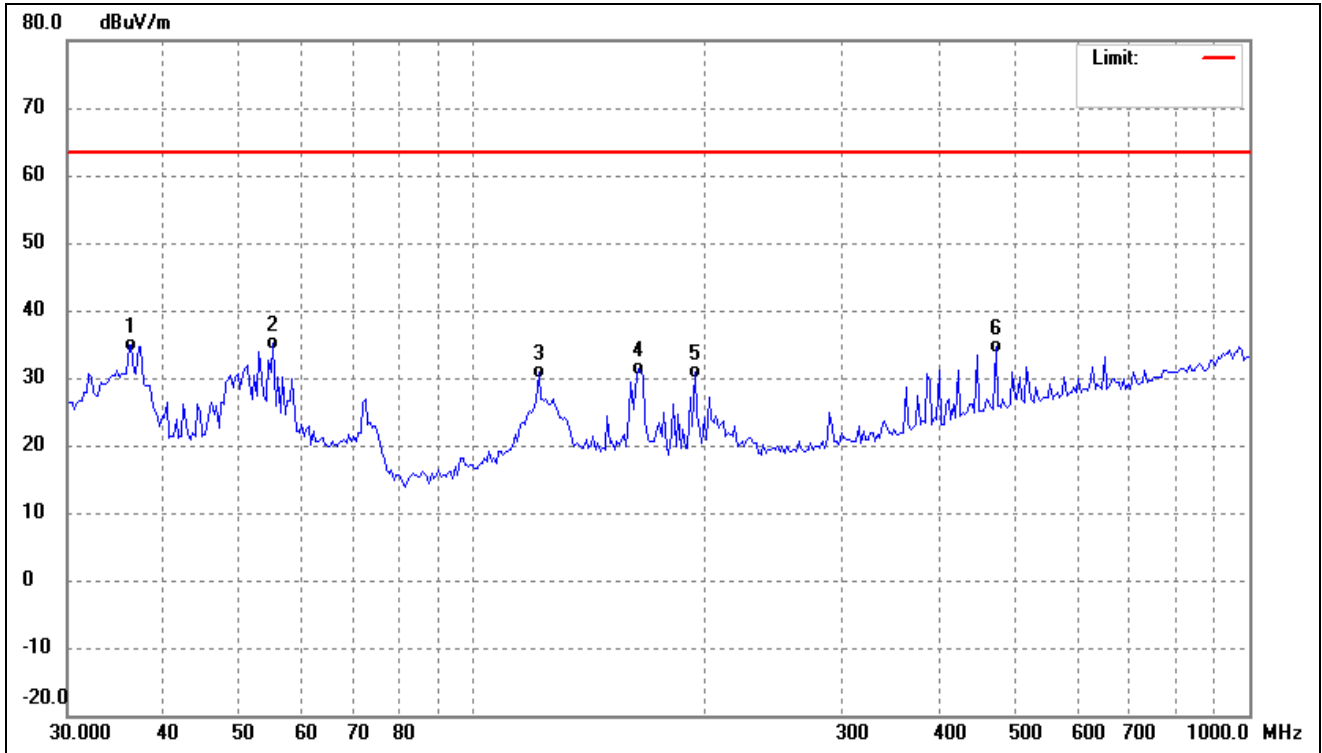

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.2678	44.11	-9.28	34.83	63.50	-28.67	-	-	QP
2	55.2883	43.87	-8.64	35.23	63.50	-28.27	-	-	QP
3	121.4623	41.34	-10.43	30.91	63.50	-32.59	-	-	QP
4	163.1623	40.08	-8.70	31.38	63.50	-32.12	-	-	QP
5	193.1366	42.49	-11.60	30.89	63.50	-32.61	-	-	QP
6	471.4665	38.88	-4.29	34.59	63.50	-28.91	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****