



No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan
District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM140500242902
Page: 1 of 15

FCC Test Report

Application No.: SZEM1405002429RF
Applicant: CE LINK LIMITED
Manufacturer/Factory: CE LINK LIMITED
Equipment Under Test (EUT):
EUT Name: Wireless charger pad
Model No.: WPC02
FCC ID: A4X-WPC02
Standards: 47 CFR PART 18: 2013
Date of Receipt: 2014-5-22
Date of Test: 2014-05-30 to 2014-06-26
Date of Issue: 2014-07-04

Test Result :	PASS*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



2 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission (150 kHz to 30 MHz)	47 CFR PART 18: 2013	FCC OST/ MP-5:1986	18.307(a)	Pass
Radiated Emission (9 kHz to 1GHz)	47 CFR PART 18: 2013	FCC OST/ MP-5:1986	18.305(b)	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF EUT	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 TEST LOCATION.....	5
4.5 TEST FACILITY	5
4.6 DEVIATION FROM STANDARDS	5
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
5 EQUIPMENT LIST.....	6
6 TEST RESULTS	9
6.1 CONDUCTED EMISSIONS	9
6.2 RADIATED EMISSIONS	13-15

4 General Information

4.1 Client Information

Applicant:	CE LINK LIMITED
Address of Applicant:	Building G, LiCheng Technology Industrial Zone, GongHe Village, ShaJing Town, ShenZhen City, China
Manufacturer:	CE LINK LIMITED
Address of Manufacturer:	Building G, LiCheng Technology Industrial Zone, GongHe Village, ShaJing Town, ShenZhen City, China
Factory:	CE LINK LIMITED
Address of Factory:	Building G, LiCheng Technology Industrial Zone, GongHe Village, ShaJing Town, ShenZhen City, China

4.2 General Description of EUT

Product Name:	Wireless charger pad
Model No.:	WPC02
Sample Type:	Wireless charger pad
Wireless Charging Operation Frequency	110kHz~205kHz
Power Supply:	USB cable by 5V
Test Voltage:	AC 120V~60Hz

4.3 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Power Adaptor	Supplied by client	DC5.0V
Mobile phone	Samsung	S4
USB cable	Supplied by client	100cm/shielded



4.4 Test Location

Only the Radiate emission(9kHz-30MHz) was test in SGS GZ, the other tests were performed at: SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong,China 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

5 Equipment List

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2015-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	2014-10-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
10	Band filter	Amindeon	Asi 3314	SEL0094	2015-05-16
11	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2014-10-24





RE in chamber(10m)					
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2014-08-30
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2015-04-19
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2015-03-03
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2015-05-09
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2016-08-31
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2016-08-31
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2016-05-04
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2016-08-31
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2014-07-01
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2015-03-04
EMC2065	Amplifier	HP	8447F	N/A	2014-08-31
EMC2063	1-26GHz Pre Amplifier	Compliance Direction System Inc.	PAP-1G26-48	6279.628	2014-07-29
EMC0075	310N Amplifier	Sonoma	310N	272683	2015-03-03
EMC0523	Active Loop Antenna	EMCO	6502	42963	2016-03-03
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2014-06-01
EMC2069	2.4GHz filter	Micro-Tronics	BRM 50702	149	2015-04-19
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2016-06-05


General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2014-10-24
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2014-10-24
3	Barometer	ChangChun	DYM3	SEL0088	2015-05-16

Note: The calibration interval is one year, all the instruments are valid.

6 Test Results

6.1 Conducted Emissions

Test Requirement:	47 CFR PART 18		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement. 		
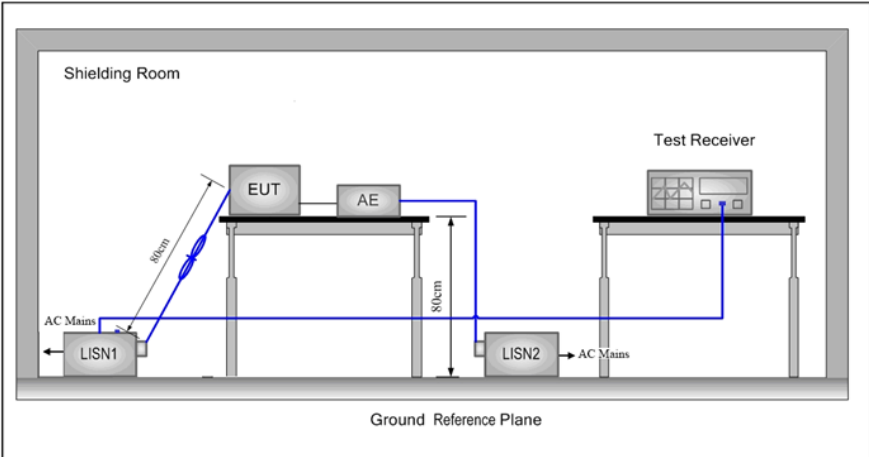
<p>Test Setup:</p>	
<p>Test Mode:</p>	<p>Wireless charge mode: Pretest EUT with USB terminated and without USB terminated to find the worst case, complete test was conducted without USB terminated, since no worst case was found.</p>
<p>Instruments Used:</p>	<p>Refer to section 5 for details</p>
<p>Test Results:</p>	<p>Pass</p>


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Live Line:

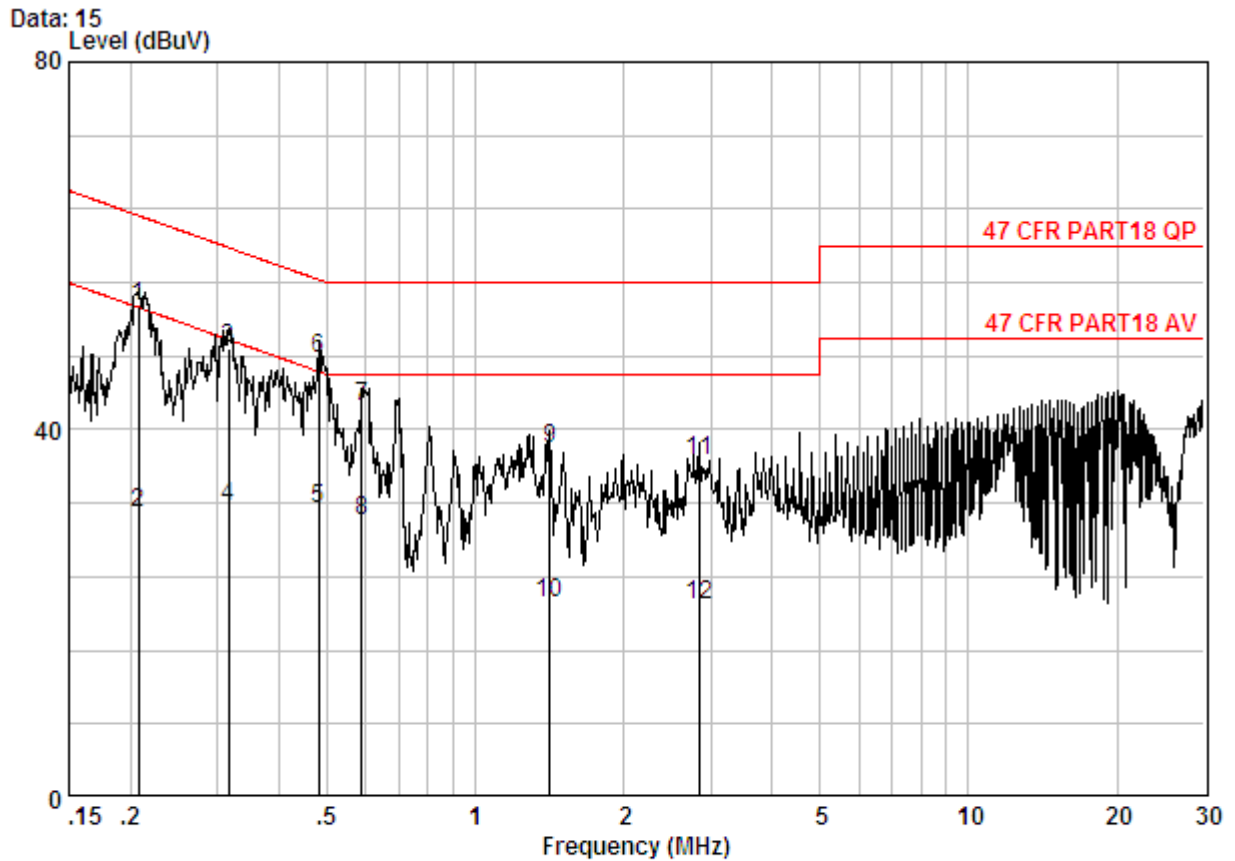


Site : Shielding Room
Condition : 47 CFR PART18 QP CE LINE
Job No. : 2429IT
Test mode : Wireless charge

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1	0.20723	0.02	9.70	43.73	53.44	63.32	-9.87 QP
2	0.20723	0.02	9.70	21.27	30.99	53.32	-22.32 Average
3	0.31662	0.01	9.72	39.20	48.93	59.80	-10.87 QP
4	0.31662	0.01	9.72	21.97	31.70	49.80	-18.09 Average
5	0.48119	0.01	9.80	21.49	31.30	46.32	-15.02 Average
6 @	0.48119	0.01	9.80	37.85	47.66	56.32	-8.66 QP
7	0.58851	0.01	9.80	32.72	42.53	56.00	-13.47 QP
8	0.58851	0.01	9.80	20.19	30.01	46.00	-15.99 Average
9	1.418	0.02	9.80	28.04	37.86	56.00	-18.14 QP
10	1.418	0.02	9.80	11.41	21.23	46.00	-24.77 Average
11	2.839	0.02	9.84	26.71	36.56	56.00	-19.44 QP
12	2.839	0.02	9.84	11.07	20.92	46.00	-25.08 Average



Neutral Line:

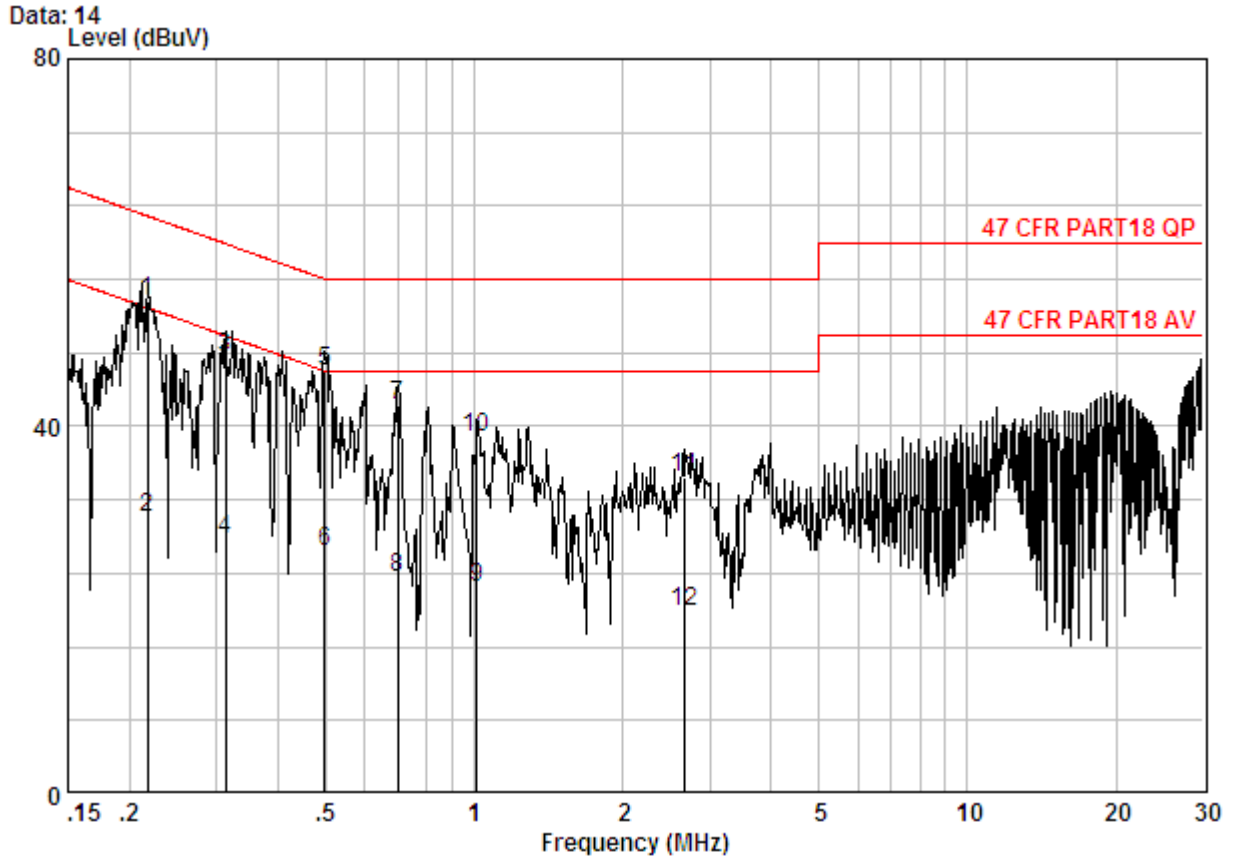

Site : Shielding Room
Condition : 47 CFR PART18 QP CE NEUTRAL
Job No. : 2429IT
Test mode : Wireless charge

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 @	0.21735	0.02	9.70	43.93	53.65	62.92	-9.27	QP
2	0.21735	0.02	9.70	20.28	30.00	52.92	-22.92	Average
3	0.31328	0.01	9.72	37.69	47.42	59.88	-12.46	QP
4	0.31328	0.01	9.72	17.93	27.65	49.88	-22.23	Average
5	0.49673	0.01	9.80	36.26	46.07	56.05	-9.98	QP
6	0.49673	0.01	9.80	16.64	26.45	46.05	-19.61	Average
7	0.70096	0.02	9.80	32.57	42.39	56.00	-13.61	QP
8	0.70096	0.02	9.80	13.74	23.56	46.00	-22.44	Average
9	1.010	0.02	9.80	12.53	22.35	46.00	-23.65	Average
10	1.010	0.02	9.80	28.95	38.77	56.00	-17.23	QP
11	2.678	0.02	9.83	24.60	34.46	56.00	-21.54	QP
12	2.678	0.02	9.83	10.04	19.90	46.00	-26.10	Average

6.2 Radiated Emissions

Test Requirement:	47 CFR PART 18			
Test Site:	Measurement Distance: 10m (Semi-Anechoic Chamber)			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz~150kHz	Quasi-peak	200Hz	≥RBW
	150kHz~30MHz	Quasi-peak	9kHz	≥RBW
	30MHz~1GHz	Quasi-peak	100kHz	≥RBW
Limit:	Frequency	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009-30MHz	53.0	Quasi-peak	10
	30MHz-88MHz	40.	Quasi-peak	3
	88MHz-216MHz	43.5	Quasi-peak	3
	216MHz-1000MHz	46.0	Quasi-peak	3
Remark:According to the article 18.305(b), The operating frequency is non-ISM frequency;the RF Power generated by equipment is below 500(watts); According to the clause 18.305(c), the EUT belongs to Consumer equipment.				
Test Setup:				

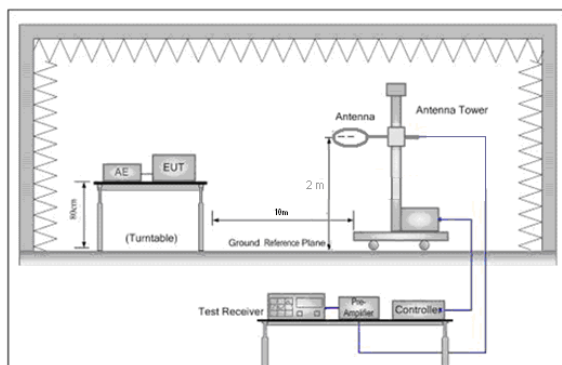


Figure 1. Below 30MHz

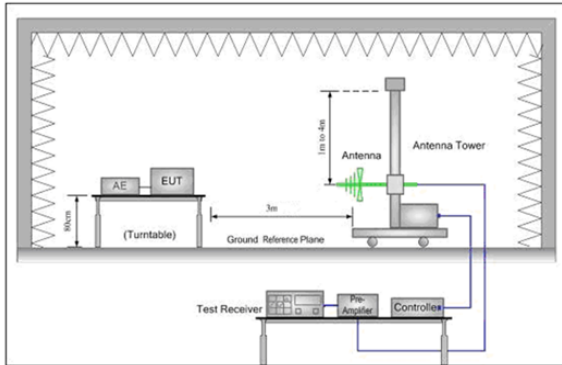


Figure 2. 30MHz to 1GHz

Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber(30MHz-1000MHz) and 10 meter semi-anechoic chamber(9kHz-30MHz). The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters(30MHz-1000MHz) and 10 meter(9kHz-30MHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. Above 30MHz:The Analyzer/Receiver scanned from 30MHz to 1000MHz.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. Below 30MHz: The Analyzer/Receiver scanned from 9kHz to 30MHz.The antenna height is 2 meters above the ground to determine the maximum value of the field strength. For each suspected emission, the EUT was arranged to its worst case
-----------------	--




	<p>and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 2 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> <p>i. Measurement Requirement: According to the clause 18.305(c)notes 2. At frequencies at or above 30MHz: $Limit_{3m}(dBuV) = Limit_{xm}(dBuV) + 20\log(xm/3m)$ At frequencies below 30MHz: $Limit_{10m}(dBuV) = Limit_{xm}(dBuV) + 20\log(xm/3m)$ Remark: x replace the number 10,30,300.</p>
Test Mode:	Wireless charge mode: Pretest EUT with USB terminated and without USB terminated to find the worst case, complete test was conducted without USB terminated, since no worst case was found.
Instruments Used:	Refer to section 5 for details
Test Results:	Pass



0.009MHz-30MHz

Data: 11

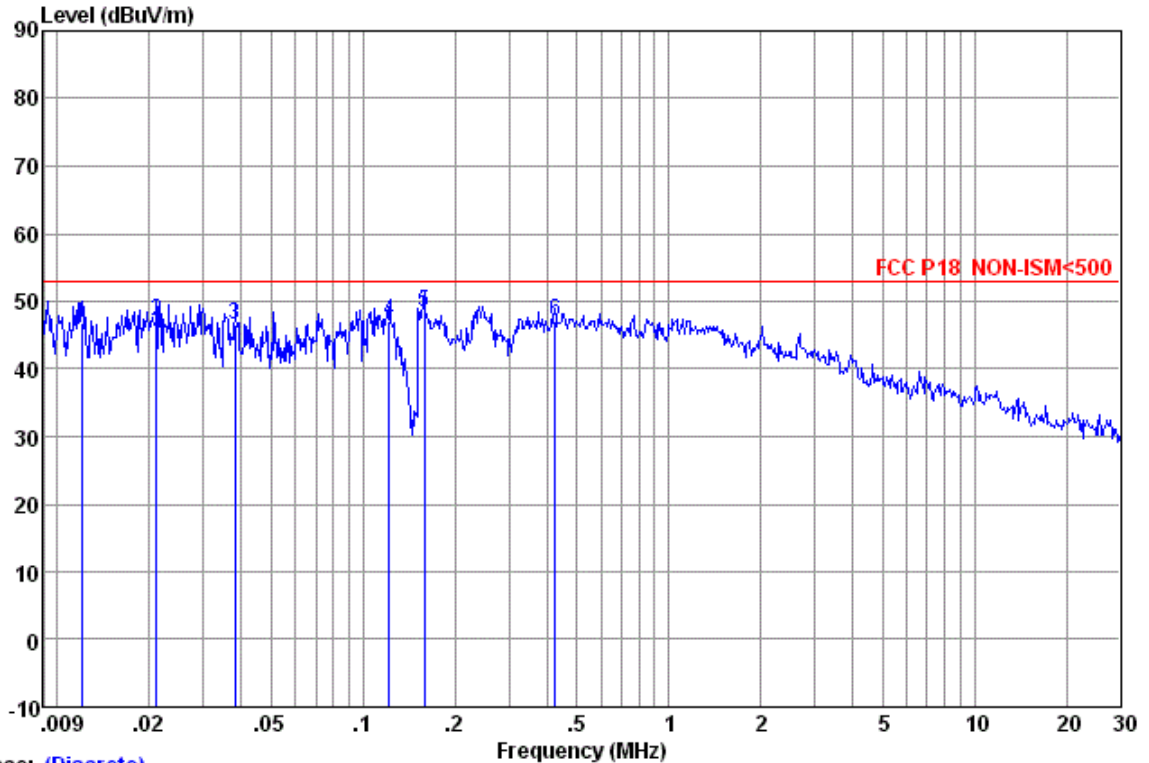

Trace: (Discrete)
Site : SGS
Condition : FCC P18 NON-ISM<500 10m 6502LOOP ANTENNA2014

Remark : Level=Read Level + Cable loss
: + Antenna Factor - Preamp factor

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	0.012	61.12	16.90	0.01	31.21	46.82	53.06	-6.24	QP
2	0.021	61.36	16.90	0.03	31.22	47.07	53.06	-5.99	QP
3	0.038	62.84	14.90	0.06	31.27	46.53	53.06	-6.53	QP
4	0.122	65.53	12.90	0.04	31.30	47.17	53.06	-5.89	QP
5	0.159	66.95	12.80	0.07	31.29	48.53	53.06	-4.53	QP
6	0.424	65.63	12.57	0.09	31.27	47.02	53.06	-6.04	QP

Remark:

1:The loop antenna rotated about both Vertical and Horizontal to find the maximum emission,So only the worst position(Horizontal) was report.

2:According to the clause 2.3 of MP-5:1986, the highest frequency is 205kHz, So the Range of frequency measurements is 9kHz to 30MHz.