

TEST REPORT

Reference No..... : WTX21X07076051W-1
FCC ID : A4X-WPC10-1TCNA
Applicant : CE LINK LIMITED
Address : Building M,LiCheng Technology Industrial Zone,GongHe Village,ShaJing
Town,ShenZhen City,China.
Product Name : Wireless Charger
Test Model. : WPC10-1TCNA
Standards : FCC Part 18
Date of Receipt sample : Jul. 28, 2021
Date of Test..... : Jul. 28, 2021 to Aug. 10, 2021
Date of Issue : Aug. 10, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

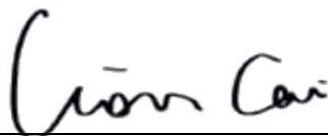

Jason Su / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND OPERATION MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS	8
3. CONDUCTED EMISSIONS	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST PROCEDURE.....	9
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	9
3.4 ENVIRONMENTAL CONDITIONS.....	9
3.5 TEST RECEIVER SETUP.....	10
3.6 SUMMARY OF TEST RESULTS/PLOTS.....	10
4. RADIATED EMISSIONS	15
4.1 TEST PROCEDURE.....	15
4.2 TEST RECEIVER SETUP.....	17
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
4.4 ENVIRONMENTAL CONDITIONS.....	17
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	17
APPENDIX PHOTOGRAPHS	24

Report version

Version No.	Date of issue	Description
Rev.00	Aug. 10, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	CE LINK LIMITED
Address of applicant:	Building M,LiCheng Technology Industrial Zone, GongHe Village,ShaJing Town,ShenZhen City, China.
Manufacturer:	Dongguan CE LINK LIMITED
Address of manufacturer:	22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China.
Factory 1:	SuiChuan CE LINK LIMITED
Address of factory	SuiChuan county industrial park east zone, Ji'an city Jiangxi province, China.
Factory 2:	CE LINK VIET NAM COMPANY LIMITED.
Address of factory	Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charger
Trade Name:	CE-LINK
Model No.:	WPC10-1TCNA
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205KHz
Power adapter	/
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Modulation Type:	ASK
Rated Voltage:	Input: DC5V, 9V Output:DC5V, 9V
Rated Current:	Input:3A, 2.22A Output:1A, 1.1A
Rated Power:	Output: 5W, 7.5W, 10W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	/	Input DC5V3A; Output DC5V1A
TM2	Wireless Charging	/	Input DC9V2.22A; Output DC9V1.1A

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	XIAOMI	MDY-08-ES	/
wireless charging load	YBZ	YBZ wireless charging tester	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB-C Cable	0.8	Unshielded	Without Ferrite

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2021-03-30	2022-03-29
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-04-12	2022-04-11
Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50


3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

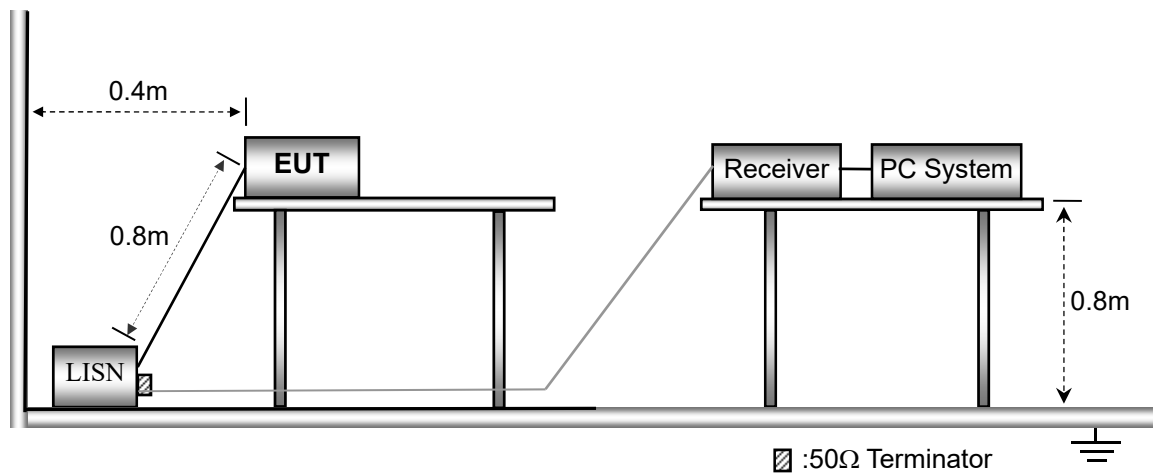

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

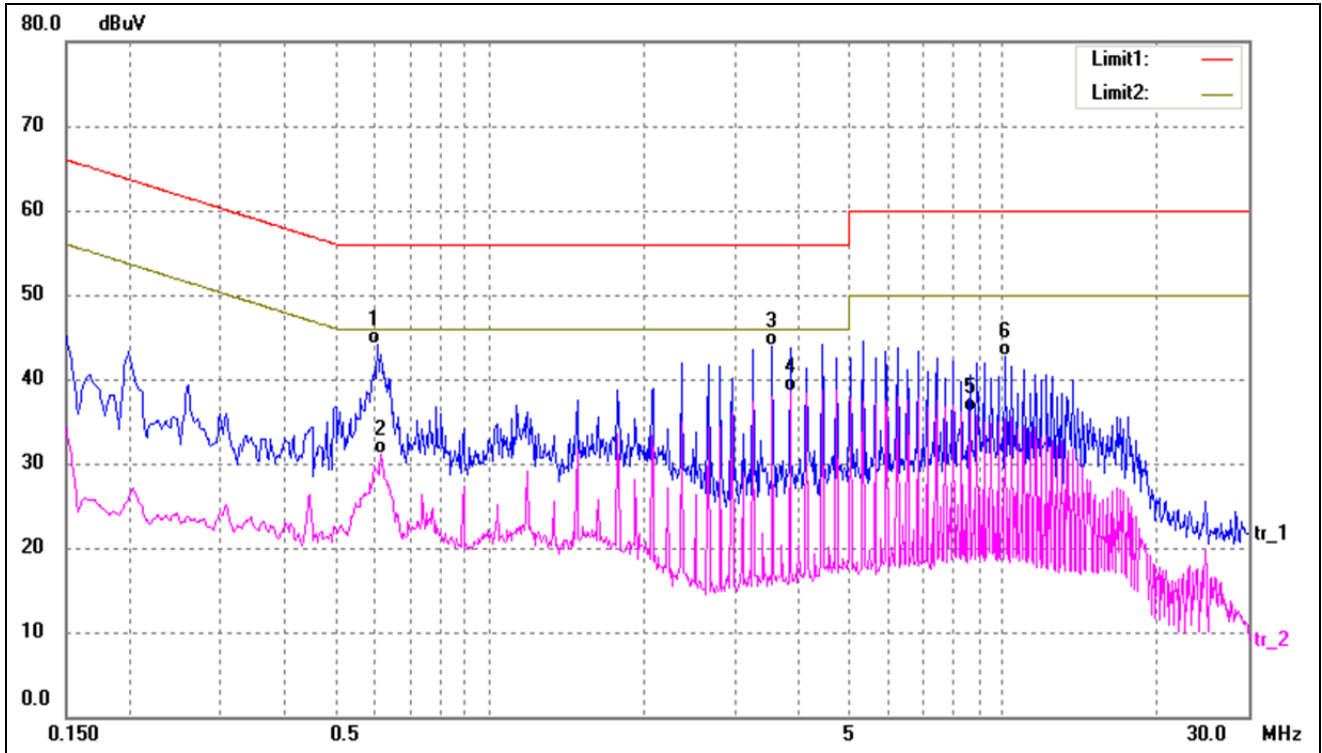


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6060	33.87	10.20	44.07	56.00	-11.93	QP
2	0.6140	20.89	10.20	31.09	46.00	-14.91	AVG
3	3.5580	33.71	10.26	43.97	56.00	-12.03	QP
4*	3.8540	28.23	10.25	38.48	46.00	-7.52	AVG
5	8.5940	25.92	10.27	36.19	50.00	-13.81	AVG
6	10.0780	32.37	10.28	42.65	60.00	-17.35	QP

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

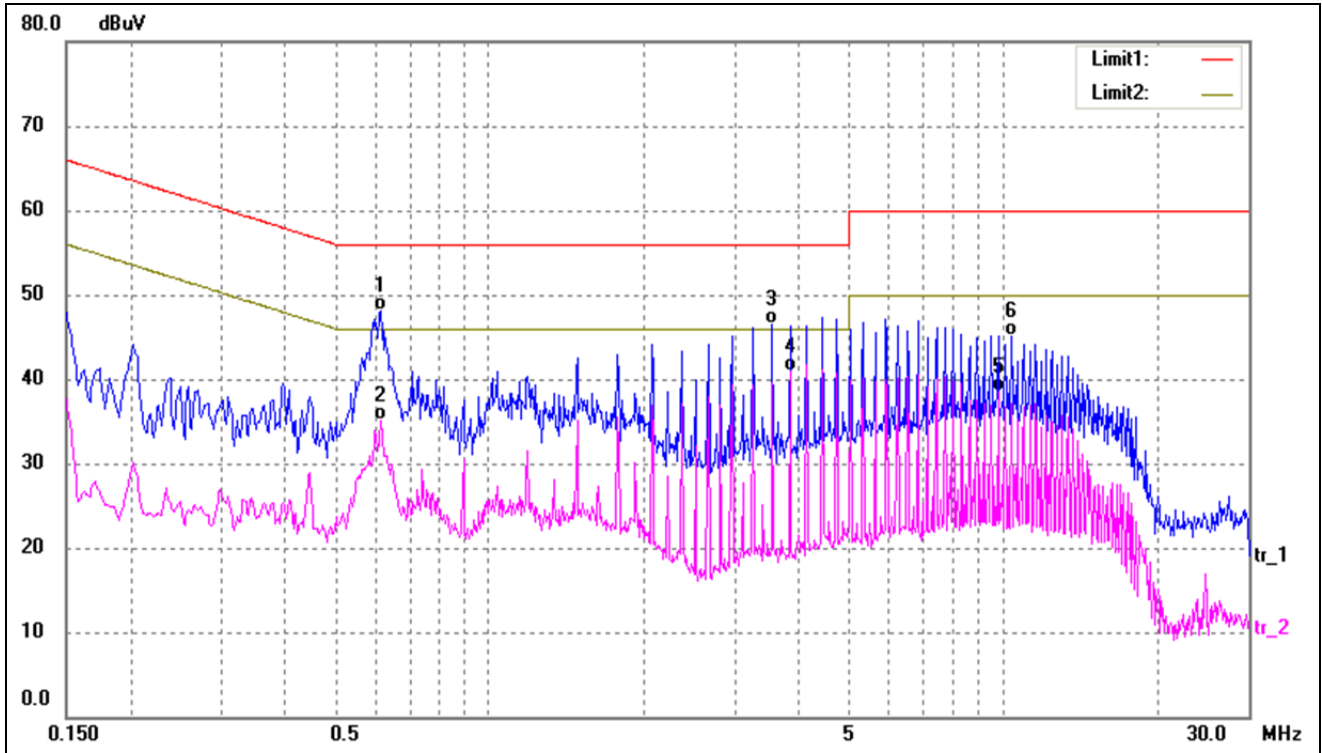


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6140	37.86	10.20	48.06	56.00	-7.94	QP
2	0.6140	24.83	10.20	35.03	46.00	-10.97	AVG
3	3.5580	36.17	10.26	46.43	56.00	-9.57	QP
4*	3.8540	30.61	10.25	40.86	46.00	-5.14	AVG
5	9.7820	28.17	10.28	38.45	50.00	-11.55	AVG
6	10.3740	34.86	10.30	45.16	60.00	-14.84	QP

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

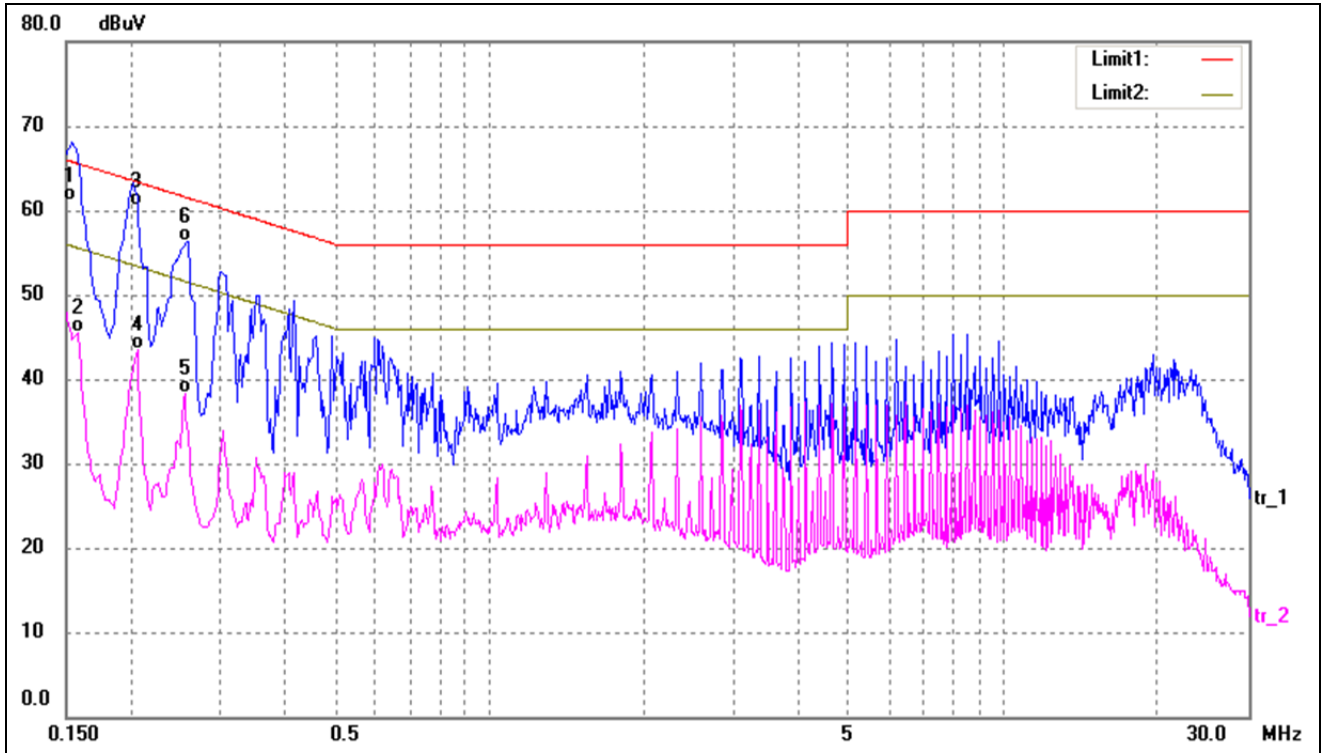

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	50.95	10.25	61.20	65.78	-4.58	QP
2	0.1580	35.30	10.25	45.55	55.56	-10.01	AVG
3*	0.2020	50.20	10.27	60.47	63.52	-3.05	QP
4	0.2059	33.14	10.27	43.41	53.37	-9.96	AVG
5	0.2540	28.13	10.26	38.39	51.62	-13.23	AVG
6	0.2580	46.09	10.26	56.35	61.49	-5.14	QP

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

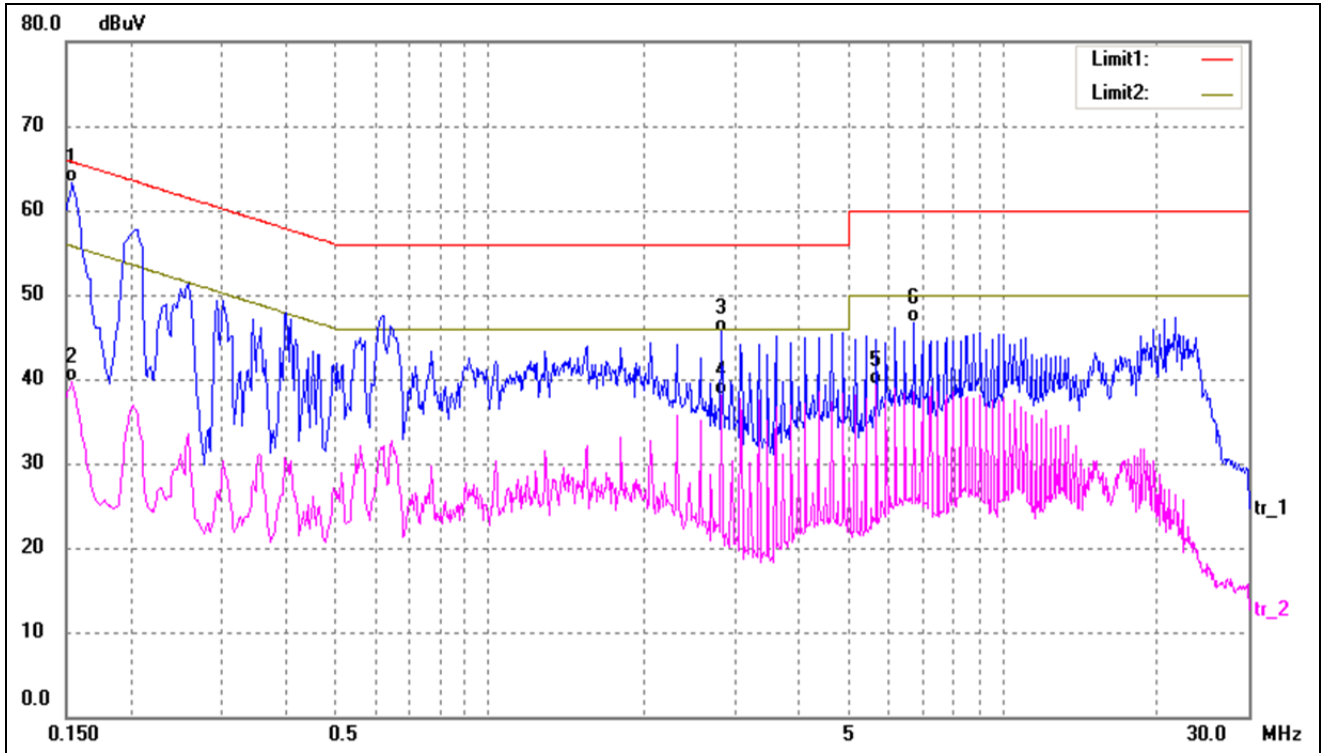

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	53.02	10.25	63.27	65.78	-2.51	QP
2	0.1539	29.38	10.25	39.63	55.78	-16.15	AVG
3	2.8340	35.32	10.28	45.60	56.00	-10.40	QP
4	2.8340	27.81	10.28	38.09	46.00	-7.91	AVG
5	5.6660	29.07	10.23	39.30	50.00	-10.70	AVG
6	6.6980	36.38	10.25	46.63	60.00	-13.37	QP

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

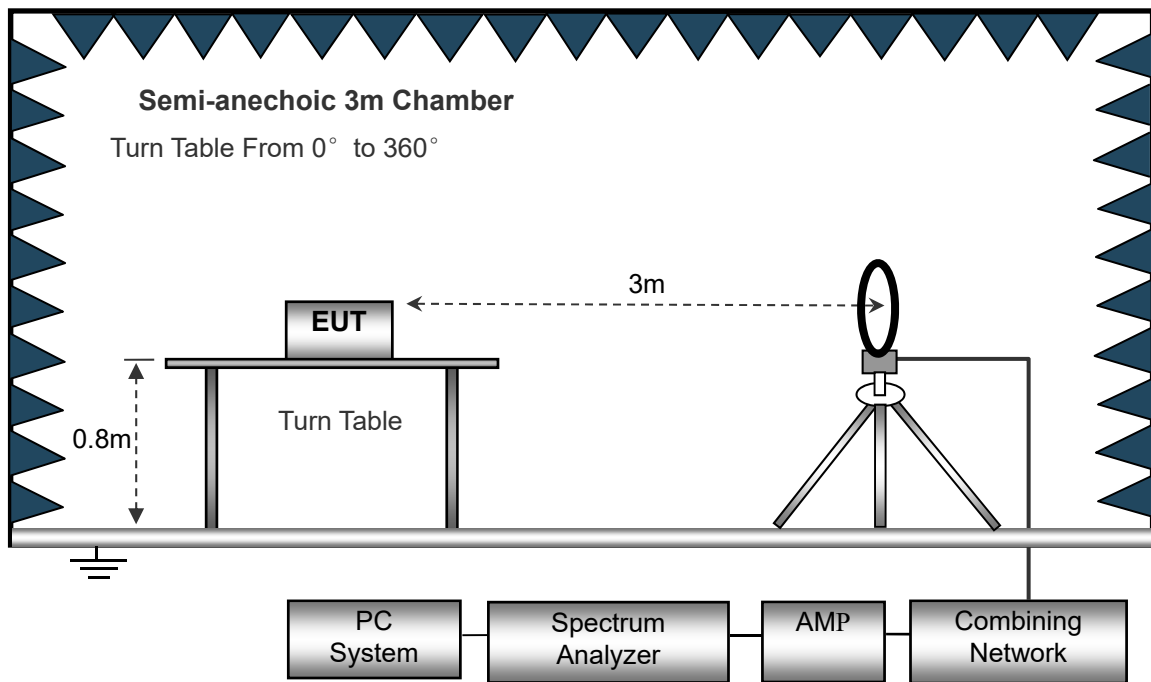

The test setup for emission measurement from 30 MHz to 1 GHz..

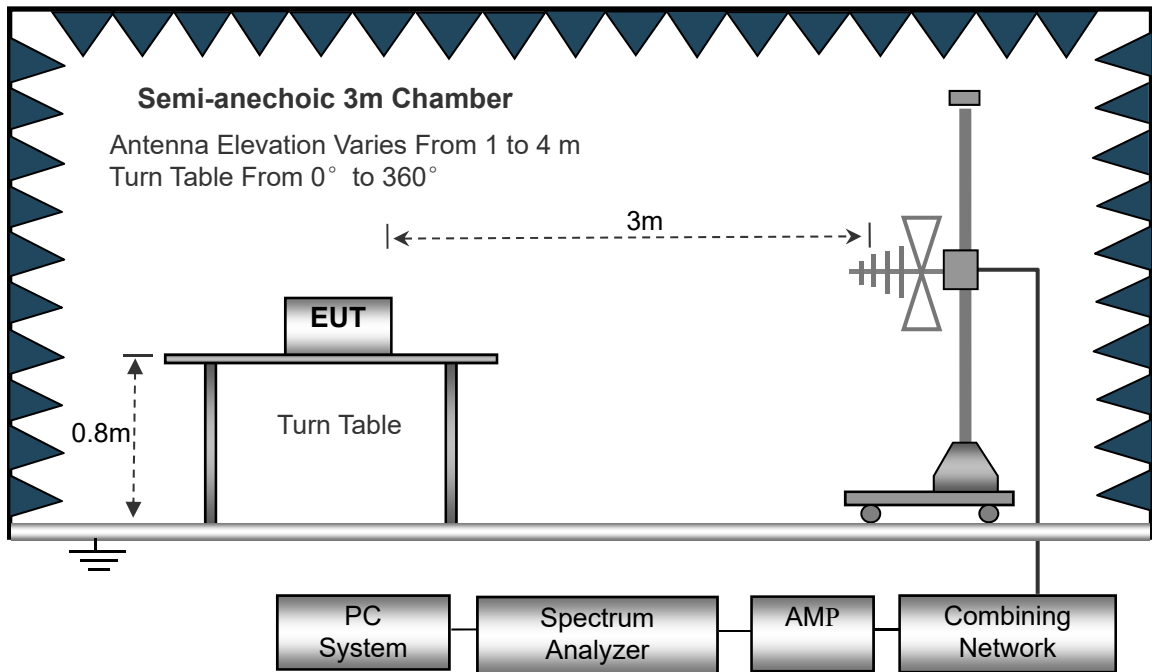

The test setup for emission measurement above 1 GHz..

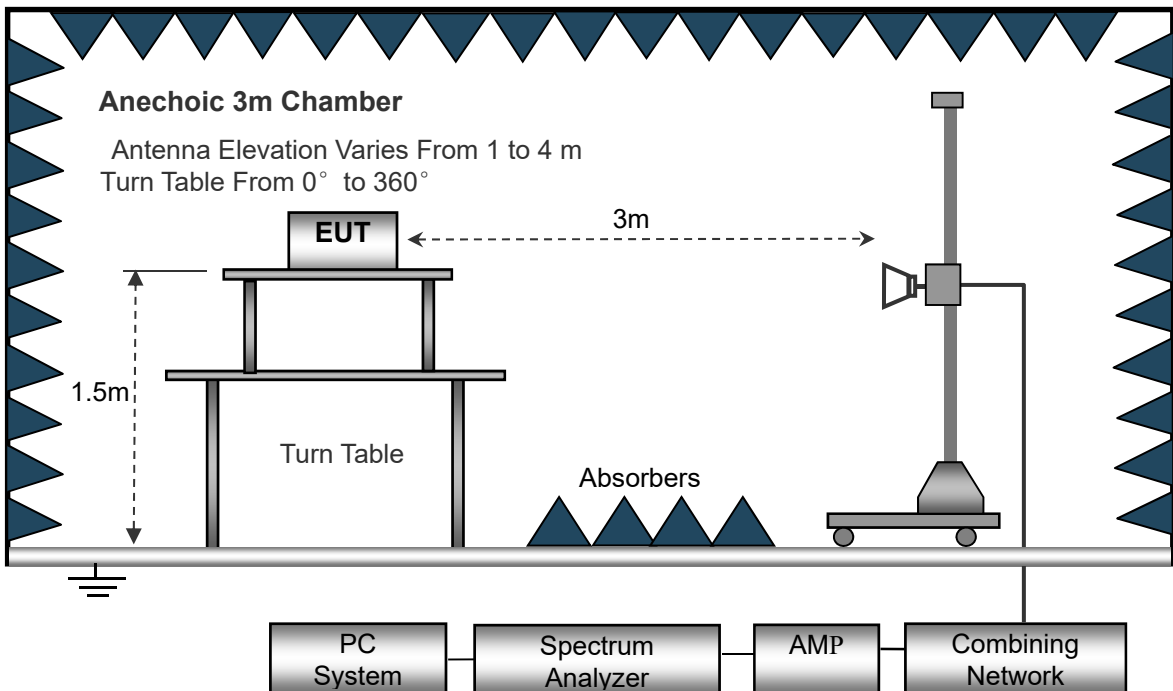

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

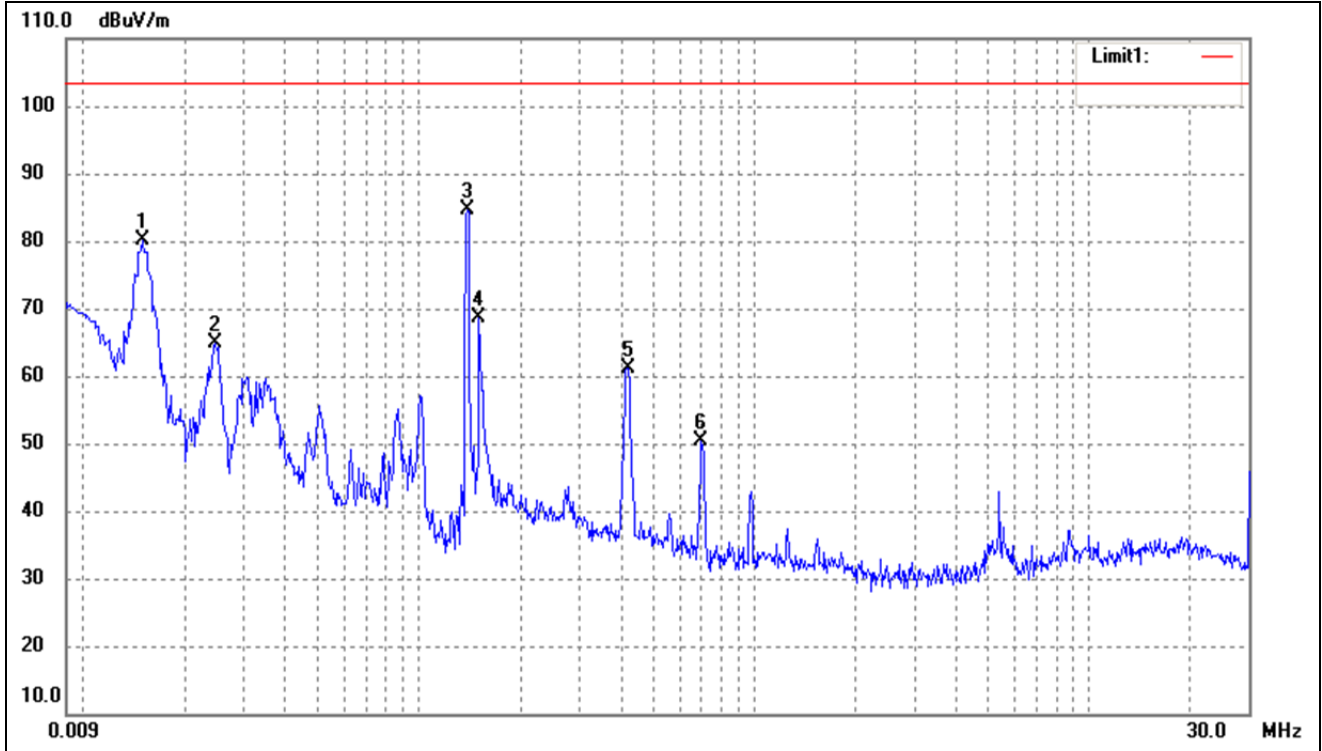

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0150	86.61	-6.58	80.03	103.50	-23.47	-	-	peak
2	0.0249	71.46	-6.49	64.97	103.50	-38.53	-	-	peak
3	0.1394	89.91	-5.17	84.74	103.50	-18.76	-	-	peak
4	0.1500	73.90	-5.20	68.70	103.50	-34.80	-	-	peak
5	0.4193	69.01	-7.78	61.23	103.50	-42.27	-	-	peak
6	0.6973	57.21	-6.75	50.46	103.50	-53.04	-	-	peak


Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

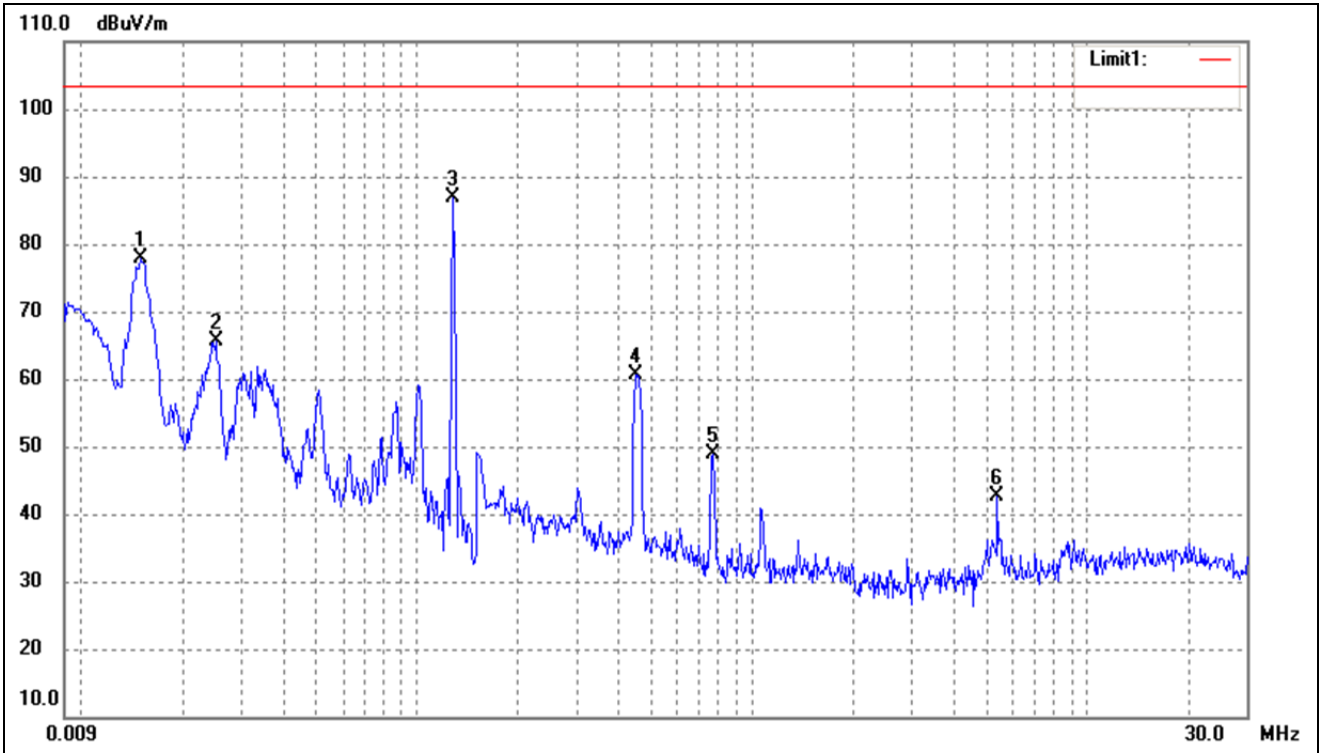

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0150	84.42	-6.58	77.84	103.50	-25.66	-	-	peak
2	0.0251	72.04	-6.48	65.56	103.50	-37.94	-	-	peak
3	0.1281	92.02	-5.14	86.88	103.50	-16.62	-	-	peak
4	0.4492	68.44	-7.74	60.70	103.50	-42.80	-	-	peak
5	0.7589	55.38	-6.51	48.87	103.50	-54.63	-	-	peak
6	5.3900	46.80	-4.29	42.51	103.50	-60.99	-	-	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

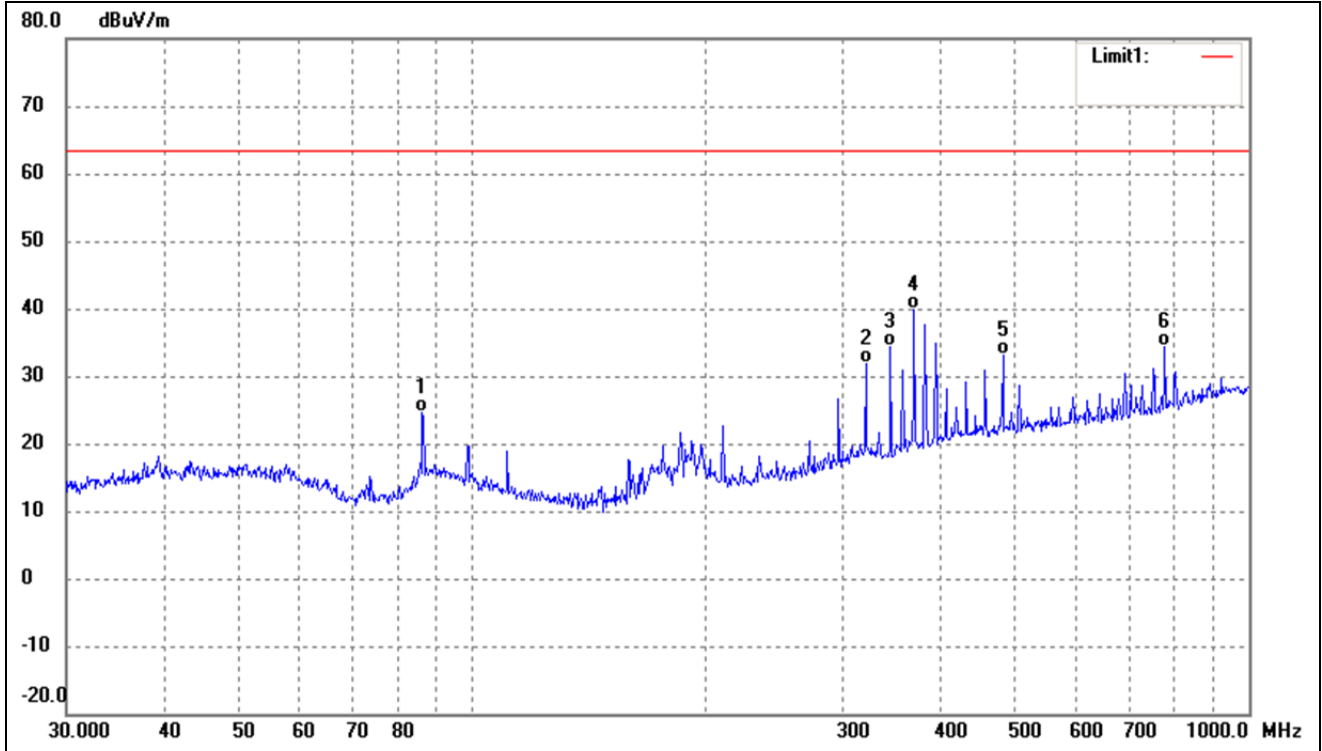


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	86.2001	38.46	-13.77	24.69	63.50	-38.81	-	-	QP
2	321.0608	40.54	-8.74	31.80	63.50	-31.70	-	-	QP
3	345.5952	42.43	-8.03	34.40	63.50	-29.10	-	-	QP
4	370.7023	46.99	-7.13	39.86	63.50	-23.64	-	-	QP
5	482.2156	38.27	-5.21	33.06	63.50	-30.44	-	-	QP
6	779.6068	36.08	-1.71	34.37	63.50	-29.13	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

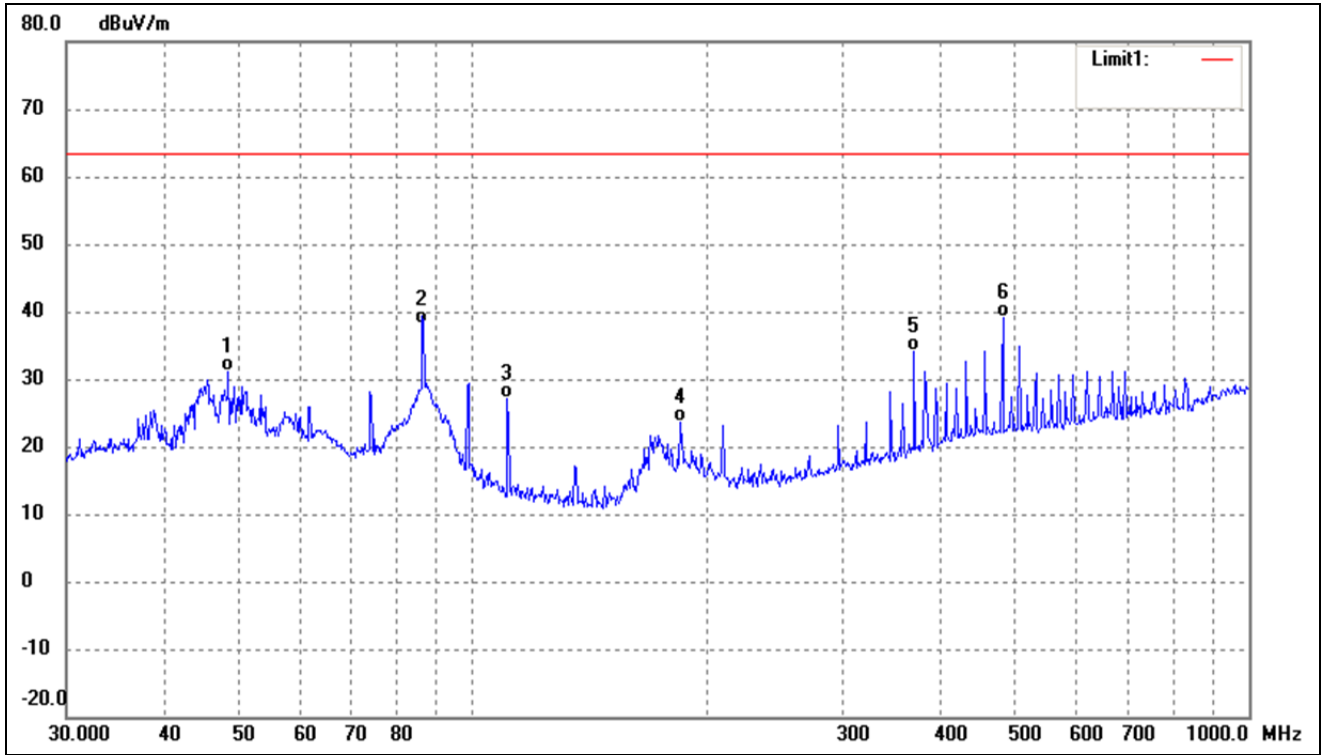


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.5016	41.96	-10.89	31.07	63.50	-32.43	-	-	QP
2	86.2001	51.97	-13.77	38.20	63.50	-25.30	-	-	QP
3	110.9571	39.79	-12.73	27.06	63.50	-36.44	-	-	QP
4	185.1379	36.96	-13.39	23.57	63.50	-39.93	-	-	QP
5	370.7023	41.20	-7.13	34.07	63.50	-29.43	-	-	QP
6	482.2156	44.42	-5.21	39.21	63.50	-24.29	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

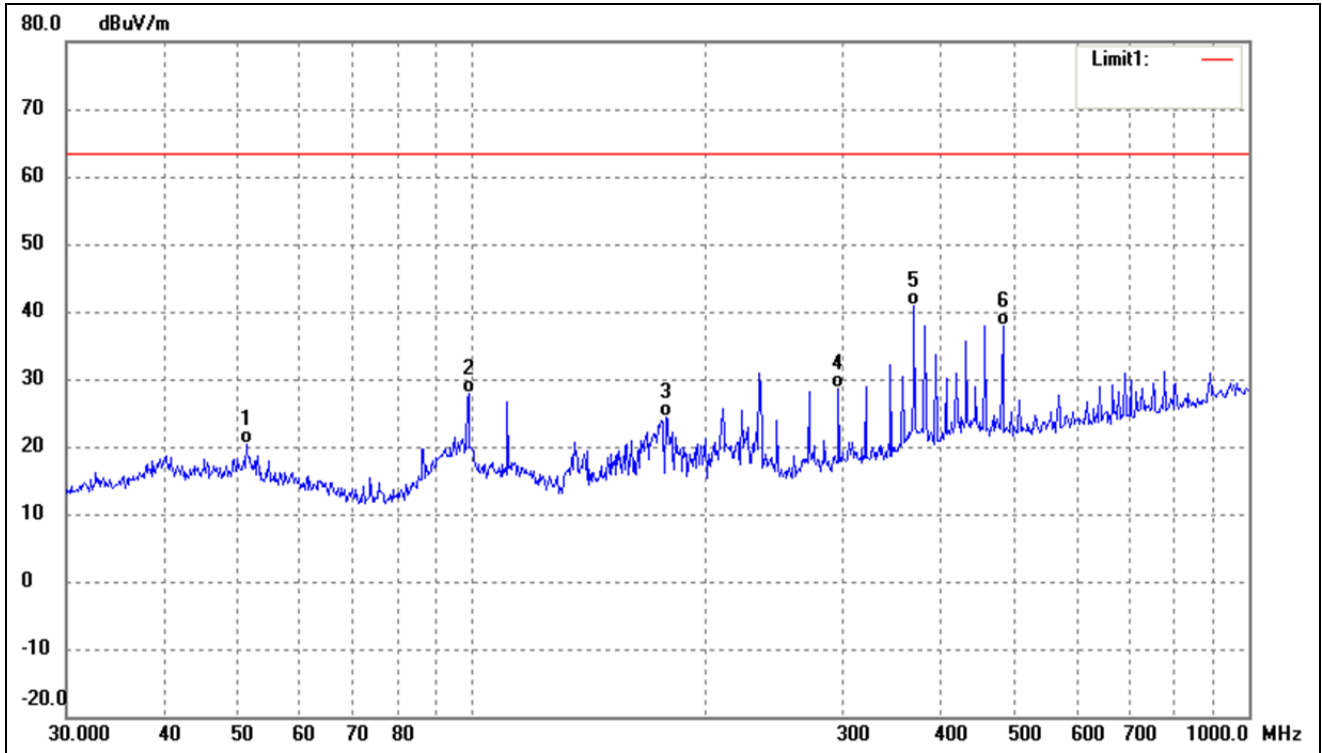

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1208	31.56	-11.10	20.46	63.50	-43.04	-	-	QP
2	98.8326	40.07	-12.15	27.92	63.50	-35.58	-	-	QP
3	177.5092	38.56	-14.11	24.45	63.50	-39.05	-	-	QP
4	296.1836	38.14	-9.44	28.70	63.50	-34.80	-	-	QP
5	370.7023	47.91	-7.13	40.78	63.50	-22.72	-	-	QP
6	482.2156	43.05	-5.21	37.84	63.50	-25.66	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

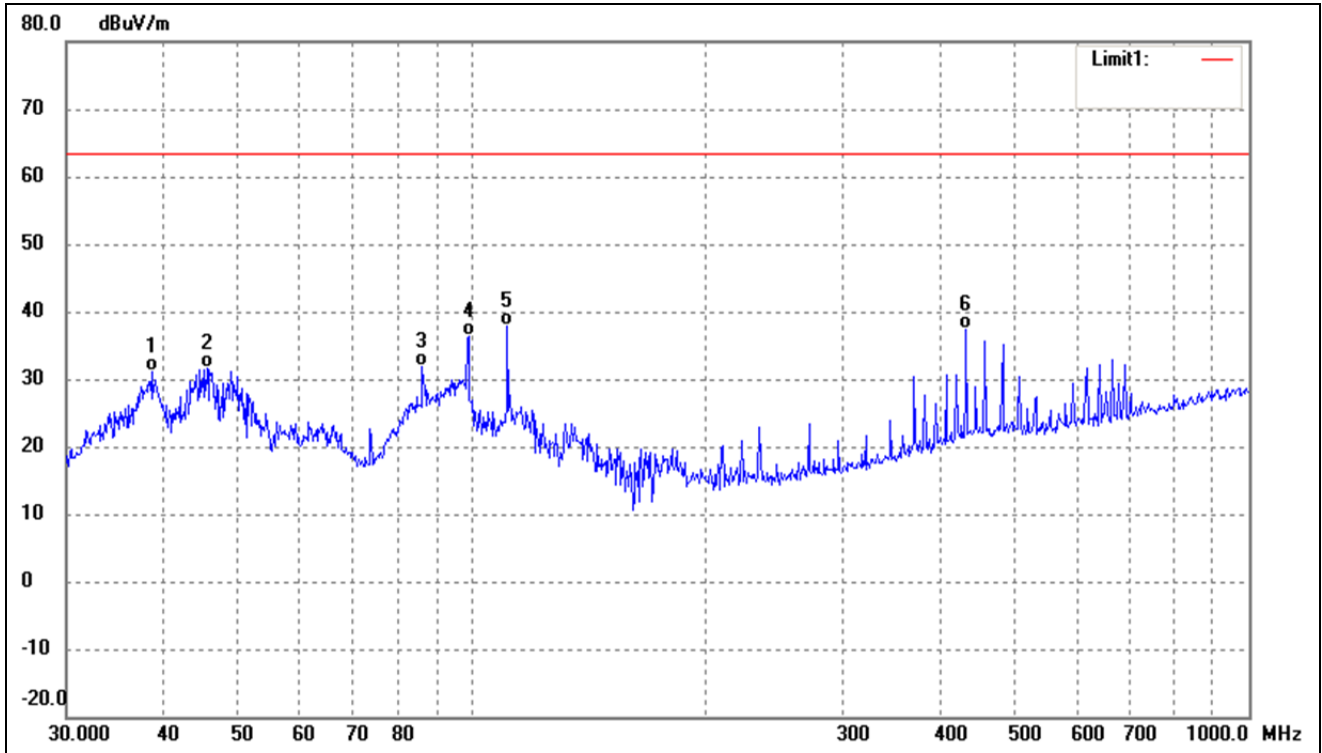

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.6160	42.24	-11.15	31.09	63.50	-32.41	-	-	QP
2	45.5348	42.52	-10.89	31.63	63.50	-31.87	-	-	QP
3	86.2001	45.66	-13.77	31.89	63.50	-31.61	-	-	QP
4	98.8326	48.50	-12.15	36.35	63.50	-27.15	-	-	QP
5	110.9571	50.70	-12.73	37.97	63.50	-25.53	-	-	QP
6	432.5457	42.79	-5.39	37.40	63.50	-26.10	-	-	QP

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******