

TEST REPORT

Reference No..... : WTX22X11239490W001
FCC ID..... : A4X-WPC10-2CM
Applicant..... : CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Manufacturer..... : DONGGUAN CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Product Name..... : Wireless Charging Dock for Phone and Watch
Model No..... : WPC10-2CM
Standards..... : FCC Part 18
Date of Receipt sample.... : 2022-11-28
Date of Test..... : 2022-11-28 to 2023-02-24
Date of Issue..... : 2023-02-24
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND OPERATION MODE6
1.6 MEASUREMENT UNCERTAINTY7
1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. CONDUCTED EMISSIONS10
3.1 STANDARD APPLICABLE.....10
3.2 TEST PROCEDURE.....10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10
3.4 ENVIRONMENTAL CONDITIONS10
3.5 TEST RECEIVER SETUP11
3.6 SUMMARY OF TEST RESULTS/PLOTS11

4. RADIATED EMISSIONS.....20
4.1 TEST PROCEDURE.....20
4.2 TEST RECEIVER SETUP21
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....21
4.4 ENVIRONMENTAL CONDITIONS22
4.5 SUMMARY OF TEST RESULTS/PLOTS22

APPENDIX PHOTOGRAPHS.....34

Report version

Version No.	Date of issue	Description
Rev.00	2023-02-24	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory 1#:	SuiChuan CE LINK LIMITED
Address of factory 1#:	SuiChuan county industrial park east zone, Ji'an city, Jiangxi Province, China.
Factory 2#:	CE LINK VIET NAM COMPANY LIMITED.
Address of factory 2#:	Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charging Dock for Phone and Watch
Trade Name:	CE-LINK
Model No.:	WPC10-2CM
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz; 320-330kHz
Modulation Type:	/
Antenna Type:	Coil Antenna
Antenna Gain	0dBi
Rated Voltage:	Input: 12V
Rated Current:	Input: 4000mA
Rated Power:	Output:1: USB-A:5V =2.4A, 12W Output:2: 5W/7.5W/10W Output:3: 2.5W for built-in Apple watch Charger

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output1: 2.5W
TM2	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output2:5W
TM3	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output2:10W
TM4	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output1: 2.5W + output2: 10W

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.54	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Smart phone	Apple	IPhone 12 Pro Max	/
Apple Watch	Apple	MKJP3CH/A	/
Wireless charging tester	YBZ	YBZ wireless charging tester	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	HP	8447F	2805A0347 5	2022-12-30	2023-12-29
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A1017 9	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

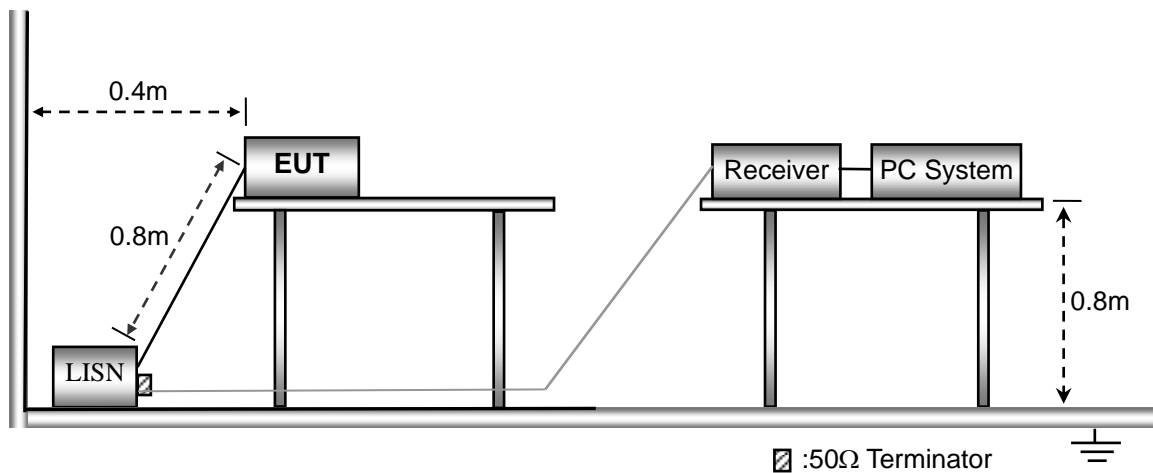

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

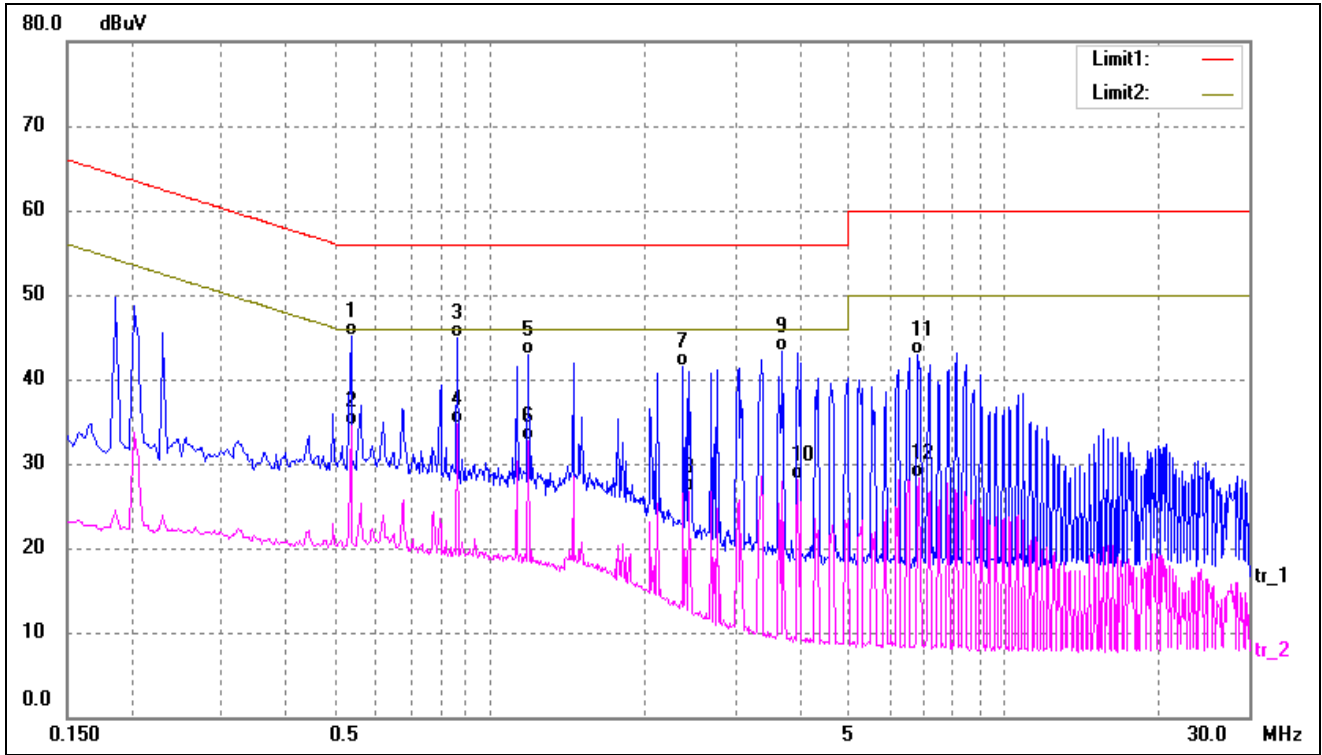


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.5340	34.91	10.22	45.13	56.00	-10.87	QP
2	0.5340	24.35	10.22	34.57	46.00	-11.43	AVG
3	0.8620	34.82	10.16	44.98	56.00	-11.02	QP
4	0.8620	24.55	10.16	34.71	46.00	-11.29	AVG
5	1.1900	32.74	10.16	42.90	56.00	-13.10	QP
6	1.1900	22.61	10.16	32.77	46.00	-13.23	AVG
7	2.3820	31.30	10.26	41.56	56.00	-14.44	QP
8	2.4420	16.35	10.26	26.61	46.00	-19.39	AVG
9	3.7020	32.98	10.30	43.28	56.00	-12.72	QP
10	3.9660	17.88	10.30	28.18	46.00	-17.82	AVG
11	6.7980	32.51	10.34	42.85	60.00	-17.15	QP
12	6.8140	18.00	10.34	28.34	50.00	-21.66	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

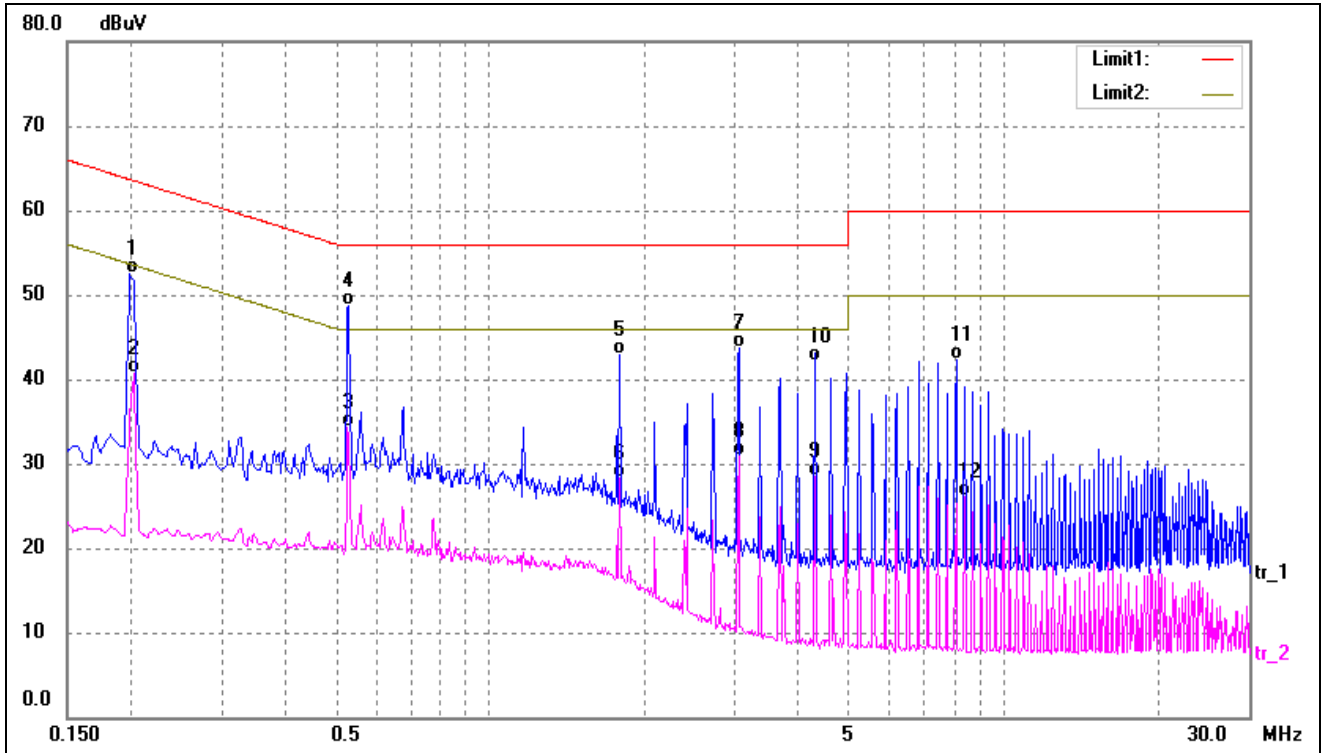


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1980	42.16	10.30	52.46	63.69	-11.23	QP
2	0.2020	30.49	10.30	40.79	53.52	-12.73	AVG
3	0.5260	24.14	10.22	34.36	46.00	-11.64	AVG
4*	0.5299	38.40	10.22	48.62	56.00	-7.38	QP
5	1.7900	32.60	10.23	42.83	56.00	-13.17	QP
6	1.7900	18.03	10.23	28.26	46.00	-17.74	AVG
7	3.0460	33.41	10.28	43.69	56.00	-12.31	QP
8	3.0460	20.65	10.28	30.93	46.00	-15.07	AVG
9	4.2860	18.14	10.31	28.45	46.00	-17.55	AVG
10	4.3060	31.77	10.31	42.08	56.00	-13.92	QP
11	8.0659	31.90	10.34	42.24	60.00	-17.76	QP
12	8.3900	15.83	10.34	26.17	50.00	-23.83	AVG

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

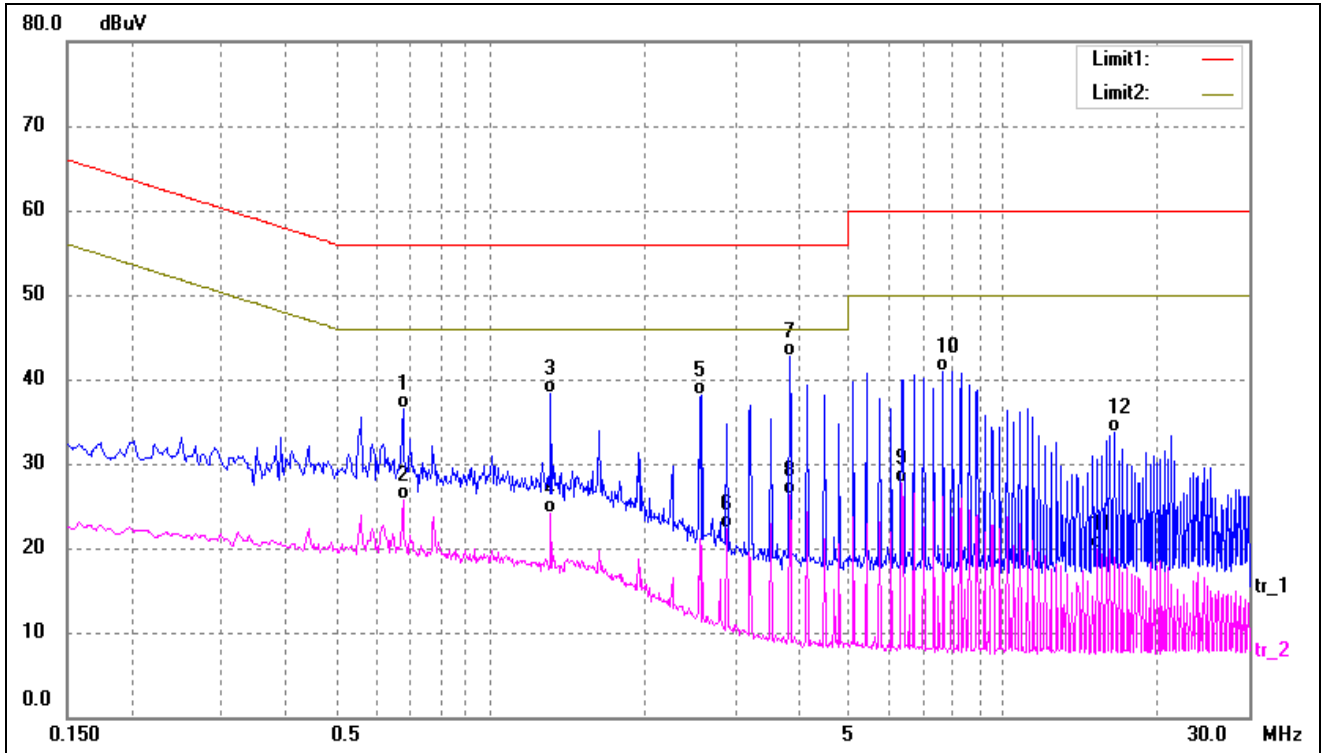


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6780	26.21	10.20	36.41	56.00	-19.59	QP
2	0.6780	15.54	10.20	25.74	46.00	-20.26	AVG
3	1.3140	28.05	10.17	38.22	56.00	-17.78	QP
4	1.3140	13.94	10.17	24.11	46.00	-21.89	AVG
5	2.5820	27.81	10.27	38.08	56.00	-17.92	QP
6	2.8900	12.04	10.27	22.31	46.00	-23.69	AVG
7*	3.8260	32.37	10.30	42.67	56.00	-13.33	QP
8	3.8260	16.04	10.30	26.34	46.00	-19.66	AVG
9	6.3500	17.36	10.34	27.70	50.00	-22.30	AVG
10	7.6300	30.61	10.34	40.95	60.00	-19.05	QP
11	15.1740	9.64	10.24	19.88	50.00	-30.12	AVG
12	16.4540	23.40	10.28	33.68	60.00	-26.32	QP

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

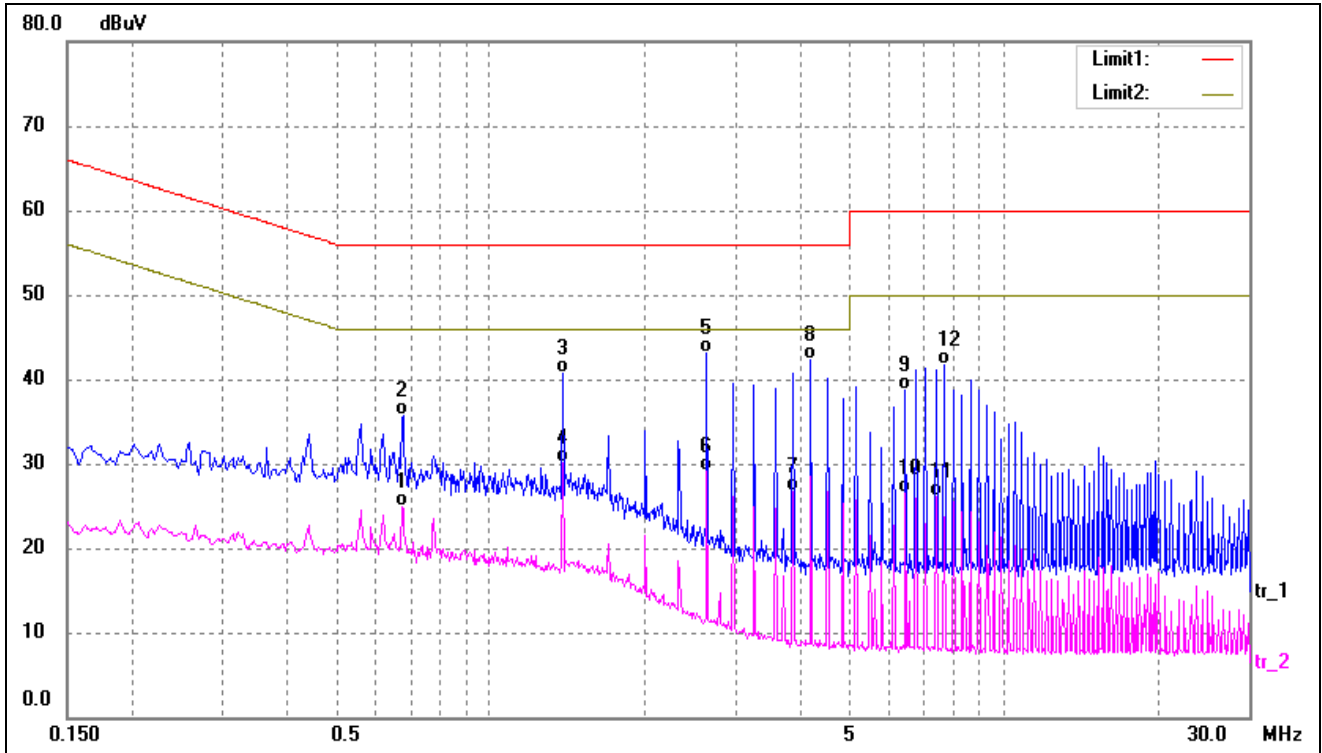


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6740	14.62	10.20	24.82	46.00	-21.18	AVG
2	0.6780	25.53	10.20	35.73	56.00	-20.27	QP
3	1.3860	30.53	10.18	40.71	56.00	-15.29	QP
4	1.3860	19.91	10.18	30.09	46.00	-15.91	AVG
5*	2.6380	32.81	10.27	43.08	56.00	-12.92	QP
6	2.6380	18.86	10.27	29.13	46.00	-16.87	AVG
7	3.8980	16.47	10.30	26.77	46.00	-19.23	AVG
8	4.2220	31.99	10.31	42.30	56.00	-13.70	QP
9	6.4220	28.35	10.34	38.69	60.00	-21.31	QP
10	6.4220	16.14	10.34	26.48	50.00	-23.52	AVG
11	7.3780	15.78	10.34	26.12	50.00	-23.88	AVG
12	7.6820	31.36	10.34	41.70	60.00	-18.30	QP

Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

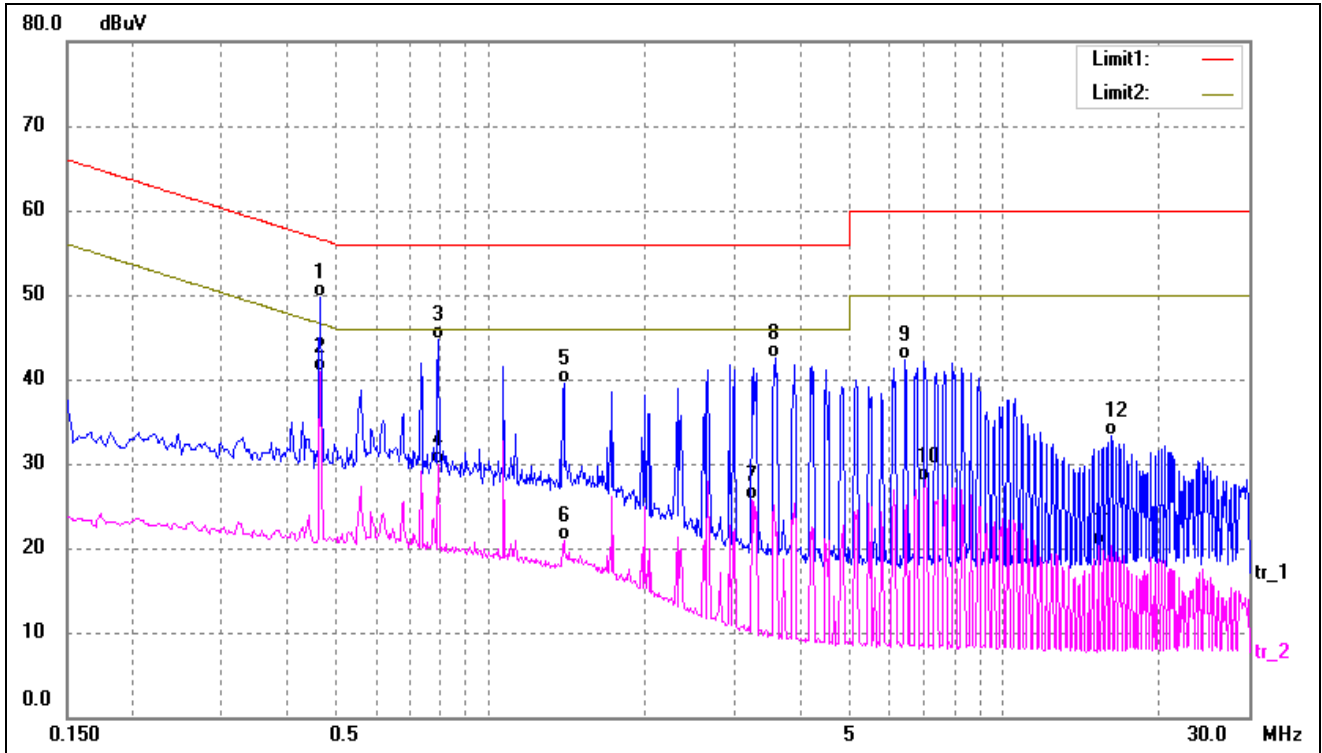


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4660	39.48	10.23	49.71	56.58	-6.87	QP
2*	0.4660	30.75	10.23	40.98	46.58	-5.60	AVG
3	0.7940	34.45	10.17	44.62	56.00	-11.38	QP
4	0.7940	19.79	10.17	29.96	46.00	-16.04	AVG
5	1.3900	29.33	10.18	39.51	56.00	-16.49	QP
6	1.3900	10.65	10.18	20.83	46.00	-25.17	AVG
7	3.2340	15.43	10.28	25.71	46.00	-20.29	AVG
8	3.5980	32.14	10.29	42.43	56.00	-13.57	QP
9	6.4260	31.95	10.34	42.29	60.00	-17.71	QP
10	7.0540	17.66	10.34	28.00	50.00	-22.00	AVG
11	15.2860	10.05	10.25	20.30	50.00	-29.70	AVG
12	16.1660	22.94	10.27	33.21	60.00	-26.79	QP

Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

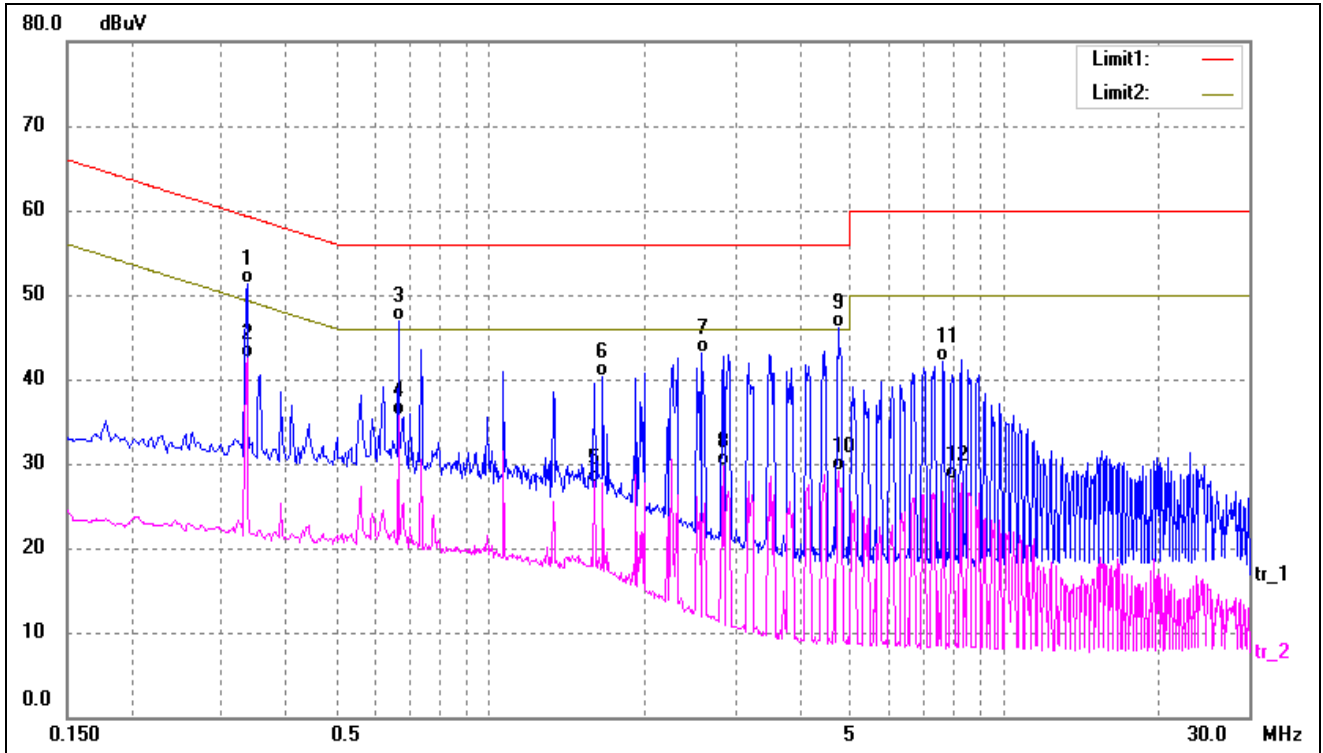


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3339	41.10	10.24	51.34	59.35	-8.01	QP
2*	0.3339	32.22	10.24	42.46	49.35	-6.89	AVG
3	0.6620	36.67	10.20	46.87	56.00	-9.13	QP
4	0.6620	25.56	10.20	35.76	46.00	-10.24	AVG
5	1.5980	17.59	10.21	27.80	46.00	-18.20	AVG
6	1.6540	30.14	10.22	40.36	56.00	-15.64	QP
7	2.5860	32.81	10.27	43.08	56.00	-12.92	QP
8	2.8540	19.40	10.27	29.67	46.00	-16.33	AVG
9	4.7619	35.73	10.32	46.05	56.00	-9.95	QP
10	4.7619	18.79	10.32	29.11	46.00	-16.89	AVG
11	7.6300	31.76	10.34	42.10	60.00	-17.90	QP
12	7.9740	17.71	10.34	28.05	50.00	-21.95	AVG

Test mode:	TM4	Polarity:	Line
------------	-----	-----------	------

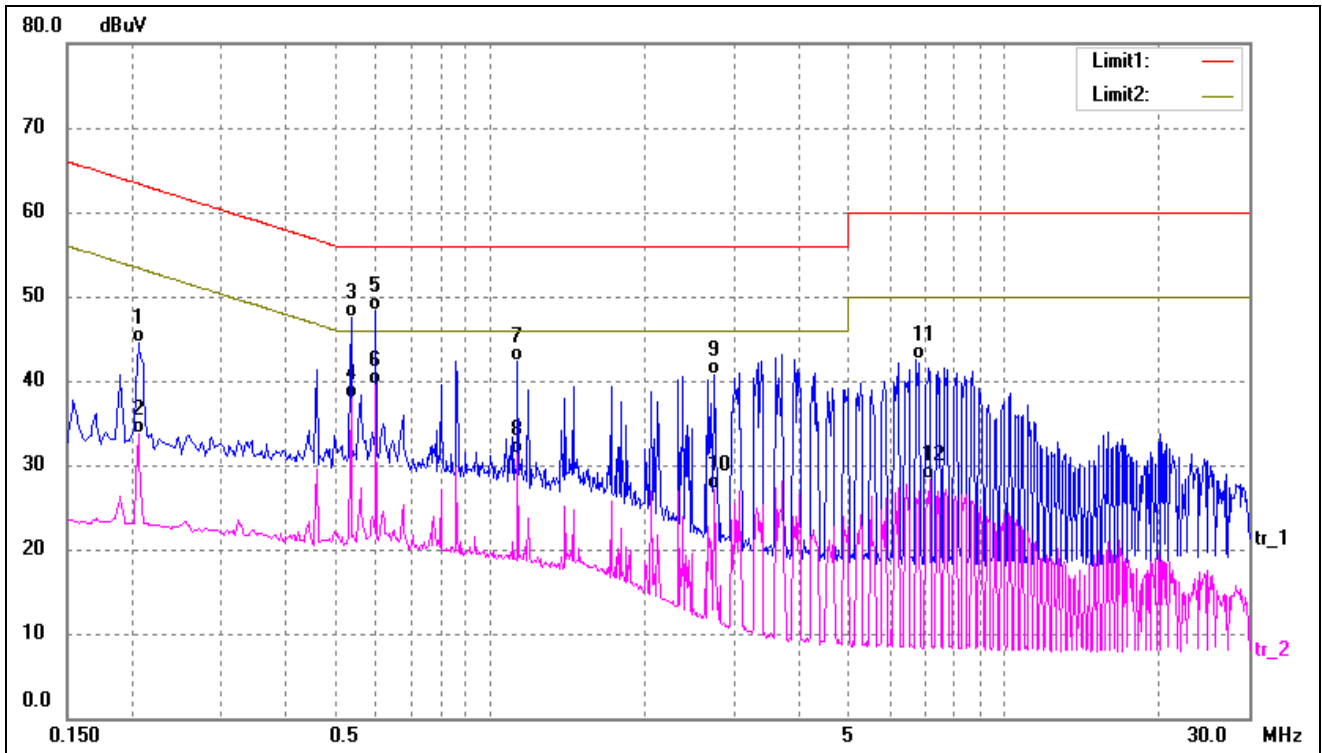

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2060	34.22	10.29	44.51	63.36	-18.85	QP
2	0.2060	23.45	10.29	33.74	53.36	-19.62	AVG
3	0.5340	37.27	10.22	47.49	56.00	-8.51	QP
4	0.5340	27.74	10.22	37.96	46.00	-8.04	AVG
5	0.5980	38.05	10.21	48.26	56.00	-7.74	QP
6*	0.5980	29.34	10.21	39.55	46.00	-6.45	AVG
7	1.1300	32.11	10.15	42.26	56.00	-13.74	QP
8	1.1300	21.22	10.15	31.37	46.00	-14.63	AVG
9	2.7260	30.46	10.27	40.73	56.00	-15.27	QP
10	2.7260	16.91	10.27	27.18	46.00	-18.82	AVG
11	6.7620	32.23	10.34	42.57	60.00	-17.43	QP
12	7.1780	17.98	10.34	28.32	50.00	-21.68	AVG

Test mode:	TM4	Polarity:	Neutral
------------	-----	-----------	---------

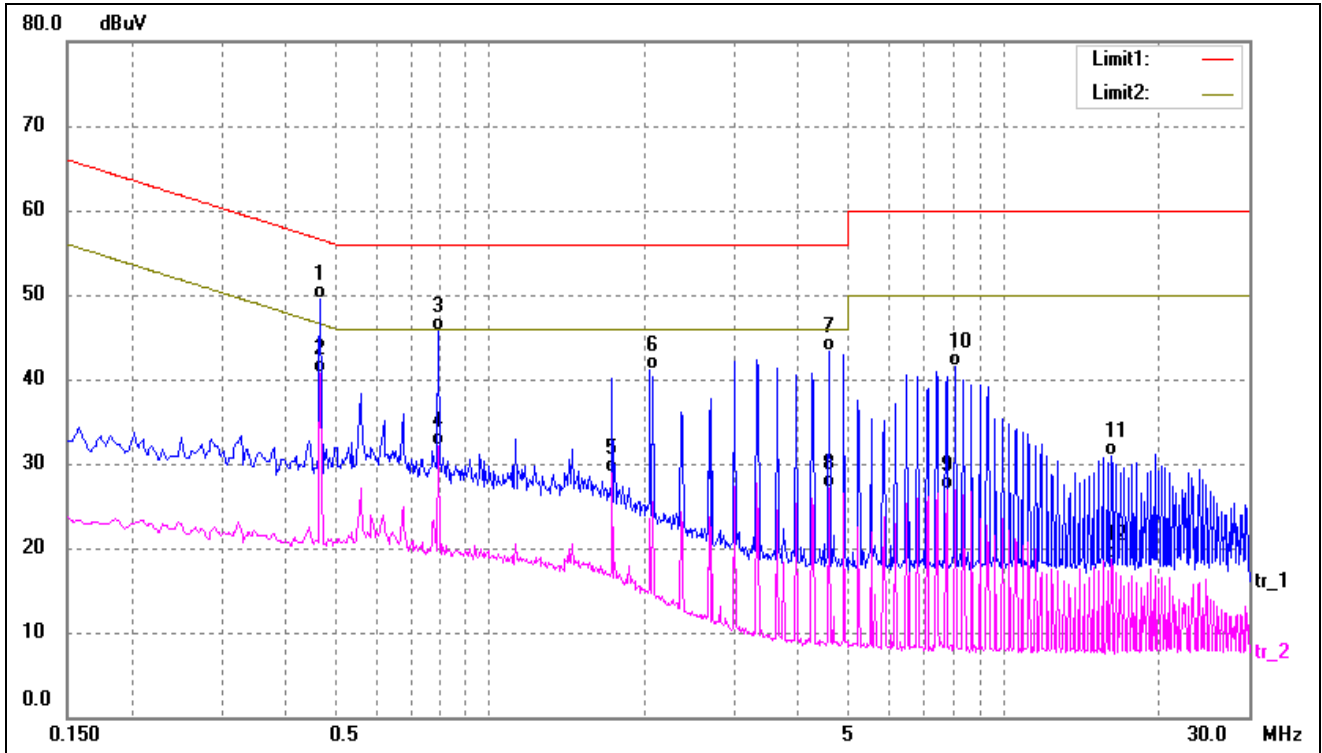

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4660	39.25	10.23	49.48	56.58	-7.10	QP
2*	0.4660	30.54	10.23	40.77	46.58	-5.81	AVG
3	0.7940	35.50	10.17	45.67	56.00	-10.33	QP
4	0.7940	21.86	10.17	32.03	46.00	-13.97	AVG
5	1.7300	18.78	10.22	29.00	46.00	-17.00	AVG
6	2.0460	30.76	10.25	41.01	56.00	-14.99	QP
7	4.5700	33.03	10.32	43.35	56.00	-12.65	QP
8	4.5700	16.72	10.32	27.04	46.00	-18.96	AVG
9	7.7420	16.57	10.34	26.91	50.00	-23.09	AVG
10	8.0420	31.16	10.34	41.50	60.00	-18.50	QP
11	16.2220	20.66	10.27	30.93	60.00	-29.07	QP
12	16.2220	8.39	10.27	18.66	50.00	-31.34	AVG


4. Radiated Emissions

4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

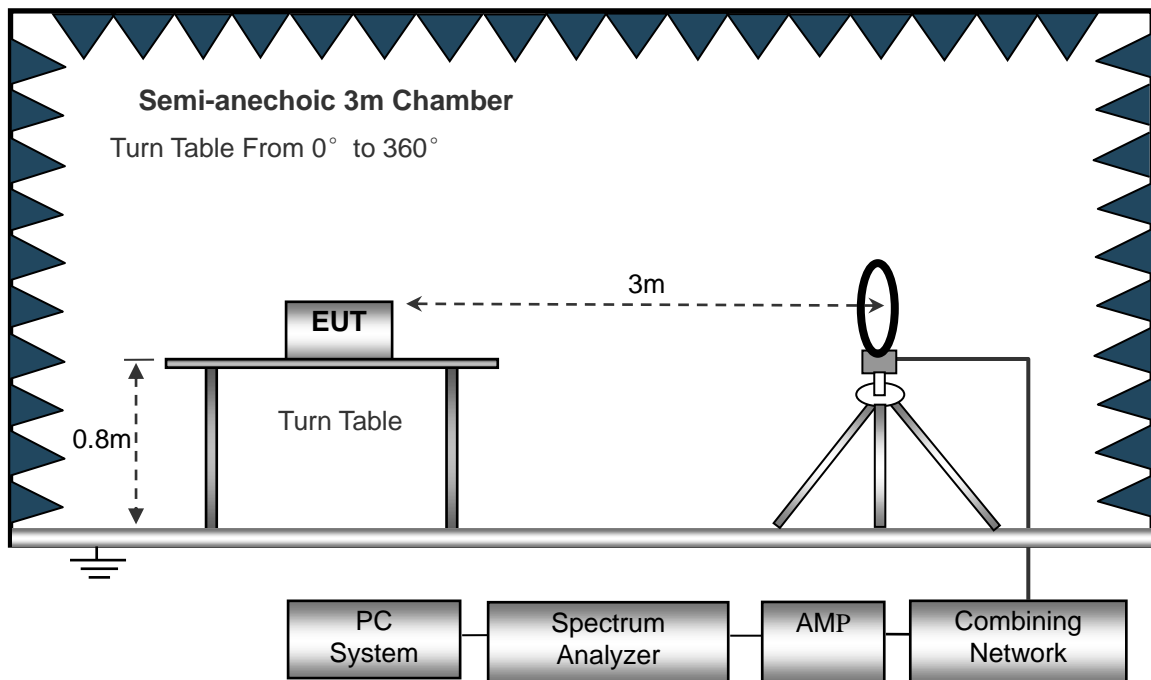

The test setup for emission measurement from 30 MHz to 1 GHz..

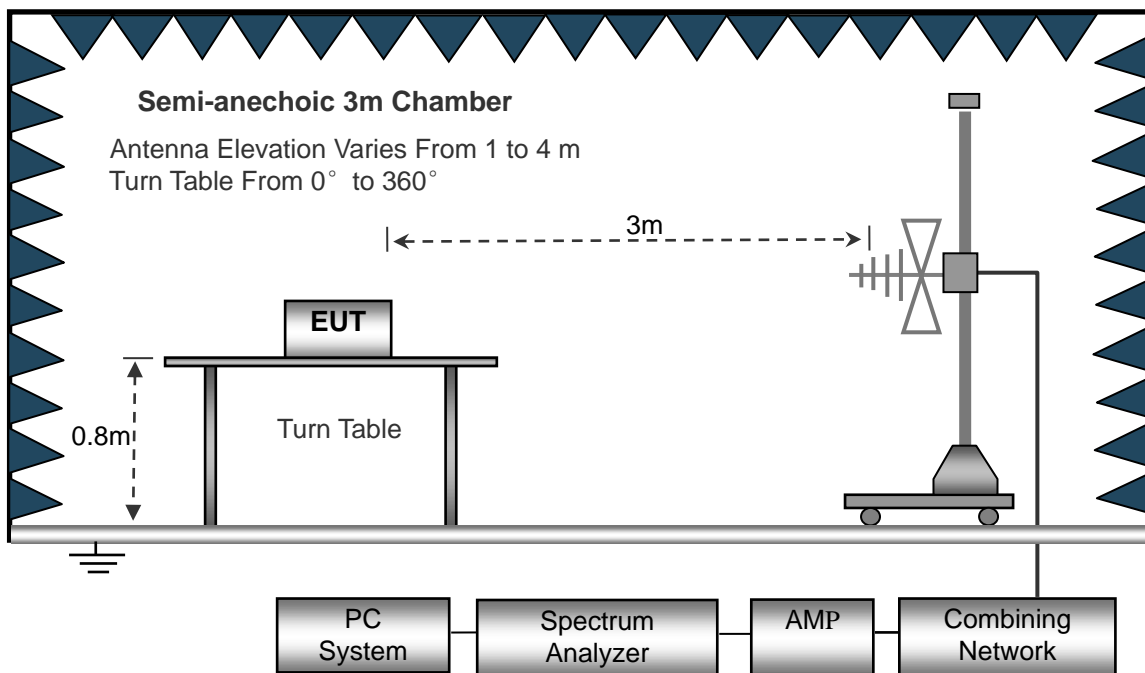

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

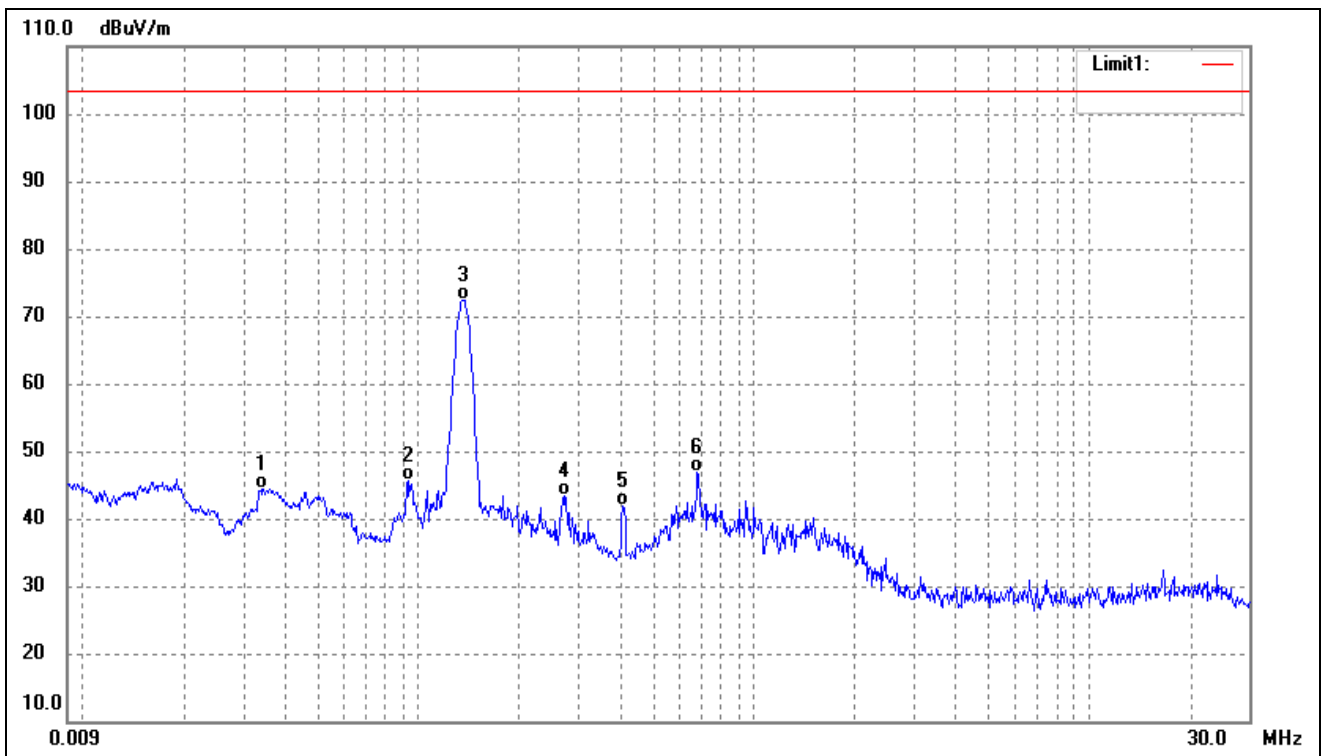


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0340	50.74	-6.29	44.45	103.50	-59.05	-	-	QP
2	0.0931	52.16	-6.56	45.60	103.50	-57.90	-	-	QP
3	0.1363	78.90	-6.41	72.49	103.50	-31.01	-	-	QP
4	0.2716	51.17	-7.73	43.44	103.50	-60.06	-	-	QP
5	0.4072	49.61	-7.67	41.94	103.50	-61.56	-	-	QP
6	0.6790	53.68	-6.73	46.95	103.50	-56.55	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

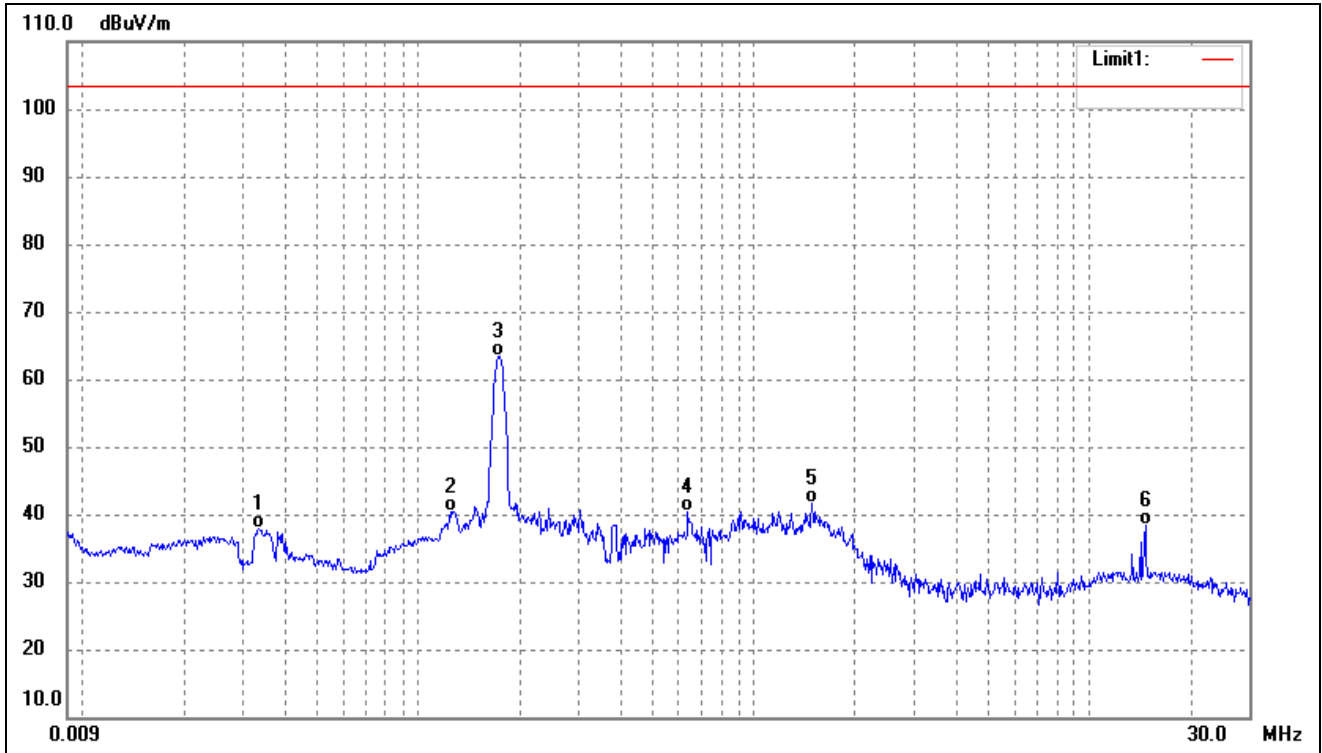


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0335	44.19	-6.31	37.88	103.50	-65.62	-	-	QP
2	0.1246	46.87	-6.47	40.40	103.50	-63.10	-	-	QP
3	0.1737	70.12	-6.65	63.47	103.50	-40.03	-	-	QP
4	0.6360	47.38	-6.92	40.46	103.50	-63.04	-	-	QP
5	1.4916	47.80	-6.12	41.68	103.50	-61.82	-	-	QP
6	14.6928	43.21	-4.75	38.46	103.50	-65.04	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

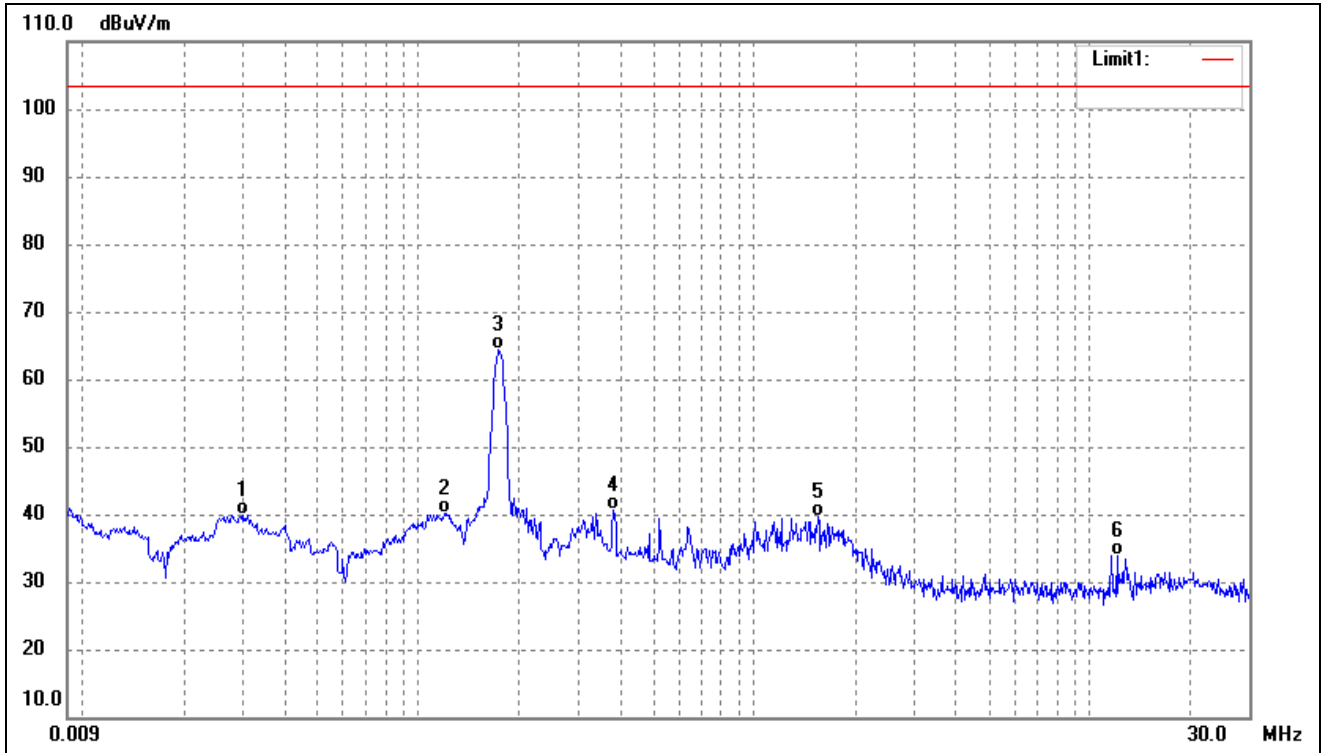

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0298	46.44	-6.51	39.93	103.50	-63.57	-	-	QP
2	0.1197	46.55	-6.50	40.05	103.50	-63.45	-	-	QP
3	0.1737	70.92	-6.65	64.27	103.50	-39.23	-	-	QP
4	0.3815	48.22	-7.71	40.51	103.50	-62.99	-	-	QP
5	1.5529	45.64	-6.11	39.53	103.50	-63.97	-	-	QP
6	12.0937	39.17	-5.23	33.94	103.50	-69.56	-	-	QP


Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

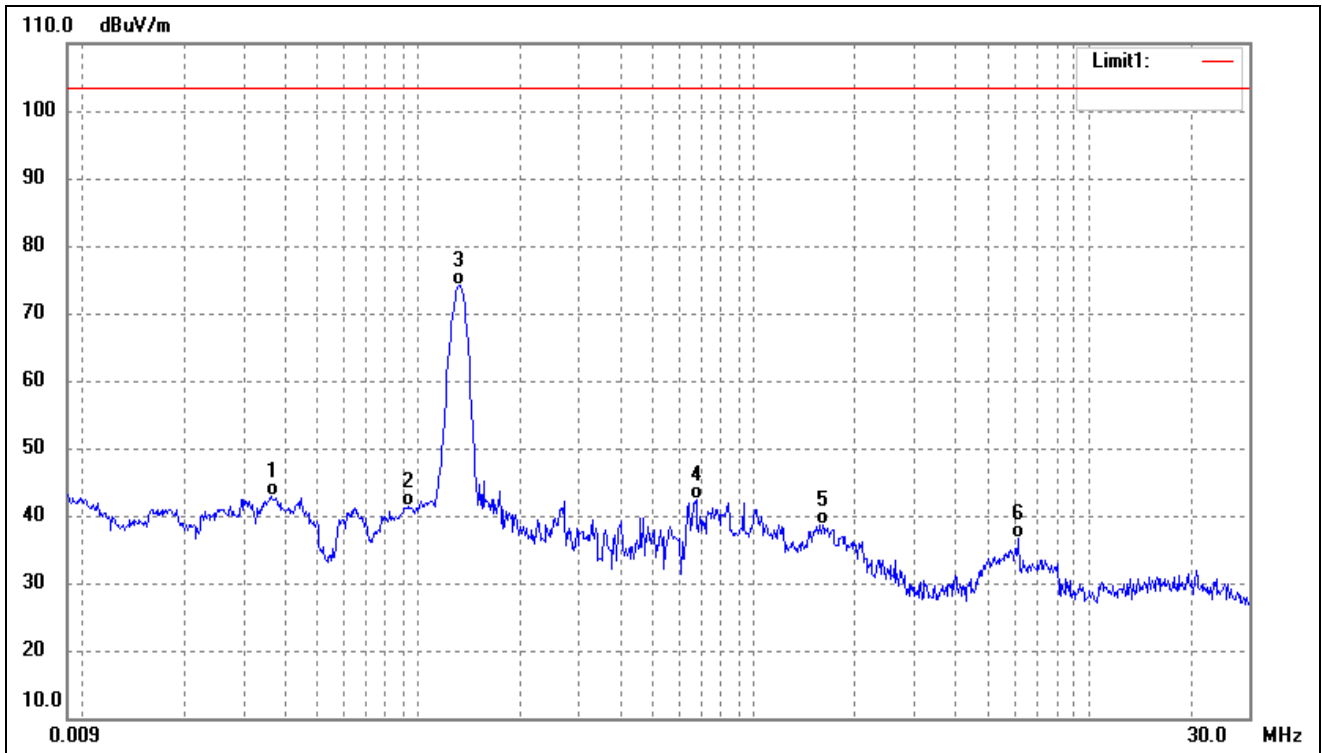

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0366	49.07	-6.15	42.92	103.50	-60.58	-	-	QP
2	0.0931	48.00	-6.56	41.44	103.50	-62.06	-	-	QP
3	0.1318	80.55	-6.43	74.12	103.50	-29.38	-	-	QP
4	0.6733	49.04	-6.76	42.28	103.50	-61.22	-	-	QP
5	1.6046	44.82	-6.10	38.72	103.50	-64.78	-	-	QP
6	6.1680	42.25	-5.52	36.73	103.50	-66.77	-	-	QP


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

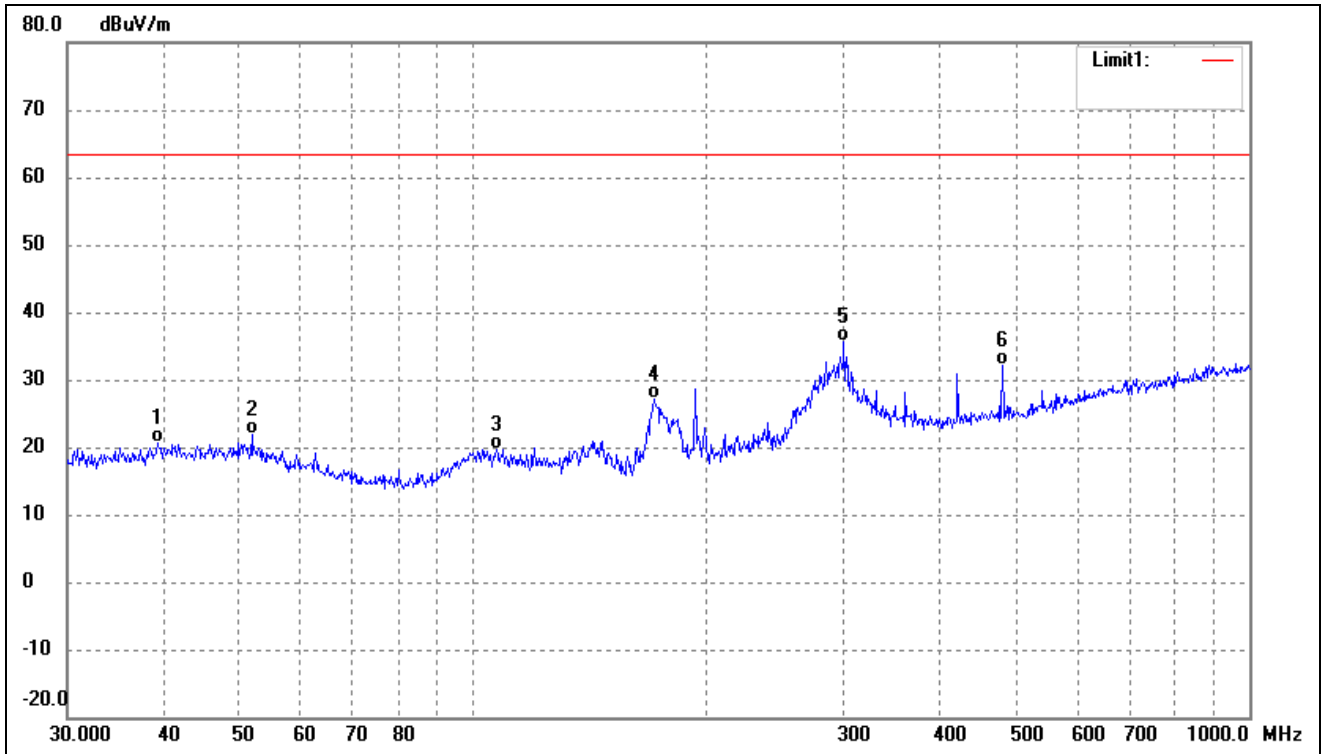


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.1616	27.98	-7.30	20.68	63.50	-42.82	-	-	QP
2	51.8430	29.45	-7.64	21.81	63.50	-41.69	-	-	QP
3	107.1337	27.68	-8.11	19.57	63.50	-43.93	-	-	QP
4	171.3926	37.60	-10.57	27.03	63.50	-36.47	-	-	QP
5	300.3672	40.73	-5.01	35.72	63.50	-27.78	-	-	QP
6	480.5276	34.58	-2.41	32.17	63.50	-31.33	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

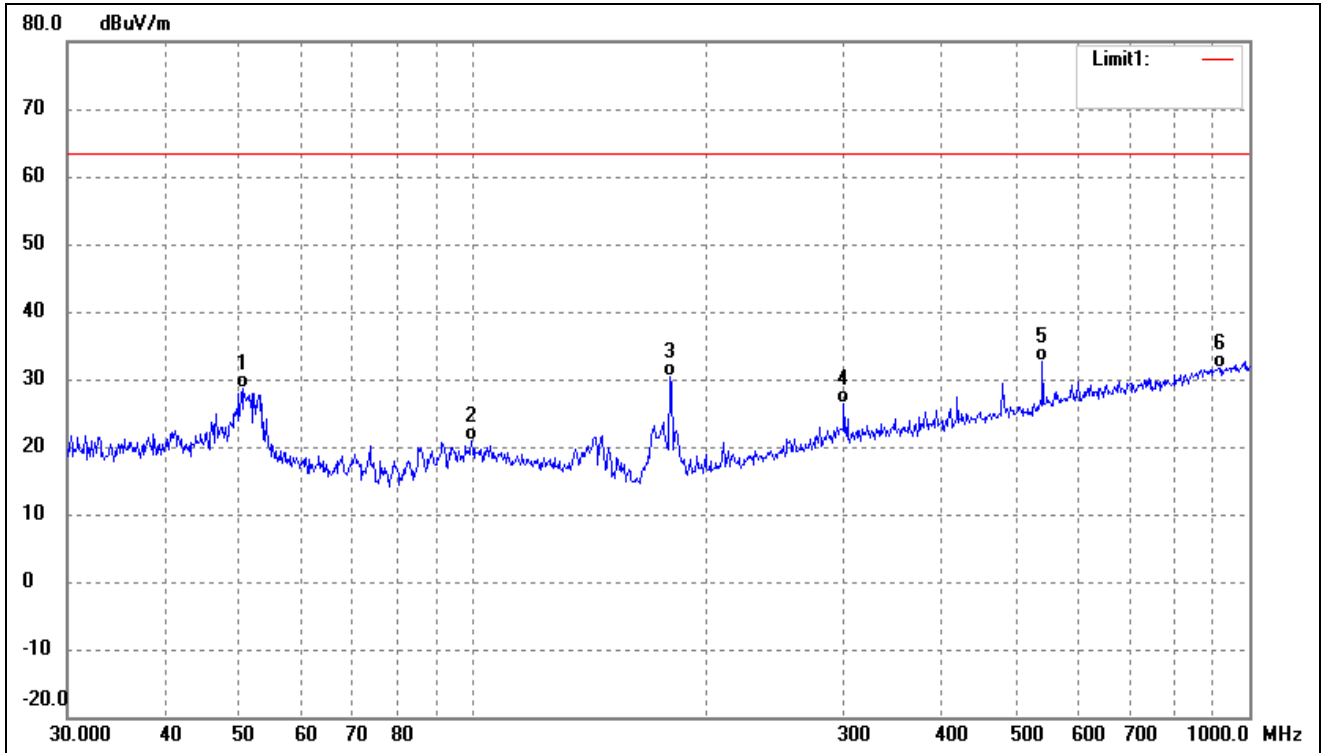


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.5860	36.17	-7.42	28.75	63.50	-34.75	-	-	QP
2	99.5281	29.15	-8.18	20.97	63.50	-42.53	-	-	QP
3	179.3863	40.58	-10.16	30.42	63.50	-33.08	-	-	QP
4	300.3672	31.27	-5.01	26.26	63.50	-37.24	-	-	QP
5	541.3725	33.84	-1.30	32.54	63.50	-30.96	-	-	QP
6	916.0687	27.56	4.06	31.62	63.50	-31.88	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

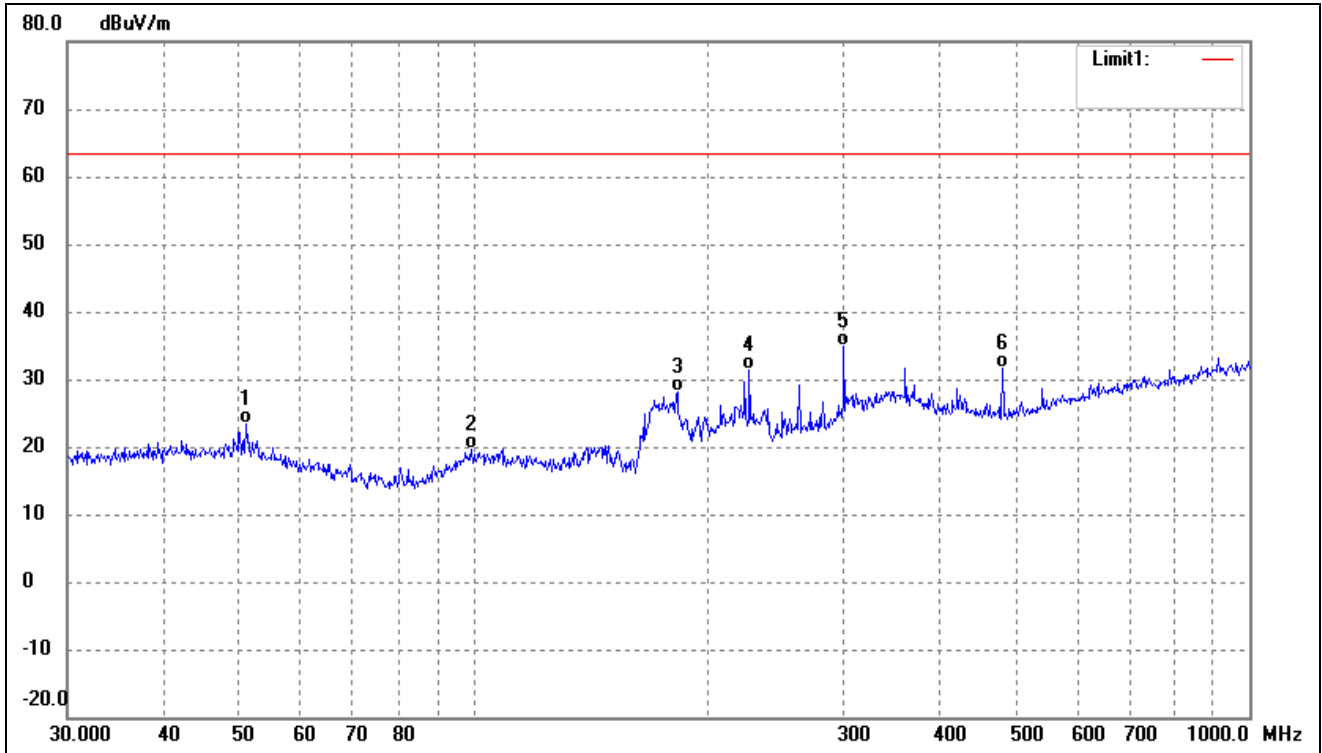


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.9420	30.83	-7.48	23.35	63.50	-40.15	-	-	QP
2	99.5281	27.91	-8.18	19.73	63.50	-43.77	-	-	QP
3	183.2005	37.74	-9.72	28.02	63.50	-35.48	-	-	QP
4	226.8936	38.98	-7.50	31.48	63.50	-32.02	-	-	QP
5	300.3672	39.97	-5.01	34.96	63.50	-28.54	-	-	QP
6	480.5276	33.97	-2.41	31.56	63.50	-31.94	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

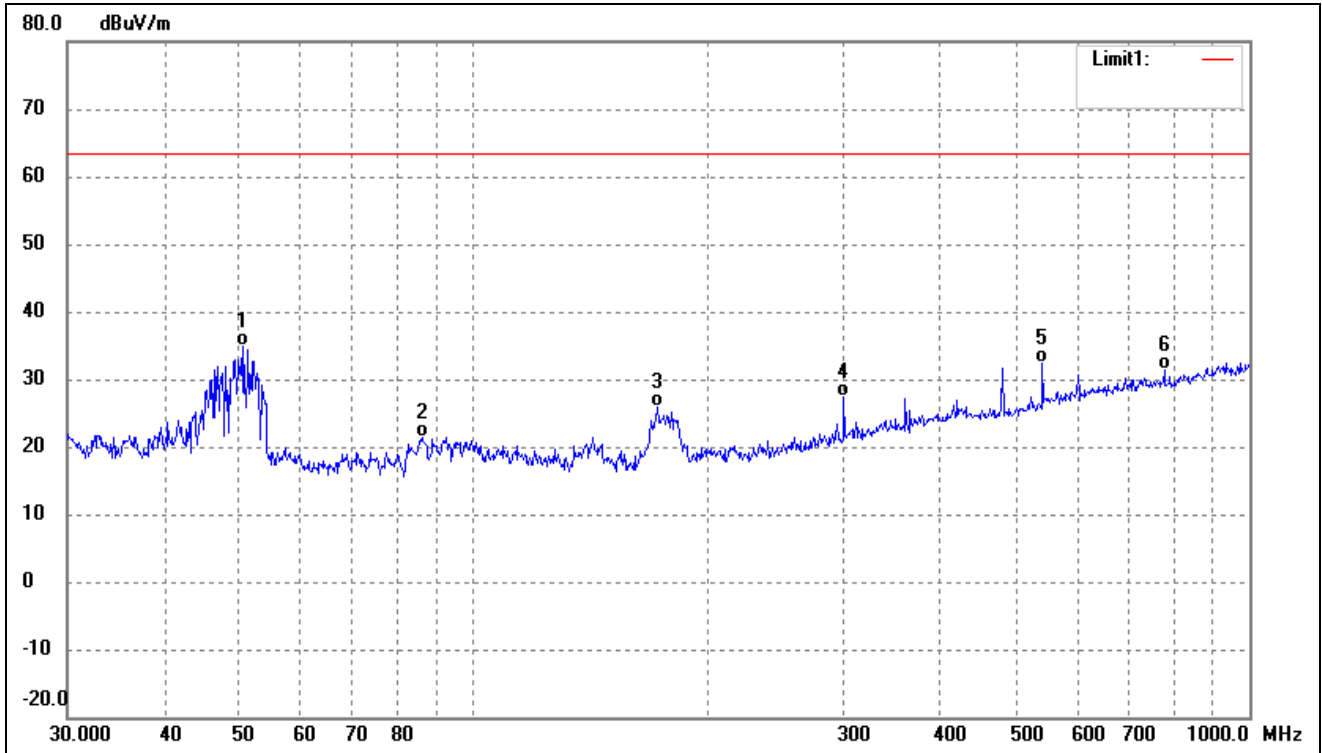


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.5860	42.34	-7.42	34.92	63.50	-28.58	-	-	QP
2	85.8984	32.74	-11.29	21.45	63.50	-42.05	-	-	QP
3	172.5988	36.31	-10.52	25.79	63.50	-37.71	-	-	QP
4	300.3672	32.32	-5.01	27.31	63.50	-36.19	-	-	QP
5	541.3725	33.74	-1.30	32.44	63.50	-31.06	-	-	QP
6	776.8778	29.28	2.10	31.38	63.50	-32.12	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

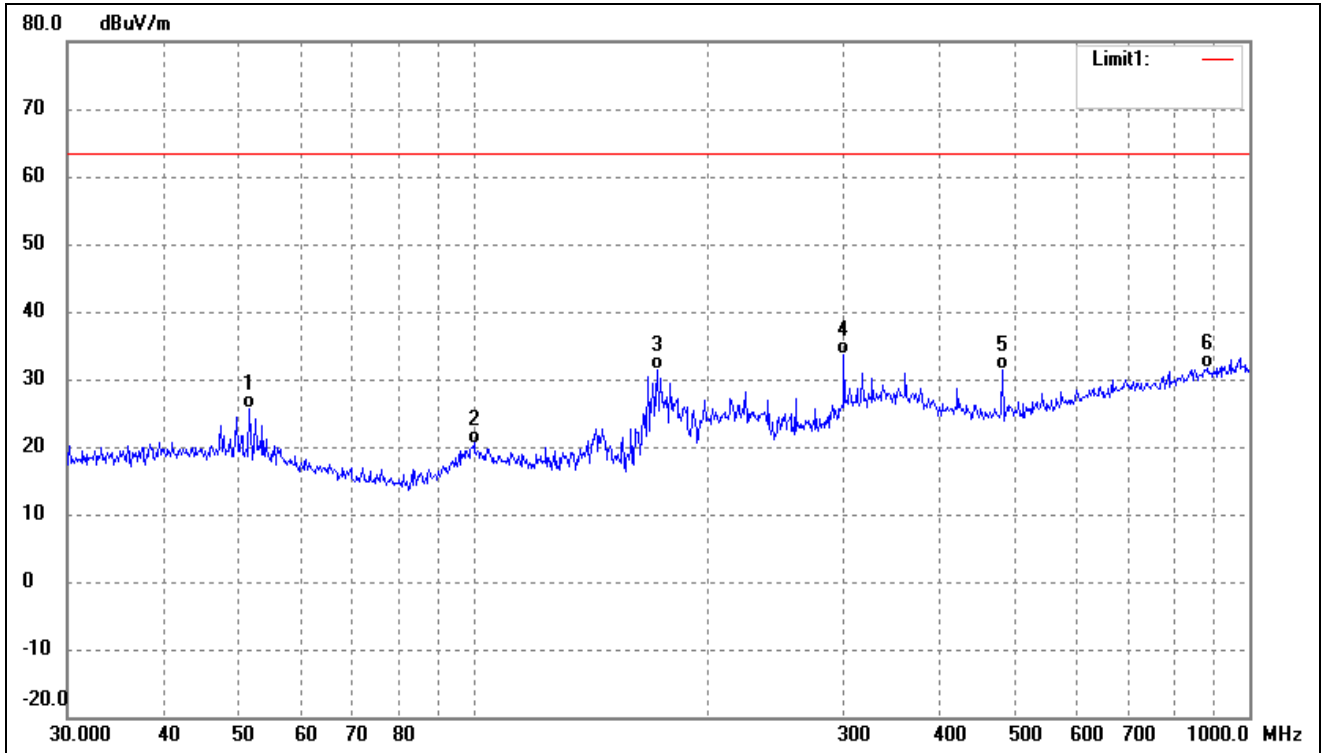


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.4807	33.16	-7.58	25.58	63.50	-37.92	-	-	QP
2	100.2286	28.56	-8.06	20.50	63.50	-43.00	-	-	QP
3	172.5988	41.87	-10.52	31.35	63.50	-32.15	-	-	QP
4	300.3672	38.62	-5.01	33.61	63.50	-29.89	-	-	QP
5	480.5276	33.74	-2.41	31.33	63.50	-32.17	-	-	QP
6	884.5029	27.82	3.78	31.60	63.50	-31.90	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

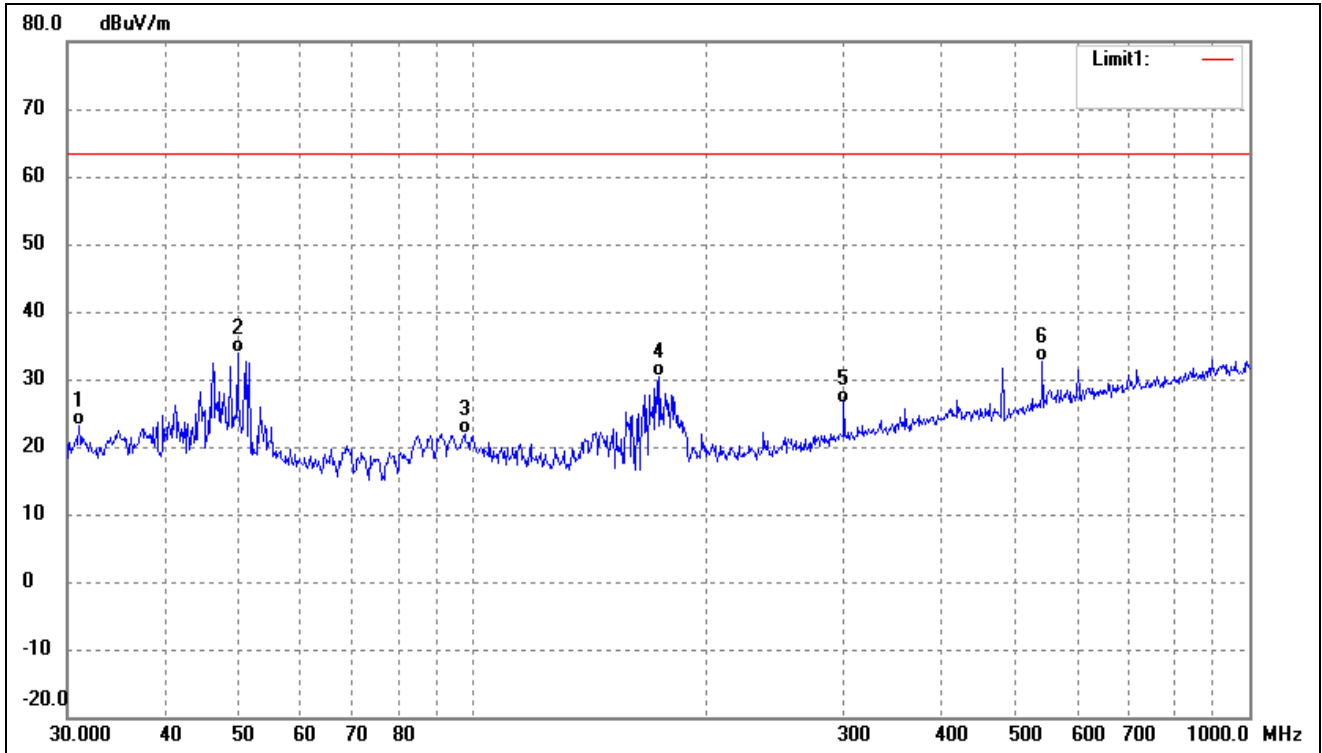


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.0705	32.30	-9.09	23.21	63.50	-40.29	-	-	QP
2	49.7068	41.13	-7.31	33.82	63.50	-29.68	-	-	QP
3	97.4560	30.64	-8.77	21.87	63.50	-41.63	-	-	QP
4	173.8135	40.76	-10.46	30.30	63.50	-33.20	-	-	QP
5	300.3672	31.51	-5.01	26.50	63.50	-37.00	-	-	QP
6	541.3724	34.02	-1.30	32.72	63.50	-30.78	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

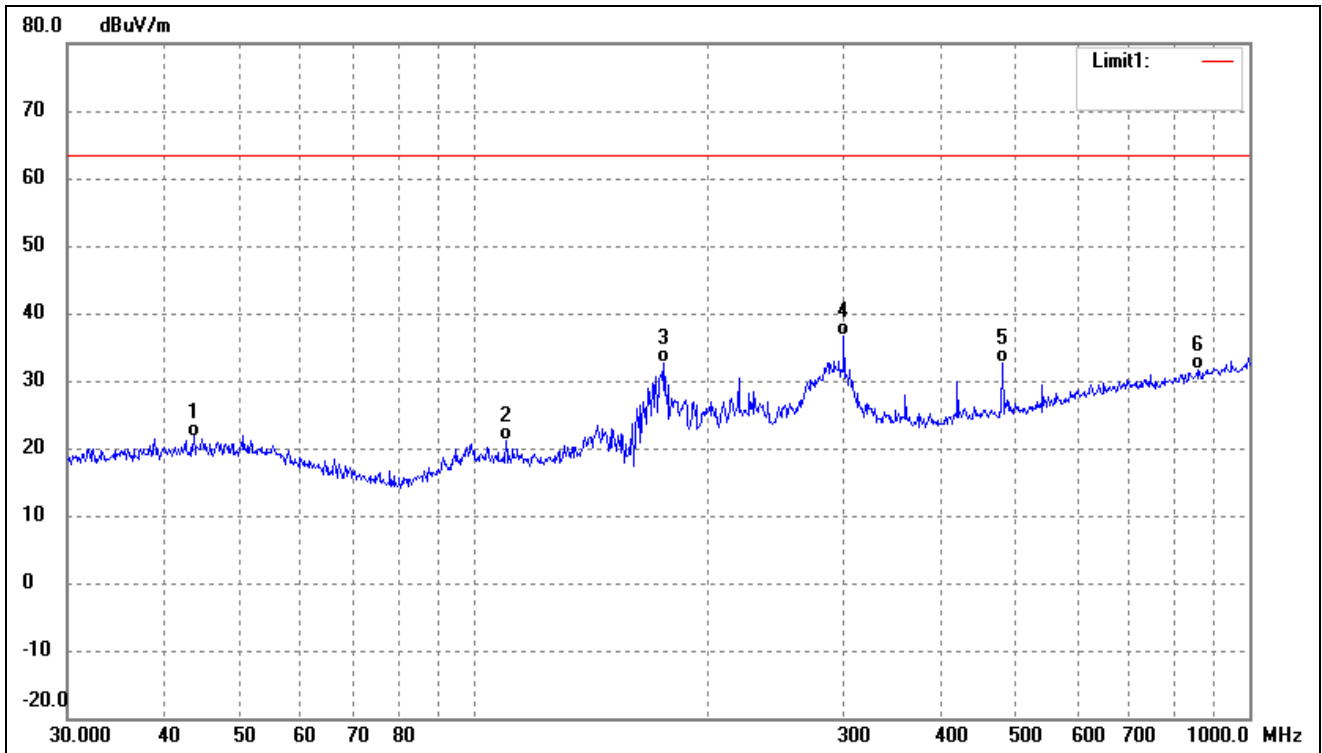

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.6584	28.94	-7.19	21.75	63.50	-41.75	-	-	QP
2	110.1816	29.28	-8.15	21.13	63.50	-42.37	-	-	QP
3	176.2686	42.85	-10.33	32.52	63.50	-30.98	-	-	QP
4	300.3672	41.54	-5.01	36.53	63.50	-26.97	-	-	QP
5	480.5276	35.06	-2.41	32.65	63.50	-30.85	-	-	QP
6	857.0247	28.35	3.32	31.67	63.50	-31.83	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

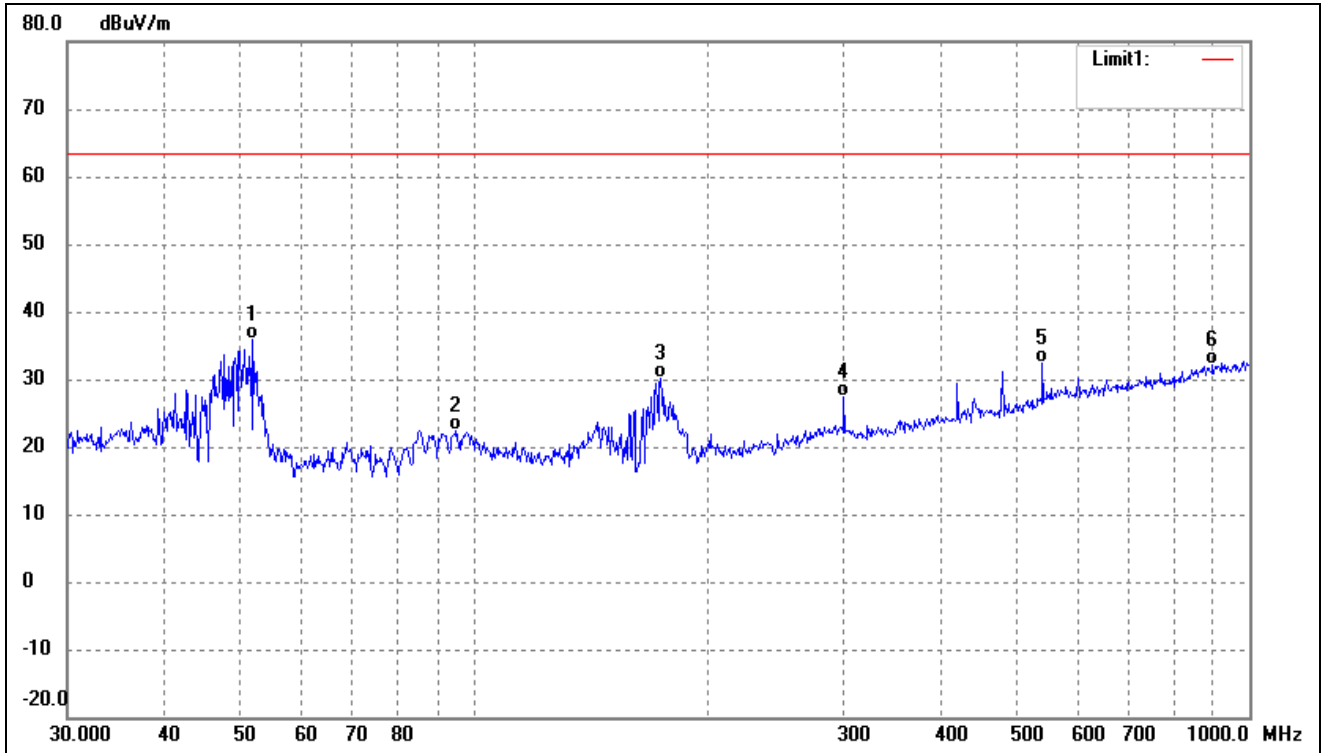

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.8430	43.46	-7.64	35.82	63.50	-27.68	-	-	QP
2	95.0930	31.74	-9.43	22.31	63.50	-41.19	-	-	QP
3	174.4241	40.52	-10.42	30.10	63.50	-33.40	-	-	QP
4	300.3672	32.30	-5.01	27.29	63.50	-36.21	-	-	QP
5	541.3725	33.76	-1.30	32.46	63.50	-31.04	-	-	QP
6	896.9965	28.14	3.99	32.13	63.50	-31.37	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****