

# TEST REPORT

Reference No..... : WTX22X11241794W001  
FCC ID ..... : A4X-WPC15-1LCNB  
Applicant ..... : CE LINK LIMITED  
Address ..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Manufacturer ..... : DONGGUAN CE LINK LIMITED  
Address ..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong  
Province, China.  
Product Name ..... : Wireless Charger  
Model No..... : WPC15-1LCNB  
Standards ..... : FCC Part 18  
Date of Receipt sample .... : 2022-11-30  
Date of Test..... : 2022-11-30 to 2023-01-13  
Date of Issue ..... : 2023-01-13  
Test Report Form No. .... : WTX\_Part 18W  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

*Jack Huang*

Jack Huang

Approved by:

*Silin Chen*

Silin Chen

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 TEST STANDARDS.....5  
1.3 TEST METHODOLOGY .....5  
1.4 TEST FACILITY .....5  
1.5 EUT SETUP AND OPERATION MODE .....6  
1.6 MEASUREMENT UNCERTAINTY .....7  
1.7 TEST EQUIPMENT LIST AND DETAILS .....8

**2. SUMMARY OF TEST RESULTS .....9**

**3. CONDUCTED EMISSIONS .....10**  
3.1 STANDARD APPLICABLE.....10  
3.2 TEST PROCEDURE.....10  
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10  
3.4 ENVIRONMENTAL CONDITIONS .....10  
3.5 TEST RECEIVER SETUP .....11  
3.6 SUMMARY OF TEST RESULTS/PLOTS .....11

**4. RADIATED EMISSIONS.....18**  
4.1 TEST PROCEDURE.....18  
4.2 TEST RECEIVER SETUP .....19  
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....19  
4.4 ENVIRONMENTAL CONDITIONS .....20  
4.5 SUMMARY OF TEST RESULTS/PLOTS .....20

**APPENDIX PHOTOGRAPHS.....29**

**Report version**

Version No.	Date of issue	Description
Rev.00	2023-01-13	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Factory#1: SuiChuan CE LINK LIMITED  
 Address of factory: SuiChuan county industrial park east zone, Ji'an city, Jiangxi province, China.

Factory#2: CE LINK VIET NAM COMPANY LIMITED.  
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charger
Trade Name:	CE-LINK
Model No.:	WPC15-1LCNB
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	112~201kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Antenna Gain	0dBi
Rated Voltage:	Type-C: 5V---3A,9V/12V---2A
Rated Current:	Type-C: 2A
Rated Power:	Wireless Output: 5W, 7.5W, 10W, 15W

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Part 18 Subpart C**: Industrial, Scientific, and medical medical equipment.

**ANSI C63.4-2014**: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

***Maintenance of compliance*** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

### Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the adapter; AC120V/60Hz for adapter; Wireless charging: output 5W	AC120V/60Hz for adapter
TM2	Wireless Charging	Connect to the adapter; AC120V/60Hz for adapter; Wireless charging: output 10W	AC120V/60Hz for adapter
TM3	Wireless Charging	Connect to the adapter; AC120V/60Hz for adapter; Wireless charging: output 15W	AC120V/60Hz for adapter

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.55	Unshielded	Without Ferrite

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	Switching	YB-P030WCBU	/

### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74$ dB
		0.15-30MHz $\pm 3.34$ dB
Radiated Emissions	Radiated	30-200MHz $\pm 4.52$ dB
		0.2-1GHz $\pm 5.56$ dB
		1-6GHz $\pm 3.84$ dB
		6-18GHz $\pm 3.92$ dB

## 1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	HP	8447F	2805A0347 5	2022-01-07	2023-01-06
				2022-12-30	2023-12-29
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A1017 9	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing



## 2. SUMMARY OF TEST RESULTS

---

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

### 3. Conducted Emissions

#### 3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

#### 3.3 Basic Test Setup Block Diagram

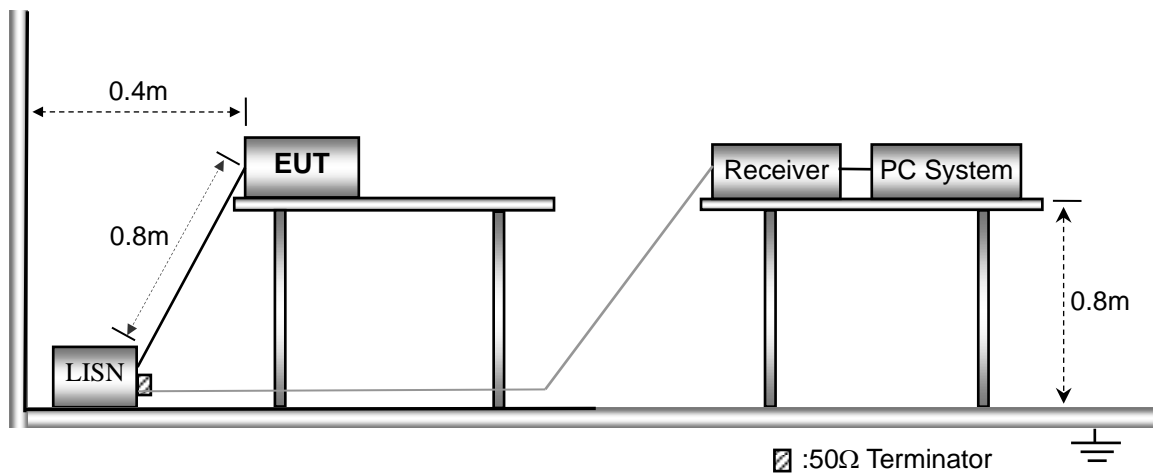

#### 3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


### 3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth .....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


### 3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

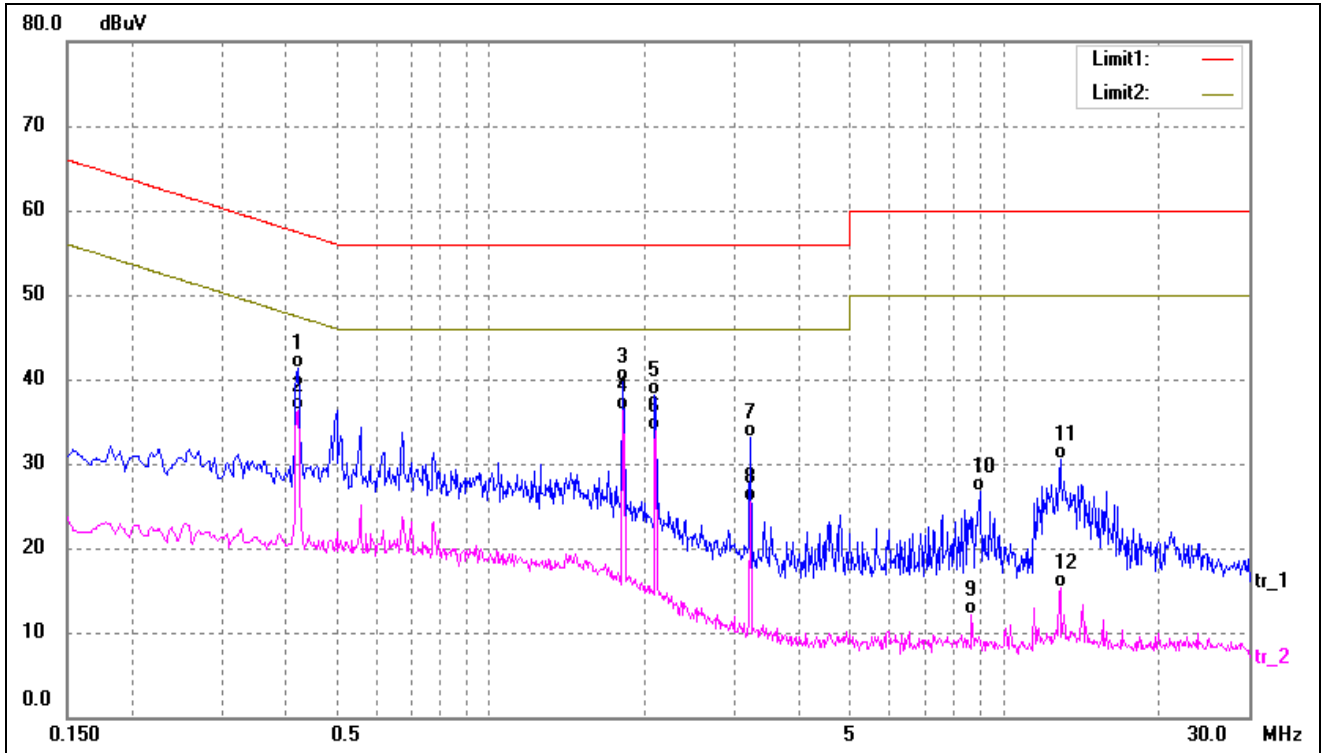


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4220	31.14	10.22	41.36	57.41	-16.05	QP
2	0.4220	26.05	10.22	36.27	47.41	-11.14	AVG
3	1.8180	29.43	10.23	39.66	56.00	-16.34	QP
4*	1.8180	26.04	10.23	36.27	46.00	-9.73	AVG
5	2.0980	27.94	10.25	38.19	56.00	-17.81	QP
6	2.1020	23.61	10.25	33.86	46.00	-12.14	AVG
7	3.2139	22.83	10.28	33.11	56.00	-22.89	QP
8	3.2139	15.25	10.28	25.53	46.00	-20.47	AVG
9	8.6780	1.72	10.34	12.06	50.00	-37.94	AVG
10	9.0100	16.42	10.35	26.77	60.00	-33.23	QP
11	12.8540	20.25	10.28	30.53	60.00	-29.47	QP
12	12.8540	5.12	10.28	15.40	50.00	-34.60	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

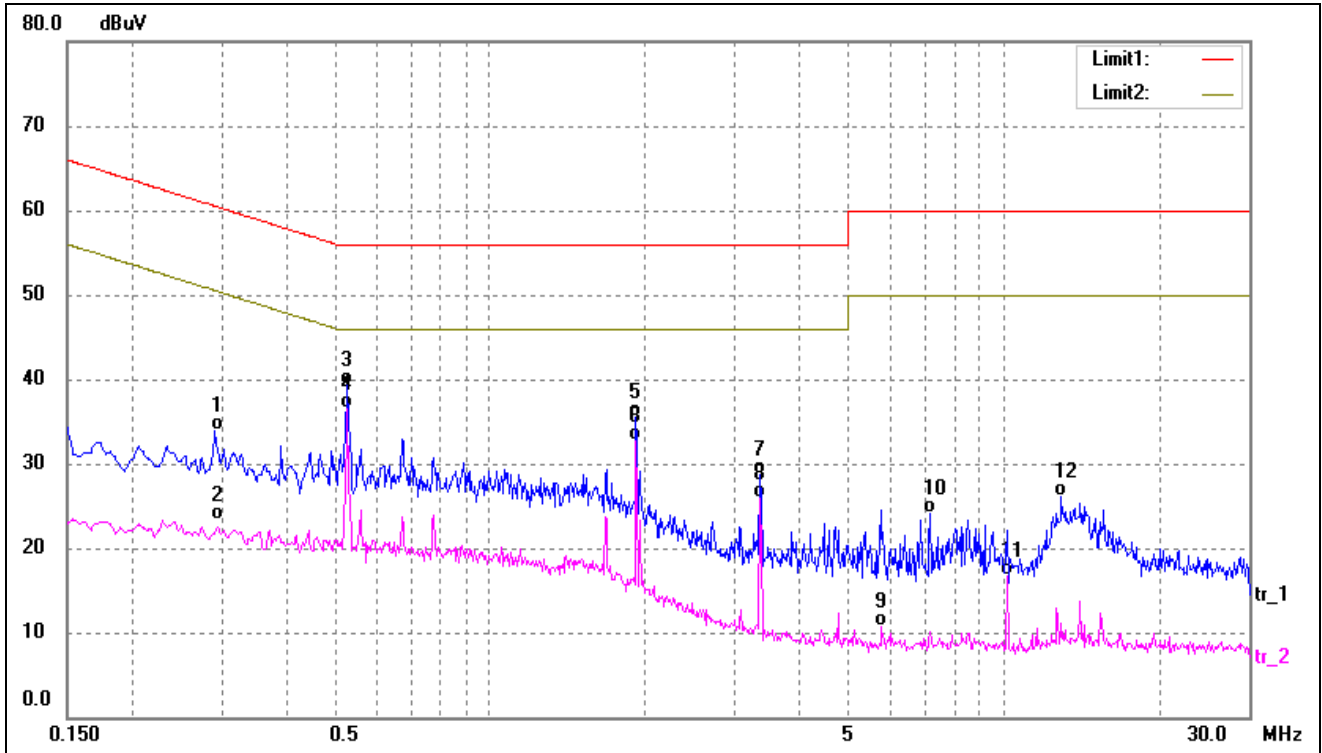


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2900	23.61	10.25	33.86	60.52	-26.66	QP
2	0.2900	13.01	10.25	23.26	50.52	-27.26	AVG
3	0.5260	29.00	10.22	39.22	56.00	-16.78	QP
4*	0.5260	26.37	10.22	36.59	46.00	-9.41	AVG
5	1.9260	25.26	10.24	35.50	56.00	-20.50	QP
6	1.9260	22.39	10.24	32.63	46.00	-13.37	AVG
7	3.3580	18.34	10.29	28.63	56.00	-27.37	QP
8	3.3580	15.53	10.29	25.82	46.00	-20.18	AVG
9	5.7900	0.37	10.33	10.70	50.00	-39.30	AVG
10	7.2060	13.78	10.34	24.12	60.00	-35.88	QP
11	10.1540	6.39	10.35	16.74	50.00	-33.26	AVG
12	12.9379	15.75	10.28	26.03	60.00	-33.97	QP

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

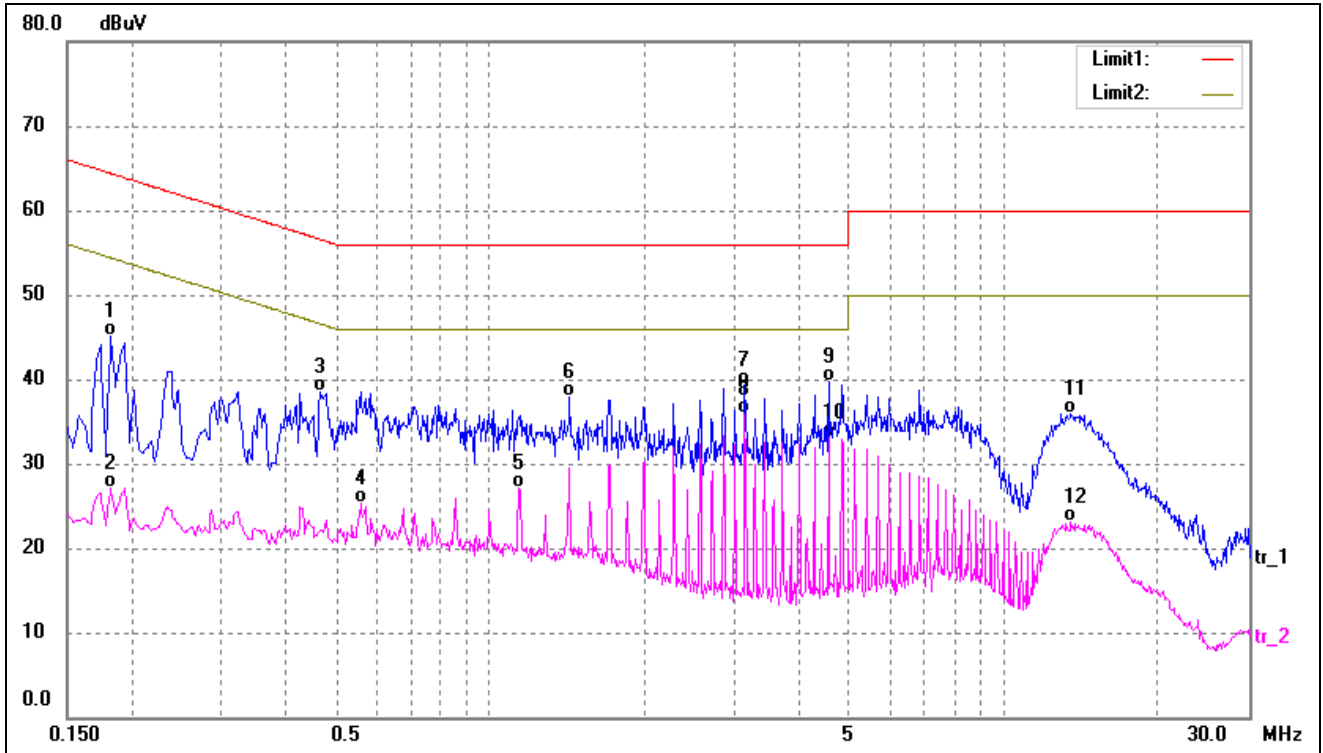


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1819	34.71	10.31	45.02	64.39	-19.37	QP
2	0.1819	16.85	10.31	27.16	54.39	-27.23	AVG
3	0.4660	28.31	10.23	38.54	56.58	-18.04	QP
4	0.5580	15.15	10.21	25.36	46.00	-20.64	AVG
5	1.1380	16.92	10.15	27.07	46.00	-18.93	AVG
6	1.4260	27.75	10.18	37.93	56.00	-18.07	QP
7	3.1380	29.10	10.28	39.38	56.00	-16.62	QP
8*	3.1380	25.70	10.28	35.98	46.00	-10.02	AVG
9	4.5620	29.34	10.32	39.66	56.00	-16.34	QP
10	4.5620	22.70	10.32	33.02	46.00	-12.98	AVG
11	13.5380	25.72	10.27	35.99	60.00	-24.01	QP
12	13.5380	12.93	10.27	23.20	50.00	-26.80	AVG

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

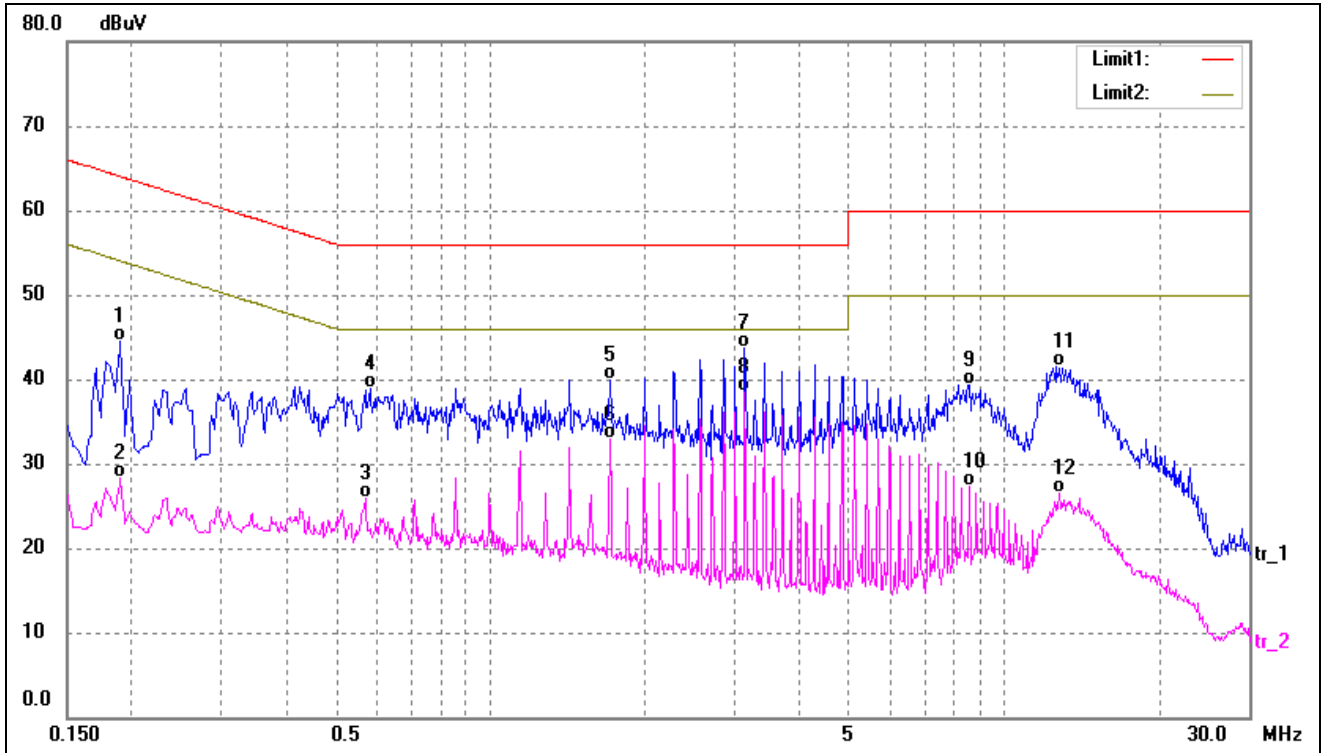

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	34.24	10.30	44.54	64.03	-19.49	QP
2	0.1900	18.02	10.30	28.32	54.03	-25.71	AVG
3	0.5700	15.63	10.21	25.84	46.00	-20.16	AVG
4	0.5820	28.69	10.21	38.90	56.00	-17.10	QP
5	1.7140	29.68	10.22	39.90	56.00	-16.10	QP
6	1.7140	22.70	10.22	32.92	46.00	-13.08	AVG
7	3.1340	33.51	10.28	43.79	56.00	-12.21	QP
8*	3.1340	28.28	10.28	38.56	46.00	-7.44	AVG
9	8.5540	28.94	10.34	39.28	60.00	-20.72	QP
10	8.5540	16.93	10.34	27.27	50.00	-22.73	AVG
11	12.6780	31.12	10.29	41.41	60.00	-18.59	QP
12	12.8180	16.24	10.28	26.52	50.00	-23.48	AVG


Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

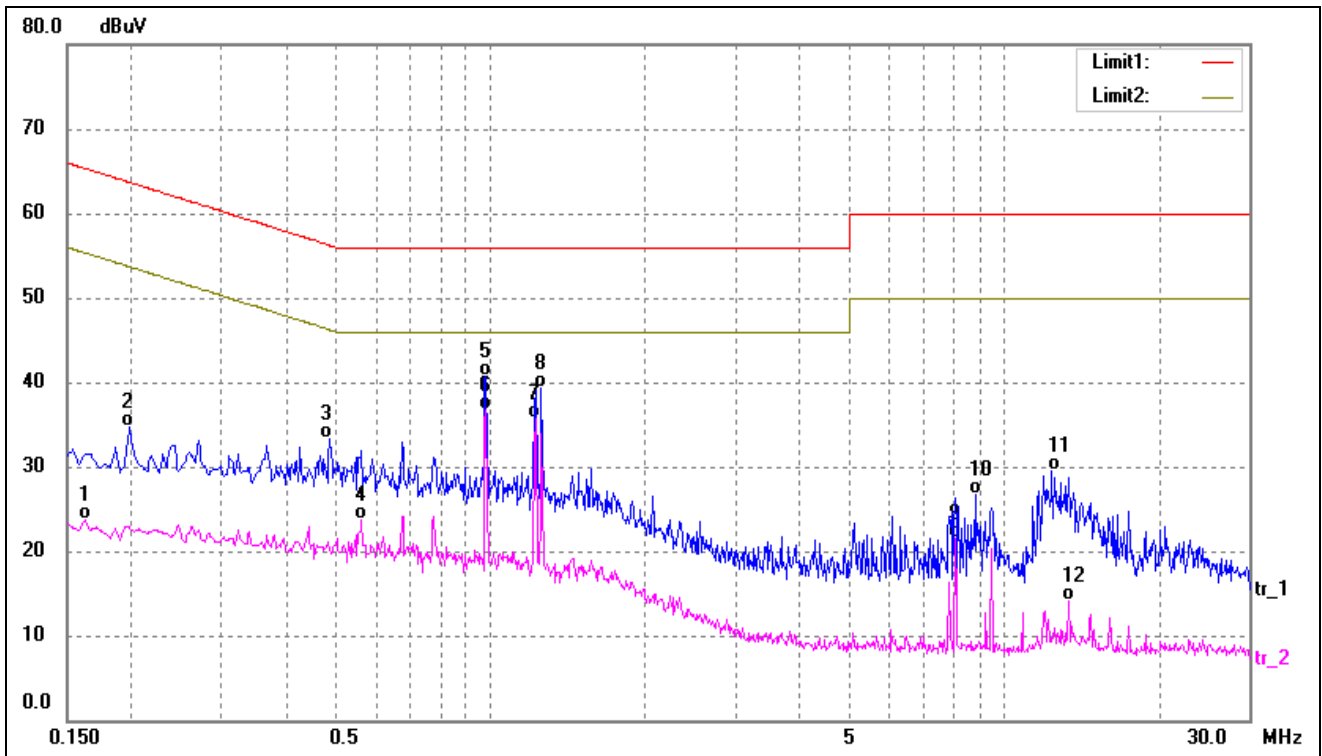

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	13.41	10.31	23.72	55.36	-31.64	AVG
2	0.1980	24.41	10.30	34.71	63.69	-28.98	QP
3	0.4860	23.10	10.22	33.32	56.24	-22.92	QP
4	0.5620	13.47	10.21	23.68	46.00	-22.32	AVG
5	0.9820	30.54	10.14	40.68	56.00	-15.32	QP
6*	0.9820	26.56	10.14	36.70	46.00	-9.30	AVG
7	1.2260	25.58	10.16	35.74	46.00	-10.26	AVG
8	1.2579	29.14	10.17	39.31	56.00	-16.69	QP
9	8.0620	11.15	10.34	21.49	50.00	-28.51	AVG
10	8.8180	16.28	10.35	26.63	60.00	-33.37	QP
11	12.4060	19.20	10.29	29.49	60.00	-30.51	QP
12	13.3540	3.78	10.27	14.05	50.00	-35.95	AVG



Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

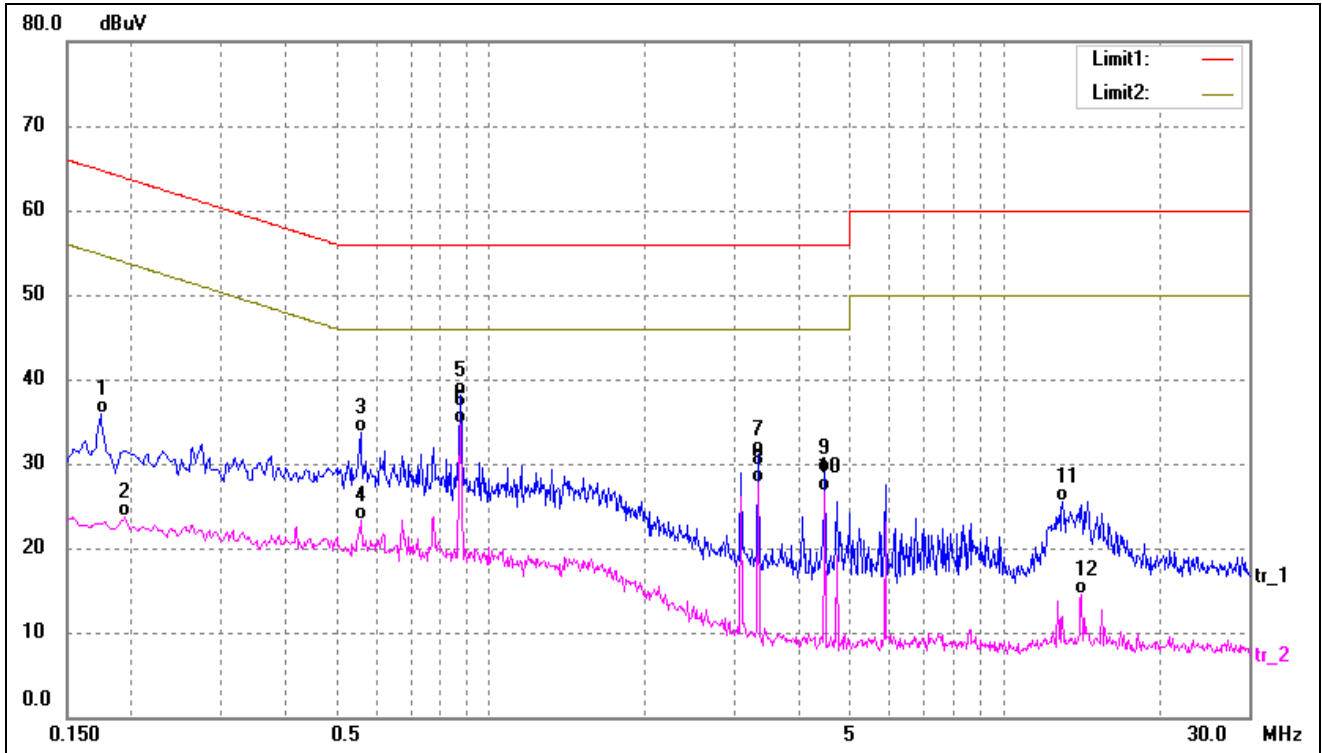

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	25.61	10.30	35.91	64.76	-28.85	QP
2	0.1940	13.36	10.30	23.66	53.86	-30.20	AVG
3	0.5580	23.57	10.21	33.78	56.00	-22.22	QP
4	0.5580	13.16	10.21	23.37	46.00	-22.63	AVG
5	0.8780	27.92	10.16	38.08	56.00	-17.92	QP
6*	0.8780	24.60	10.16	34.76	46.00	-11.24	AVG
7	3.3260	20.78	10.29	31.07	56.00	-24.93	QP
8	3.3260	17.33	10.29	27.62	46.00	-18.38	AVG
9	4.4780	18.57	10.32	28.89	56.00	-27.11	QP
10	4.4780	16.36	10.32	26.68	46.00	-19.32	AVG
11	13.0140	15.24	10.28	25.52	60.00	-34.48	QP
12	14.1380	4.17	10.26	14.43	50.00	-35.57	AVG


## 4. Radiated Emissions

### 4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

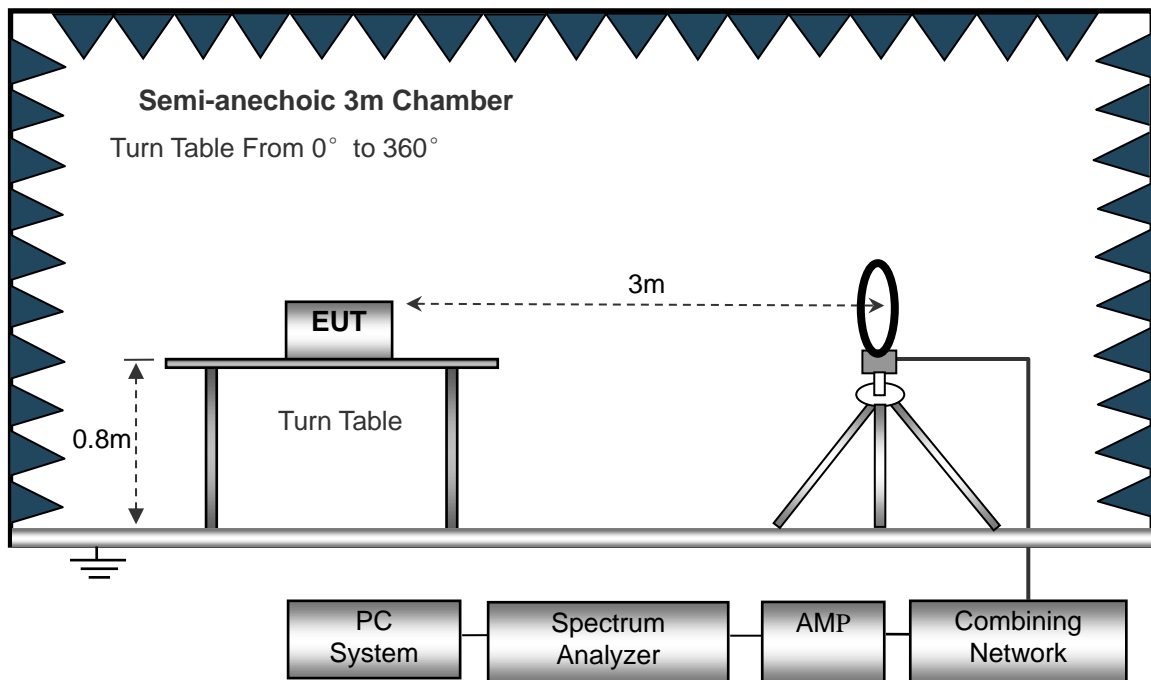

The test setup for emission measurement from 30 MHz to 1 GHz..

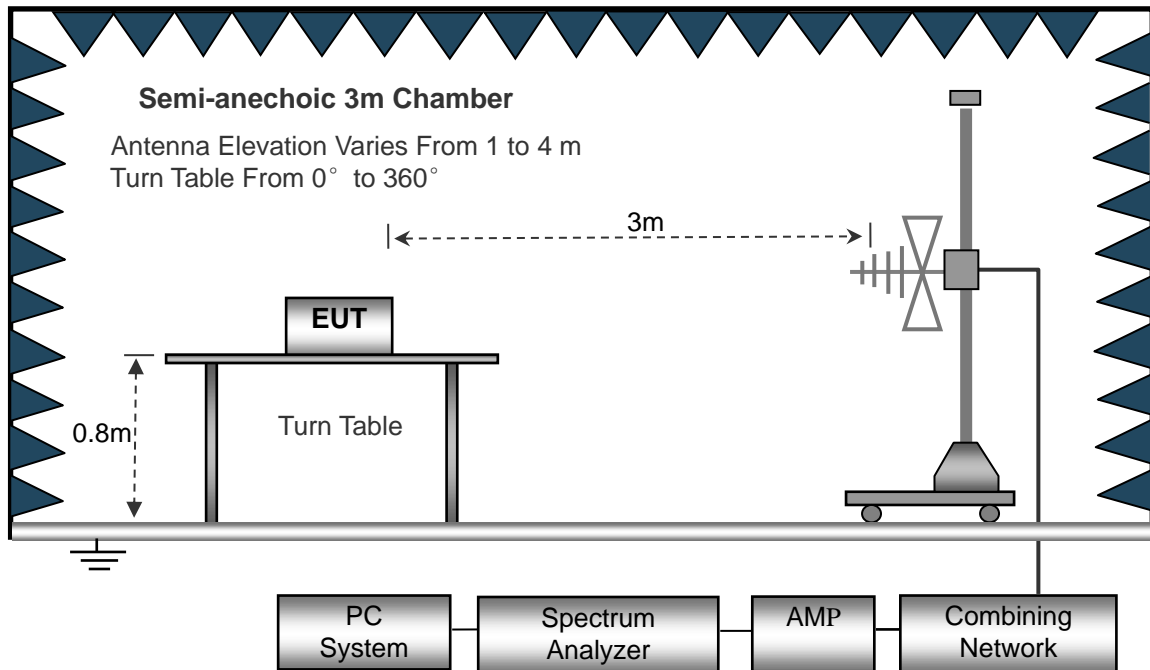

#### 4.2 Test Receiver Setup

Frequency :9kHz-30MHz  
 RBW=10KHz  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

#### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


### 4.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

### 4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

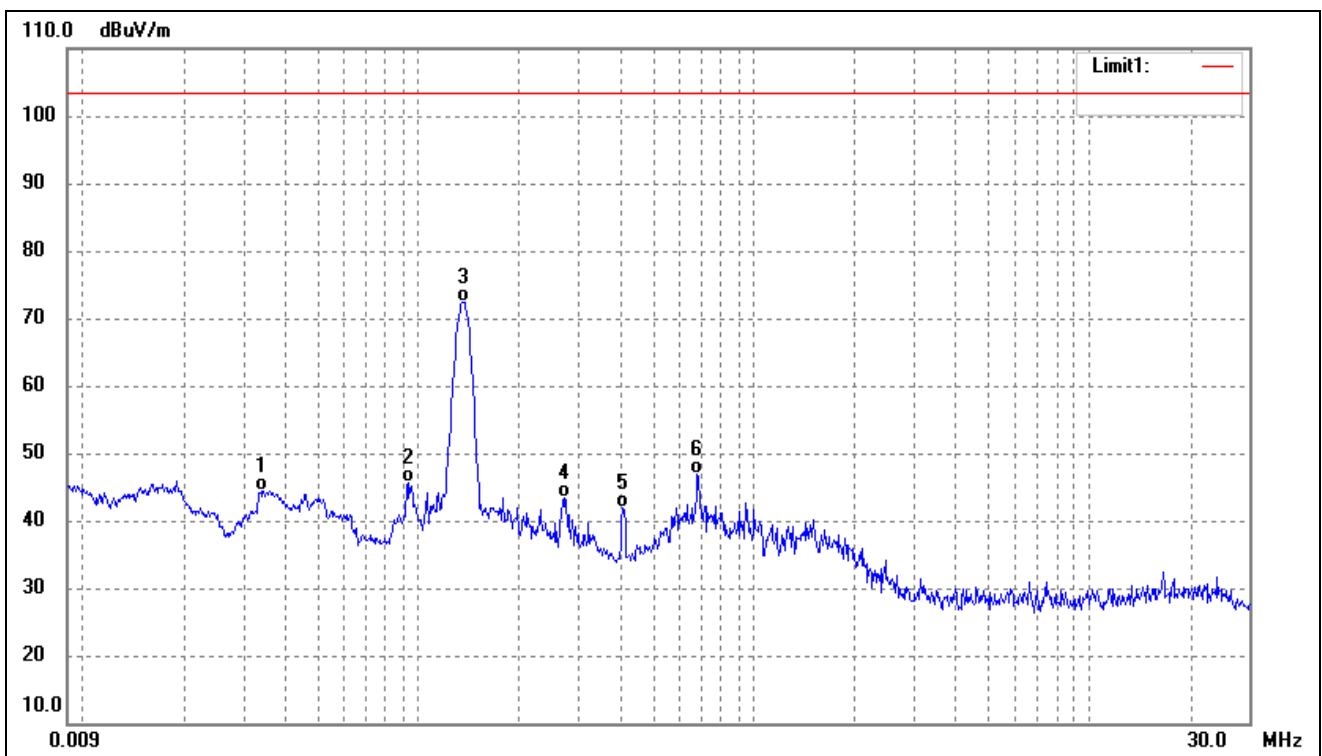


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0340	50.74	-6.29	44.45	103.50	-59.05	--	--	peak
2	0.0931	52.16	-6.56	45.60	103.50	-57.90	--	--	peak
3	0.1363	78.90	-6.41	72.49	103.50	-31.01	--	--	peak
4	0.2716	51.17	-7.73	43.44	103.50	-60.06	--	--	peak
5	0.4072	49.61	-7.67	41.94	103.50	-61.56	--	--	peak
6	0.6790	53.68	-6.73	46.95	103.50	-56.55	--	--	peak

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

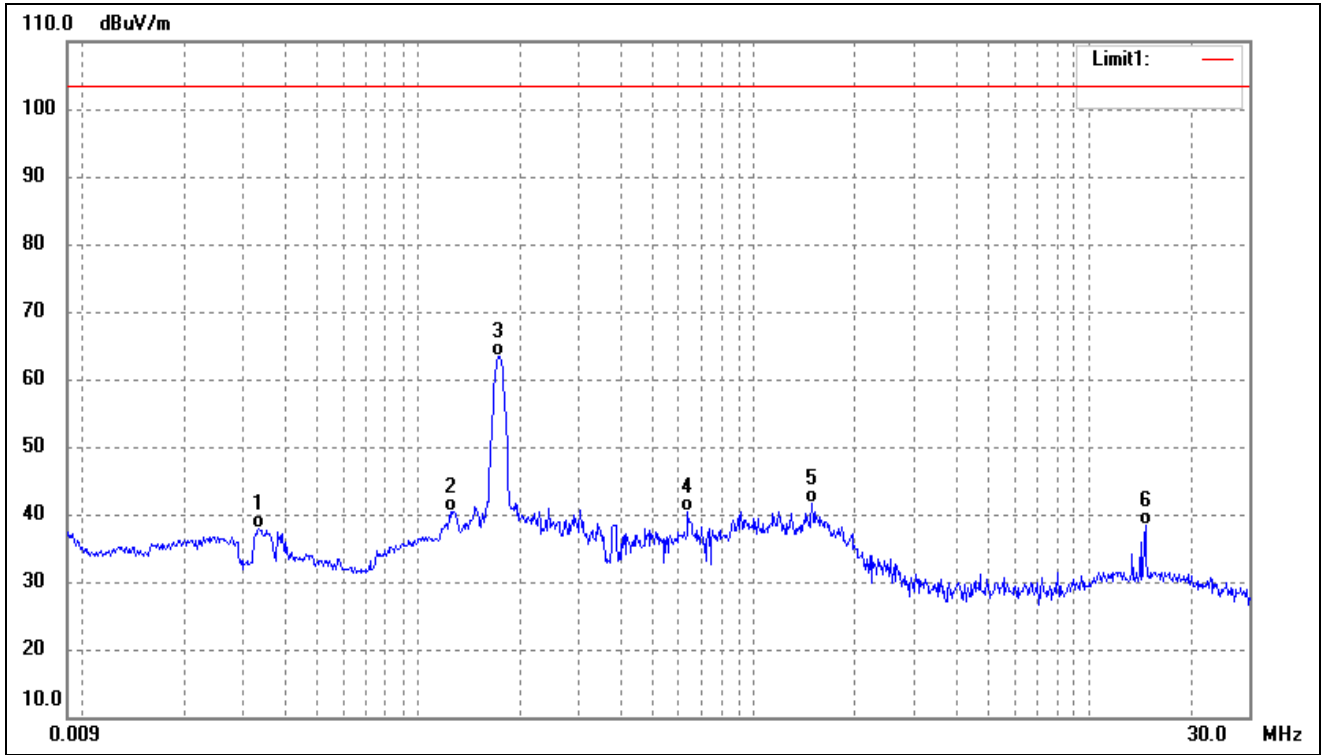

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0335	44.19	-6.31	37.88	103.50	-65.62	--	--	peak
2	0.1246	46.87	-6.47	40.40	103.50	-63.10	--	--	peak
3	0.1737	70.12	-6.65	63.47	103.50	-40.03	--	--	peak
4	0.6360	47.38	-6.92	40.46	103.50	-63.04	--	--	peak
5	1.4916	47.80	-6.12	41.68	103.50	-61.82	--	--	peak
6	14.6928	43.21	-4.75	38.46	103.50	-65.04	--	--	peak


Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

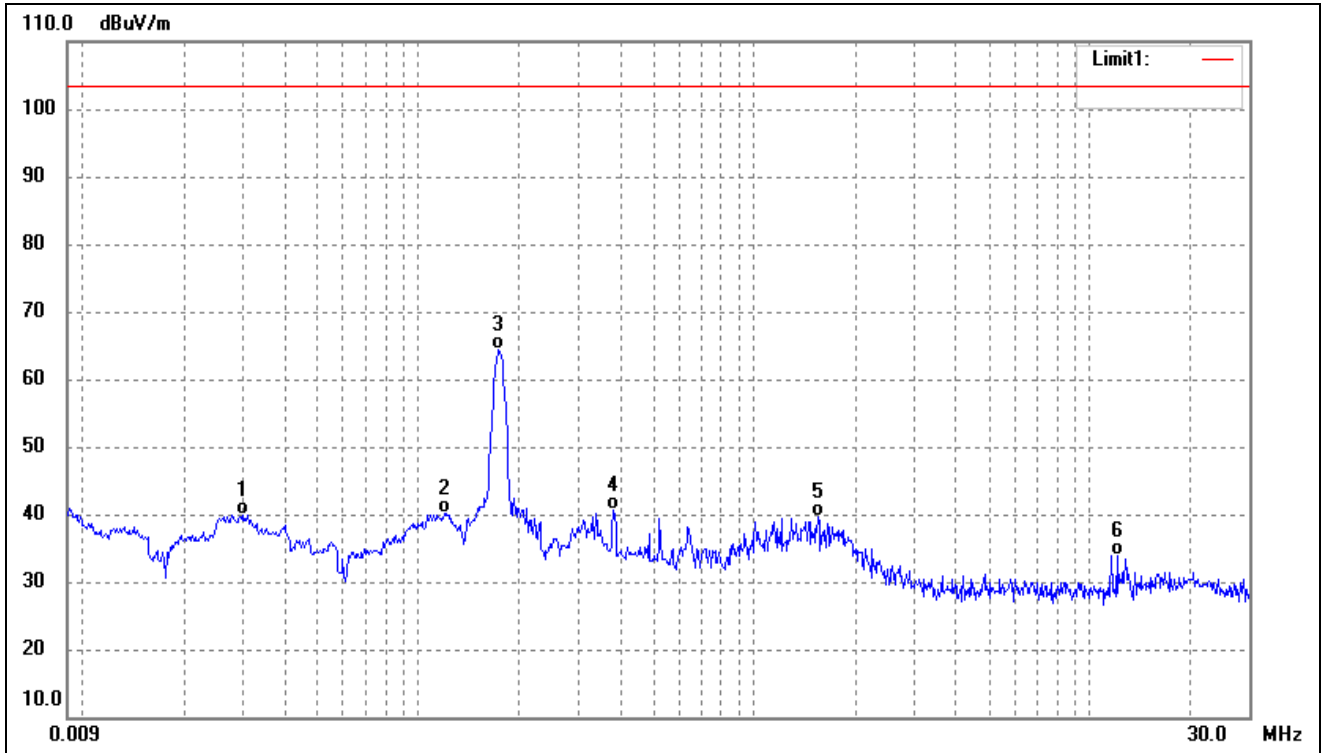

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0298	46.44	-6.51	39.93	103.50	-63.57	--	--	peak
2	0.1197	46.55	-6.50	40.05	103.50	-63.45	--	--	peak
3	0.1737	70.92	-6.65	64.27	103.50	-39.23	--	--	peak
4	0.3815	48.22	-7.71	40.51	103.50	-62.99	--	--	peak
5	1.5529	45.64	-6.11	39.53	103.50	-63.97	--	--	peak
6	12.0937	39.17	-5.23	33.94	103.50	-69.56	--	--	peak


**Plot of Radiated Emissions Test Data ( Above 30MHz)**

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

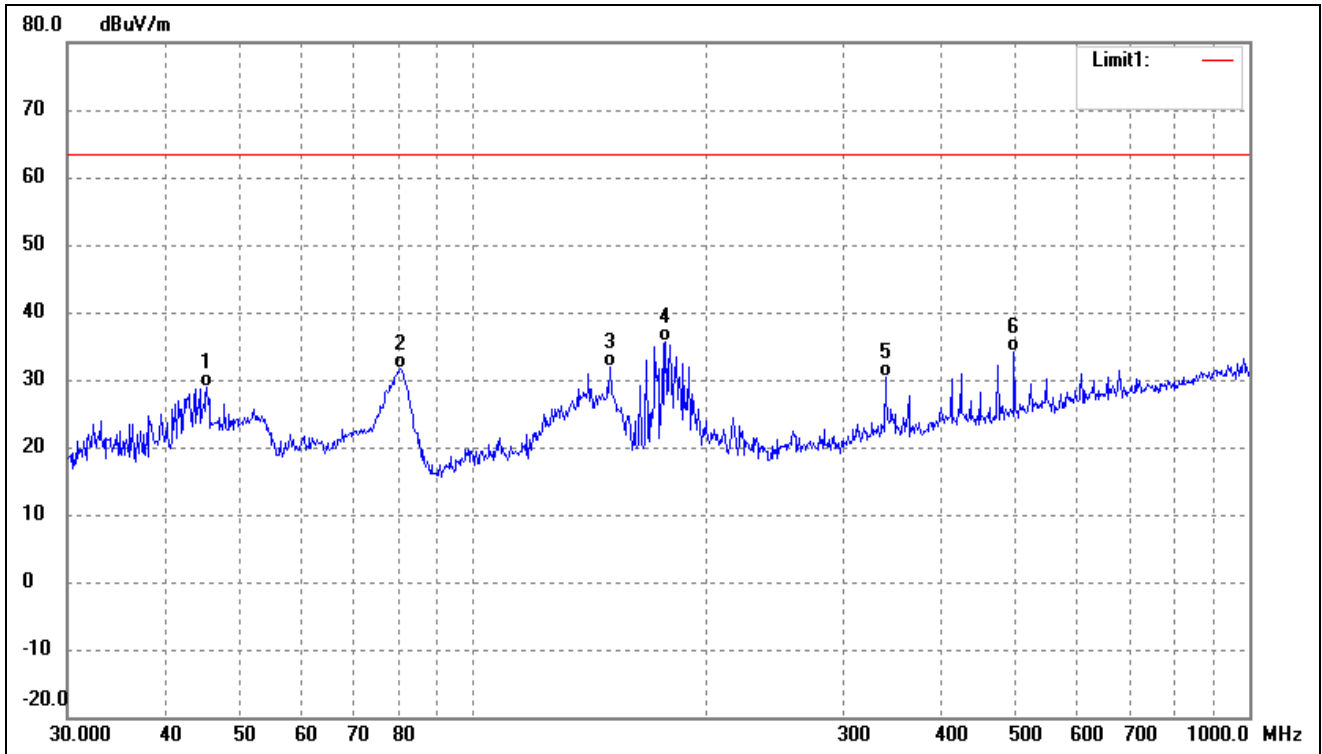

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.3755	36.19	-7.23	28.96	63.50	-34.54	--	--	QP
2	80.6442	43.55	-11.85	31.70	63.50	-31.80	--	--	QP
3	150.0108	43.65	-11.67	31.98	63.50	-31.52	--	--	QP
4	176.8878	46.04	-10.30	35.74	63.50	-27.76	--	--	QP
5	339.5888	34.69	-4.33	30.36	63.50	-33.14	--	--	QP
6	497.6765	36.45	-2.22	34.23	63.50	-29.27	--	--	QP


Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

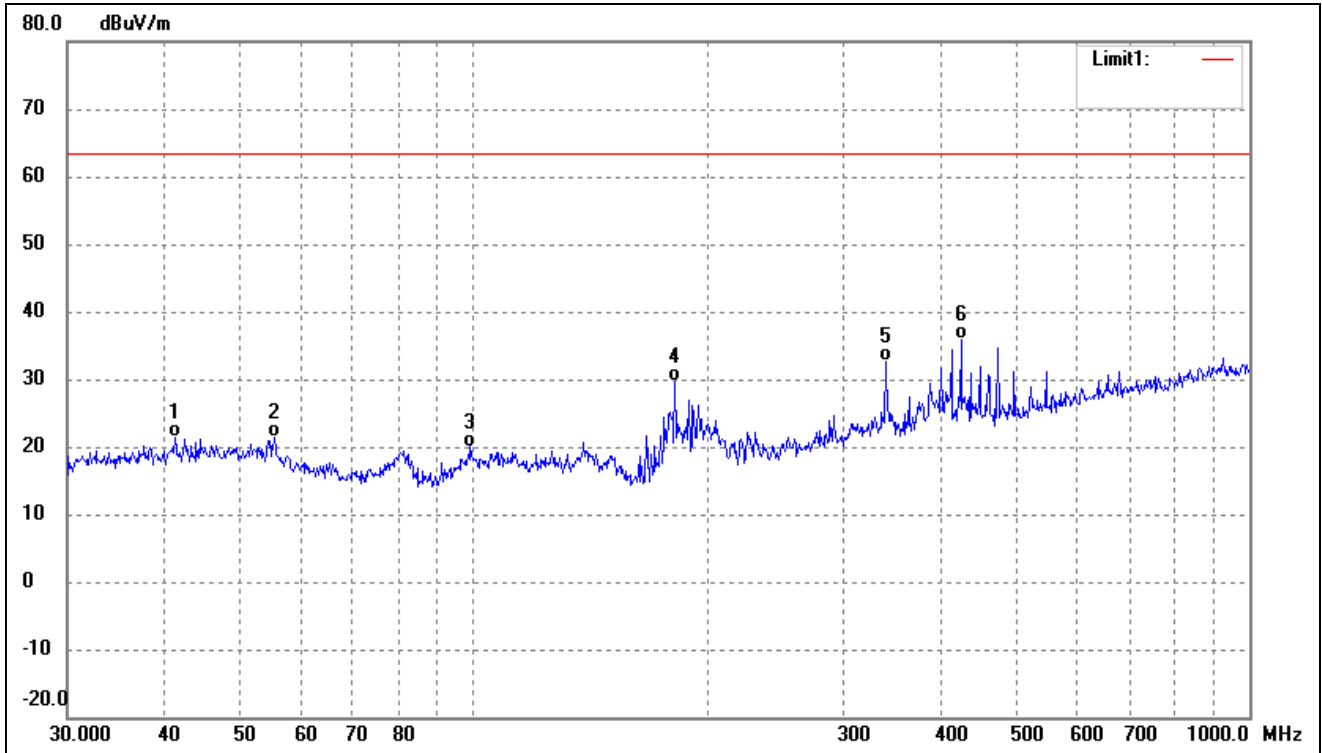

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.2765	28.48	-7.14	21.34	63.50	-42.16	--	--	QP
2	55.4147	29.59	-8.26	21.33	63.50	-42.17	--	--	QP
3	99.1797	28.29	-8.29	20.00	63.50	-43.50	--	--	QP
4	181.9202	39.46	-9.89	29.57	63.50	-33.93	--	--	QP
5	339.5888	37.04	-4.33	32.71	63.50	-30.79	--	--	QP
6	425.0280	39.03	-3.04	35.99	63.50	-27.51	--	--	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

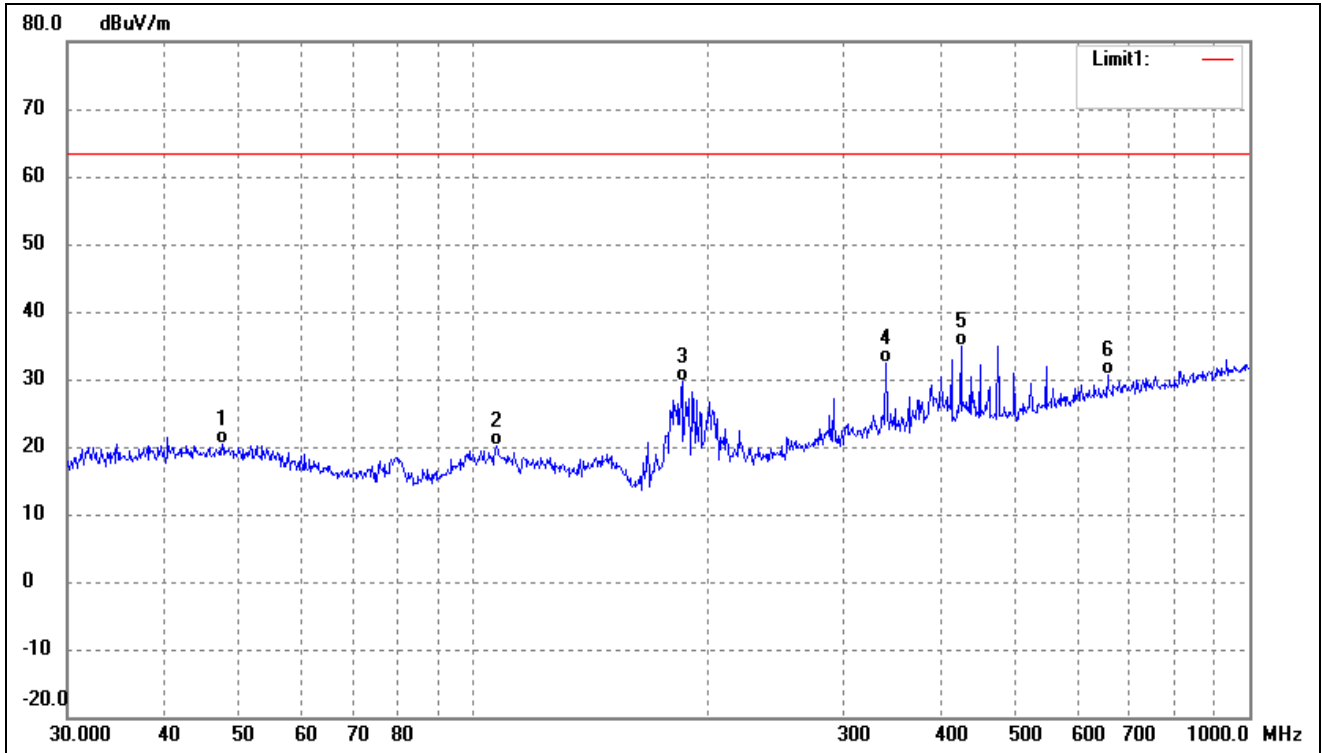


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.4918	27.60	-7.26	20.34	63.50	-43.16	--	--	QP
2	107.1337	28.13	-8.11	20.02	63.50	-43.48	--	--	QP
3	185.7882	39.03	-9.39	29.64	63.50	-33.86	--	--	QP
4	339.5888	36.74	-4.33	32.41	63.50	-31.09	--	--	QP
5	425.0280	37.87	-3.04	34.83	63.50	-28.67	--	--	QP
6	656.5300	29.92	0.67	30.59	63.50	-32.91	--	--	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

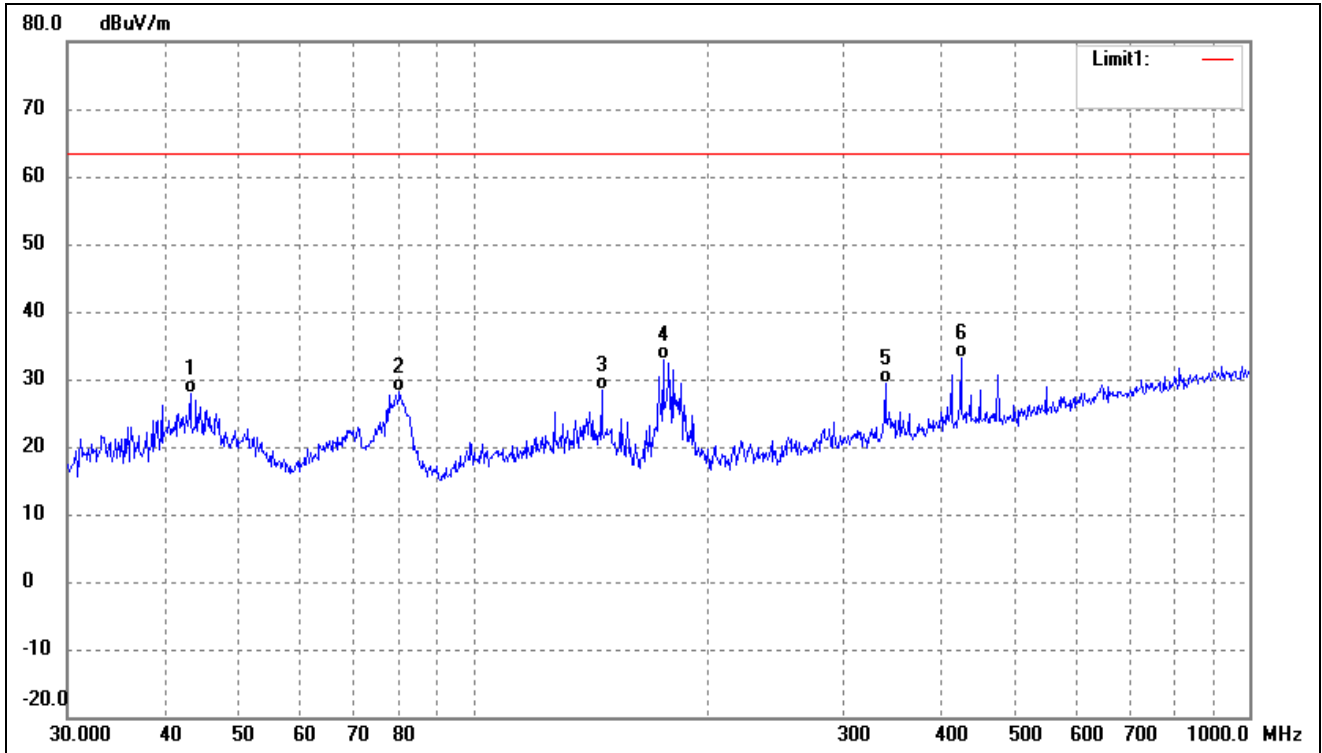


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.2017	35.02	-7.18	27.84	63.50	-35.66	--	--	QP
2	80.3619	40.09	-11.90	28.19	63.50	-35.31	--	--	QP
3	146.3735	39.94	-11.57	28.37	63.50	-35.13	--	--	QP
4	175.6516	43.22	-10.36	32.86	63.50	-30.64	--	--	QP
5	339.5888	33.60	-4.33	29.27	63.50	-34.23	--	--	QP
6	425.0280	36.09	-3.04	33.05	63.50	-30.45	--	--	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

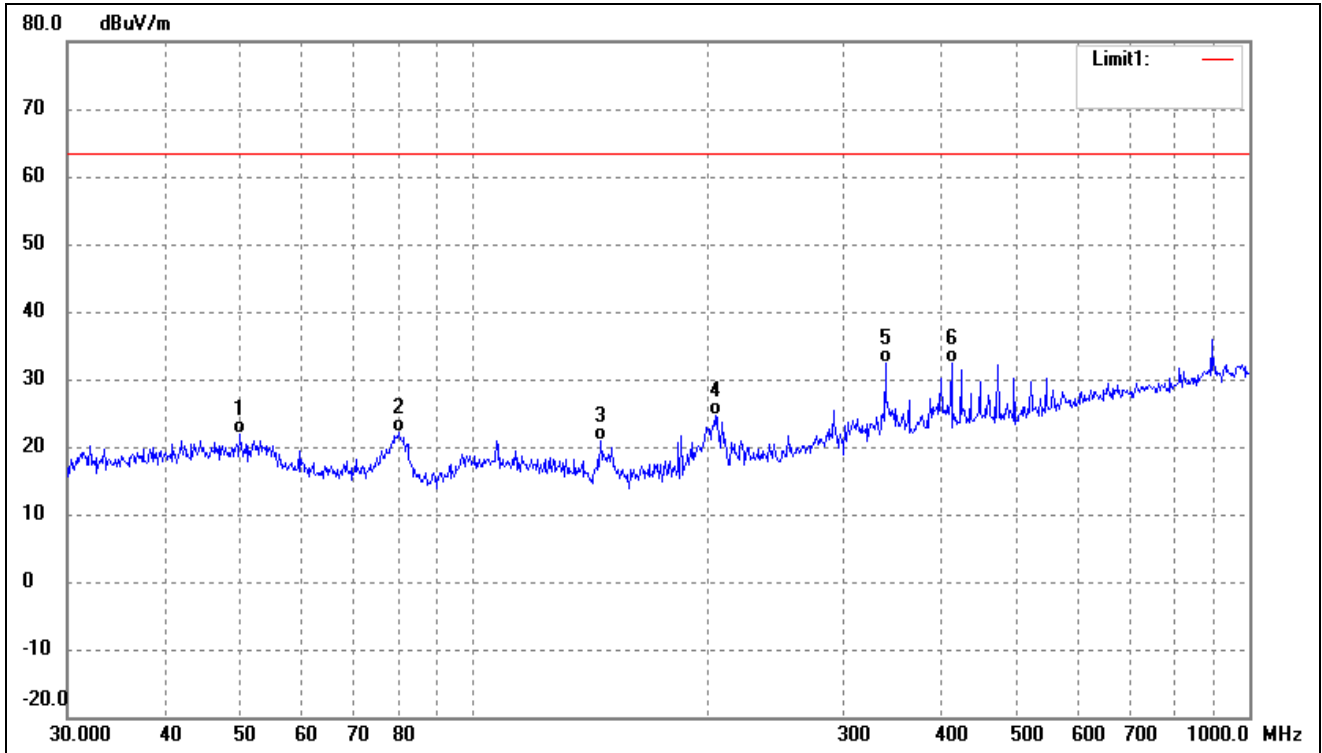

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.0566	29.25	-7.33	21.92	63.50	-41.58	--	--	QP
2	80.0806	34.09	-11.92	22.17	63.50	-41.33	--	--	QP
3	145.8611	32.49	-11.55	20.94	63.50	-42.56	--	--	QP
4	204.9551	32.95	-8.24	24.71	63.50	-38.79	--	--	QP
5	339.5888	36.75	-4.33	32.42	63.50	-31.08	--	--	QP
6	413.2706	35.57	-3.17	32.40	63.50	-31.10	--	--	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

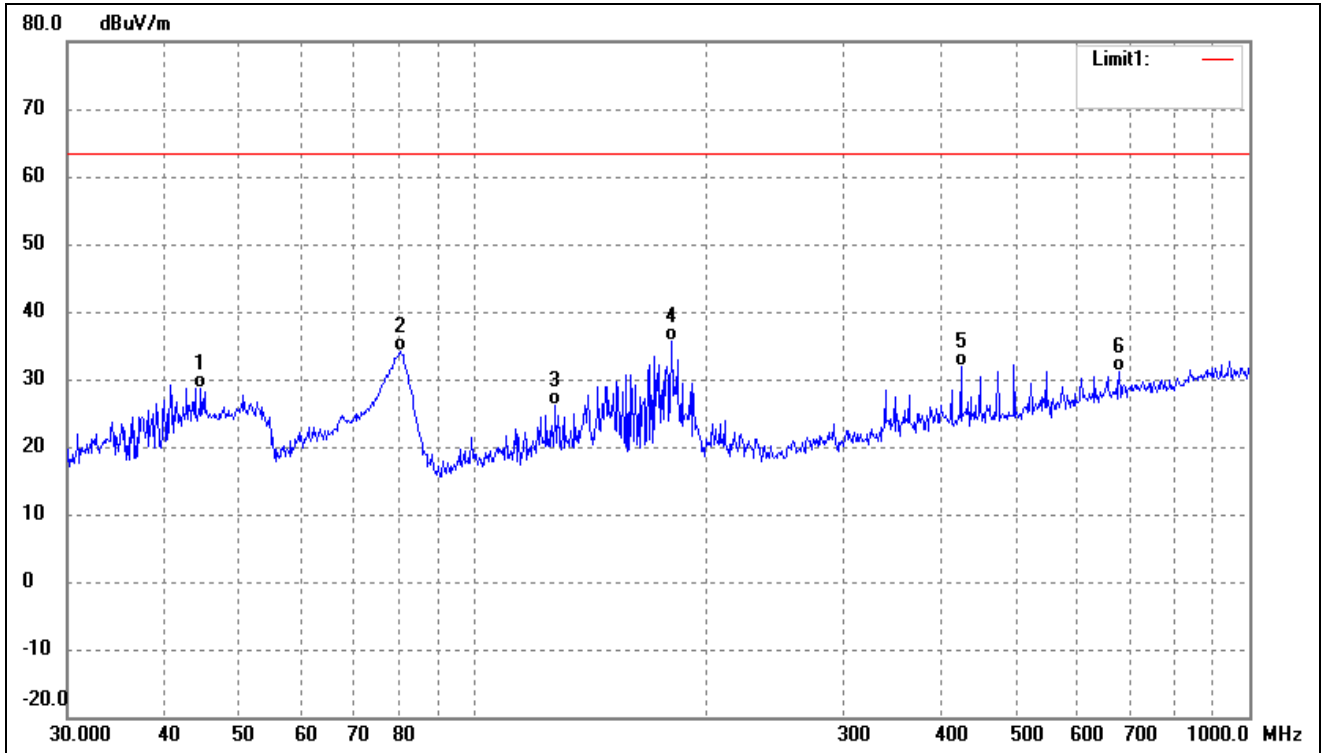

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.5868	35.90	-7.22	28.68	63.50	-34.82	--	--	QP
2	80.6442	46.05	-11.85	34.20	63.50	-29.30	--	--	QP
3	127.6645	36.22	-10.19	26.03	63.50	-37.47	--	--	QP
4	180.0165	45.81	-10.14	35.67	63.50	-27.83	--	--	QP
5	425.0280	34.97	-3.04	31.93	63.50	-31.57	--	--	QP
6	679.9600	30.07	1.05	31.12	63.50	-32.38	--	--	QP

Remark:

'-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## APPENDIX PHOTOGRAPHS

---

Please refer to "ANNEX"

\*\*\*\* END OF REPORT \*\*\*\*