

TEST REPORT

Reference No..... : WTX23X02014932W001
FCC ID..... : A4X-WPC15-1MWNAS
Applicant..... : CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Manufacturer..... : DONGGUAN CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Product Name..... : Wireless Charger
Model No..... : WPC15-1MWNAS
Standards..... : FCC Part 18
Date of Receipt sample.... : 2023-02-07
Date of Test..... : 2023-02-07 to 2023-02-24
Date of Issue..... : 2023-02-24
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND OPERATION MODE6
1.6 MEASUREMENT UNCERTAINTY7
1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. CONDUCTED EMISSIONS10
3.1 STANDARD APPLICABLE.....10
3.2 TEST PROCEDURE.....10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10
3.4 ENVIRONMENTAL CONDITIONS10
3.5 TEST RECEIVER SETUP11
3.6 SUMMARY OF TEST RESULTS/PLOTS11

4. RADIATED EMISSIONS.....18
4.1 TEST PROCEDURE.....18
4.2 TEST RECEIVER SETUP19
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....19
4.4 ENVIRONMENTAL CONDITIONS20
4.5 SUMMARY OF TEST RESULTS/PLOTS20

APPENDIX PHOTOGRAPHS.....29

Report version

Version No.	Date of issue	Description
Rev.00	2023-02-24	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory 1#:	SuiChuan CE LINK LIMITED
Address of factory 1#:	SuiChuan county industrial park east zone, Ji'an city, Jiangxi Province, China.
Factory 2#:	CE LINK VIET NAM COMPANY LIMITED.
Address of factory 2#:	Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Wireless Charger
Trade Name:	CE-LINK
Model No.:	WPC15-1MWNAS
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz
Modulation Type:	/
Antenna Type:	Coil Antenna
Antenna Gain	0dBi
Rated Voltage:	Input: 5V, 9V, 12V
Rated Current:	Input: 2 A, 1.67A, 1.25A
Rated Power:	Wireless Output: 15W Max

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output 5W
TM2	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output 10W
TM3	Wireless Charging	Connect to the adapter;	AC120V/60Hz for adapter; Wireless charging: output 15W

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	Xiaomi	MDY-08-ES	/
Phone	Redmi	Redmi K60	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.50	Unshielded	Without Ferrite

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	HP	8447F	2805A0347 5	2022-12-30	2023-12-29
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A1017 9	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

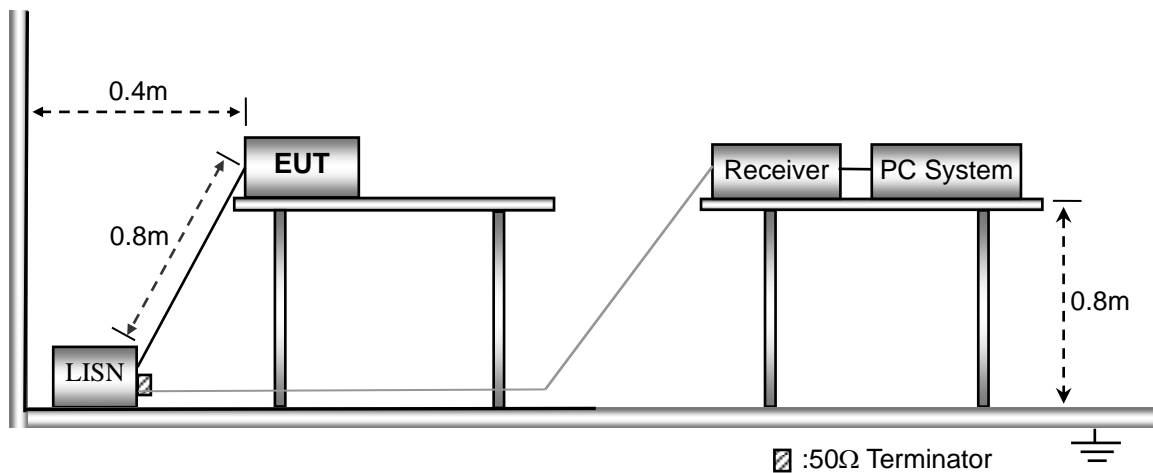

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

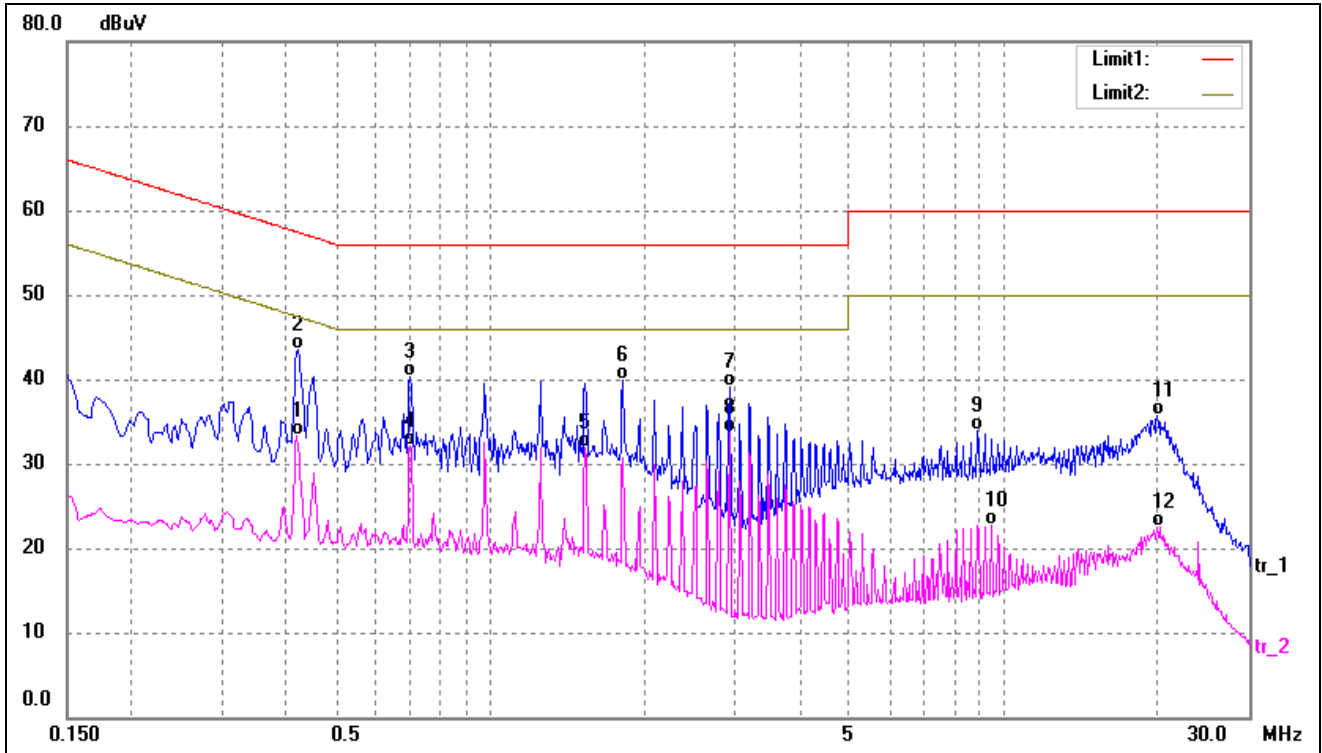


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4180	23.04	10.22	33.26	47.49	-14.23	AVG
2	0.4220	33.30	10.22	43.52	57.41	-13.89	QP
3	0.6980	30.07	10.19	40.26	56.00	-15.74	QP
4	0.6980	21.96	10.19	32.15	46.00	-13.85	AVG
5	1.5300	21.77	10.20	31.97	46.00	-14.03	AVG
6	1.8100	29.61	10.23	39.84	56.00	-16.16	QP
7	2.9219	28.88	10.27	39.15	56.00	-16.85	QP
8*	2.9219	23.43	10.27	33.70	46.00	-12.30	AVG
9	8.9100	23.50	10.35	33.85	60.00	-26.15	QP
10	9.4700	12.34	10.35	22.69	50.00	-27.31	AVG
11	19.8900	25.36	10.37	35.73	60.00	-24.27	QP
12	20.0700	12.23	10.37	22.60	50.00	-27.40	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

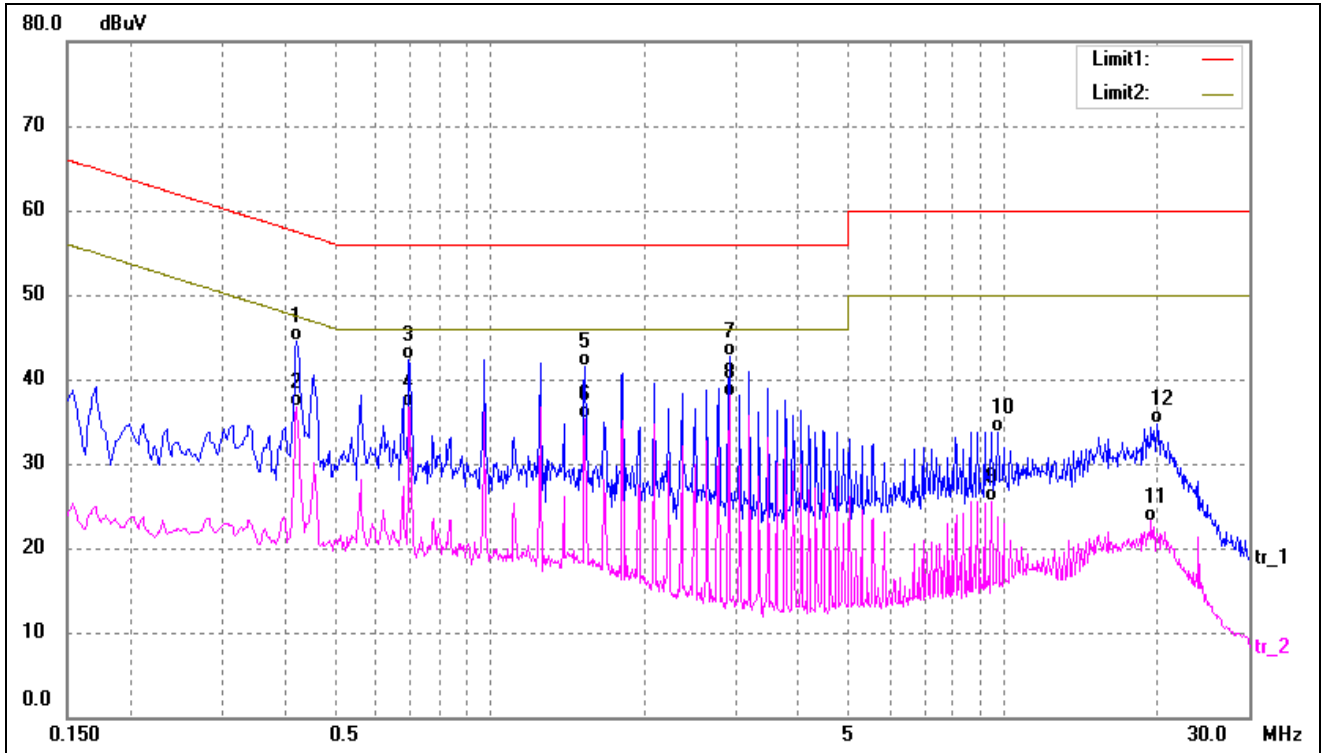


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4180	34.24	10.22	44.46	57.49	-13.03	QP
2	0.4180	26.56	10.22	36.78	47.49	-10.71	AVG
3	0.6940	32.09	10.19	42.28	56.00	-13.72	QP
4	0.6940	26.56	10.19	36.75	46.00	-9.25	AVG
5	1.5300	31.30	10.20	41.50	56.00	-14.50	QP
6	1.5300	25.20	10.20	35.40	46.00	-10.60	AVG
7	2.9180	32.35	10.27	42.62	56.00	-13.38	QP
8*	2.9180	27.73	10.27	38.00	46.00	-8.00	AVG
9	9.4580	15.24	10.35	25.59	50.00	-24.41	AVG
10	9.7380	23.41	10.35	33.76	60.00	-26.24	QP
11	19.3420	12.84	10.36	23.20	50.00	-26.80	AVG
12	19.8860	24.32	10.37	34.69	60.00	-25.31	QP

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

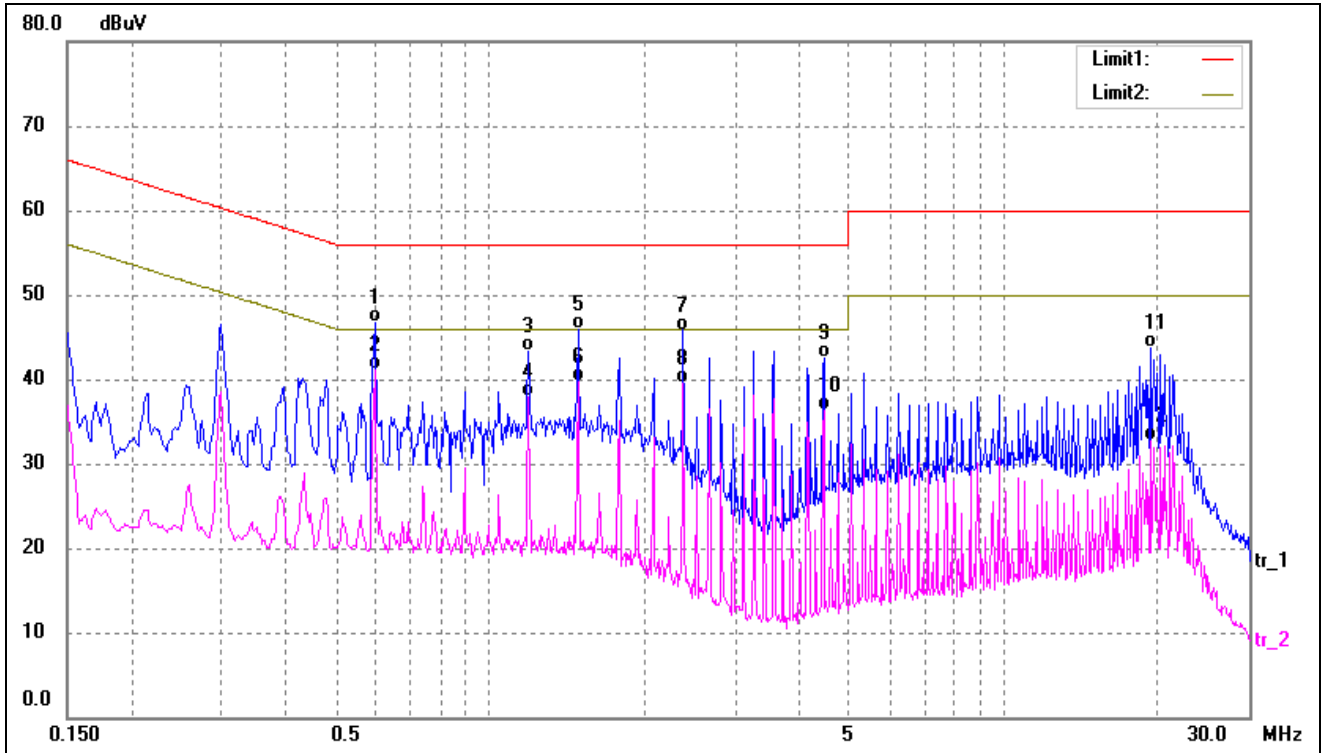


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5940	36.49	10.21	46.70	56.00	-9.30	QP
2*	0.5940	30.94	10.21	41.15	46.00	-4.85	AVG
3	1.1860	33.18	10.16	43.34	56.00	-12.66	QP
4	1.1860	27.65	10.16	37.81	46.00	-8.19	AVG
5	1.4860	35.80	10.19	45.99	56.00	-10.01	QP
6	1.4860	29.54	10.19	39.73	46.00	-6.27	AVG
7	2.3780	35.54	10.26	45.80	56.00	-10.20	QP
8	2.3780	29.19	10.26	39.45	46.00	-6.55	AVG
9	4.4540	32.27	10.32	42.59	56.00	-13.41	QP
10	4.4540	26.00	10.32	36.32	46.00	-9.68	AVG
11	19.3060	33.37	10.36	43.73	60.00	-16.27	QP
12	19.3060	22.31	10.36	32.67	50.00	-17.33	AVG

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

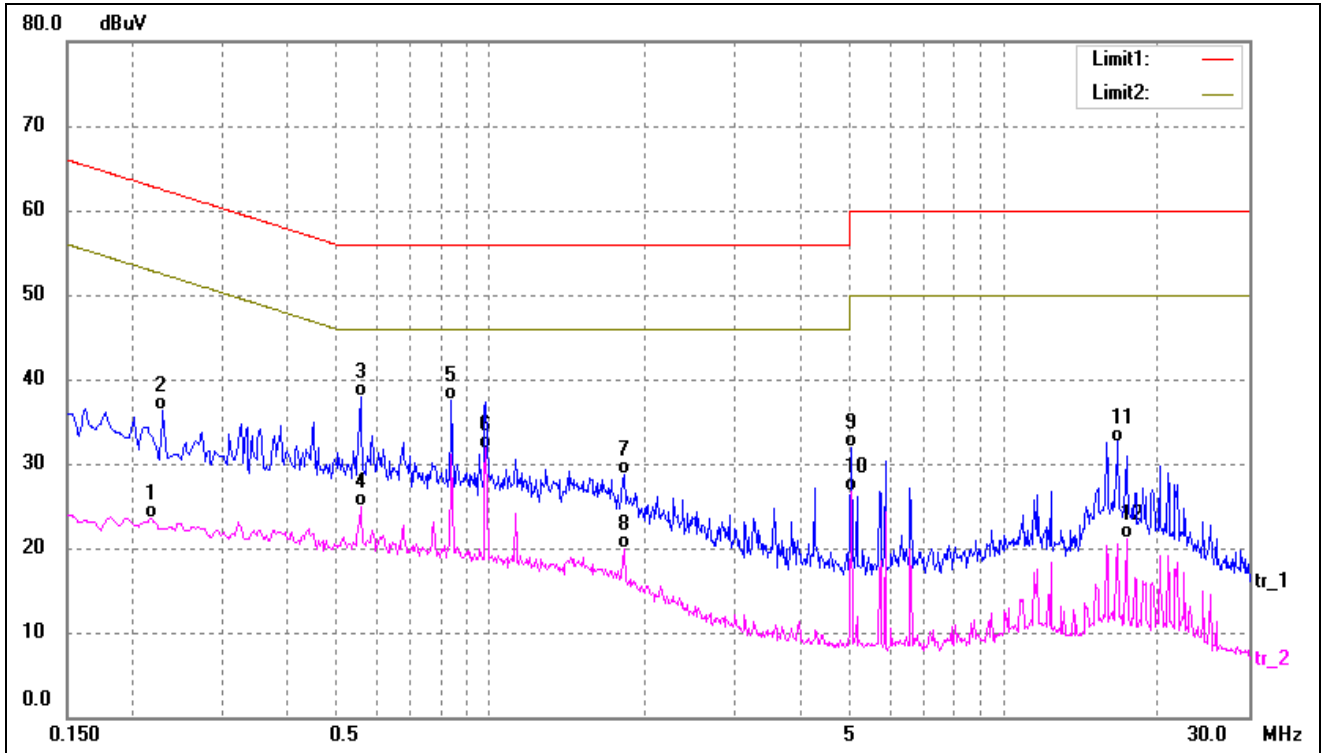


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2180	13.21	10.28	23.49	52.89	-29.40	AVG
2	0.2300	25.94	10.28	36.22	62.45	-26.23	QP
3	0.5580	27.77	10.21	37.98	56.00	-18.02	QP
4	0.5580	14.78	10.21	24.99	46.00	-21.01	AVG
5	0.8420	27.30	10.16	37.46	56.00	-18.54	QP
6*	0.9820	21.66	10.14	31.80	46.00	-14.20	AVG
7	1.8220	18.42	10.23	28.65	56.00	-27.35	QP
8	1.8220	9.60	10.23	19.83	46.00	-26.17	AVG
9	5.0460	21.50	10.33	31.83	60.00	-28.17	QP
10	5.0460	16.39	10.33	26.72	50.00	-23.28	AVG
11	16.6620	22.32	10.28	32.60	60.00	-27.40	QP
12	17.3779	10.72	10.30	21.02	50.00	-28.98	AVG

Test mode:	TM3	Polarity:	Line
------------	-----	-----------	------

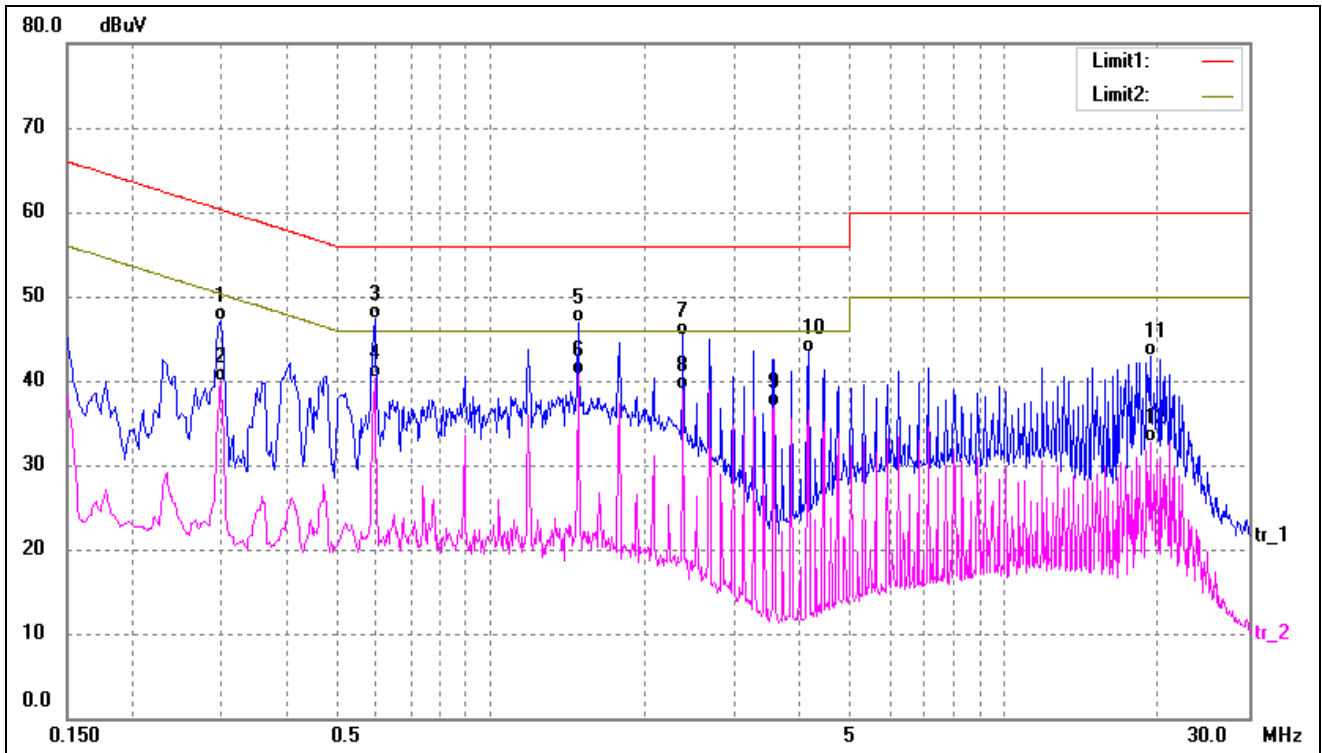

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2980	36.83	10.24	47.07	60.30	-13.23	QP
2	0.2980	29.66	10.24	39.90	50.30	-10.40	AVG
3	0.5940	37.11	10.21	47.32	56.00	-8.68	QP
4	0.5940	30.19	10.21	40.40	46.00	-5.60	AVG
5	1.4860	36.79	10.19	46.98	56.00	-9.02	QP
6*	1.4860	30.58	10.19	40.77	46.00	-5.23	AVG
7	2.3740	35.14	10.26	45.40	56.00	-10.60	QP
8	2.3740	28.70	10.26	38.96	46.00	-7.04	AVG
9	3.5660	26.70	10.29	36.99	46.00	-9.01	AVG
10	4.1579	33.09	10.31	43.40	56.00	-12.60	QP
11	19.2939	32.56	10.36	42.92	60.00	-17.08	QP
12	19.2939	22.40	10.36	32.76	50.00	-17.24	AVG

Test mode:	TM3	Polarity:	Neutral
------------	-----	-----------	---------

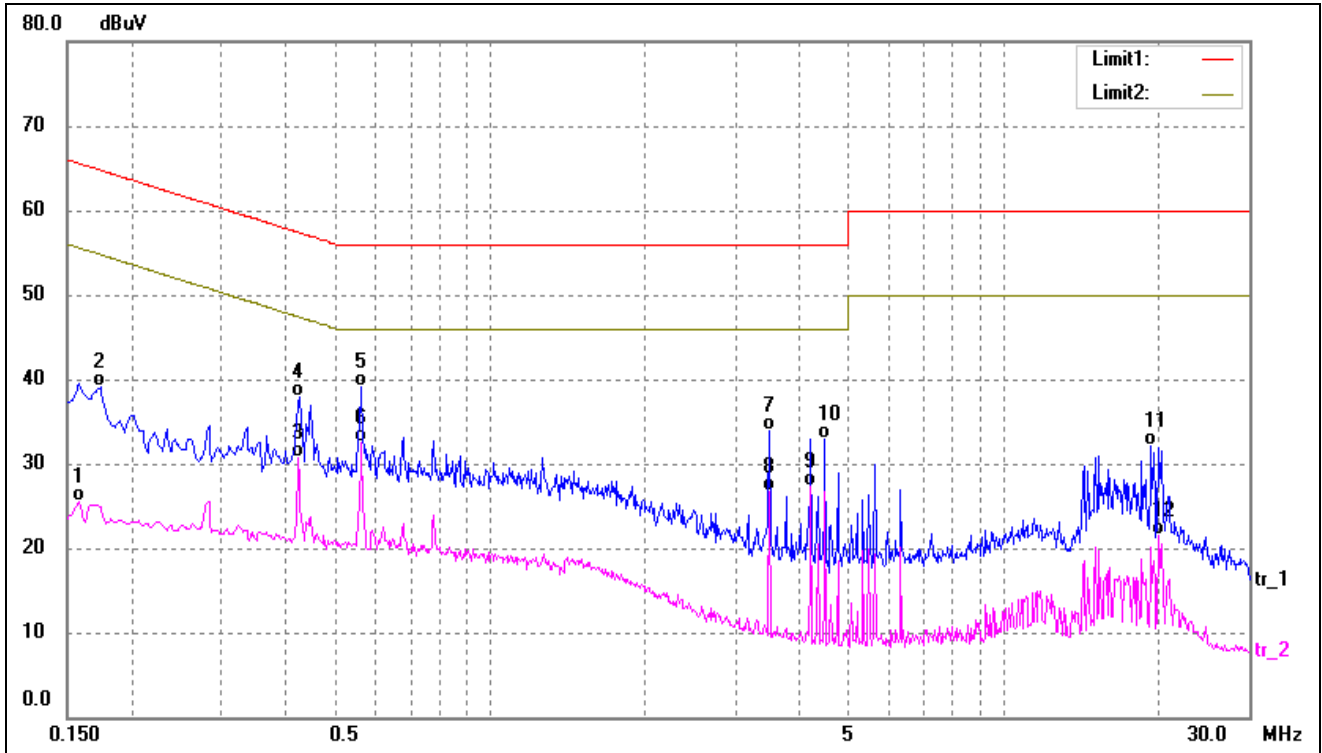

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	15.22	10.31	25.53	55.56	-30.03	AVG
2	0.1740	28.74	10.30	39.04	64.76	-25.72	QP
3	0.4220	20.57	10.22	30.79	47.41	-16.62	AVG
4	0.4260	27.66	10.22	37.88	57.33	-19.45	QP
5	0.5620	28.87	10.21	39.08	56.00	-16.92	QP
6*	0.5620	22.31	10.21	32.52	46.00	-13.48	AVG
7	3.5060	23.58	10.29	33.87	56.00	-22.13	QP
8	3.5060	16.36	10.29	26.65	46.00	-19.35	AVG
9	4.2020	17.01	10.31	27.32	46.00	-18.68	AVG
10	4.4820	22.61	10.32	32.93	56.00	-23.07	QP
11	19.3300	21.82	10.36	32.18	60.00	-27.82	QP
12	20.0380	11.08	10.37	21.45	50.00	-28.55	AVG


4. Radiated Emissions

4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

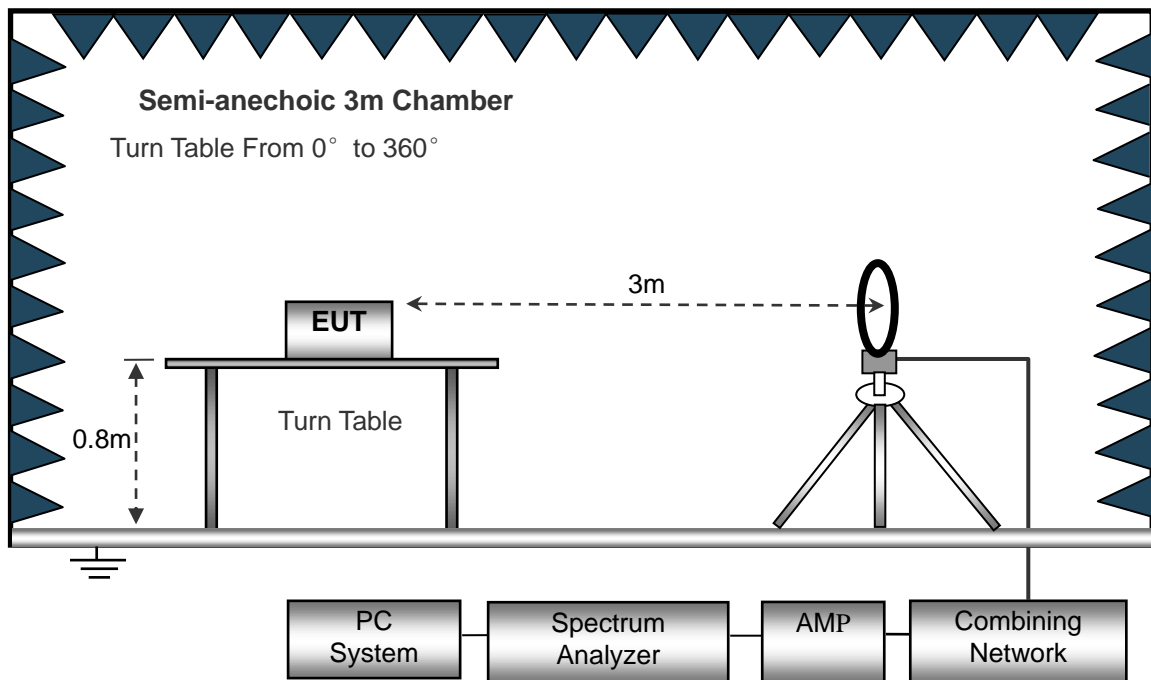

The test setup for emission measurement from 30 MHz to 1 GHz..

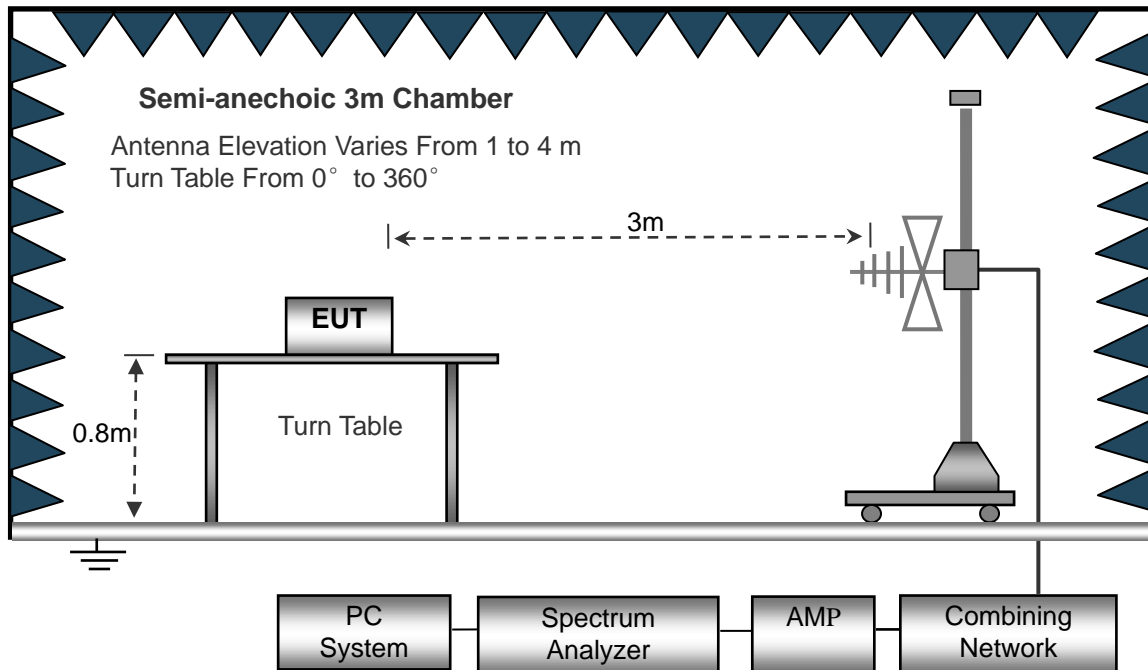

4.2 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

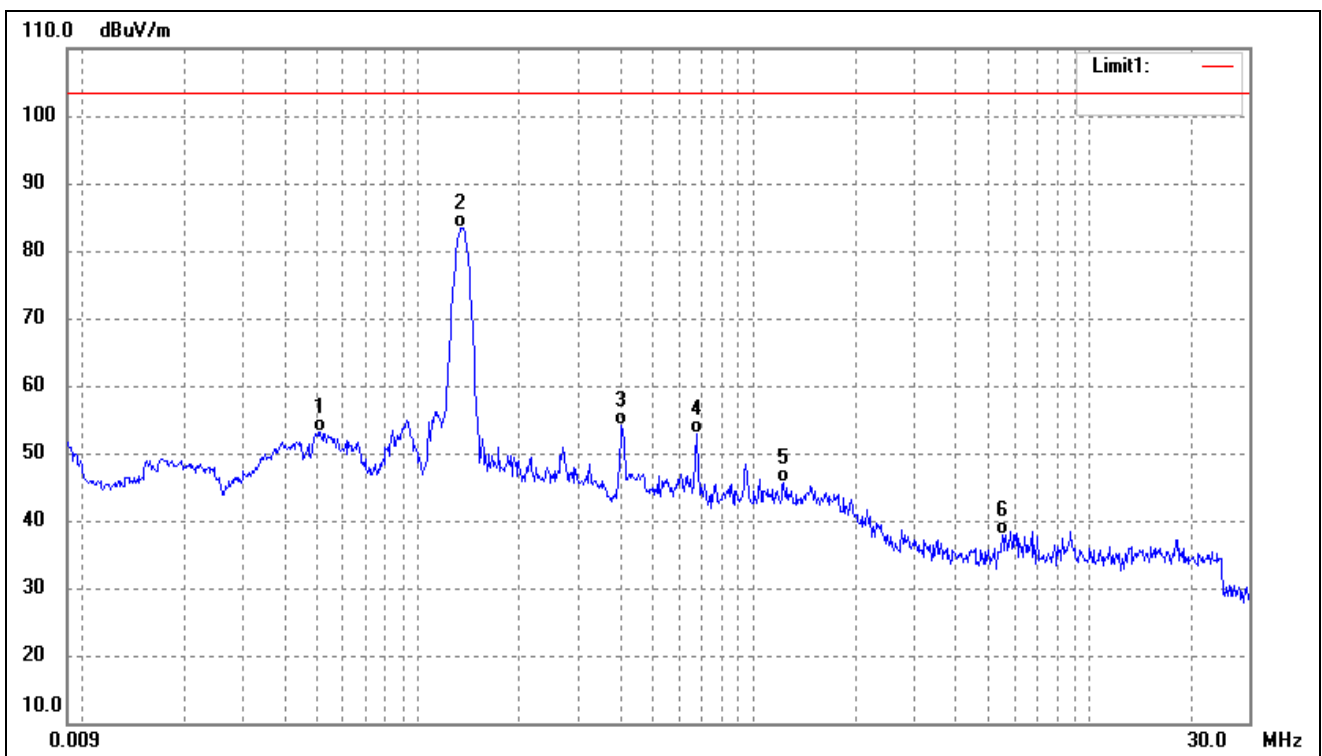


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0511	58.65	-5.48	53.17	103.50	-50.33	-	-	QP
2	0.1341	89.80	-6.42	83.38	103.50	-20.12	-	-	QP
3	0.4041	61.84	-7.69	54.15	103.50	-49.35	-	-	QP
4	0.6736	59.53	-6.76	52.77	103.50	-50.73	-	-	QP
5	1.2276	51.83	-6.19	45.64	103.50	-57.86	-	-	QP
6	5.5060	43.33	-5.52	37.81	103.50	-65.69	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

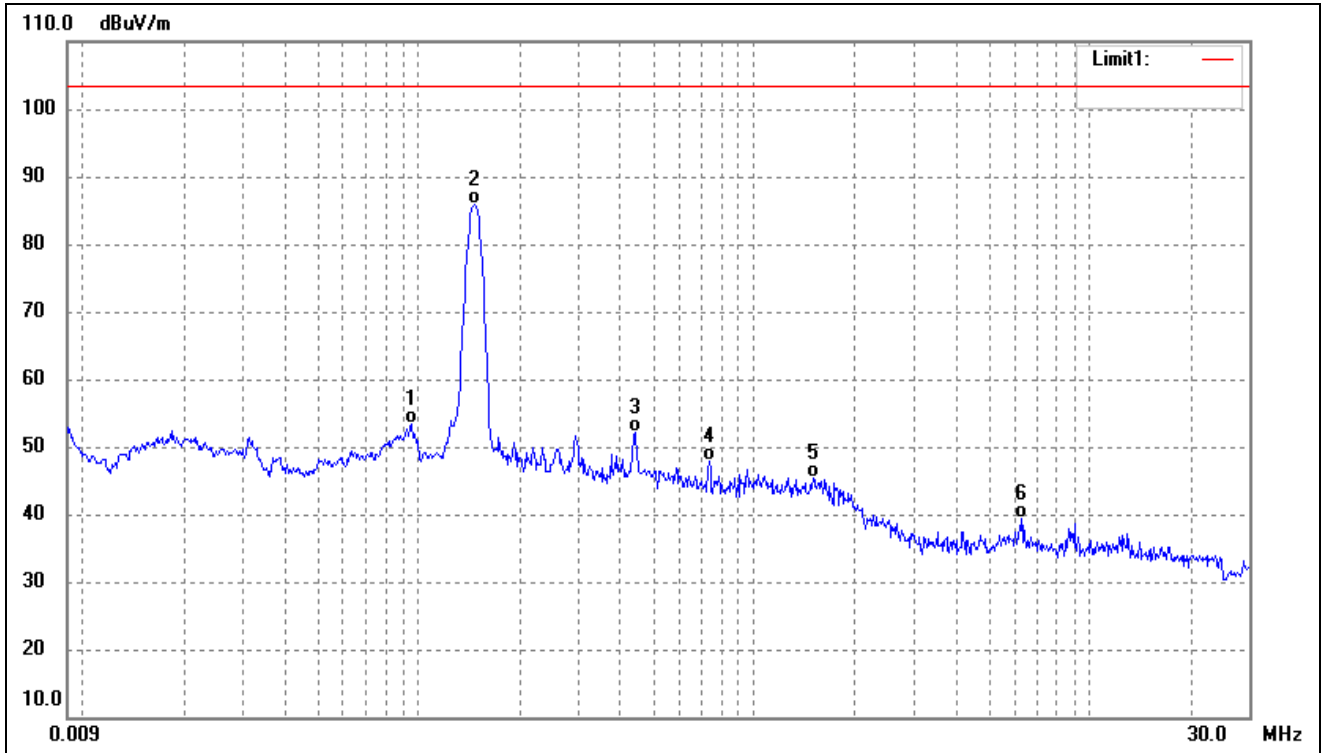

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0954	60.07	-6.58	53.49	103.50	-50.01	-	-	QP
2	0.1466	92.27	-6.35	85.92	103.50	-17.58	-	-	QP
3	0.4418	59.80	-7.63	52.17	103.50	-51.33	-	-	QP
4	0.7365	54.37	-6.46	47.91	103.50	-55.59	-	-	QP
5	1.5038	51.49	-6.12	45.37	103.50	-58.13	-	-	QP
6	6.2690	44.97	-5.53	39.44	103.50	-64.06	-	-	QP


Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

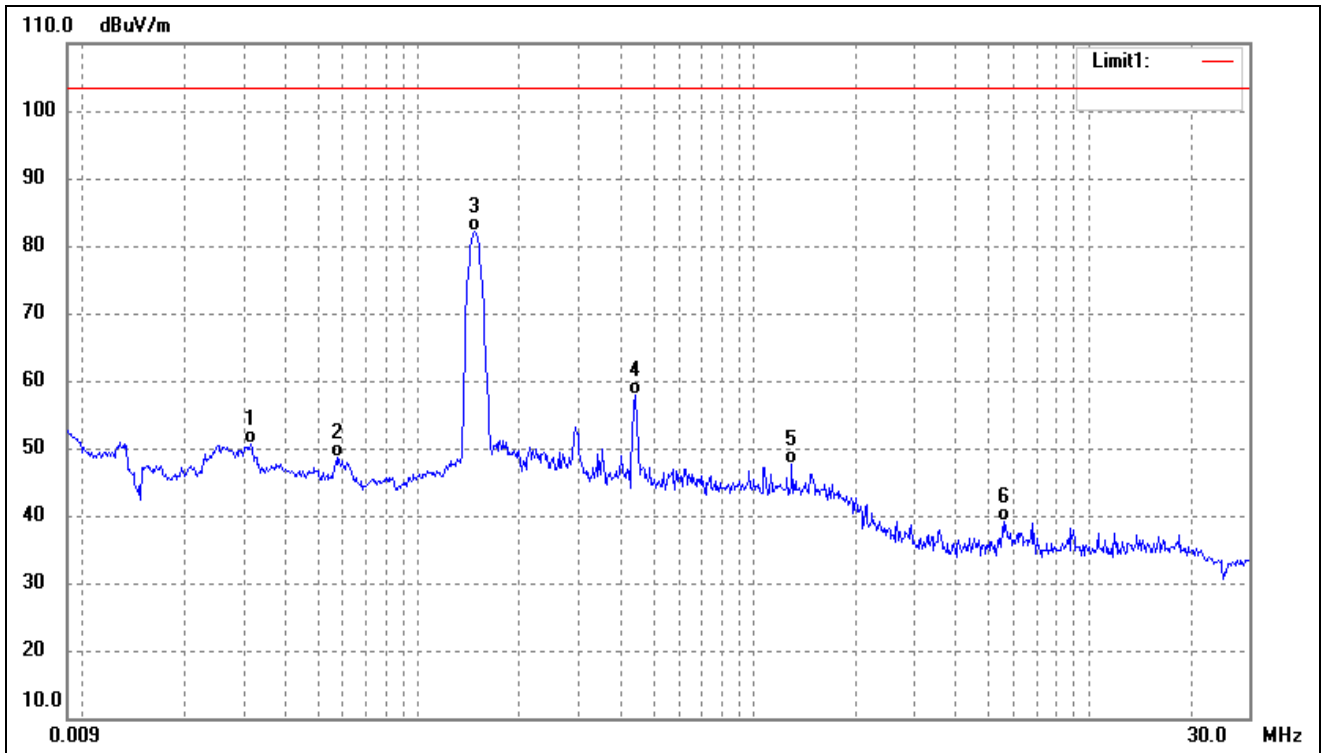

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0316	56.98	-6.41	50.57	103.50	-52.93	-	-	QP
2	0.0572	54.31	-5.73	48.58	103.50	-54.92	-	-	QP
3	0.1466	88.37	-6.35	82.02	103.50	-21.48	-	-	QP
4	0.4418	65.45	-7.63	57.82	103.50	-45.68	-	-	QP
5	1.2994	53.77	-6.17	47.60	103.50	-55.90	-	-	QP
6	5.5509	44.72	-5.51	39.21	103.50	-64.29	-	-	QP


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

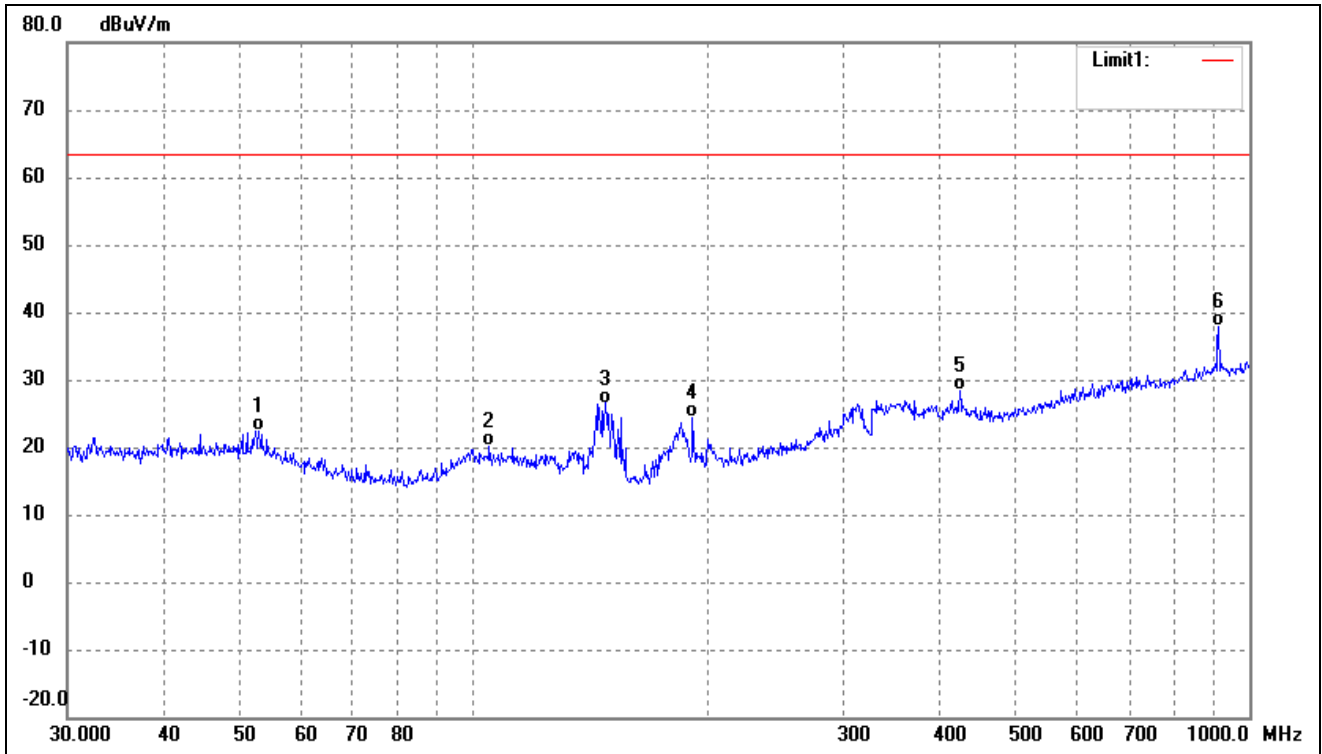


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.9453	30.23	-7.83	22.40	63.50	-41.10	-	-	QP
2	104.9033	28.22	-8.11	20.11	63.50	-43.39	-	-	QP
3	147.9214	38.11	-11.61	26.50	63.50	-37.00	-	-	QP
4	191.7450	33.06	-8.76	24.30	63.50	-39.20	-	-	QP
5	423.5403	31.47	-3.06	28.41	63.50	-35.09	-	-	QP
6	912.8619	33.89	4.06	37.95	63.50	-25.55	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

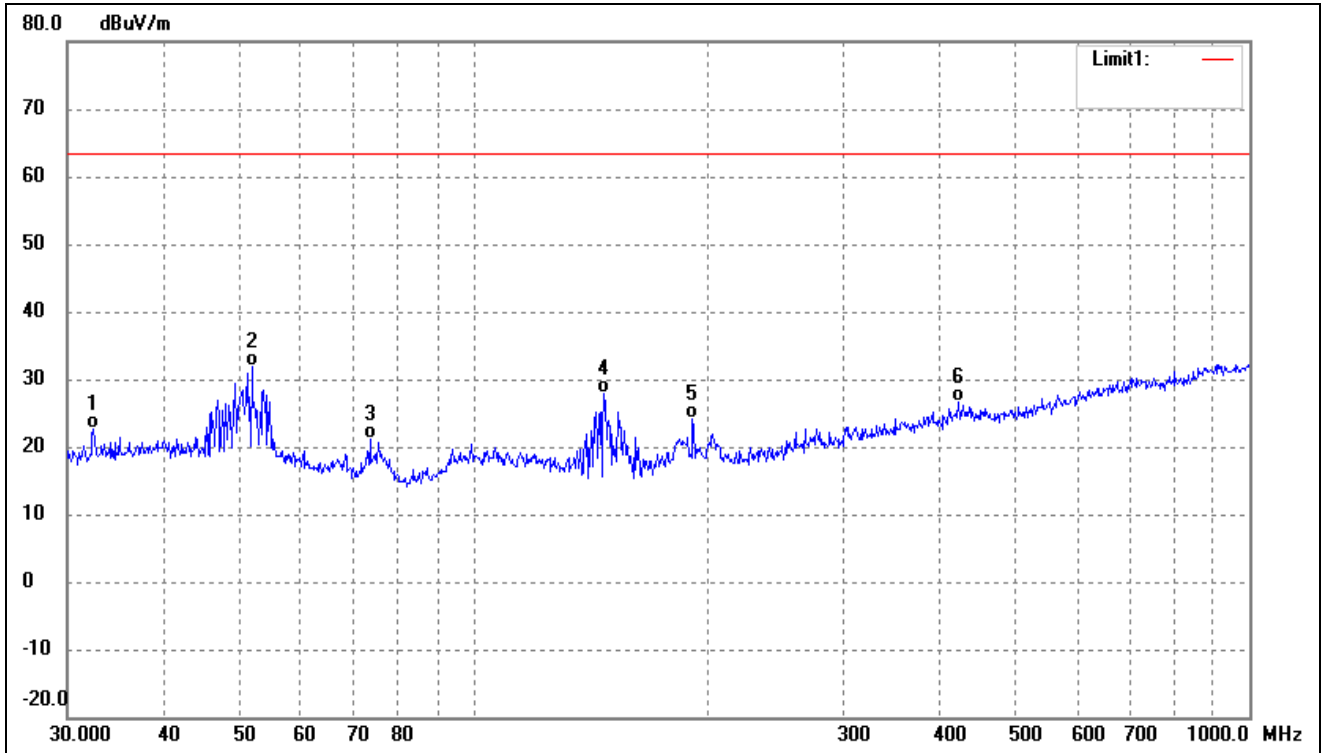


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	31.42	-8.79	22.63	63.50	-40.87	-	-	QP
2	51.8430	39.57	-7.64	31.93	63.50	-31.57	-	-	QP
3	73.6170	32.53	-11.39	21.14	63.50	-42.36	-	-	QP
4	147.4036	39.37	-11.60	27.77	63.50	-35.73	-	-	QP
5	191.7450	32.95	-8.76	24.19	63.50	-39.31	-	-	QP
6	422.0577	29.70	-3.08	26.62	63.50	-36.88	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

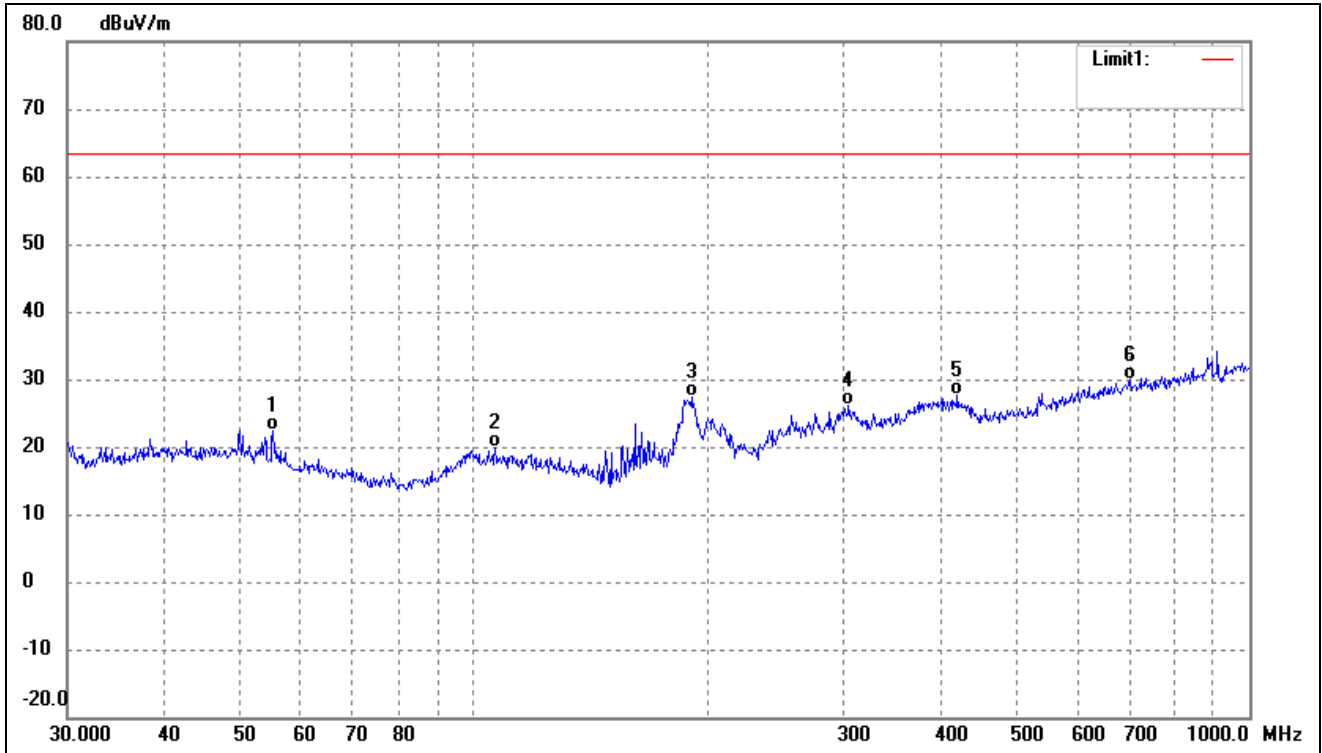


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.2207	30.57	-8.23	22.34	63.50	-41.16	-	-	QP
2	106.7587	28.00	-8.12	19.88	63.50	-43.62	-	-	QP
3	191.0738	36.16	-8.78	27.38	63.50	-36.12	-	-	QP
4	304.6099	31.03	-4.94	26.09	63.50	-37.41	-	-	QP
5	420.5803	30.62	-3.08	27.54	63.50	-35.96	-	-	QP
6	701.7610	28.56	1.38	29.94	63.50	-33.56	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

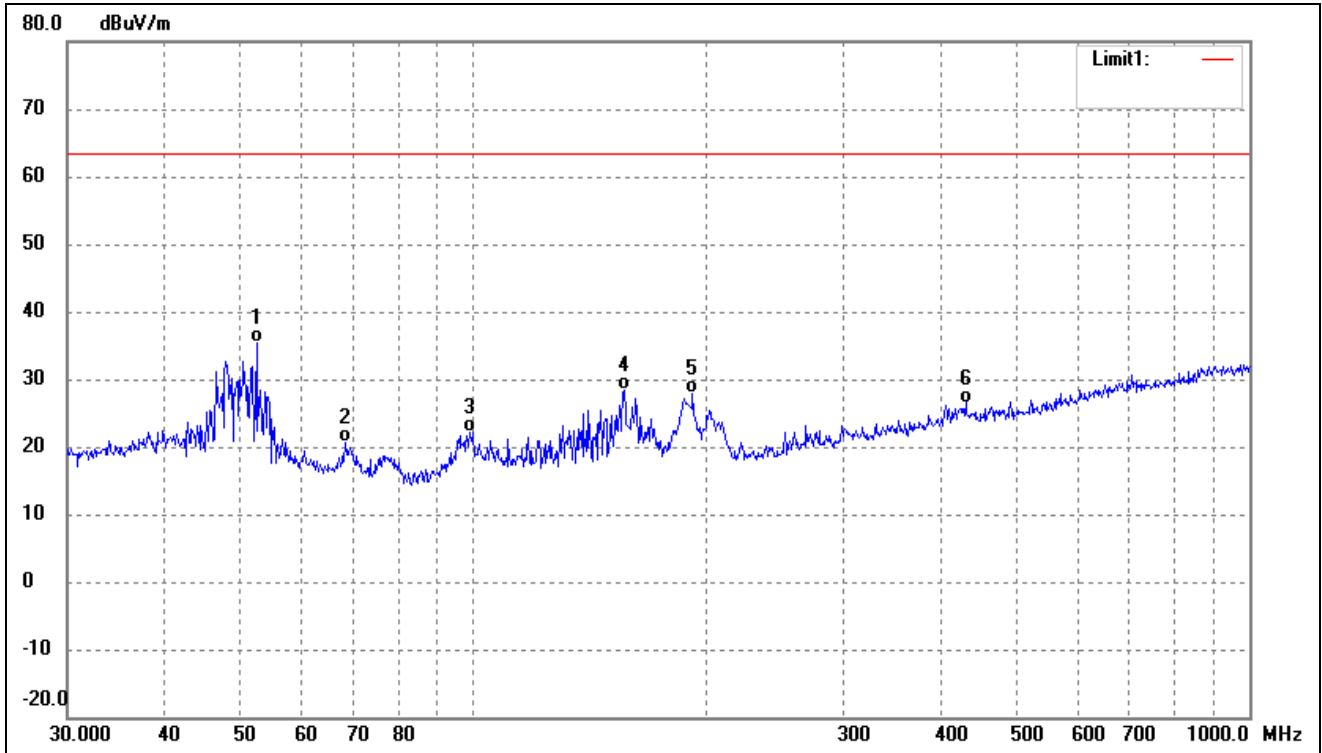


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.5753	43.20	-7.76	35.44	63.50	-28.06	-	-	QP
2	68.3908	31.34	-10.75	20.59	63.50	-42.91	-	-	QP
3	98.8326	30.61	-8.38	22.23	63.50	-41.27	-	-	QP
4	156.4578	39.64	-11.34	28.30	63.50	-35.20	-	-	QP
5	191.7450	36.75	-8.76	27.99	63.50	-35.51	-	-	QP
6	431.0316	29.47	-2.97	26.50	63.50	-37.00	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

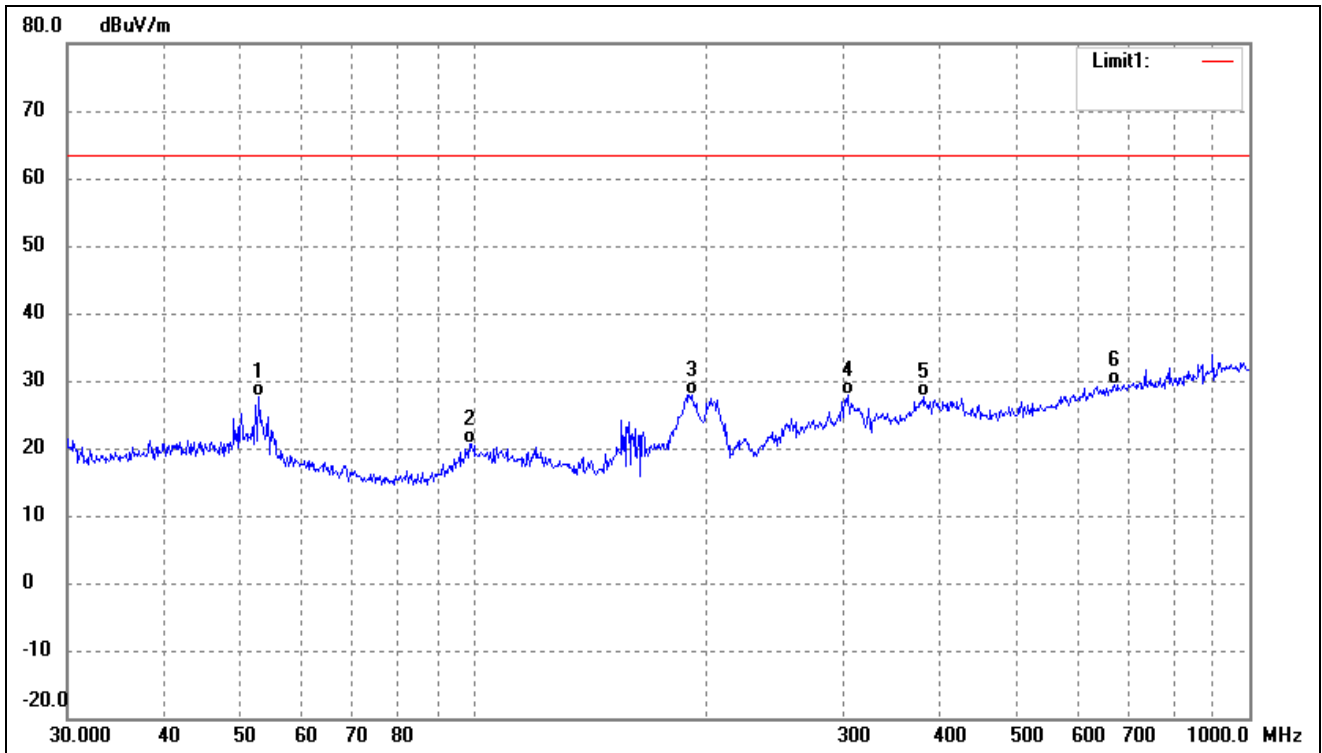

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.9453	35.39	-7.83	27.56	63.50	-35.94	-	-	QP
2	98.8326	28.93	-8.38	20.55	63.50	-42.95	-	-	QP
3	191.0738	36.78	-8.78	28.00	63.50	-35.50	-	-	QP
4	303.5437	32.92	-4.96	27.96	63.50	-35.54	-	-	QP
5	381.2487	31.37	-3.63	27.74	63.50	-35.76	-	-	QP
6	670.4893	28.56	0.90	29.46	63.50	-34.04	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

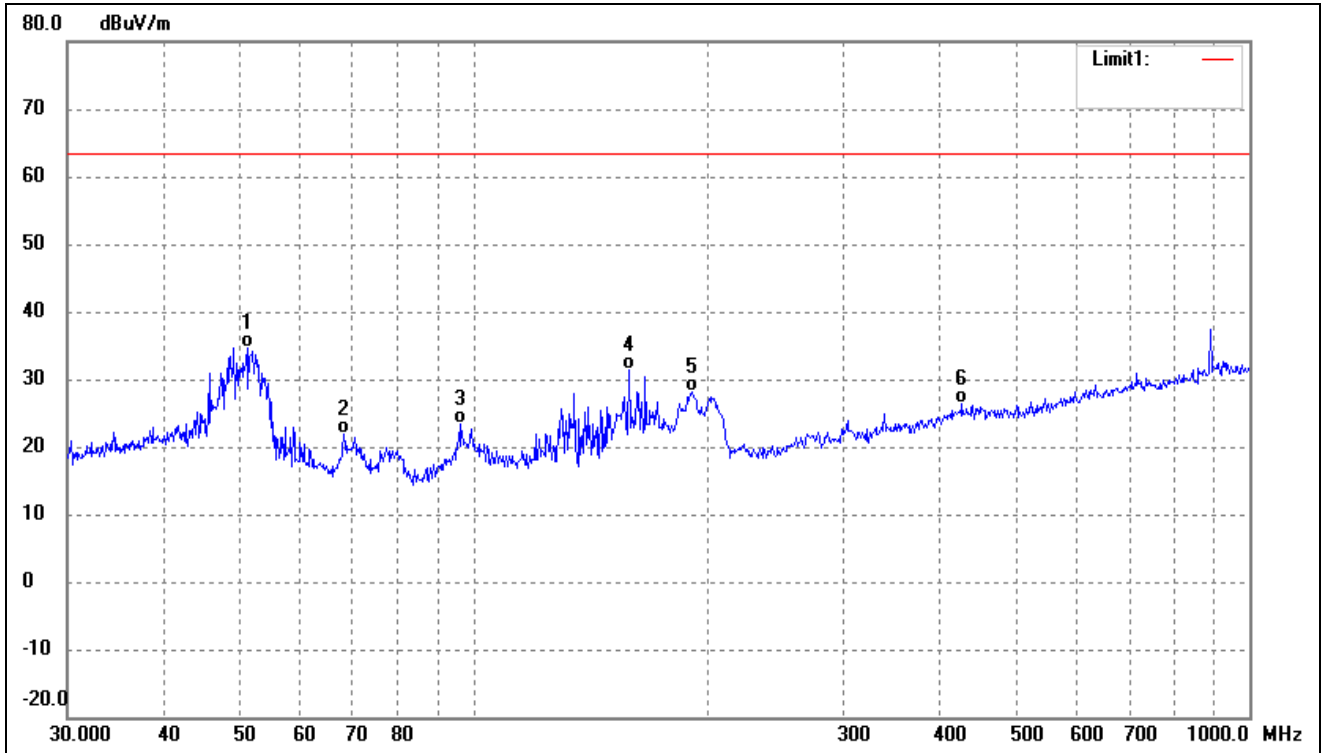

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	42.17	-7.51	34.66	63.50	-28.84	-	-	QP
2	68.1514	32.57	-10.70	21.87	63.50	-41.63	-	-	QP
3	96.0986	32.42	-9.15	23.27	63.50	-40.23	-	-	QP
4	158.6677	42.51	-11.23	31.28	63.50	-32.22	-	-	QP
5	191.0738	36.94	-8.78	28.16	63.50	-35.34	-	-	QP
6	426.5210	29.49	-3.03	26.46	63.50	-37.04	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****