

TEST REPORT

Reference No..... : WTX20X07050506W-2
FCC ID : A4X-WPC15-1TJNA
Applicant : CE LINK LIMITED
Address : Building M,LiCheng Technology Industrial Zone,GongHe Village,Shajing
Town,ShenZhen City,China
Product Name : Wireless Charge
Test Model. : WPC15-1TJNA
Standards : KDB 680106 D01 V03
Date of Receipt sample : Jul.29, 2020
Date of Test..... : Jul.29, 2020 to Aug.14, 2020
Date of Issue : Aug.14, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:

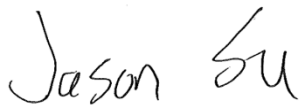

Jason Su / Project Engineer

Reviewed By:

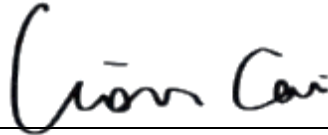

Lion Cai / RF Manager

Approved & Authorized By:



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST EQUIPMENT LIST AND DETAILS5

2. RF EXPOSURE TEST REPORT6
2.1 STANDARD APPLICABLE.....6
2.2 TEST CONDITIONS6
2.3 TEST PROCEDURE.....7
2.4 TEST RESULT.....7
2.4 TEST PHOTOS10

Report version

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00 | Aug.14, 2020 | Original |
| / | / | / |

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: CE LINK LIMITED
 Address of applicant: Building M,LiCheng Technology Industrial Zone,
 GongHe Village,ShaJing Town,ShenZhen City,China

Manufacturer: CE LINK LIMITED
 Address of manufacturer: Building M,LiCheng Technology Industrial Zone,
 GongHe Village,ShaJing Town,ShenZhen City,China

Factory#1: SuiChuan CE LINK LIMITED
 Address of factory: SuiChuan county industrial park east zone, Ji'an
 city, Jiangxi Province, China.

Factory#2: CE LINK VIETNAM LIMITED
 Address of factory: Lo FJ-25, Song Khe-Noi Hoang Industrial Zone, Noi
 Hoang Village, Yen Dung Town, Bac Giang
 Province, Vietnam.

| General Description of EUT | |
|--|-----------------|
| Product Name: | Wireless Charge |
| Trade Name: | CE-LINK |
| Model No.: | WPC15-1TJNA |
| Adding Model(s): | / |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> | |

| Technical Characteristics of EUT | |
|----------------------------------|--------------------------|
| Frequency Range: | 112~205kHz |
| Modulation Type: | ASK |
| Antenna Type: | Coil Antenna |
| Rated Voltage/ Current Input: | 5V/2A, 9V/2A, 12V/2A |
| Rated Voltage/ Current Output: | 5V/1A, 9V/1.1A, 12/1.25A |
| Rated Power: | 5W / 10W / 15W |

1.2 Test Equipment List and Details

| Description | Manufacturer | Model | Serial No. | Cal Date | Due Date |
|--------------------------|---------------------|--------------|-------------------|-----------------|-----------------|
| MPE Measuring Instrument | Narda | ELT-400 | M-0155/M-0170 | 2020-07-15 | 2021-07-14 |
| Broadband Field Meter | Narda | NBM-520 | D-1699 | 2020-06-21 | 2021-06-20 |

2. RF Exposure Test Report

2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposure | | | | |
| 0.3-3.0 | 614 | 1.63 | *100 | 6 |
| 3.0-30 | 1842/f | 4.89/f | *900/f ² | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1,500 | | | f/300 | 6 |
| 1,500-100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *100 | 30 |
| 1.34-30 | 824/f | 2.19/f | *180/f ² | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1,500 | | | f/1500 | 30 |
| 1,500-100,000 | | | 1.0 | 30 |

f = frequency in MHz * = Plane-wave equivalent power density

2.2 Test Conditions

| Test Mode | Description | Remark |
|------------------------------|-------------------|---------------------------------------|
| TM1 | Wireless Charging | Input DC5V/2A; Output:DC5V/1A |
| TM2 | Wireless Charging | Input DC9V/2A; Output:DC9V/1.1A |
| TM3 | Wireless Charging | Input DC12V/2A; Output:DC12V/1.25A |
| Measurement Distance: | | |
| | | 15 cm |

2.3 Test Procedure

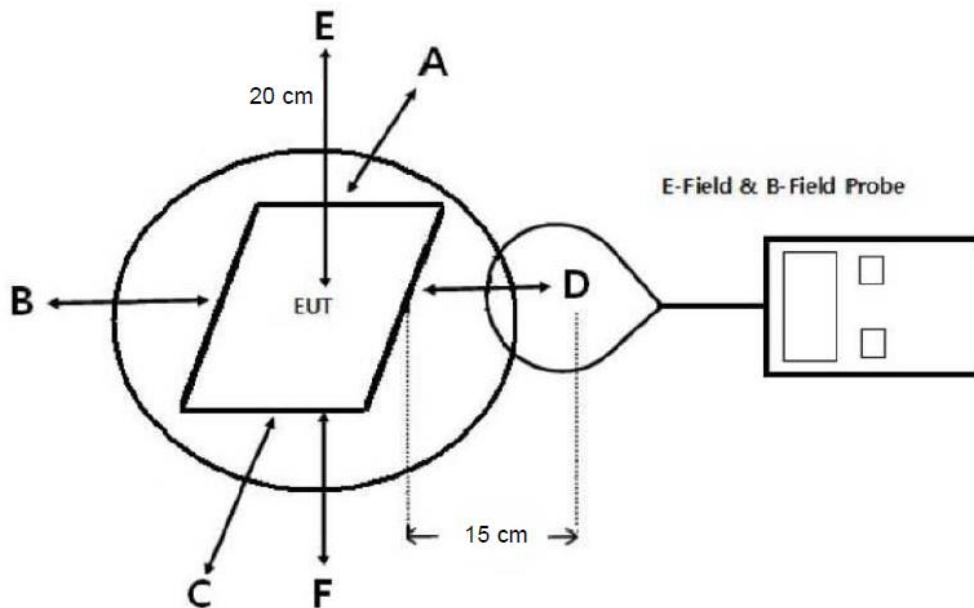

- The measurement probe was placed at test distance (15 cm for A, B, C, D, F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

2.4 Test Result

The EUT dose comply with item 5.2 of KDB 680106 D01V03

- Power transfer frequency is less than 1 MHz
Yes, the device operate in the frequency range from 112kHz to 205kHz.
- Output power from each primary coil is less than or equal to 15 watts
Yes, the maximum output power of the primary coil is equal to 15W.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
Yes, the client device includes only single primary coils.
- Client device is inserted in or placed directly in contact with the transmitter
Yes, Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, It is mobile exposure conditions only.

6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1, TM2 list, and the coils can't transmitted simultaneous.

Test Mode: TM1

| Electric Field Emissions | | | |
|---------------------------------|----------------------------|-------------------|------------------------|
| Test Position | Measure Value (V/m) | Limit(V/m) | 50% Limit (V/m) |
| Top | 51 | 614 | 307 |
| Bottom | 48 | 614 | 307 |
| Side 1 | 49 | 614 | 307 |
| Side 2 | 51 | 614 | 307 |
| Side 3 | 46 | 614 | 307 |
| Side 4 | 47 | 614 | 307 |
| Magnetic Field Emissions | | | |
| Test Position | Measure Value (A/m) | Limit(A/m) | 50% Limit (A/m) |
| Top | 0.29 | 1.63 | 0.815 |
| Bottom | 0.29 | 1.63 | 0.815 |
| Side 1 | 0.27 | 1.63 | 0.815 |
| Side 2 | 0.28 | 1.63 | 0.815 |
| Side 3 | 0.27 | 1.63 | 0.815 |
| Side 4 | 0.27 | 1.63 | 0.815 |


Test Mode: TM2

| Electric Field Emissions | | | |
|---------------------------------|----------------------------|-------------------|------------------------|
| Test Position | Measure Value (V/m) | Limit(V/m) | 50% Limit (V/m) |
| Top | 37 | 614 | 307 |
| Bottom | 39 | 614 | 307 |
| Side 1 | 36 | 614 | 307 |
| Side 2 | 37 | 614 | 307 |
| Side 3 | 36 | 614 | 307 |
| Side 4 | 35 | 614 | 307 |
| Magnetic Field Emissions | | | |
| Test Position | Measure Value (A/m) | Limit(A/m) | 50% Limit (A/m) |
| Top | 0.31 | 1.63 | 0.815 |
| Bottom | 0.32 | 1.63 | 0.815 |
| Side 1 | 0.32 | 1.63 | 0.815 |
| Side 2 | 0.35 | 1.63 | 0.815 |
| Side 3 | 0.34 | 1.63 | 0.815 |
| Side 4 | 0.34 | 1.63 | 0.815 |

Test Mode: TM3

| Electric Field Emissions | | | |
|---------------------------------|----------------------------|-------------------|------------------------|
| Test Position | Measure Value (V/m) | Limit(V/m) | 50% Limit (V/m) |
| Top | 36 | 614 | 307 |
| Bottom | 38 | 614 | 307 |
| Side 1 | 39 | 614 | 307 |
| Side 2 | 41 | 614 | 307 |
| Side 3 | 41 | 614 | 307 |
| Side 4 | 40 | 614 | 307 |
| Magnetic Field Emissions | | | |
| Test Position | Measure Value (A/m) | Limit(A/m) | 50% Limit (A/m) |
| Top | 0.35 | 1.63 | 0.815 |
| Bottom | 0.36 | 1.63 | 0.815 |
| Side 1 | 0.36 | 1.63 | 0.815 |
| Side 2 | 0.34 | 1.63 | 0.815 |
| Side 3 | 0.32 | 1.63 | 0.815 |
| Side 4 | 0.33 | 1.63 | 0.815 |

2.4 Test Photos

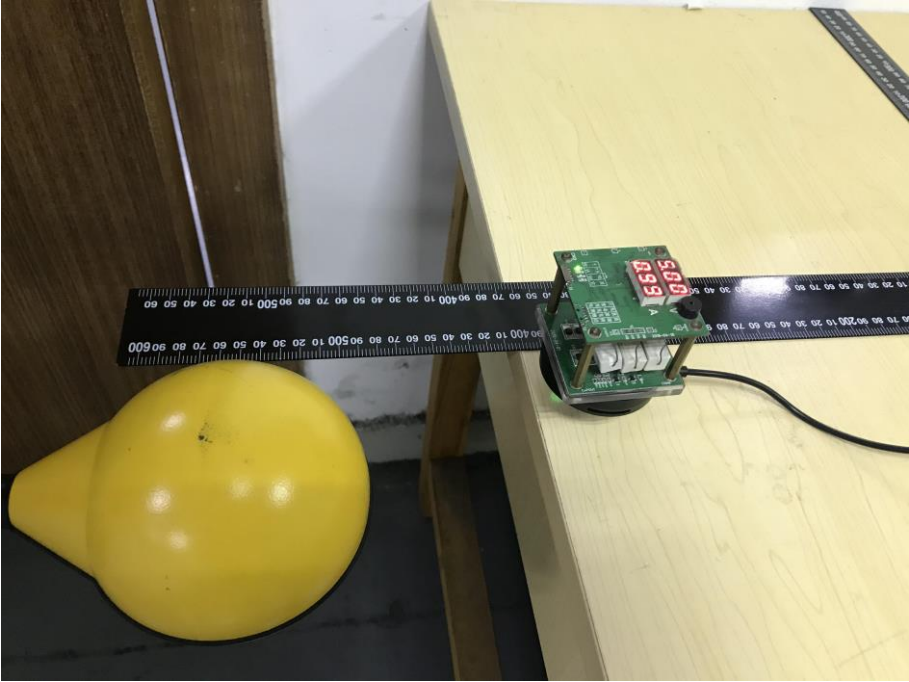

******* END OF REPORT *******