

TEST REPORT

Reference No..... : WTX23X06128658W001
FCC ID..... : A4X-WPC15-1TXNB
Applicant..... : CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Manufacturer..... : DONGGUAN CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Product Name..... : Magsafe Wireless Charger
Model No..... : WPC15-1TXNB
Standards..... : FCC Part 18
Date of Receipt sample.... : 2023-06-14
Date of Test..... : 2023-06-14 to 2023-07-13
Date of Issue..... : 2023-07-13
Test Report Form No. : WTX_Part 18W
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

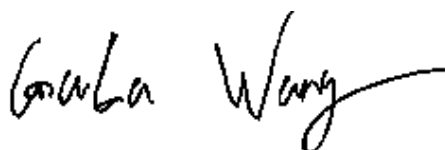

Gala Wang

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND OPERATION MODE6
1.6 MEASUREMENT UNCERTAINTY7
1.7 TEST EQUIPMENT LIST AND DETAILS8

2. SUMMARY OF TEST RESULTS9

3. CONDUCTED EMISSIONS10
3.1 STANDARD APPLICABLE.....10
3.2 TEST PROCEDURE.....10
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....10
3.4 ENVIRONMENTAL CONDITIONS10
3.5 TEST RECEIVER SETUP11
3.6 SUMMARY OF TEST RESULTS/PLOTS11

4. RADIATED EMISSIONS.....14
4.1 TEST PROCEDURE.....14
4.2 TEST RECEIVER SETUP15
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....15
4.4 ENVIRONMENTAL CONDITIONS16
4.5 SUMMARY OF TEST RESULTS/PLOTS16

APPENDIX PHOTOGRAPHS.....21

Report version

Version No.	Date of issue	Description
Rev.00	2023-07-13	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory 1#: SuiChuan CE LINK LIMITED
 Address of factory: SuiChuan county industrial park east zone, Ji'an city,
 Jiangxi province, China.

Factory 2#: CE LINK VIET NAM COMPANY LIMITED
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone, Viet
 Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Magsafe Wireless Charger
Trade Name:	CE-LINK
Model No.:	WPC15-1TXNB
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	127.7kHz/110~205kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Rated Voltage:	DC5V/DC9V
Rated Current:	3A/2.22A
Rated Power:	5W/7.5W/15W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 and FCC MP-5:1986, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	(Max Output15W)	AC120V 60Hz for adapter, Wireless Charging

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	XIAOMI	MDY-11-EX	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	0.6	Unshielded	Without Ferrite

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2023-02-25	2024-02-24
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-02-25	2024-02-24
Amplifier	HP	8447F	2805A0347 5	2023-02-25	2024-02-24
Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-22	2024-03-21
Amplifier	Agilent	8447D	2944A1017 9	2023-02-25	2024-02-24
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§18.307 (b)	Conducted Emission	Compliant
§18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

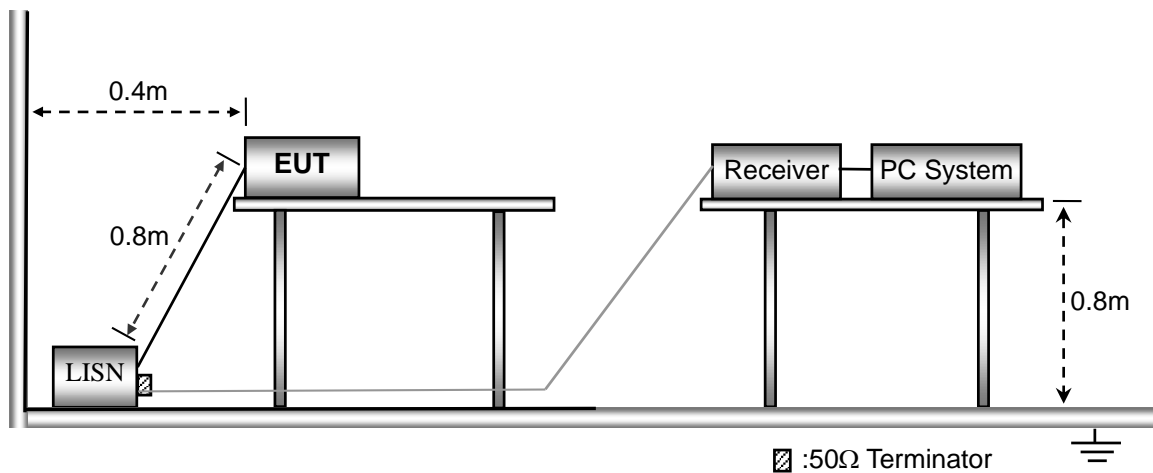

3.4 Environmental Conditions

Temperature:	23.5° C
Relative Humidity:	54%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

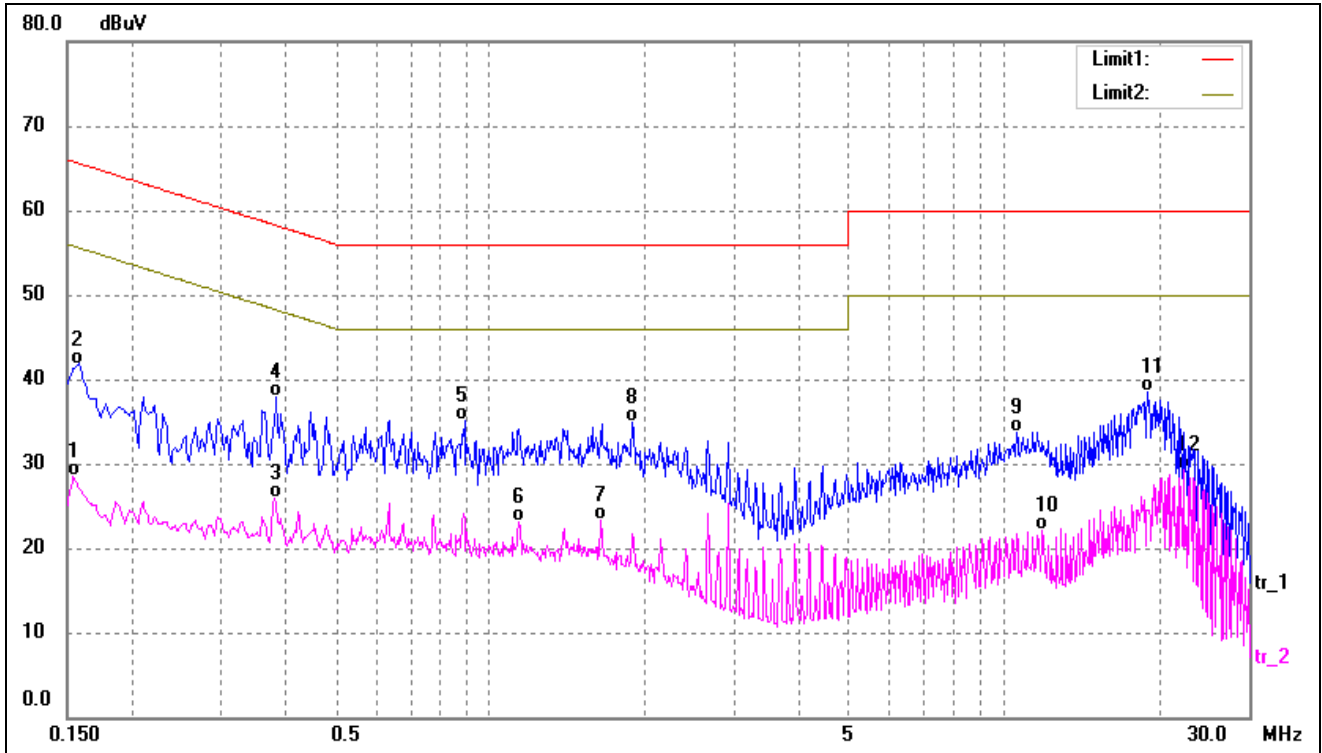

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	18.25	10.32	28.57	55.78	-27.21	AVG
2	0.1580	31.49	10.31	41.80	65.56	-23.76	QP
3	0.3780	15.72	10.23	25.95	48.32	-22.37	AVG
4*	0.3820	27.66	10.23	37.89	58.23	-20.34	QP
5	0.8900	24.89	10.16	35.05	56.00	-20.95	QP
6	1.1380	13.02	10.15	23.17	46.00	-22.83	AVG
7	1.6420	13.10	10.21	23.31	46.00	-22.69	AVG
8	1.8940	24.76	10.24	35.00	56.00	-21.00	QP
9	10.6059	23.44	10.34	33.78	60.00	-26.22	QP
10	11.8700	11.81	10.31	22.12	50.00	-27.88	AVG
11	19.0580	28.17	10.34	38.51	60.00	-21.49	QP
12	22.3500	18.86	10.37	29.23	50.00	-20.77	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

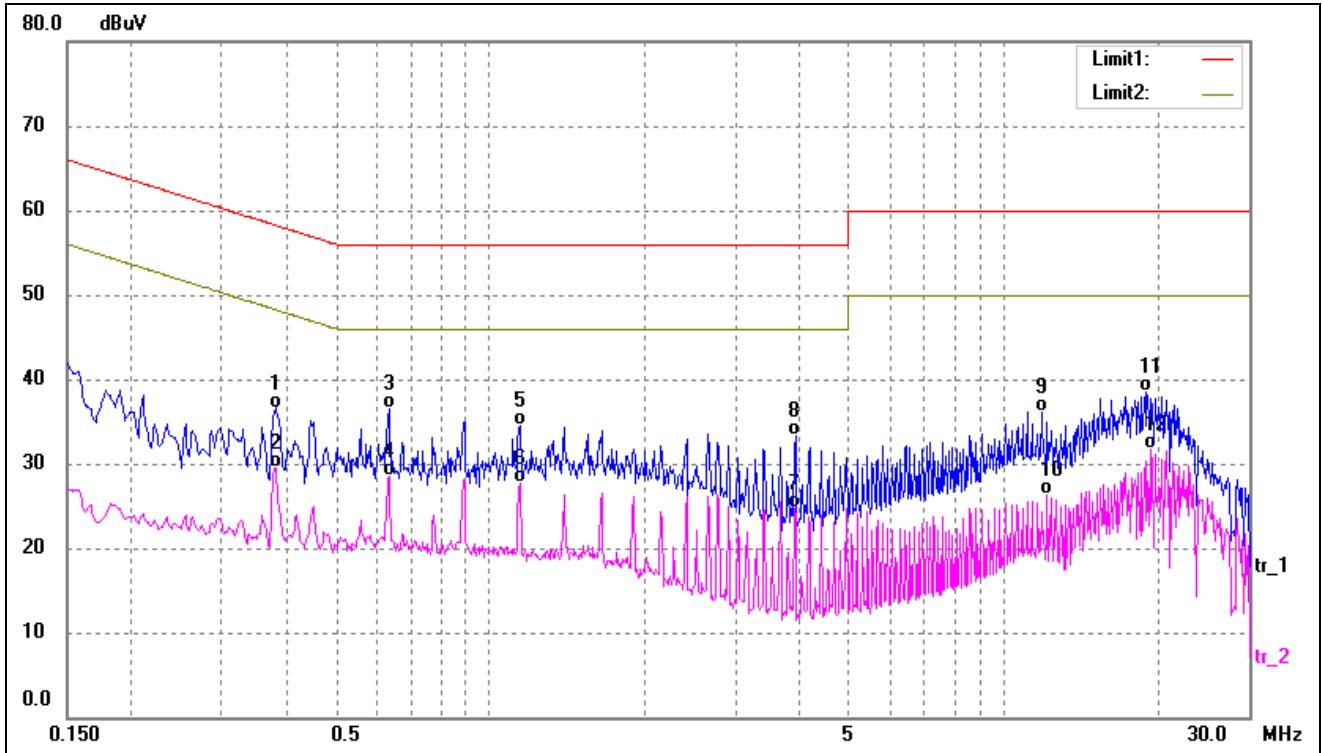

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3820	26.37	10.23	36.60	58.23	-21.63	QP
2	0.3820	19.32	10.23	29.55	48.23	-18.68	AVG
3	0.6340	26.37	10.20	36.57	56.00	-19.43	QP
4*	0.6340	18.33	10.20	28.53	46.00	-17.47	AVG
5	1.1420	24.43	10.15	34.58	56.00	-21.42	QP
6	1.1420	17.47	10.15	27.62	46.00	-18.38	AVG
7	3.9140	14.46	10.30	24.76	46.00	-21.24	AVG
8	3.9300	23.01	10.30	33.31	56.00	-22.69	QP
9	11.8580	25.79	10.31	36.10	60.00	-23.90	QP
10	12.1260	15.94	10.31	26.25	50.00	-23.75	AVG
11	19.0020	28.07	10.34	38.41	60.00	-21.59	QP
12	19.2580	21.35	10.36	31.71	50.00	-18.29	AVG


4. Radiated Emissions

4.1 Test Procedure


The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

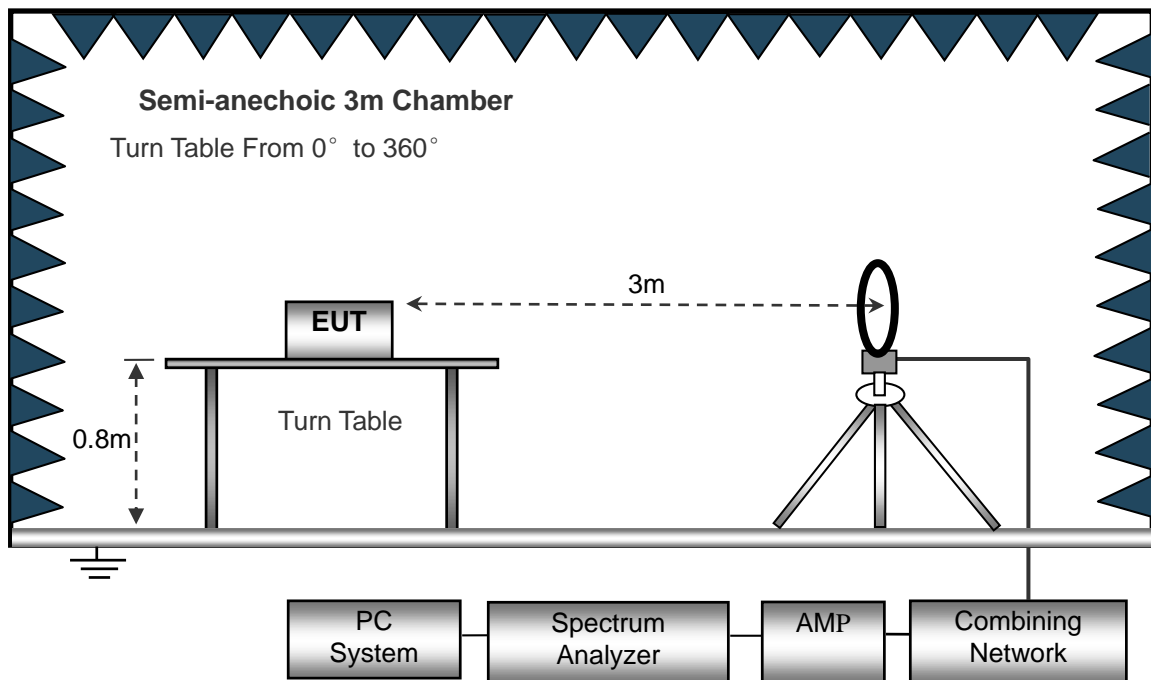

The test setup for emission measurement from 30 MHz to 1 GHz..

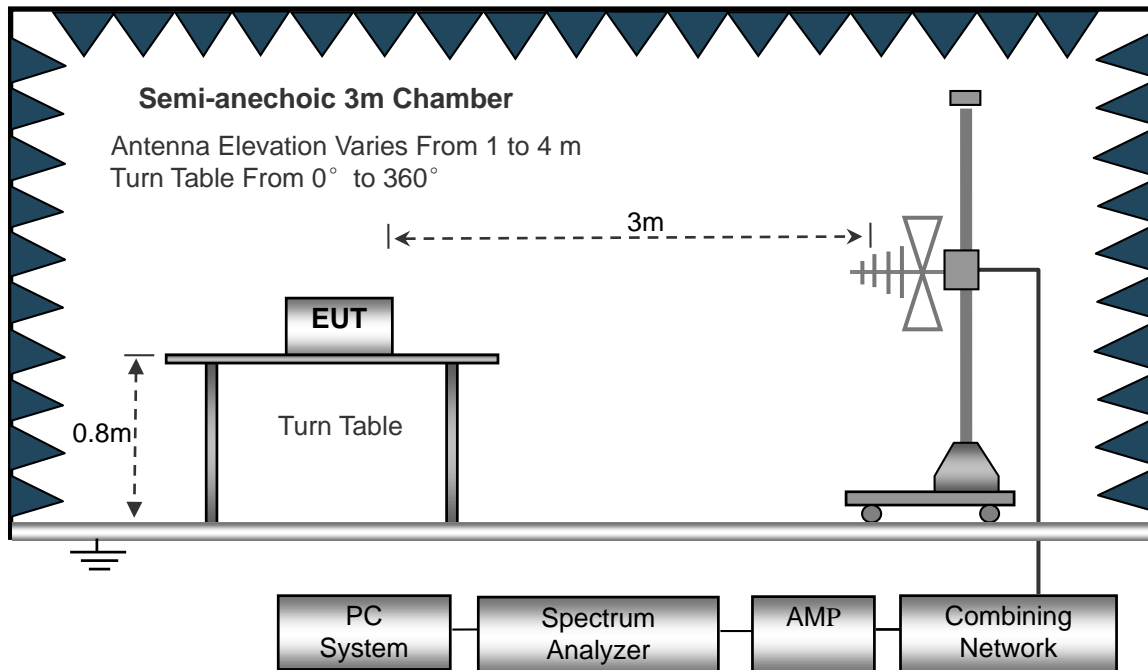

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$


4.4 Environmental Conditions

Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Plot of Radiated Emissions Test Data (Below 30MHz)

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

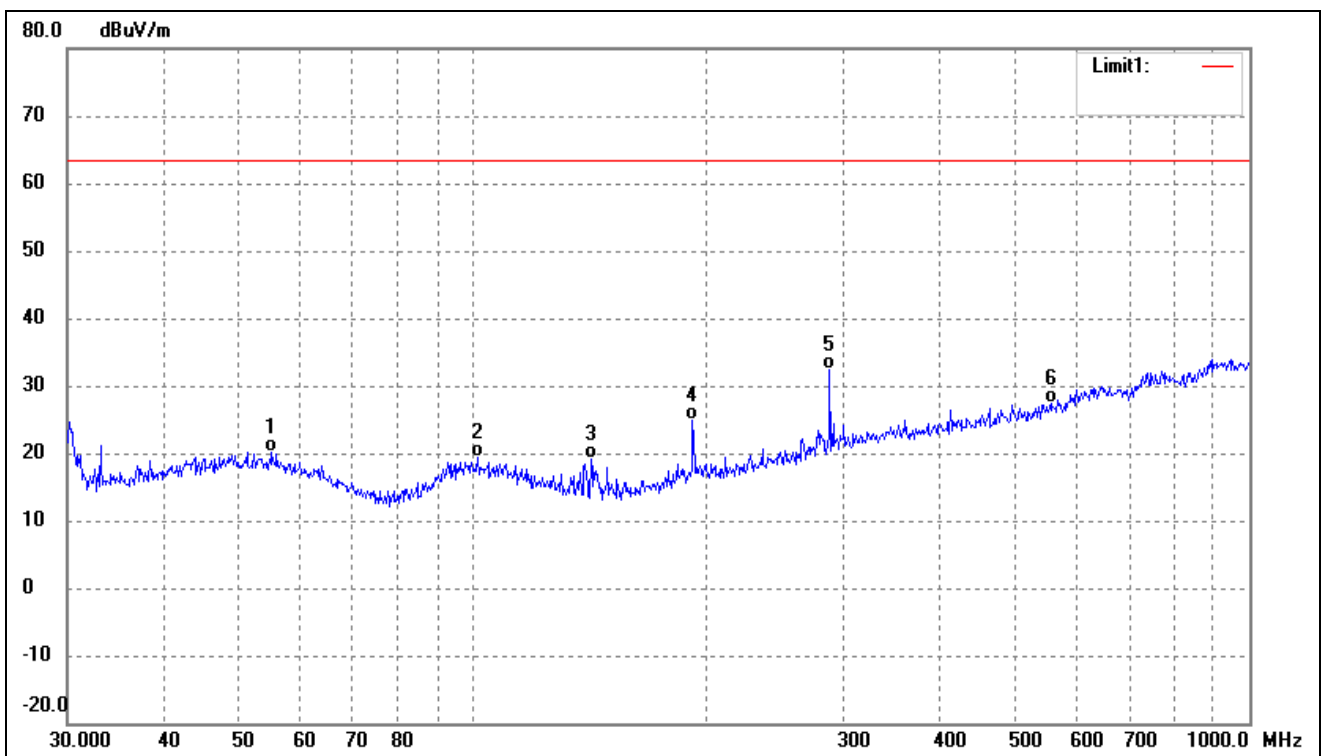


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.0274	27.77	-7.62	20.15	63.50	-43.35	-	-	QP
2	101.2885	27.89	-8.53	19.36	63.50	-44.14	-	-	QP
3	141.8262	30.93	-11.82	19.11	63.50	-44.39	-	-	QP
4	191.7450	33.26	-8.47	24.79	63.50	-38.71	-	-	QP
5	287.9904	37.51	-5.01	32.50	63.50	-31.00	-	-	QP
6	554.8254	27.41	-0.07	27.34	63.50	-36.16	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

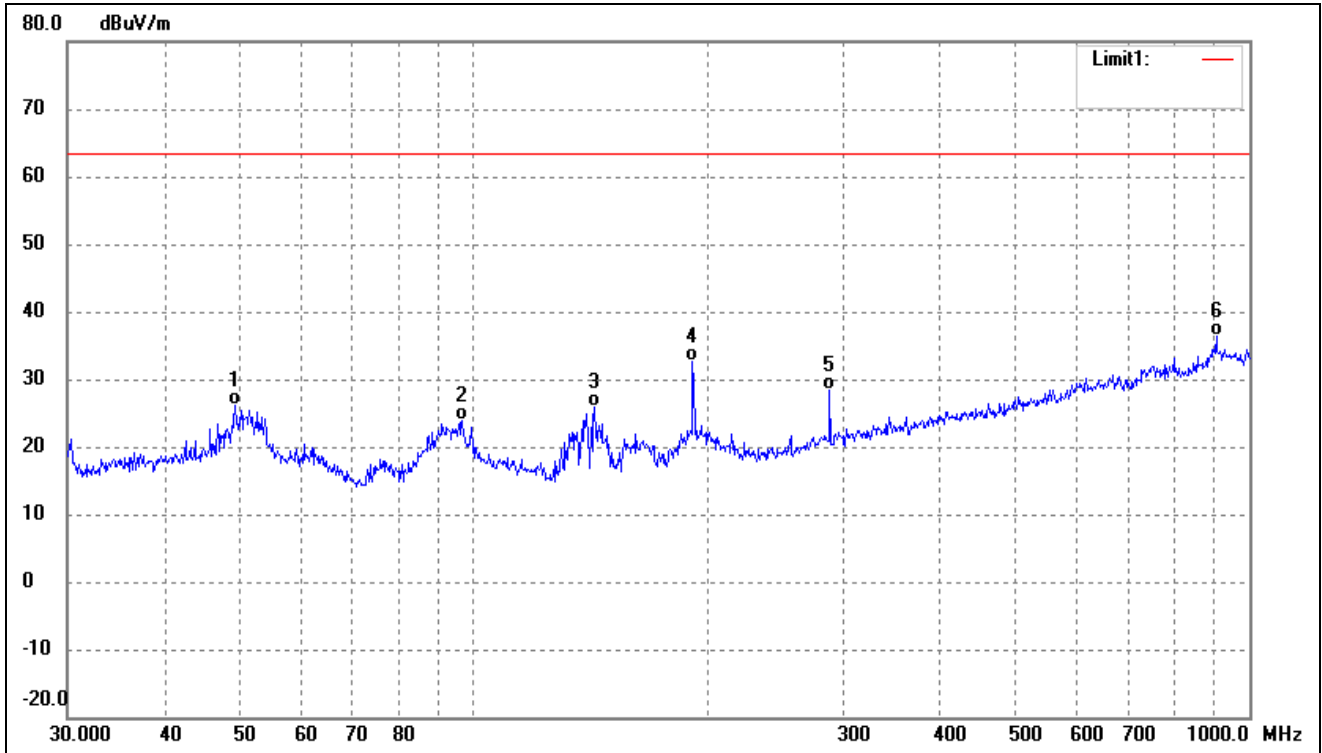

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.3594	33.40	-7.37	26.03	63.50	-37.47	-	-	QP
2	96.7749	32.93	-9.07	23.86	63.50	-39.64	-	-	QP
3	143.3261	37.62	-11.82	25.80	63.50	-37.70	-	-	QP
4	191.7450	41.15	-8.47	32.68	63.50	-30.82	-	-	QP
5	287.9904	33.32	-5.01	28.31	63.50	-35.19	-	-	QP
6	906.4824	30.31	6.14	36.45	63.50	-27.05	-	-	QP


Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

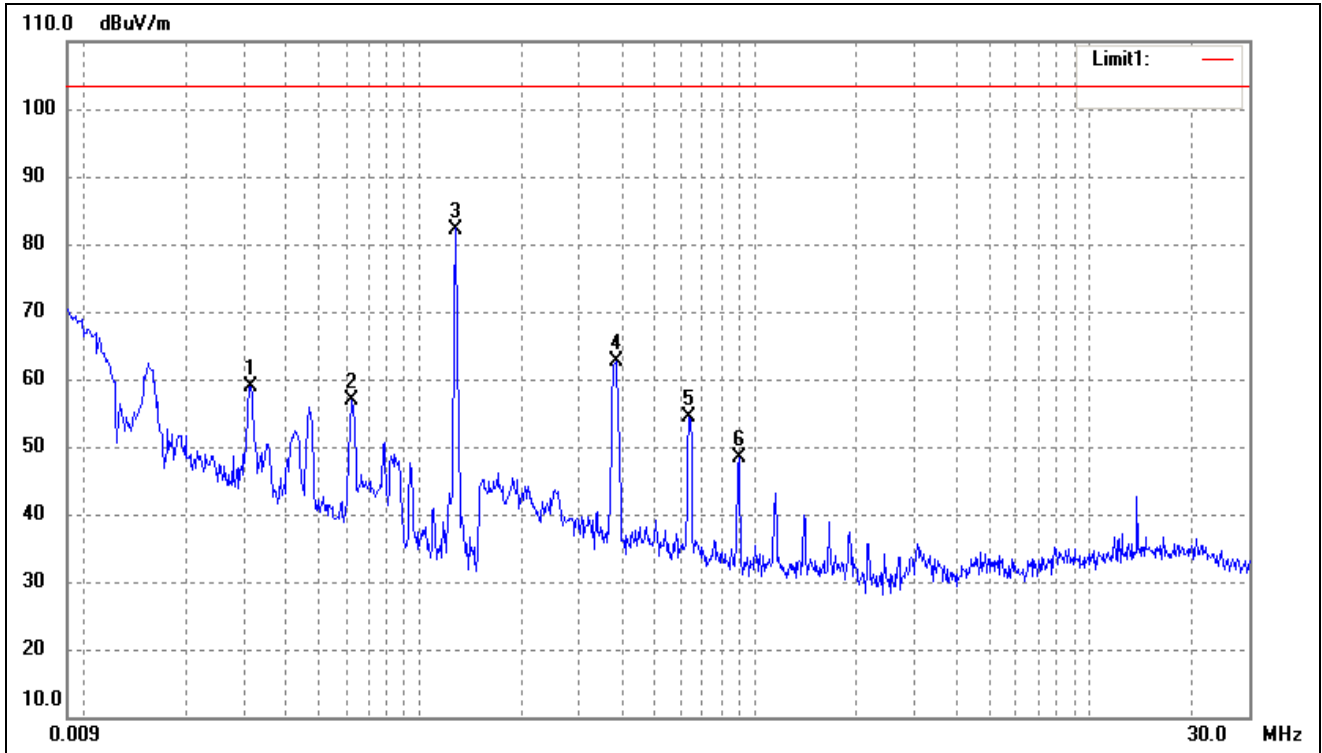

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0314	64.84	-6.02	58.82	103.50	-44.68	-	-	peak
2	0.0625	61.94	-5.01	56.93	103.50	-46.57	-	-	peak
3	0.1278	87.38	-5.13	82.25	103.50	-21.25	-	-	peak
4	0.3832	70.40	-7.83	62.57	103.50	-40.93	-	-	peak
5	0.6372	61.30	-7.03	54.27	103.50	-49.23	-	-	peak
6	0.8944	54.68	-6.41	48.27	103.50	-55.23	-	-	peak


Plot of Radiated Emissions Test Data (Above 30MHz)

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

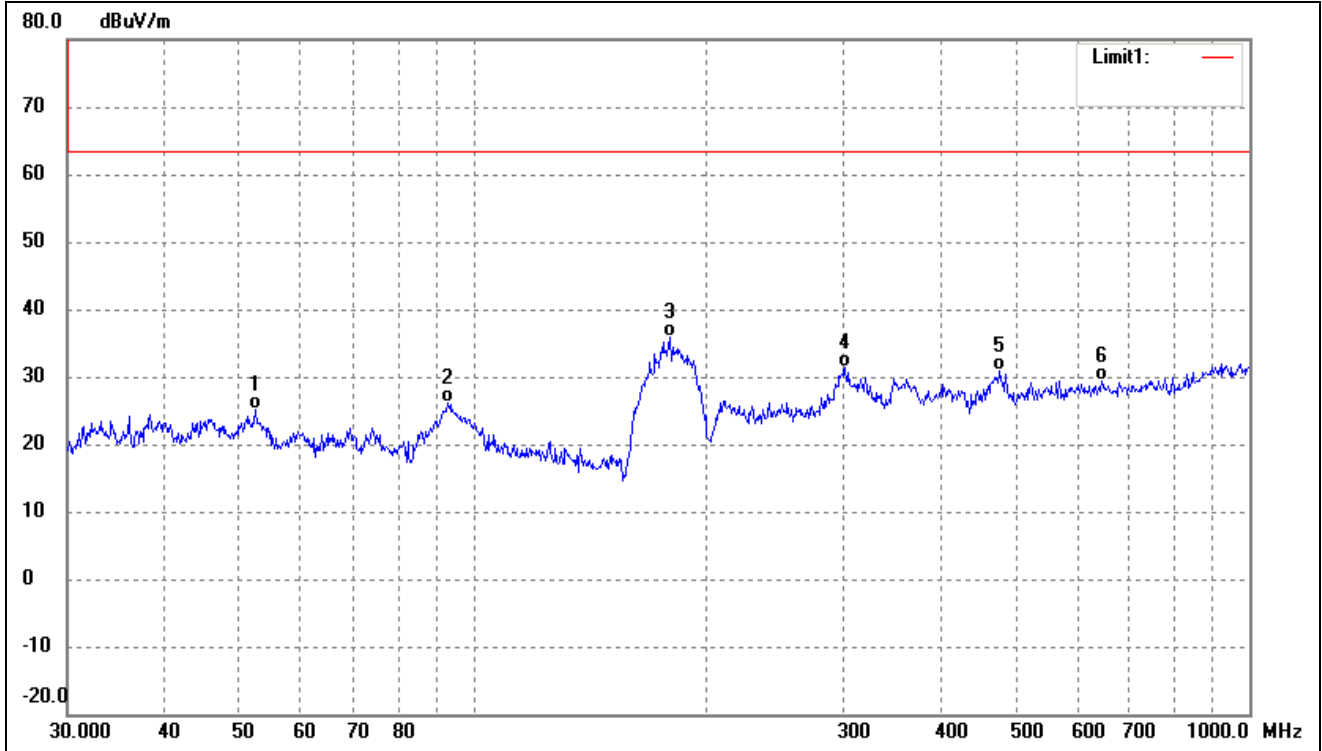

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.3913	37.40	-12.20	25.20	63.50	-38.30	-	-	QP
2	92.7872	40.63	-14.51	26.12	63.50	-37.38	-	-	QP
3	179.3864	50.23	-14.35	35.88	63.50	-27.62	-	-	QP
4	301.4224	40.30	-8.92	31.38	63.50	-32.12	-	-	QP
5	477.1694	35.64	-4.74	30.90	63.50	-32.60	-	-	QP
6	645.1195	31.81	-2.33	29.48	63.50	-34.02	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

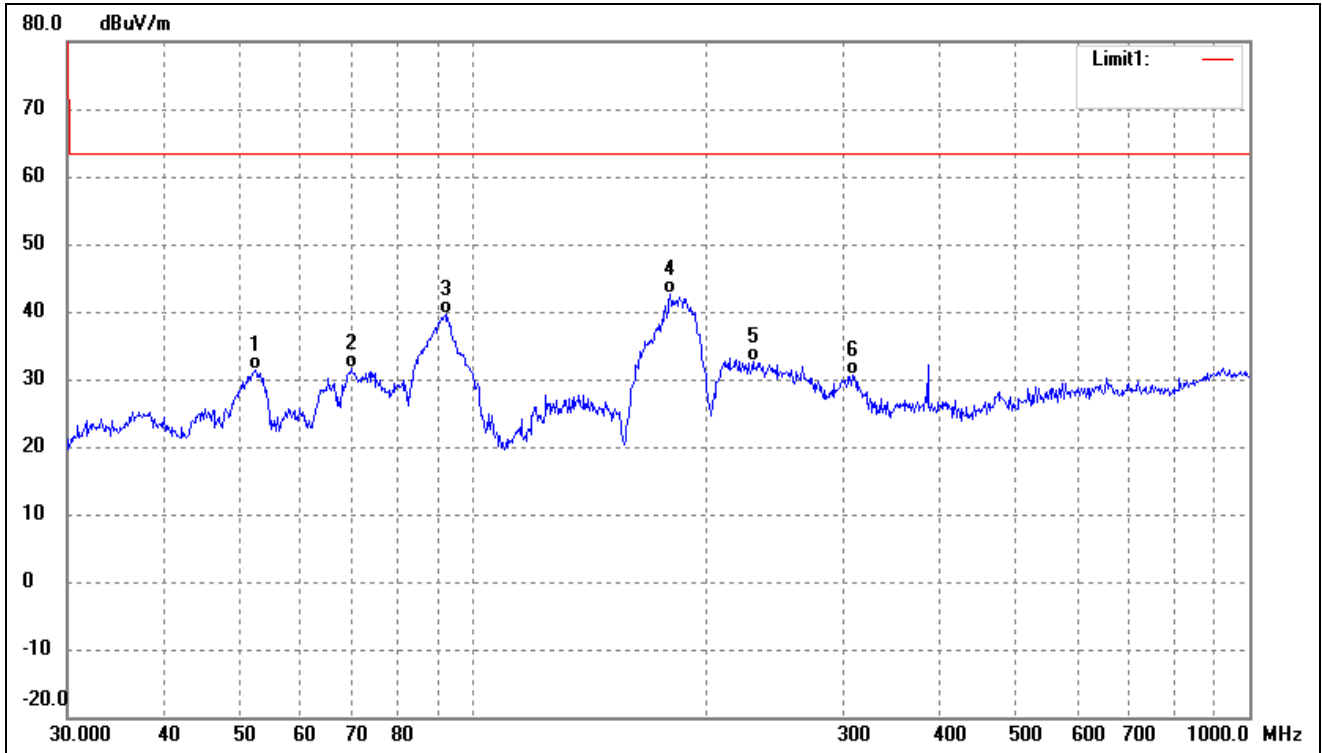

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.3912	43.54	-12.20	31.34	63.50	-32.16	-	-	QP
2	69.6005	46.13	-14.58	31.55	63.50	-31.95	-	-	QP
3	92.1388	54.30	-14.61	39.69	63.50	-23.81	-	-	QP
4	179.3863	57.09	-14.35	42.74	63.50	-20.76	-	-	QP
5	229.2931	44.53	-11.93	32.60	63.50	-30.90	-	-	QP
6	308.9126	39.51	-8.94	30.57	63.50	-32.93	-	-	QP

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****