

TEST REPORT

Reference No..... : WTX20X07044539W-1
FCC ID : A4X-WPC10-3XJNB
Applicant : CE LINK LIMITED
Address : Building M,LiCheng Technology Industrial Zone,GongHe Village,ShaJing
Town,ShenZhen City,China
Product Name : Wireless charger
Test Model. : WPC10-3XJNB
Standards : FCC Part 18
Date of Receipt sample : Jul.10, 2020
Date of Test..... : Jul.10, 2020 to Aug.27, 2020
Date of Issue : Aug.27, 2020
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Jason Su / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. CONDUCTED EMISSIONS	9
3.1 STANDARD APPLICABLE.....	9
3.2 TEST PROCEDURE.....	9
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	9
3.4 ENVIRONMENTAL CONDITIONS	9
3.5 TEST RECEIVER SETUP	10
3.6 SUMMARY OF TEST RESULTS/PLOTS	10
4. RADIATED EMISSIONS.....	15
4.1 TEST PROCEDURE.....	15
4.2 TEST RECEIVER SETUP	17
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
4.4 ENVIRONMENTAL CONDITIONS	17
4.5 SUMMARY OF TEST RESULTS/PLOTS	17

Report version

Version No.	Date of issue	Description
Rev.00	Aug.27, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: CE LINK LIMITED
Address of applicant: Building M,LiCheng Technology Industrial Zone,
GongHe Village,ShaJing Town,ShenZhen City,China

Manufacturer: CE LINK LIMITED
Address of manufacturer: Building M,LiCheng Technology Industrial Zone,
GongHe Village,ShaJing Town,ShenZhen City,China

Factory#1: SuiChuan CE LINK LIMITED
Address of factory: SuiChuan county industrial park east zone, Ji'an
city, Jiangxi Province, China.

Factory#2: CE LINK VIETNAM LIMITED
Address of factory: Lo FJ-25, Song Khe-Noi Hoang Industrial Zone, Noi
Hoang Village, Yen Dung Town,Bac Giang Province,
Vietnam.

General Description of EUT	
Product Name:	Wireless charger
Trade Name:	CE-LINK
Model No.:	WPC10-3XJNB
Adding Model(s):	/
Power Adapter:	A241-1202000U Input: AC100-240V, 50/60Hz, 0.8A, Output: DC12V, 2000mA
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz
Antenna Type:	Coil Antenna
Rated Voltage:	Input: DC12V Output: DC 5V/ DC 9V
Rated Current:	1A / 1.1A
Rated Power:	Wireless output: 5W / 10W

1.2 Test Standards

The tests were performed according to following standards:

FCC Part 18 Subpart C: Industrial, Scientific, and medical medical equipment.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	/	Input DC12V/2A; Output:DC5V/1A)
TM2	Wireless Charging	/	Input DC12V/2A; Output:DC9V/1.1A

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 18.307 (b)	Conducted Emission	Compliant
§ 18.305 (b)	Radiated Emission	Compliant

3. Conducted Emissions

3.1 Standard Applicable

According to FCC 18.307(b), the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables:


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

3.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.307 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

3.3 Basic Test Setup Block Diagram

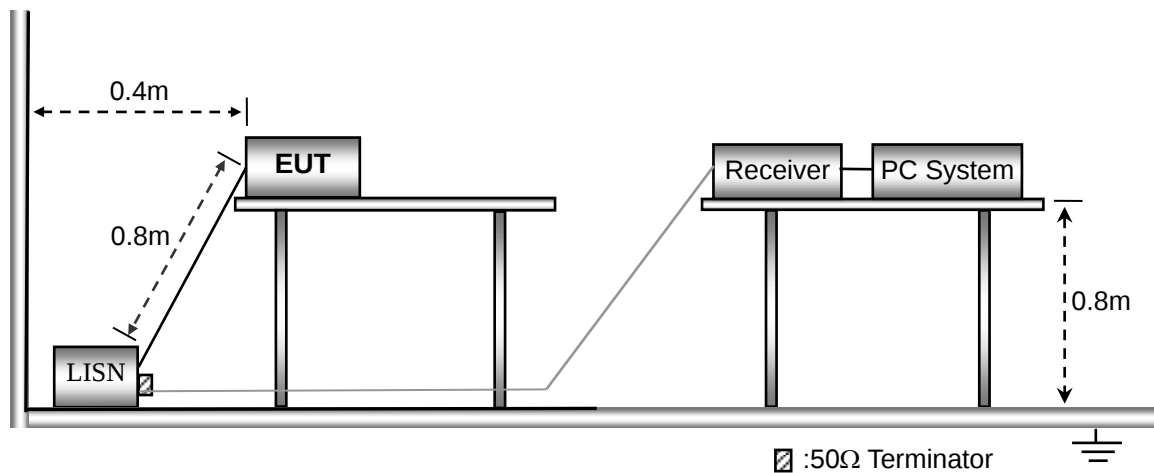

3.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	60%
ATM Pressure:	1016 mbar


3.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


3.6 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

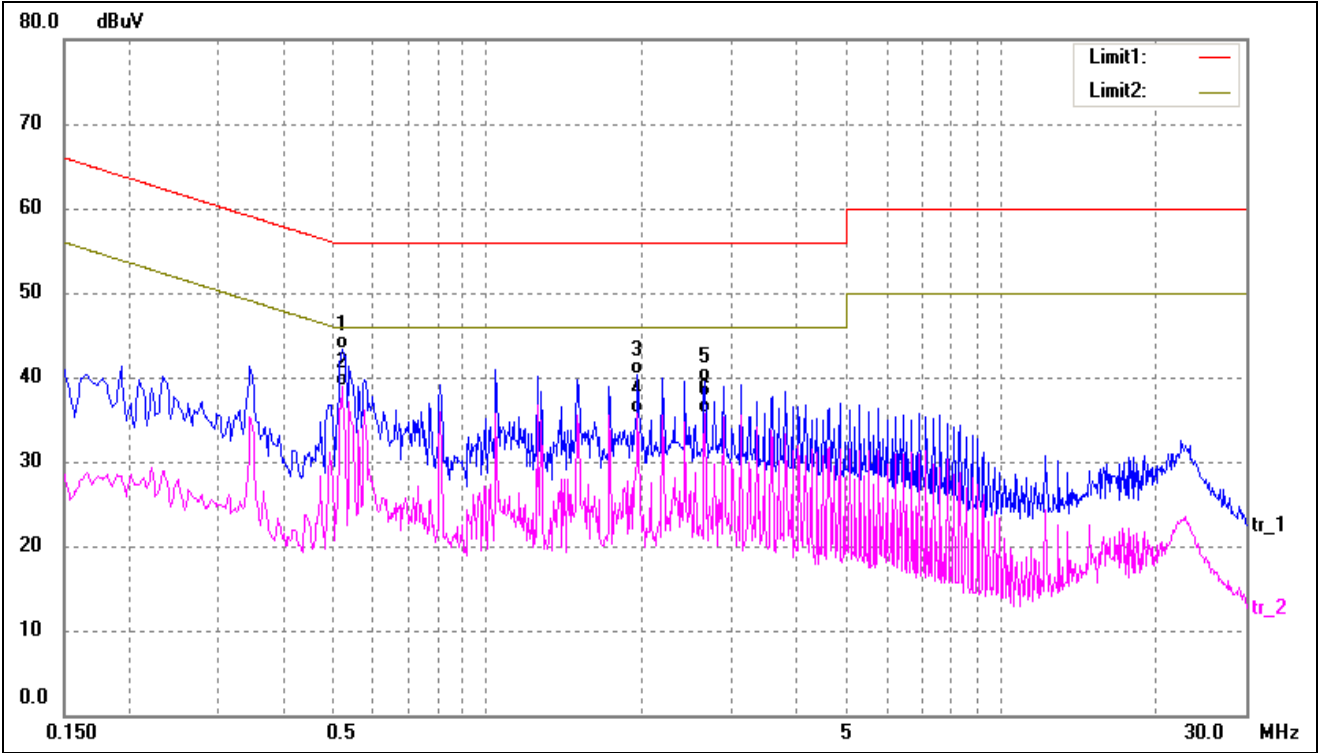


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.5220	33.16	10.22	43.38	56.00	-12.62	QP
2*	0.5220	28.71	10.22	38.93	46.00	-7.07	AVG
3	1.9660	29.98	10.29	40.27	56.00	-15.73	QP
4	1.9660	25.44	10.29	35.73	46.00	-10.27	AVG
5	2.6620	29.26	10.28	39.54	56.00	-16.46	QP
6	2.6620	25.46	10.28	35.74	46.00	-10.26	AVG

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

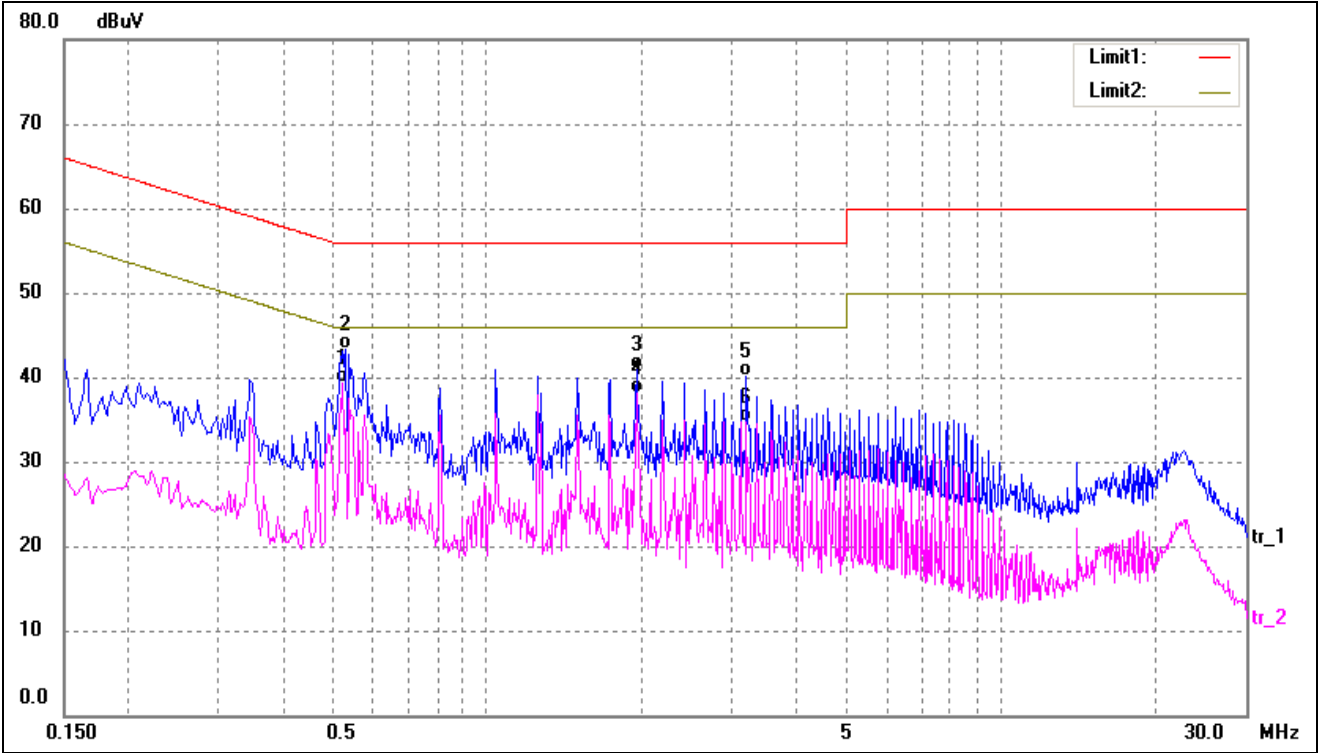


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.5220	29.02	10.22	39.24	46.00	-6.76	AVG
2	0.5300	33.02	10.22	43.24	56.00	-12.76	QP
3	1.9500	30.67	10.28	40.95	56.00	-15.05	QP
4	1.9500	27.88	10.28	38.16	46.00	-7.84	AVG
5	3.2060	29.84	10.27	40.11	56.00	-15.89	QP
6	3.2060	24.41	10.27	34.68	46.00	-11.32	AVG

Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

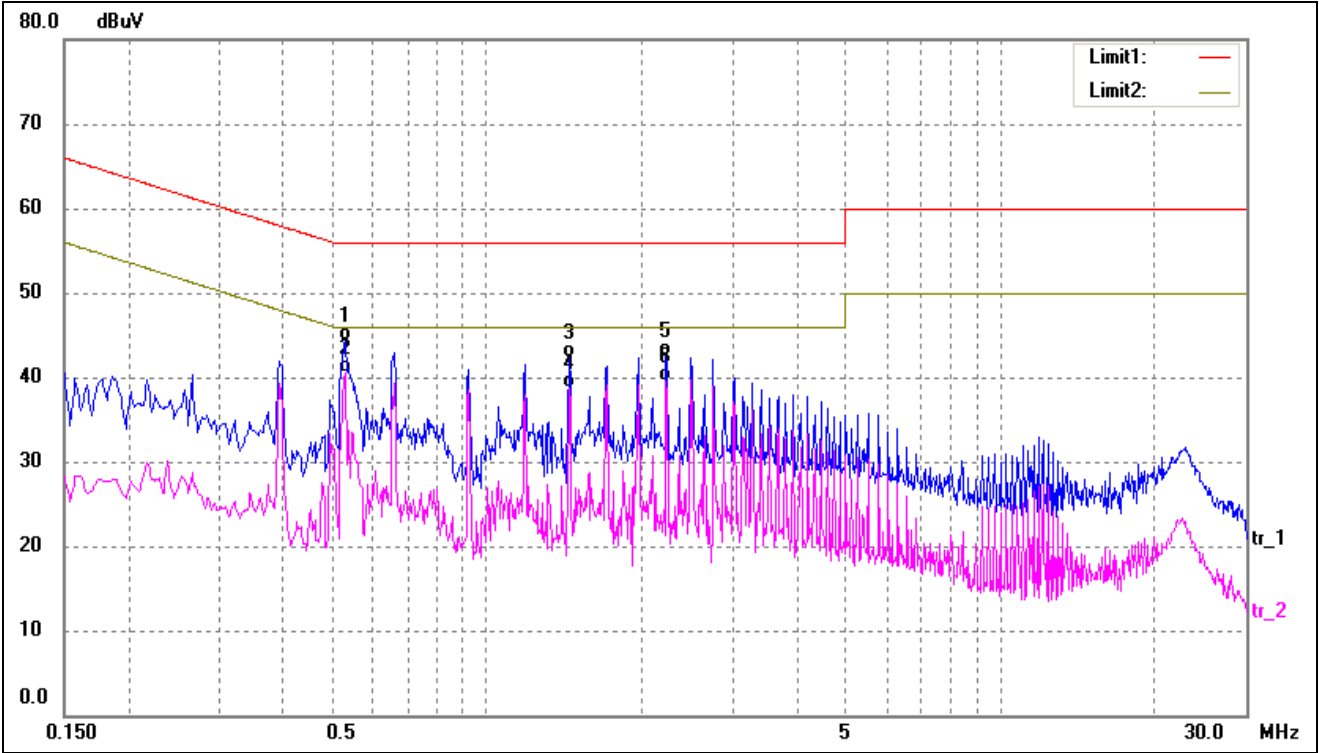

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.5300	34.05	10.22	44.27	56.00	-11.73	QP
2*	0.5300	30.21	10.22	40.43	46.00	-5.57	AVG
3	1.4460	32.08	10.23	42.31	56.00	-13.69	QP
4	1.4460	28.54	10.23	38.77	46.00	-7.23	AVG
5	2.2340	32.25	10.29	42.54	56.00	-13.46	QP
6	2.2340	29.29	10.29	39.58	46.00	-6.42	AVG

Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

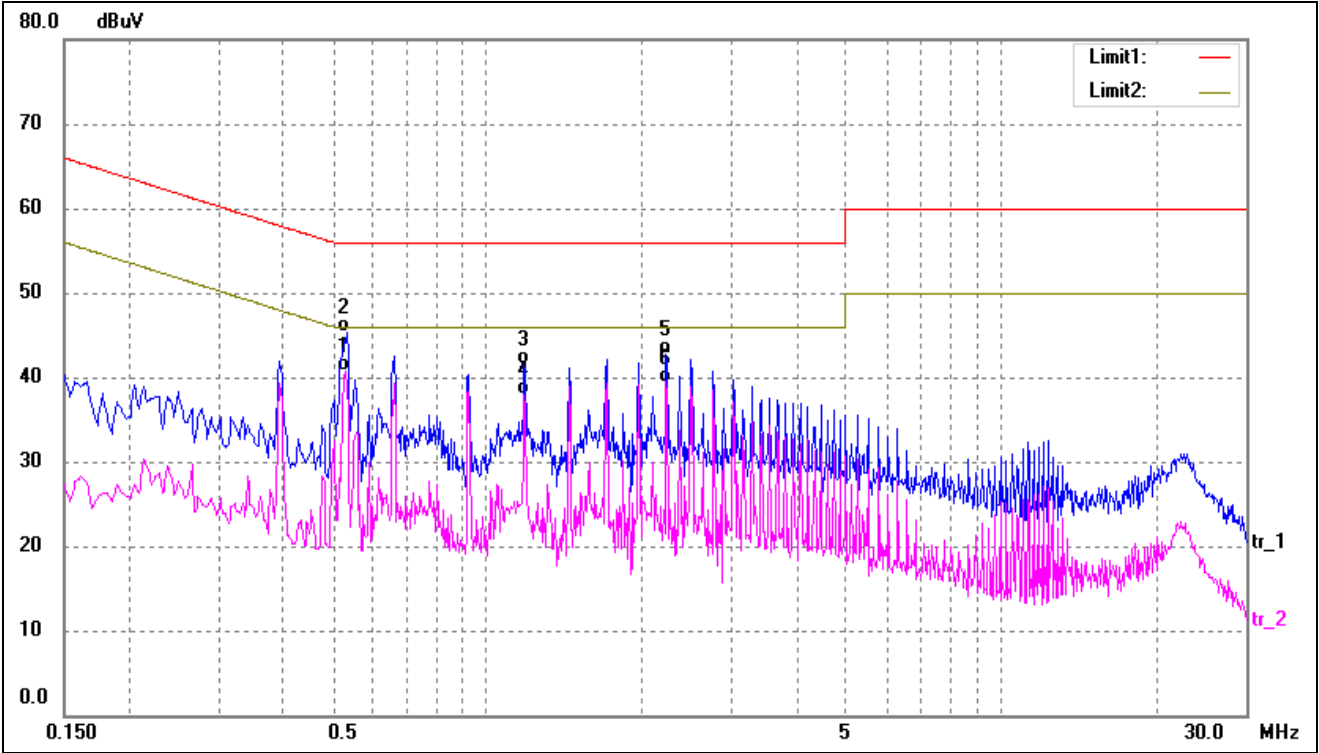

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.5300	30.49	10.22	40.71	46.00	-5.29	AVG
2	0.5340	35.01	10.22	45.23	56.00	-10.77	QP
3	1.1820	31.26	10.22	41.48	56.00	-14.52	QP
4	1.1820	27.71	10.22	37.93	46.00	-8.07	AVG
5	2.2340	32.47	10.29	42.76	56.00	-13.24	QP
6	2.2340	29.11	10.29	39.40	46.00	-6.60	AVG

4. Radiated Emissions


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

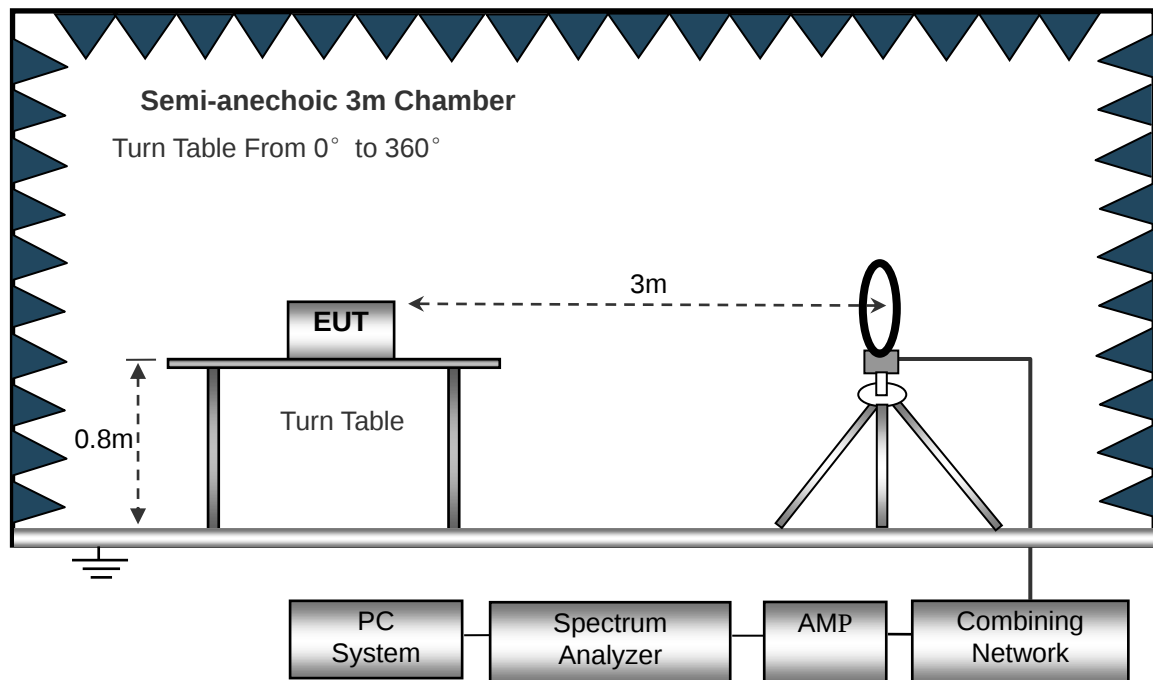

The test setup for emission measurement from 30 MHz to 1 GHz..

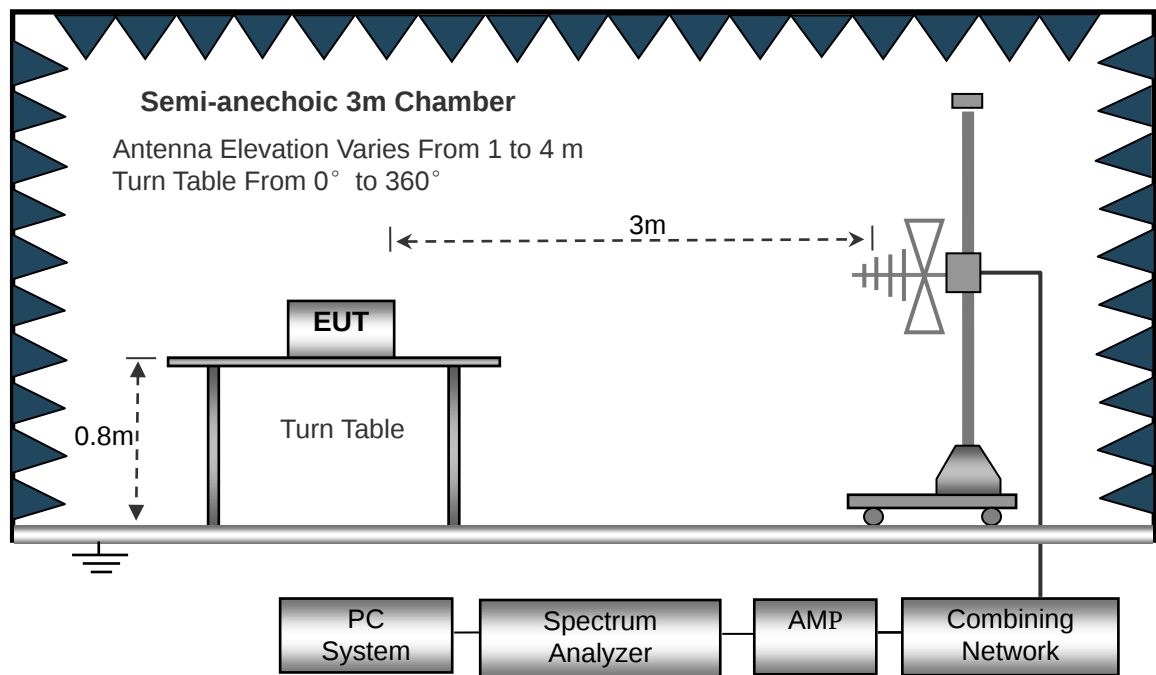

The test setup for emission measurement above 1 GHz..

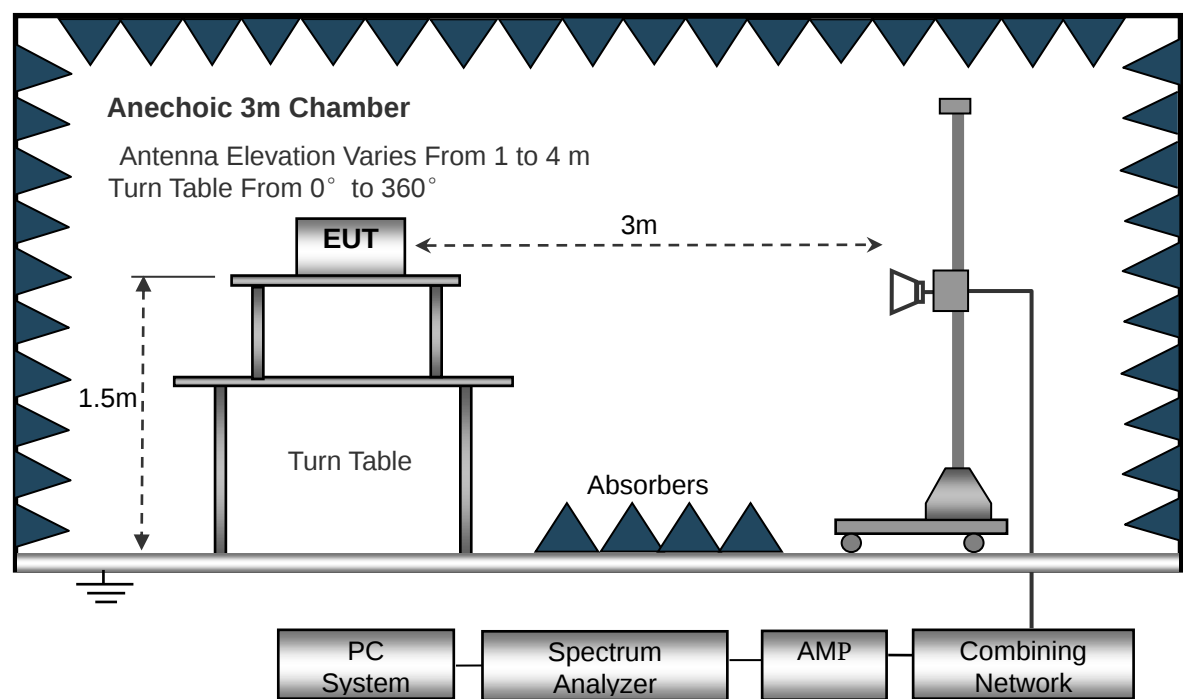

4.2 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Any non-ISM frequency device. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 18.305 Limit}$$

4.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar


4.5 Summary of Test Results/Plots

Plot of Radiated Emissions Test Data (Below 30MHz)

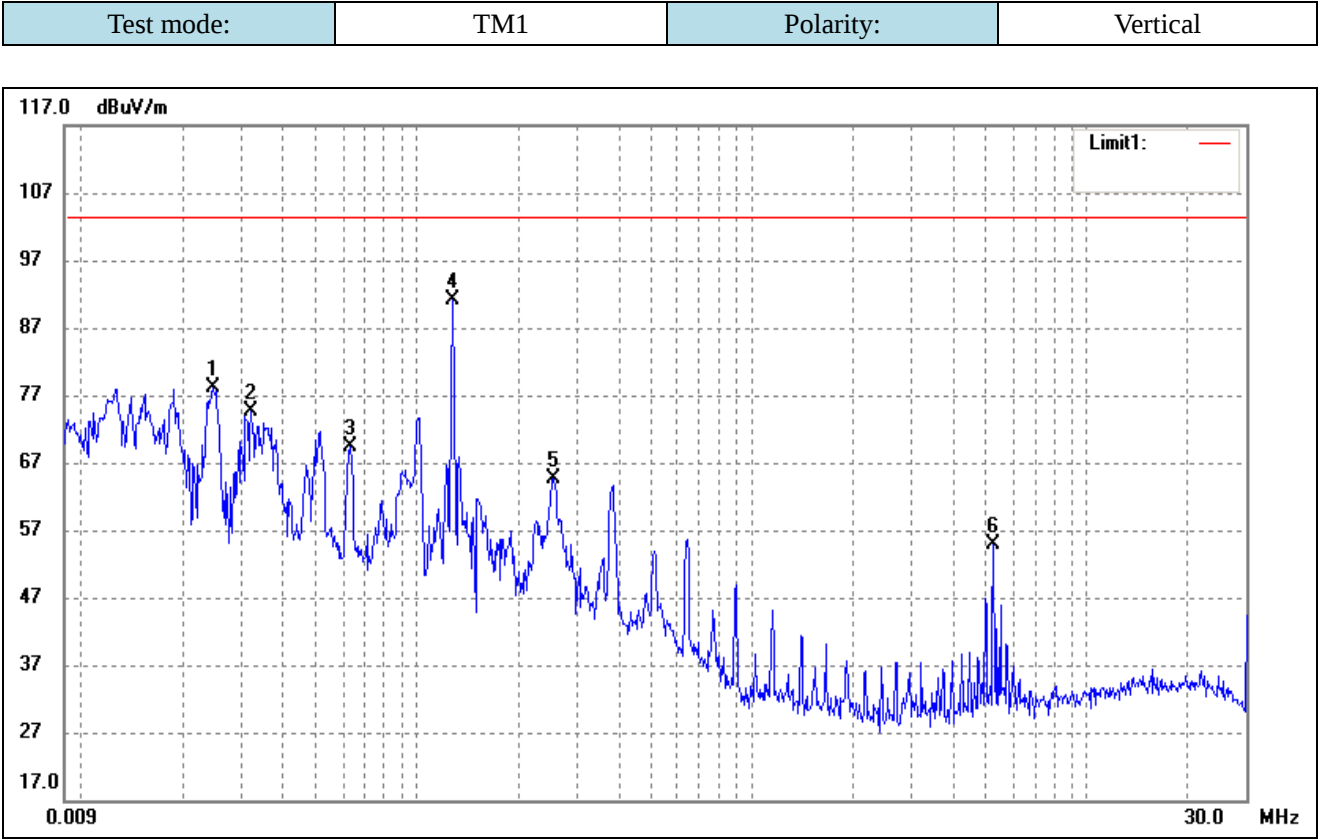


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	0.0249	84.61	-6.48	78.13	103.50	-25.37	-	-	peak
2	0.0320	80.70	-5.99	74.71	103.50	-28.79	-	-	peak
3	0.0631	74.30	-5.03	69.27	103.50	-34.23	-	-	peak
4	0.1277	96.16	-5.14	91.02	103.50	-12.48	-	-	peak
5	0.2562	72.05	-7.44	64.61	103.50	-38.89	-	-	peak
6	5.2490	54.92	0.00	54.92	103.50	-48.58	-	-	peak

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

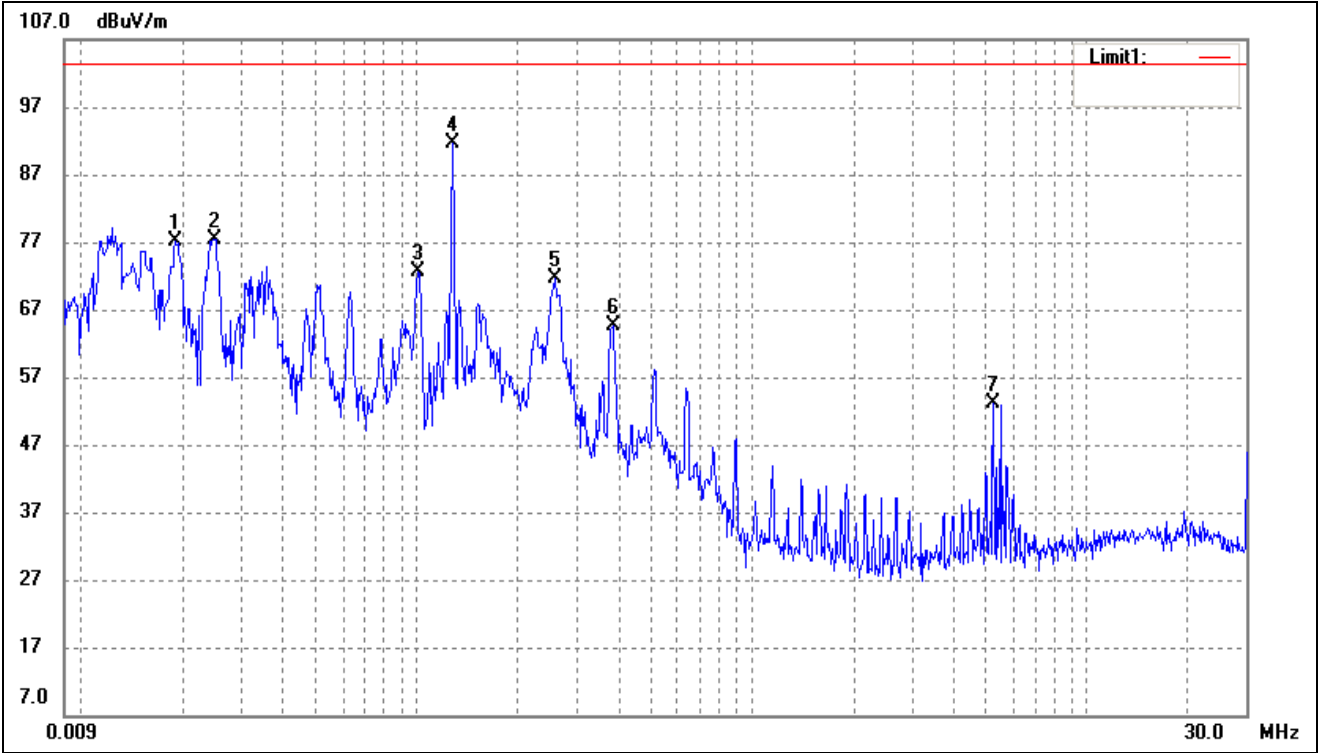


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0192	84.01	-6.79	77.22	103.50	-26.28	-	-	peak
2	0.0250	83.97	-6.49	77.48	103.50	-26.02	-	-	peak
3	0.1008	77.80	-5.06	72.74	103.50	-30.76	-	-	peak
4	0.1277	96.65	-5.14	91.51	103.50	-11.99	-	-	peak
5	0.2589	79.16	-7.48	71.68	103.50	-31.82	-	-	peak
6	0.3832	72.57	-7.83	64.74	103.50	-38.76	-	-	peak
7	5.2490	57.37	-4.34	53.03	103.50	-50.47	-	-	peak

Plot of Radiated Emissions Test Data (Above 30MHz)

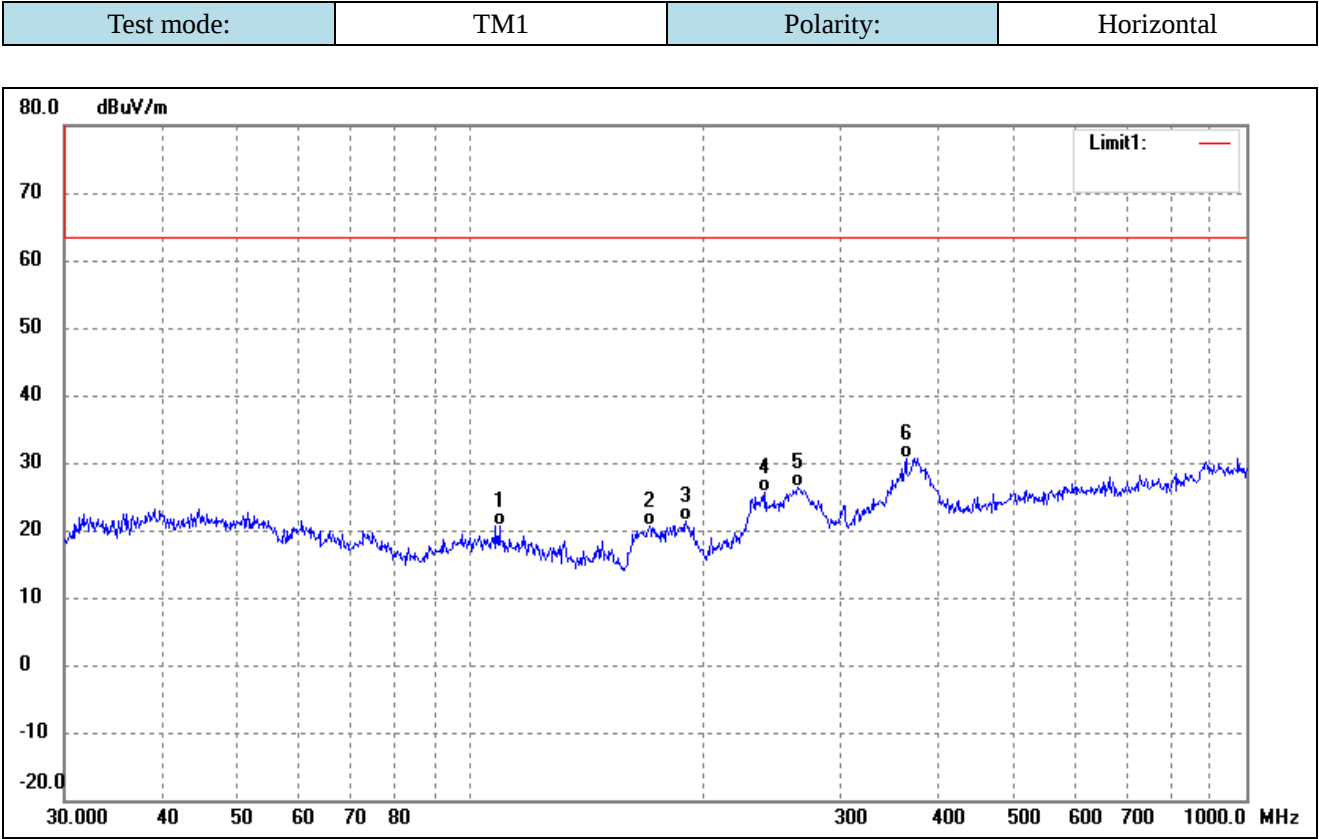


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	109.0286	33.98	-13.31	20.67	63.50	-42.83	-	-	QP
2	170.1948	35.69	-15.01	20.68	63.50	-42.82	-	-	QP
3	189.7385	34.47	-13.15	21.32	63.50	-42.18	-	-	QP
4	239.9874	37.08	-11.42	25.66	63.50	-37.84	-	-	QP
5	263.8190	37.18	-10.83	26.35	63.50	-37.15	-	-	QP
6	364.2595	37.90	-7.29	30.61	63.50	-32.89	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

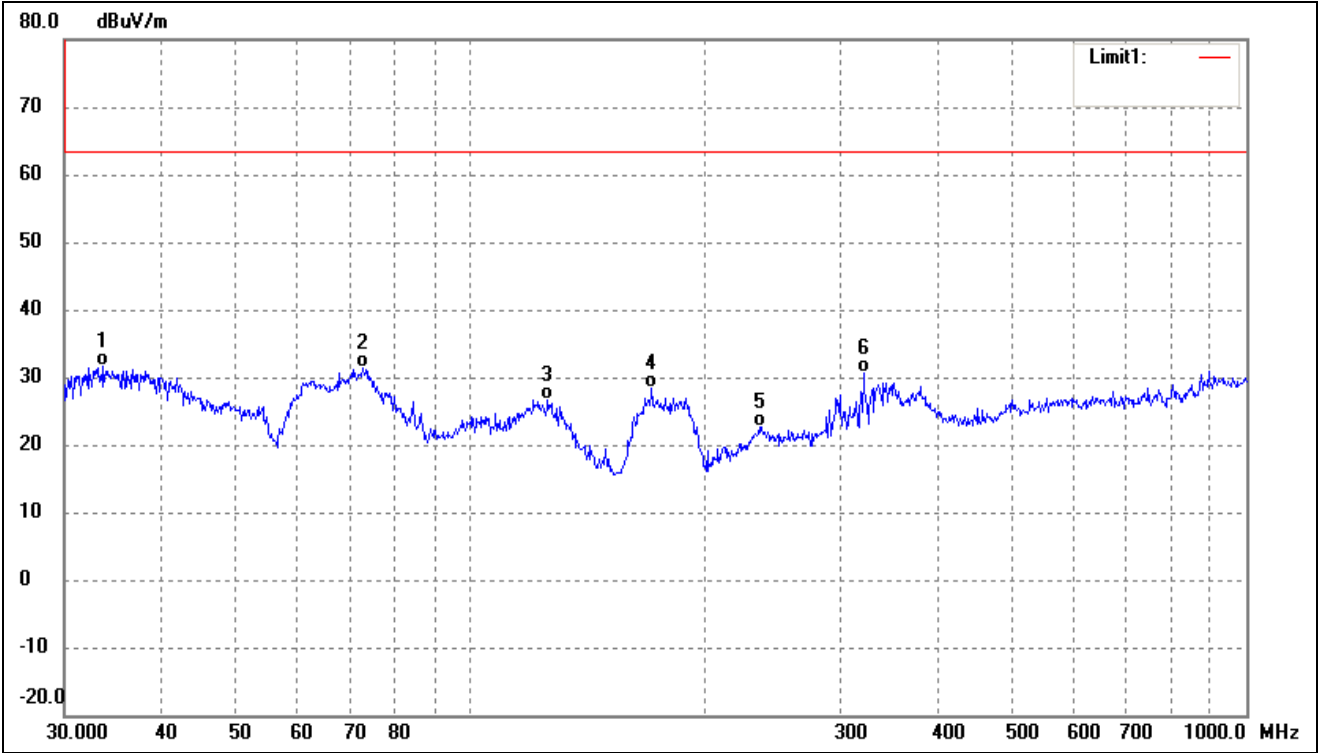


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.6803	45.60	-13.94	31.66	63.50	-31.84	-	-	QP
2	72.8466	46.88	-15.42	31.46	63.50	-32.04	-	-	QP
3	125.8864	42.45	-15.87	26.58	63.50	-36.92	-	-	QP
4	171.3926	43.32	-14.93	28.39	63.50	-35.11	-	-	QP
5	235.8164	34.37	-11.62	22.75	63.50	-40.75	-	-	QP
6	321.0608	39.51	-8.95	30.56	63.50	-32.94	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

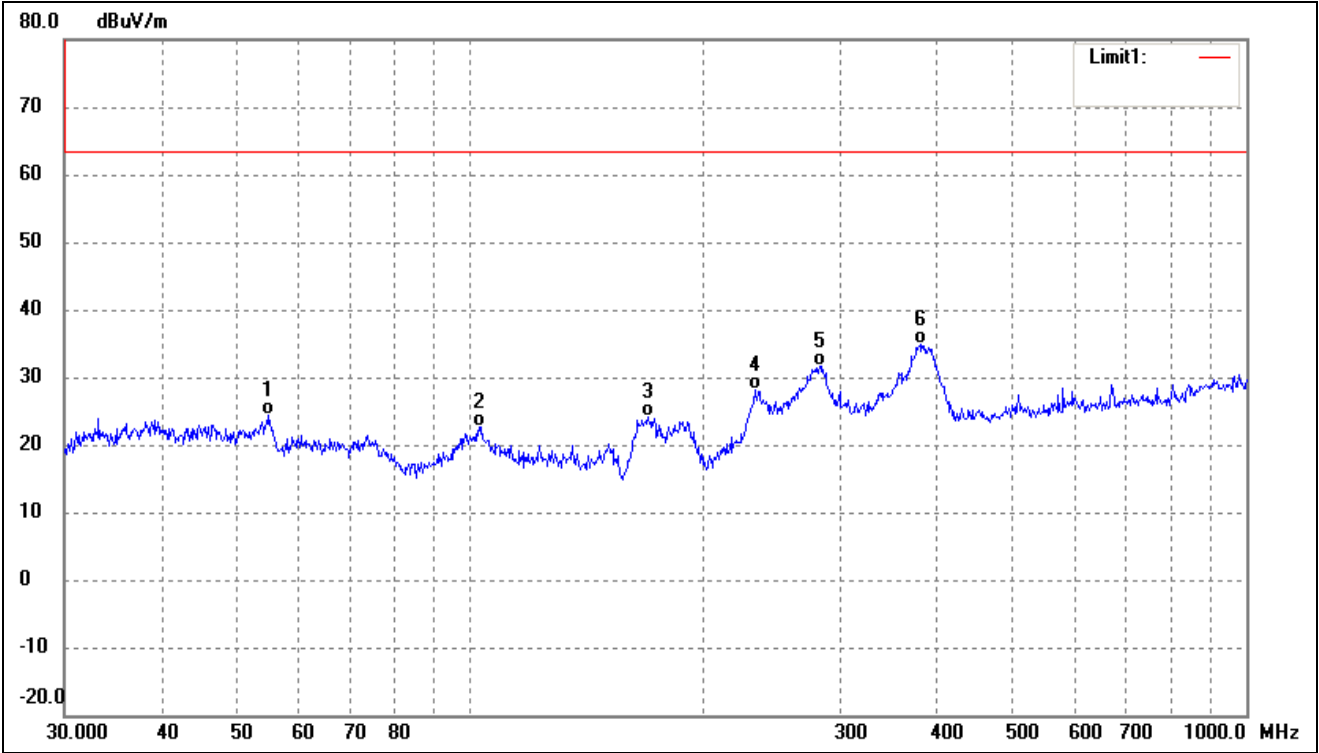

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	54.8348	37.30	-12.89	24.41	63.50	-39.09	-	-	QP
2	102.7192	35.94	-13.32	22.62	63.50	-40.88	-	-	QP
3	169.5990	39.21	-15.05	24.16	63.50	-39.34	-	-	QP
4	232.5318	39.79	-11.78	28.01	63.50	-35.49	-	-	QP
5	281.9946	41.89	-10.24	31.65	63.50	-31.85	-	-	QP
6	379.9141	41.96	-7.04	34.92	63.50	-28.58	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

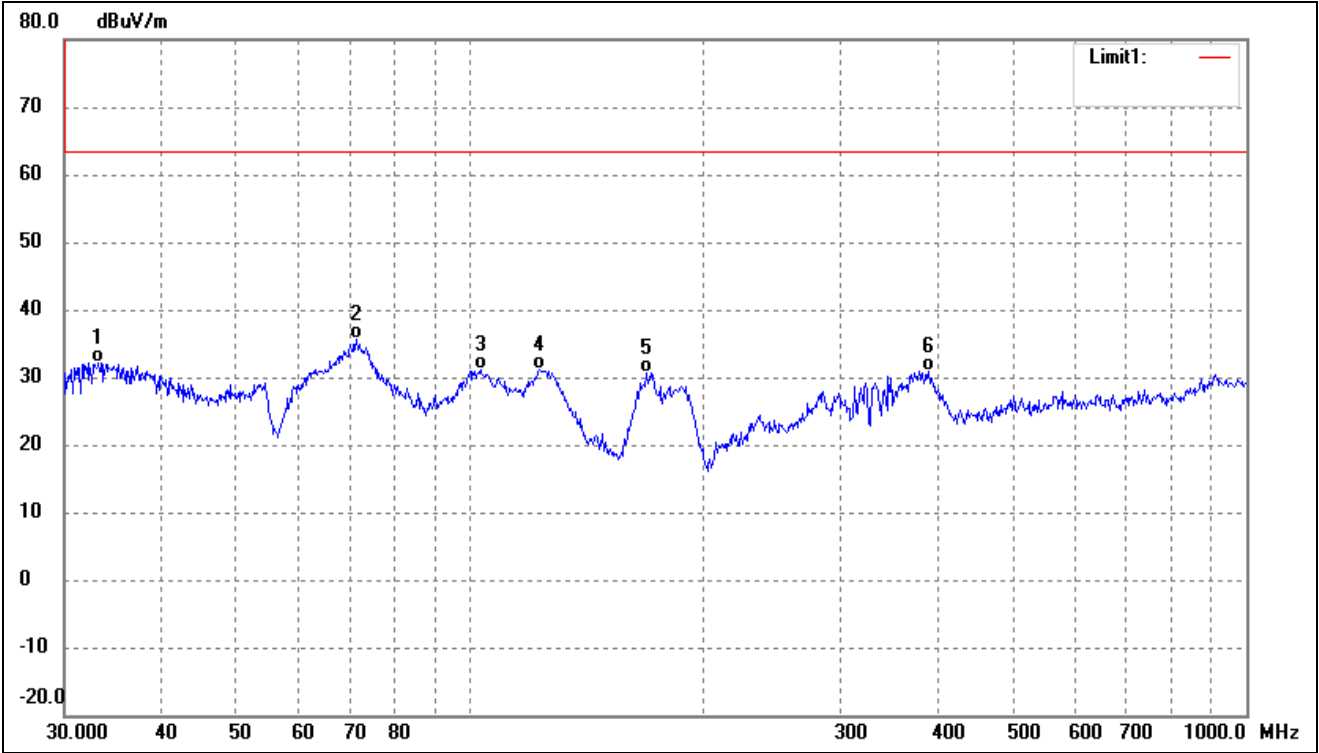

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	46.08	-13.97	32.11	63.50	-31.39	-	-	QP
2	71.3300	50.64	-15.01	35.63	63.50	-27.87	-	-	QP
3	103.0800	44.35	-13.32	31.03	63.50	-32.47	-	-	QP
4	122.8340	46.09	-15.05	31.04	63.50	-32.46	-	-	QP
5	169.0054	45.66	-15.07	30.59	63.50	-32.91	-	-	QP
6	389.3549	37.69	-6.76	30.93	63.50	-32.57	-	-	QP

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

***** END OF REPORT *****