

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Video Monitor

MODEL No.: CFH-V20, CFH-BV20, QCP-A500B, QCP-A500P

FCC ID: A5JC50527

Trade Mark: Kodak

REPORT NO.: ES150413111E

ISSUE DATE: September 16, 2015

Prepared for

QUADRANT TECHNOLOGY(SHENZHEN) CO., LTD

3rd floor, 7th building, Hongfa JiaTeLi Hi-Tech park of shixin village, shiyan
Town, Shenzhen City, Guangdong Province, China.

Prepared by

SHENZHEN EMTEK CO., LTD

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

TEST RESULT CERTIFICATION

Applicant:	QUADRANT TECHNOLOGY(SHENZHEN) CO., LTD 3rd floor, 7th building, Hongfa JiaTeLi Hi-Tech park of shixin village, shiyan Town, Shenzhen City, Guangdong Province, China.
Manufacturer:	QUADRANT TECHNOLOGY(SHENZHEN) CO., LTD 3rd floor, 7th building, Hongfa JiaTeLi Hi-Tech park of shixin village, shiyan Town, Shenzhen City, Guangdong Province, China.
EUT Description:	Video Monitor
Model Number:	CFH-V20, CFH-BV20, QCP-A500B, QCP-A500P (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only differences are the silk-screen, color and model no. for trading purpose. We prepare CFH-V20 for test. and the worst result recorded in the report.)
File Number:	ES150413111E
Date of Test:	May 17, 2015 to August 26, 2015

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2014 FCC 47 CFR Part 15, Subpart C:2014	PASS

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : May 17, 2015 to August 26, 2015

Prepared by : Jack Li
Jack Li /Editor

Reviewer : Joe Xia
Joe Xia /Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager

TABLE OF CONTENTS

1	EUT TECHNICAL DESCRIPTION	4
2	SUMMARY OF TEST RESULT	6
3	TEST METHODOLOGY.....	7
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.2	MEASUREMENT EQUIPMENT USED	7
3.3	DESCRIPTION OF TEST MODES	8
4	FACILITIES AND ACCREDITATIONS	9
4.1	FACILITIES.....	9
4.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
4.3	TEST SYSTEM UNCERTAINTY	9
5	SETUP OF EQUIPMENT UNDER TEST	10
5.1	RADIO FREQUENCY TEST SETUP 1.....	10
5.2	RADIO FREQUENCY TEST SETUP 2.....	10
5.3	CONDUCTED EMISSION TEST SETUP	11
5.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	12
5.5	SUPPORT EQUIPMENT.....	12
6	TEST REQUIREMENTS	13
6.1	DTS (6DB) BANDWIDTH.....	13
6.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	26
6.3	MAXIMUM POWER SPECTRAL DENSITY	27
6.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	40
6.5	RADIATED SPURIOUS EMISSION	49
6.6	CONDUCTED EMISSIONS TEST	74
6.7	ANTENNA APPLICATION	79

1 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Data Rate	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40): MCS0-MCS7;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 7 channels for 802.11n(HT40);
Transmit Power Max	13.42dBm for 802.11b; 16.43dBm for 802.11g; 15.85dBm for 802.11n(HT20); 14.70dBm for 802.11n(HT40);
Antenna Type	<input checked="" type="checkbox"/> integral antenna(Ceramic Antenna); <input type="checkbox"/> antenna connector
Antenna Port	<input checked="" type="checkbox"/> Ant1 ; <input checked="" type="checkbox"/> Ant2 ;
Smart system	<input checked="" type="checkbox"/> SISO for 802.11b/g <input checked="" type="checkbox"/> MIMO for 802.11n
Antenna Gain	1.6dBi(for per antenna port Max)
Power supply	<input checked="" type="checkbox"/> DC supply: DC 5V supplied by external power
	<input checked="" type="checkbox"/> Adapter1 supply: Model: S005ANU0500100 Input: AC 100-240V, 50/60Hz, 200mA Output: DC 5.0V, 1000mA <input checked="" type="checkbox"/> Adapter2 supply: Model: S006ANU0500100 Input: AC 100-240V, 50/60Hz, 200mA Output: DC 5.0V, 1000mA (Note: Adapter1 and Adapter2 are identical in circuitry and electrical,mechanical and physical construction; the only differences are the Pin location.)
Temperature Range	-10°C ~ +50°C

Note: for more details, please refer to the User's manual of the EUT.

Modified History

Rev.	Summary	Date of Rev.	Report No.
Ver.1.0	Original Report	2015-08-26	ES150413111E

2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable)			
NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: A5JC50527 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D02 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

3.2 MEASUREMENT EQUIPMENT USED

3.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2015

3.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015

3.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015
Power meter	Anritsu	ML2495A	0824006	05/16/2015
Power sensor	Anritsu	MA2411B	0738172	05/16/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1Mbps; 802.11g: 6Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

- : Accredited by CNAS, 2013.10.28
The certificate is valid until 2016.10.29
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291
- : Accredited by TUV Rheinland Shenzhen, 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
- : Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.
- : Accredited by FCC, February 28, 2013
The Certificate Registration Number is 709623.
- : Accredited by Industry Canada, May 24, 2008
The Certificate Registration Number is 4480A-2

4.3 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

5 SETUP OF EQUIPMENT UNDER TEST

5.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




5.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

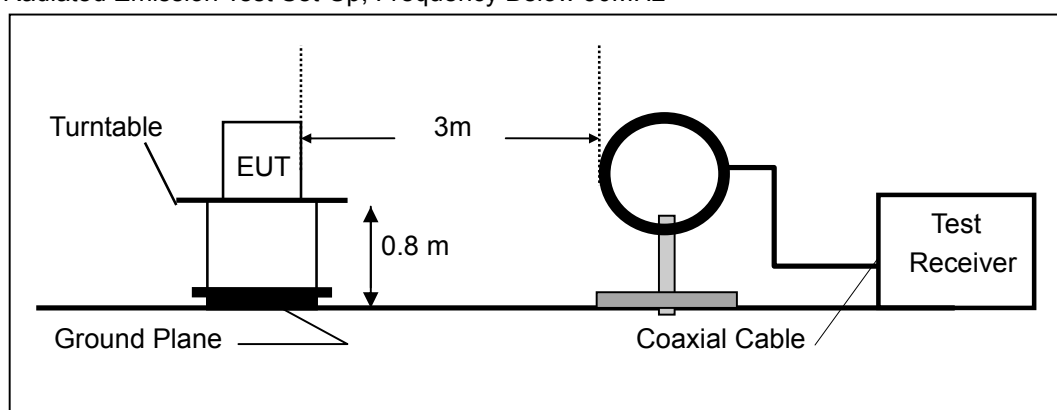

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

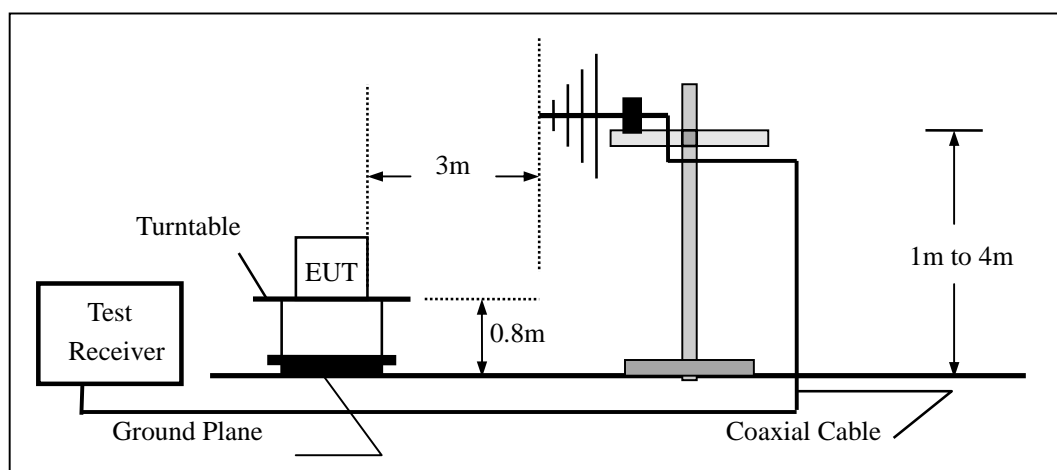

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

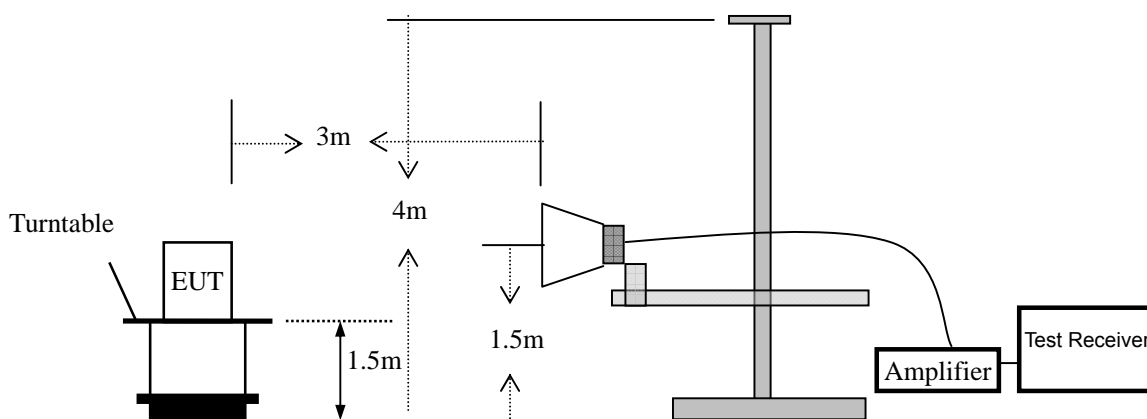


5.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (Video Monitor) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in ANSI C63.10.2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

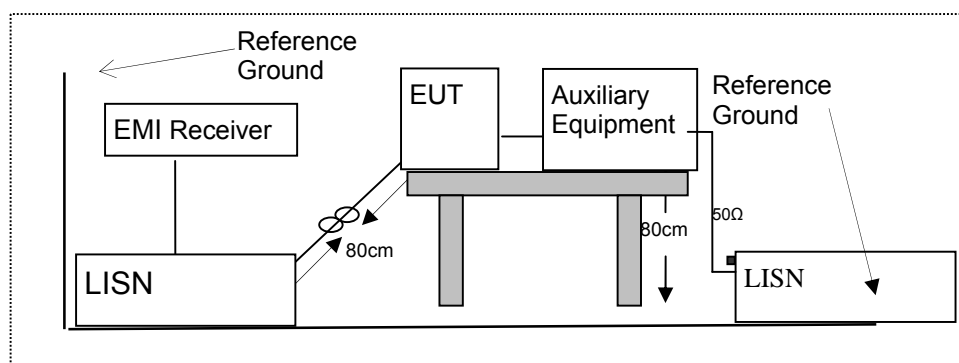

5.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

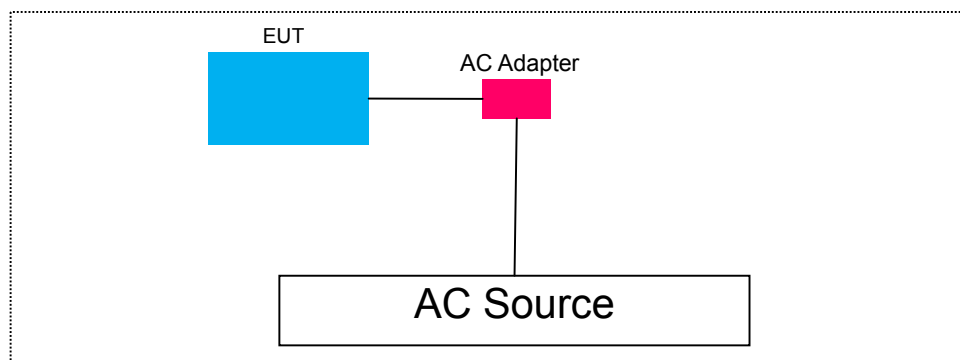

5.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1.	Video Monitor	Kodak	CFH-V20	A5JC50527	EUT
2.	Adapter	N/A	S006ANU0500100	N/A	

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

6 TEST REQUIREMENTS

6.1 DTS (6DB) BANDWIDTH

6.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r02

6.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

6.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

6.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the Video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Measure and record the results in the test report.

6.1.5 Test Results



Temperature: 24°C Test Date: July 8, 2015
Humidity: 53 % Test By: KINGKONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)		Limit (kHz)	Verdict
			Ant1	Ant2		
802.11b	1	2412	10.123	10.123	500	PASS
	6	2437	10.135	10.134	500	PASS
	11	2462	10.076	10.076	500	PASS
802.11g	1	2412	16.457	16.438	500	PASS
	6	2437	16.428	16.466	500	PASS
	11	2462	16.386	16.470	500	PASS
802.11n (HT20)	1	2412	17.521	17.524	500	PASS
	6	2437	17.248	17.396	500	PASS
	11	2462	17.233	17.193	500	PASS
802.11n (HT40)	3	2422	35.948	36.120	500	PASS
	6	2437	35.925	36.059	500	PASS
	9	2452	35.599	35.476	500	PASS


Ant 1 Port

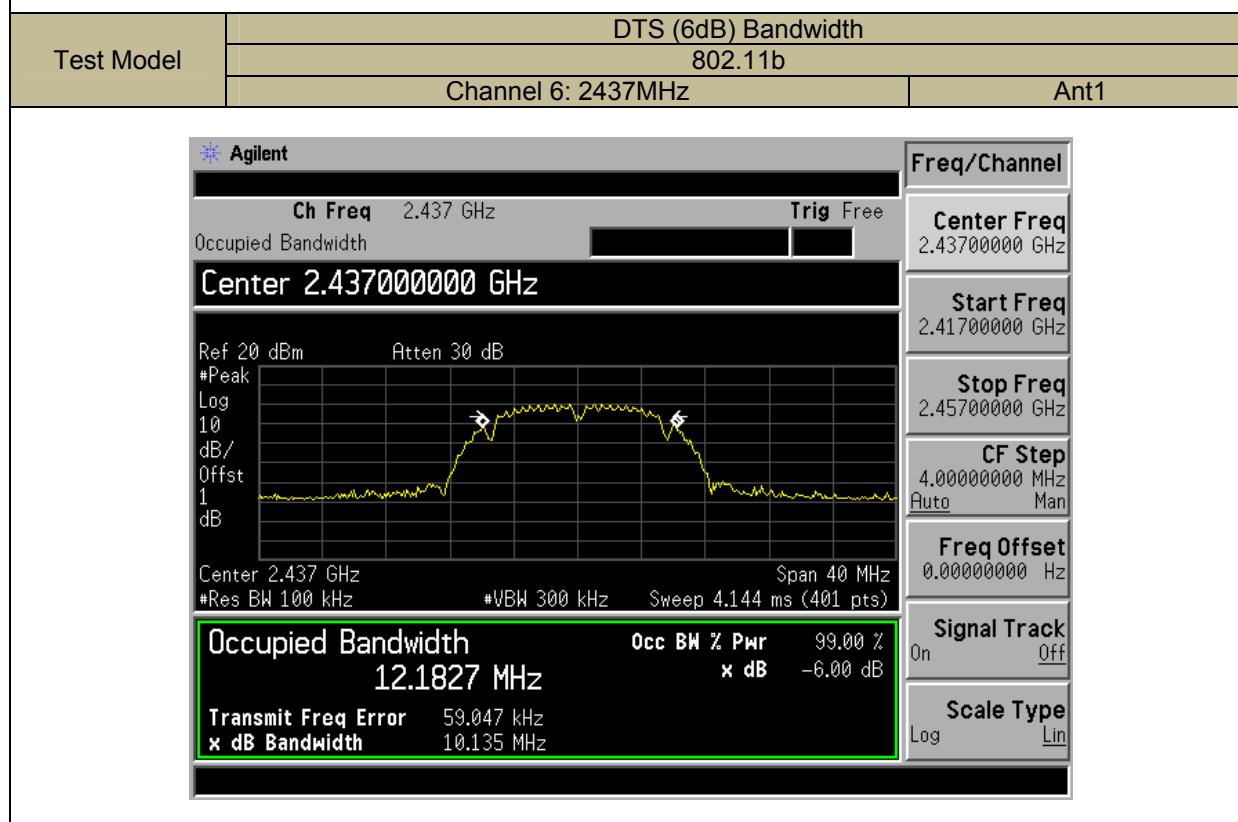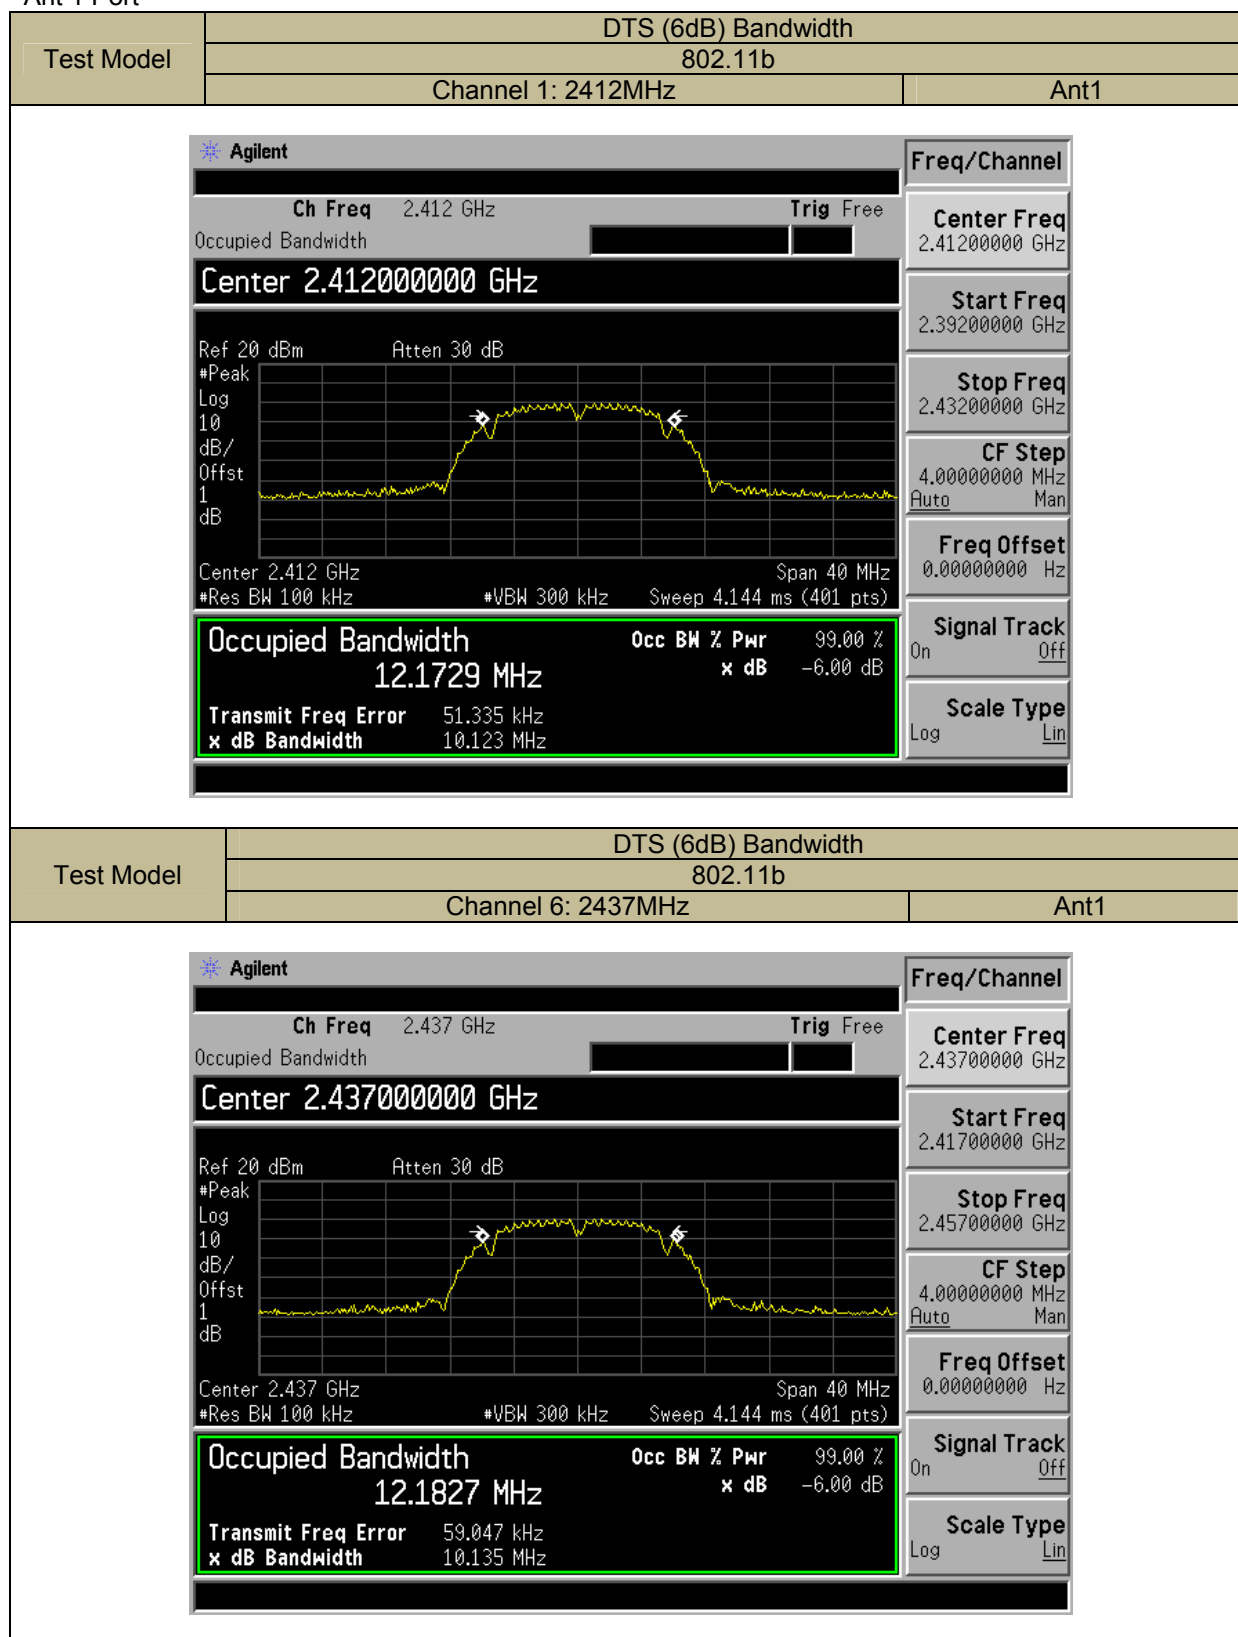


Test Model	DTS (6dB) Bandwidth	
	802.11b	
	Channel 11: 2462MHz	Ant1
<div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.462 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.462000000 GHz</div> <div> <div>Ref 20 dBm</div> <div>Atten 30 dB</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> <div>Center 2.462 GHz</div> <div>#Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Sweep 4.144 ms (401 pts)</div> </div> <div> <div>Span 40 MHz</div> </div> <div> <div>Occupied Bandwidth</div> <div>12.1827 MHz</div> <div> <div>Transmit Freq Error</div> <div>42.046 kHz</div> </div> <div> <div>x dB Bandwidth</div> <div>10.076 MHz</div> </div> </div> <div> <div>Occ BW % Pwr</div> <div>99.00 %</div> <div>x dB</div> <div>-6.00 dB</div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.46200000 GHz</div> <div>Start Freq 2.44200000 GHz</div> <div>Stop Freq 2.48200000 GHz</div> <div>CF Step 4.00000000 MHz</div> <div>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div> </div>		
Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 1: 2412MHz	Ant1
<div> <div> <div>Agilent</div> <div> <div>Ch Freq 2.412 GHz</div> <div>Trig Free</div> </div> <div>Occupied Bandwidth</div> <div>Center 2.412000000 GHz</div> <div> <div>Ref 20 dBm</div> <div>Atten 30 dB</div> </div> <div> <div>#Peak</div> <div>Log</div> <div>10</div> <div>dB/</div> <div>Offst</div> <div>1</div> <div>dB</div> </div> <div> <div>Center 2.412 GHz</div> <div>#Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Sweep 4.144 ms (401 pts)</div> </div> <div> <div>Span 40 MHz</div> </div> <div> <div>Occupied Bandwidth</div> <div>16.4447 MHz</div> <div> <div>Transmit Freq Error</div> <div>27.626 kHz</div> </div> <div> <div>x dB Bandwidth</div> <div>16.457 MHz</div> </div> </div> <div> <div>Occ BW % Pwr</div> <div>99.00 %</div> <div>x dB</div> <div>-6.00 dB</div> </div> </div> <div> <div>Freq/Channel</div> <div>Center Freq 2.41200000 GHz</div> <div>Start Freq 2.39200000 GHz</div> <div>Stop Freq 2.43200000 GHz</div> <div>CF Step 4.00000000 MHz</div> <div>Auto Man</div> <div>Freq Offset 0.00000000 Hz</div> <div>Signal Track On Off</div> <div>Scale Type Log Lin</div> </div> </div>		

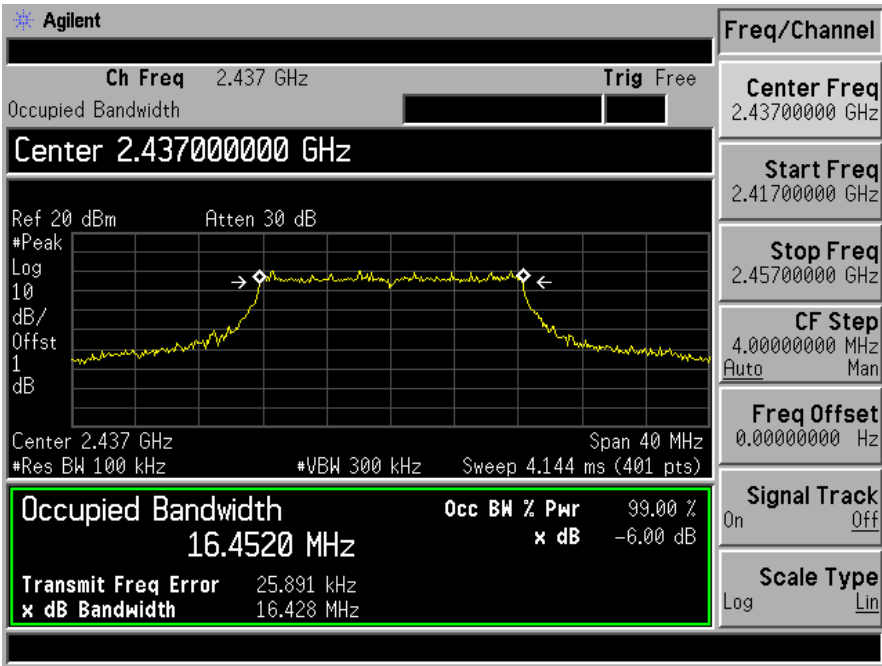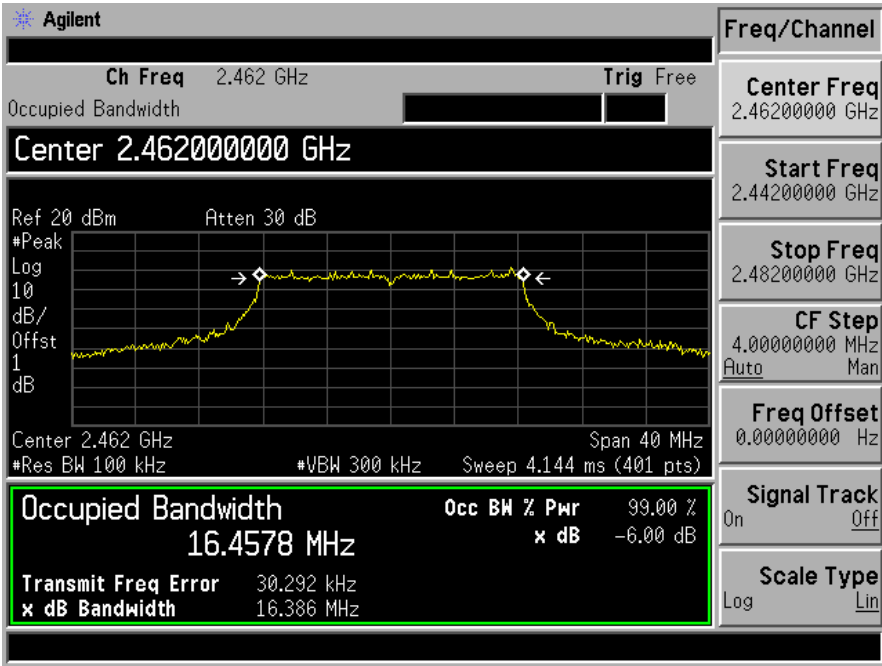Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 6: 2437MHz	Ant1
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 16.4520 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 25.891 kHz</p> <p>x dB Bandwidth 16.428 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41700000 GHz</p> <p>Stop Freq 2.45700000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		
Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 11: 2462MHz	Ant1
 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 16.4578 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 30.292 kHz</p> <p>x dB Bandwidth 16.386 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		


Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 1: 2412MHz	Ant1

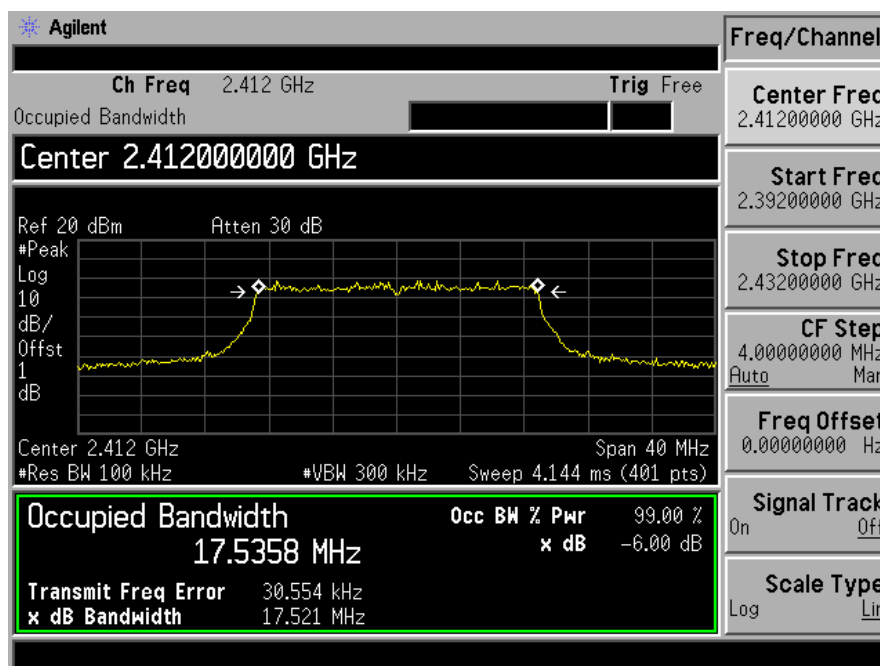


Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 6: 2437MHz	Ant1


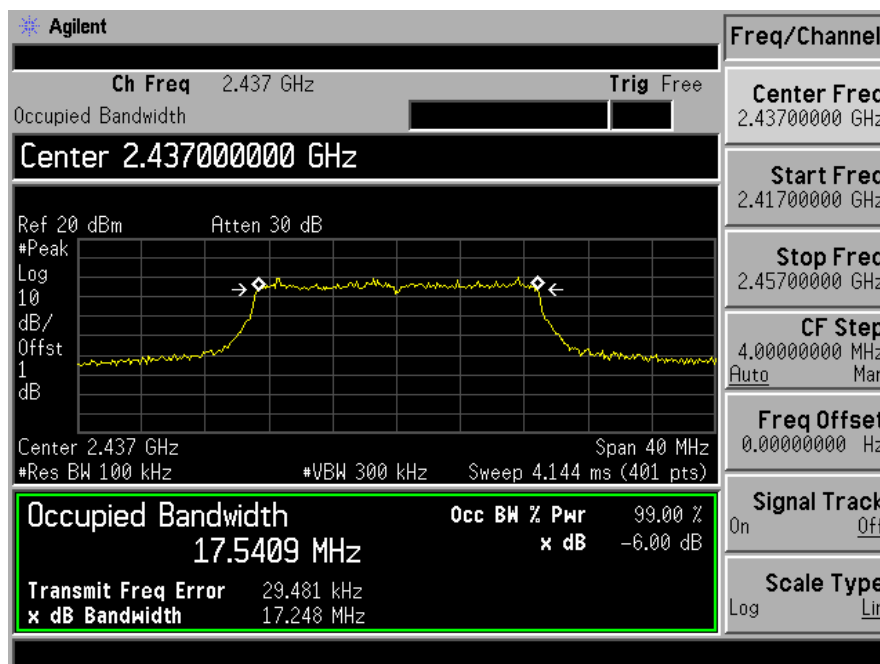


Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 11: 2462MHz	Ant1

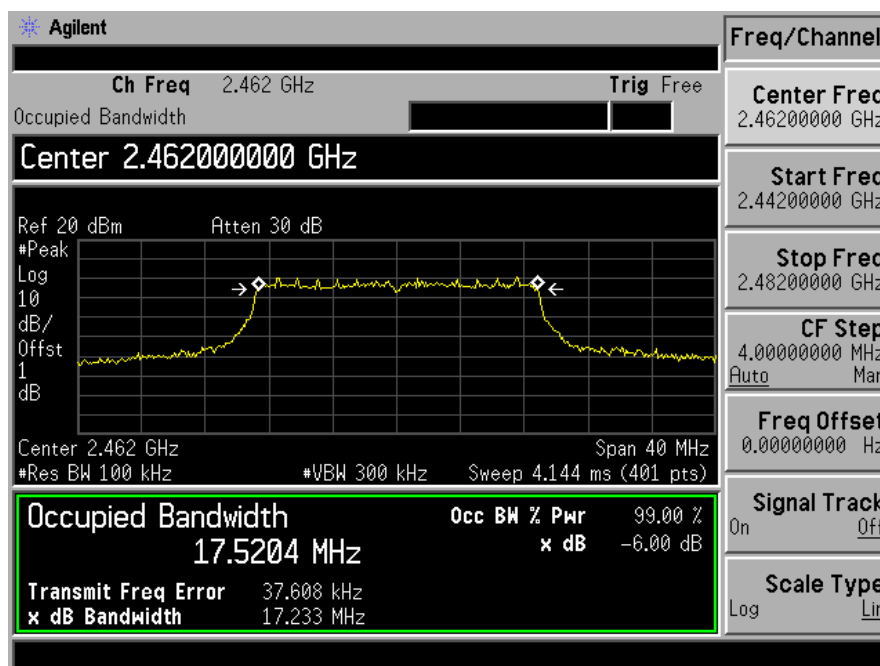


Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 3: 2422MHz	Ant1

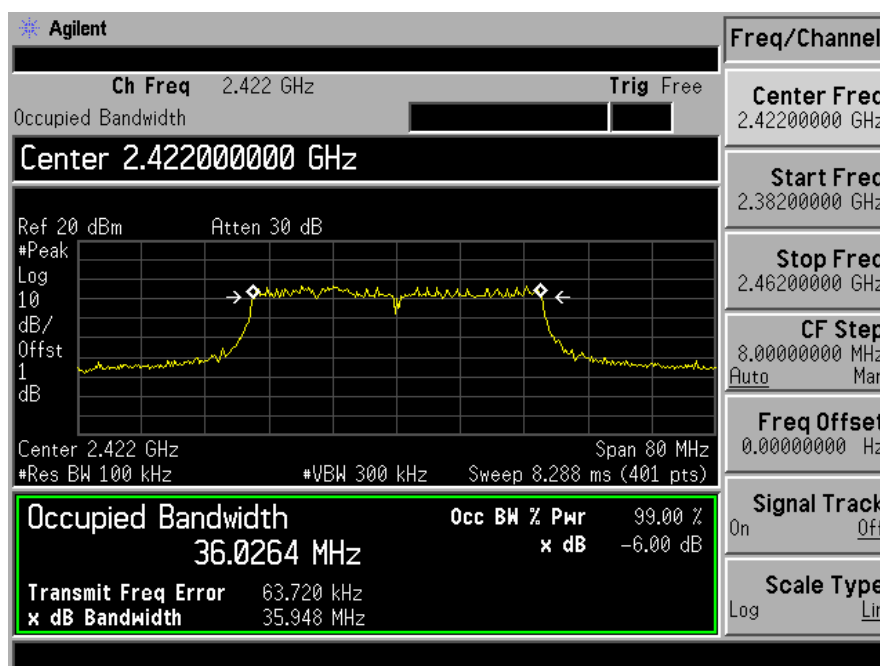


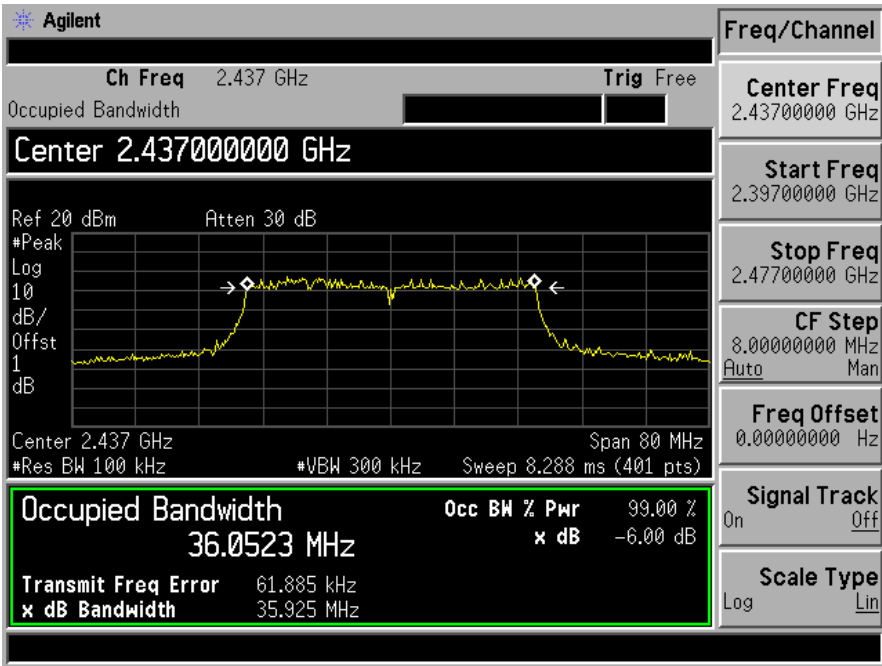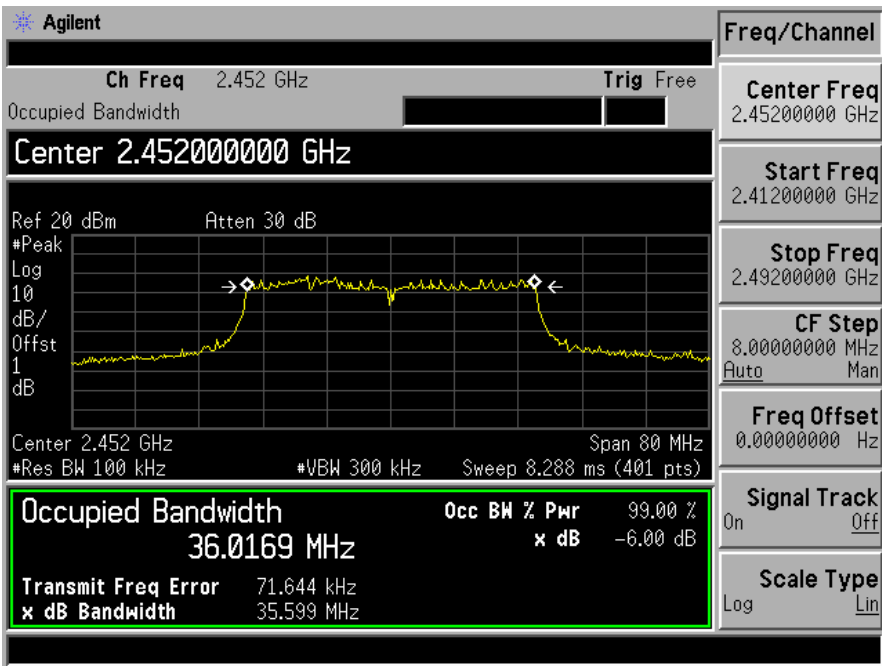Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 6: 2437MHz	Ant1
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 8.288 ms (401 pts)</p> <p>Occupied Bandwidth 36.0523 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 61.885 kHz</p> <p>x dB Bandwidth 35.925 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		
Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 9: 2452MHz	Ant1
 <p>Agilent</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.452000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.452 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 8.288 ms (401 pts)</p> <p>Occupied Bandwidth 36.0169 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 71.644 kHz</p> <p>x dB Bandwidth 35.599 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.49200000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		


Ant2 Port


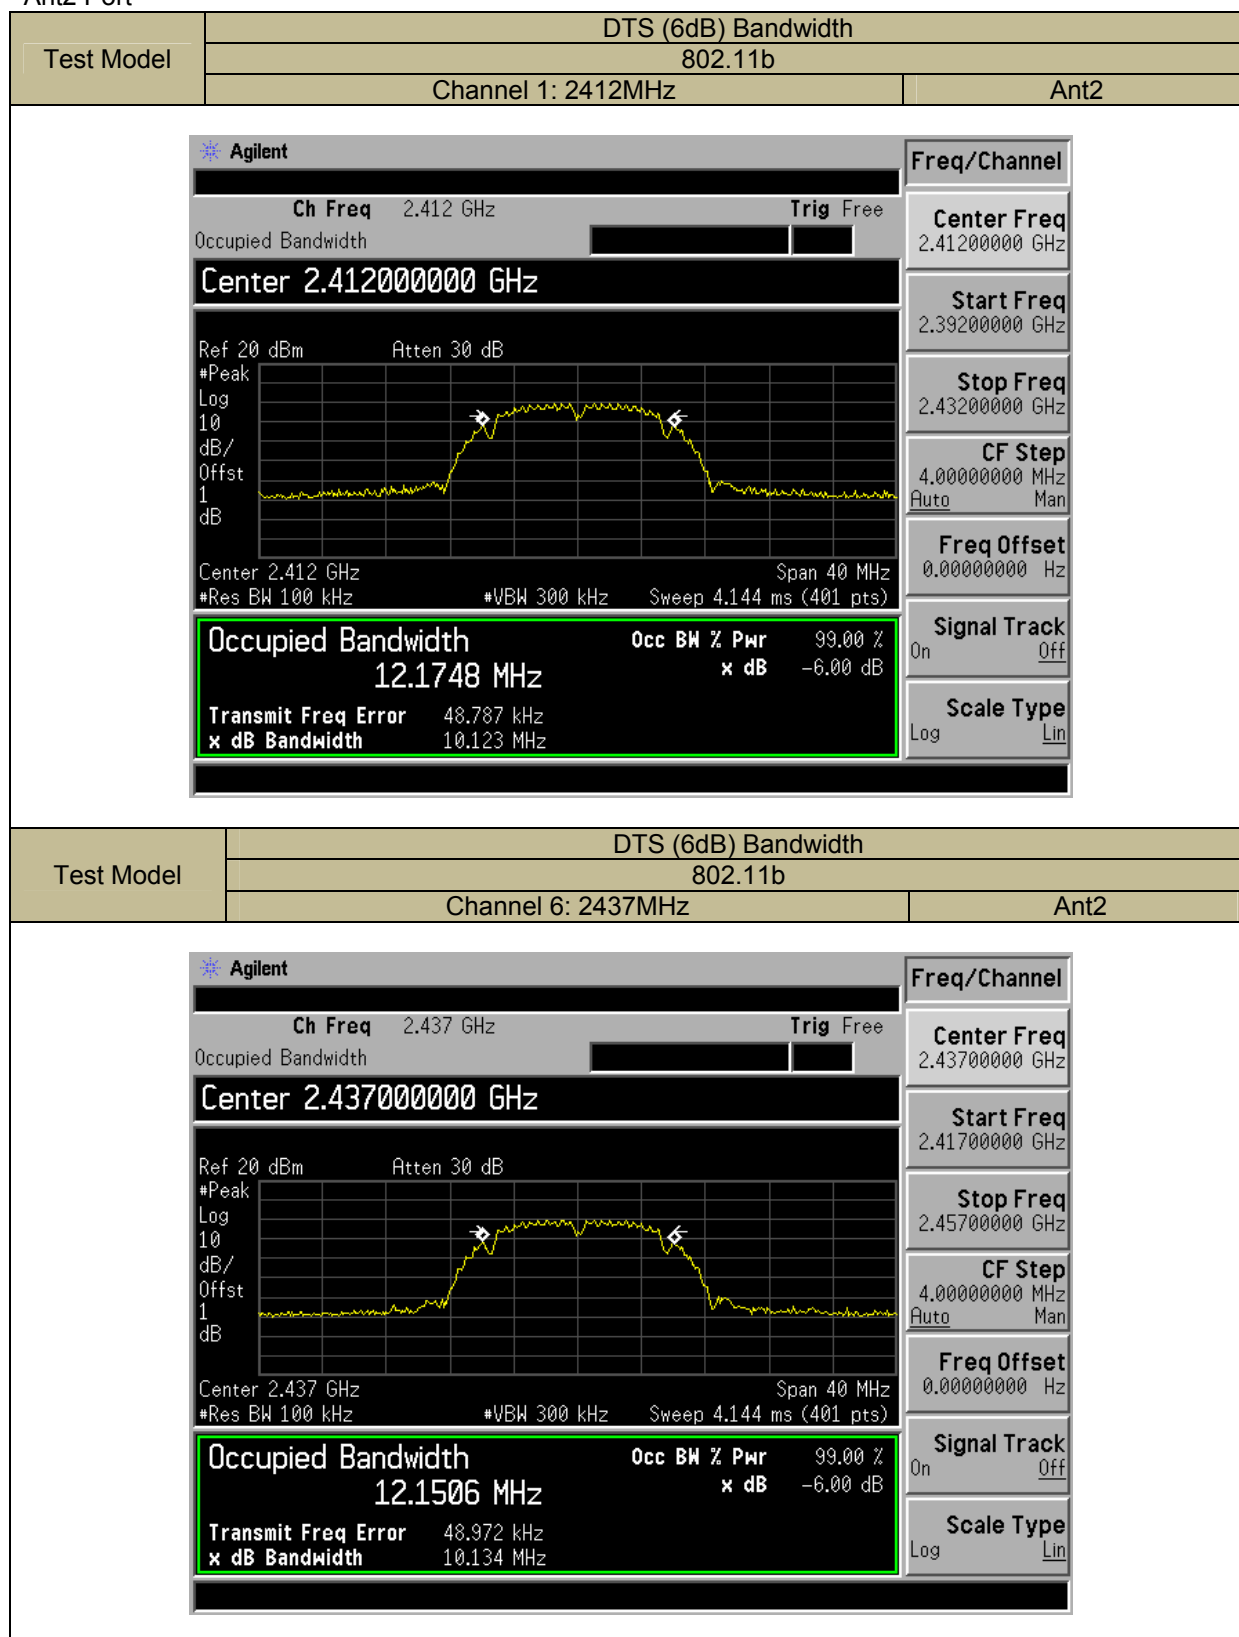




Test Model	DTS (6dB) Bandwidth	
	802.11b	
	Channel 11: 2462MHz	Ant2

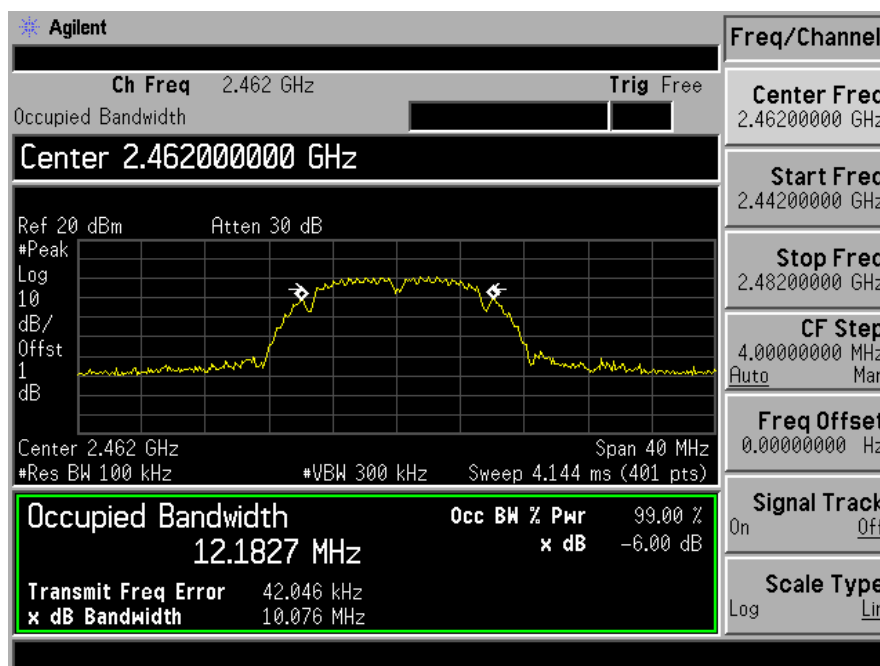


Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 1: 2412MHz	Ant2

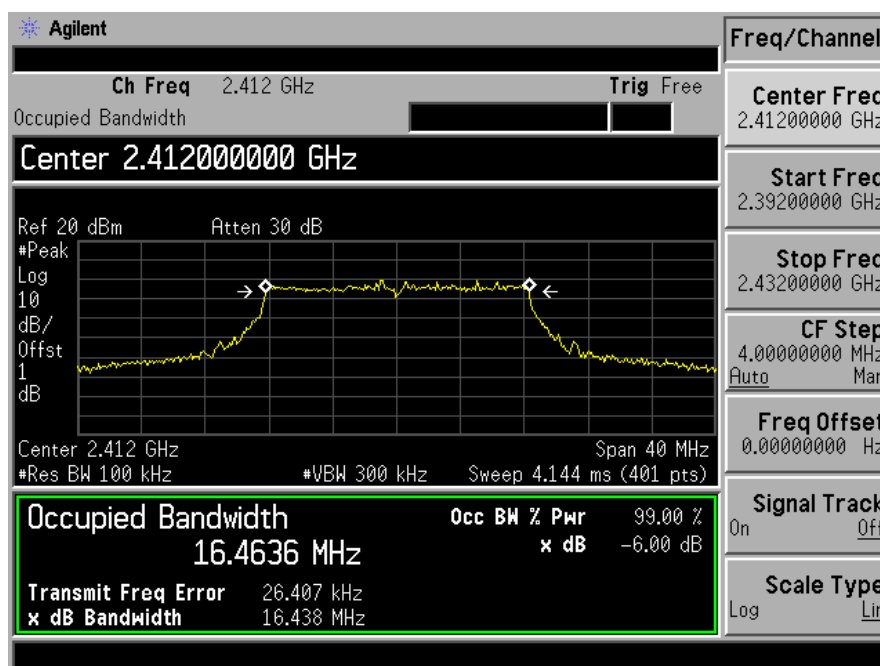

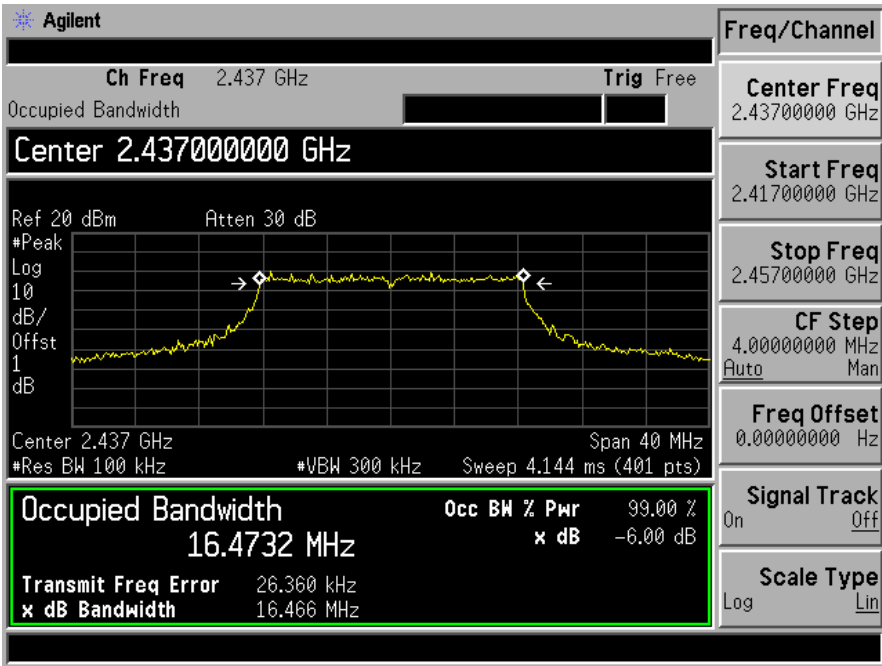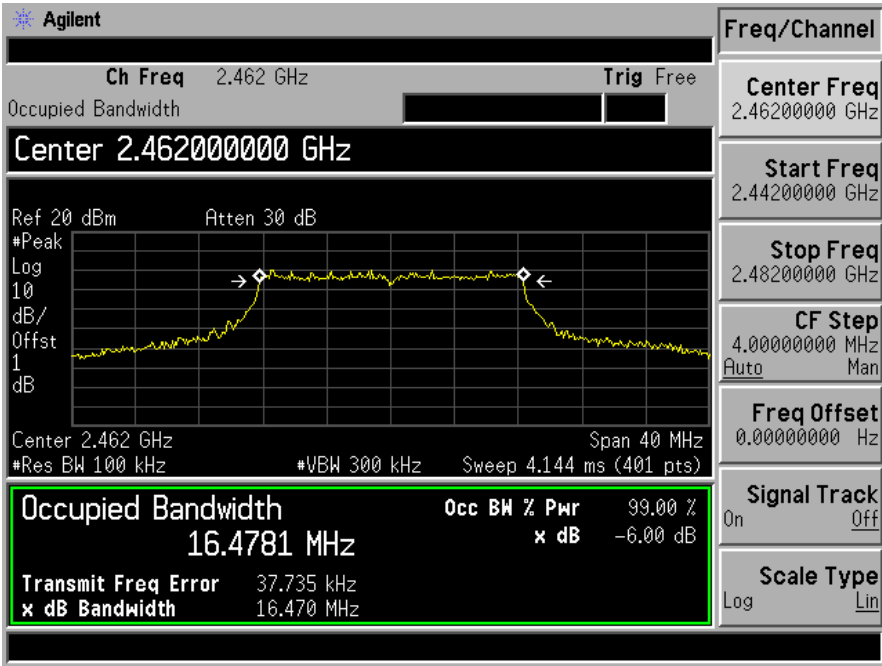
Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 6: 2437MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 16.4732 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 26.360 kHz</p> <p>x dB Bandwidth 16.466 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41700000 GHz</p> <p>Stop Freq 2.45700000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		
Test Model	DTS (6dB) Bandwidth	
	802.11g	
	Channel 11: 2462MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 16.4781 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 37.735 kHz</p> <p>x dB Bandwidth 16.470 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		

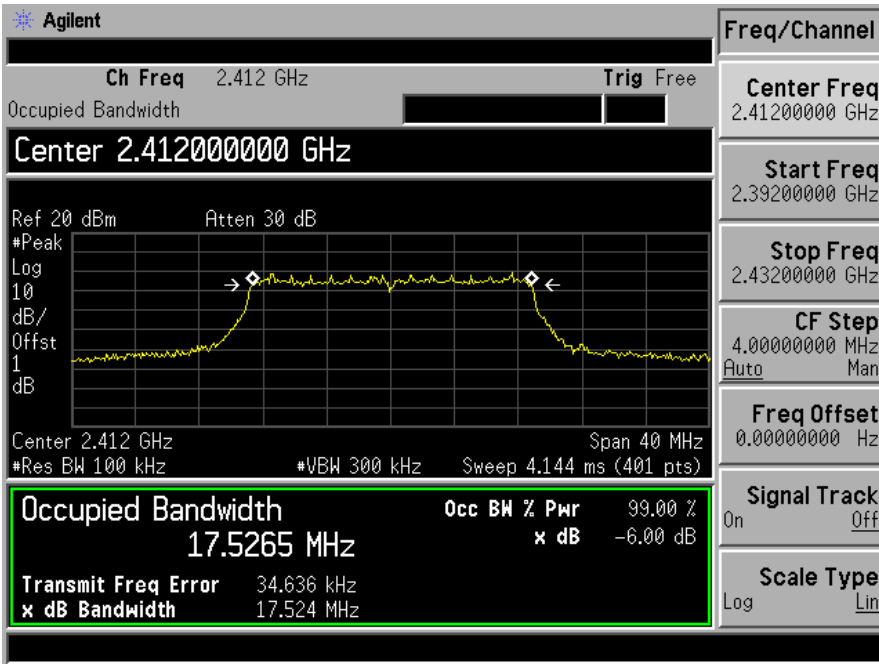
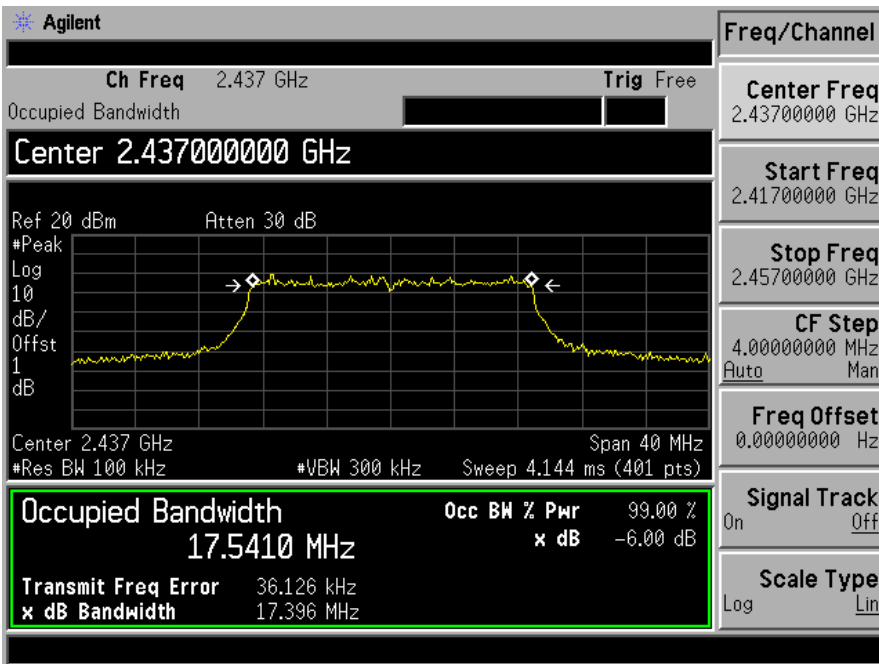
Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 1: 2412MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.412000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 17.5265 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 34.636 kHz</p> <p>x dB Bandwidth 17.524 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.412000000 GHz</p> <p>Start Freq 2.392000000 GHz</p> <p>Stop Freq 2.432000000 GHz</p> <p>CF Step 4.000000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		
Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 6: 2437MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)</p> <p>Occupied Bandwidth 17.5410 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 36.126 kHz</p> <p>x dB Bandwidth 17.396 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.437000000 GHz</p> <p>Start Freq 2.417000000 GHz</p> <p>Stop Freq 2.457000000 GHz</p> <p>CF Step 4.000000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.000000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		

Test Model	DTS (6dB) Bandwidth	
	802.11n (ht20)	
	Channel 11: 2462MHz	Ant2

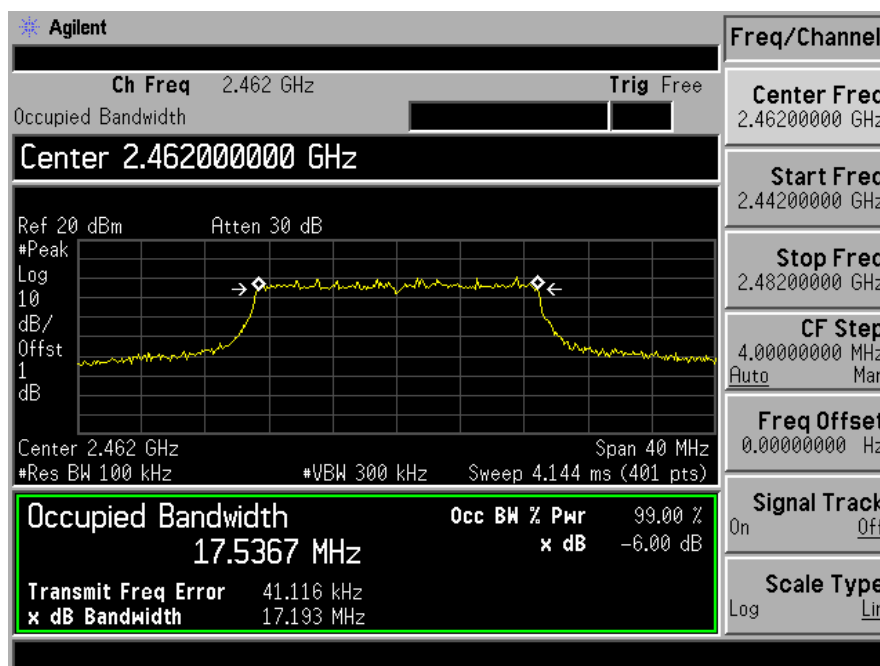

Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 3: 2422MHz	Ant2

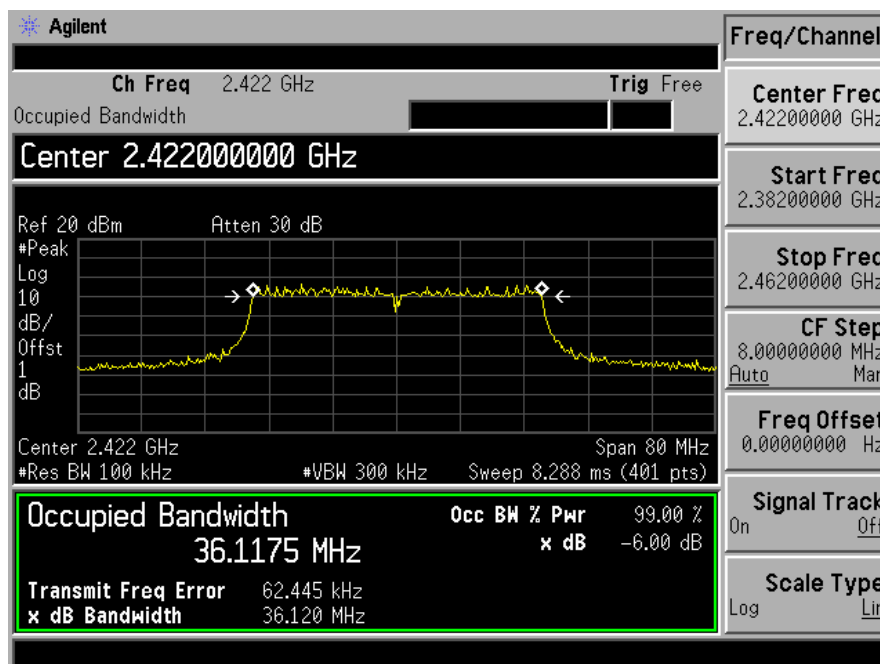

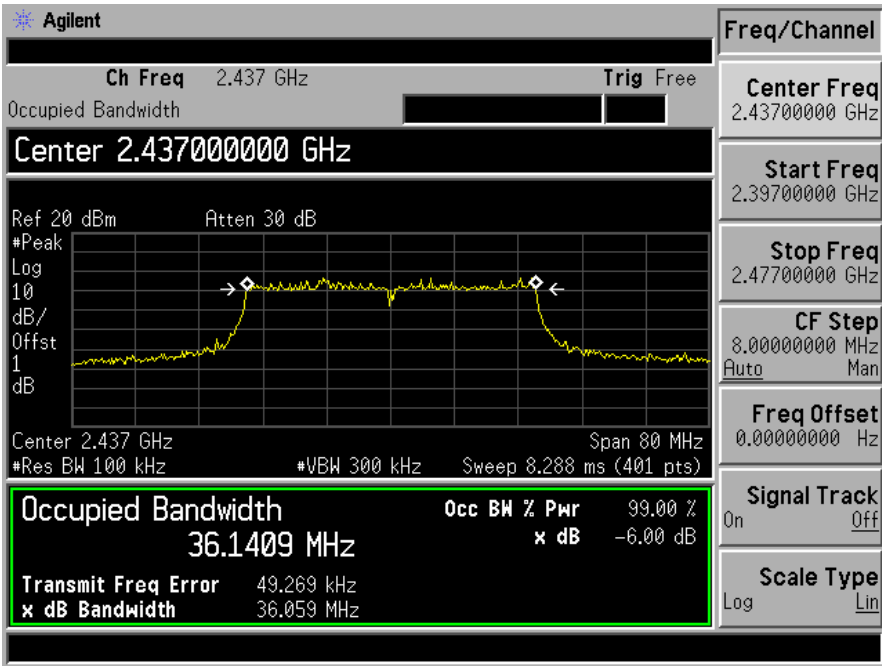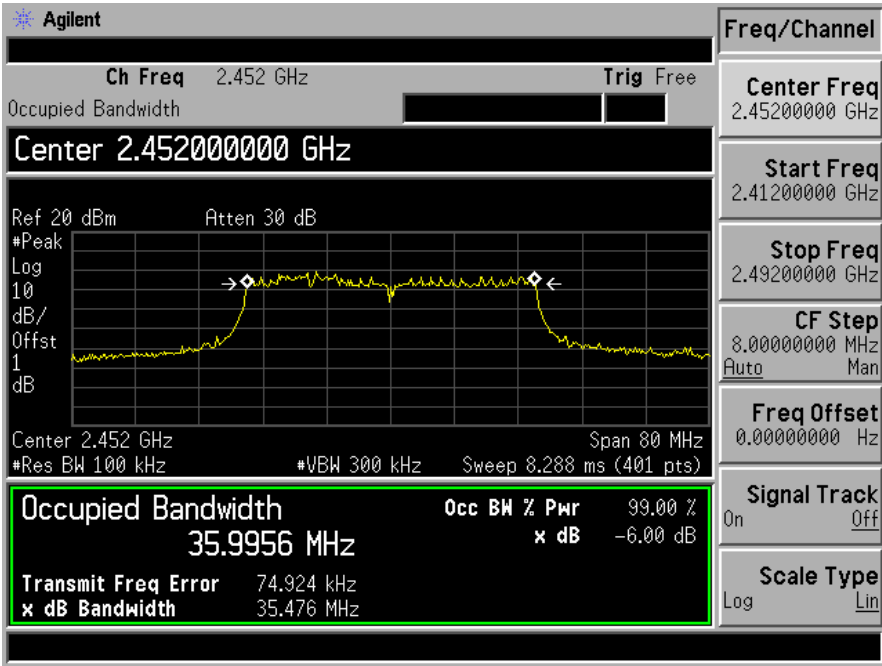Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 6: 2437MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 8.288 ms (401 pts)</p> <p>Occupied Bandwidth 36.1409 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 49.269 kHz</p> <p>x dB Bandwidth 36.059 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		
Test Model	DTS (6dB) Bandwidth	
	802.11n (ht40)	
	Channel 9: 2452MHz	Ant2
 <p>Agilent</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.452000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.452 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 8.288 ms (401 pts)</p> <p>Occupied Bandwidth 35.9956 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error 74.924 kHz</p> <p>x dB Bandwidth 35.476 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.49200000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>		

6.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

6.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r02

6.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

6.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

6.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2.5 Test Results

Temperature: 24°C
Humidity: 53 %

Test Date: July 8, 2015
Test By: KINGKONG

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Sum		
802.11b	1	2412	12.11	12.07	--	30	PASS
	6	2437	12.42	12.56	--	30	PASS
	11	2462	13.35	13.42	--	30	PASS
802.11g	1	2412	15.15	15.38	--	30	PASS
	6	2437	15.95	15.56	--	30	PASS
	11	2462	16.03	16.43	--	30	PASS
802.11n (ht20)	1	2412	15.05	14.74	17.91	30	PASS
	6	2437	15.44	15.37	18.42	30	PASS
	11	2462	16.09	15.85	18.98	30	PASS
802.11n (ht40)	3	2422	14.07	13.92	17.01	30	PASS
	6	2437	14.35	14.44	17.41	30	PASS
	9	2452	14.66	14.70	17.69	30	PASS

Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.

6.3 MAXIMUM POWER SPECTRAL DENSITY

6.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r02

6.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

6.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.



6.3.5 Test Results


Temperature: 24 °C
 Humidity: 53 %


Test Date: July 8, 2015
 Test By: KINGKONG


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)			Limit (dBm/3kHz)	Verdict
			Ant1	Ant2	Sum		
802.11b	1	2412	-11.22	-11.26	--	8	PASS
	6	2437	-12.99	-11.82	--	8	PASS
	11	2462	-12.77	-12.14	--	8	PASS
802.11g	1	2412	-13.43	-13.04	--	8	PASS
	6	2437	-11.10	-11.11	--	8	PASS
	11	2462	-12.56	-12.94	--	8	PASS
802.11n (ht20)	1	2412	-14.33	-14.28	-11.29	8	PASS
	6	2437	-11.82	-11.77	-8.78	8	PASS
	11	2462	-14.52	-14.66	-11.58	8	PASS
802.11n (ht40)	3	2422	-16.63	-17.32	-13.95	8	PASS
	6	2437	-14.32	-14.98	-11.63	8	PASS
	9	2452	-17.45	-17.83	-14.63	8	PASS
Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.							


Ant1 Port

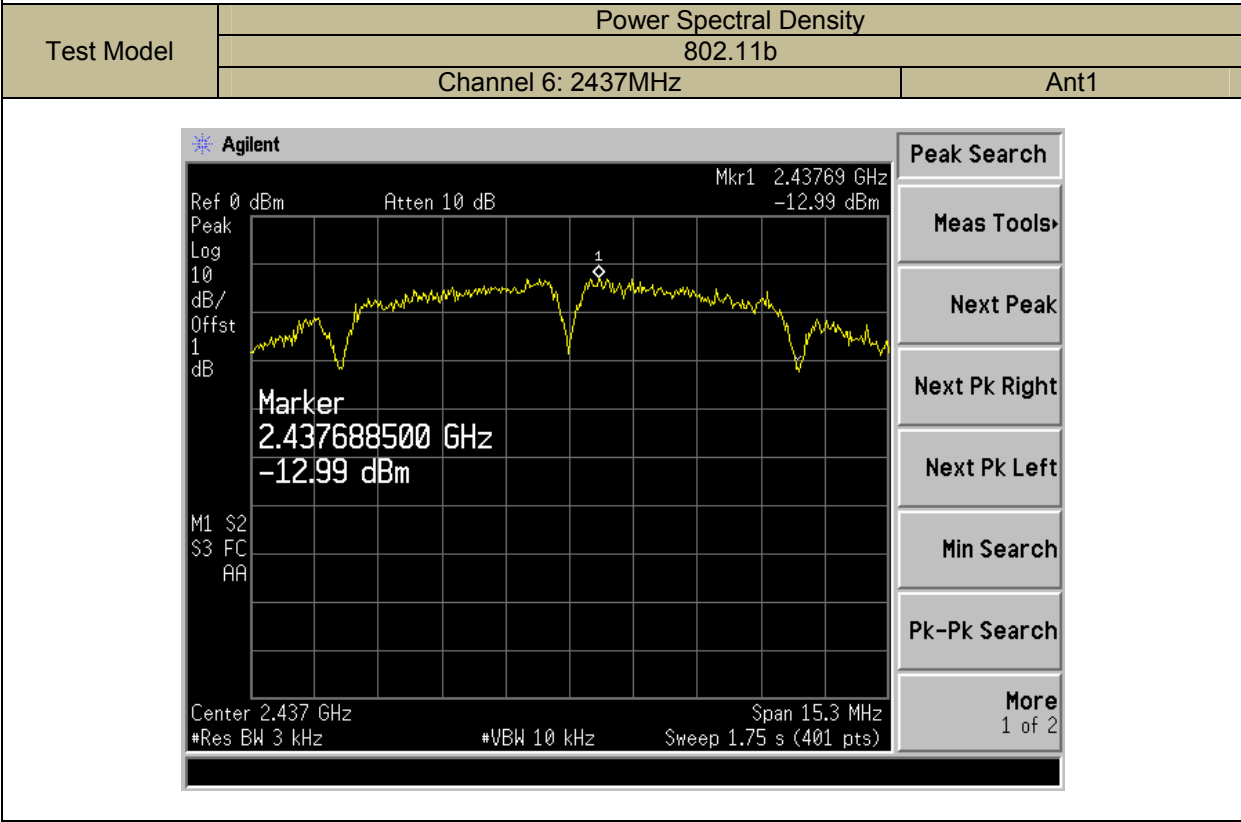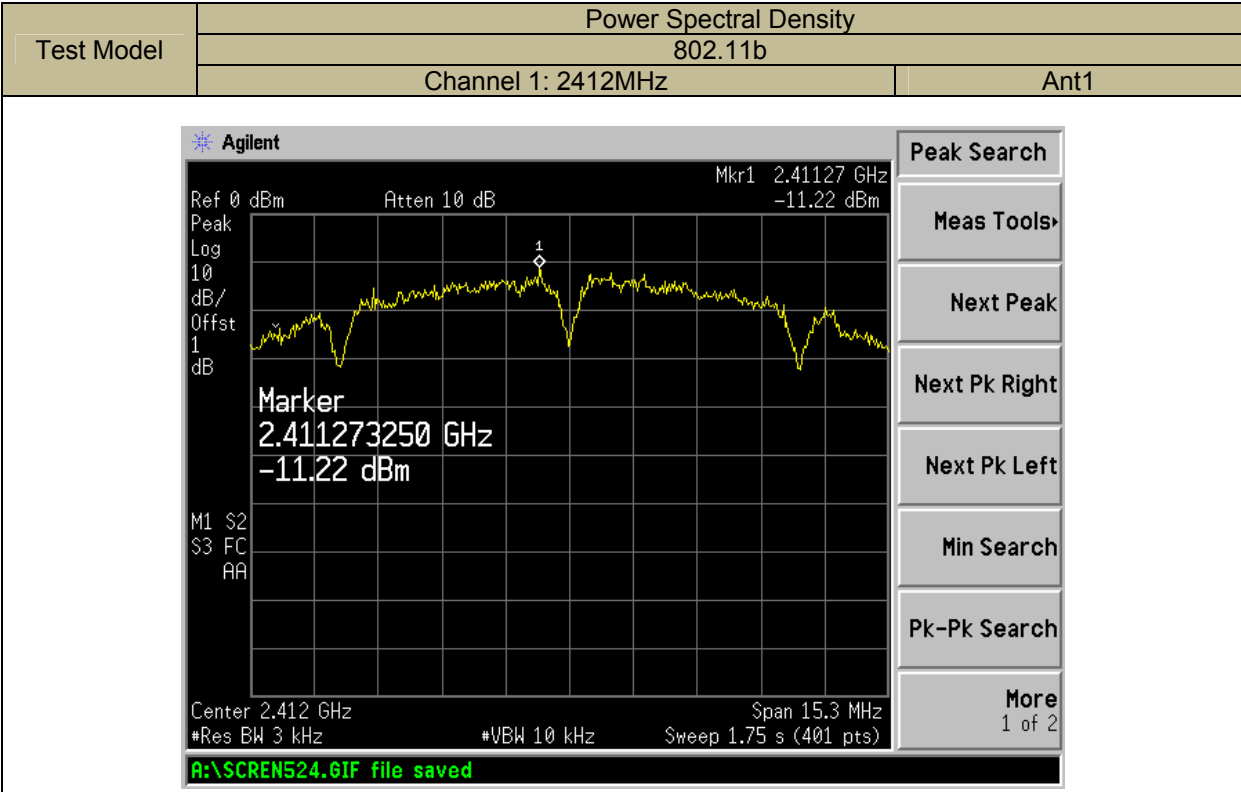

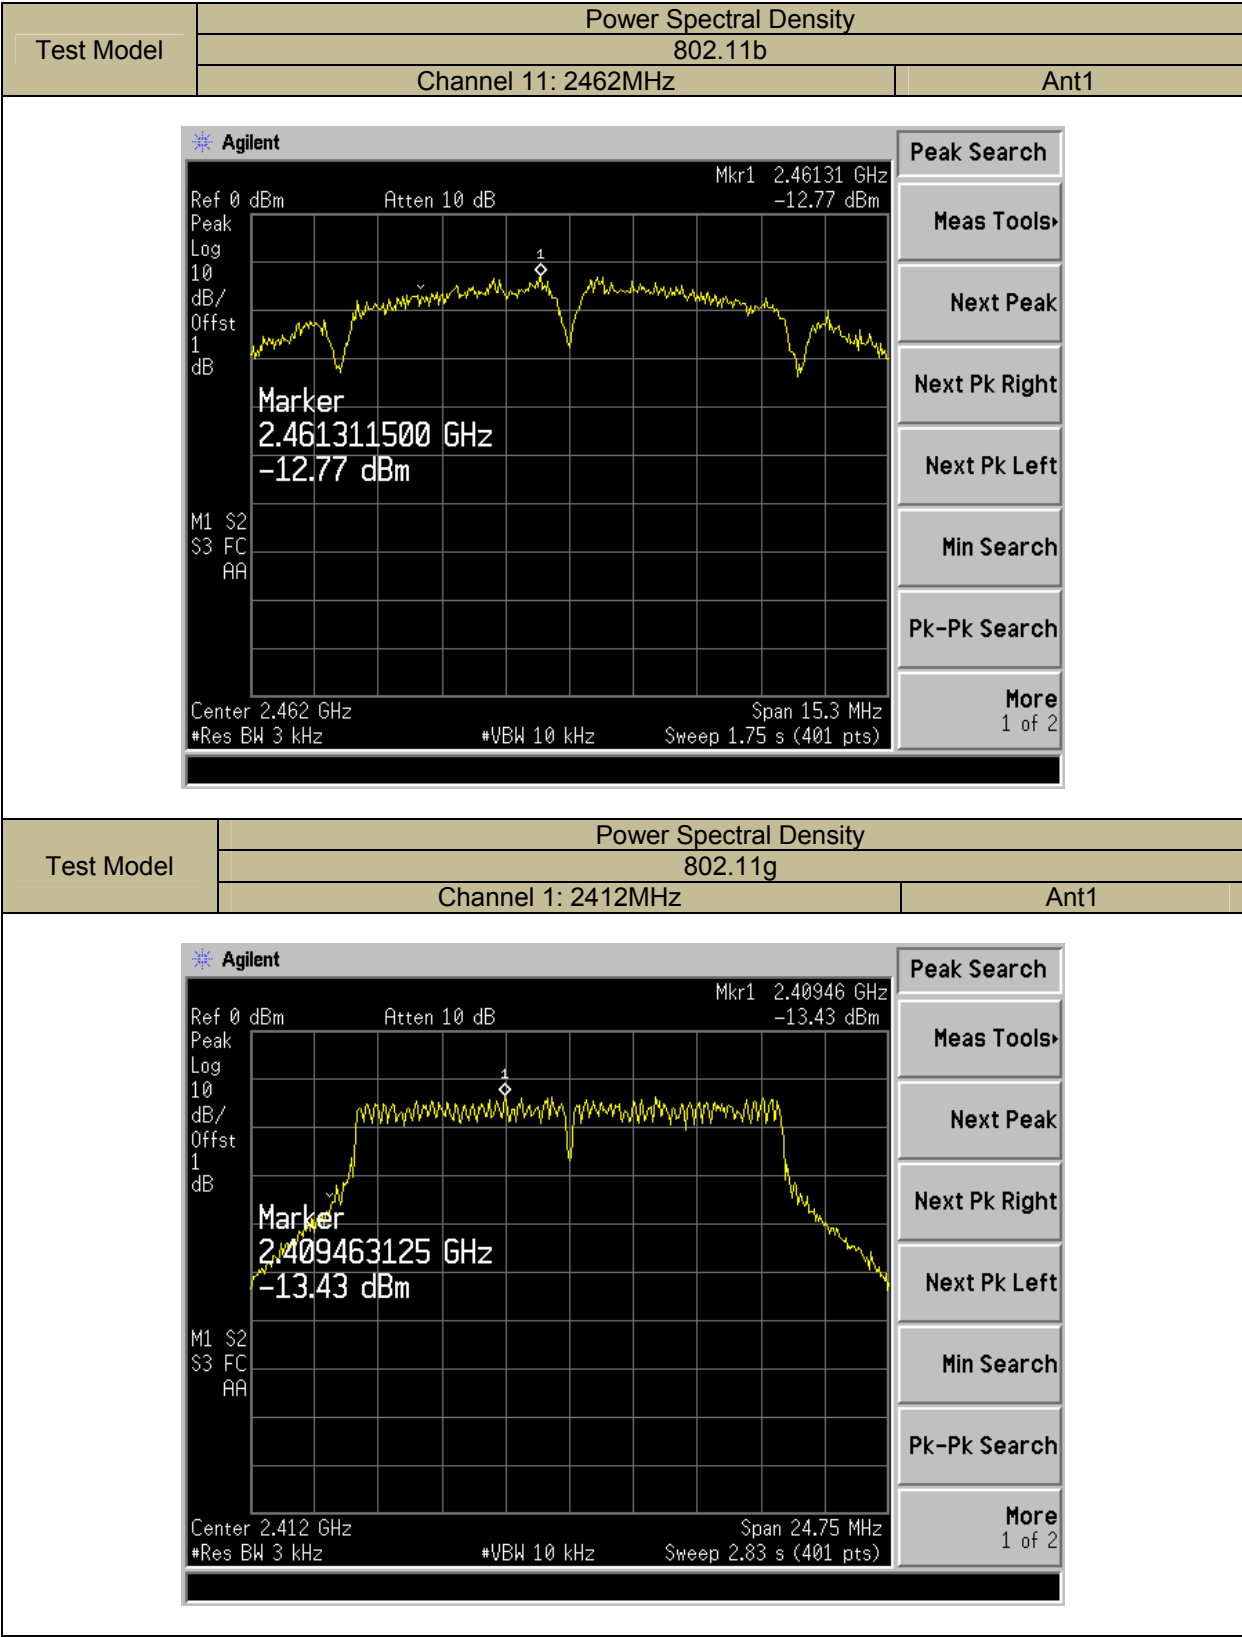


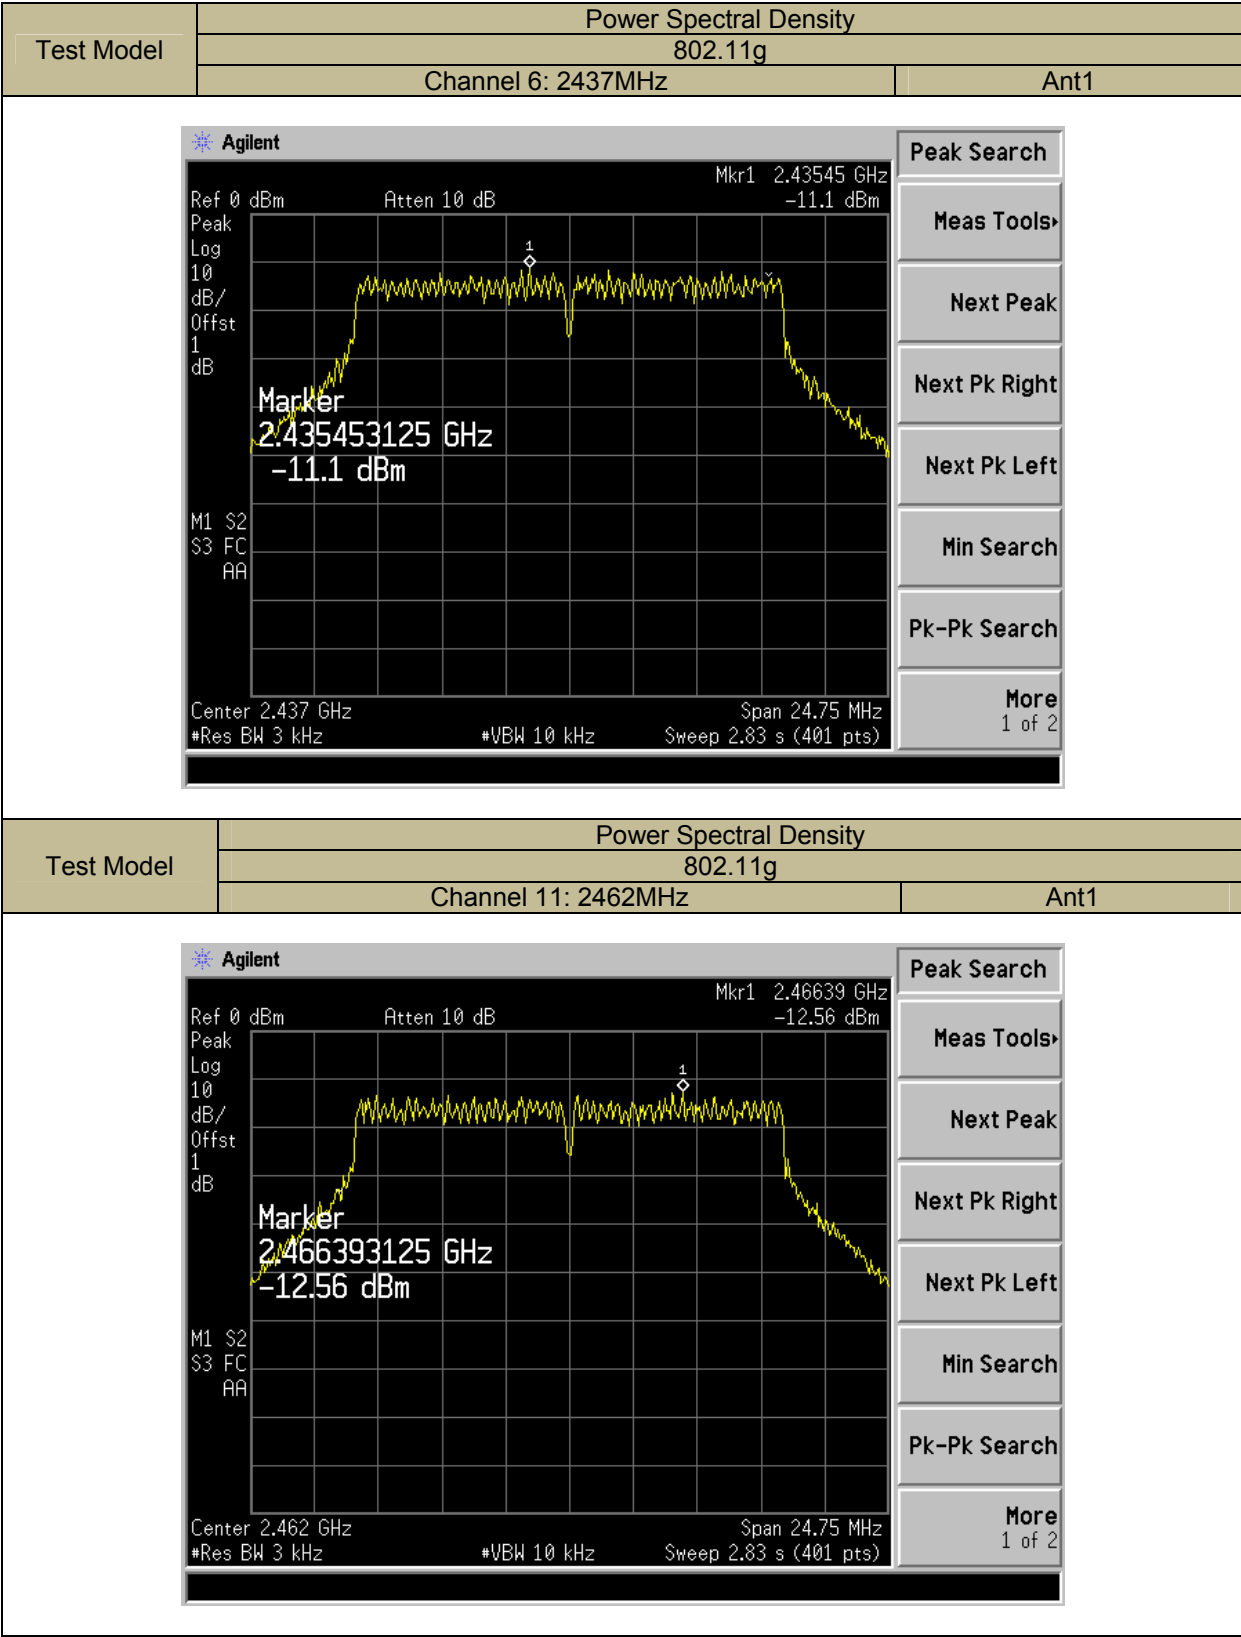


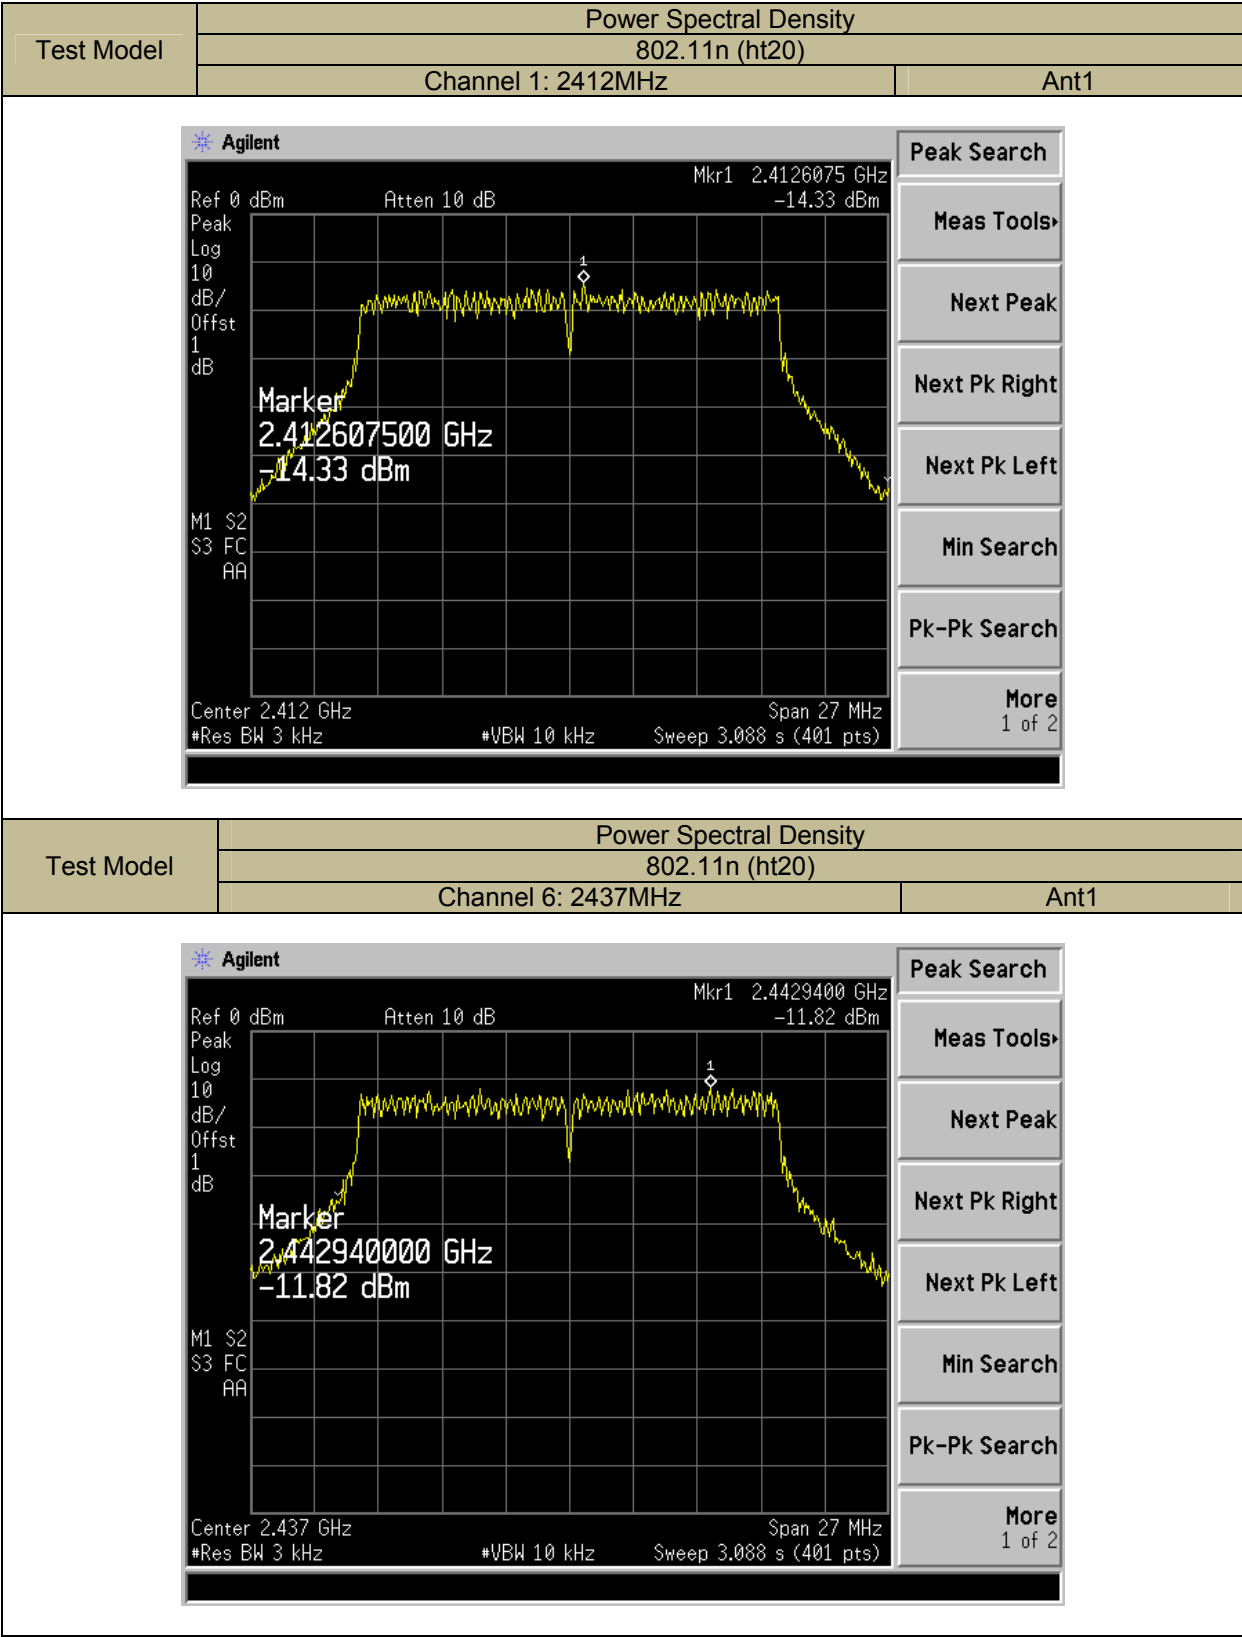


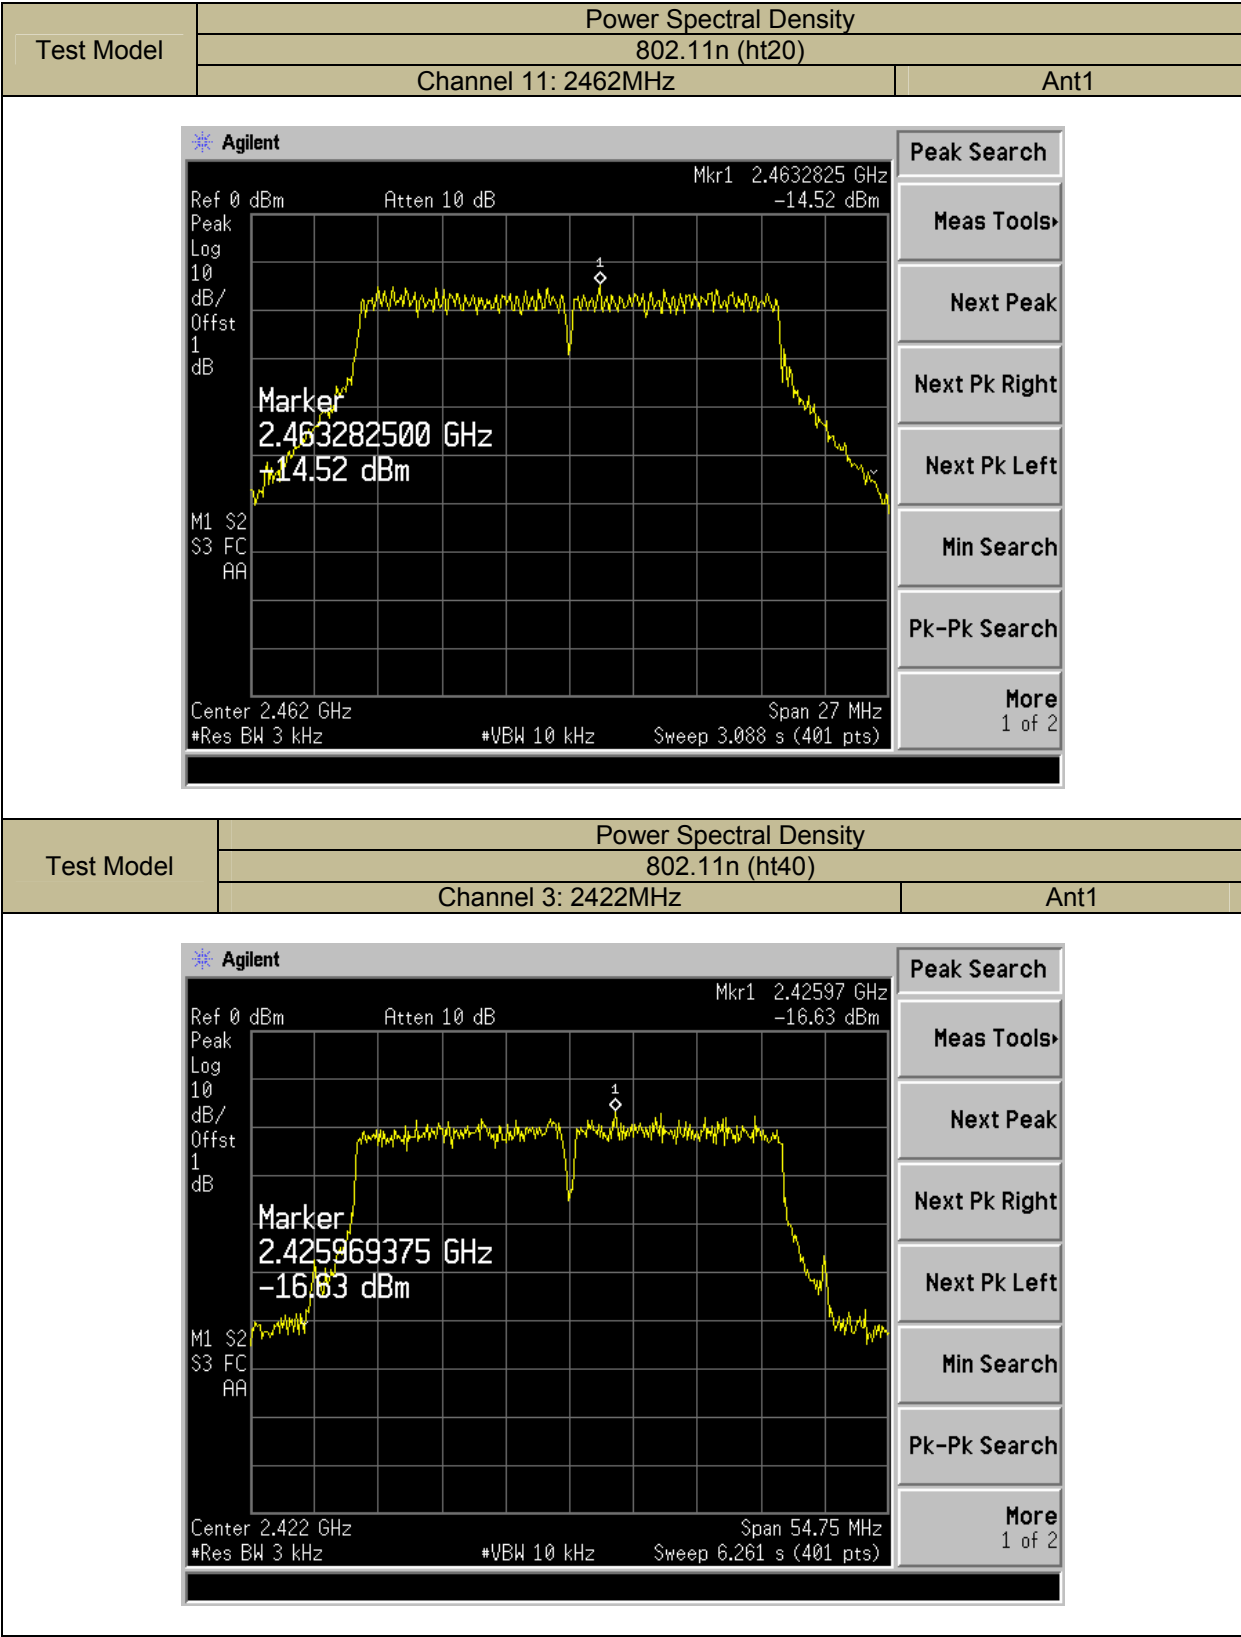



Ant1Ant1


Ant2 Port

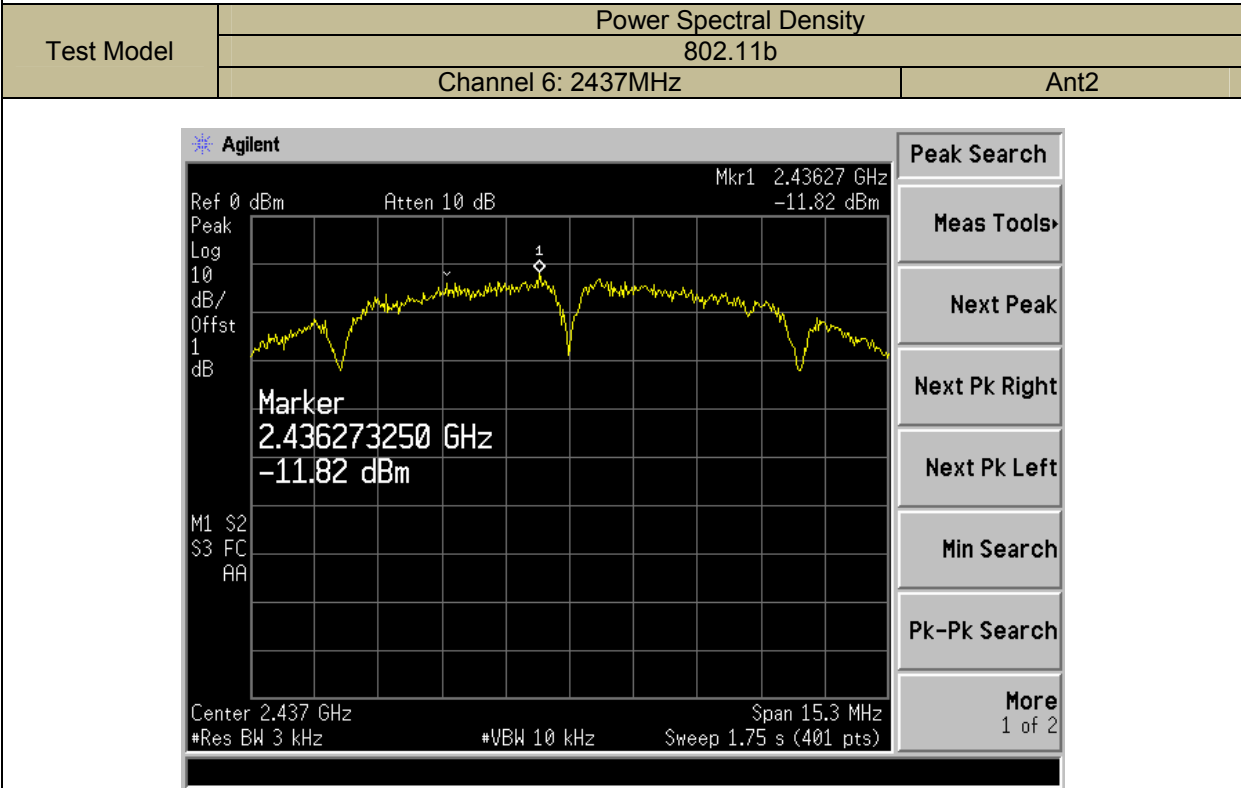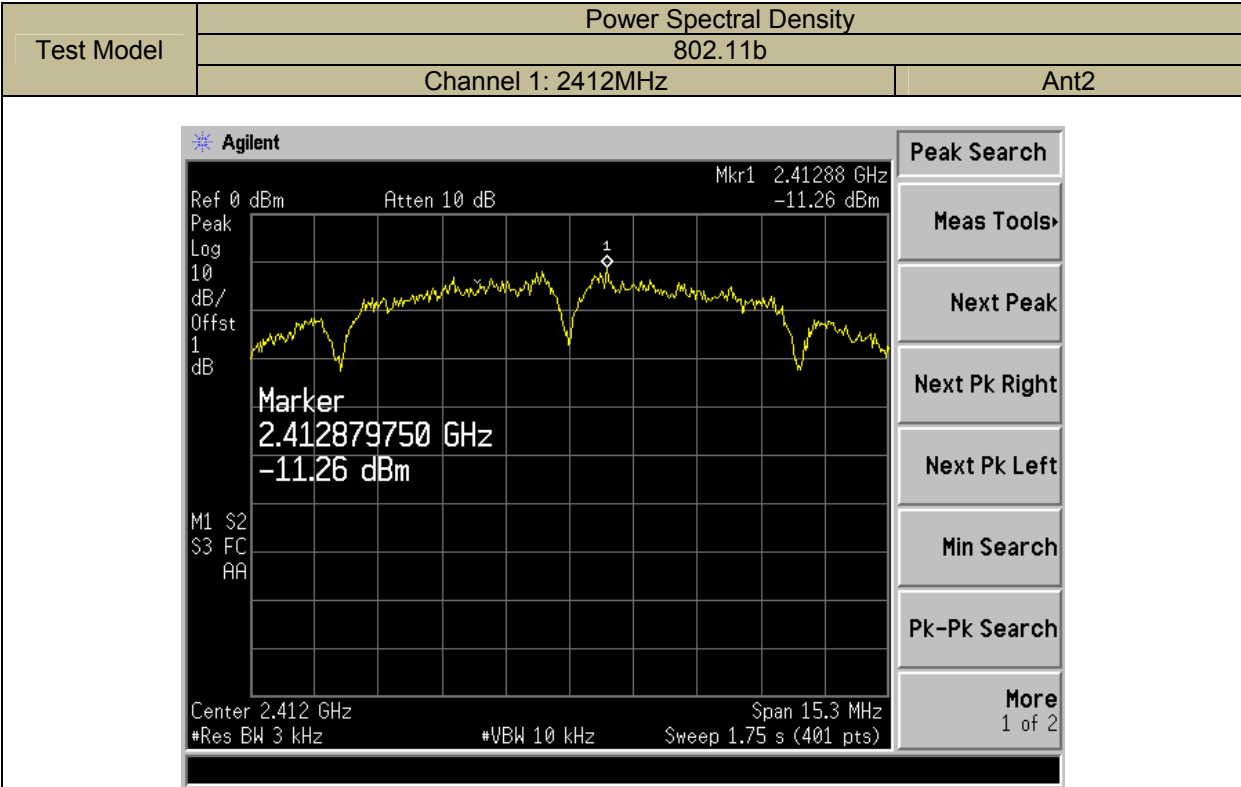

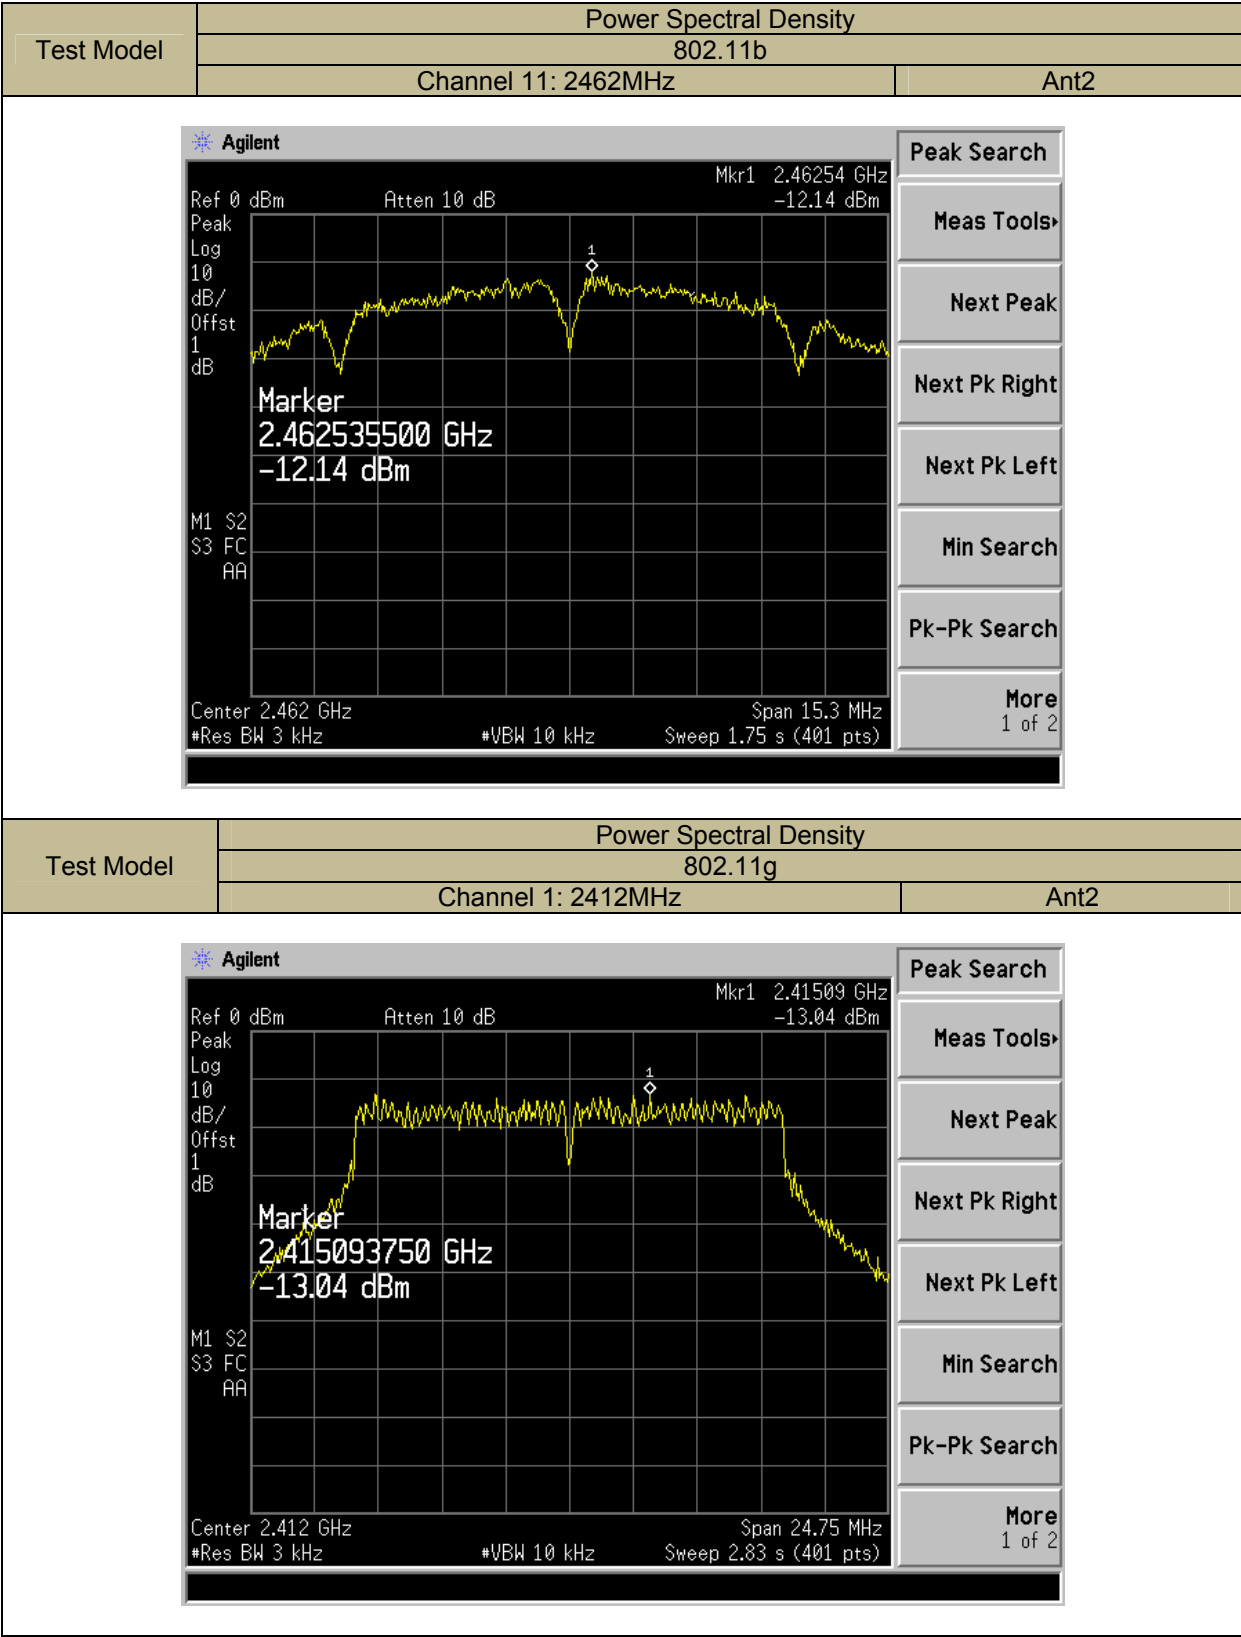


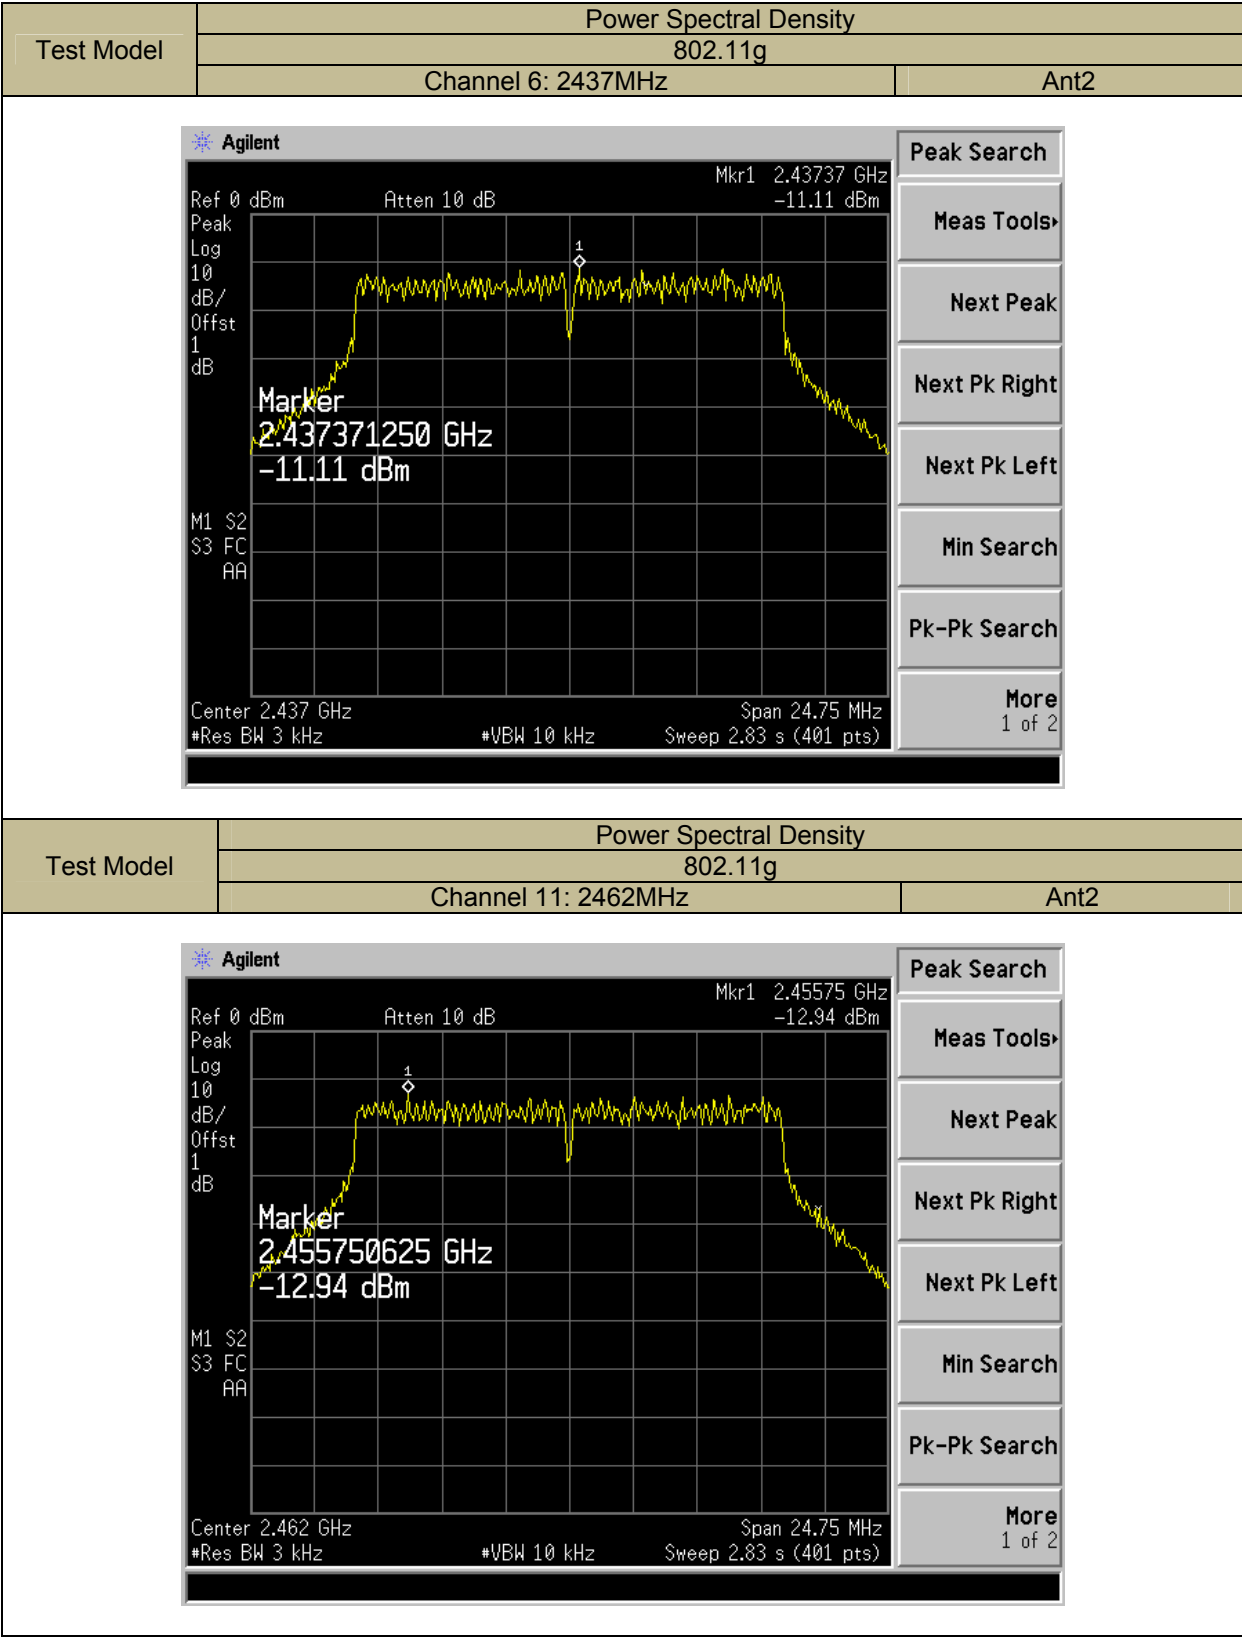

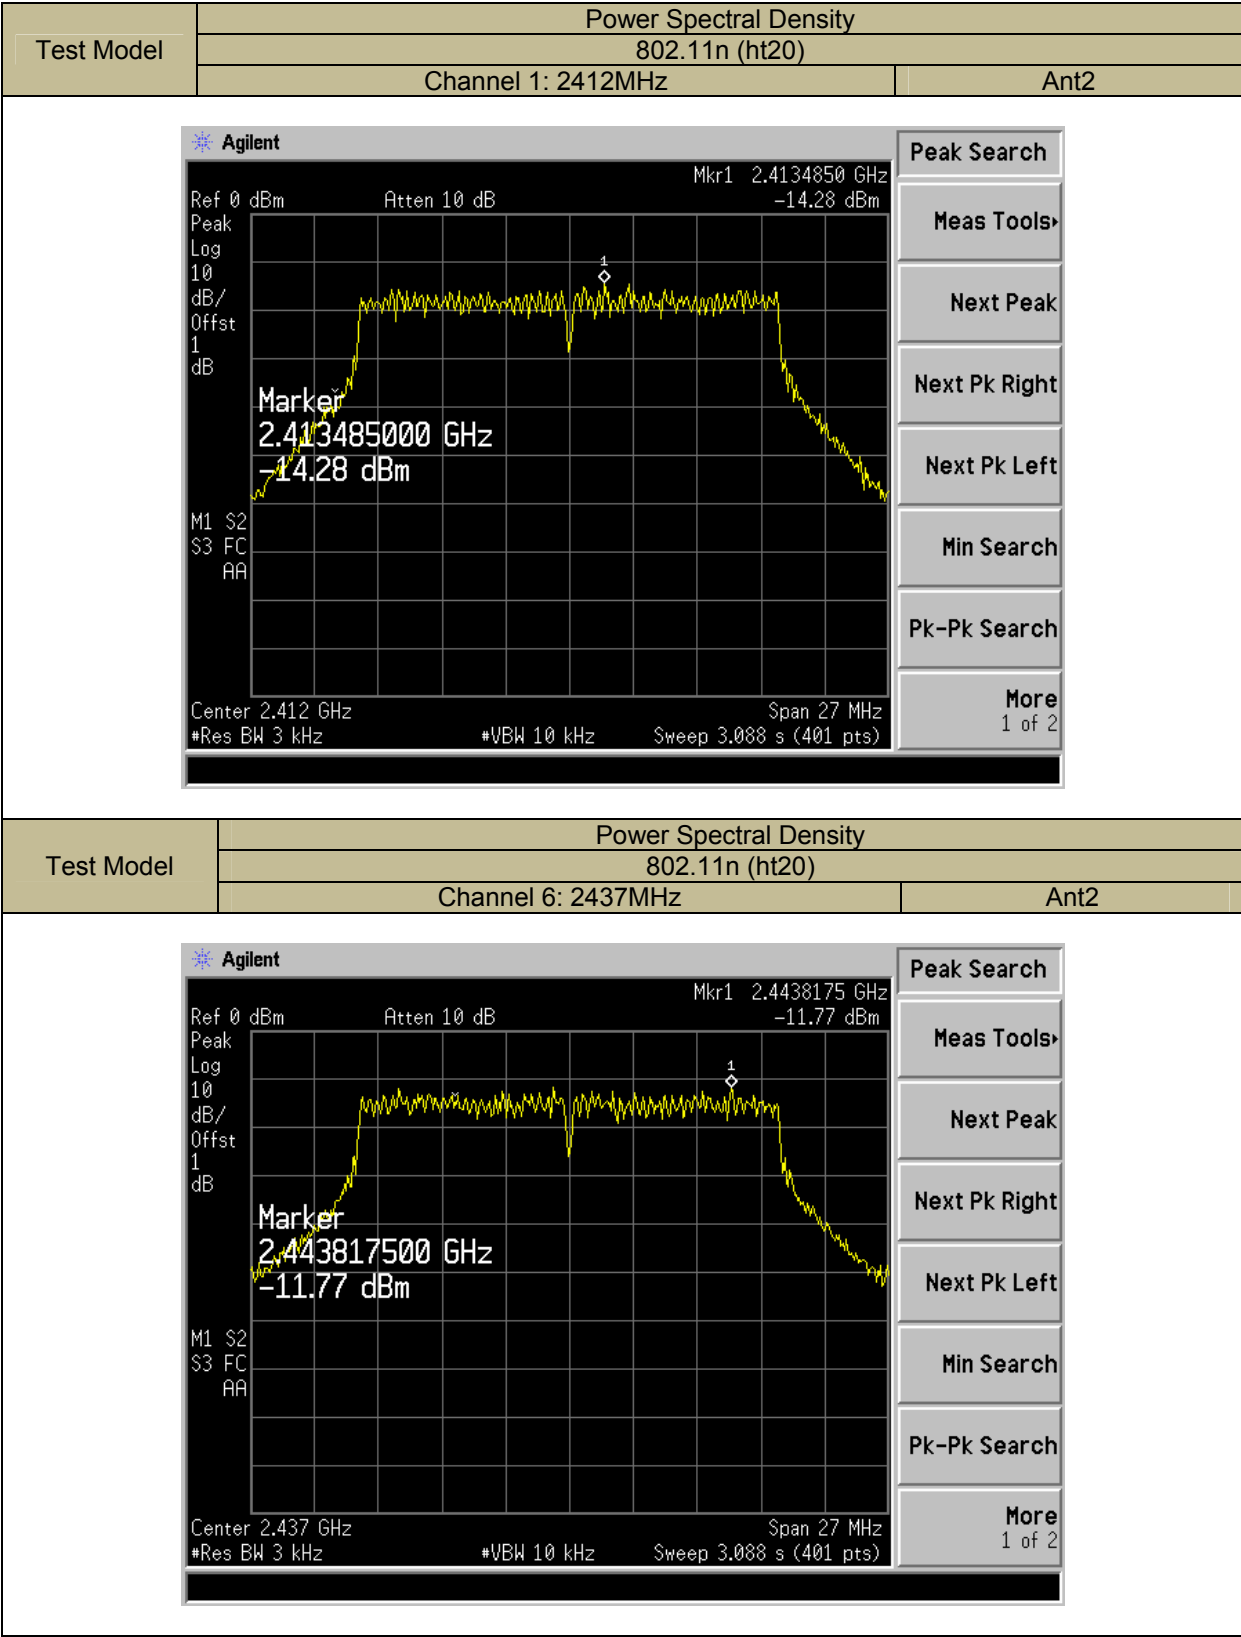


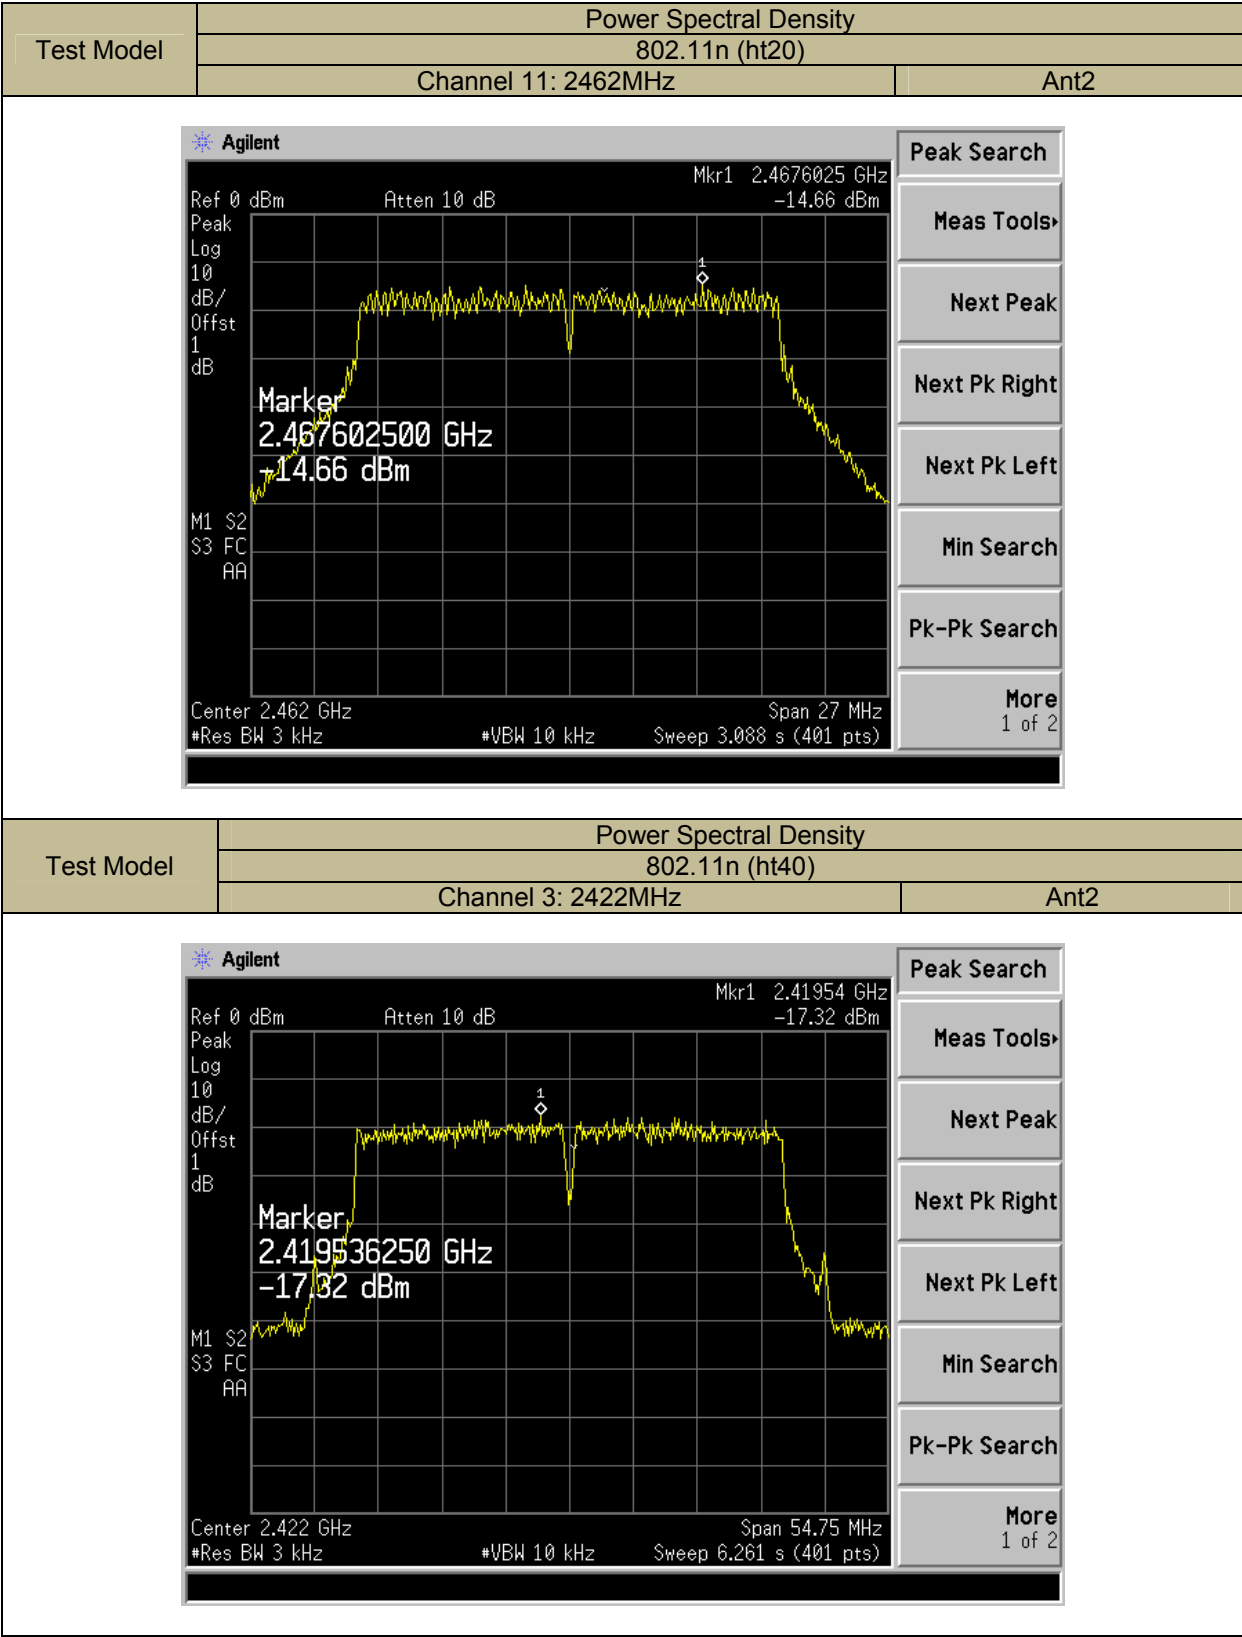

Test Model	Power Spectral Density	
	802.11n (ht40)	
	Channel 6: 2437MHz	Ant2

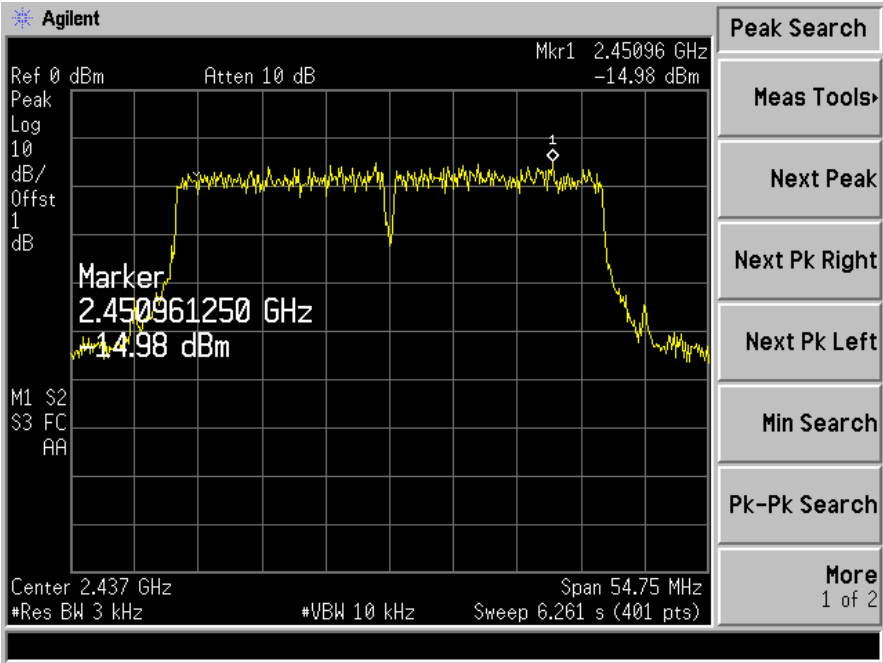

Test Model	Power Spectral Density	
	802.11n (ht40)	
	Channel 9: 2452MHz	Ant2

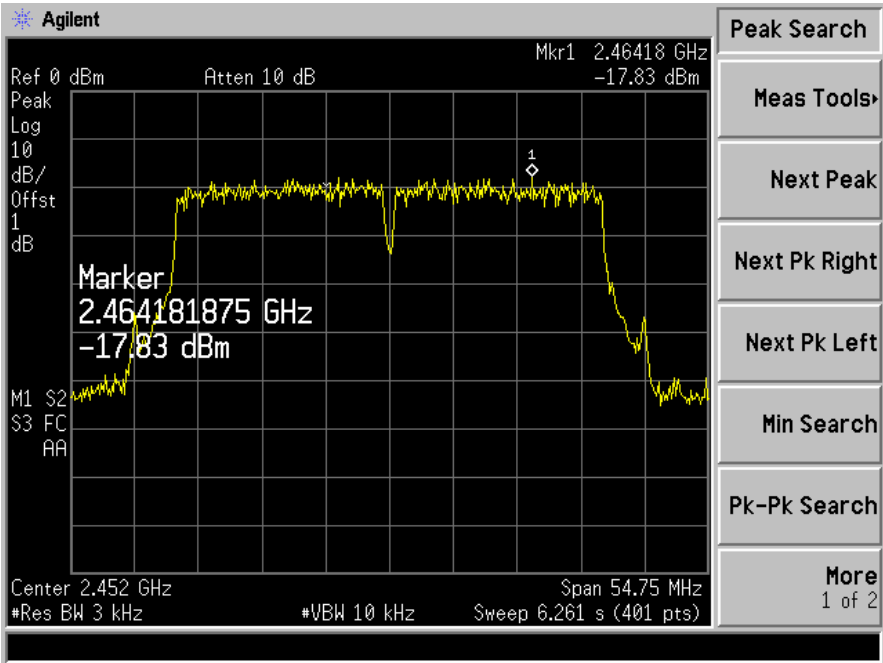

6.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

6.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r02

6.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

6.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

6.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.



Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

6.4.5 Test Results


Ant1 Port

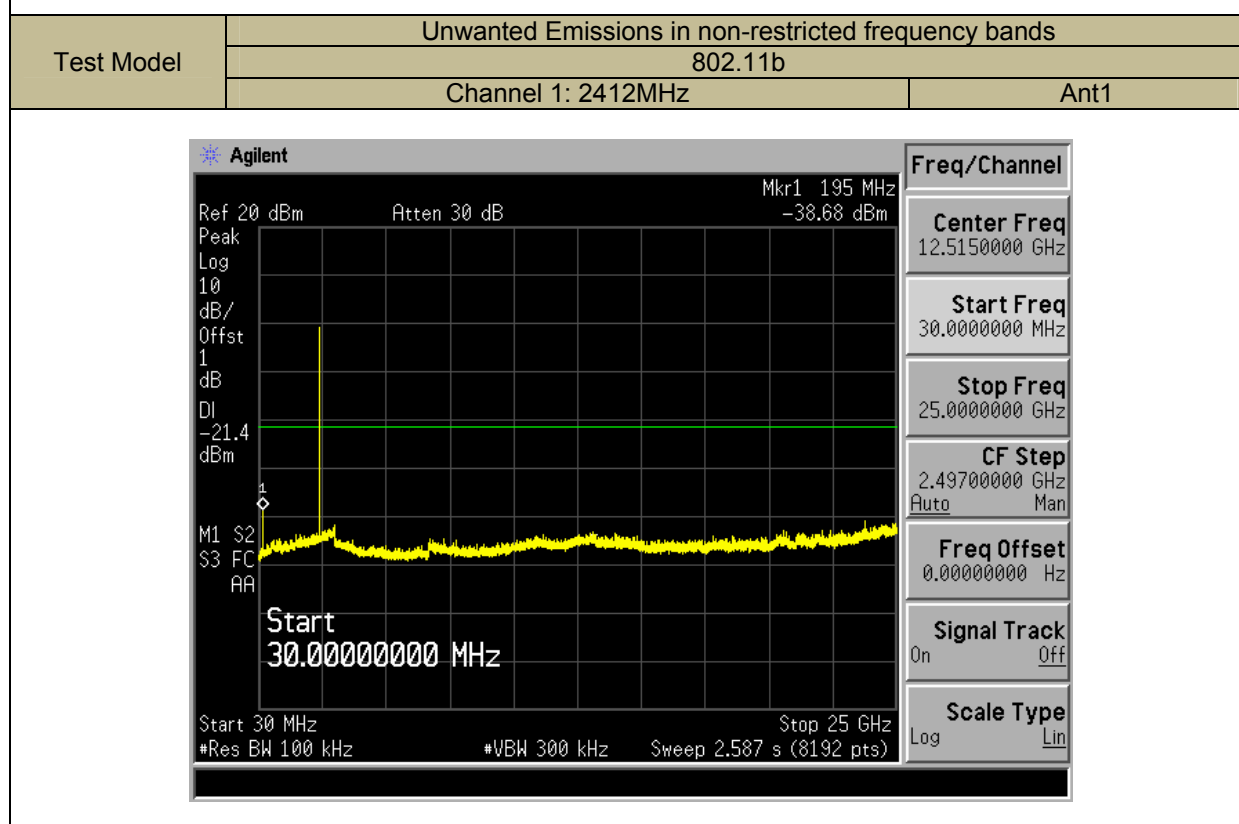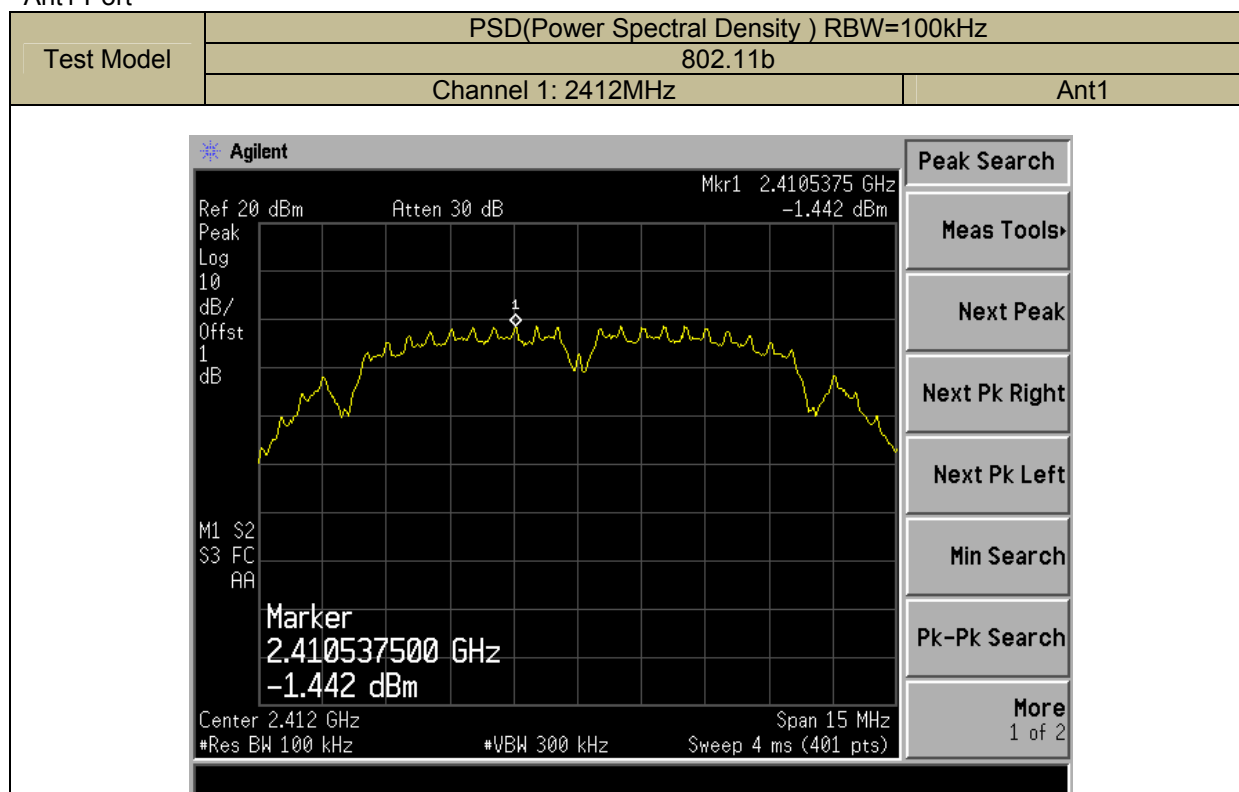


Test Model	PSD(Power Spectral Density) RBW=100kHz	
	802.11b	
	Channel 6: 2437MHz	Ant1

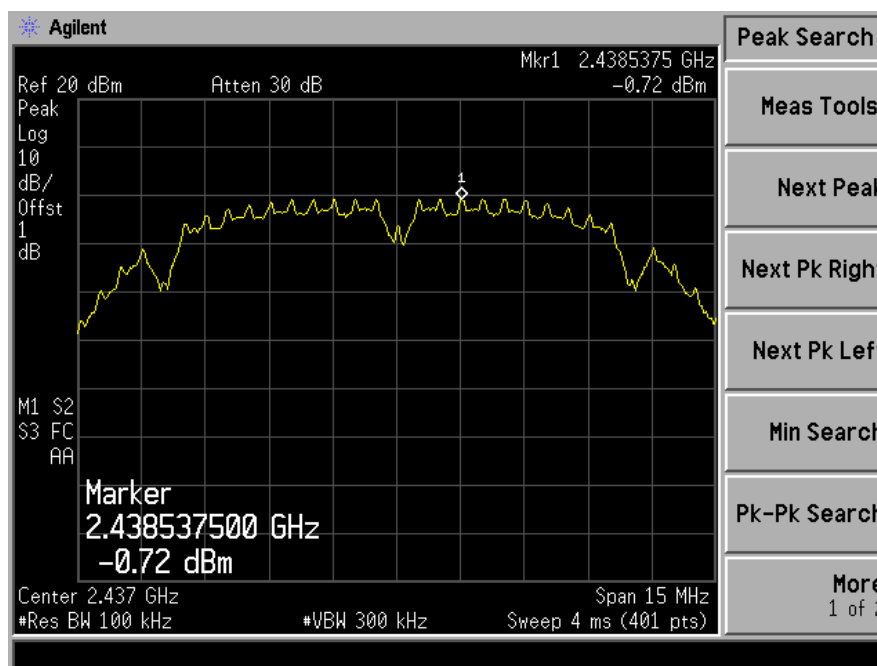


Test Model	Unwanted Emissions in non-restricted frequency bands	
	802.11b	
	Channel 6: 2437MHz	Ant1

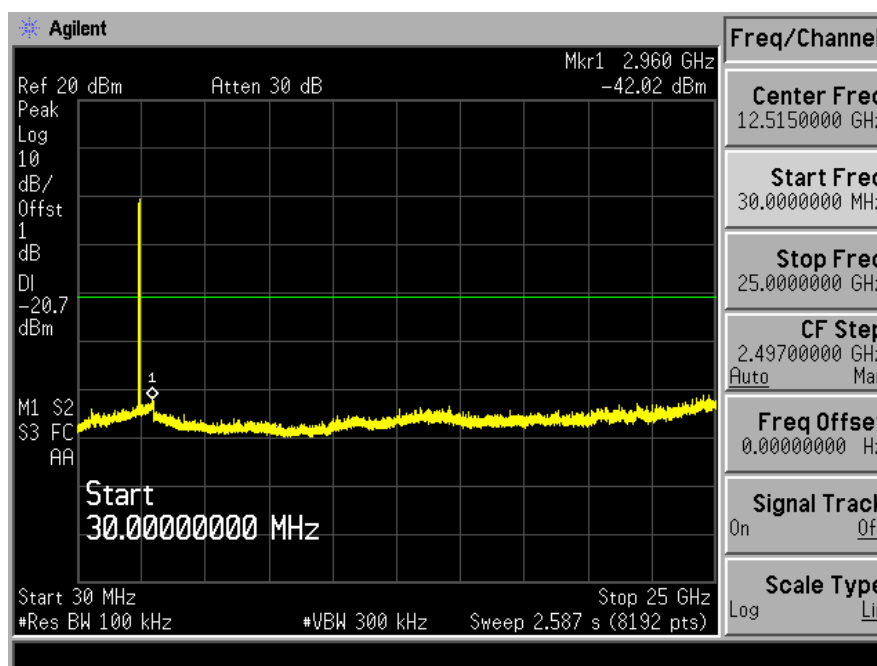


Test Model	PSD(Power Spectral Density) RBW=100kHz	
	802.11b	
	Channel 11: 2462MHz	Ant1

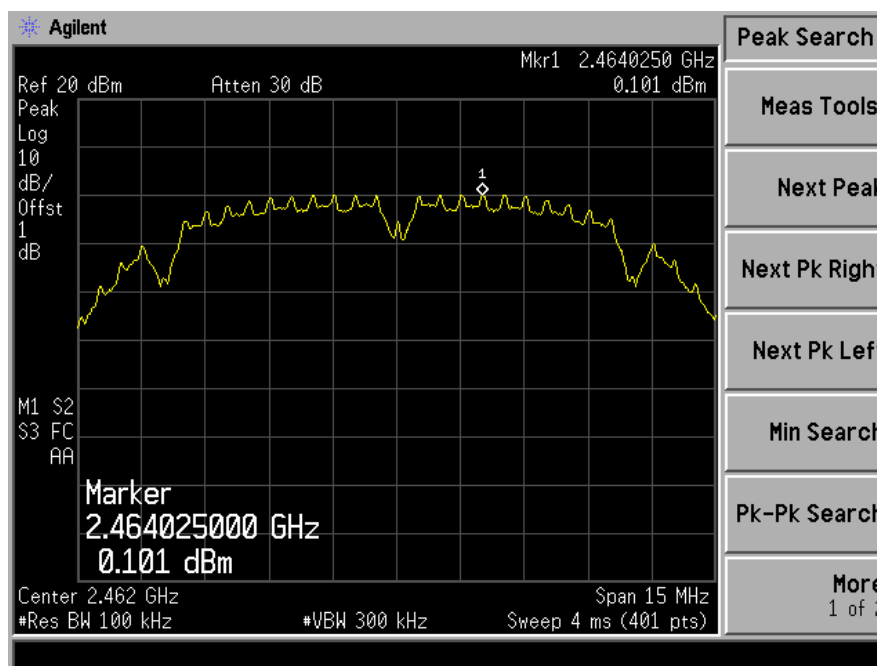


Test Model	Unwanted Emissions in non-restricted frequency bands	
	802.11b	
	Channel 11: 2462MHz	Ant1

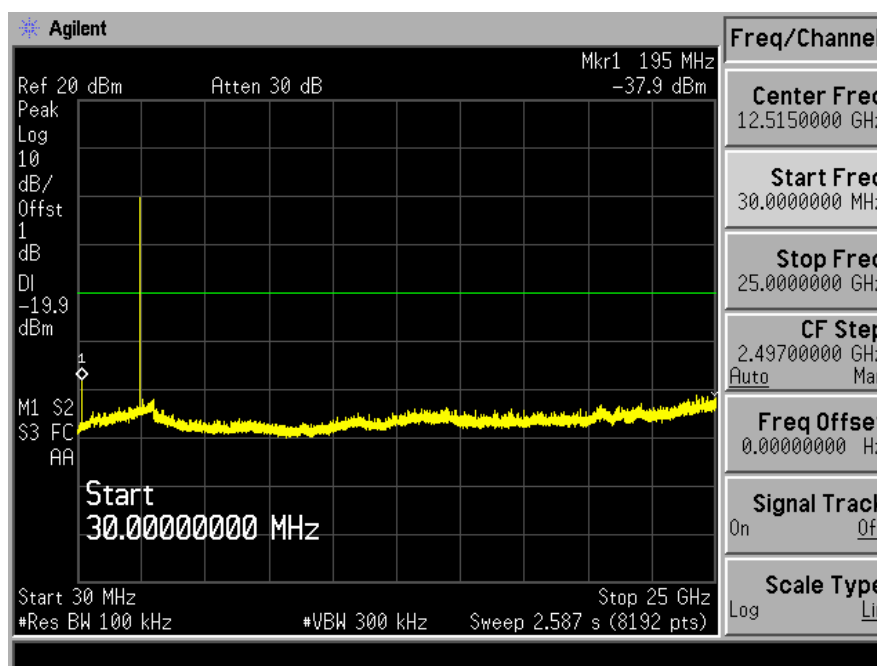


Test Model	Band edge	
	802.11b	
	Channel 1: 2412MHz	Ant1

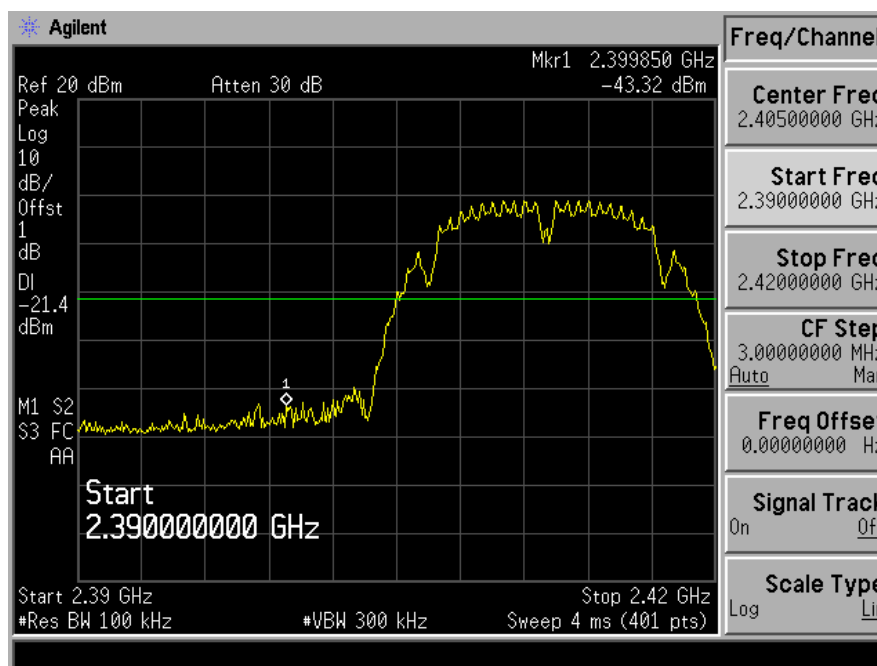


Test Model	Band edge	
	802.11b	
	Channel 11: 2462MHz	Ant1

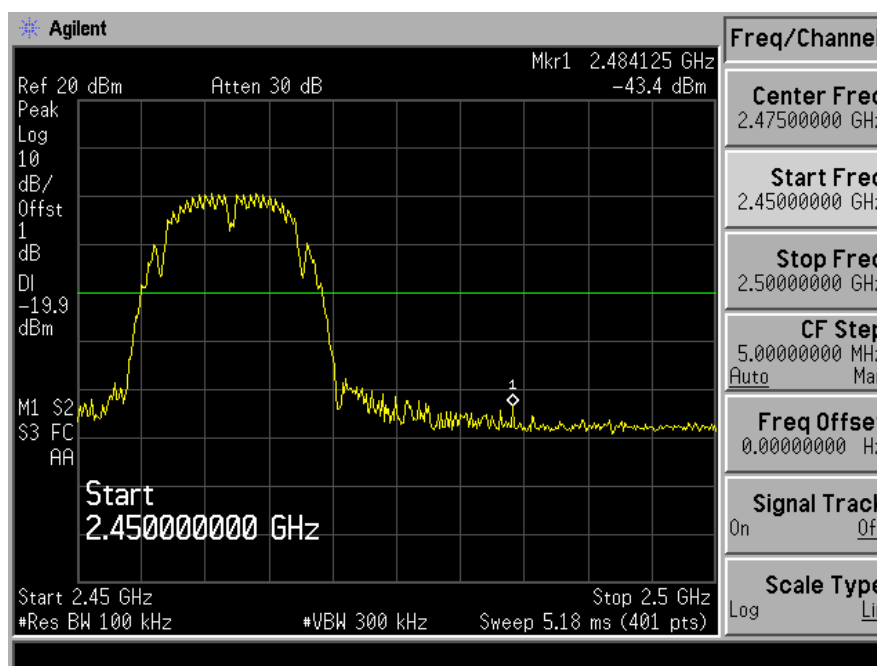


Ant2 port

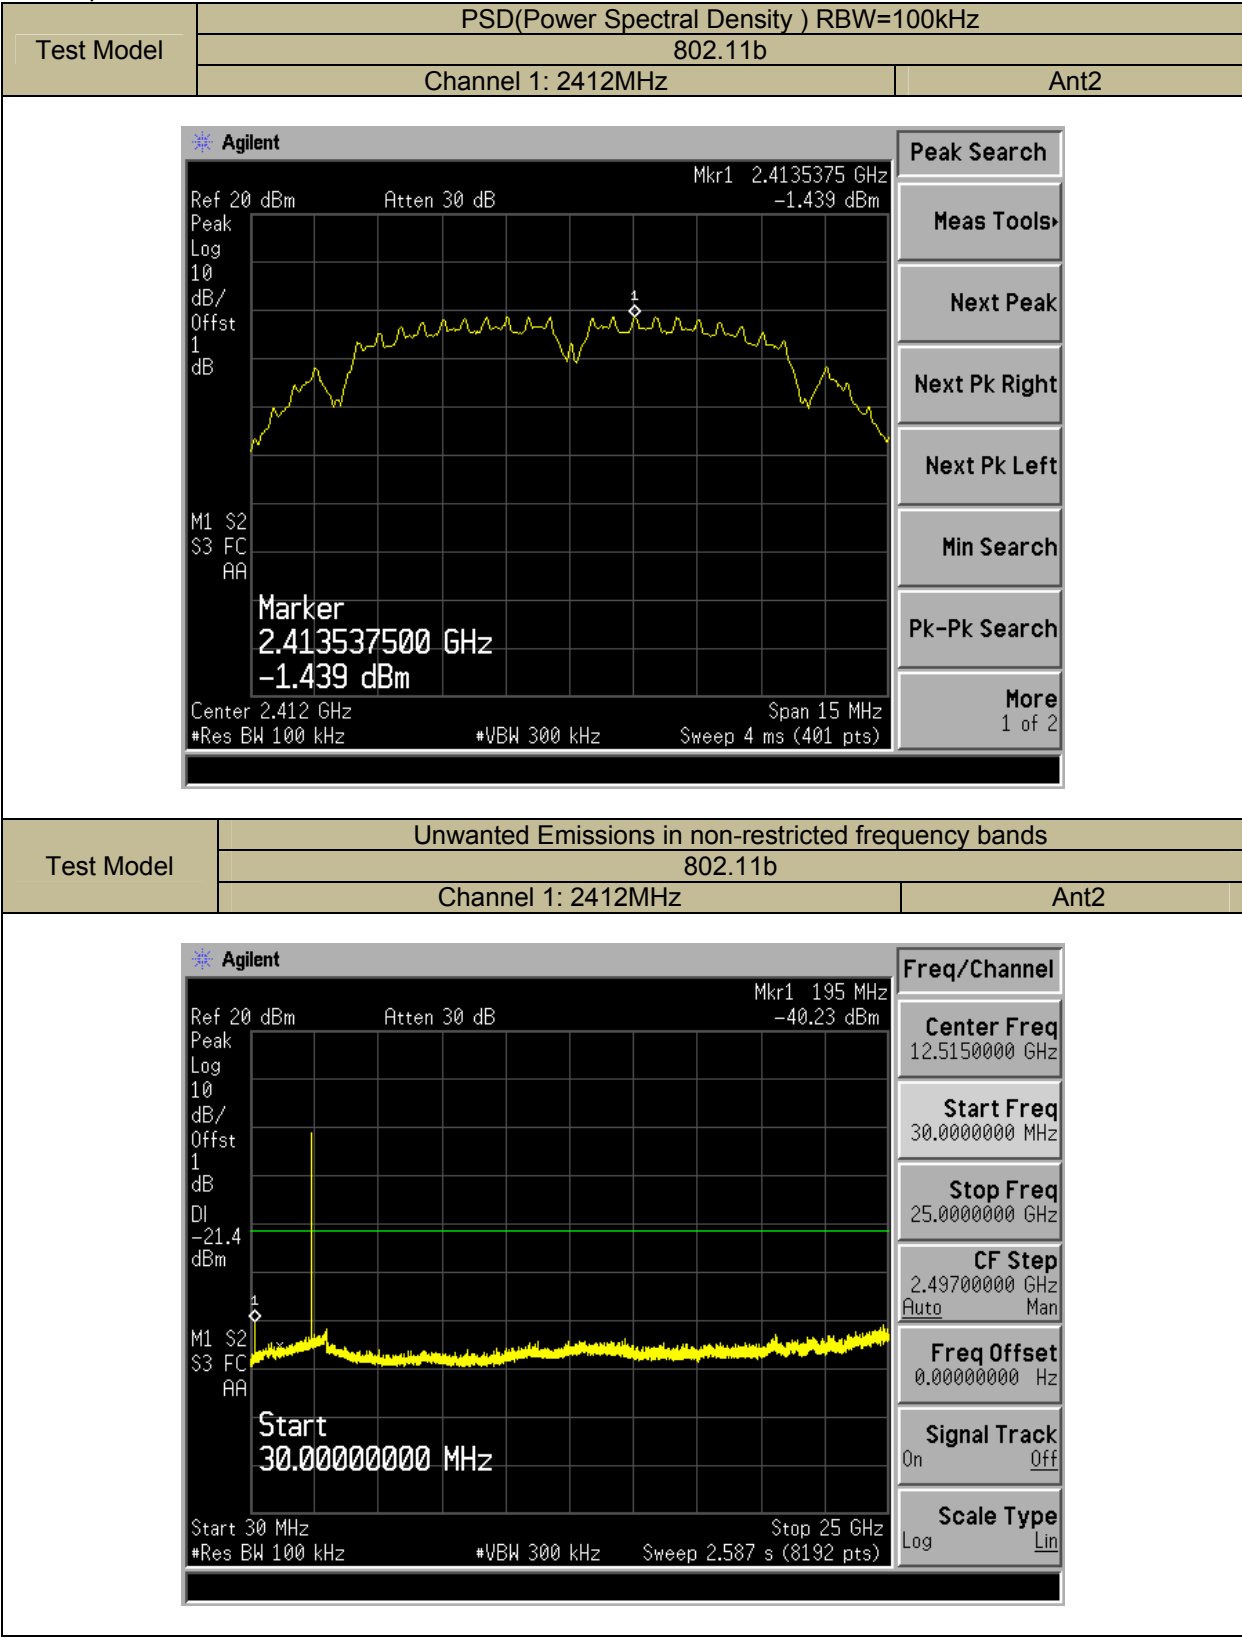


Test Model	PSD(Power Spectral Density) RBW=100kHz	
	802.11b	
	Channel 6: 2437MHz	Ant2

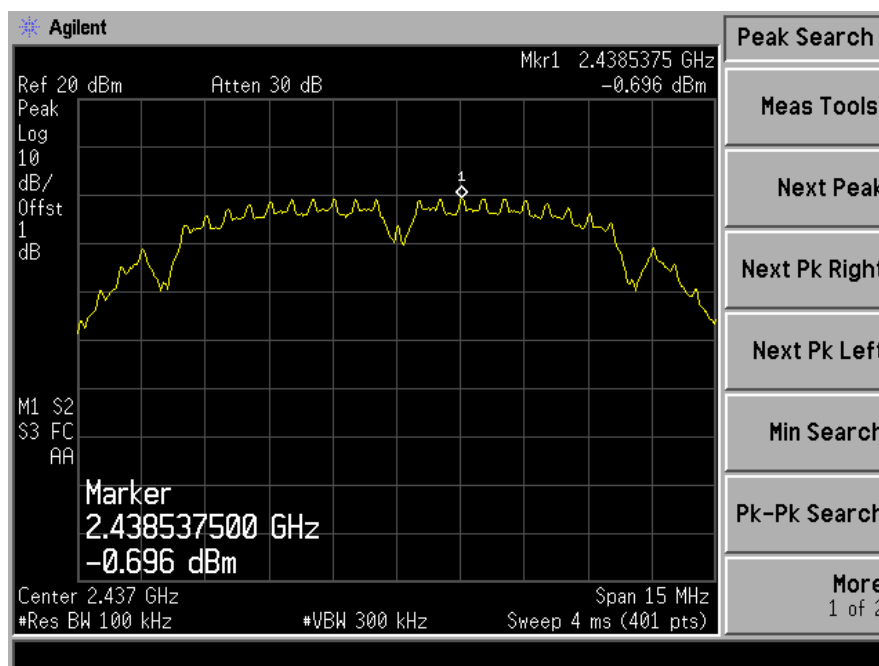


Test Model	Unwanted Emissions in non-restricted frequency bands	
	802.11b	
	Channel 6: 2437MHz	Ant2

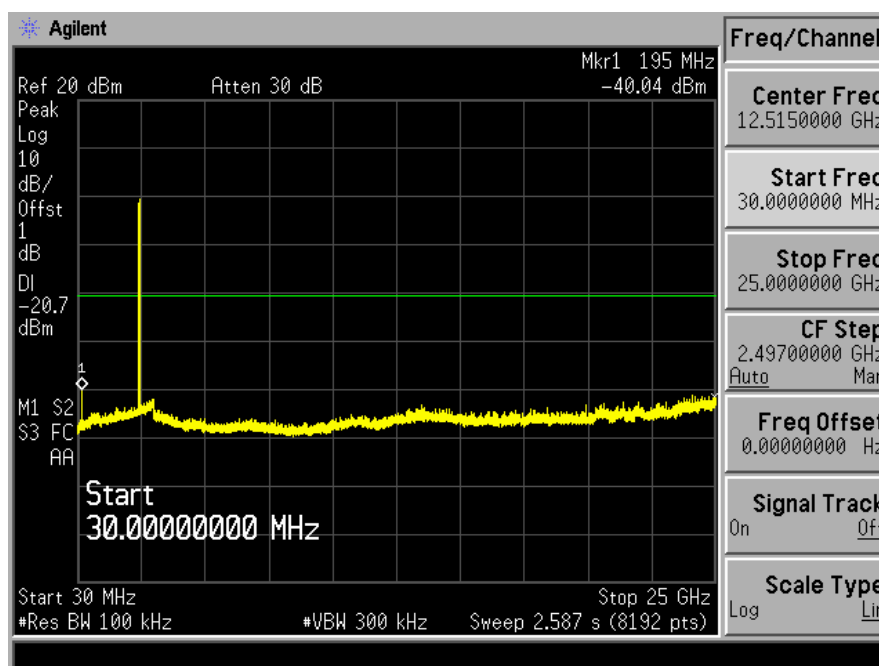


Test Model	PSD(Power Spectral Density) RBW=100kHz	
	802.11b	
	Channel 11: 2462MHz	Ant2

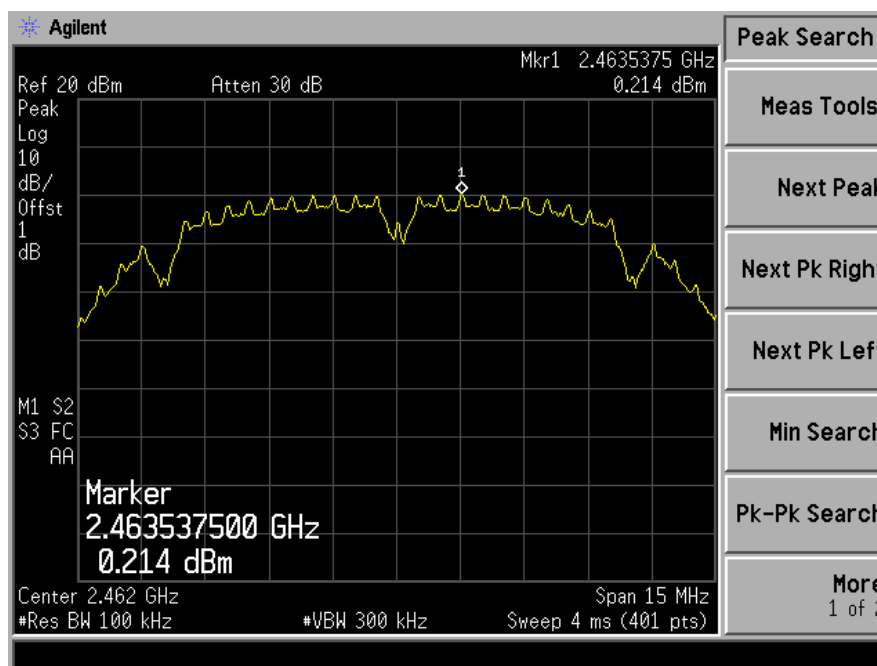


Test Model	Unwanted Emissions in non-restricted frequency bands	
	802.11b	
	Channel 11: 2462MHz	Ant2

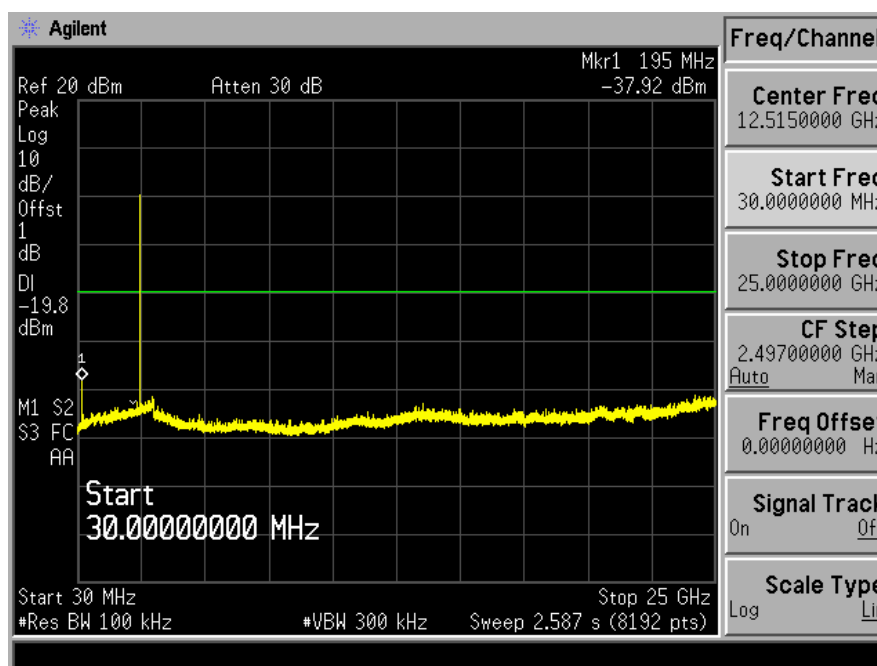

Test Model	Band edge	
	802.11b	
	Channel 1: 2412MHz	Ant2

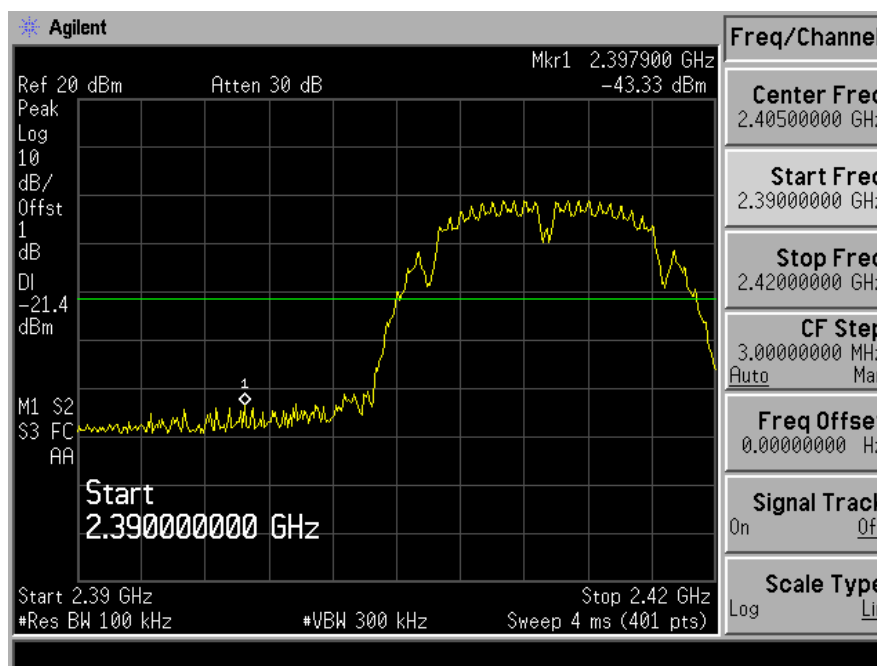

Test Model	Band edge	
	802.11b	
	Channel 11: 2462MHz	Ant2

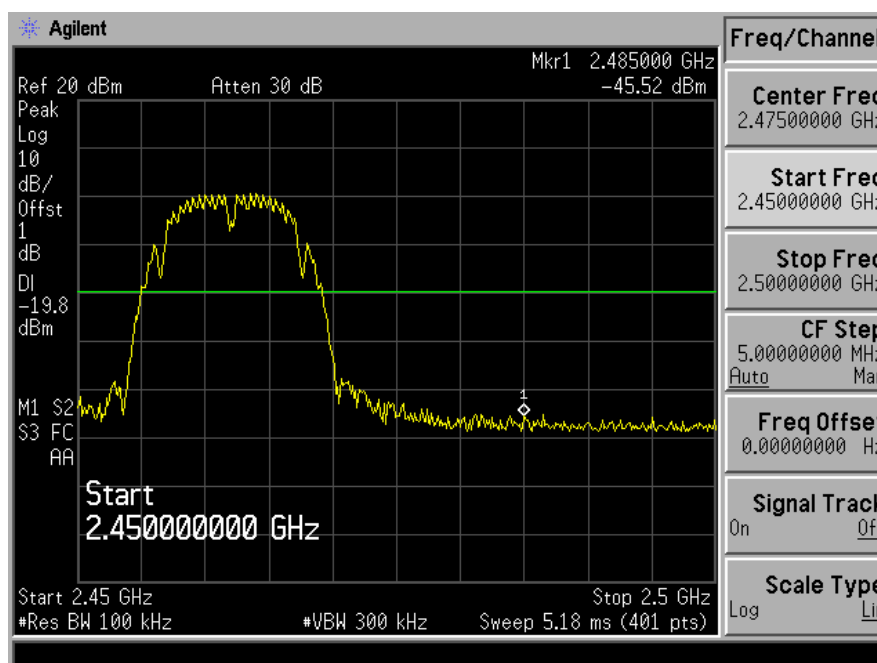

6.5 RADIATED SPURIOUS EMISSION

6.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r02

6.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $\text{RBWCF [dB]} = 10 \cdot \lg(100 \text{ [kHz]} / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

6.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

6.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW \geq RBW for peak measurement

VBW = 10Hz for Average measurement

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

6.5.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	24°C	Test Date:	July 8, 2015
Humidity:	53 %	Test By:	KINGKONG
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

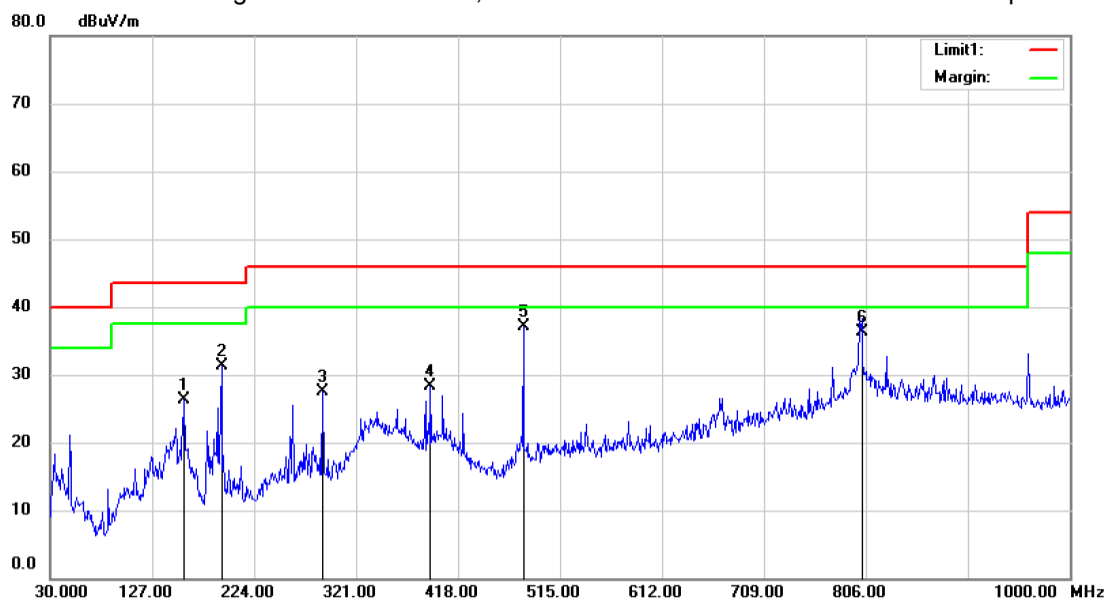

Site 3m Chamber #3

Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11b TX Chann1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		157.0700	44.91	-18.54	26.37	43.50	-17.13	QP		
2		192.9600	48.40	-17.01	31.39	43.50	-12.11	QP		
3		288.9900	40.67	-13.13	27.54	46.00	-18.46	QP		
4		391.8100	37.70	-9.33	28.37	46.00	-17.63	QP		
5	*	480.0800	46.61	-9.53	37.08	46.00	-8.92	QP		
6		802.1200	39.07	-2.82	36.25	46.00	-9.75	QP		

*:Maximum data x:Over limit !:over margin

Operator:

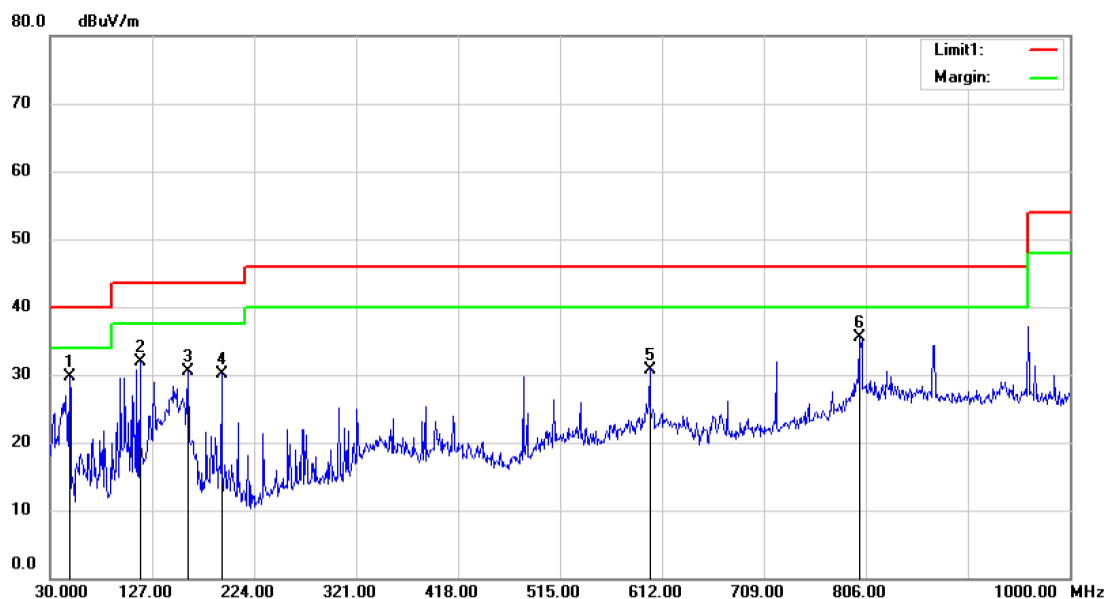


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
Mode:802.11b TX Channl1
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	48.4300	44.16	-14.40	29.76	40.00	-10.24	QP		
2		115.3600	47.22	-15.36	31.86	43.50	-11.64	QP		
3		160.9500	49.22	-18.79	30.43	43.50	-13.07	QP		
4		192.9600	47.17	-17.01	30.16	43.50	-13.34	QP		
5		600.3600	37.79	-6.99	30.80	46.00	-15.20	QP		
6		800.1800	38.36	-2.87	35.49	46.00	-10.51	QP		

*:Maximum data x:Over limit !:over margin

Operator:

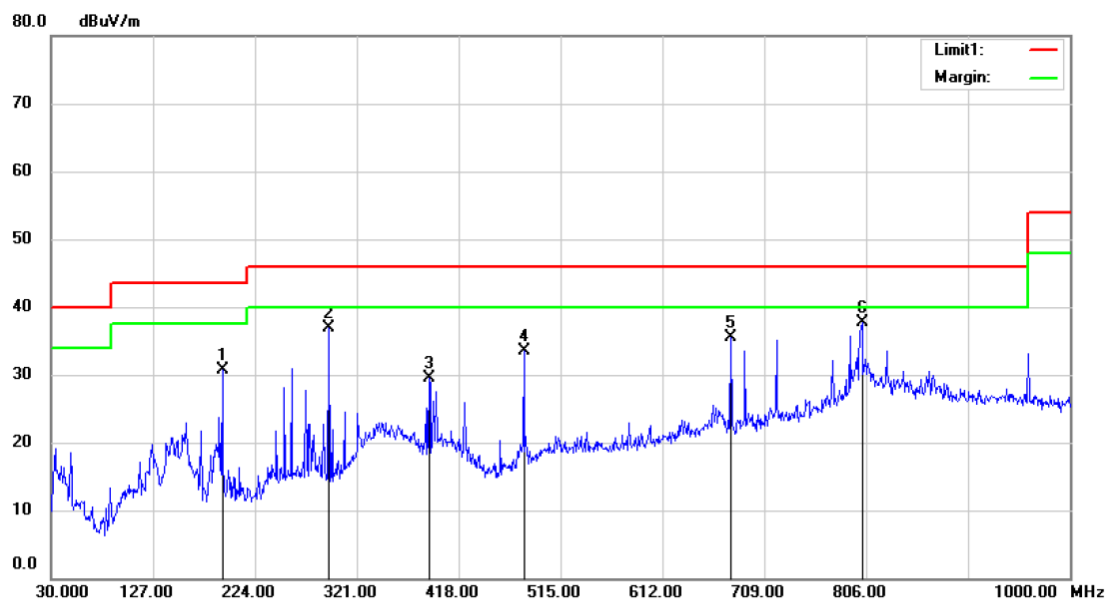

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11b TX Channl6

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		192.9600	47.72	-17.01	30.71	43.50	-12.79	QP		
2		294.8100	50.49	-13.50	36.99	46.00	-9.01	QP		
3		389.8700	38.85	-9.44	29.41	46.00	-16.59	QP		
4		480.0800	42.94	-9.53	33.41	46.00	-12.59	QP		
5		676.9900	41.68	-6.22	35.46	46.00	-10.54	QP		
6	*	802.1200	40.60	-2.82	37.78	46.00	-8.22	QP		

*:Maximum data x:Over limit !:over margin

Operator:

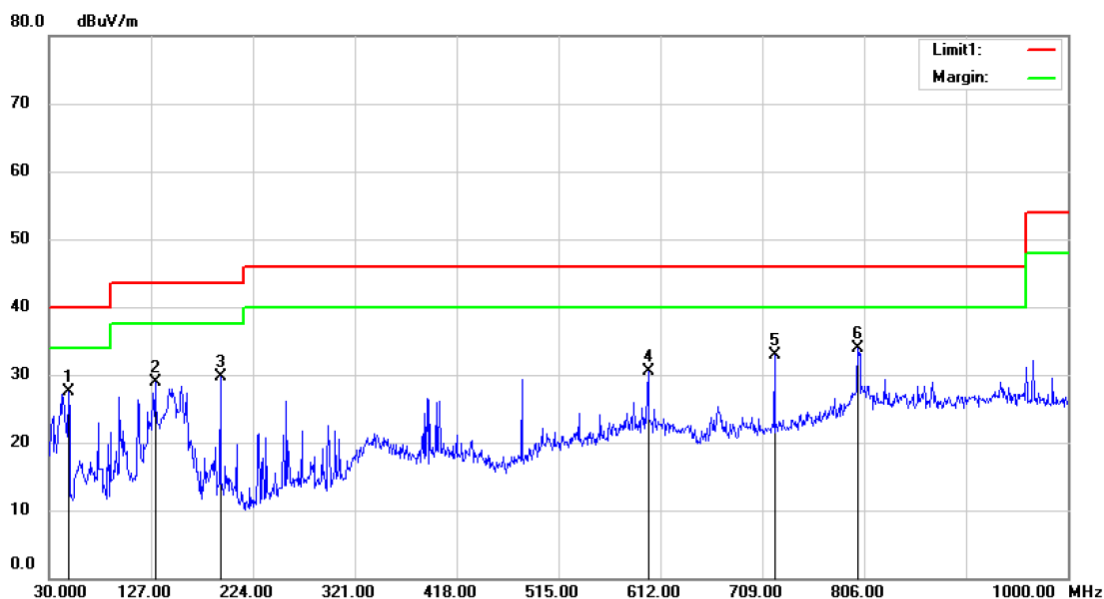

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11b TX Channl6

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.4300	41.90	-14.40	27.50	40.00	-12.50	QP		
2		130.8800	46.17	-17.30	28.87	43.50	-14.63	QP		
3		192.9600	46.62	-17.01	29.61	43.50	-13.89	QP		
4		600.3600	37.48	-6.99	30.49	46.00	-15.51	QP		
5		720.6400	38.25	-5.33	32.92	46.00	-13.08	QP		
6	*	800.1800	36.81	-2.87	33.94	46.00	-12.06	QP		

*:Maximum data x:Over limit !:over margin

Operator:

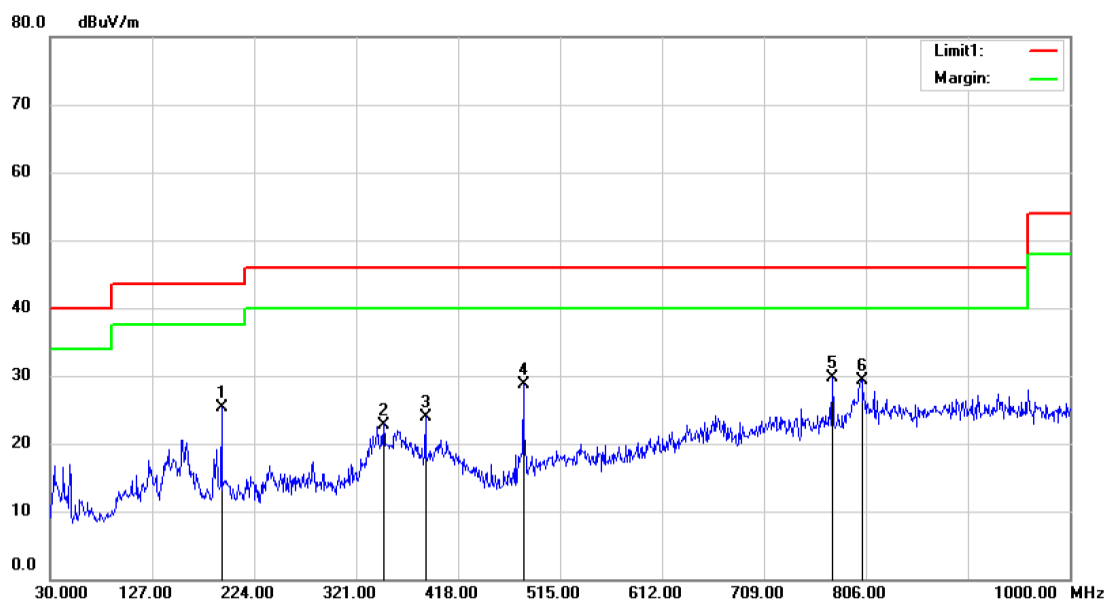


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
Mode:802.11b TX Chann11
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		192.9600	42.40	-17.01	25.39	43.50	-18.11	QP		
2		347.1900	34.65	-11.85	22.80	46.00	-23.20	QP		
3		386.9600	33.61	-9.61	24.00	46.00	-22.00	QP		
4		480.0800	38.24	-9.53	28.71	46.00	-17.29	QP		
5	*	773.9900	33.46	-3.69	29.77	46.00	-16.23	QP		
6		802.1200	32.15	-2.82	29.33	46.00	-16.67	QP		

*:Maximum data x:Over limit !:over margin

Operator:

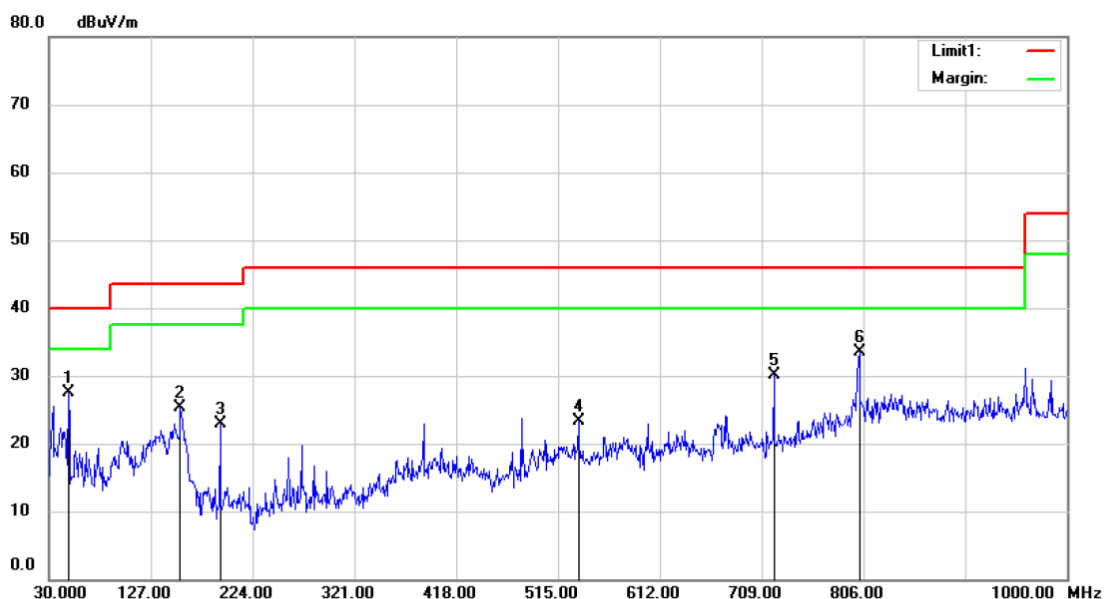

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

Mode:802.11b TX Chann11

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.4300	41.83	-14.40	27.43	40.00	-12.57	QP		
2		155.1300	43.64	-18.42	25.22	43.50	-18.28	QP		
3		192.9600	39.99	-17.01	22.98	43.50	-20.52	QP		
4		534.4000	30.78	-7.53	23.25	46.00	-22.75	QP		
5		720.6400	35.36	-5.33	30.03	46.00	-15.97	QP		
6	*	802.1200	36.40	-2.82	33.58	46.00	-12.42	QP		

*:Maximum data x:Over limit !:over margin

Operator:

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature: 24℃ Test Date: July 8, 2015
Humidity: 53 % Test By: KINGKONG
Test mode: 802.11b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
9908.65	V	55.16	44.95	74.00	54.00	-18.84	-9.05
10971.15	V	56.75	46.12	74.00	54.00	-17.25	-7.88
13559.29	V	57.25	43.50	74.00	54.00	-16.75	-10.5
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
10889.42	H	56.57	46.00	74.00	54.00	-17.43	-8.00
13668.26	H	56.93	41.24	74.00	54.00	-17.07	-12.76
14540.06	H	57.51	43.78	74.00	54.00	-16.49	-10.22

Temperature: 24℃ Test Date: July 8, 2015
Humidity: 53 % Test By: KINGKONG
Test mode: 802.11b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
11161.85	V	56.21	44.52	74.00	54.00	-17.79	-9.48
13395.83	V	56.67	41.50	74.00	54.00	-17.33	-12.5
14866.98	V	57.19	45.32	74.00	54.00	-16.81	-8.68
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
10399.03	H	55.62	41.91	74.00	54.00	-18.38	-12.09
11052.88	H	55.71	43.85	74.00	54.00	-18.29	-10.15
11652.24	H	53.94	44.99	74.00	54.00	-20.06	-9.01

Temperature: 24℃ Test Date: July 8, 2015
Humidity: 53 % Test By: KINGKONG
Test mode: 802.11b Frequency: Channel 11: 2462MHz


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
11172.85	V	57.27	45.36	74.00	54.00	-16.73	-8.64
13406.83	V	57.73	42.34	74.00	54.00	-16.27	-11.66
14877.98	V	58.25	46.16	74.00	54.00	-15.75	-7.84
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
10410.03	H	56.68	42.75	74.00	54.00	-17.32	-11.25
11063.88	H	56.77	44.69	74.00	54.00	-17.23	-9.31
11663.24	H	55.00	45.83	74.00	54.00	-19.00	-8.17


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Probe Factor +Cable Loss.


(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

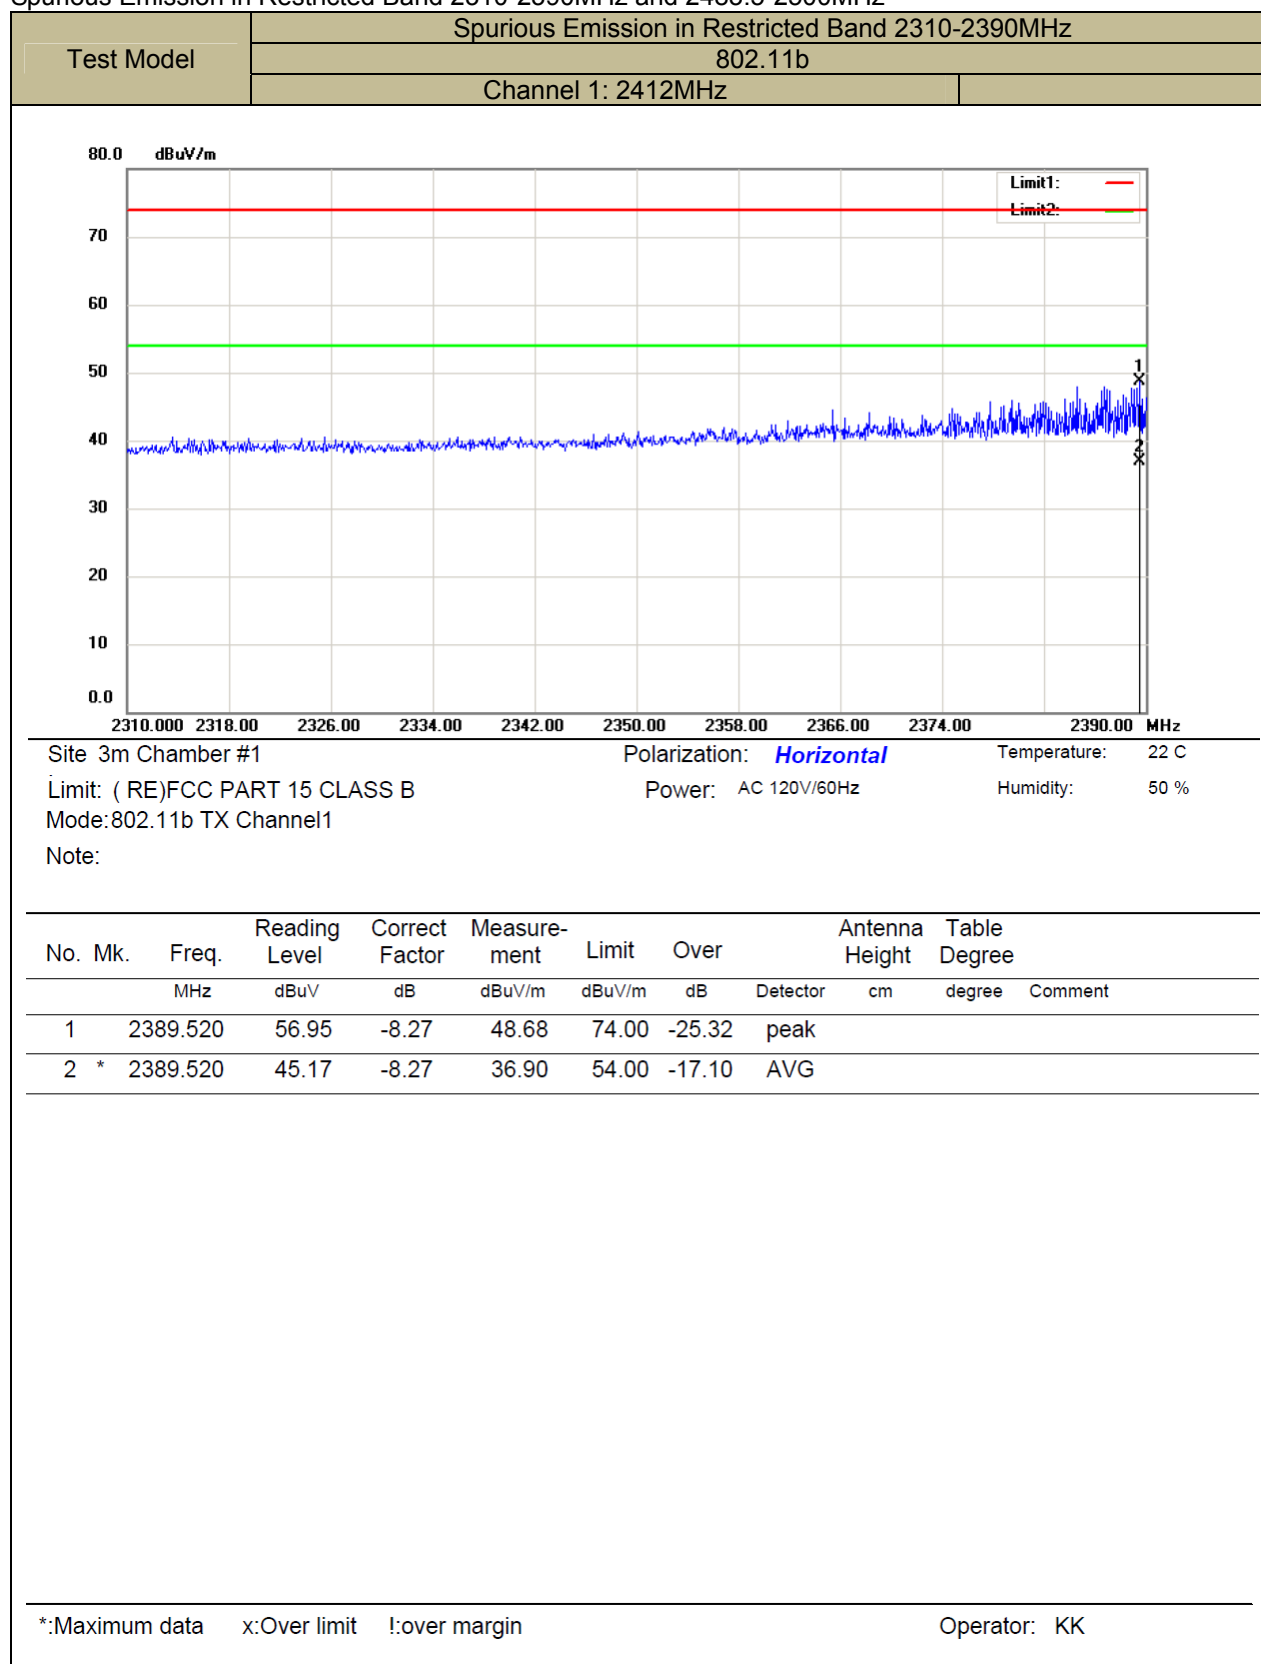


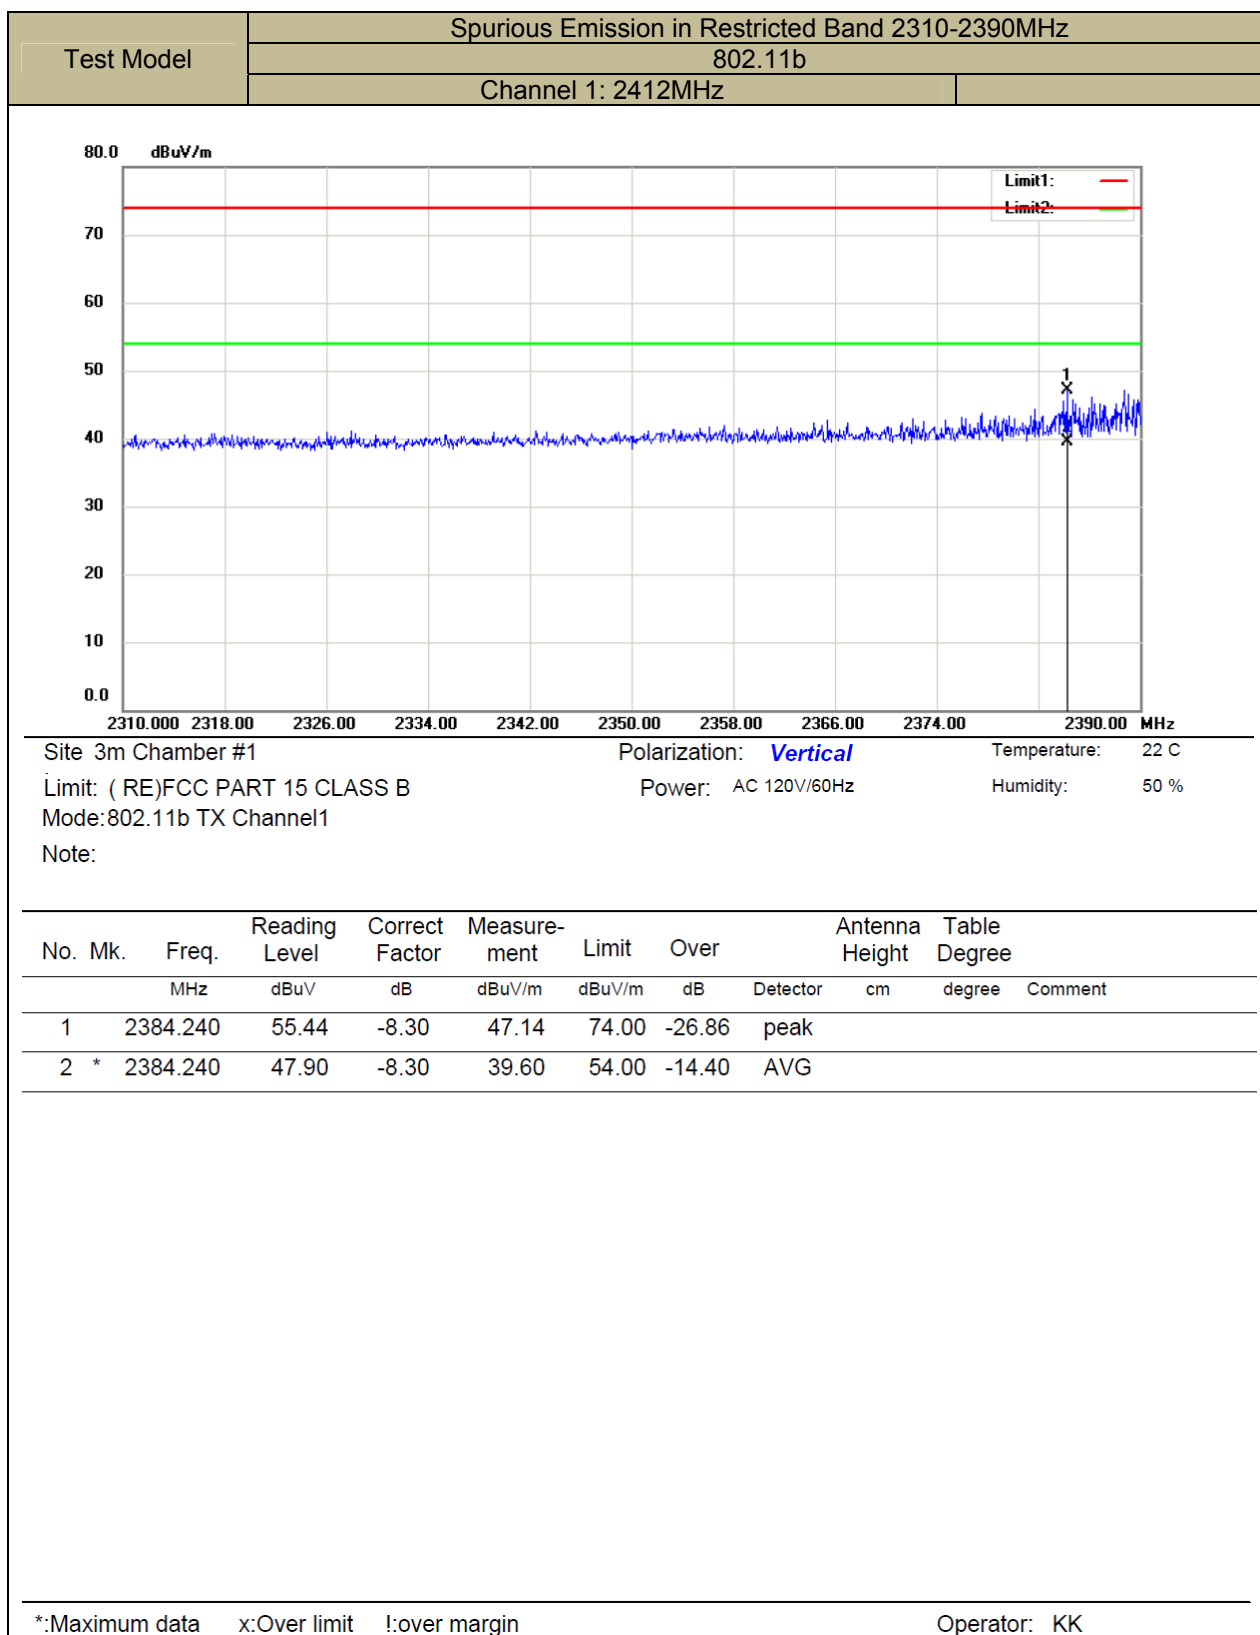


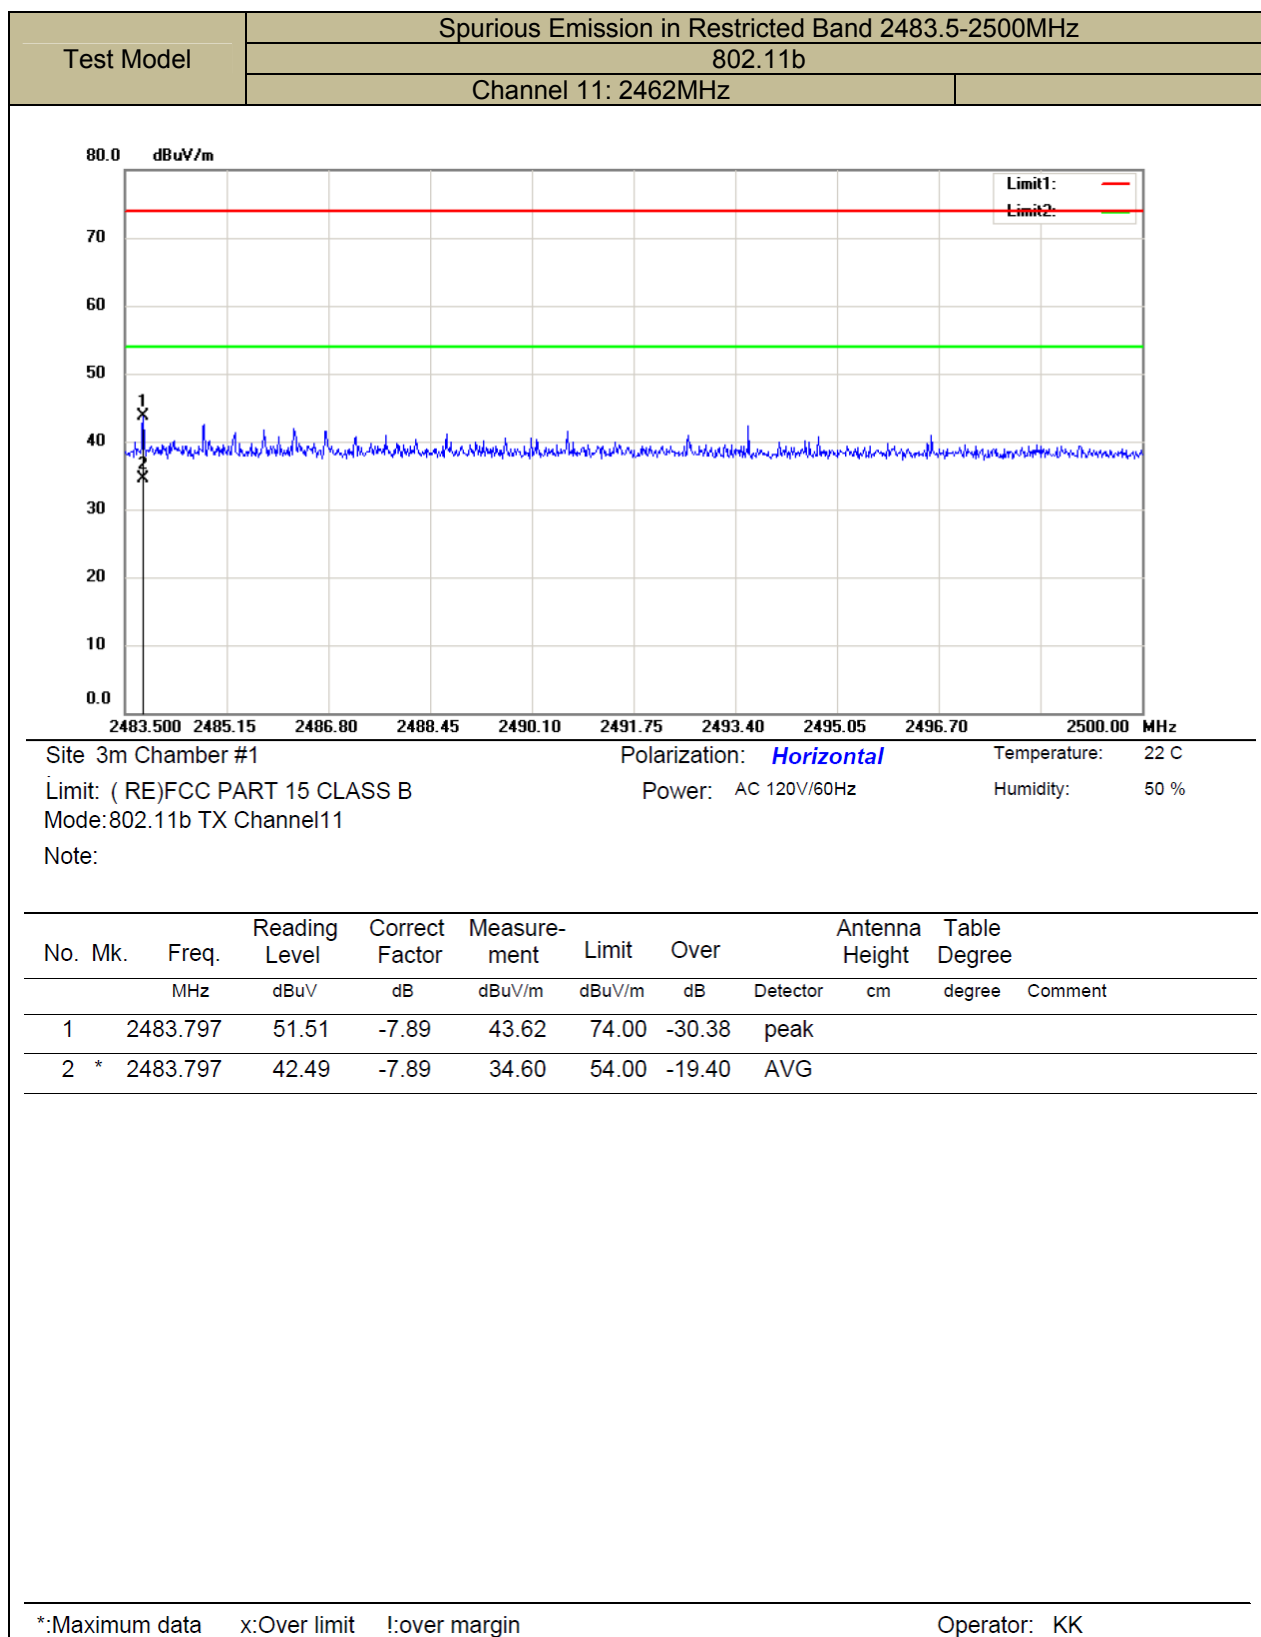


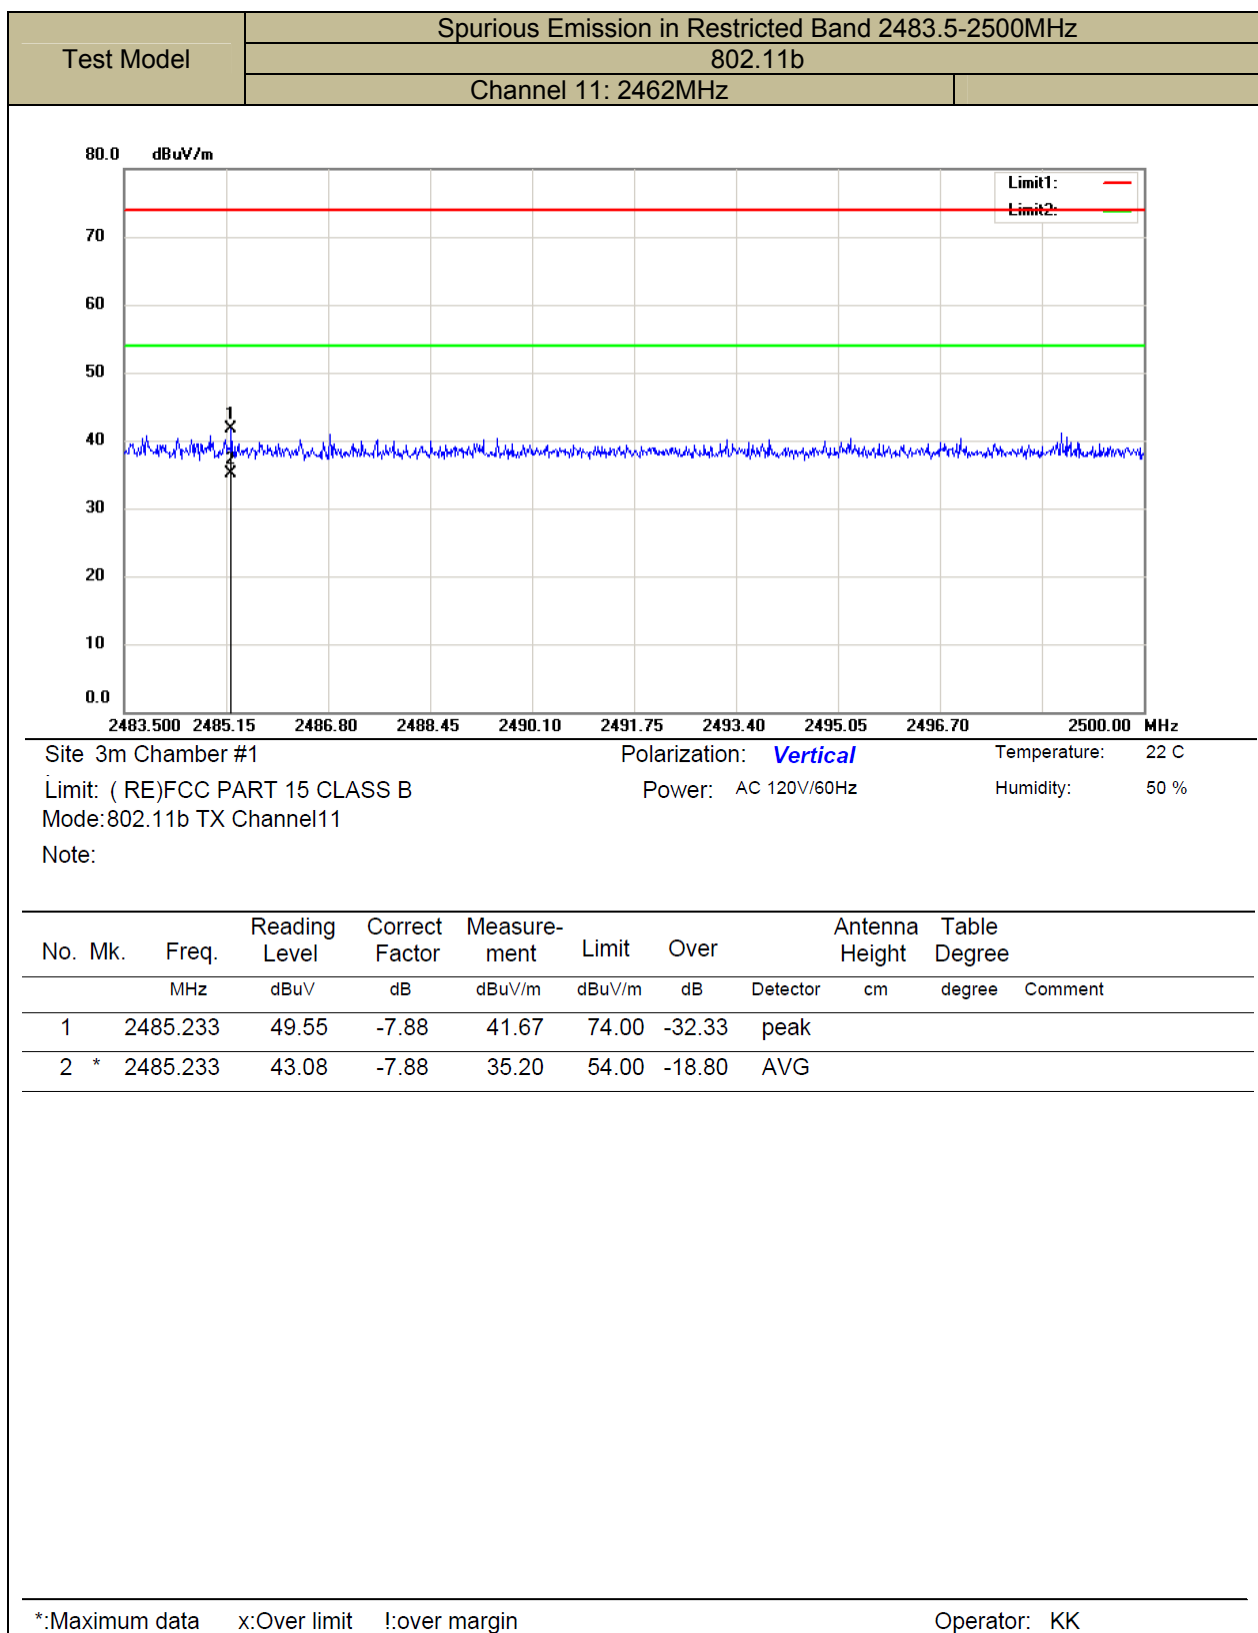


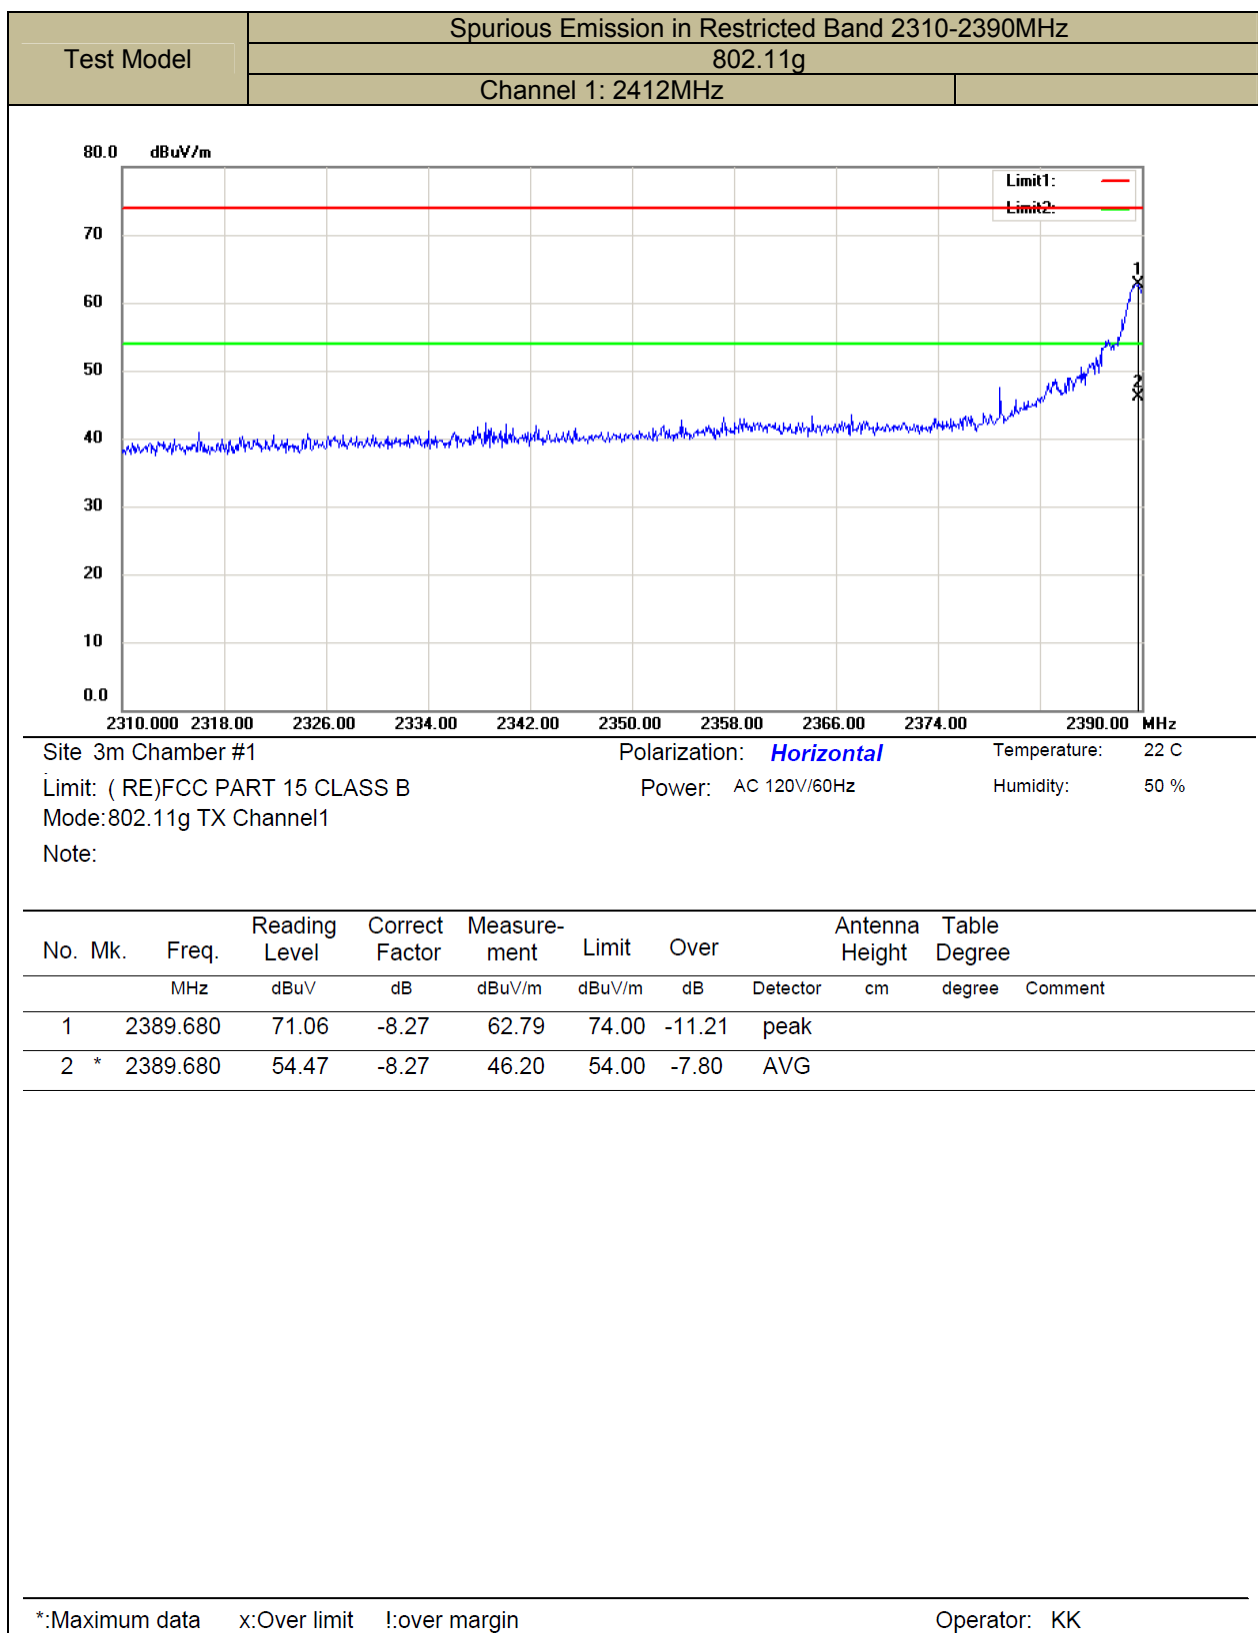


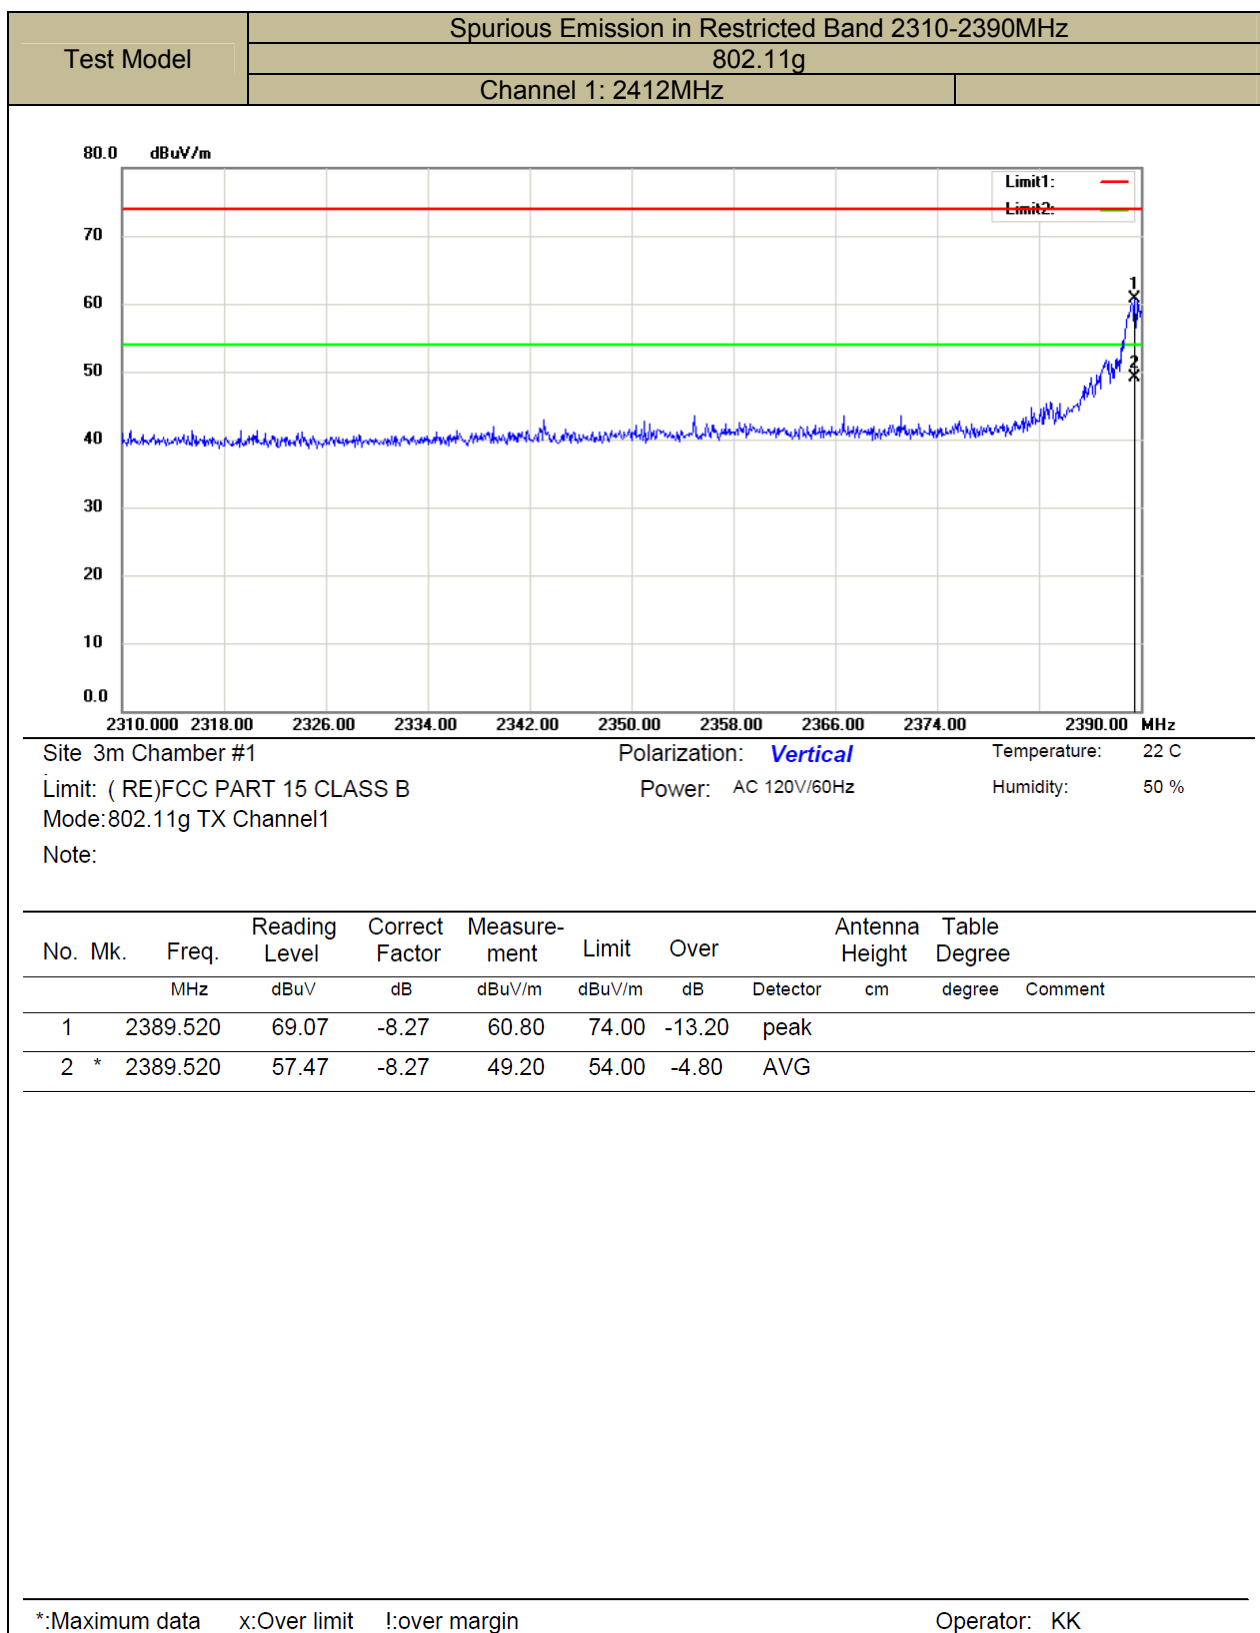


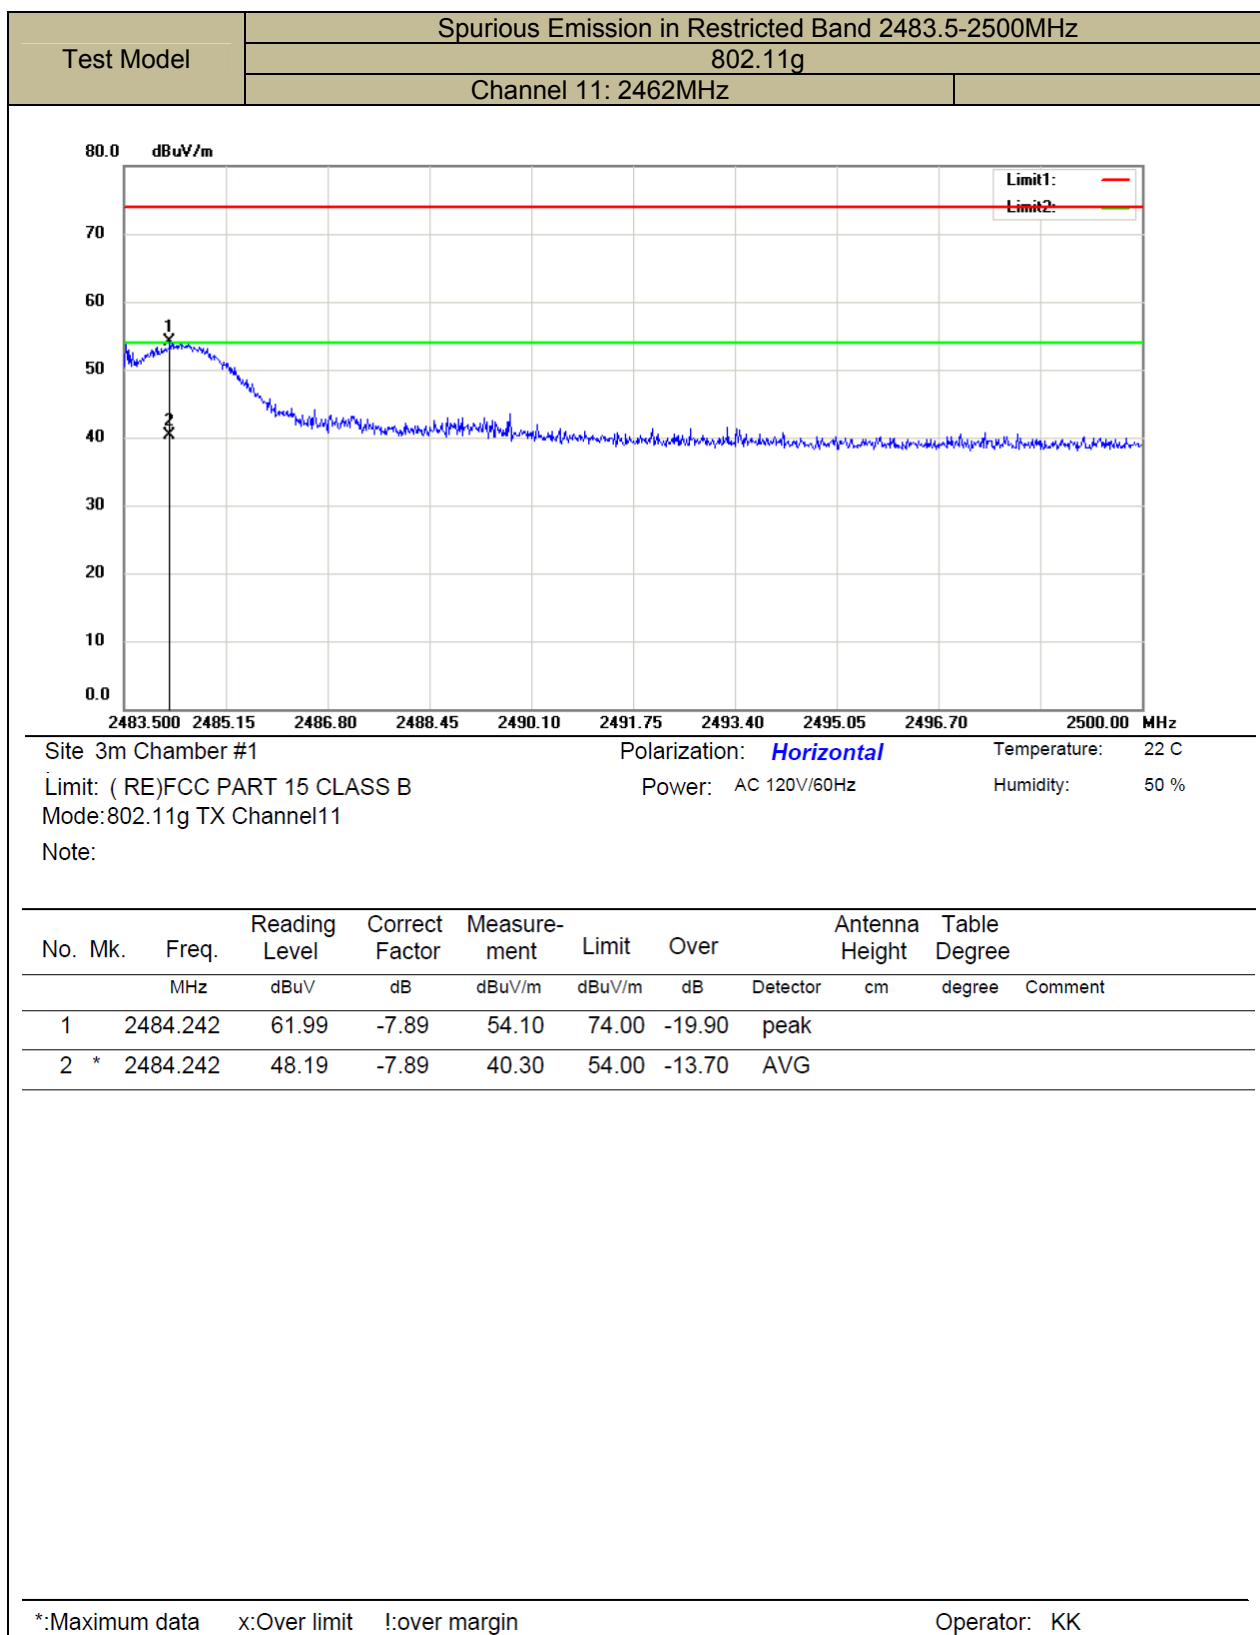


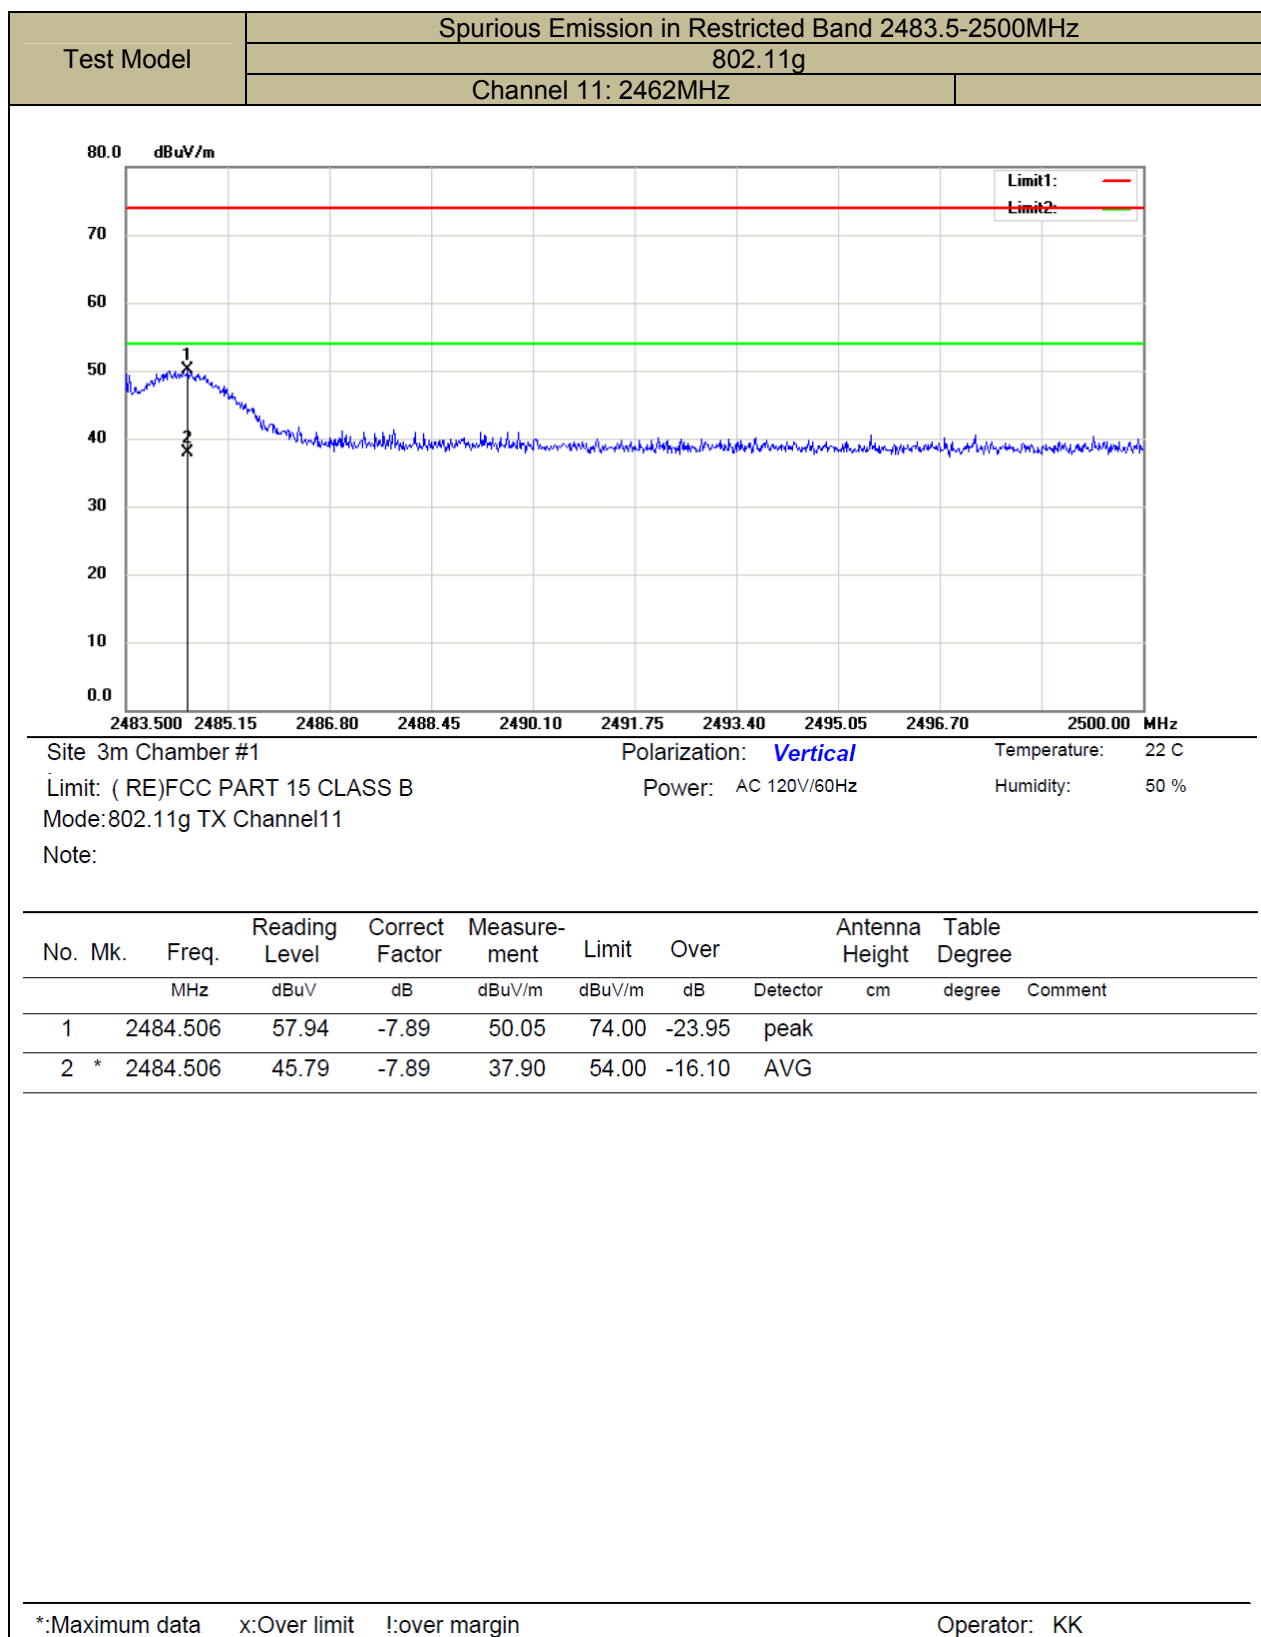


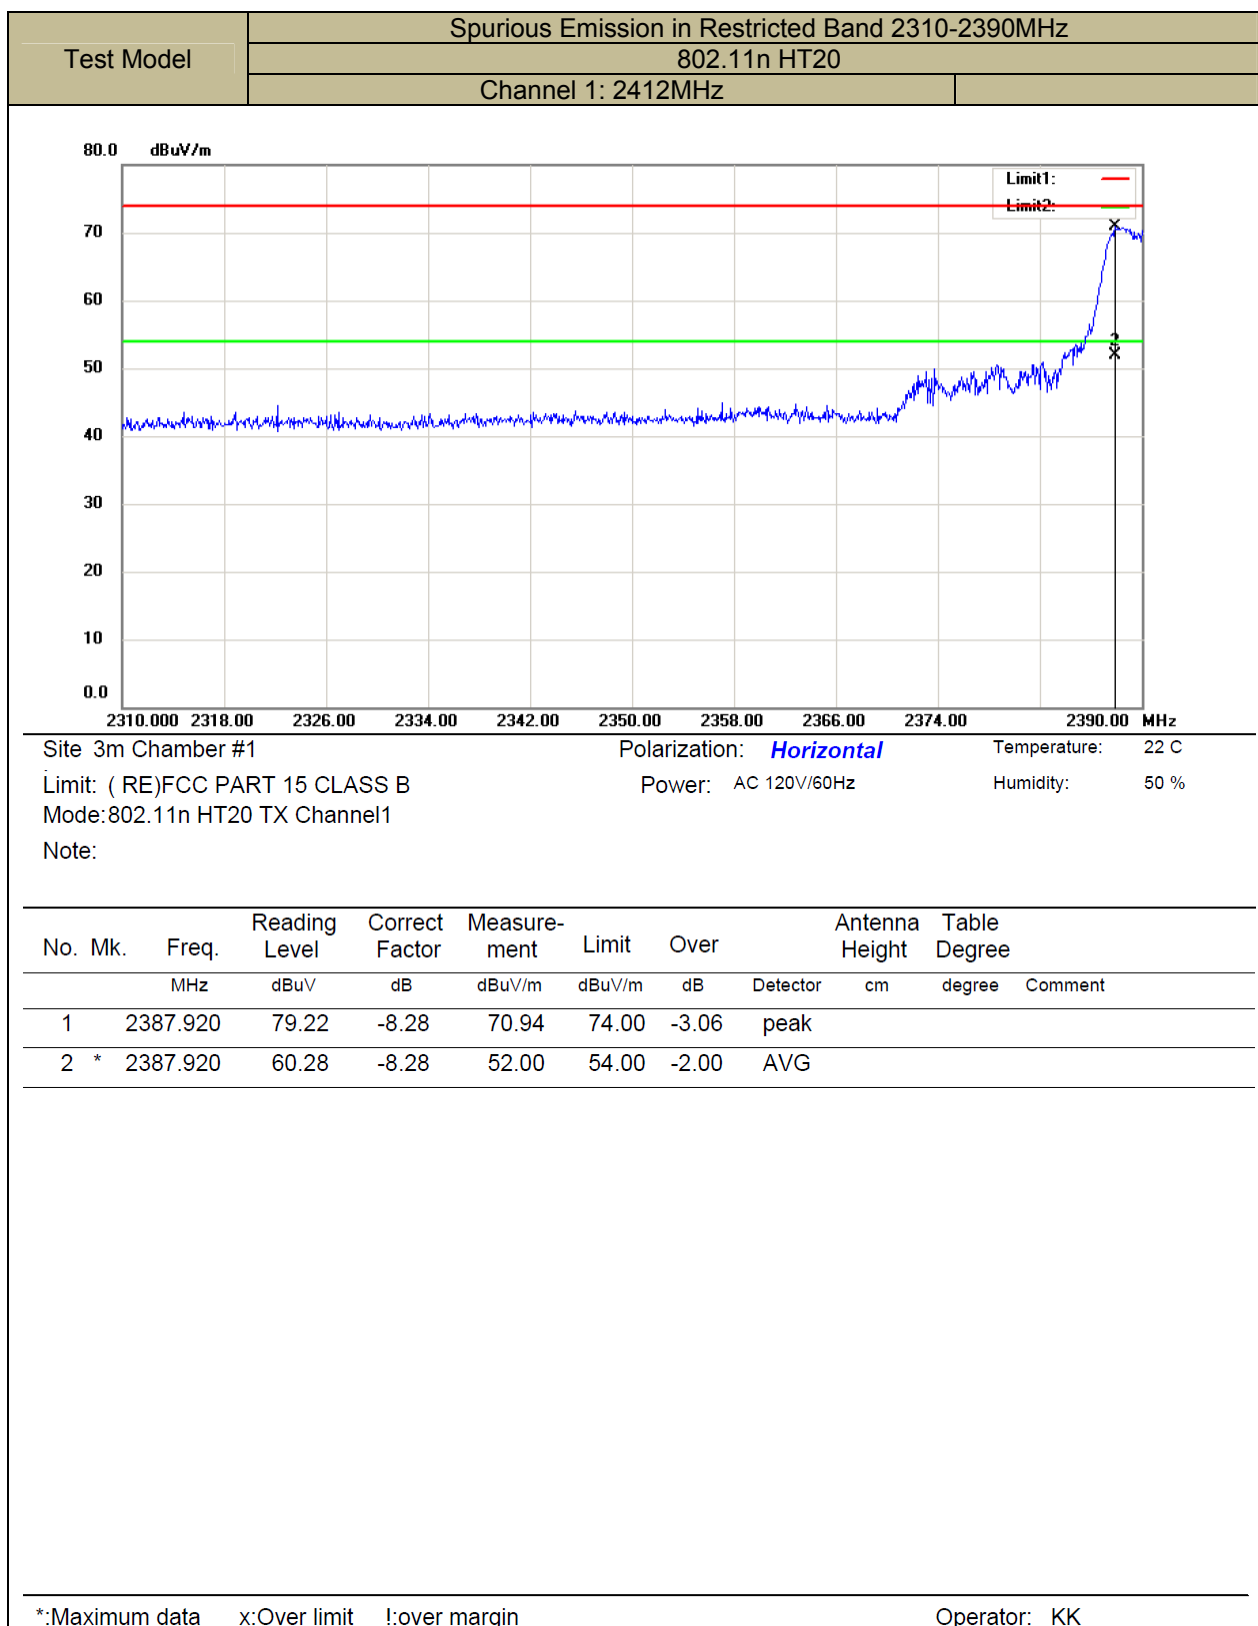


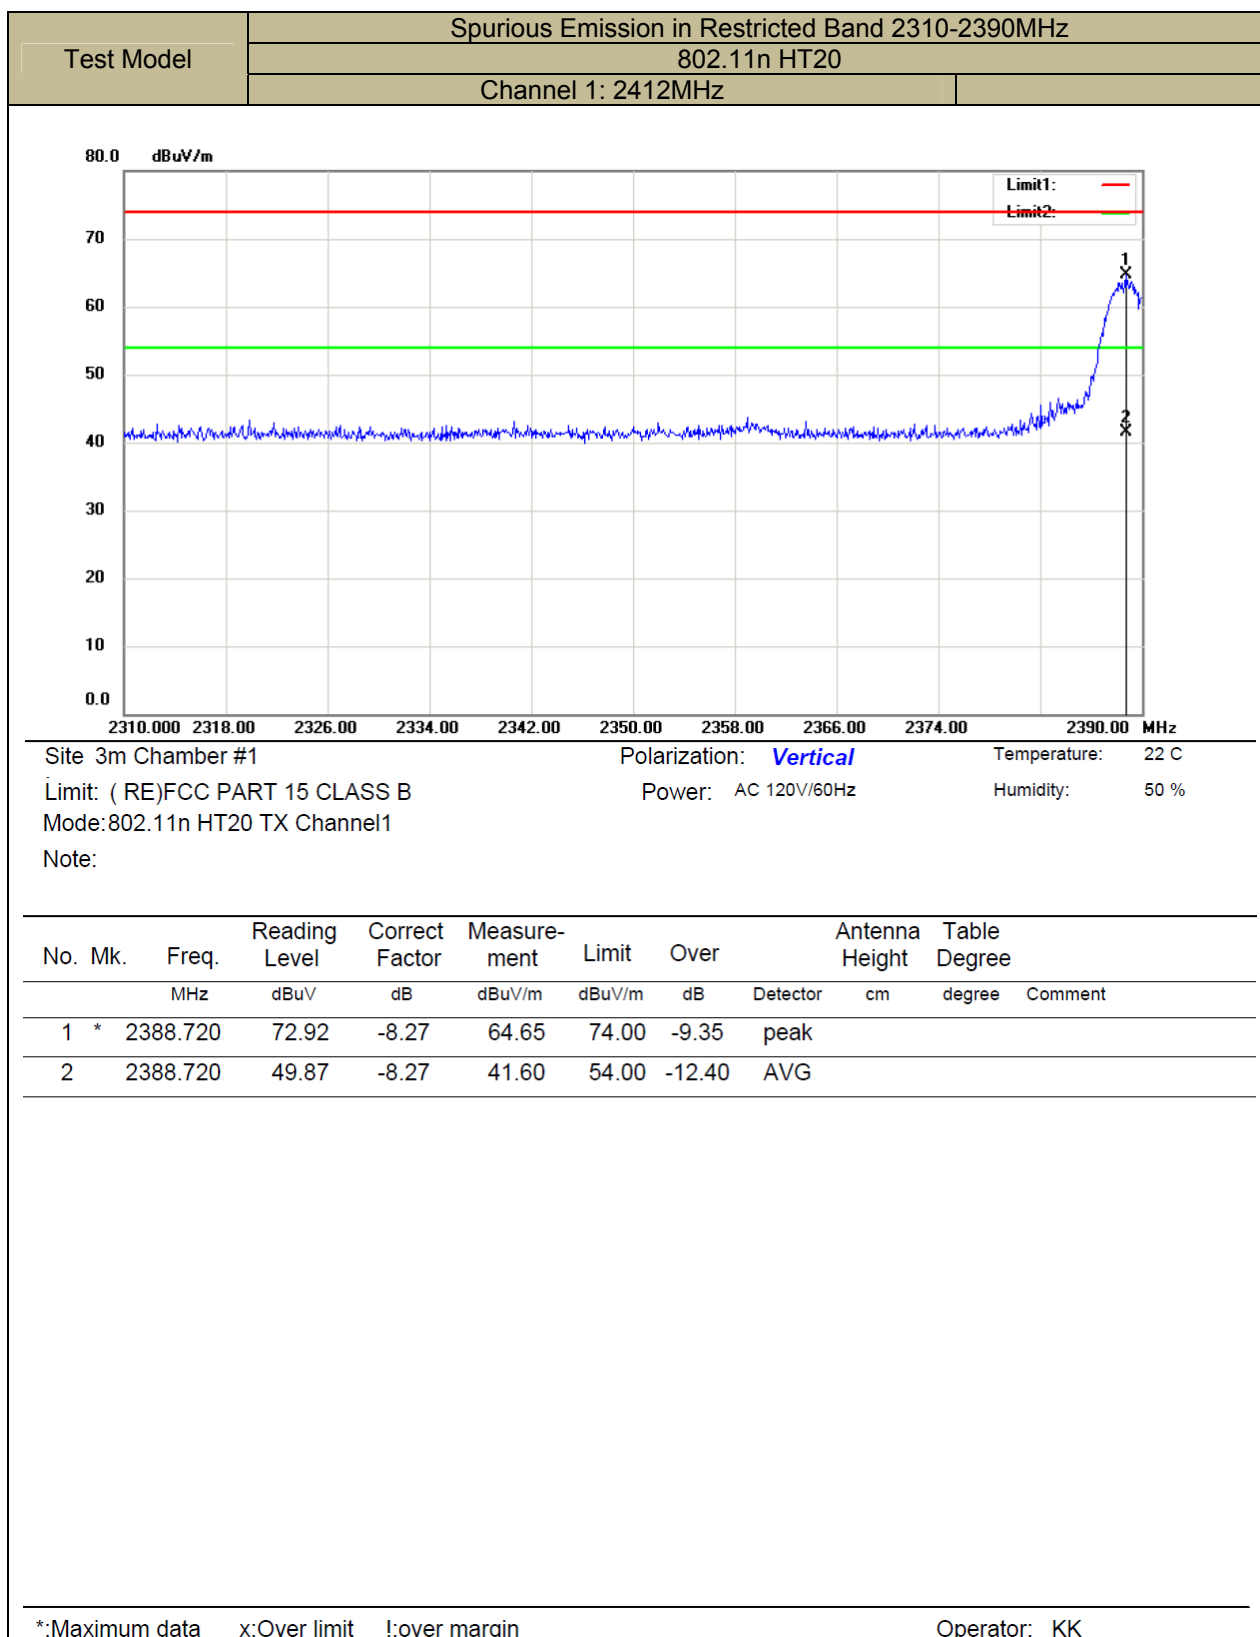


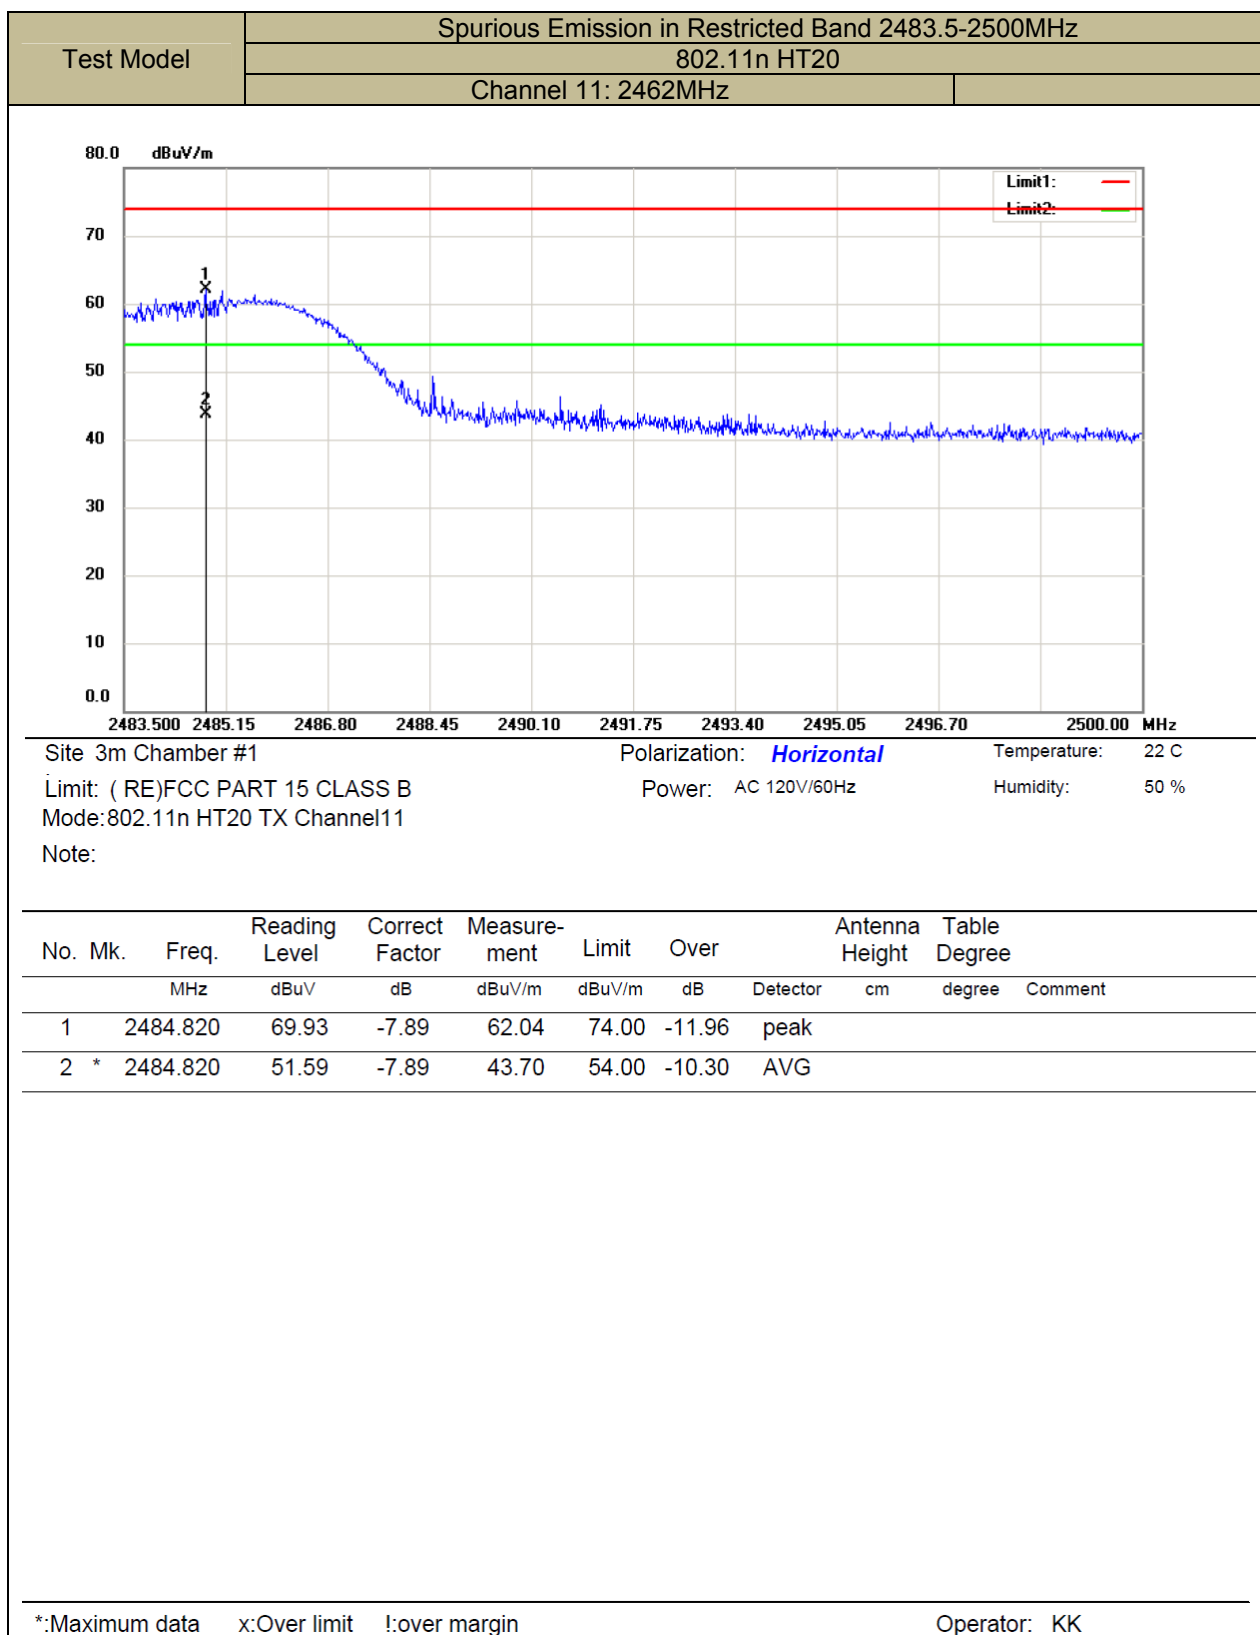


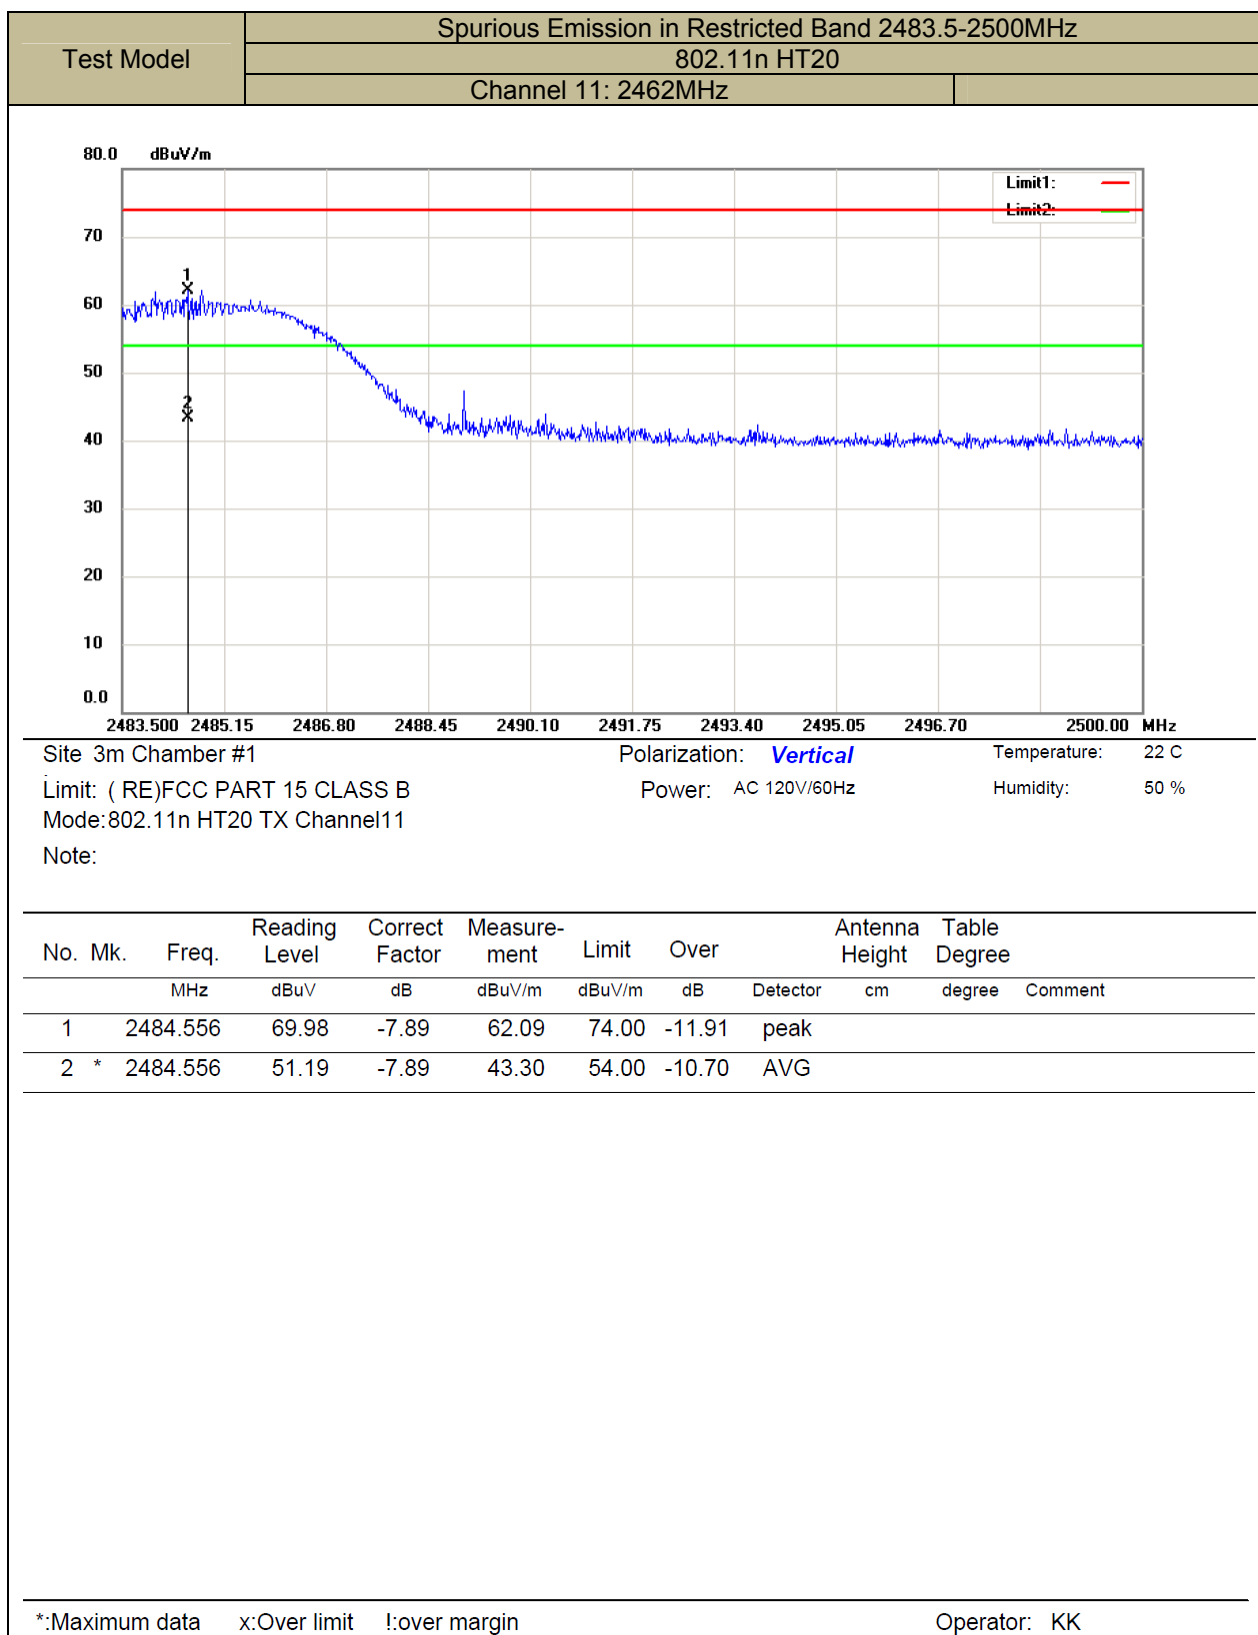

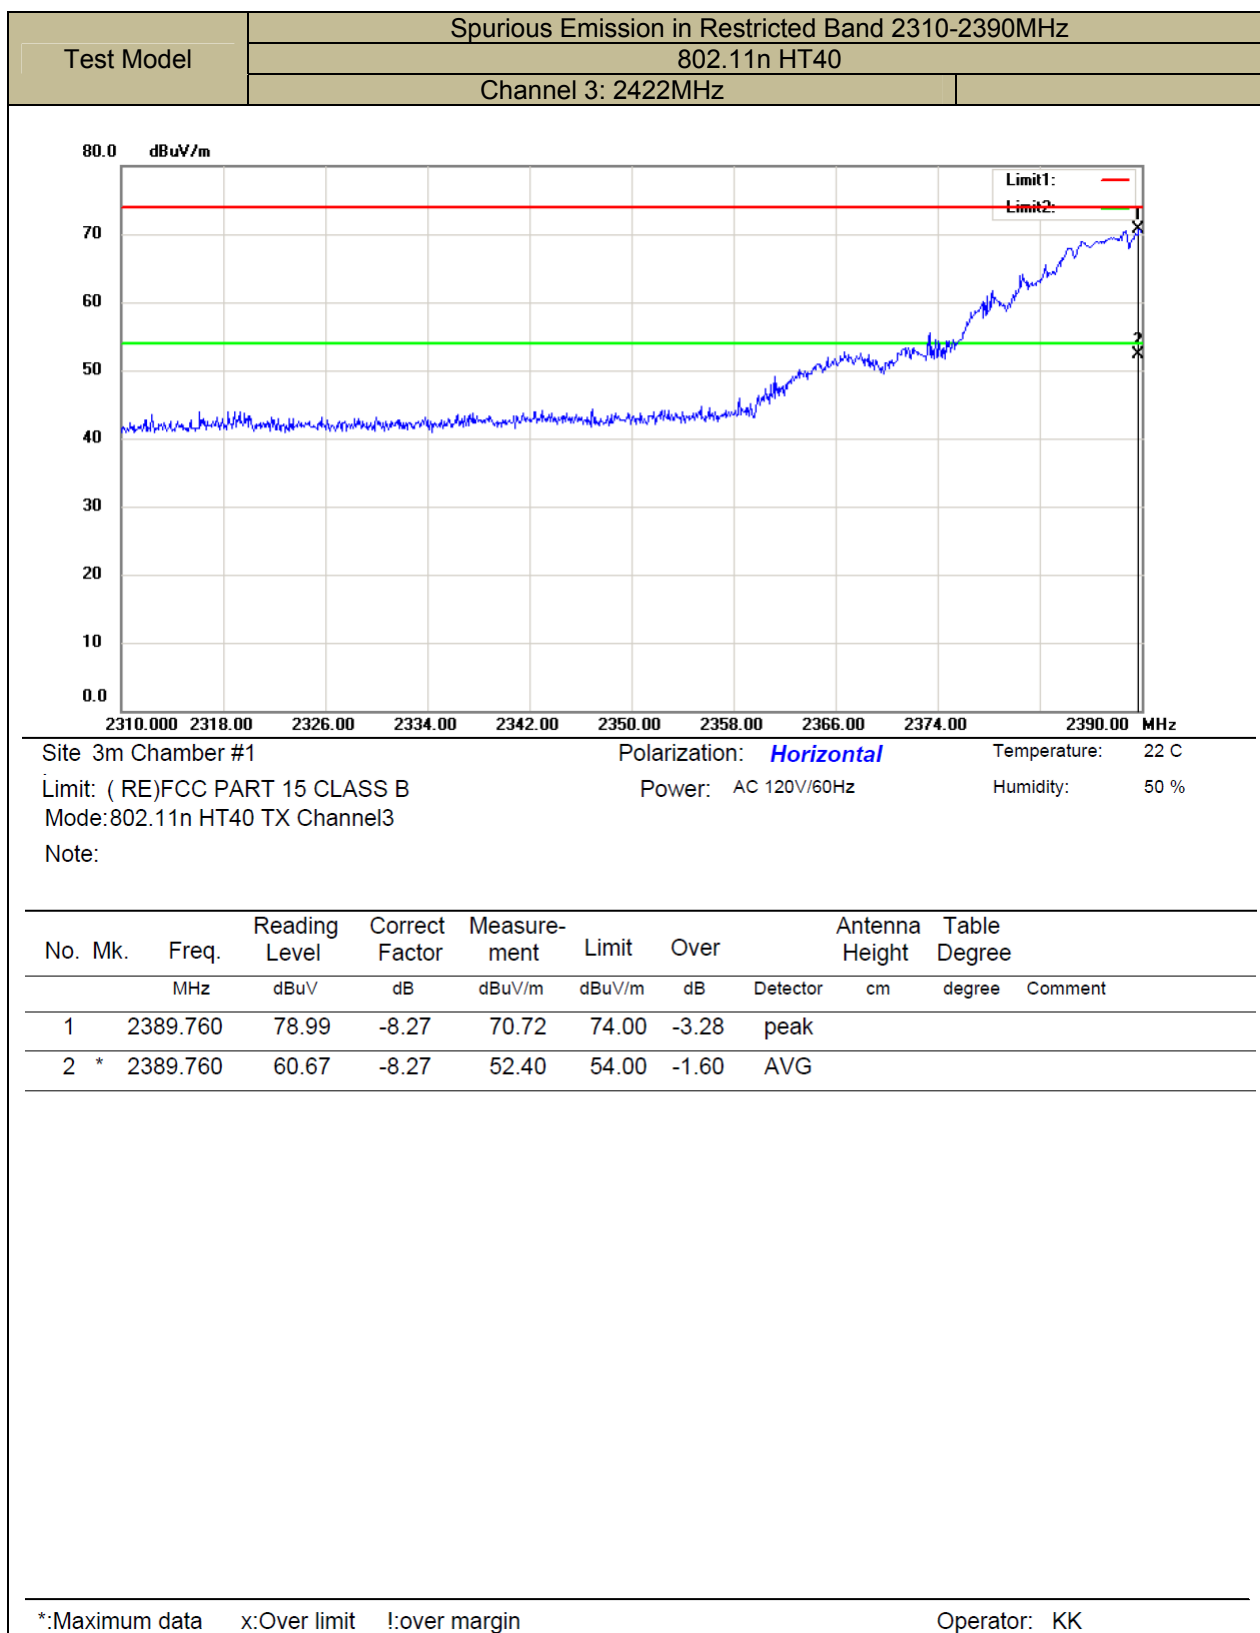

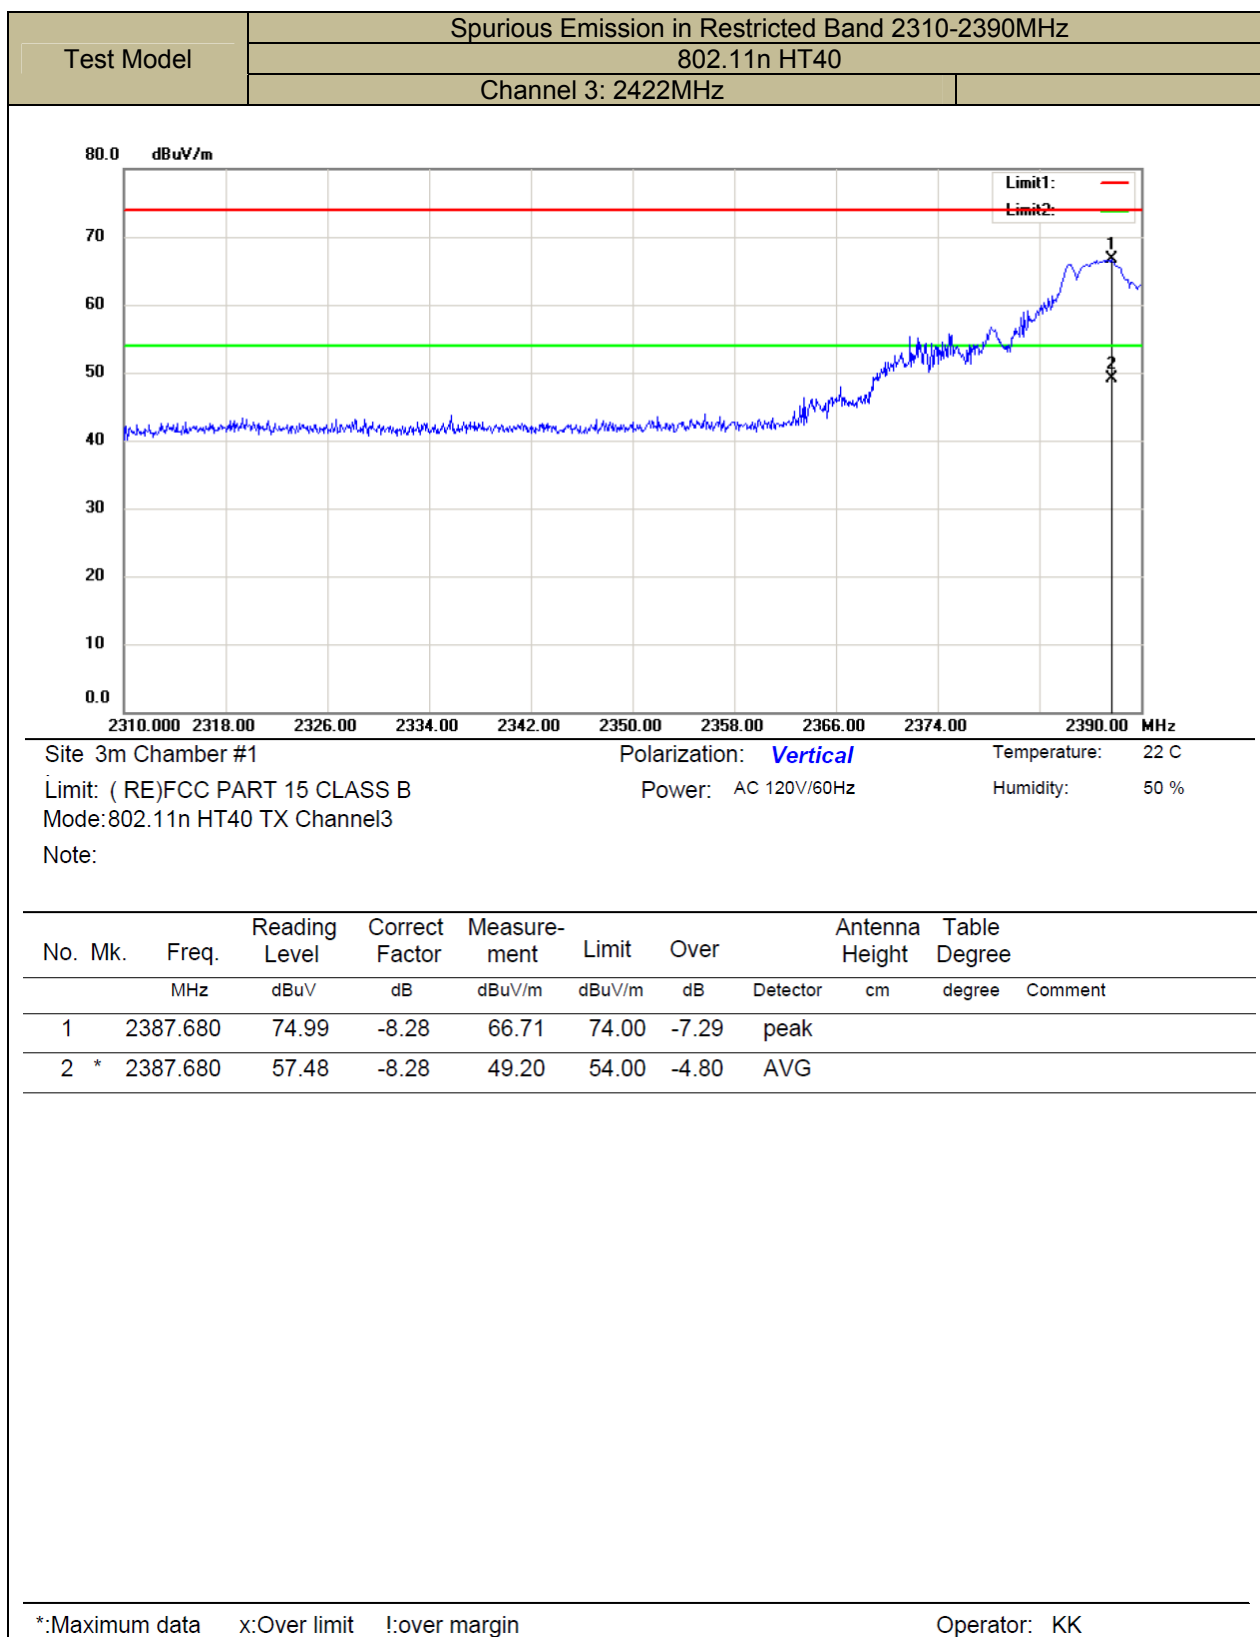

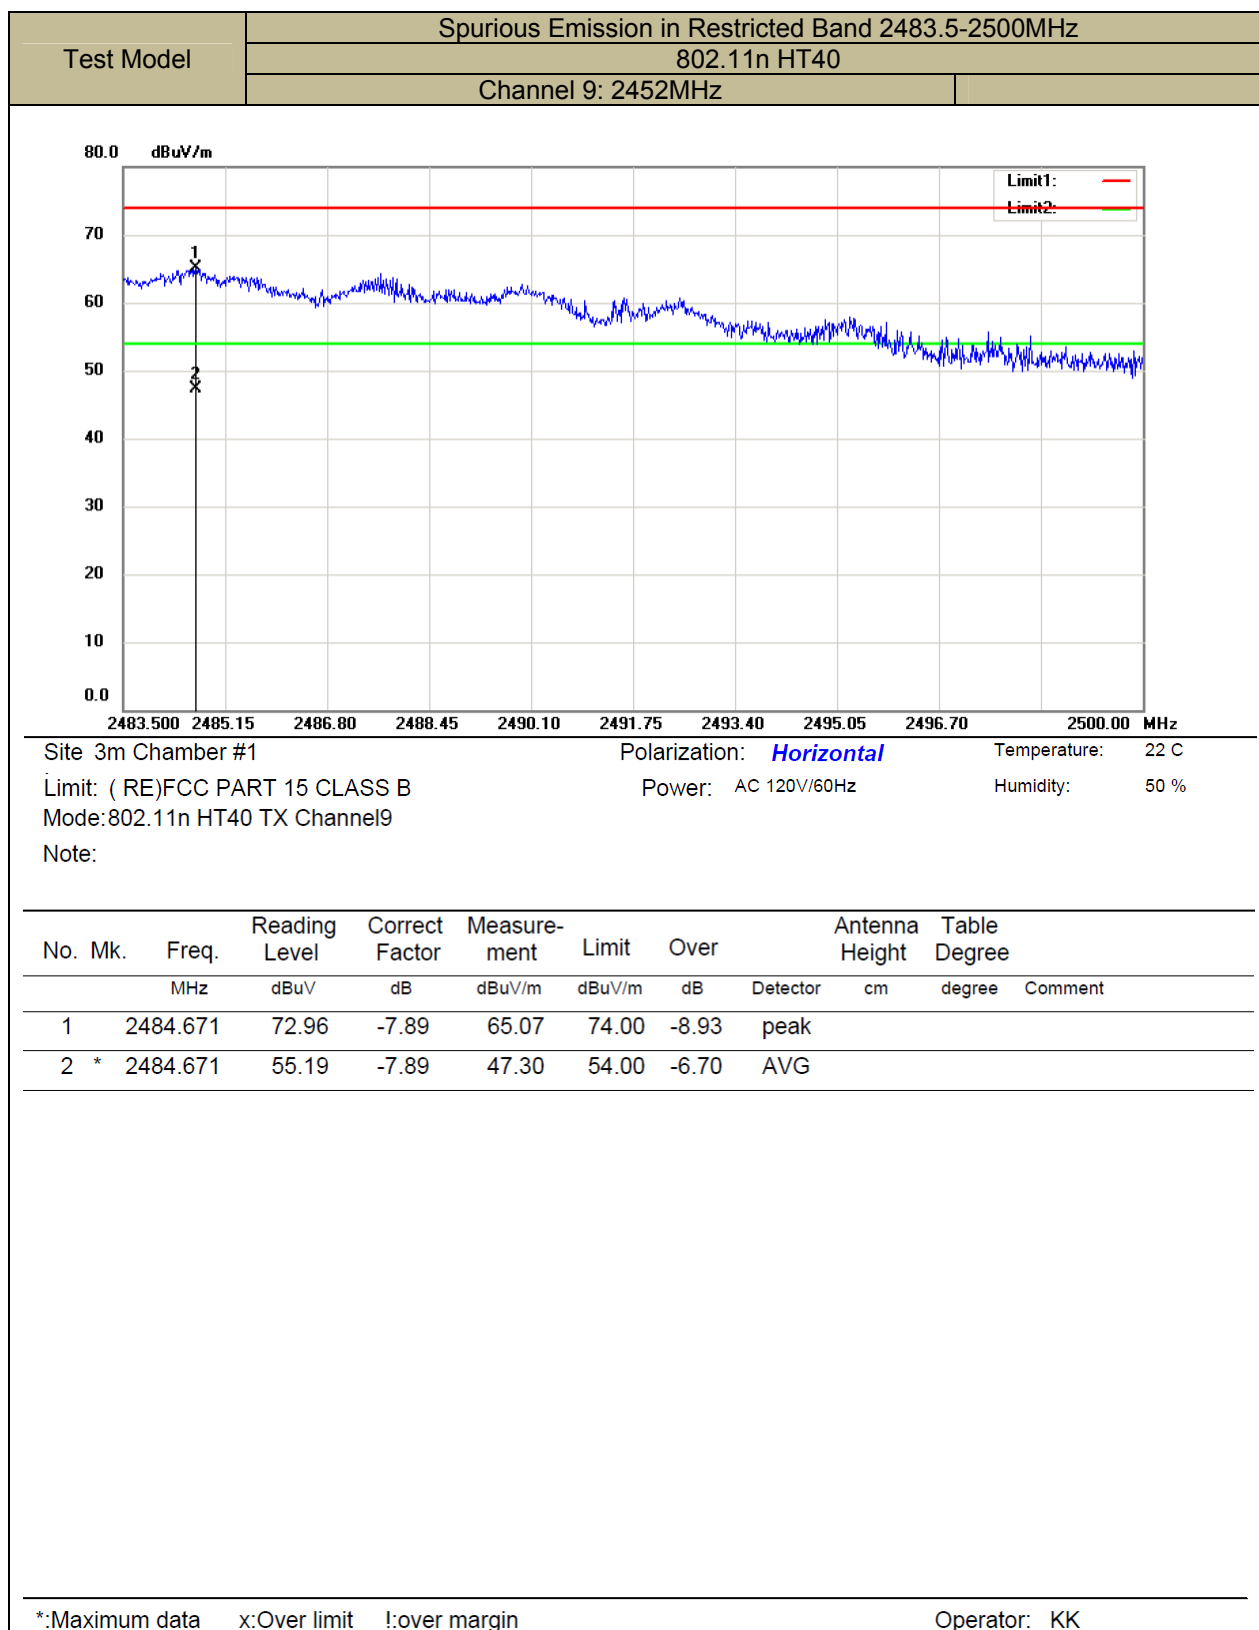

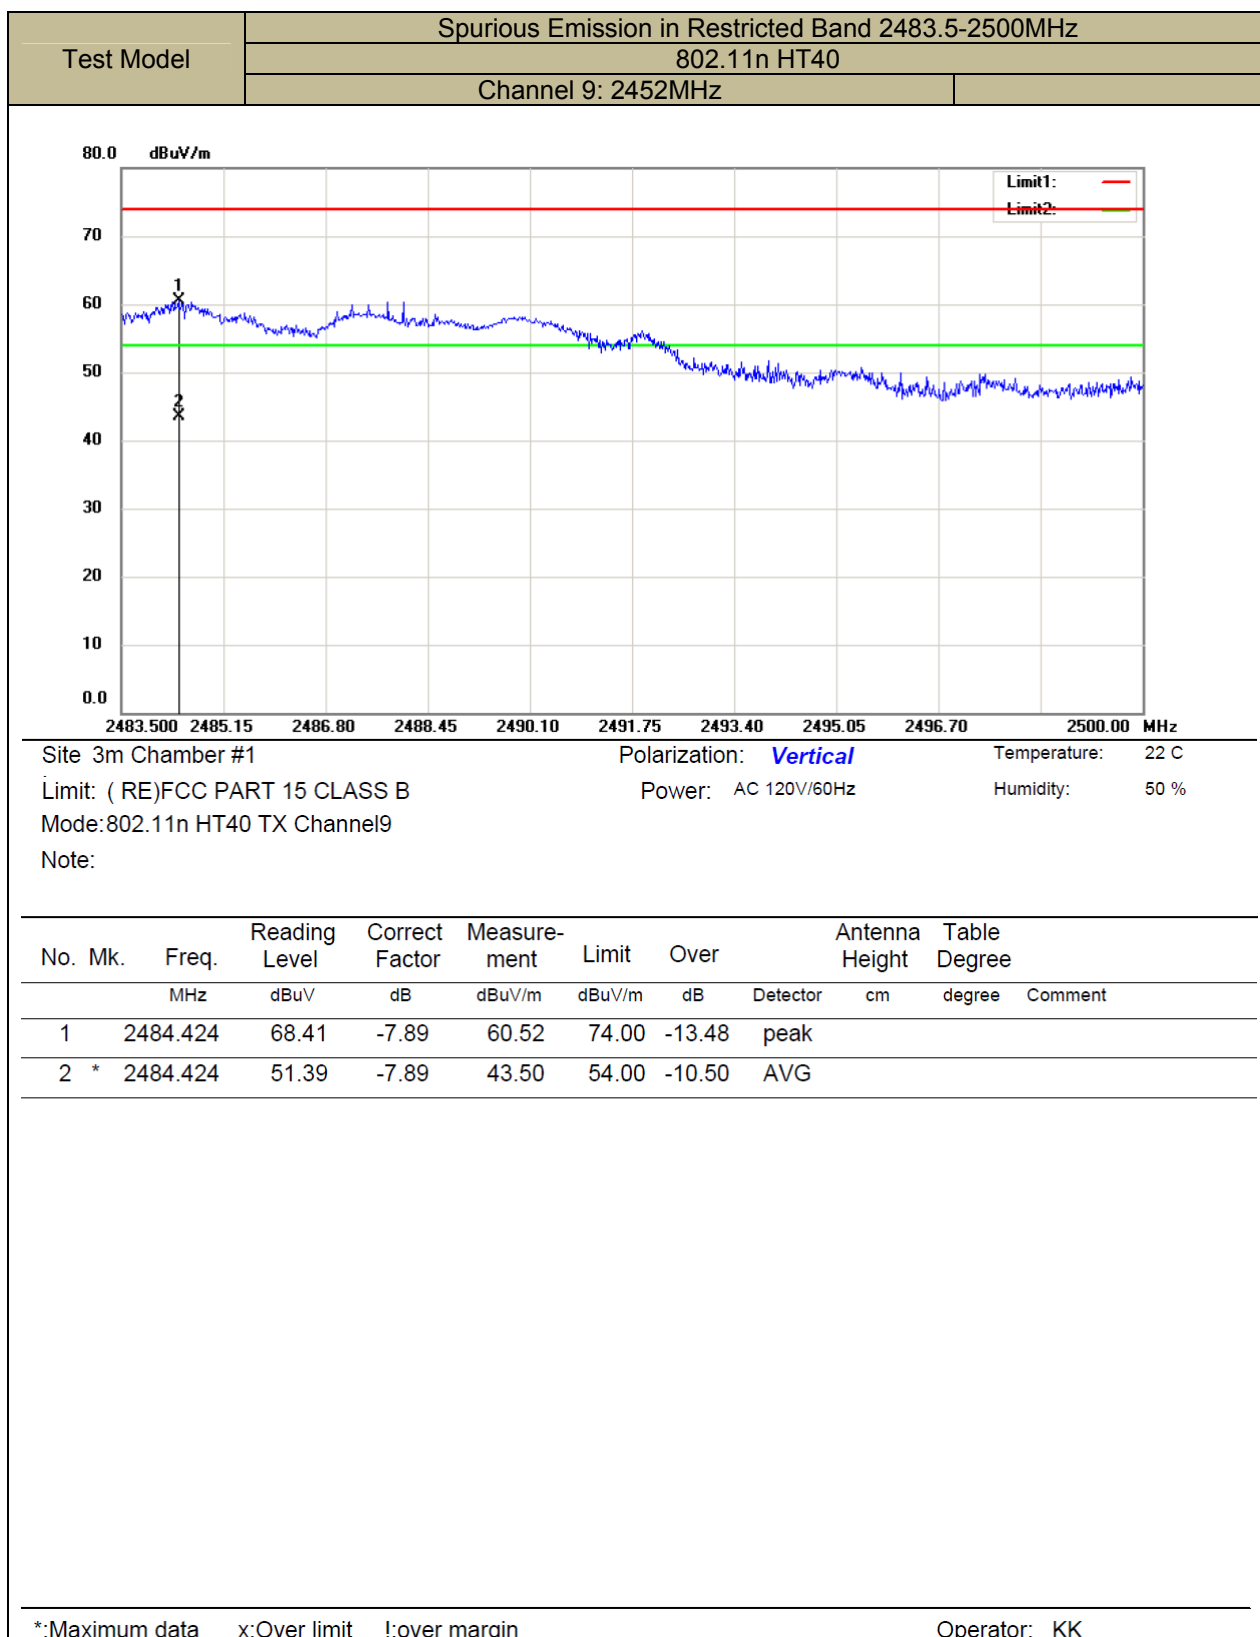

6.6 CONDUCTED EMISSIONS TEST

6.6.1 Applicable Standard

According to FCC Part 15.207(a)

6.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


6.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

6.6.5 Test Results

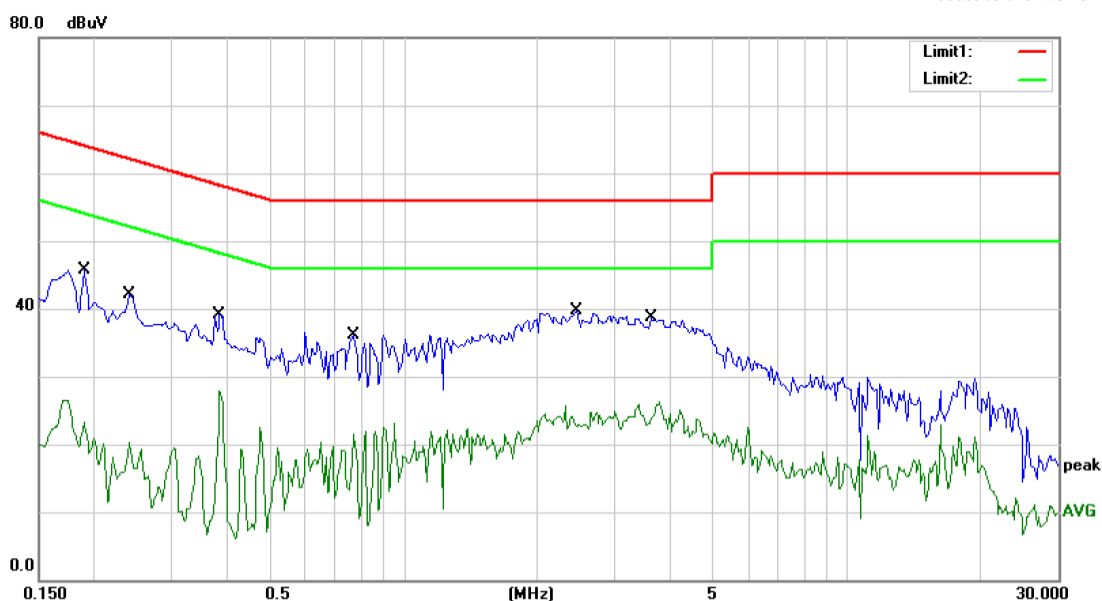

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 50 %

Mode: ON

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1900	45.68	0.00	45.68	64.04	-18.36	QP	
2	0.1900	26.53	0.00	26.53	54.04	-27.51	AVG	
3	0.2400	42.01	0.00	42.01	62.10	-20.09	QP	
4	0.2400	20.39	0.00	20.39	52.10	-31.71	AVG	
5	0.3850	39.03	0.00	39.03	58.17	-19.14	QP	
6	0.3850	27.82	0.00	27.82	48.17	-20.35	AVG	
7	0.7700	36.13	0.00	36.13	56.00	-19.87	QP	
8	0.7700	23.19	0.00	23.19	46.00	-22.81	AVG	
9 *	2.4500	39.79	0.00	39.79	56.00	-16.21	QP	
10	2.4500	25.68	0.00	25.68	46.00	-20.32	AVG	
11	3.6150	38.66	0.00	38.66	56.00	-17.34	QP	
12	3.6150	26.23	0.00	26.23	46.00	-19.77	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Vern

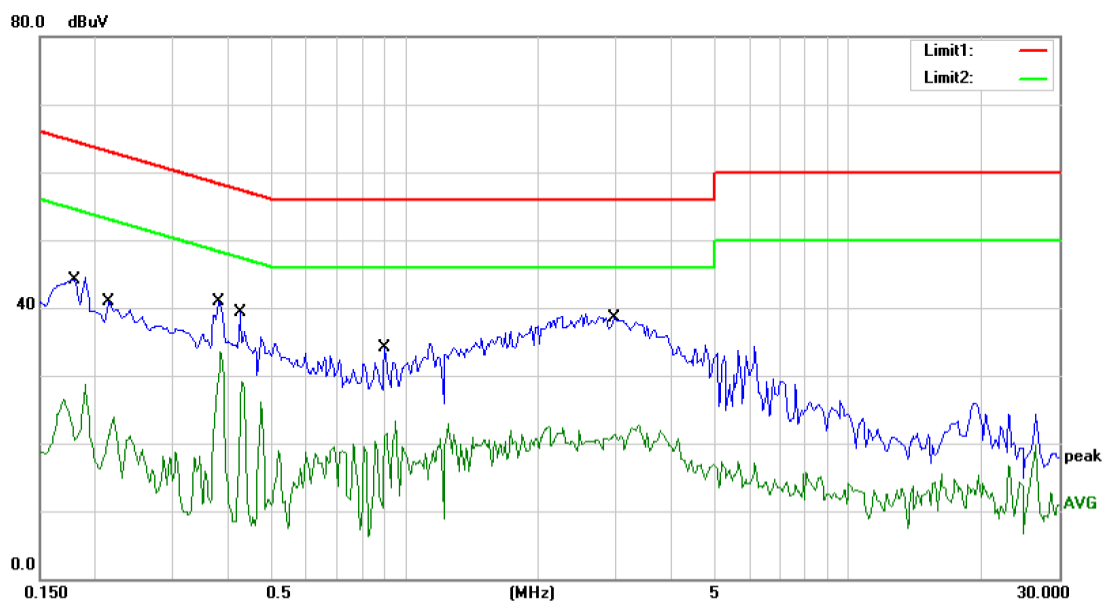


Site Conduction #1
 Limit: (CE)FCC PART 15 class B_QP
 Mode: ON
 Note:

Phase: **N**
 Power: AC 120V/60Hz
 Temperature: 22
 Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1800	44.10	0.00	44.10	64.49	-20.39	QP	
2		0.1800	28.60	0.00	28.60	54.49	-25.89	AVG	
3		0.2150	40.82	0.00	40.82	63.01	-22.19	QP	
4		0.2150	23.99	0.00	23.99	53.01	-29.02	AVG	
5		0.3800	40.87	0.00	40.87	58.28	-17.41	QP	
6	*	0.3800	33.53	0.00	33.53	48.28	-14.75	AVG	
7		0.4250	39.37	0.00	39.37	57.35	-17.98	QP	
8		0.4250	29.05	0.00	29.05	47.35	-18.30	AVG	
9		0.9000	34.05	0.00	34.05	56.00	-21.95	QP	
10		0.9000	23.33	0.00	23.33	46.00	-22.67	AVG	
11		2.9700	38.42	0.00	38.42	56.00	-17.58	QP	
12		2.9700	22.23	0.00	22.23	46.00	-23.77	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Vern

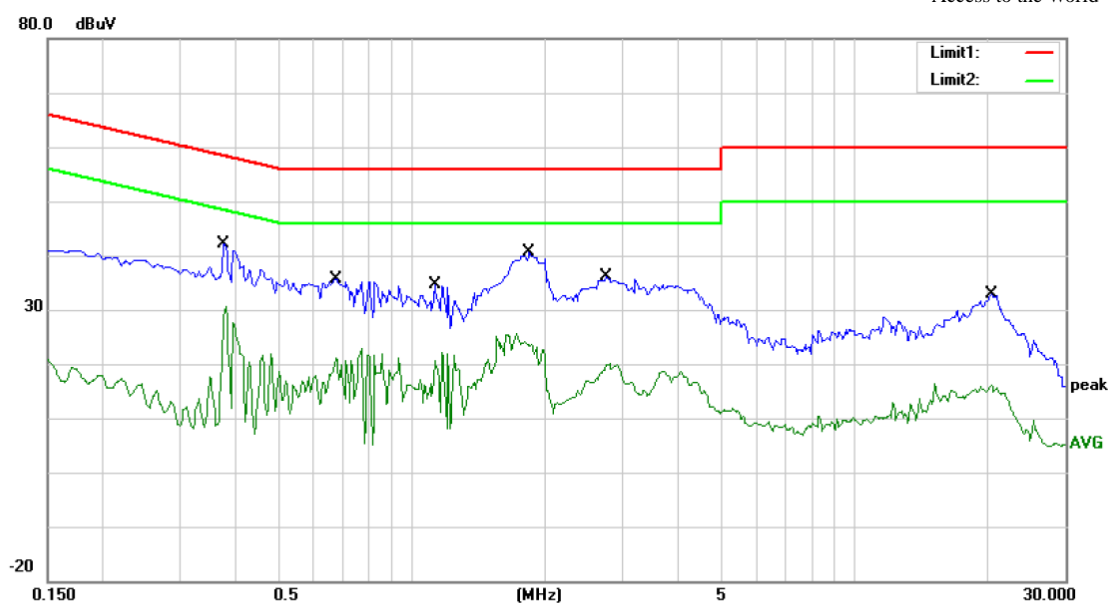

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz


Humidity: 50 %

Mode: ON

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.3750	42.19	0.00	42.19	58.39	-16.20	QP	
2	0.3750	30.59	0.00	30.59	48.39	-17.80	AVG	
3	0.6790	35.31	0.00	35.31	56.00	-20.69	QP	
4	0.6790	22.95	0.00	22.95	46.00	-23.05	AVG	
5	1.1250	34.74	0.00	34.74	56.00	-21.26	QP	
6	1.1250	22.22	0.00	22.22	46.00	-23.78	AVG	
7 *	1.8400	40.57	0.00	40.57	56.00	-15.43	QP	
8	1.8400	25.52	0.00	25.52	46.00	-20.48	AVG	
9	2.7500	36.04	0.00	36.04	56.00	-19.96	QP	
10	2.7500	20.05	0.00	20.05	46.00	-25.95	AVG	
11	20.4000	32.92	0.00	32.92	60.00	-27.08	QP	
12	20.4000	16.11	0.00	16.11	50.00	-33.89	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Cai

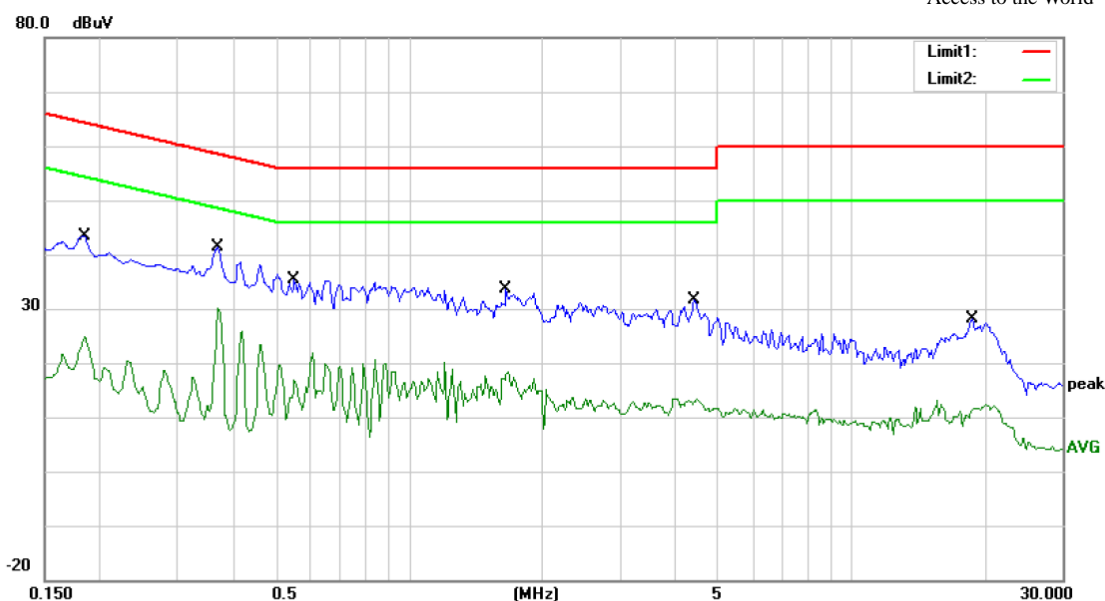

Site Conduction #1
 Limit: (CE)FCC PART 15 class B_QP
 Mode: ON
 Note:

Phase: **N**
 Power: AC 240V/50Hz

Temperature: 22
 Humidity: 50 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1850	43.40	0.00	43.40	64.26	-20.86	QP	
2		0.1850	24.94	0.00	24.94	54.26	-29.32	AVG	
3	*	0.3700	41.31	0.00	41.31	58.50	-17.19	QP	
4		0.3700	30.08	0.00	30.08	48.50	-18.42	AVG	
5		0.5500	35.36	0.00	35.36	56.00	-20.64	QP	
6		0.5500	21.82	0.00	21.82	46.00	-24.18	AVG	
7		1.6550	33.67	0.00	33.67	56.00	-22.33	QP	
8		1.6550	18.42	0.00	18.42	46.00	-27.58	AVG	
9		4.4250	31.53	0.00	31.53	56.00	-24.47	QP	
10		4.4250	13.38	0.00	13.38	46.00	-32.62	AVG	
11		18.7250	28.17	0.00	28.17	60.00	-31.83	QP	
12		18.7250	13.14	0.00	13.14	50.00	-36.86	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Cai

6.7 ANTENNA APPLICATION

6.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.7.2 Result

The EUT'S antenna is Ceramic antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 1.6dBi and meets the requirement.

END OF REPORT