
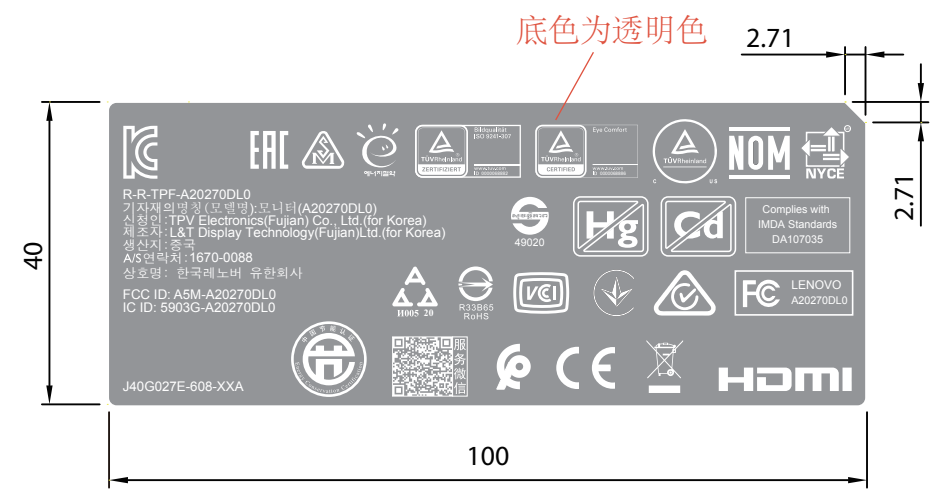


label 料号: label Part NO.: J40G027N608XXA J40G027N608XXA	
客户 Customer	LENOVO
型号 Model	Qreator 27
销向 Sales Area	消费外销
安规审核Safety parts:	
Yes	No
内销中文字体要求高度1.8mm以上	
Yes	No
针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称, 型号及 UL file no.	
条码印刷: barcode print:	
1. 所有条码读码等级: C级及以上, 客户有特殊要求除外;	
<b>REVISION</b>	
<b>VERSION A</b>	
版本变更说明: Version Changed Description:	
<b>备注Remark:</b>	
frances.li Jun-03-20	
捷联电子(福建)有限公司 TPV Electronics (Fujian) Co., Ltd. 地址(Add): 中国福建省福清市元洪路上邦 Shangzheng, Yuanhong Road, Fuqing City, Fujian Province, China 电话(Tel): +86-591-85285555 85285559 传真(Fax): +86-591-85285447 邮编(Postcode): 350301	



底色: 透明色; 字体: 白色

注: 空白框内内容由厂内打印, 具体打印内容以PM、SS提供为准

**NOTE:**

1. Printing as the above drawing.  
印刷版面见上图。
2. Dimension: (Tolerance: +0/-0.2mm), 3R=1mm, as the above drawing.  
尺寸: 见图档 +/-0.2mm, 3R=1mm。
3. Material: 50#白色PET with gule on the backside (material must be certified by UL laboratory)  
材质: 50#白色PET带不干背胶(材质需经过UL认证)
4. 颜色: 如上图
5. Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.  
粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
6. The normal temperature test: The range of temperature on plate is -20~100 ° C . In 80 ~100 ° C to maintain 8 hours , the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20~65 ° C. In 65 ° C to maintain 8 hours , the label should not be warp, delamination, frothy and so on.  
正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角不脱层不脱落不起泡等。  
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角不脱层不脱落不起泡等。
7. Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture/carton(art paper):  
In temperature of -20~65 ° C and humidity of 30~90% to maintain 96 hours , the label should not be warp, delamination, frothy and so on.  
耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面/纸箱(铜板纸)): 温度-20~65°C, 湿度30~90%, 时间 96小时后不翘角不脱层不脱落不起泡等。
8. Printing ink can not have overflow and printing color can not be uneven etc.  
印刷不可有溢墨及颜色不均等不良现象
9. Packing style: coil and there should be a toothed hole between the link of two pieces  
包装方式: 卷状, 连接处打齿孔。
10. The content in the frame printed by the factory barcode group and the specific content provided by SS.  
框内内容由厂内打印, 具体内容 by 业务提供。
11. 3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm.  
两张连接处距离3mm, 左右边离型纸3mm。
12. 贴附位置: 后壳
13. 其它测试要求详见 (FQ-背胶类产品测试检验规格)

- 1) 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- 1) According to the rule about RoHS of TPV, All raw material and assistant material should accord with the rule of RoHS
- 2) All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr (aim at the packing material with the product), should accord with the latest version of RD EMS-01 <<The controlled standard about environment substance for supplier>>.