



FCC RADIO TEST REPORT

FCC ID : A5MLM21C81
Equipment : Mobile Phone
Brand Name : Lenovo
Model Name : Lenovo L70081
Applicant : LENOVO (BEIJING) LIMITED
201-H2-6, Floor 2, Building 2, No.6
Shangdi West Road, Haidian
District, Beijing, China 100085
Manufacturer : Lenovo PC HK Limited
23/F, Lincoln House, Taikoo
Place 979 King's Road, Quarry Bay,
Hong Kong, P.R. China
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 25, 2021 and testing was started from Feb. 01, 2021 and completed on May 04, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 List of Measuring Equipment.....	28
5 Uncertainty of Evaluation.....	30
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR112124-02F	01	Initial issue of report	Jun. 07, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 3.51 dB at 5649.800 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 6.05 dB at 0.706 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Remark: The test report by adding Wi-Fi 6e Function. Since the device RF and antenna design is the same and test result is not affected, except AC Conducted Emissions is carrying out, FR112124-02F report reuse test data from the TR112124F report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Keven Cheng

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Lenovo
Model Name	Lenovo L70081
FCC ID	A5MLM21C81
EUT supports Radios application	GSM/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 6+7> 802.11a: 19.92 dBm / 0.0982 W 802.11n HT20: 19.67 dBm / 0.0927 W 802.11n HT40: 19.77 dBm / 0.0948 W 802.11ac VHT20: 19.77 dBm / 0.0948 W 802.11ac VHT40: 19.87 dBm / 0.0971 W 802.11ac VHT80: 19.57 dBm / 0.0906 W 802.11ax HE20: 19.82 dBm / 0.0959 W 802.11ax HE40: 19.97 dBm / 0.0993 W 802.11ax HE80: 19.67 dBm / 0.0927 W
99% Occupied Bandwidth	MIMO <Ant. 6> 802.11a: 16.43 MHz 802.11ax HE20: 18.88 MHz 802.11ax HE40: 37.96 MHz 802.11ax HE80: 78.04 MHz MIMO <Ant. 7> 802.11a: 16.43 MHz 802.11ax HE20: 19.03 MHz 802.11ax HE40: 38.16 MHz 802.11ax HE80: 78.04 MHz



Product Specification subjective to this standard			
Antenna Type / Gain	<Ant. 6>: PIFA Antenna with gain 0 dBi <Ant. 7>: PIFA Antenna with gain -1.5 dBi		
Type of Modulation	802.11a/n : OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)		
Antenna Function Description		Ant. 6	Ant. 7
	802.11 a/n/ac/ax MIMO	V	V

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. MIMO Ant. 6+7 is a calculated result from sum of the power MIMO Ant. 6 and MIMO Ant. 7.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan
Test Site No.	Sporton Site No.
	CO05-HY, TH02-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan
Test Site No.	Sporton Site No.
	03CH16-HY (TAF Code: 3786)
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
- 2. The above Frequency and Channel in "[#]" were 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps, Nss=2
802.11n HT20 (Covered by HE20)	MCS0, Nss=2
802.11n HT40 (Covered by HE40)	MCS0, Nss=2
802.11ac VHT20 (Covered by HE20)	MCS0, Nss=2
802.11ac VHT40 (Covered by HE40)	MCS0, Nss=2
802.11ac VHT80 (Covered by HE80)	MCS0, Nss=2
802.11ax HE20	MCS0, Nss=2
802.11ax HE40	MCS0, Nss=2
802.11ax HE80	MCS0, Nss=2

Summary table of Test Cases	
AC Conducted Emission	Mode 1: GSM850 Link + Bluetooth Link + WLAN (5GHz) Link + MPEG4 + USB Cable (Port 1) (Charging from Adapter (Port 1)) + USB Cable (Port 2) (Data Link with Notebook) (Read) + SIM 1
Remark: Data Link with Notebook means data application transferred mode between EUT and Notebook.	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

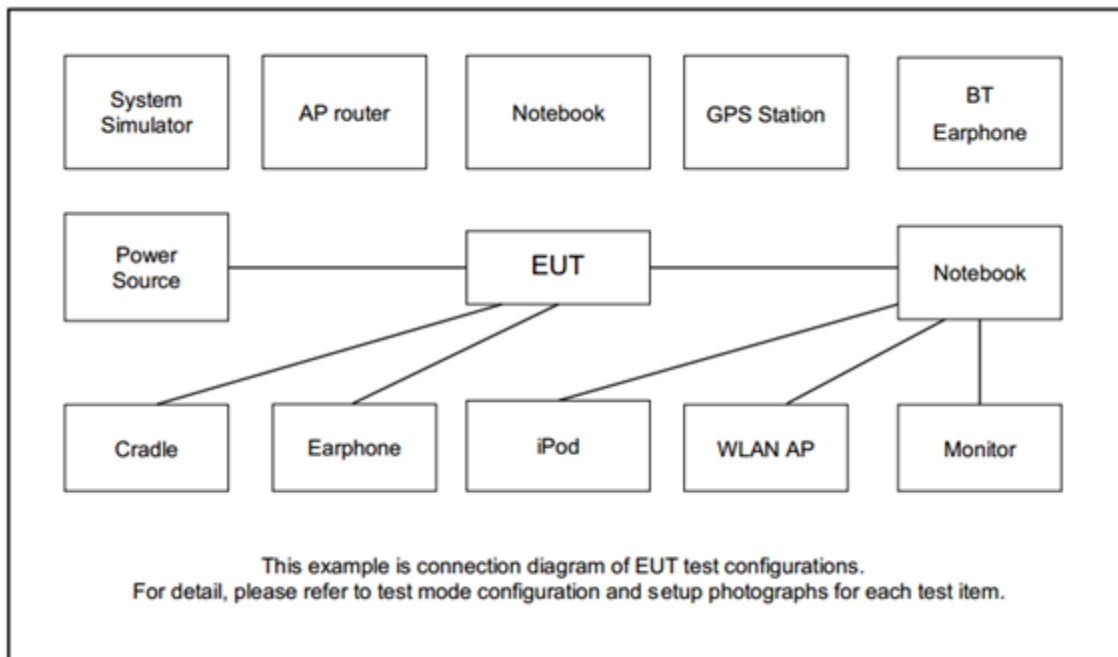



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
4.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	iPod	Apple	A1285	DoC	Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT 4.0.00158.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 4.2 + 10 = 14.2 \text{ (dB)}
\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

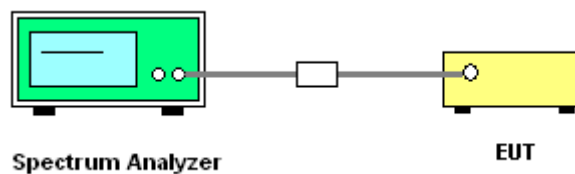


3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth



Please refer to Appendix A.

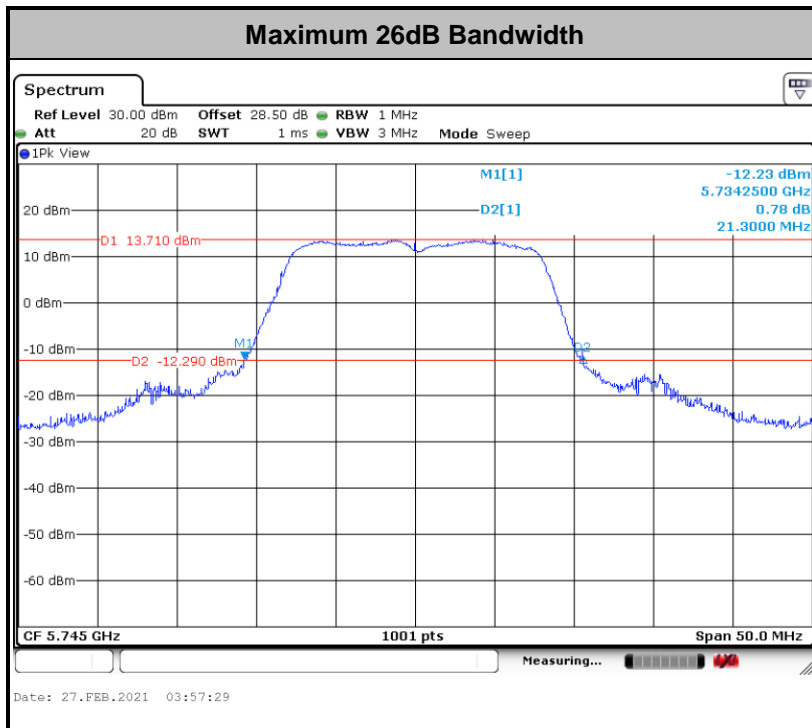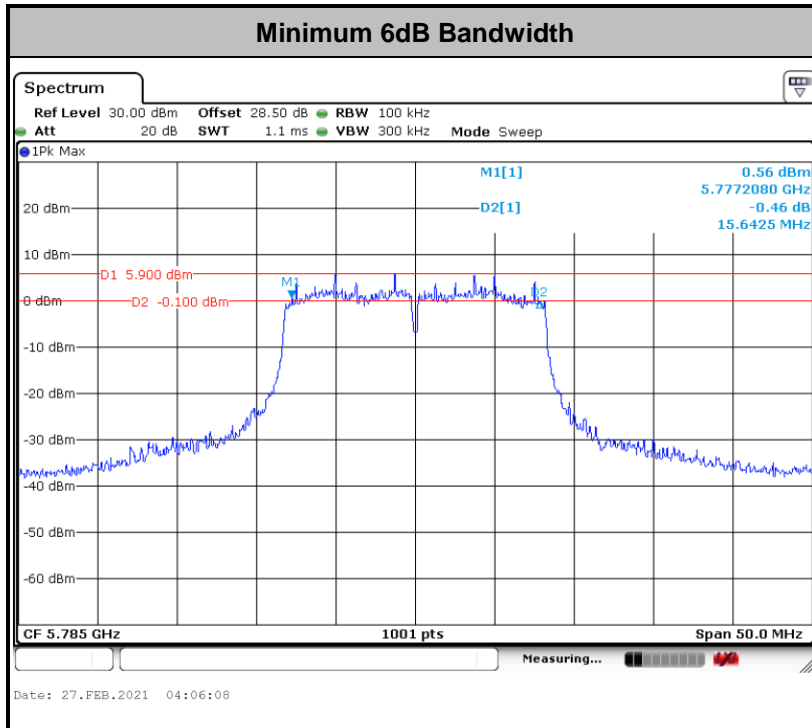

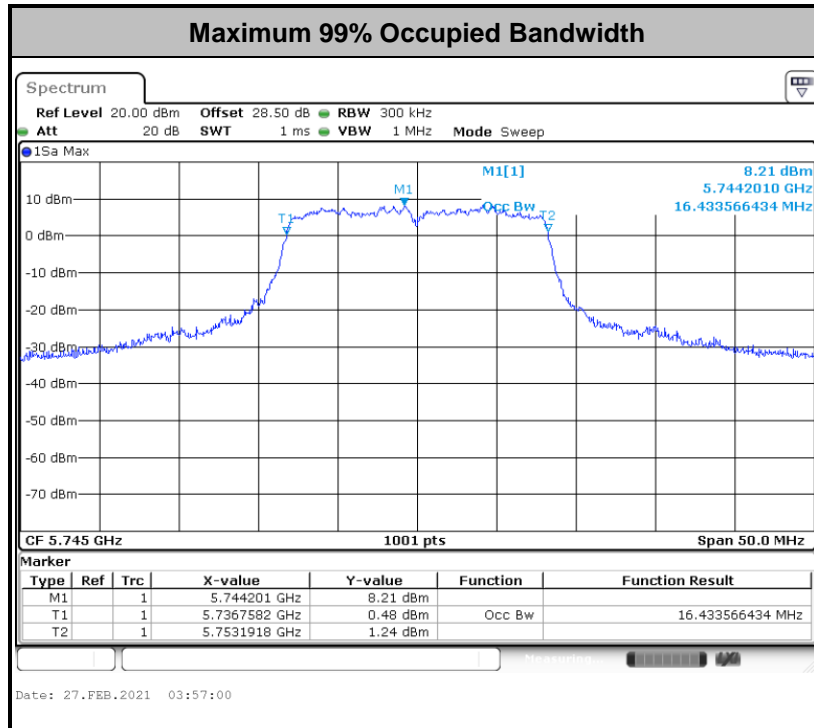

<For 802.11ax mode>

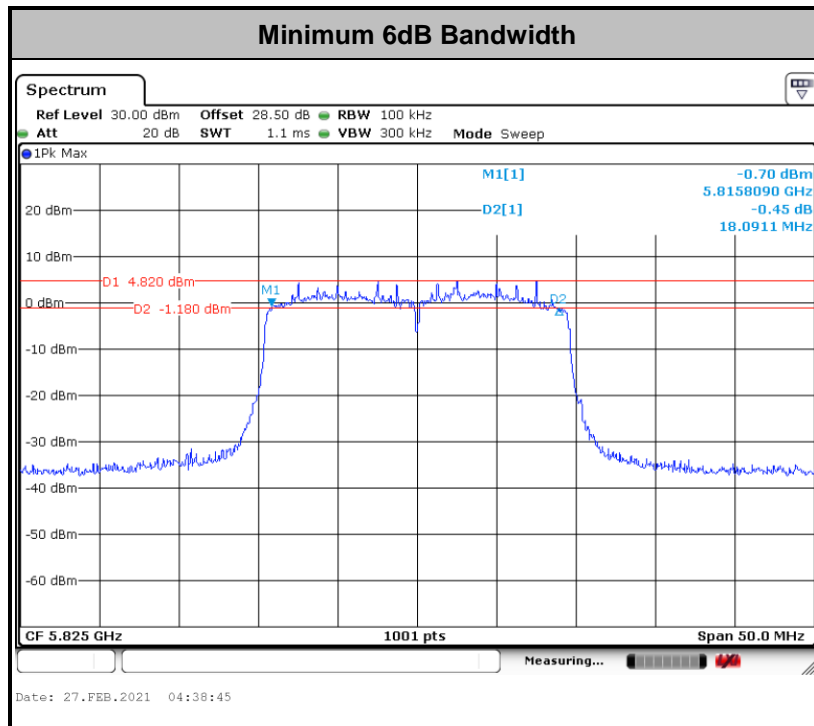

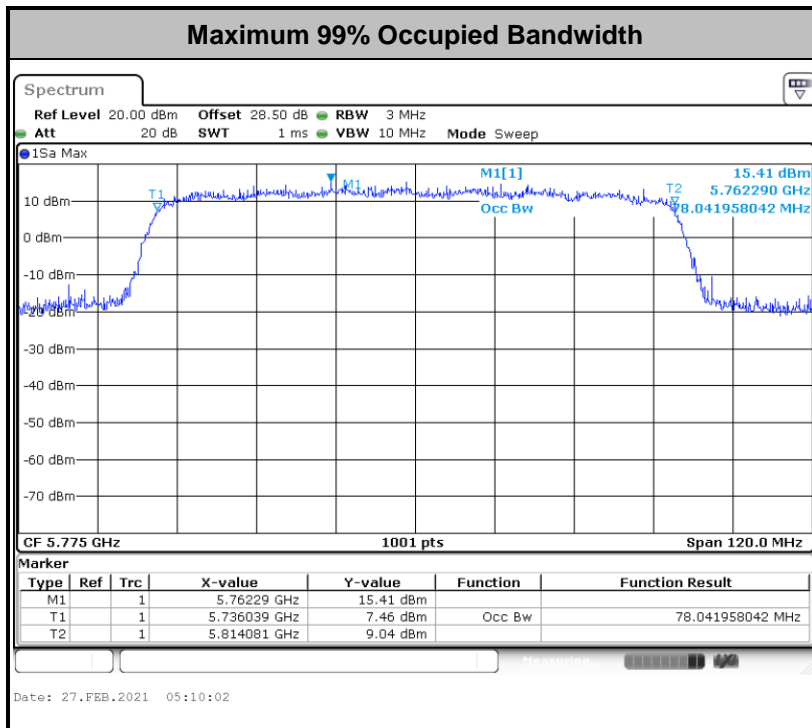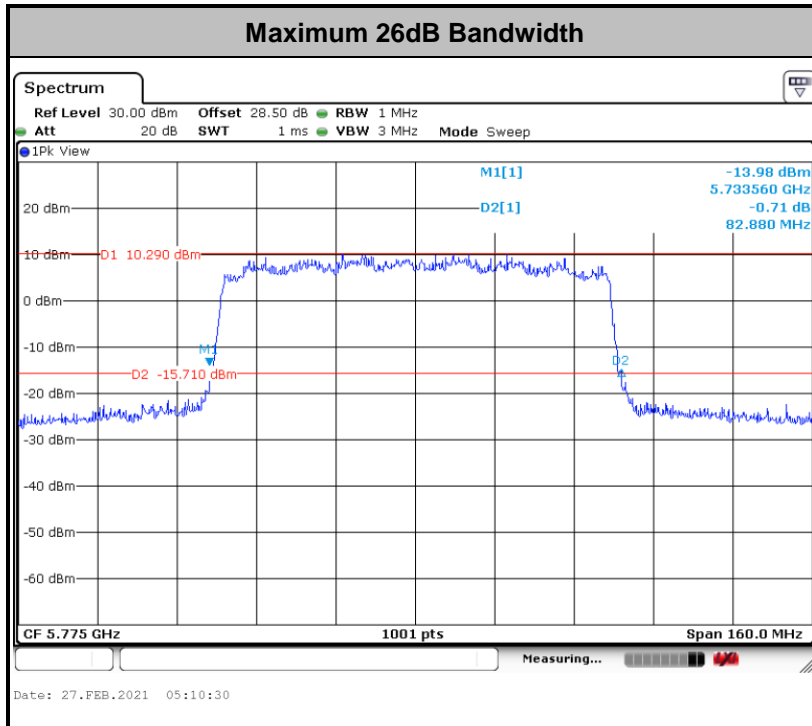

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

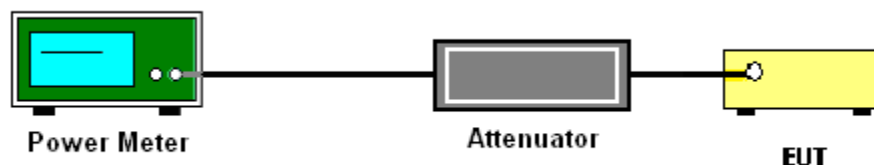

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-3


(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.



With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.

3.3.4 Test Setup

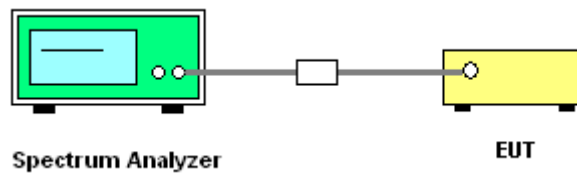



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

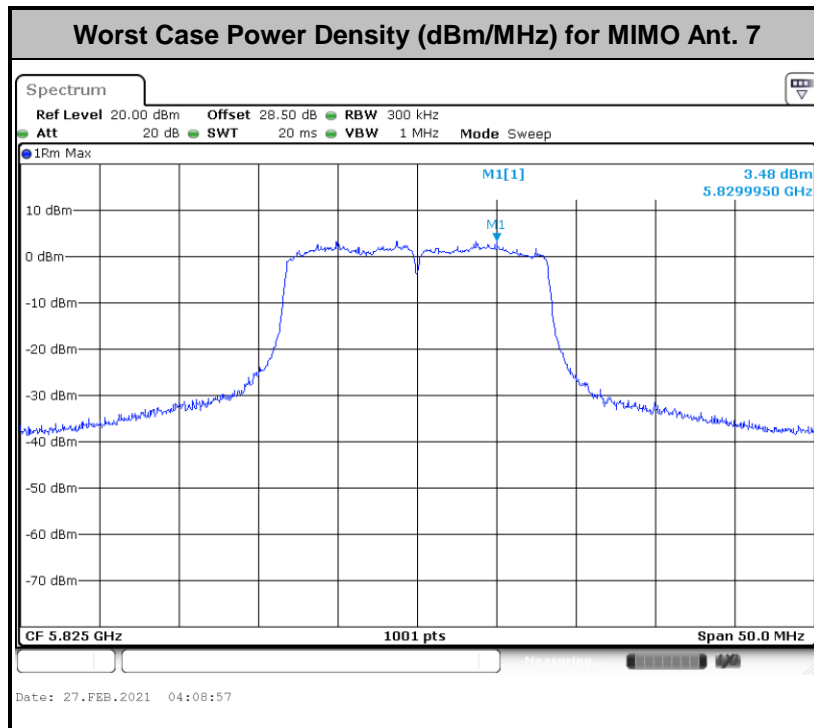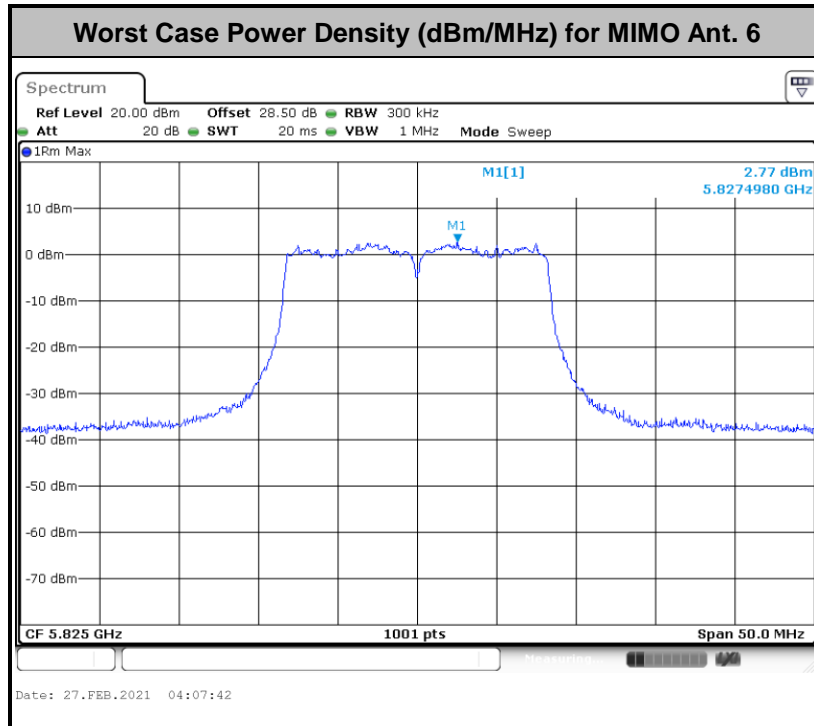



<For 802.11ax mode>

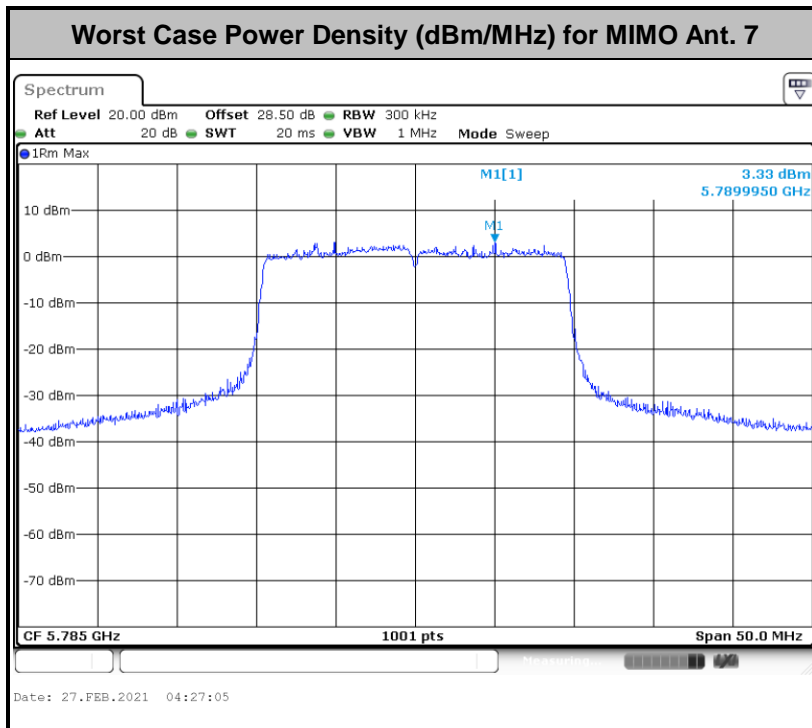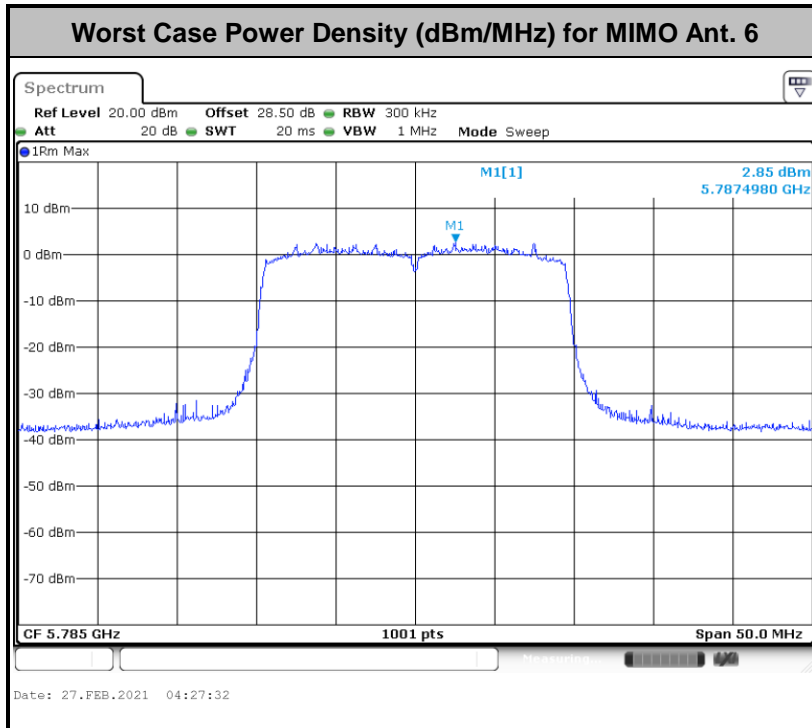

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.4.2 Measuring Instruments

See list of measuring equipment of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

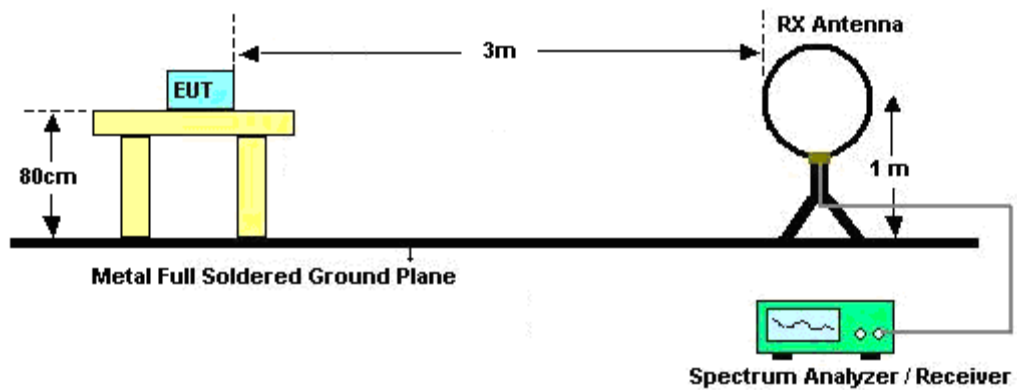

For radiated emissions from 30MHz to 1GHz

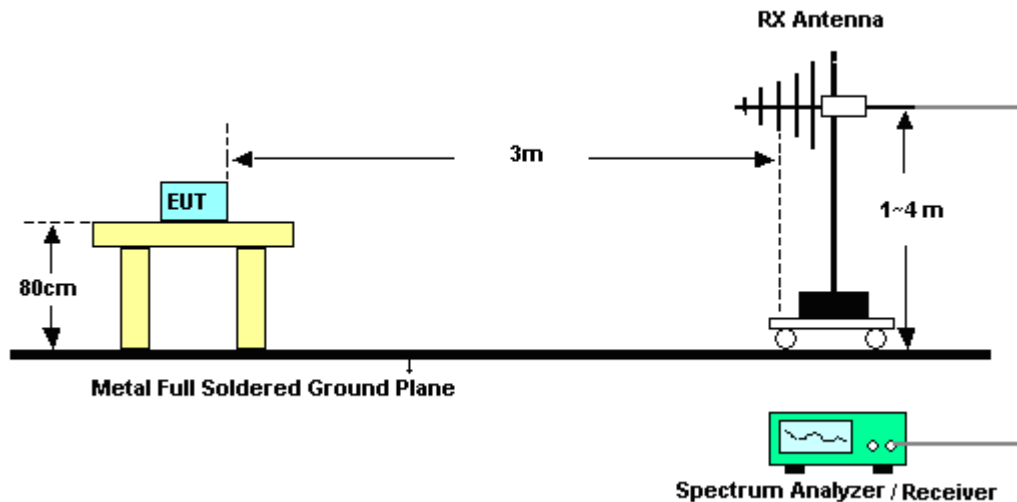

For radiated test above 1GHz

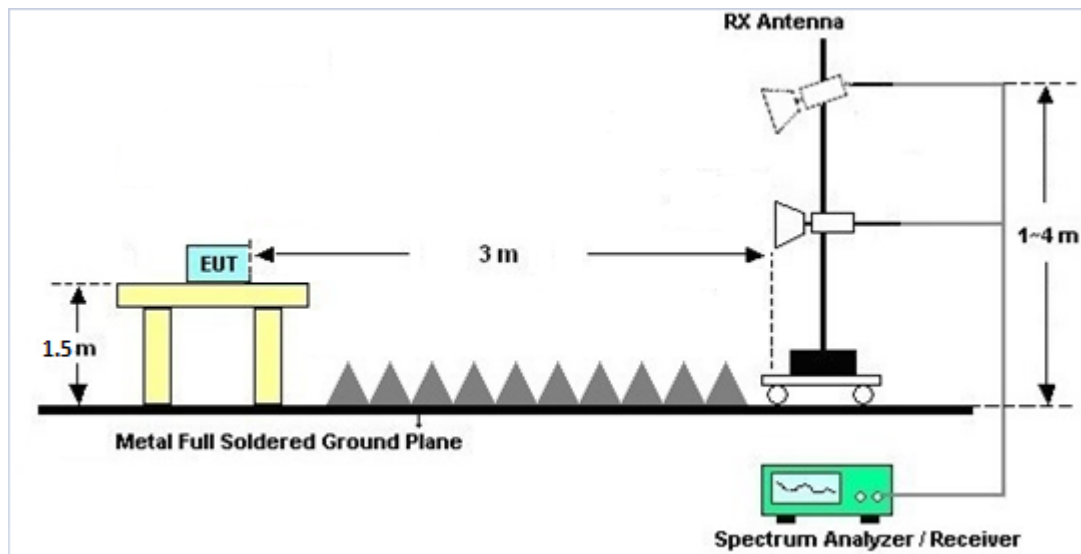

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

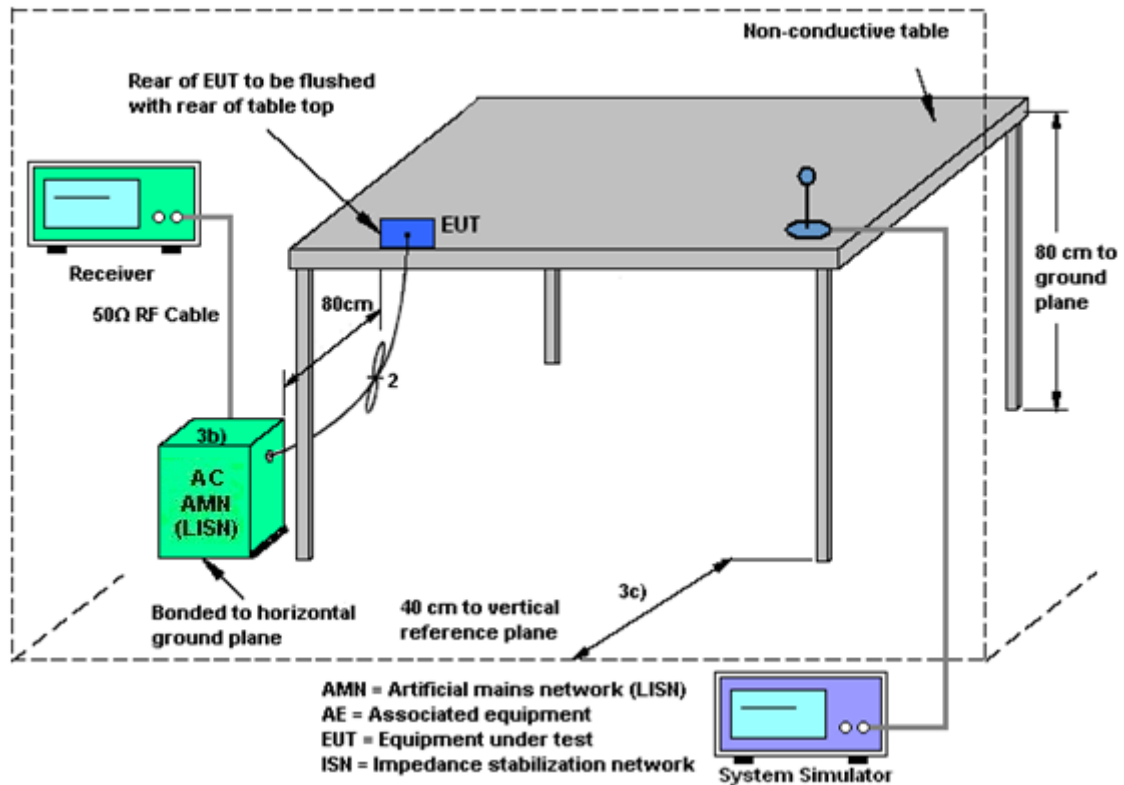

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)a)ii).

For PSD, the directional gain calculation is following F)2)a)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 6 (dBi)	Ant. 7 (dBi)				
Band IV	0.00	-1.50	0.00	0.00	0.00	0.00

$$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$$

$$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$$



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Feb. 11, 2021~ Feb. 21, 2021	Jul. 13, 2021	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 11, 2020	Feb. 11, 2021~ Feb. 21, 2021	Oct. 10, 2021	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	Sep. 29, 2020	Feb. 11, 2021~ Feb. 21, 2021	Sep. 28, 2021	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170576	18GHz ~40GHz	May 22, 2020	Feb. 11, 2021~ Feb. 21, 2021	May 21, 2021	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Sep. 30, 2020	Feb. 11, 2021~ Feb. 21, 2021	Sep. 29, 2021	Radiation (03CH16-HY)
Amplifier	EMCI	EMC051845SE	980729	1-18GHz	Jul. 10, 2020	Feb. 11, 2021~ Feb. 21, 2021	Jul. 09, 2021	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 10, 2020	Feb. 11, 2021~ Feb. 21, 2021	Dec. 09, 2021	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~40GHz	Dec. 11, 2020	Feb. 11, 2021~ Feb. 21, 2021	Dec. 10, 2021	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 11, 2020	Feb. 11, 2021~ Feb. 21, 2021	Dec. 10, 2021	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 15, 2021	Feb. 11, 2021~ Feb. 21, 2021	Jan. 14, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4PE	NA	Aug. 29, 2020	Feb. 11, 2021~ Feb. 21, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4PE	NA	Aug. 29, 2020	Feb. 11, 2021~ Feb. 21, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-575 7	NA	Aug. 29, 2020	Feb. 11, 2021~ Feb. 21, 2021	Aug. 28, 2021	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Feb. 11, 2021~ Feb. 21, 2021	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 11, 2021~ Feb. 21, 2021	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 11, 2021~ Feb. 21, 2021	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RPR3006W	16100054SNO1 2	10MHz~6GHz	Dec. 16, 2020	Feb. 01, 2021~ Feb. 27, 2021	Dec. 15, 2021	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jan. 21, 2021	Feb. 01, 2021~ Feb. 27, 2021	Jan. 20, 2022	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Feb. 01, 2021~ Feb. 27, 2021	Jul. 21, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Feb. 01, 2021~ Feb. 27, 2021	Mar. 16, 2021	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 04, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	May 04, 2021	Sep. 10, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	May 04, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	May 04, 2021	Nov. 30, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	May 04, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 04, 2021	N/A	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	May 04, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Feb. 25, 2021	May 04, 2021	Feb. 24, 2022	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu/Shiming Liu	Temperature:	22.3~25.5	°C
Test Date:	2021/2/1~2021/2/27	Relative Humidity:	56.3~59.1	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
11a	6Mbps	2	149	5745	16.43	16.43	20.25	21.30	16.34	15.89	0.5	Pass
11a	6Mbps	2	157	5785	16.43	16.38	20.45	21.05	16.34	15.64	0.5	Pass
11a	6Mbps	2	165	5825	16.43	16.38	20.50	21.20	16.34	15.89	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	16.70	17.00	19.86	30.00	30.00	0.00	0.00	Pass
11a	6Mbps	2	157	5785	16.60	17.20	19.92	30.00	30.00	0.00	0.00	Pass
11a	6Mbps	2	165	5825	16.60	17.20	19.92	30.00	30.00	0.00	0.00	Pass
HT20	MCS0	2	149	5745	16.40	16.70	19.56	30.00	30.00	0.00	0.00	Pass
HT20	MCS0	2	157	5785	16.30	16.90	19.62	30.00	30.00	0.00	0.00	Pass
HT20	MCS0	2	165	5825	16.30	17.00	19.67	30.00	30.00	0.00	0.00	Pass
HT40	MCS0	2	151	5755	16.50	17.00	19.77	30.00	30.00	0.00	0.00	Pass
HT40	MCS0	2	159	5795	16.50	17.00	19.77	30.00	30.00	0.00	0.00	Pass
VHT20	MCS0	2	149	5745	16.50	16.80	19.66	30.00	30.00	0.00	0.00	Pass
VHT20	MCS0	2	157	5785	16.40	17.00	19.72	30.00	30.00	0.00	0.00	Pass
VHT20	MCS0	2	165	5825	16.40	17.10	19.77	30.00	30.00	0.00	0.00	Pass
VHT40	MCS0	2	151	5755	16.60	17.10	19.87	30.00	30.00	0.00	0.00	Pass
VHT40	MCS0	2	159	5795	16.60	17.10	19.87	30.00	30.00	0.00	0.00	Pass
VHT80	MCS0	2	155	5775	16.30	16.80	19.57	30.00	30.00	0.00	0.00	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
11a	6Mbps	2	149	5745	2.22	5.00	5.44	8.45	30.00	0.00	0.00	0.00	Pass	
11a	6Mbps	2	157	5785	2.22	5.07	5.54	8.55	30.00	0.00	0.00	0.00	Pass	
11a	6Mbps	2	165	5825	2.22	4.99	5.70	8.71	30.00	0.00	0.00	0.00	Pass	

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 6	Ant 7	Ant 6	Ant 7	Ant 6	Ant 7		
HE20	MCS0	2	149	5745	Full	18.88	18.98	22.35	22.65	18.89	18.69	0.5	Pass
HE20	MCS0	2	157	5785	Full	18.88	19.03	22.30	22.75	18.29	18.84	0.5	Pass
HE20	MCS0	2	165	5825	Full	18.88	19.03	22.50	22.80	18.09	18.59	0.5	Pass
HE40	MCS0	2	151	5755	Full	37.96	38.06	41.40	41.40	37.78	37.96	0.5	Pass
HE40	MCS0	2	159	5795	Full	37.86	38.16	41.31	41.94	36.97	37.96	0.5	Pass
HE80	MCS0	2	155	5775	Full	78.04	78.04	82.40	82.88	76.92	77.24	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	16.60	16.90	19.76	30.00		0.00		Pass
HE20	MCS0	2	149	5745	26/0	8.30	6.90	10.67	30.00		0.00		Pass
HE20	MCS0	2	157	5785	Full	16.50	17.10	19.82	30.00		0.00		Pass
HE20	MCS0	2	165	5825	Full	16.50	17.20	19.87	30.00		0.00		Pass
HE20	MCS0	2	165	5825	26/8	7.70	6.70	10.24	30.00		0.00		Pass
HE40	MCS0	2	151	5755	Full	16.70	17.20	19.97	30.00		0.00		Pass
HE40	MCS0	2	159	5795	Full	16.70	17.20	19.97	30.00		0.00		Pass
HE80	MCS0	2	155	5775	Full	16.40	16.90	19.67	30.00		0.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 6	Ant 7	Ant 6	Ant 7	SUM	Ant 6	Ant 7	Ant 6	Ant 7	
HE20	MCS0	2	149	5745	Full	2.22		5.06	5.45	8.46	30.00		0.00		Pass
HE20	MCS0	2	149	5745	26/0	2.22		4.66	3.35	7.67	30.00		0.00		Pass
HE20	MCS0	2	157	5785	Full	2.22		5.07	5.55	8.56	30.00		0.00		Pass
HE20	MCS0	2	165	5825	Full	2.22		5.04	5.51	8.52	30.00		0.00		Pass
HE20	MCS0	2	165	5825	26/8	2.22		4.28	3.70	7.29	30.00		0.00		Pass
HE40	MCS0	2	151	5755	Full	2.22		2.57	2.96	5.97	30.00		0.00		Pass
HE40	MCS0	2	159	5795	Full	2.22		2.72	3.00	6.01	30.00		0.00		Pass
HE80	MCS0	2	155	5775	Full	2.22		-0.43	-0.04	2.97	30.00		0.00		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 112124-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

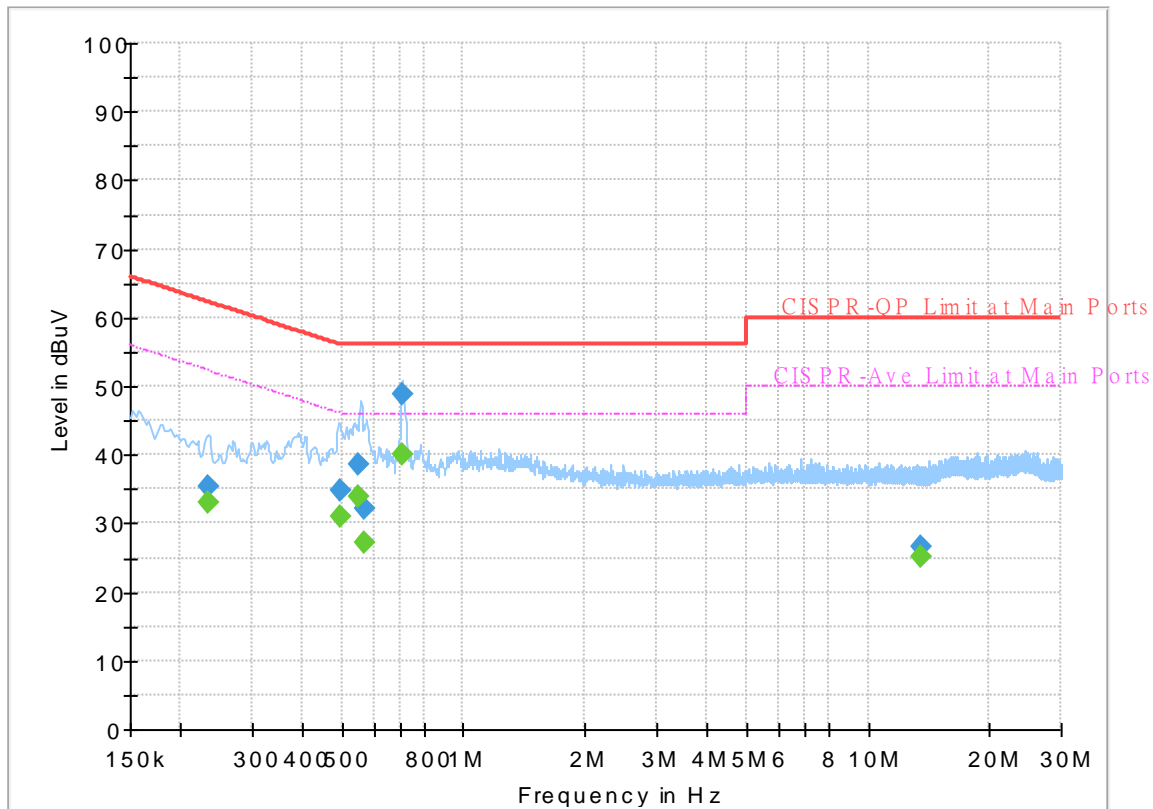


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.233970	---	32.92	52.31	19.39	L1	OFF	19.5
0.233970	35.52	---	62.31	26.79	L1	OFF	19.5
0.496500	---	30.99	46.06	15.07	L1	OFF	19.7
0.496500	34.76	---	56.06	21.30	L1	OFF	19.7
0.552750	---	33.94	46.00	12.06	L1	OFF	19.7
0.552750	38.53	---	56.00	17.47	L1	OFF	19.7
0.571740	---	27.31	46.00	18.69	L1	OFF	19.7
0.571740	32.06	---	56.00	23.94	L1	OFF	19.7
0.705750	---	39.95	46.00	6.05	L1	OFF	19.8
0.705750	48.97	---	56.00	7.03	L1	OFF	19.8
13.528500	---	25.11	50.00	24.89	L1	OFF	20.1
13.528500	26.57	---	60.00	33.43	L1	OFF	20.1

EUT Information

Report NO : 112124-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

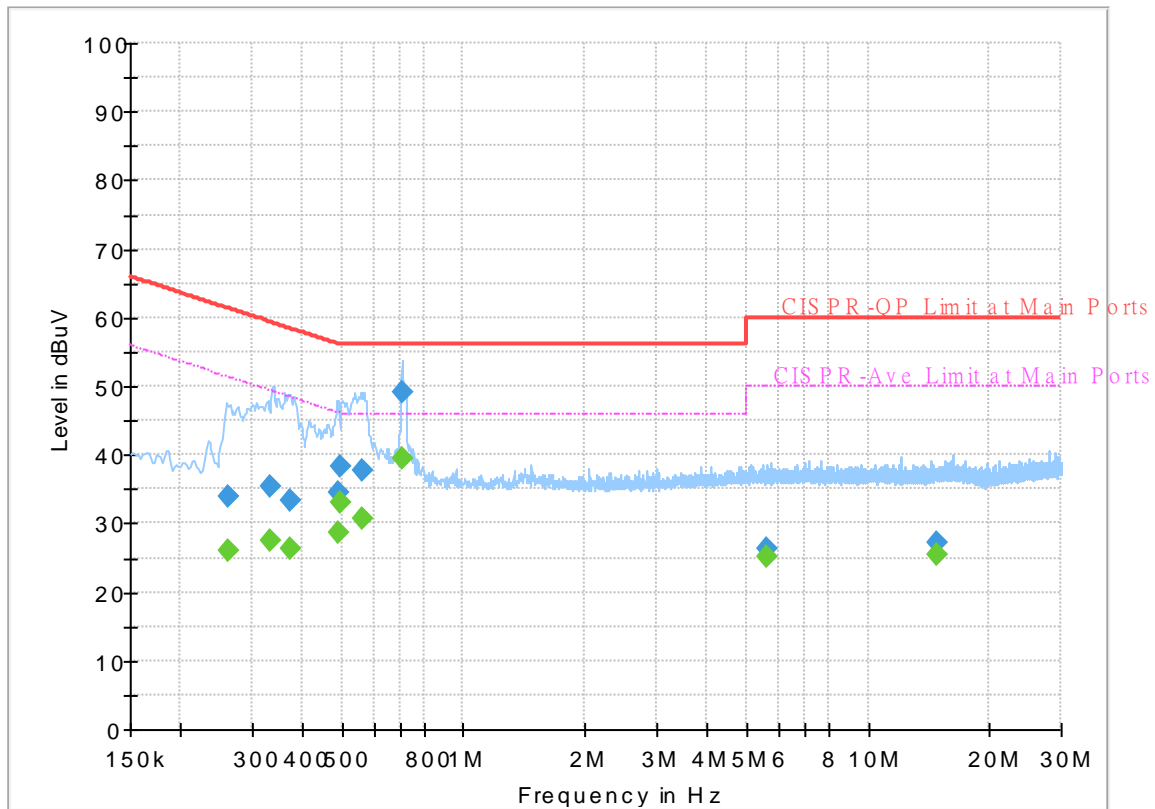

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.263220	---	25.97	51.33	25.36	N	OFF	19.5
0.263220	33.81	---	61.33	27.52	N	OFF	19.5
0.334500	---	27.49	49.34	21.85	N	OFF	19.6
0.334500	35.45	---	59.34	23.89	N	OFF	19.6
0.371220	---	26.42	48.47	22.05	N	OFF	19.6
0.371220	33.44	---	58.47	25.03	N	OFF	19.6
0.489750	---	28.72	46.17	17.45	N	OFF	19.7
0.489750	34.38	---	56.17	21.79	N	OFF	19.7
0.498660	---	33.06	46.02	12.96	N	OFF	19.7
0.498660	38.27	---	56.02	17.75	N	OFF	19.7
0.564990	---	30.74	46.00	15.26	N	OFF	19.8
0.564990	37.67	---	56.00	18.33	N	OFF	19.8
0.705750	---	39.61	46.00	6.39	N	OFF	19.9
0.705750	49.04	---	56.00	6.96	N	OFF	19.9
5.610750	---	25.29	50.00	24.71	N	OFF	19.9
5.610750	26.46	---	60.00	33.54	N	OFF	19.9
14.868870	---	25.48	50.00	24.52	N	OFF	20.3
14.868870	27.28	---	60.00	32.72	N	OFF	20.3



Appendix C. Radiated Spurious Emission

Test Engineer :	Karl Hou, Caster Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5607.2	54.08	-14.12	68.2	38.51	31.69	13.65	29.77	100	119	P	H	
		5694	69.03	-31.75	100.78	53.42	31.69	13.72	29.8	100	119	P	H	
		5720	82.14	-28.66	110.8	66.38	31.82	13.75	29.81	100	119	P	H	
		5724.6	93.59	-27.7	121.29	77.81	31.85	13.75	29.82	100	119	P	H	
	*	5745	117.95	-	-	102.03	31.97	13.77	29.82	100	119	P	H	
	*	5745	111.15	-	-	95.23	31.97	13.77	29.82	100	119	A	H	
														H
														H
			5607.2	53.89	-14.31	68.2	38.32	31.69	13.65	29.77	100	232	P	V
			5698.8	67.57	-36.75	104.32	51.95	31.7	13.73	29.81	100	232	P	V
			5718.4	77.27	-33.08	110.35	61.52	31.81	13.75	29.81	100	232	P	V
			5723.2	85.82	-32.28	118.1	70.04	31.84	13.75	29.81	100	232	P	V
	*		5745	113.53	-	-	97.61	31.97	13.77	29.82	100	232	P	V
	*		5745	106.15	-	-	90.23	31.97	13.77	29.82	100	232	A	V
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5624.2	53.62	-14.58	68.2	38.09	31.65	13.66	29.78	100	118	P	H
		5690.4	55.52	-42.6	98.12	39.92	31.68	13.72	29.8	100	118	P	H
		5720	61.32	-49.48	110.8	45.56	31.82	13.75	29.81	100	118	P	H
		5724	63.49	-56.43	119.92	47.72	31.84	13.75	29.82	100	118	P	H
	*	5785	117.01	-	-	101.04	32	13.81	29.84	100	118	P	H
	*	5785	110.35	-	-	94.38	32	13.81	29.84	100	118	A	H
		5850	59.3	-62.9	122.2	43.25	32.1	13.81	29.86	100	118	P	H
		5855	56.64	-54.16	110.8	40.58	32.11	13.81	29.86	100	118	P	H
		5908	54.61	-26.13	80.74	38.47	32.22	13.81	29.89	100	118	P	H
		5928	53.86	-14.34	68.2	37.68	32.26	13.81	29.89	100	118	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5601	54.02	-14.18	68.2	38.45	31.7	13.64	29.77	100	233	P	V
		5680.6	53.96	-36.92	90.88	38.39	31.66	13.71	29.8	100	233	P	V
		5717.8	58.43	-51.75	110.18	42.68	31.81	13.75	29.81	100	233	P	V
		5722.4	57.99	-58.28	116.27	42.22	31.83	13.75	29.81	100	233	P	V
	*	5785	113.12	-	-	97.15	32	13.81	29.84	100	233	P	V
	*	5785	106.18	-	-	90.21	32	13.81	29.84	100	233	A	V
		5852.4	53.99	-62.74	116.73	37.94	32.1	13.81	29.86	100	233	P	V
		5863.6	53.77	-54.62	108.39	37.7	32.13	13.81	29.87	100	233	P	V
		5920.2	54.06	-17.68	71.74	37.9	32.24	13.81	29.89	100	233	P	V
		5942.8	54.87	-13.33	68.2	38.67	32.29	13.81	29.9	100	233	P	V
													V
													V



WiFi Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	115.3	-	-	99.28	32.05	13.82	29.85	100	119	P	H	
	*	5825	108.06	-	-	92.04	32.05	13.82	29.85	100	119	A	H	
		5851.6	77.95	-40.6	118.55	61.9	32.1	13.81	29.86	100	119	P	H	
		5855.2	73.69	-37.05	110.74	57.63	32.11	13.81	29.86	100	119	P	H	
		5876.4	61.54	-42.62	104.16	45.45	32.15	13.81	29.87	100	119	P	H	
		5942.8	53.37	-14.83	68.2	37.17	32.29	13.81	29.9	100	119	P	H	
														H
														H
	*	5825	112.02	-	-	96	32.05	13.82	29.85	100	235	235	P	V
	*	5825	104.93	-	-	88.91	32.05	13.82	29.85	100	235	235	A	V
		5851.6	71.95	-46.6	118.55	55.9	32.1	13.81	29.86	100	235	235	P	V
		5858.4	71.17	-38.68	109.85	55.11	32.12	13.81	29.87	100	235	235	P	V
		5878.2	59.21	-43.61	102.82	43.11	32.16	13.81	29.87	100	235	235	P	V
		5934	54.96	-13.24	68.2	38.77	32.27	13.81	29.89	100	235	235	P	V
														V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	48.68	-25.32	74	44.17	39.91	20.11	55.51	100	0	P	H
		17235	48.7	-19.5	68.2	39.37	40.9	25.16	56.73	100	0	P	H
													H
													H
		11490	49	-25	74	44.49	39.91	20.11	55.51	100	0	P	V
		17235	49.21	-18.99	68.2	39.88	40.9	25.16	56.73	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	48.23	-25.77	74	43.73	39.76	20.18	55.44	100	0	P	H
		17355	48.24	-19.96	68.2	38.33	41.6	25.21	56.9	100	0	P	H
													H
													H
		11570	49.6	-24.4	74	45.1	39.76	20.18	55.44	100	0	P	V
		17355	48.71	-19.49	68.2	38.8	41.6	25.21	56.9	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	47.43	-26.57	74	43.03	39.55	20.23	55.38	100	0	P	H
		17475	49.49	-18.71	68.2	38.85	42.45	25.25	57.06	100	0	P	H
													H
													H
		11650	47.9	-26.1	74	43.5	39.55	20.23	55.38	100	0	P	V
		17475	49.18	-19.02	68.2	38.54	42.45	25.25	57.06	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 149 5745MHz		5645	54.79	-13.41	68.2	39.29	31.61	13.68	29.79	100	118	P	H	
		5693	71.04	-29	100.04	55.43	31.69	13.72	29.8	100	118	P	H	
		5716.2	84.97	-24.77	109.74	69.24	31.8	13.74	29.81	100	118	P	H	
		5724.4	97.08	-23.75	120.83	81.3	31.85	13.75	29.82	100	118	P	H	
	*	5745	120.06	-	-	104.14	31.97	13.77	29.82	100	118	P	H	
	*	5745	110.81	-	-	94.89	31.97	13.77	29.82	100	118	A	H	
													P	H
													P	H
													P	H
													P	H
														H
														H
			5648.2	53.39	-14.81	68.2	37.9	31.6	13.68	29.79	100	232	P	V
			5699.2	67.42	-37.19	104.61	51.8	31.7	13.73	29.81	100	232	P	V
			5720	87.34	-23.46	110.8	71.58	31.82	13.75	29.81	100	232	P	V
			5721.6	89.15	-25.3	114.45	73.38	31.83	13.75	29.81	100	232	P	V
	*		5745	115.97	-	-	100.05	31.97	13.77	29.82	100	232	P	V
	*		5745	106.15	-	-	90.23	31.97	13.77	29.82	100	232	A	V
												P	V	
												P	V	
												P	V	
												P	V	
													V	
													V	



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5600.8	54.26	-13.94	68.2	38.69	31.7	13.64	29.77	100	119	P	H
		5696.8	58.9	-43.94	102.84	43.28	31.69	13.73	29.8	100	119	P	H
		5713.4	65.42	-43.53	108.95	49.71	31.78	13.74	29.81	100	119	P	H
		5723.8	68.74	-50.72	119.46	52.97	31.84	13.75	29.82	100	119	P	H
	*	5785	119.13	-	-	103.16	32	13.81	29.84	100	119	P	H
	*	5785	109.86	-	-	93.89	32	13.81	29.84	100	119	A	H
		5854.4	63.85	-48.32	112.17	47.79	32.11	13.81	29.86	100	119	P	H
		5855.6	63.48	-47.15	110.63	47.43	32.11	13.81	29.87	100	119	P	H
		5876.4	56.4	-47.76	104.16	40.31	32.15	13.81	29.87	100	119	P	H
		5947.8	54.99	-13.21	68.2	38.78	32.3	13.81	29.9	100	119	P	H
802.11ax													H
HE20 Full													H
CH 157		5642.8	53.87	-14.33	68.2	38.36	31.61	13.68	29.78	100	235	P	V
5785MHz		5699.6	55.63	-49.28	104.91	40.01	31.7	13.73	29.81	100	235	P	V
		5720	62.5	-48.3	110.8	46.74	31.82	13.75	29.81	100	235	P	V
		5721.6	65.57	-48.88	114.45	49.8	31.83	13.75	29.81	100	235	P	V
	*	5785	115.08	-	-	99.11	32	13.81	29.84	100	235	P	V
	*	5785	106.31	-	-	90.34	32	13.81	29.84	100	235	A	V
		5850.4	62.54	-58.75	121.29	46.49	32.1	13.81	29.86	100	235	P	V
		5871	58.91	-47.41	106.32	42.83	32.14	13.81	29.87	100	235	P	V
		5876.6	54.52	-49.49	104.01	38.43	32.15	13.81	29.87	100	235	P	V
		5945.4	53.37	-14.83	68.2	37.17	32.29	13.81	29.9	100	235	P	V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 165 5825MHz	*	5825	118.88	-	-	102.86	32.05	13.82	29.85	100	119	P	H	
	*	5825	108.95	-	-	92.93	32.05	13.82	29.85	100	119	A	H	
		5854	77.41	-35.67	113.08	61.35	32.11	13.81	29.86	100	119	P	H	
		5855.6	75.95	-34.68	110.63	59.9	32.11	13.81	29.87	100	119	P	H	
		5877	66.86	-36.85	103.71	50.77	32.15	13.81	29.87	100	119	P	H	
		5932.4	54.27	-13.93	68.2	38.09	32.26	13.81	29.89	100	119	P	H	
													P	H
													P	H
													P	H
													P	H
														H
														H
		*	5825	113.84	-	-	97.82	32.05	13.82	29.85	100	234	P	V
		*	5825	104.05	-	-	88.03	32.05	13.82	29.85	100	234	A	V
			5852	81.93	-35.71	117.64	65.88	32.1	13.81	29.86	100	234	P	V
			5859	68.53	-41.15	109.68	52.47	32.12	13.81	29.87	100	234	P	V
			5879	60.44	-41.79	102.23	44.34	32.16	13.81	29.87	100	234	P	V
			5936.2	53.59	-14.61	68.2	37.41	32.27	13.81	29.9	100	234	P	V
														P
													P	V
													P	V
													P	V
													V	
													V	



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
80211ax HE20 Full CH 149 5745MHz		11490	48.33	-25.67	74	43.82	39.91	20.11	55.51	100	0	P	H	
		17235	48.47	-19.73	68.2	39.14	40.9	25.16	56.73	100	0	P	H	
													H	
													H	
			11490	49.2	-24.8	74	44.69	39.91	20.11	55.51	100	0	P	V
			17235	48.4	-19.8	68.2	39.07	40.9	25.16	56.73	100	0	P	V
														V
802. 11ax HE20 Full CH 157 5785MHz		11570	47.99	-26.01	74	43.49	39.76	20.18	55.44	100	0	P	H	
		17355	48.89	-19.31	68.2	38.98	41.6	25.21	56.9	100	0	P	H	
													H	
													H	
			11570	48.87	-25.13	74	44.37	39.76	20.18	55.44	100	0	P	V
			17355	49.44	-18.76	68.2	39.53	41.6	25.21	56.9	100	0	P	V
														V
802. 11ax HE20 Full CH 165 5825MHz		11650	47.17	-26.83	74	42.77	39.55	20.23	55.38	100	0	P	H	
		17475	49.34	-18.86	68.2	38.7	42.45	25.25	57.06	100	0	P	H	
													H	
													H	
			11650	47.32	-26.68	74	42.92	39.55	20.23	55.38	100	0	P	V
			17475	48.13	-20.07	68.2	37.49	42.45	25.25	57.06	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Partial 26 (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/0 CH 149 5745MHz		5612.8	54.66	-13.54	68.2	39.11	31.67	13.65	29.77	100	117	P	H	
		5686.6	54.9	-40.42	95.32	39.31	31.67	13.72	29.8	100	117	P	H	
		5719.2	58.44	-52.14	110.58	42.68	31.82	13.75	29.81	100	117	P	H	
		5725	66.25	-55.95	122.2	50.47	31.85	13.75	29.82	100	117	P	H	
	*	5745	121.51	-	-	105.59	31.97	13.77	29.82	100	117	P	H	
	*	5745	112.95	-	-	97.03	31.97	13.77	29.82	100	117	A	H	
														H
														H
			5638.2	54.42	-13.78	68.2	38.91	31.62	13.67	29.78	391	84	P	V
			5687.4	55.66	-40.25	95.91	40.07	31.67	13.72	29.8	391	84	P	V
			5719.2	56.01	-54.57	110.58	40.25	31.82	13.75	29.81	391	84	P	V
			5725	61.52	-60.68	122.2	45.74	31.85	13.75	29.82	391	84	P	V
	*		5745	116.45	-	-	100.53	31.97	13.77	29.82	391	84	P	V
	*		5745	107.82	-	-	91.9	31.97	13.77	29.82	391	84	A	V
													V	
													V	



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5649.8	64.69	-3.51	68.2	49.2	31.6	13.68	29.79	100	118	P	H
		5697.6	78.92	-24.51	103.43	63.3	31.7	13.73	29.81	100	118	P	H
		5714	95.7	-13.42	109.12	79.99	31.78	13.74	29.81	100	118	P	H
		5724.4	95	-25.83	120.83	79.22	31.85	13.75	29.82	100	118	P	H
	*	5755	116.85	-	-	100.9	32	13.78	29.83	100	118	P	H
	*	5755	106.92	-	-	90.97	32	13.78	29.83	100	118	A	H
		5850	59.98	-62.22	122.2	43.93	32.1	13.81	29.86	100	118	P	H
		5856.6	61.65	-48.7	110.35	45.6	32.11	13.81	29.87	100	118	P	H
		5878.6	57.4	-45.13	102.53	41.3	32.16	13.81	29.87	100	118	P	H
		5940	54.62	-13.58	68.2	38.43	32.28	13.81	29.9	100	118	P	H
802.11ax													H
HE40 Full													H
CH 151		5646.4	55.86	-12.34	68.2	40.36	31.61	13.68	29.79	100	233	P	V
5755MHz		5691.6	68.41	-30.6	99.01	52.81	31.68	13.72	29.8	100	233	P	V
		5719.6	86.67	-24.02	110.69	70.91	31.82	13.75	29.81	100	233	P	V
		5721.2	86.43	-27.11	113.54	70.66	31.83	13.75	29.81	100	233	P	V
	*	5755	111.53	-	-	95.58	32	13.78	29.83	100	233	P	V
	*	5755	101.68	-	-	85.73	32	13.78	29.83	100	233	A	V
		5854.8	55.42	-55.84	111.26	39.36	32.11	13.81	29.86	100	233	P	V
		5872.6	55.16	-50.71	105.87	39.07	32.15	13.81	29.87	100	233	P	V
		5899.4	54.73	-32.37	87.1	38.6	32.2	13.81	29.88	100	233	P	V
		5944	54.96	-13.24	68.2	38.76	32.29	13.81	29.9	100	233	P	V
													V
													V



WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5605.6	54.99	-13.21	68.2	39.42	31.69	13.65	29.77	100	118	P	H
		5693.8	63.67	-36.96	100.63	48.06	31.69	13.72	29.8	100	118	P	H
		5709.8	67.55	-40.4	107.95	51.86	31.76	13.74	29.81	100	118	P	H
		5722.2	70.67	-45.15	115.82	54.9	31.83	13.75	29.81	100	118	P	H
	*	5795	115.86	-	-	99.88	32	13.82	29.84	100	118	P	H
	*	5795	105.98	-	-	90	32	13.82	29.84	100	118	A	H
		5853.8	69.67	-43.87	113.54	53.61	32.11	13.81	29.86	100	118	P	H
		5856.8	70.96	-39.34	110.3	54.91	32.11	13.81	29.87	100	118	P	H
		5875.6	66.23	-38.52	104.75	50.14	32.15	13.81	29.87	100	118	P	H
		5945.8	54.89	-13.31	68.2	38.69	32.29	13.81	29.9	100	118	P	H
802.11ax													H
HE40 Full													H
CH 159		5639.4	55.2	-13	68.2	39.68	31.62	13.68	29.78	100	235	P	V
5795MHz		5699.4	60.86	-43.9	104.76	45.24	31.7	13.73	29.81	100	235	P	V
		5710.4	65.47	-42.64	108.11	49.78	31.76	13.74	29.81	100	235	P	V
		5720	65.23	-45.57	110.8	49.47	31.82	13.75	29.81	100	235	P	V
	*	5795	111.6	-	-	95.62	32	13.82	29.84	100	235	P	V
	*	5795	101.92	-	-	85.94	32	13.82	29.84	100	235	A	V
		5850.4	69.83	-51.46	121.29	53.78	32.1	13.81	29.86	100	235	P	V
		5860.8	65.16	-44.01	109.17	49.1	32.12	13.81	29.87	100	235	P	V
		5884	61.97	-36.55	98.52	45.87	32.17	13.81	29.88	100	235	P	V
		5939.4	54.67	-13.53	68.2	38.48	32.28	13.81	29.9	100	235	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 151 5755MHz		11510	48.51	-25.49	74	43.99	39.88	20.13	55.49	100	0	P	H	
		17265	47.31	-20.89	68.2	37.92	40.99	25.17	56.77	100	0	P	H	
													H	
													H	
			11510	48.26	-25.74	74	43.74	39.88	20.13	55.49	100	0	P	V
			17265	47.2	-21	68.2	37.81	40.99	25.17	56.77	100	0	P	V
														V
802.11ax HE40 Full CH 159 5795MHz		11590	47.75	-26.25	74	43.27	39.72	20.19	55.43	100	0	P	H	
		17385	48.08	-20.12	68.2	37.94	41.86	25.22	56.94	100	0	P	H	
													H	
													H	
			11590	48.04	-25.96	74	43.56	39.72	20.19	55.43	100	0	P	V
			17385	47.89	-20.31	68.2	37.75	41.86	25.22	56.94	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5649.6	64.28	-3.92	68.2	48.79	31.6	13.68	29.79	100	119	P	H
		5693.2	76.34	-23.85	100.19	60.73	31.69	13.72	29.8	100	119	P	H
		5715.4	79.56	-29.95	109.51	63.84	31.79	13.74	29.81	100	119	P	H
		5724.8	82.12	-39.62	121.74	66.34	31.85	13.75	29.82	100	119	P	H
	*	5775	110.62	-	-	94.65	32	13.8	29.83	100	119	P	H
	*	5775	100.58	-	-	84.61	32	13.8	29.83	100	119	A	H
		5855	73.05	-37.75	110.8	56.99	32.11	13.81	29.86	100	119	P	H
		5857.8	73.18	-36.83	110.01	57.12	32.12	13.81	29.87	100	119	P	H
		5875.6	65.48	-39.27	104.75	49.39	32.15	13.81	29.87	100	119	P	H
		5932.4	54.55	-13.65	68.2	38.37	32.26	13.81	29.89	100	119	P	H
802.11ax													H
HE80 Full													H
CH 155		5648.2	58.42	-9.78	68.2	42.93	31.6	13.68	29.79	100	236	P	V
5775MHz		5699	71.09	-33.37	104.46	55.47	31.7	13.73	29.81	100	236	P	V
		5711.2	72.25	-36.09	108.34	56.55	31.77	13.74	29.81	100	236	P	V
		5720.6	73.95	-38.22	112.17	58.19	31.82	13.75	29.81	100	236	P	V
	*	5775	106.1	-	-	90.13	32	13.8	29.83	100	236	P	V
	*	5775	96.07	-	-	80.1	32	13.8	29.83	100	236	A	V
		5852.6	68.1	-48.17	116.27	52.04	32.11	13.81	29.86	100	236	P	V
		5868.6	67.03	-39.96	106.99	50.95	32.14	13.81	29.87	100	236	P	V
		5882.2	57.31	-42.54	99.85	41.22	32.16	13.81	29.88	100	236	P	V
		5938.6	54.72	-13.48	68.2	38.53	32.28	13.81	29.9	100	236	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 6+7	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 155 5775MHz		11550	47.95	-26.05	74	43.45	39.8	20.16	55.46	100	0	P	H	
		17325	47.42	-20.78	68.2	37.75	41.32	25.2	56.85	100	0	P	H	
													H	
													H	
			11550	47.63	-26.37	74	43.13	39.8	20.16	55.46	100	0	P	V
			17325	47.52	-20.68	68.2	37.85	41.32	25.2	56.85	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

WIFI 802.11ax HE40 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
6+7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE40 Full LF		96.93	28.48	-15.02	43.5	43.89	15.7	1.51	32.62	-	-	P	H	
		188.11	35.81	-7.69	43.5	51.4	15.03	2.25	32.87	100	0	P	H	
		390.84	22.06	-23.94	46	29.36	21.74	3.35	32.39	-	-	P	H	
		533.43	30.63	-15.37	46	35.14	24.22	3.93	32.66	-	-	P	H	
		722.58	36.85	-9.15	46	37.33	27.38	4.64	32.5	-	-	P	H	
		849.65	36.21	-9.79	46	34.51	29.26	5.08	32.64	-	-	P	H	
														H
														H
														H
														H
														H
														H
			94.02	29.39	-14.11	43.5	45.28	15.26	1.48	32.63	-	-	P	V
			188.11	33.68	-9.82	43.5	49.27	15.03	2.25	32.87	-	-	P	V
			376.29	21.86	-24.14	46	29.79	21.19	3.29	32.41	-	-	P	V
			547.98	26.91	-19.09	46	30.38	25.2	3.99	32.66	-	-	P	V
			729.37	36.2	-9.8	46	36.35	27.74	4.65	32.54	100	0	P	V
			885.54	31.73	-14.27	46	29.87	29.1	5.24	32.48	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
6+7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Karl Hou, Caster Liao and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%




Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_95(94)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(LINE) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

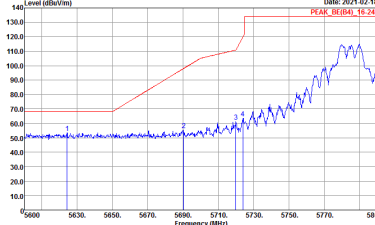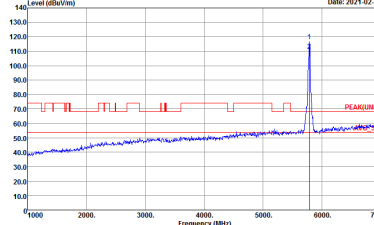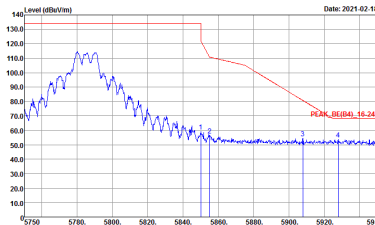

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>

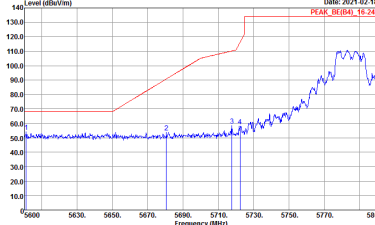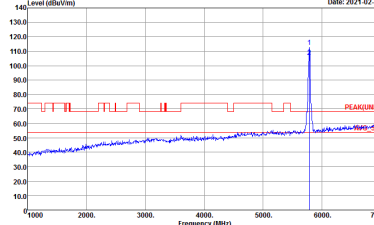
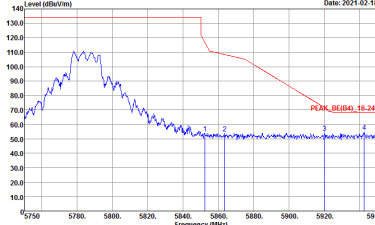


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

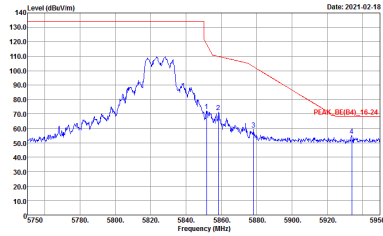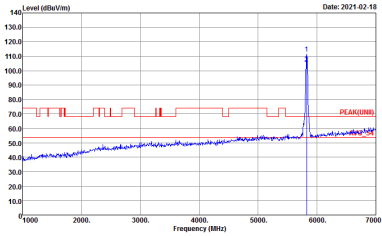

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

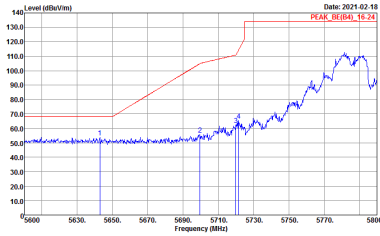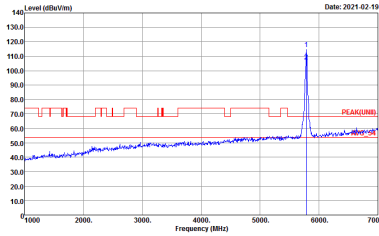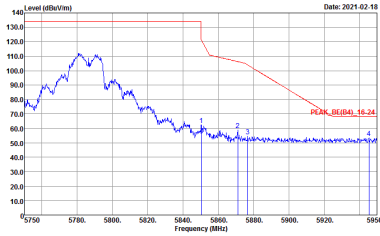

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-02-19 PEAK(UNIT)</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/0 CH149 5745MHz	
6+7	Horizontal	Fundamental
Peak	<p> Date: 2021.02.20 PEAK_BE(84)_16-24 </p> <p> Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto </p>	<p> Date: 2021.02.20 PEAK(UN)I </p> <p> Site : 03CH16-HY Condition : PEAK(UN)I 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto </p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/0 CH149 5745MHz	
6+7	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL -RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>






Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

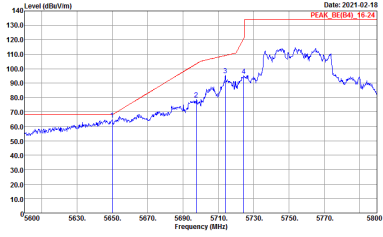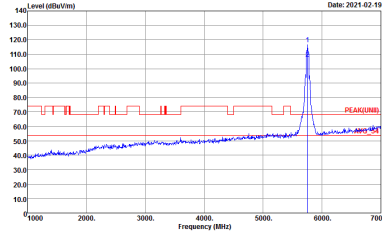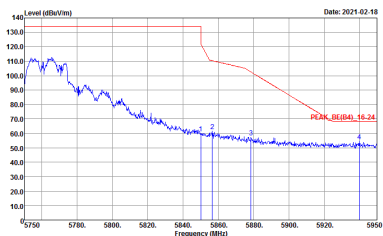WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK(FUN) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

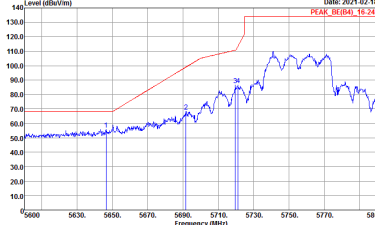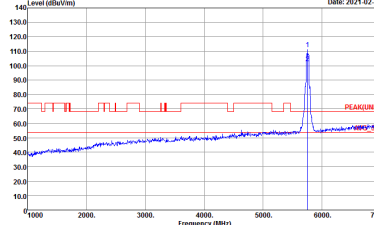
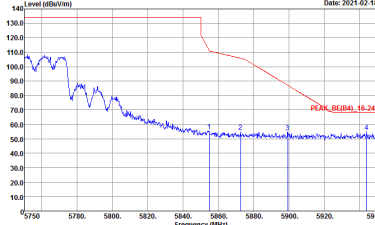



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-02-19</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

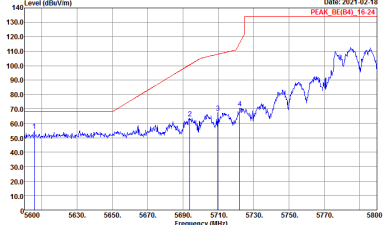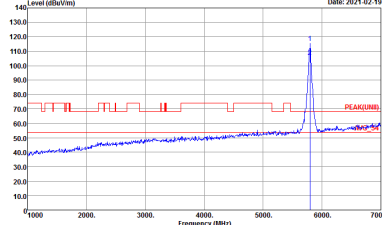

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full HT40 CH159 5795MHz	
6+7	Horizontal	Fundamental
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-02-19 PEAK(UNIT)</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

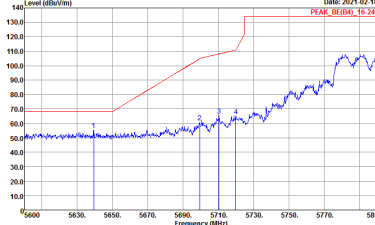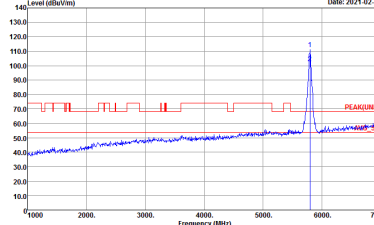




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-02-19 PEAK(UNIT)</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2021-02-18 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Horizontal	Fundamental
Peak		
Peak		Left blank

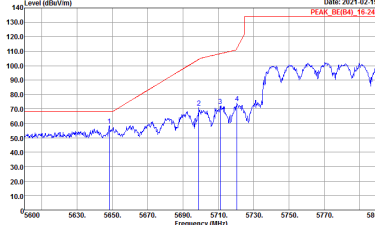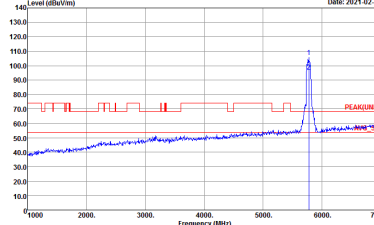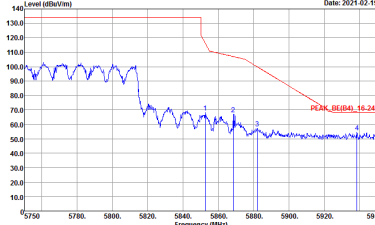

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Vertical	Fundamental
Peak	 <p>Date: 2021-02-19 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2021-02-19 PEAK(UNIT)</p> <p>Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	 <p>Date: 2021-02-19 PEAK_BE(B4)_16-24</p> <p>Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank




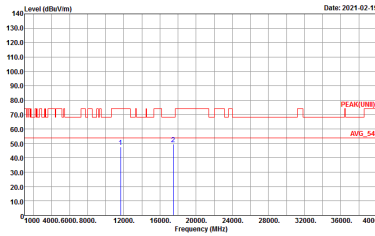
Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot showing Level (dBuV/m) vs Frequency (MHz) with Peak and Avg markers.



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL</p>

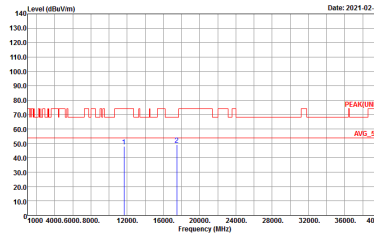

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
6+7	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL</p>	 <p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH165 5825MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 9120D_1522 VERTICAL</p>



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
6+7	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK(UNII) 3m 91200_1522 VERTICAL</p>



Emission below 1GHz
5GHz WIFI 802.11ax HE40 Full (LF)

WIFI	5GHz WIFI	
ANT	802.11ax HE40 Full LF	
6+7	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020406 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020406 VERTICAL</p>





Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
6+7	802.11a for Ant 6	98.59	-	-	10Hz	0.06
6+7	802.11a for Ant 7	98.83	-	-	10Hz	0.05
6+7	5GHz 802.11ax HE20 Full RU for Ant 6	98.91	-	-	10Hz	0.05
6+7	5GHz 802.11ax HE20 Full RU for Ant 7	99.28	-	-	10Hz	0.03
6+7	5GHz 802.11ax HE40 Full RU for Ant 6	99.27	-	-	10Hz	0.03
6+7	5GHz 802.11ax HE40 Full RU for Ant 7	98.72	-	-	10Hz	0.06
6+7	5GHz 802.11ax HE80 Full RU for Ant 6	99.27	-	-	10Hz	0.03
6+7	5GHz 802.11ax HE80 Full RU for Ant 7	99.09	-	-	10Hz	0.04



MIMO <Ant. 6>

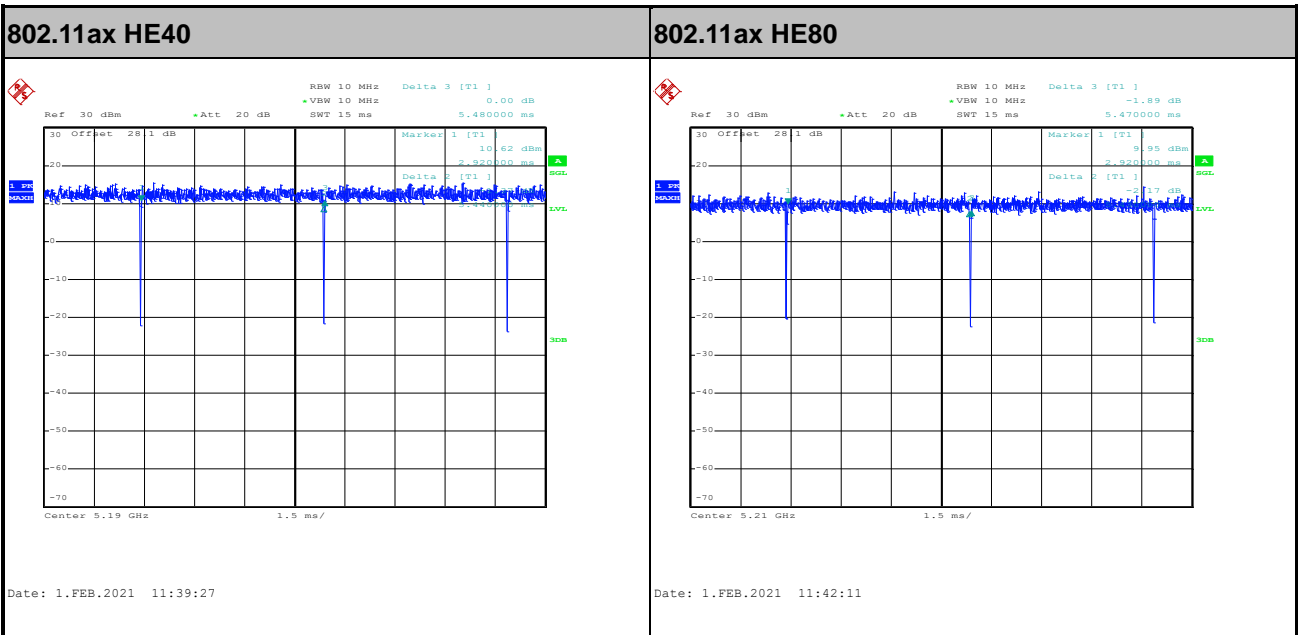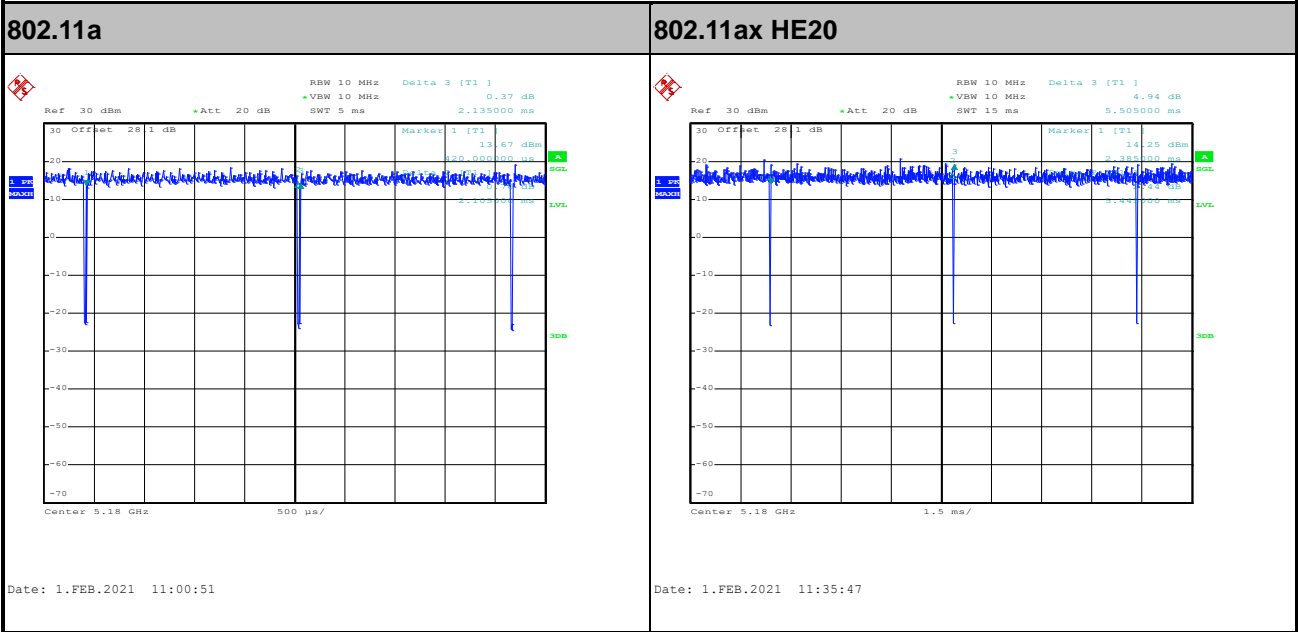



MIMO <Ant. 7>

