

## #01\_HAC\_E\_GSM850\_Voice\_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2021/1/25

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn915; Calibrated: 2020/6/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

**(101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.65 V/m; Power Drift = 0.11 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.27 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>28.8 dBV/m</b>	Grid 2 <b>M4</b> <b>30.21 dBV/m</b>	Grid 3 <b>M4</b> <b>30.16 dBV/m</b>
Grid 4 <b>M4</b> <b>29.73 dBV/m</b>	Grid 5 <b>M4</b> <b>30.76 dBV/m</b>	Grid 6 <b>M4</b> <b>30.6 dBV/m</b>
Grid 7 <b>M4</b> <b>30.71 dBV/m</b>	Grid 8 <b>M4</b> <b>31.27 dBV/m</b>	Grid 9 <b>M4</b> <b>30.84 dBV/m</b>

**Cursor:**

Total = 31.27 dBV/m

E Category: M4

Location: -1, 25, 8.7 mm

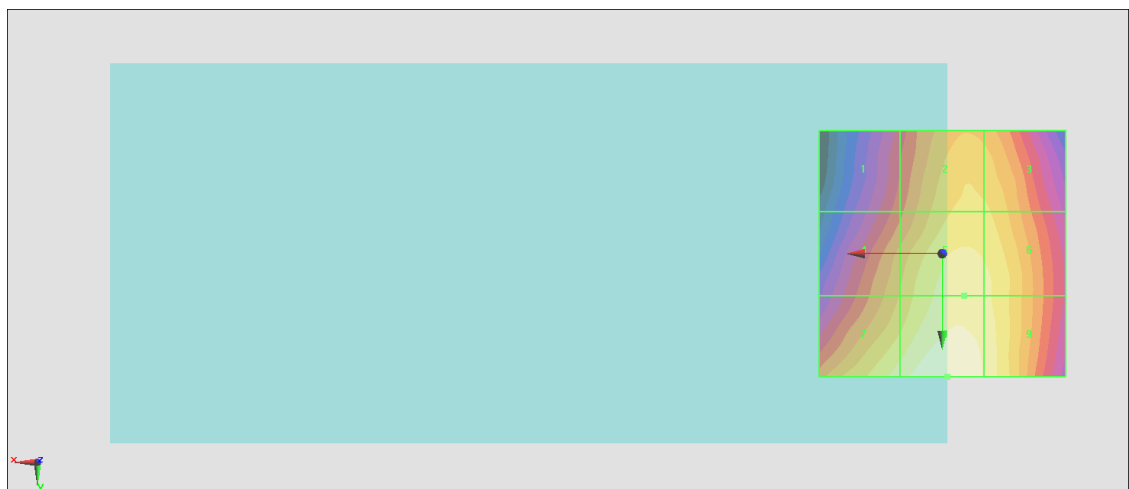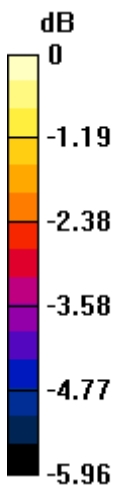

0 dB = 36.59 V/m = 31.27 dBV/m

## #02\_HAC\_E\_GSM850\_Voice\_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2021/1/25

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn915; Calibrated: 2020/6/22

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

**(101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.80 V/m; Power Drift = 0.17 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.09 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>29.04 dBV/m</b>	Grid 2 <b>M4</b> <b>29.88 dBV/m</b>	Grid 3 <b>M4</b> <b>29.76 dBV/m</b>
Grid 4 <b>M4</b> <b>30.43 dBV/m</b>	Grid 5 <b>M4</b> <b>30.94 dBV/m</b>	Grid 6 <b>M4</b> <b>30.53 dBV/m</b>
Grid 7 <b>M4</b> <b>31.71 dBV/m</b>	Grid 8 <b>M4</b> <b>32.09 dBV/m</b>	Grid 9 <b>M4</b> <b>31.44 dBV/m</b>

**Cursor:**

Total = 32.09 dBV/m

E Category: M4

Location: 0.5, 25, 8.7 mm

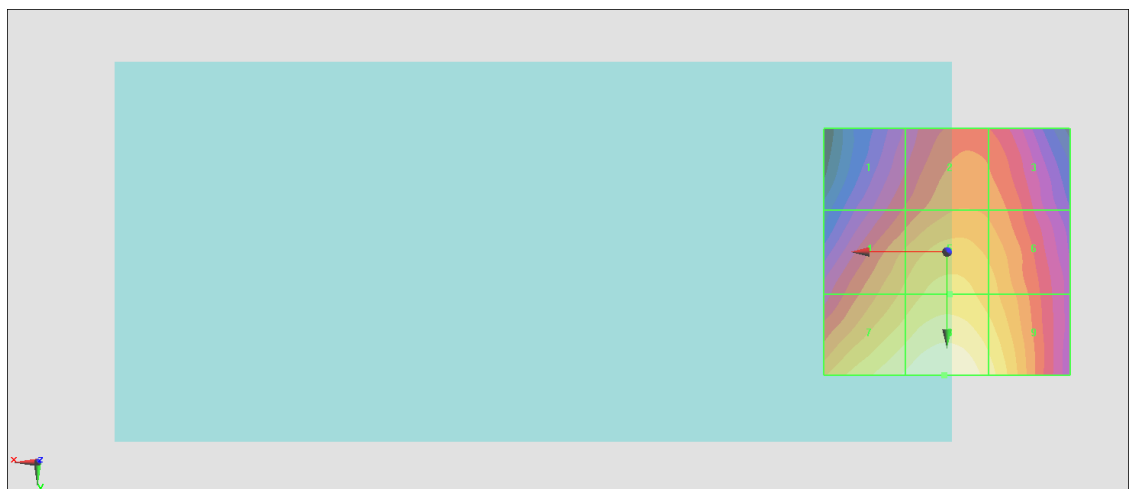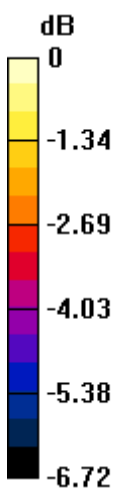

0 dB = 40.21 V/m = 32.09 dBV/m

### #03\_HAC\_E\_GSM850\_Voice\_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.82 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.03 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>28.65 dBV/m</b>	Grid 2 <b>M4</b> <b>29.44 dBV/m</b>	Grid 3 <b>M4</b> <b>29.16 dBV/m</b>
Grid 4 <b>M4</b> <b>30.31 dBV/m</b>	Grid 5 <b>M4</b> <b>30.87 dBV/m</b>	Grid 6 <b>M4</b> <b>30.28 dBV/m</b>
Grid 7 <b>M4</b> <b>31.52 dBV/m</b>	Grid 8 <b>M4</b> <b>32.03 dBV/m</b>	Grid 9 <b>M4</b> <b>31.52 dBV/m</b>

**Cursor:**

Total = 32.03 dBV/m

E Category: M4

Location: 0.5, 25, 8.7 mm

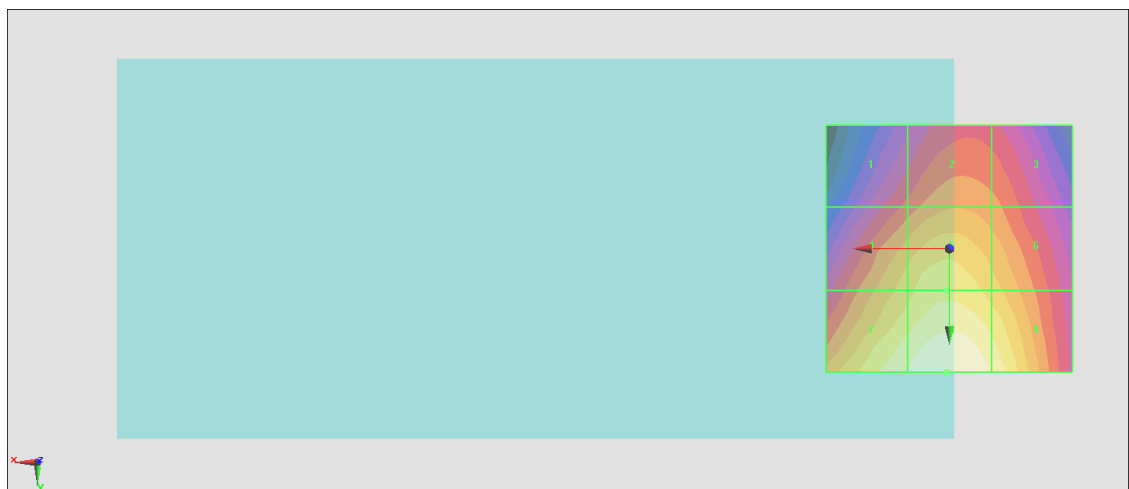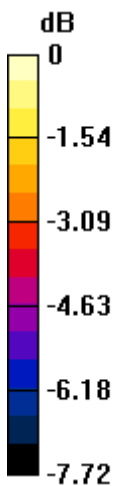

0 dB = 39.94 V/m = 32.03 dBV/m

## #04\_HAC\_E\_GSM1900\_Voice\_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

**(101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.16 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.08 dBV/m

**Emission category: M3**

MIF scaled E-field



Grid 1 <b>M3</b> <b>31.08 dBV/m</b>	Grid 2 <b>M4</b> <b>26.65 dBV/m</b>	Grid 3 <b>M4</b> <b>18.84 dBV/m</b>
Grid 4 <b>M4</b> <b>29.52 dBV/m</b>	Grid 5 <b>M4</b> <b>27.18 dBV/m</b>	Grid 6 <b>M4</b> <b>17.92 dBV/m</b>
Grid 7 <b>M4</b> <b>29.02 dBV/m</b>	Grid 8 <b>M4</b> <b>25.8 dBV/m</b>	Grid 9 <b>M4</b> <b>17.93 dBV/m</b>

**Cursor:**

Total = 31.08 dBV/m

E Category: M3

Location: 24, -18.5, 8.7 mm

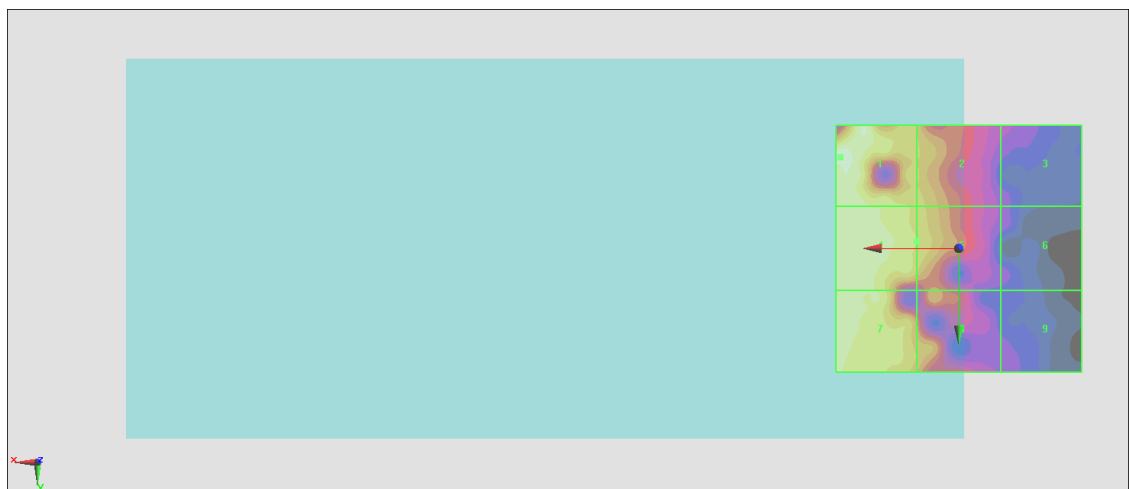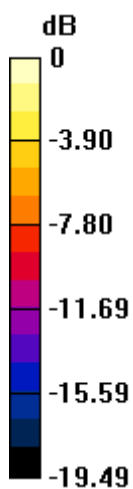

0 dB = 35.80 V/m = 31.08 dBV/m

### #05\_HAC\_E\_GSM1900\_Voice\_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.178 V/m; Power Drift = 0.13 dB

Applied MIF = 3.63 dB

RF audio interference level = 18.86 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>16.98 dBV/m</b>	Grid 2 <b>M4</b> <b>18.84 dBV/m</b>	Grid 3 <b>M4</b> <b>18.86 dBV/m</b>
Grid 4 <b>M4</b> <b>15.19 dBV/m</b>	Grid 5 <b>M4</b> <b>15.12 dBV/m</b>	Grid 6 <b>M4</b> <b>15.43 dBV/m</b>
Grid 7 <b>M4</b> <b>17.17 dBV/m</b>	Grid 8 <b>M4</b> <b>17.4 dBV/m</b>	Grid 9 <b>M4</b> <b>16.81 dBV/m</b>

**Cursor:**

Total = 18.86 dBV/m

E Category: M4

Location: -9, -24, 8.7 mm

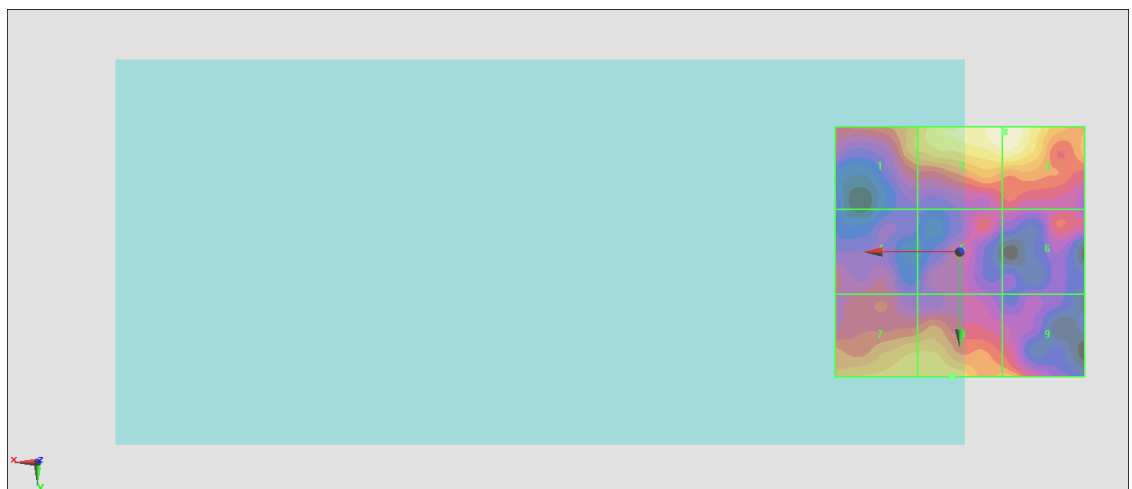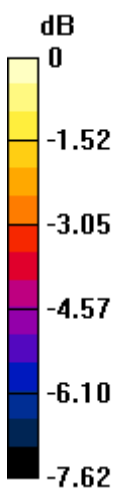

0 dB = 8.771 V/m = 18.86 dBV/m

## #06\_HAC\_E\_GSM1900\_Voice\_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.93 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 29.33 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>29.33 dBV/m</b>	Grid 2 <b>M4</b> <b>27.1 dBV/m</b>	Grid 3 <b>M4</b> <b>18.81 dBV/m</b>
Grid 4 <b>M4</b> <b>29.33 dBV/m</b>	Grid 5 <b>M4</b> <b>27.48 dBV/m</b>	Grid 6 <b>M4</b> <b>15.55 dBV/m</b>
Grid 7 <b>M4</b> <b>29.1 dBV/m</b>	Grid 8 <b>M4</b> <b>26.94 dBV/m</b>	Grid 9 <b>M4</b> <b>17.57 dBV/m</b>

**Cursor:**

Total = 29.33 dBV/m

E Category: M4

Location: 25, -12.5, 8.7 mm

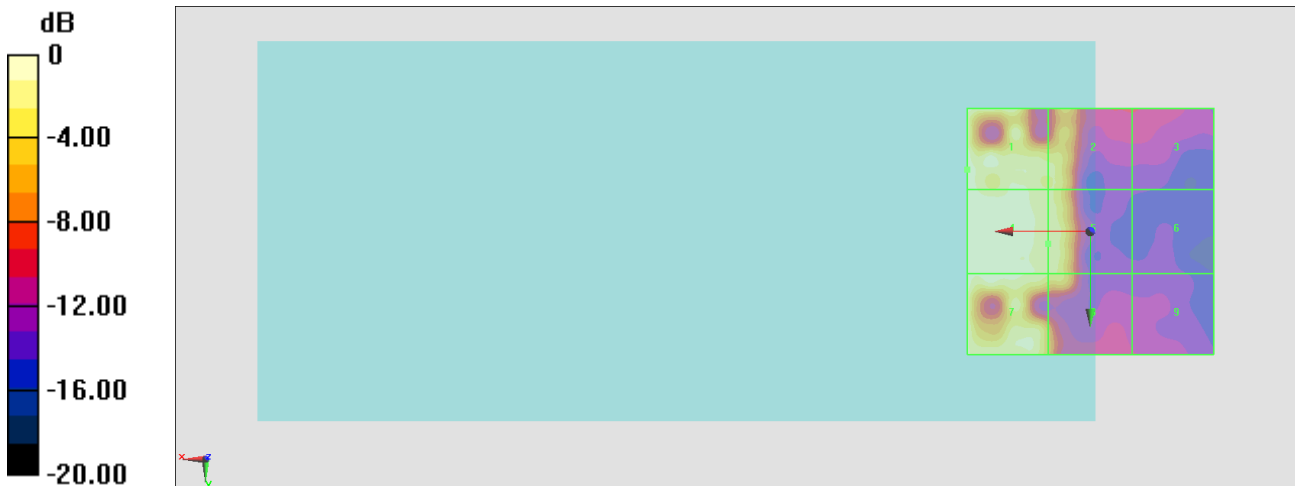

0 dB = 29.29 V/m = 29.33 dBV/m

### #07\_HAC\_E\_CDMA BC0\_1xRTT, RC1 SO3, 18th Rate\_Ch1013

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 824.7 MHz; Duty Cycle: 1:17.746

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.7 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 47.20 V/m; Power Drift = 0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 34.25 dBV/m

**Emission category: M4**

MIF scaled E-field



<b>Grid 1 M4</b> <b>31.68 dBV/m</b>	<b>Grid 2 M4</b> <b>33.11 dBV/m</b>	<b>Grid 3 M4</b> <b>33.03 dBV/m</b>
<b>Grid 4 M4</b> <b>32.7 dBV/m</b>	<b>Grid 5 M4</b> <b>33.7 dBV/m</b>	<b>Grid 6 M4</b> <b>33.54 dBV/m</b>
<b>Grid 7 M4</b> <b>33.8 dBV/m</b>	<b>Grid 8 M4</b> <b>34.25 dBV/m</b>	<b>Grid 9 M4</b> <b>33.71 dBV/m</b>

**Cursor:**

Total = 34.25 dBV/m

E Category: M4

Location: 0, 25, 8.7 mm

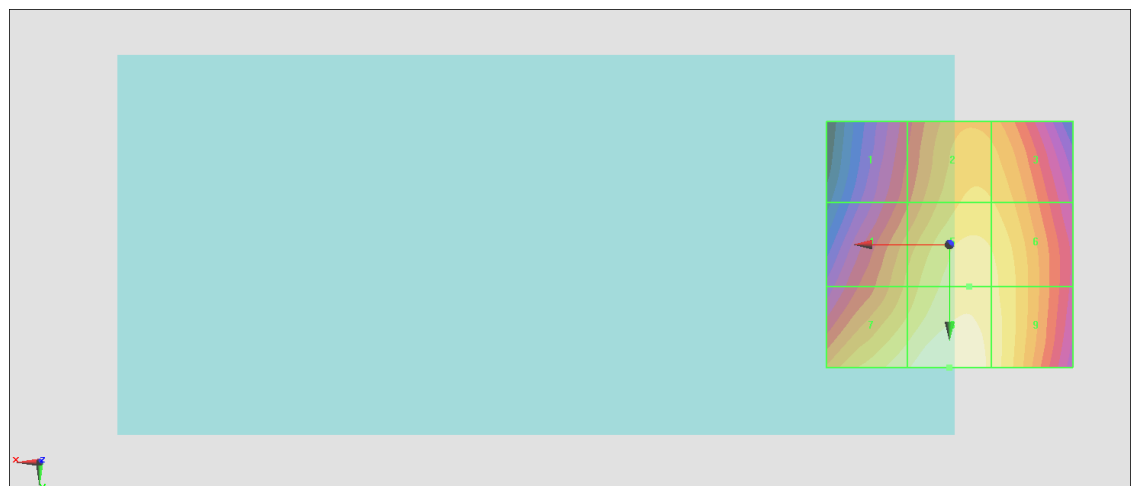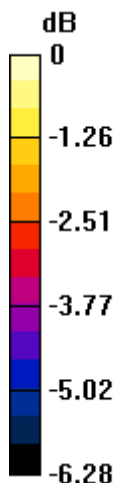

0 dB = 51.57 V/m = 34.25 dBV/m

### #08\_HAC\_E\_CDMA BC0\_ 1xRTT, RC1 SO3, 18th Rate\_Ch384

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 836.52 MHz; Duty Cycle: 1:17.746

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.52 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 46.82 V/m; Power Drift = 0.13 dB

Applied MIF = 3.26 dB

RF audio interference level = 35.72 dBV/m

**Emission category: M4**

MIF scaled E-field



<b>Grid 1 M4</b> <b>32.31 dBV/m</b>	<b>Grid 2 M4</b> <b>33.15 dBV/m</b>	<b>Grid 3 M4</b> <b>32.93 dBV/m</b>
<b>Grid 4 M4</b> <b>33.95 dBV/m</b>	<b>Grid 5 M4</b> <b>34.37 dBV/m</b>	<b>Grid 6 M4</b> <b>33.83 dBV/m</b>
<b>Grid 7 M4</b> <b>35.44 dBV/m</b>	<b>Grid 8 M4</b> <b>35.72 dBV/m</b>	<b>Grid 9 M4</b> <b>34.82 dBV/m</b>

**Cursor:**

Total = 35.72 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

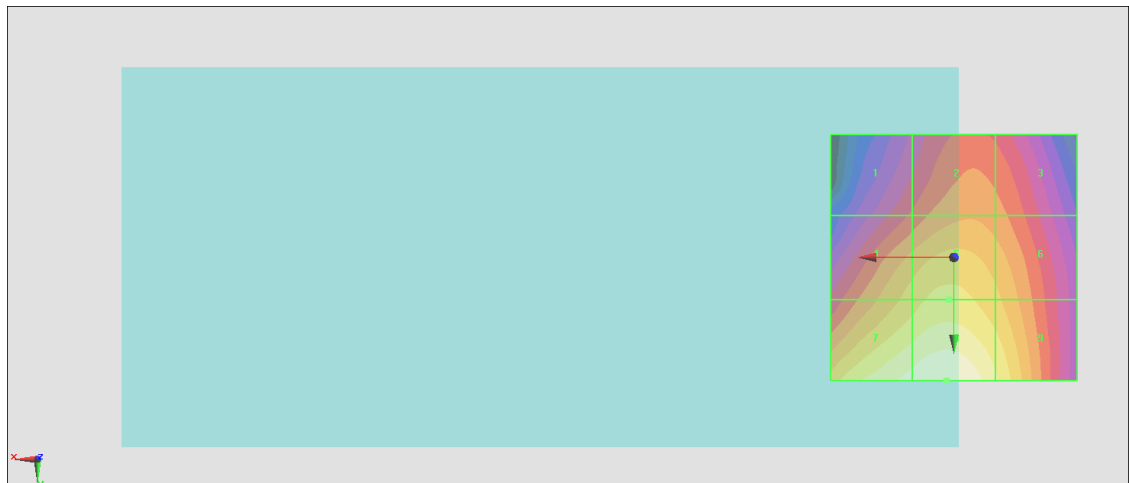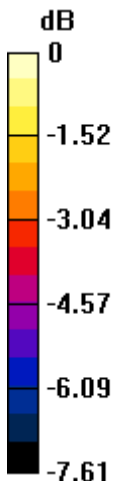

0 dB = 61.10 V/m = 35.72 dBV/m



### #09\_HAC\_E\_CDMA BC0\_ 1xRTT, RC1 SO3, 18th Rate\_Ch777

Communication System: CDMA2000, RC1, SO3, 1/8th Rate 25 fr.; Frequency: 848.31 MHz; Duty Cycle: 1:17.746

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.31 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.37 V/m; Power Drift = -0.32 dB

Applied MIF = 3.26 dB

RF audio interference level = 35.89 dBV/m

**Emission category: M4**

MIF scaled E-field



<b>Grid 1 M4</b> <b>32.13 dBV/m</b>	<b>Grid 2 M4</b> <b>32.77 dBV/m</b>	<b>Grid 3 M4</b> <b>32.43 dBV/m</b>
<b>Grid 4 M4</b> <b>34.05 dBV/m</b>	<b>Grid 5 M4</b> <b>34.47 dBV/m</b>	<b>Grid 6 M4</b> <b>33.68 dBV/m</b>
<b>Grid 7 M4</b> <b>35.47 dBV/m</b>	<b>Grid 8 M4</b> <b>35.89 dBV/m</b>	<b>Grid 9 M4</b> <b>35.07 dBV/m</b>

**Cursor:**

Total = 35.89 dBV/m

E Category: M4

Location: 1, 25, 8.7 mm

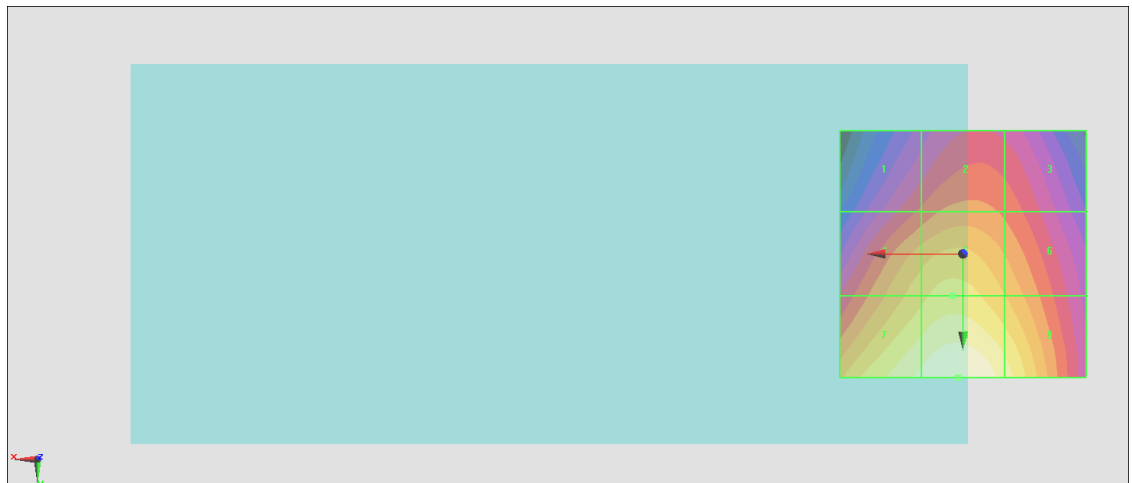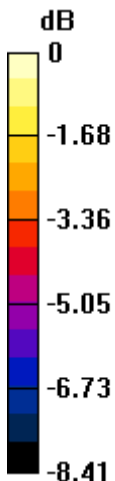

0 dB = 62.29 V/m = 35.89 dBV/m

## #10\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch39750

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.53 V/m; Power Drift = 0.10 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.40 dBV/m

**Emission category: M4**

MIF scaled E-field



<b>Grid 1 M4</b> <b>19.32 dBV/m</b>	<b>Grid 2 M4</b> <b>20.4 dBV/m</b>	<b>Grid 3 M4</b> <b>20.02 dBV/m</b>
<b>Grid 4 M4</b> <b>16.37 dBV/m</b>	<b>Grid 5 M4</b> <b>18.77 dBV/m</b>	<b>Grid 6 M4</b> <b>18.77 dBV/m</b>
<b>Grid 7 M4</b> <b>13.47 dBV/m</b>	<b>Grid 8 M4</b> <b>15.05 dBV/m</b>	<b>Grid 9 M4</b> <b>15.34 dBV/m</b>

**Cursor:**

Total = 20.40 dBV/m

E Category: M4

Location: -1, -25, 8.7 mm

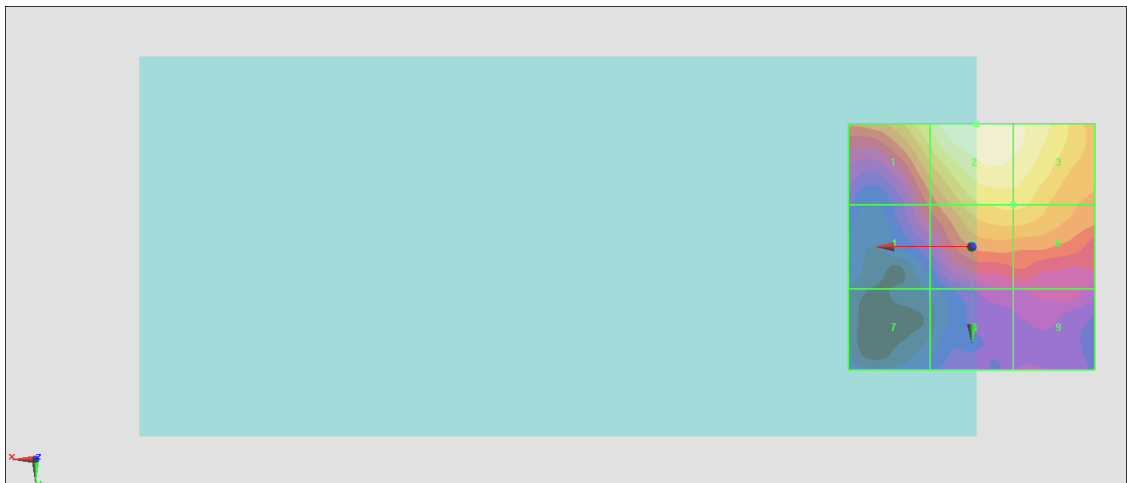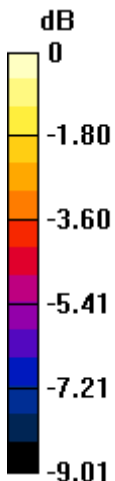

0 dB = 10.47 V/m = 20.40 dBV/m

### #11\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch40185

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.09 V/m; Power Drift = -0.18 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.72 dBV/m

**Emission category: M4**

MIF scaled E-field



Grid 1 <b>M4</b> <b>19.17 dBV/m</b>	Grid 2 <b>M4</b> <b>19.72 dBV/m</b>	Grid 3 <b>M4</b> <b>19.46 dBV/m</b>
Grid 4 <b>M4</b> <b>15.51 dBV/m</b>	Grid 5 <b>M4</b> <b>17.76 dBV/m</b>	Grid 6 <b>M4</b> <b>17.75 dBV/m</b>
Grid 7 <b>M4</b> <b>13.29 dBV/m</b>	Grid 8 <b>M4</b> <b>14.4 dBV/m</b>	Grid 9 <b>M4</b> <b>15.74 dBV/m</b>

**Cursor:**

Total = 19.72 dBV/m

E Category: M4

Location: 3, -25, 8.7 mm

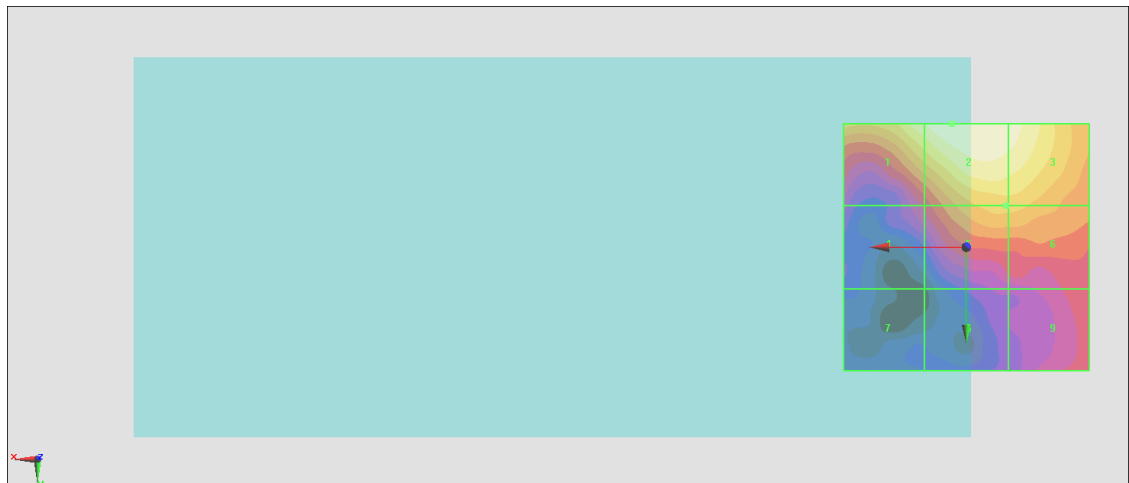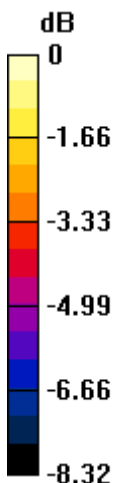

0 dB = 9.679 V/m = 19.72 dBV/m

## #12\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch40620

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.76 V/m; Power Drift = 0.16 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.37 dBV/m

**Emission category: M4**



MIF scaled E-field

Grid 1 <b>M4</b> <b>18.89 dBV/m</b>	Grid 2 <b>M4</b> <b>19.37 dBV/m</b>	Grid 3 <b>M4</b> <b>18.68 dBV/m</b>
Grid 4 <b>M4</b> <b>16.73 dBV/m</b>	Grid 5 <b>M4</b> <b>18.16 dBV/m</b>	Grid 6 <b>M4</b> <b>17.97 dBV/m</b>
Grid 7 <b>M4</b> <b>13.04 dBV/m</b>	Grid 8 <b>M4</b> <b>15 dBV/m</b>	Grid 9 <b>M4</b> <b>14.66 dBV/m</b>

Total = 19.37 dBV/m

E Category: M4

Location: 0, -21, 8.7 mm

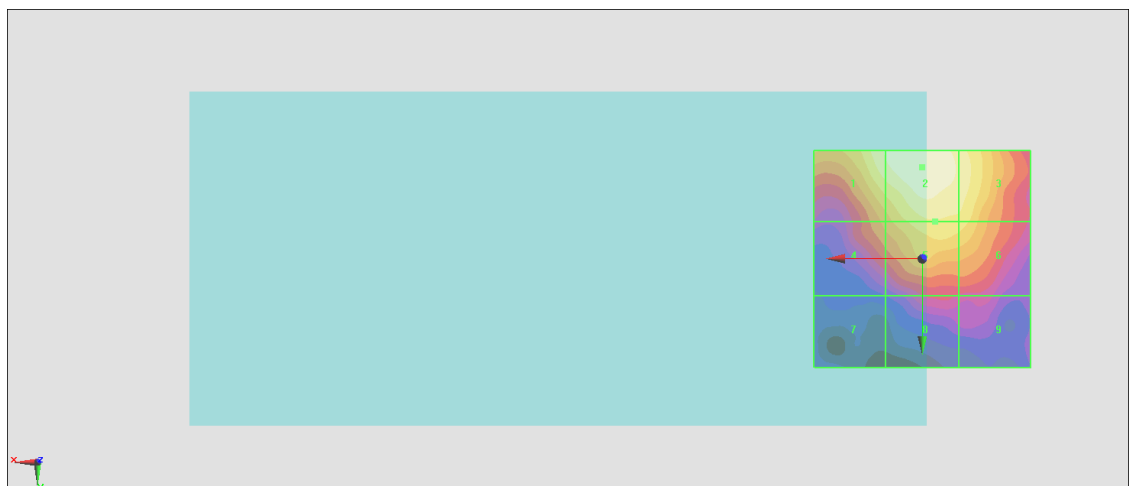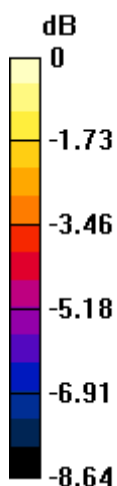

0 dB = 9.296 V/m = 19.37 dBV/m

### #13\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch41055

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.346 V/m; Power Drift = 0.16 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.78 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.78 dBV/m</b>	<b>Grid 2 M4</b> <b>17.77 dBV/m</b>	<b>Grid 3 M4</b> <b>17.77 dBV/m</b>
<b>Grid 4 M4</b> <b>14.89 dBV/m</b>	<b>Grid 5 M4</b> <b>17.02 dBV/m</b>	<b>Grid 6 M4</b> <b>17.01 dBV/m</b>
<b>Grid 7 M4</b> <b>12.98 dBV/m</b>	<b>Grid 8 M4</b> <b>14.98 dBV/m</b>	<b>Grid 9 M4</b> <b>15.13 dBV/m</b>

Total = 17.78 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

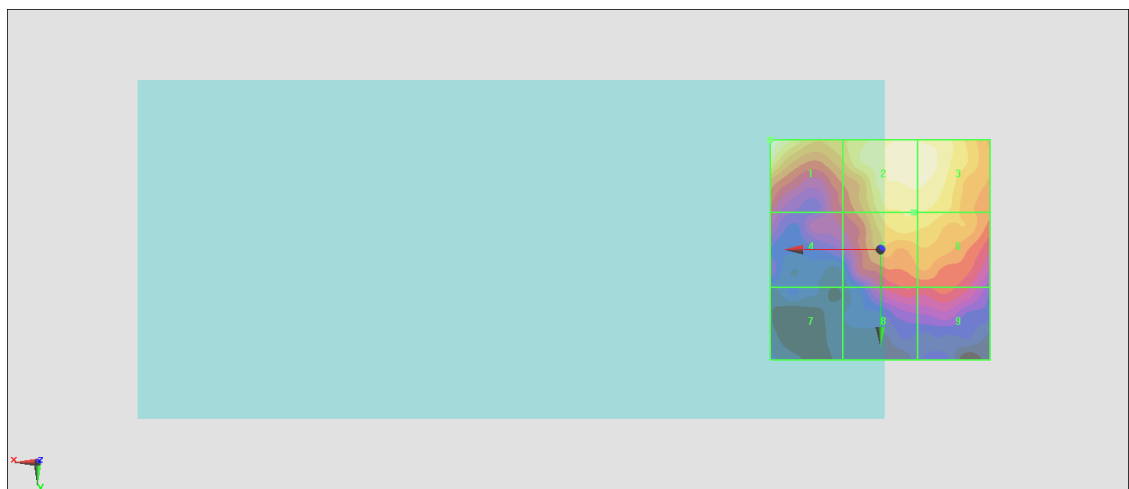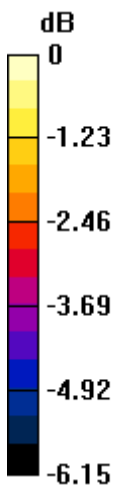

0 dB = 7.746 V/m = 17.78 dBV/m

### #14\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.102 V/m; Power Drift = 0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.27 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>20.27 dBV/m</b>	<b>Grid 2 M4</b> <b>18.5 dBV/m</b>	<b>Grid 3 M4</b> <b>16.91 dBV/m</b>
<b>Grid 4 M4</b> <b>16.6 dBV/m</b>	<b>Grid 5 M4</b> <b>16.61 dBV/m</b>	<b>Grid 6 M4</b> <b>16.6 dBV/m</b>
<b>Grid 7 M4</b> <b>13.28 dBV/m</b>	<b>Grid 8 M4</b> <b>15.18 dBV/m</b>	<b>Grid 9 M4</b> <b>15.24 dBV/m</b>

Total = 20.27 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

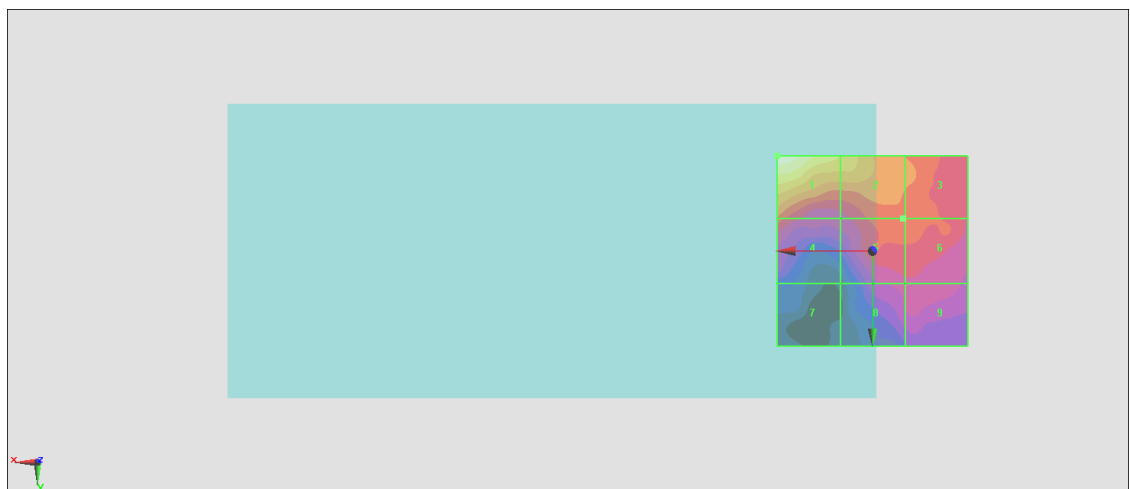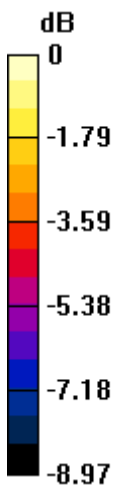

0 dB = 10.31 V/m = 20.27 dBV/m

### #15\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch39750\_HPUE

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2506 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.984 V/m; Power Drift = 0.06 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.65 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.85 dBV/m</b>	<b>Grid 2 M4</b> <b>18.65 dBV/m</b>	<b>Grid 3 M4</b> <b>18.3 dBV/m</b>
<b>Grid 4 M4</b> <b>14.88 dBV/m</b>	<b>Grid 5 M4</b> <b>17.01 dBV/m</b>	<b>Grid 6 M4</b> <b>16.91 dBV/m</b>
<b>Grid 7 M4</b> <b>12.49 dBV/m</b>	<b>Grid 8 M4</b> <b>13.35 dBV/m</b>	<b>Grid 9 M4</b> <b>13.61 dBV/m</b>

Total = 18.65 dBV/m

E Category: M4

Location: -0.5, -25, 8.7 mm

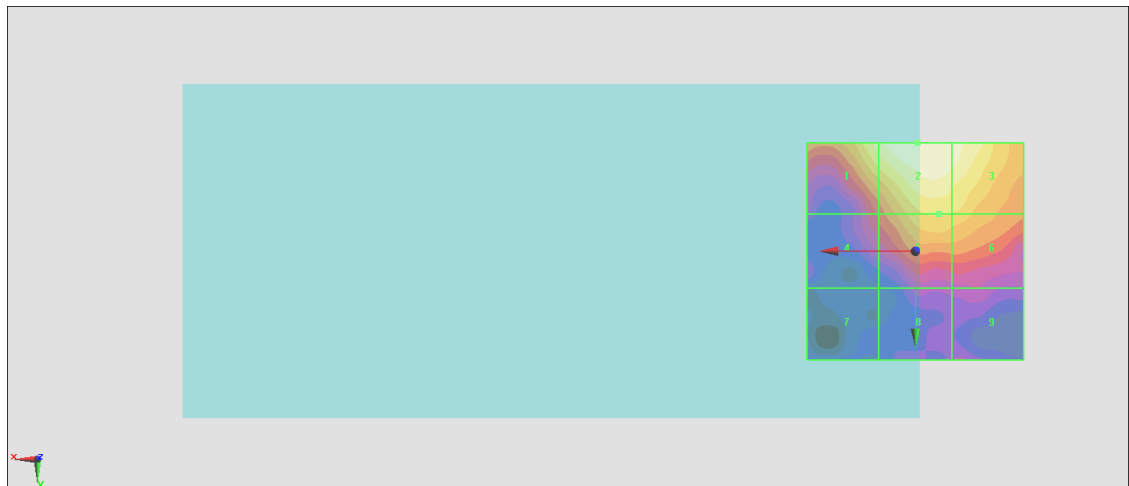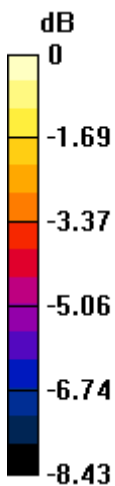

0 dB = 8.557 V/m = 18.65 dBV/m

## #16\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch40185\_HPUE

Communication System:LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2549.5 MHz;Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2549.5 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.457 V/m; Power Drift = 0.05 dB

Applied MIF = -1.44 dB

RF audio interference level = 18.09 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.65 dBV/m</b>	<b>Grid 2 M4</b> <b>18.09 dBV/m</b>	<b>Grid 3 M4</b> <b>17.82 dBV/m</b>
<b>Grid 4 M4</b> <b>14.36 dBV/m</b>	<b>Grid 5 M4</b> <b>16.29 dBV/m</b>	<b>Grid 6 M4</b> <b>16.25 dBV/m</b>
<b>Grid 7 M4</b> <b>12.83 dBV/m</b>	<b>Grid 8 M4</b> <b>12.81 dBV/m</b>	<b>Grid 9 M4</b> <b>13.97 dBV/m</b>

Total = 18.09 dBV/m

E Category: M4

Location: -0.5, -25, 8.7 mm

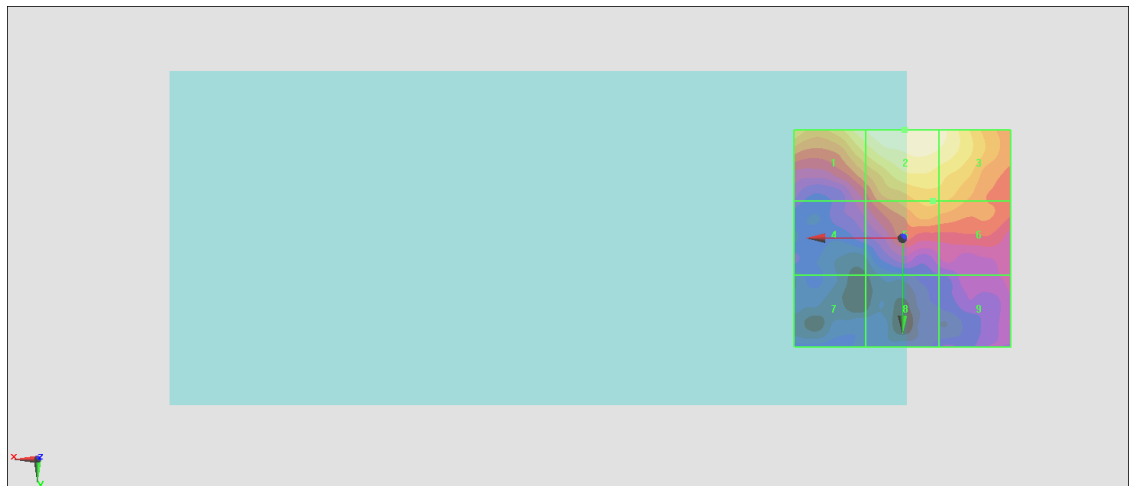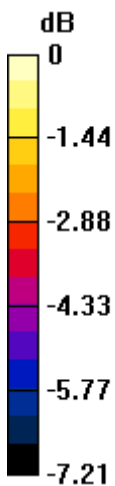

0 dB = 8.030 V/m = 18.09 dBV/m



### #17\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch40620\_HPUE

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

#### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2593 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.122 V/m; Power Drift = 0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 17.82 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>17.26 dBV/m</b>	<b>Grid 2 M4</b> <b>17.82 dBV/m</b>	<b>Grid 3 M4</b> <b>17.11 dBV/m</b>
<b>Grid 4 M4</b> <b>15.38 dBV/m</b>	<b>Grid 5 M4</b> <b>16.92 dBV/m</b>	<b>Grid 6 M4</b> <b>16.5 dBV/m</b>
<b>Grid 7 M4</b> <b>12.71 dBV/m</b>	<b>Grid 8 M4</b> <b>13.9 dBV/m</b>	<b>Grid 9 M4</b> <b>13.72 dBV/m</b>

Total = 17.82 dBV/m

E Category: M4

Location: -1, -21, 8.7 mm

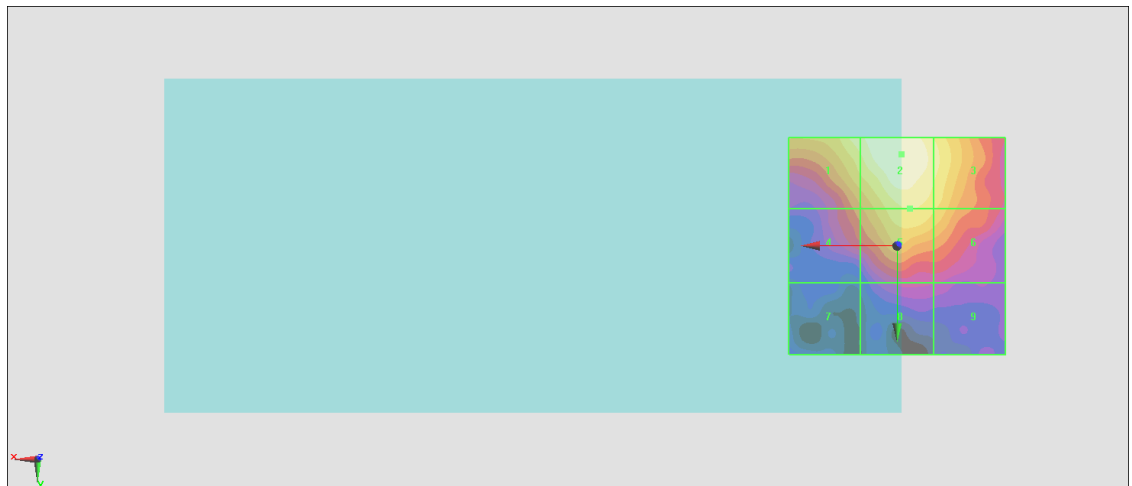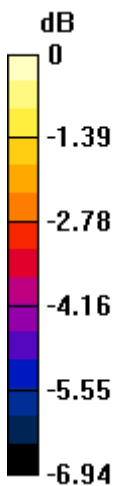

0 dB = 7.776 V/m = 17.82 dBV/m

### #18\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch41055\_HPUE

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2636.5 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.949 V/m; Power Drift = 0.10 dB

Applied MIF = -1.44 dB

RF audio interference level = 16.50 dBV/m

**Emission category: M4**



MIF scaled E-field

<b>Grid 1 M4</b> <b>16.5 dBV/m</b>	<b>Grid 2 M4</b> <b>16.09 dBV/m</b>	<b>Grid 3 M4</b> <b>16.07 dBV/m</b>
<b>Grid 4 M4</b> <b>13.37 dBV/m</b>	<b>Grid 5 M4</b> <b>15.57 dBV/m</b>	<b>Grid 6 M4</b> <b>15.52 dBV/m</b>
<b>Grid 7 M4</b> <b>12.49 dBV/m</b>	<b>Grid 8 M4</b> <b>13.62 dBV/m</b>	<b>Grid 9 M4</b> <b>13.43 dBV/m</b>

Total = 16.50 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

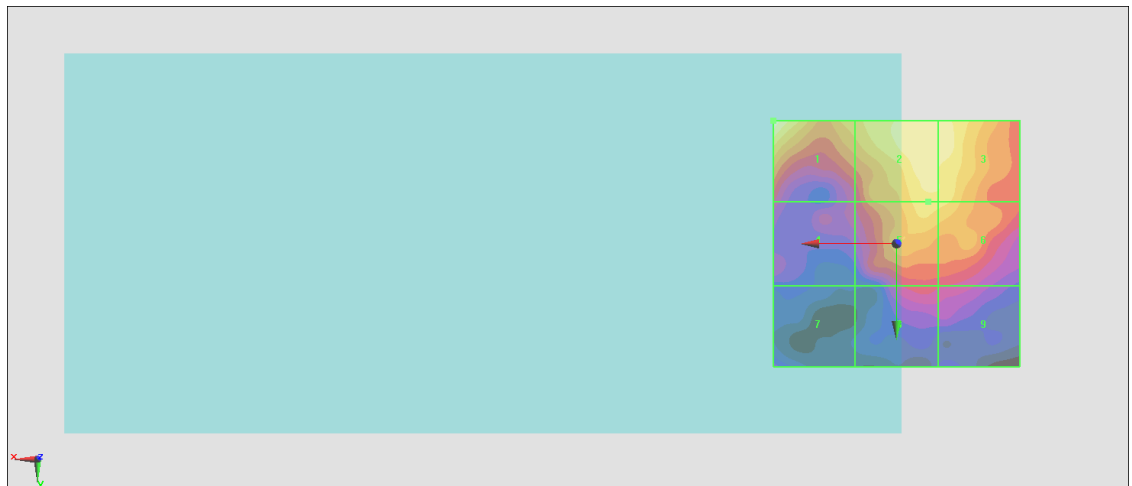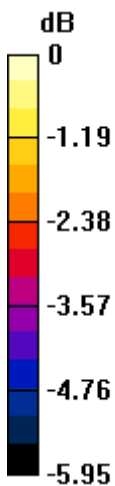

0 dB = 6.682 V/m = 16.50 dBV/m

### #19\_HAC\_E\_LTE Band 41\_20M\_QPSK\_1\_0\_Ch41490\_HPUE

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM); Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

**DASY5 Configuration**

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2680 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.157 V/m; Power Drift = 0.05 dB

Applied MIF = -1.44 dB

RF audio interference level = 25.22 dBV/m

**Emission category: M4**


MIF scaled E-field

<b>Grid 1 M4</b> <b>24.91 dBV/m</b>	<b>Grid 2 M4</b> <b>22.53 dBV/m</b>	<b>Grid 3 M4</b> <b>16.29 dBV/m</b>
<b>Grid 4 M4</b> <b>25.22 dBV/m</b>	<b>Grid 5 M4</b> <b>22.26 dBV/m</b>	<b>Grid 6 M4</b> <b>16.24 dBV/m</b>
<b>Grid 7 M4</b> <b>24.85 dBV/m</b>	<b>Grid 8 M4</b> <b>21.07 dBV/m</b>	<b>Grid 9 M4</b> <b>15.05 dBV/m</b>

Total = 25.22 dBV/m

E Category: M4

Location: 23, 4.5, 8.7 mm

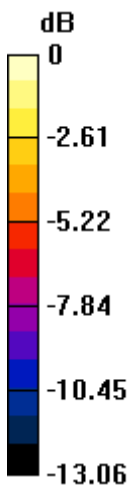

0 dB = 18.24 V/m = 25.22 dBV/m

## #20\_HAC\_E\_WLAN2.4GHz\_802.11g 6Mbps\_Ch1;Ant 6+7

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.198 V/m; Power Drift = -0.17 dB

Applied MIF = 0.12 dB

RF audio interference level = 22.38 dBV/m

**Emission category: M4**


MIF scaled E-field

<b>Grid 1 M4</b> <b>16.09 dBV/m</b>	<b>Grid 2 M4</b> <b>18.26 dBV/m</b>	<b>Grid 3 M4</b> <b>18.29 dBV/m</b>
<b>Grid 4 M4</b> <b>14.67 dBV/m</b>	<b>Grid 5 M4</b> <b>19.64 dBV/m</b>	<b>Grid 6 M4</b> <b>19.66 dBV/m</b>
<b>Grid 7 M4</b> <b>21.34 dBV/m</b>	<b>Grid 8 M4</b> <b>22.38 dBV/m</b>	<b>Grid 9 M4</b> <b>22.23 dBV/m</b>

Total = 22.38 dBV/m

E Category: M4

Location: -4, 25, 8.7 mm

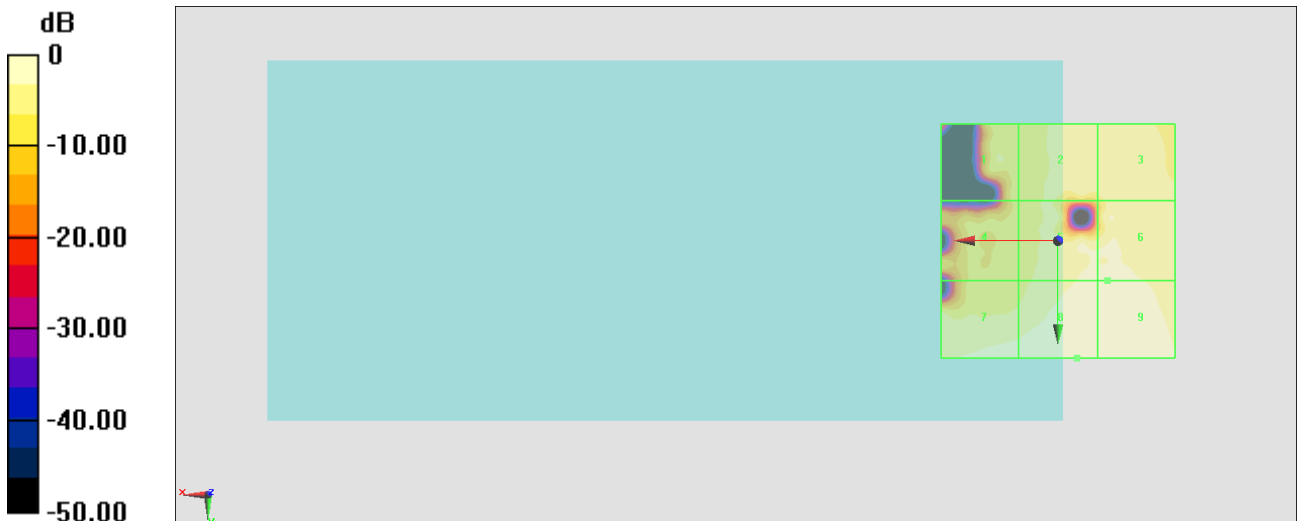

0 dB = 13.16 V/m = 22.38 dBV/m

## #21\_HAC\_E\_WLAN2.4GHz\_802.11g 6Mbps\_Ch6;Ant 6+7

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.24 V/m; Power Drift = -0.06 dB

Applied MIF = 0.12 dB

RF audio interference level = 27.57 dBV/m

**Emission category: M4**



MIF scaled E-field

Grid 1 <b>M4</b> <b>17.85 dBV/m</b>	Grid 2 <b>M4</b> <b>27.57 dBV/m</b>	Grid 3 <b>M4</b> <b>22.27 dBV/m</b>
Grid 4 <b>M4</b> <b>19.76 dBV/m</b>	Grid 5 <b>M4</b> <b>26.04 dBV/m</b>	Grid 6 <b>M4</b> <b>24.66 dBV/m</b>
Grid 7 <b>M4</b> <b>25.93 dBV/m</b>	Grid 8 <b>M4</b> <b>26.99 dBV/m</b>	Grid 9 <b>M4</b> <b>26.8 dBV/m</b>

Total = 27.57 dBV/m

E Category: M4

Location: -0.5, -10, 8.7 mm

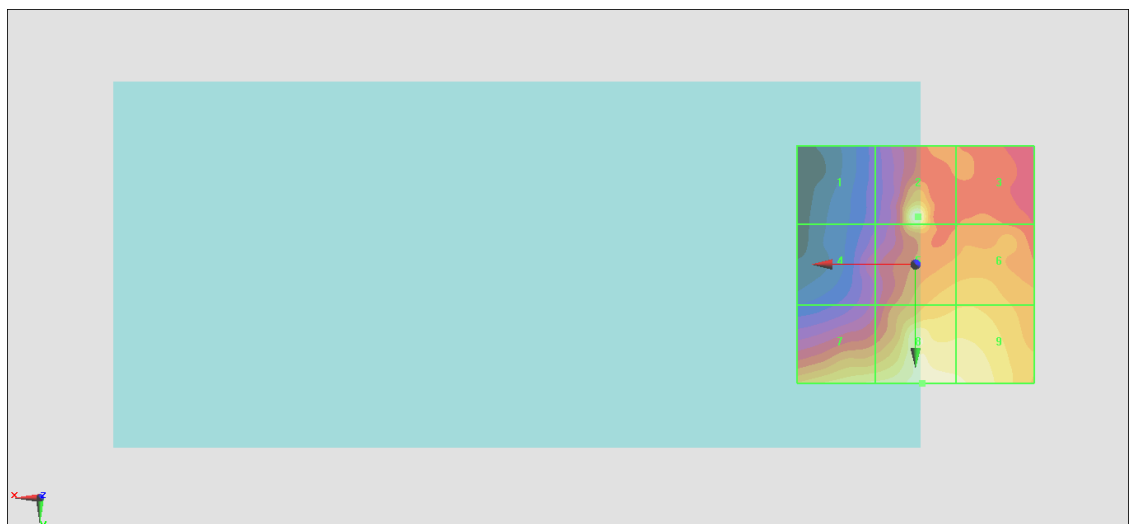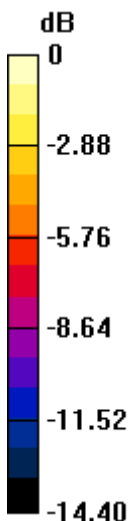

0 dB = 23.92 V/m = 27.58 dBV/m

## #22\_HAC\_E\_WLAN2.4GHz\_802.11g 6Mbps\_Ch11;Ant 6+7

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C

### DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2462 MHz; Calibrated: 2021/1/25
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn915; Calibrated: 2020/6/22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

### E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.22 V/m; Power Drift = -0.03 dB

Applied MIF = 0.12 dB

RF audio interference level = 23.05 dBV/m

**Emission category: M4**



MIF scaled E-field

Grid 1 <b>M4</b> <b>14.62 dBV/m</b>	Grid 2 <b>M4</b> <b>17.58 dBV/m</b>	Grid 3 <b>M4</b> <b>17.54 dBV/m</b>
Grid 4 <b>M4</b> <b>16.3 dBV/m</b>	Grid 5 <b>M4</b> <b>20.51 dBV/m</b>	Grid 6 <b>M4</b> <b>20.51 dBV/m</b>
Grid 7 <b>M4</b> <b>22.14 dBV/m</b>	Grid 8 <b>M4</b> <b>23.05 dBV/m</b>	Grid 9 <b>M4</b> <b>22.79 dBV/m</b>

Total = 23.05 dBV/m

E Category: M4

Location: -2, 25, 8.7 mm

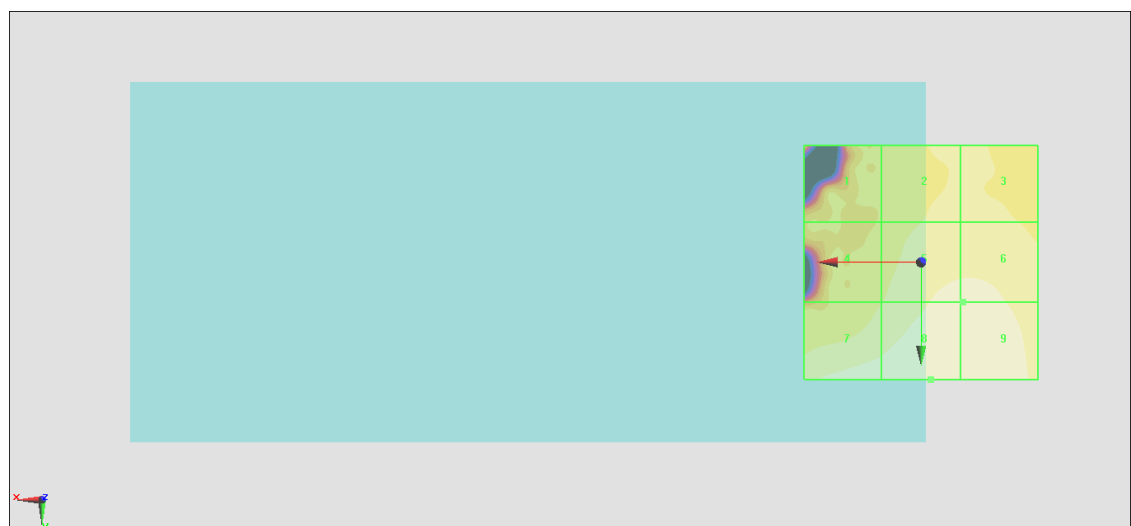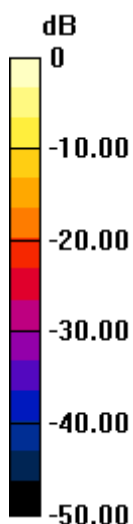

0 dB = 14.21 V/m = 23.05 dBV/m