



Prüfbericht-Nr.: <i>Test report No.:</i>	50343889 001	Auftrags-Nr.: <i>Order No.:</i>	168147482	Seite 1 von 20 <i>Page 1 of 20</i>
Kunden-Referenz-Nr.: <i>Client reference No.:</i>	N/A	Auftragsdatum: <i>Order date.:</i>	30.12.2019	
Auftraggeber: <i>Client:</i>	Lenovo (Beijing) Limited 201-H2-6, Floor 2, Building 2, No.6 Shangdi West Road, Haidian District, Beijing, China 100085			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Mouse			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	MB230B (Trademark: Lenovo)			
Auftrags-Inhalt: <i>Order content:</i>	FCC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of receipt:</i>	07.01.2020	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample No.:</i>	A001050695-002			
Prüfzeitraum: <i>Testing period:</i>	07.01.2020 - 11.01.2020			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
<p>14.02.2020  Lin Lin / Senior Project Manager</p>		<p>14.02.2020  Winnie Hou / Technical Certifier</p>		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>
				Unterschrift <i>Signature</i>
Sonstiges / Other:				
FCC ID: A5MMB230B				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend P(ass) = entspricht o.g. Prüfgrundlage(n)		4 = ausreichend 5 = mangelhaft N/A = nicht anwendbar N/T = nicht getestet		
Legend: 1 = very good 2 = good 3 = satisfactory P(ass) = passed a.m. test specifications(s)		4 = sufficient 5 = poor N/A = not applicable N/T = not tested		
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

V04

Test Summary

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY***RESULT: Pass***5.1.4 99% BANDWIDTH***RESULT: Pass***5.1.5 CONDUCTED SPURIOUS EMISSIONS***RESULT: Pass***5.1.6 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.7 6dB BANDWIDTH***RESULT: Pass*

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES.....	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS	9
4	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS.....	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	13
5.1.1	<i>Antenna Requirement.....</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power.....</i>	<i>14</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>15</i>
5.1.4	<i>99% Bandwidth.....</i>	<i>16</i>
5.1.5	<i>Conducted Spurious Emissions.....</i>	<i>17</i>
5.1.6	<i>Radiated Spurious Emission.....</i>	<i>18</i>
5.1.7	<i>6dB Bandwidth.....</i>	<i>19</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	20
7	LIST OF TABLES	20

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of BLE

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huangguan Road Middle, Longhua District, Shenzhen 518110, China

FCC accredited testing laboratory: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Radio Spectrum Testing (TS8997)					
Equip. No.	Equipment	Manufacturer	Model	Serial No.	Cal. until
1825795	Signal Analyzer	Rohde & Schwarz	FSV 40	101441	20.08.2020
1825798	OSP	Rohde & Schwarz	OSP 150	101017	17.12.2020
1825799	Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
1825800	Test Software	Rohde & Schwarz	WMS32 (V10.40.10)	N/A	N/A
1825801	Power Meter	Rohde & Schwarz	NRP2	107105	17.12.2020
1825802	Wideband Power Sensor	Rohde & Schwarz	NRP-Z81	105350	17.12.2020
1826431	Shielding Room 8#	Albatross	SR8	APC17151-SR8	23.07.2020
Unwanted Emission Testing (TS9975)					
Equip. No.	Equipment	Manufacturer	Model	Serial No.	Cal. until
1826021	EMI Test Receiver	Rohde & Schwarz	ESR 7	102021	19.08.2020
1826023	Signal Analyzer	Rohde & Schwarz	FSV 40	101439	21.08.2020
1826024	System Controller Interface	Rohde & Schwarz	SCI-100	S10010038	N/A
1826025	Filterbank	Rohde & Schwarz	Wlan	100759	21.08.2020
1826026	OSP	Rohde & Schwarz	OSP 120	102040	N/A
1826028	Pre-amplifier	Rohde & Schwarz	SCU08F1	08320031	20.08.2020
1826029	Amplifier	Rohde & Schwarz	SCU-18F	180070	20.08.2020
1826030	Amplifier	Rohde & Schwarz	SCU40A	100475	20.09.2020
1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	02.09.2020
1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	02.09.2020
1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	02.09.2020
1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	01.09.2020

1826035	Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	02.09.2020
1826036	Test software	Rohde & Schwarz	V10.40.10-EMC32	N/A	N/A
1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	06.07.2020

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huangguan Road Middle, Longhua District, Shenzhen 518110, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth Mouse which supports Bluetooth 5.0 technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Bluetooth Mouse
Type Designation	MB230B
Trademark	Lenovo
FCC ID	A5MMB230B
Operating Voltage	1.5Vdc, 60mA
Testing Voltage	1.5Vdc
Technical Specification of BLE	
Operating Frequency	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Channel Number	40 channels
Channel Separation	2MHz
Antenna Type	PCB layout antenna
Antenna Gain1 of Bluetooth	1.62 dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth Low Energy transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Block Diagram
- Schematics
- FCC/IC Label and Location Info
- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 3: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

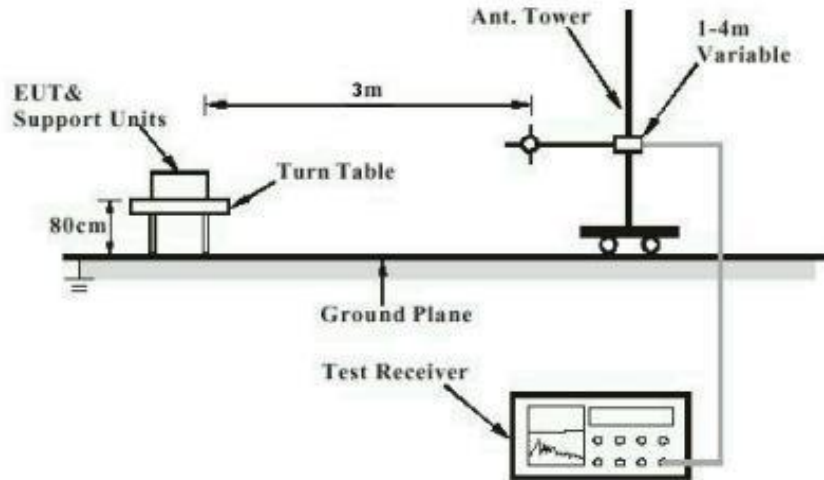


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


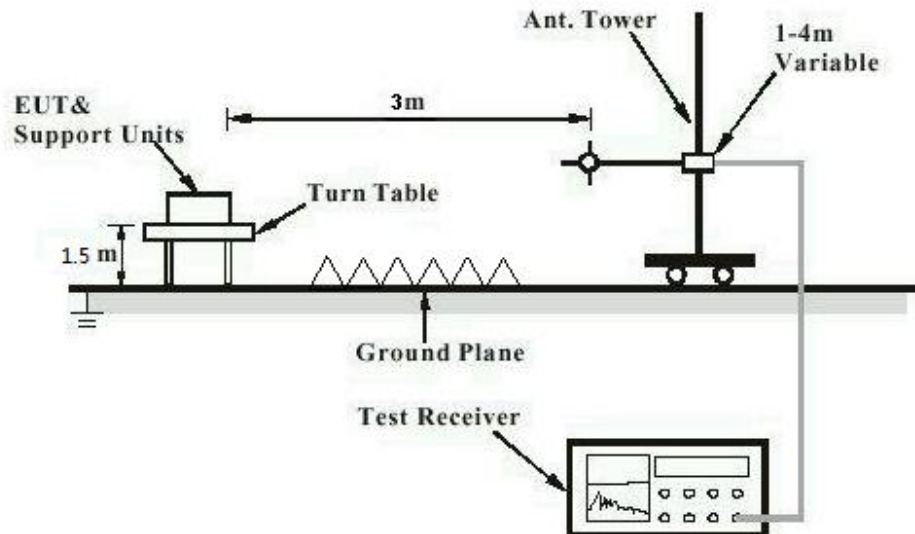


Diagram of Measurement Configuration for Conducted Transmitter Measurement

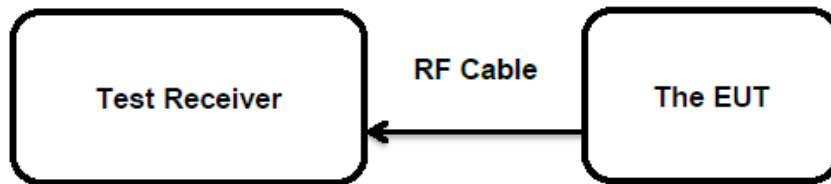

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(c) and Part 15.203

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.62 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(3)
 Basic standard : ANSI C63.10: 2013
 Limits : DTS < 1.0 Watts
 Kind of test site : Shielded Room

Test Setup

Date of testing : 08.01.2020
 Input voltage : 1.5Vdc
 Operation mode : A
 Test channel : Low / Middle / High
 Ambient temperature : 25.4 °C
 Relative humidity : 52 %
 Atmospheric pressure : 101 kPa

For details refer to following test result.

Table 4: Test Result of Maximum Peak Conducted Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
BLE	2402	0.32	0.0011	< 1
	2440	-0.78	0.0008	
	2480	-1.45	0.0007	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G) of BLE: 1.62 dBi,
 The Maximum peak conducted output power (e.i.r.p.)= $P_{(Peak\ power)} + G$, which is far below the 4 W

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(e)
Basic standard : ANSI C63.10: 2013
Limits : < 8 dBm / 3kHz
Kind of test site : Shielded Room

Test Setup

Date of testing : Refer to test data
Input voltage : 1.5Vdc
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

5.1.4 99% Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	RSS-Gen Clause 6.7
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	Refer to test data
Input voltage	:	1.5Vdc
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

5.1.5 Conducted Spurious Emissions

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: Refer to test data
Input voltage	: 1.5Vdc
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

5.1.6 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC Part 15.209(a)
Kind of test site	:	3m Semi-anechoic Chamber & 3m Full-anechoic Chamber

Test Setup

Date of testing	:	Refer to test data
Input voltage	:	1.5Vdc
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	22 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

5.1.7 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2)
Basic standard	:	ANSI C63.10: 2013
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	08.01.2020
Input voltage	:	1.5Vdc
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Technical Specification of EUT	8
Table 3: Auxiliary Equipment Used during Test.....	10
Table 4: Test Result of Maximum Peak Conducted Output Power	14