

Appendix A: Test Results

APPENDIX A: TEST RESULTS	1
APPENDIX A.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS	2
30MHz - 1GHz	2
1GHz - 18GHz	4
APPENDIX A.2: TEST RESULTS OF 20DB BANDWIDTH	16
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	18
APPENDIX A.4: TEST RESULTS OF BAND EDGE	20
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	24


Appendix A.1: Test Results of Field Strength of Fundamental & Harmonics

Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	thinkplus WL500 Rechargeable Silent Mouse
Model:	MS-394
Test Mode:	2.4G Mid CH
Order No/Sample No:	168440449/A003544811-005
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

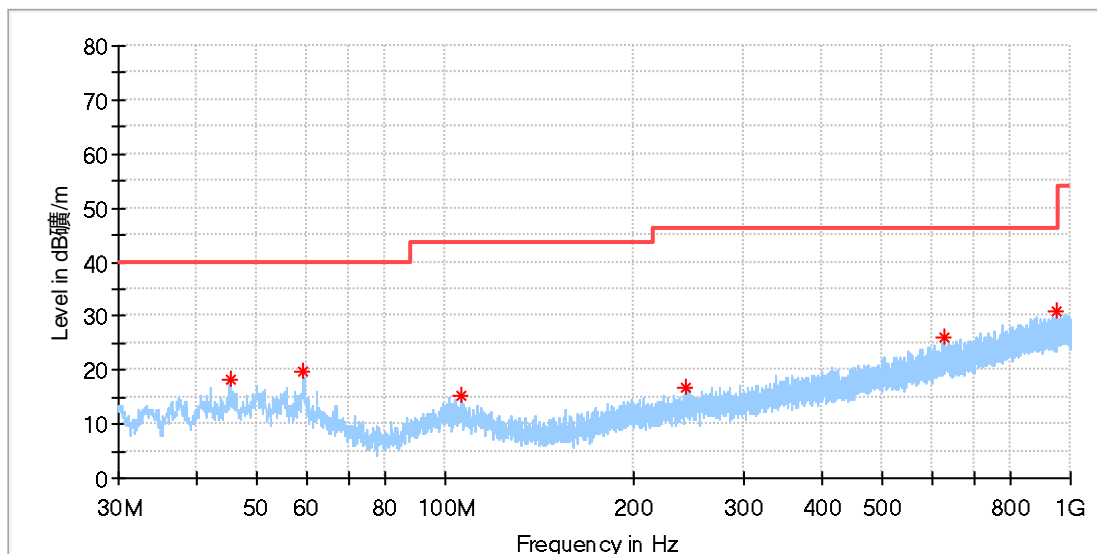

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.229000	18.34	40.00	21.66	100.0	H	248.0	-18.8
59.148500	19.82	40.00	20.18	100.0	H	342.0	-18.9
106.242000	15.35	43.50	28.15	100.0	H	248.0	-18.8
242.284500	16.83	46.00	29.17	100.0	H	260.0	-17.7
628.781000	25.87	46.00	20.13	100.0	H	46.0	-9.4
949.851000	30.97	46.00	15.03	100.0	H	12.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	thinkplus WL500 Rechargeable Silent Mouse
Model:	MS-394
Test Mode:	2.4G Mid CH
Order No/Sample No:	168440449/A003544811-005
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

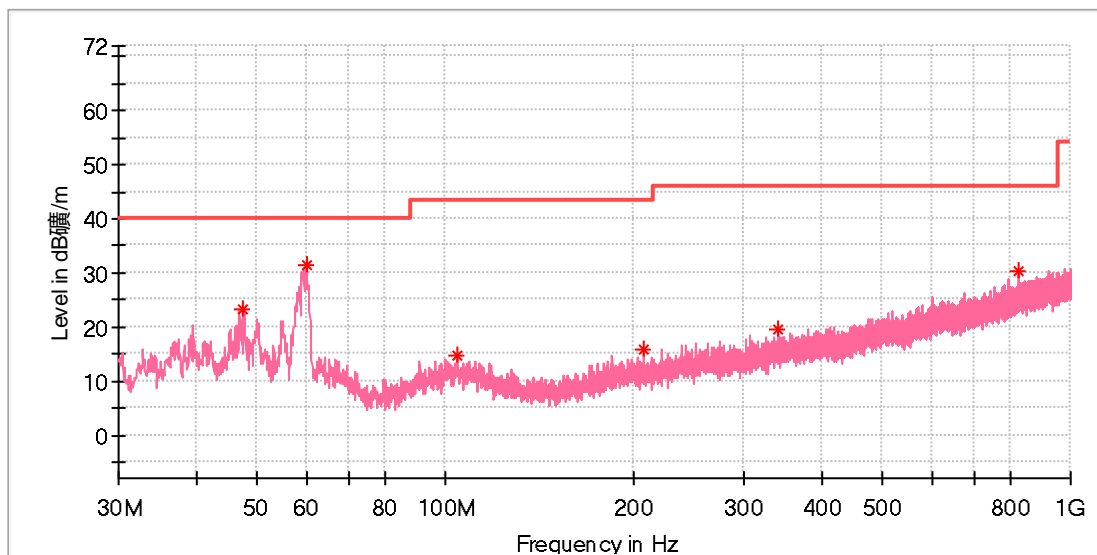

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.557000	23.23	40.00	16.77	100.0	V	166.0	-18.4
59.876000	31.31	40.00	8.69	100.0	V	311.0	-19.0
104.399000	14.79	43.50	28.71	100.0	V	249.0	-18.8
207.267500	15.92	43.50	27.58	100.0	V	330.0	-18.9
340.303000	19.46	46.00	26.54	100.0	V	0.0	-15.0
825.303000	30.30	46.00	15.70	100.0	V	0.0	-5.9

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	thinkplus WL500 Rechargeable Silent Mouse
Model:	MS-394
Test Mode:	2.4G L CH
Order No/Sample No:	168440449/A003544811-005
Test Voltage:	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

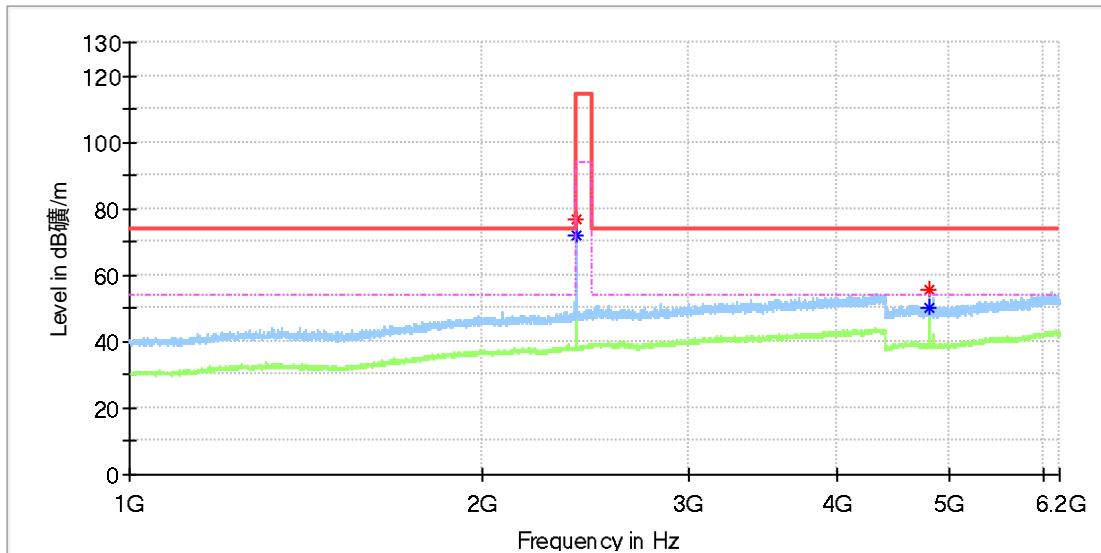

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.500000	---	72.00	94.00	22.00	100.0	H	174.0	7.0
2402.500000	76.82	---	114.00	37.18	100.0	H	174.0	7.0
4803.500000	---	50.44	54.00	3.56	100.0	H	296.0	11.8
4804.000000	55.54	---	74.00	18.46	100.0	H	296.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G L CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

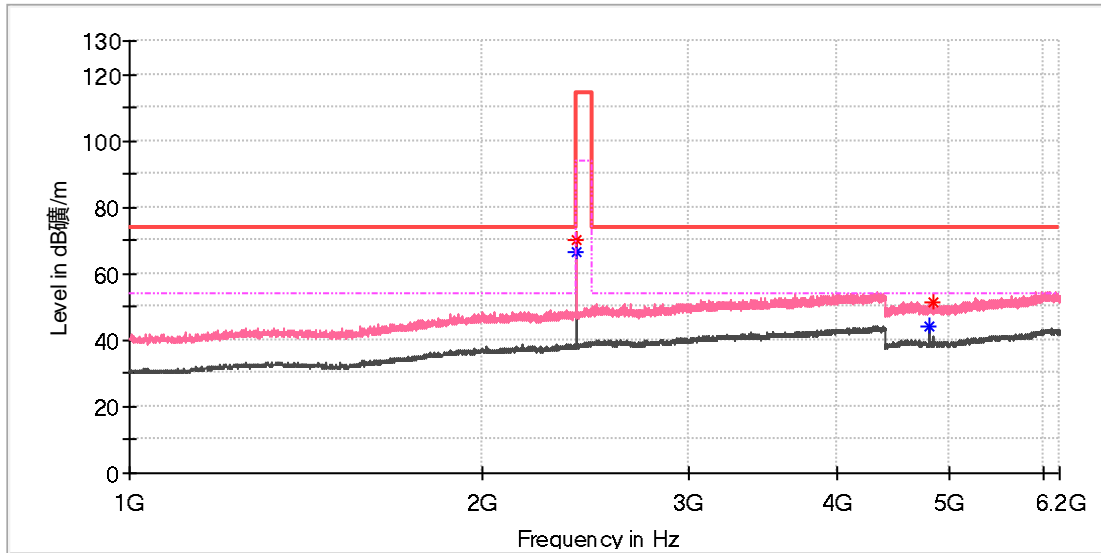

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.500000	---	66.52	94.00	27.48	100.0	V	180.0	7.0
2402.000000	70.03	---	114.00	43.97	100.0	V	237.0	7.0
4804.000000	---	44.14	54.00	9.86	100.0	V	11.0	11.8
4834.000000	51.41	---	74.00	22.59	100.0	V	5.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G L CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

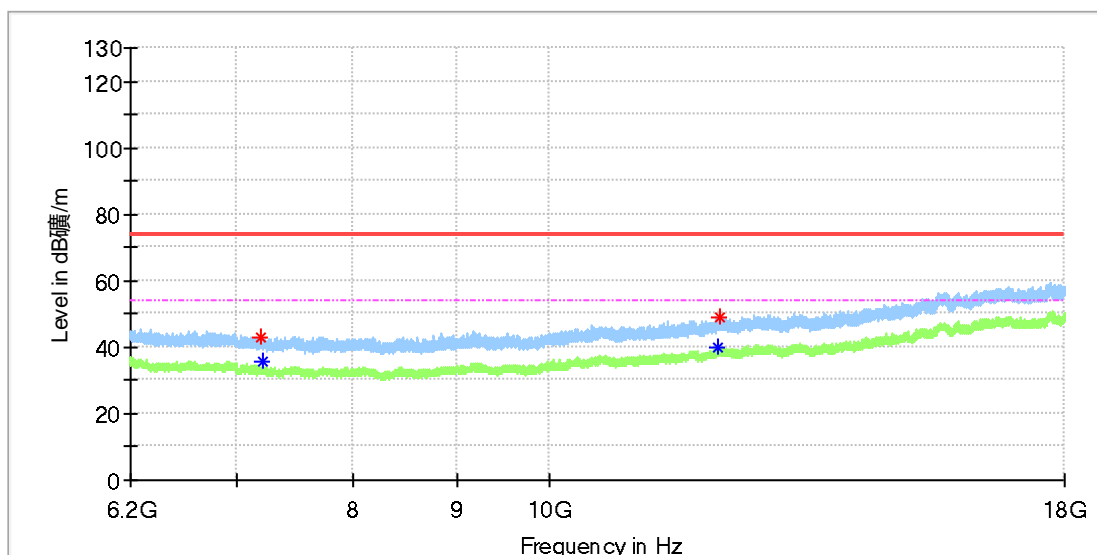

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7197.591667	43.04	---	74.00	30.96	100.0	H	149.0	8.8
7204.966667	---	35.96	54.00	18.04	100.0	H	356.0	8.8
12110.816667	---	39.79	54.00	14.21	100.0	H	33.0	14.2
12135.891667	48.99	---	74.00	25.01	100.0	H	295.0	14.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G L CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

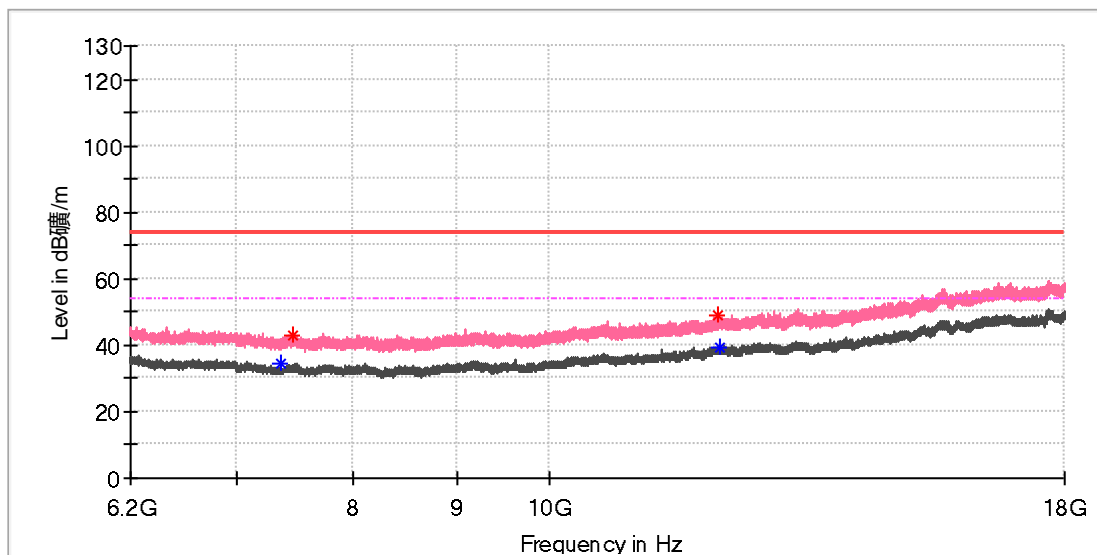

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7363.283333	---	34.64	54.00	19.36	100.0	V	27.0	8.2
7467.025000	43.12	---	74.00	30.88	100.0	V	197.0	8.6
12121.633333	48.73	---	74.00	25.27	100.0	V	249.0	14.3
12138.350000	---	39.60	54.00	14.40	100.0	V	4.0	14.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G Mid CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

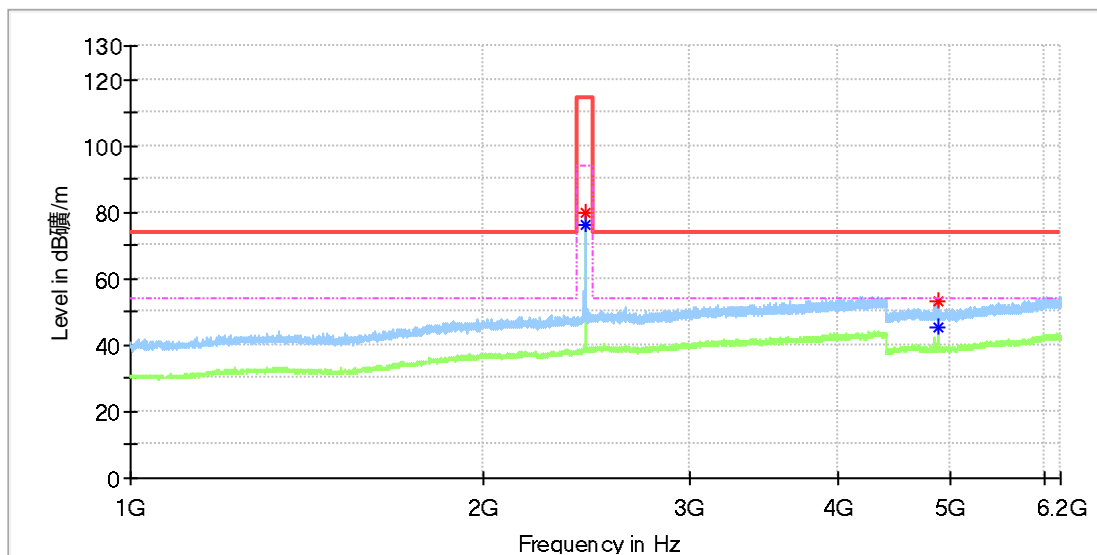

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2439.000000	79.69	---	114.00	34.31	100.0	H	238.0	7.4
2439.500000	---	76.31	94.00	17.69	100.0	H	148.0	7.4
4879.000000	53.05	---	74.00	20.95	100.0	H	71.0	11.8
4879.000000	---	45.51	54.00	8.49	100.0	H	71.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G Mid CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

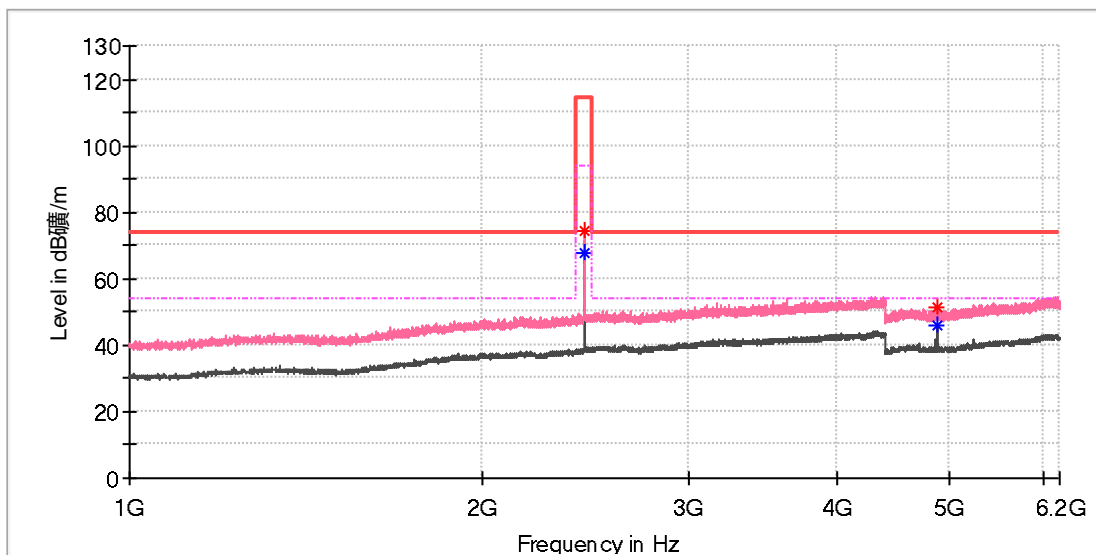

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2439.500000	74.51	---	114.00	39.49	100.0	V	230.0	7.4
2439.500000	---	67.56	94.00	26.44	100.0	V	230.0	7.4
4879.500000	51.32	---	74.00	22.68	100.0	V	143.0	11.8
4879.500000	---	45.93	54.00	8.07	100.0	V	143.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G Mid CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

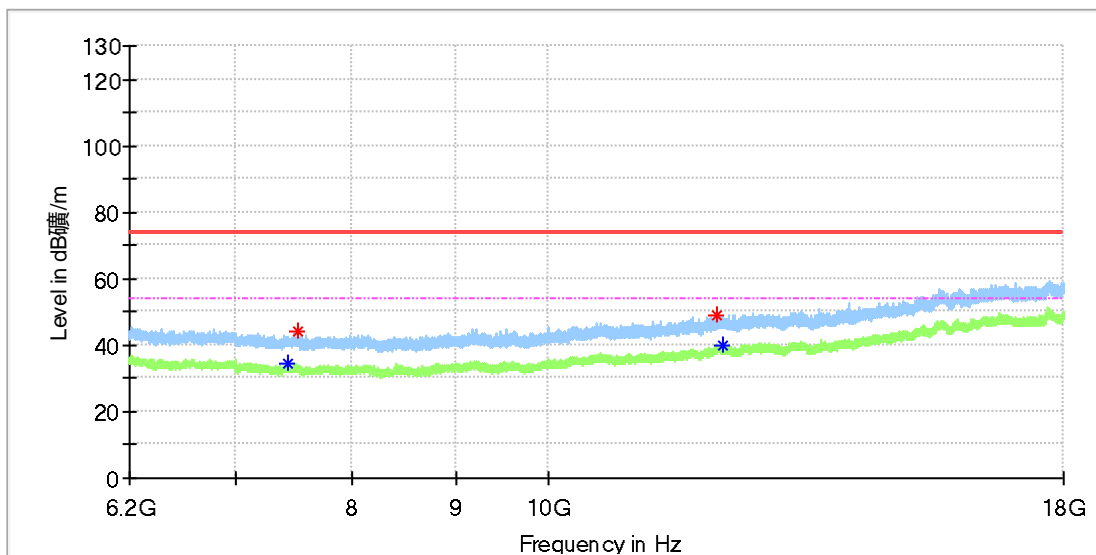

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7433.591667	---	34.19	54.00	19.81	100.0	H	136.0	8.4
7512.258333	43.85	---	74.00	30.15	100.0	H	160.0	8.7
12109.833333	49.08	---	74.00	24.92	100.0	H	222.0	14.2
12212.591667	---	39.95	54.00	14.05	100.0	H	100.0	14.7

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G Mid CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

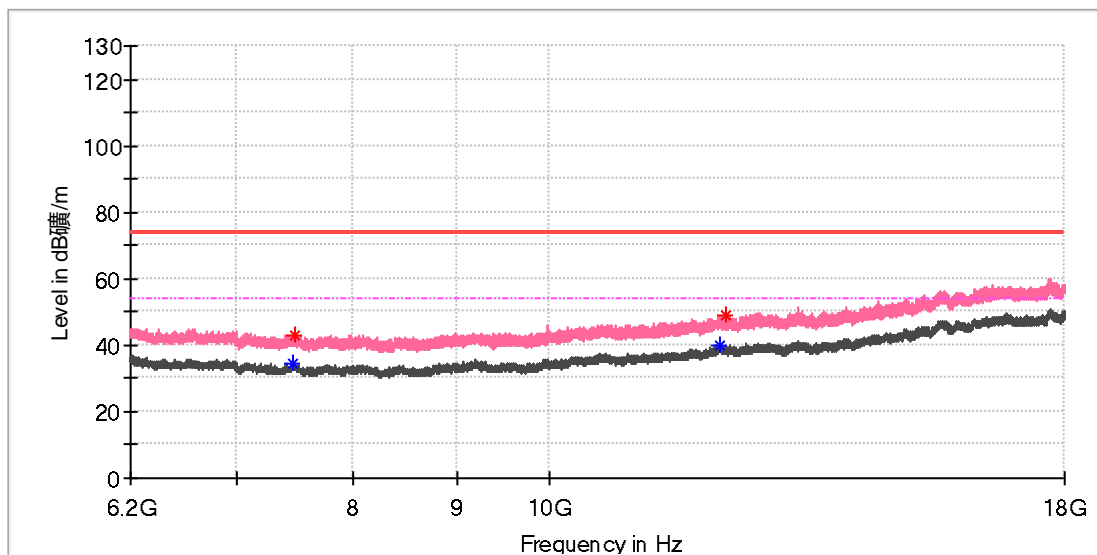

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7468.991667	---	34.72	54.00	19.28	100.0	V	350.0	8.6
7480.791667	43.21	---	74.00	30.79	100.0	V	312.0	8.7
12137.366667	---	39.93	54.00	14.07	100.0	V	350.0	14.3
12228.816667	48.93	---	74.00	25.07	100.0	V	358.0	14.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

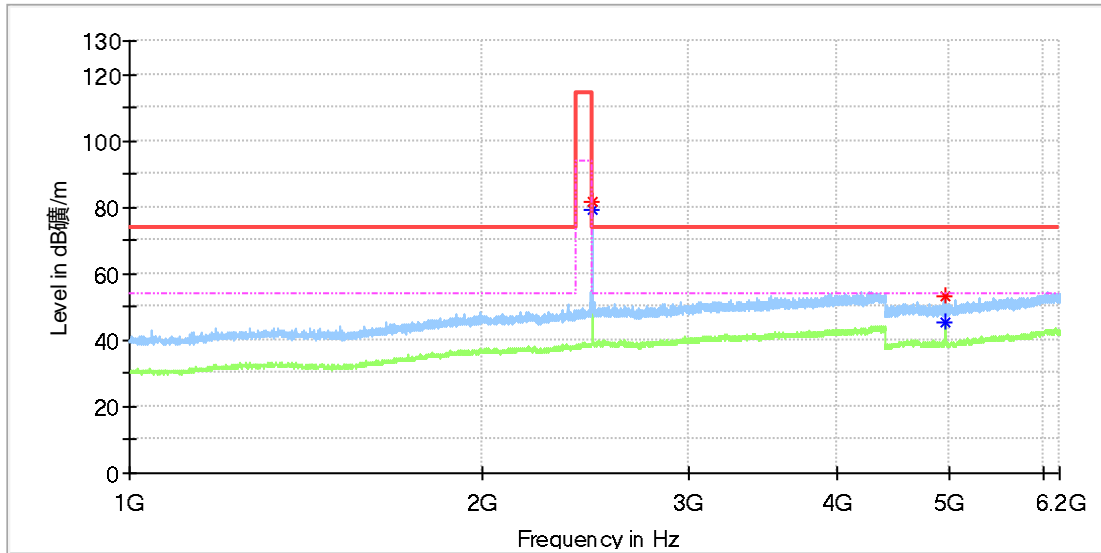

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.500000	---	78.97	94.00	15.03	100.0	H	211.0	7.4
2480.500000	81.73	---	114.00	32.27	100.0	H	50.0	7.4
4960.000000	52.94	---	74.00	21.06	100.0	H	290.0	11.8
4960.000000	---	45.61	54.00	8.39	100.0	H	290.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

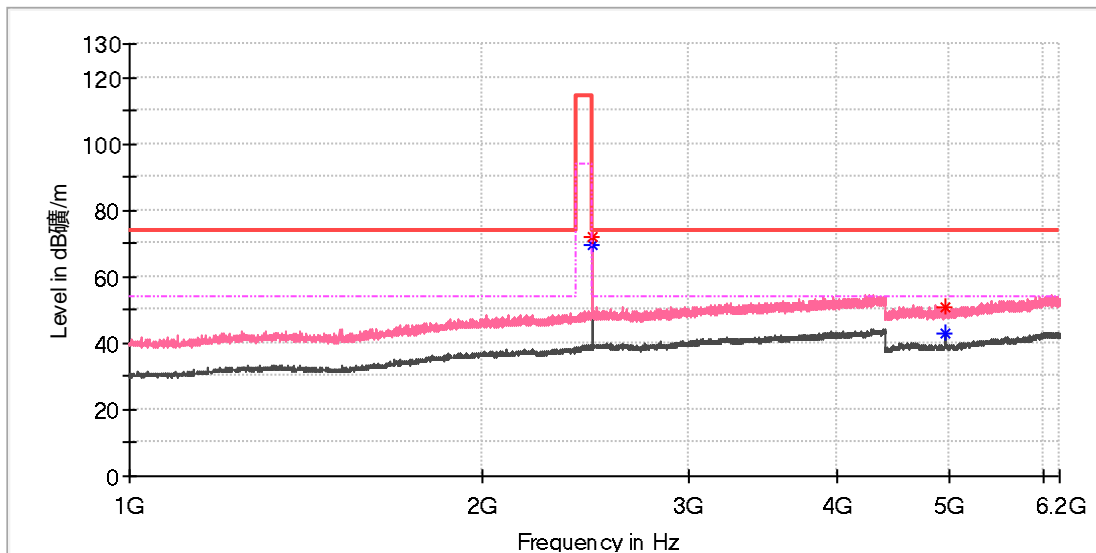

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.500000	---	69.43	94.00	24.57	100.0	V	285.0	7.4
2480.000000	71.94	---	114.00	42.06	100.0	V	285.0	7.4
4960.000000	---	43.17	54.00	10.83	100.0	V	314.0	11.8
4960.500000	50.73	---	74.00	23.27	100.0	V	314.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

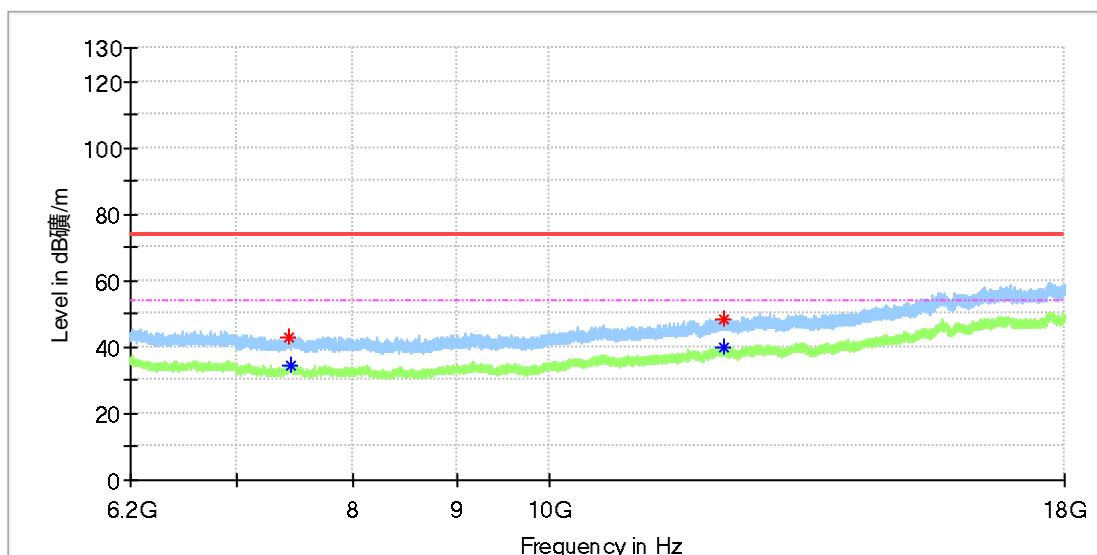

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7419.825000	42.74	---	74.00	31.26	100.0	H	162.0	8.4
7452.766667	---	34.71	54.00	19.29	100.0	H	198.0	8.5
12198.333333	48.53	---	74.00	25.47	100.0	H	0.0	14.7
12204.725000	---	40.18	54.00	13.82	100.0	H	0.0	14.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

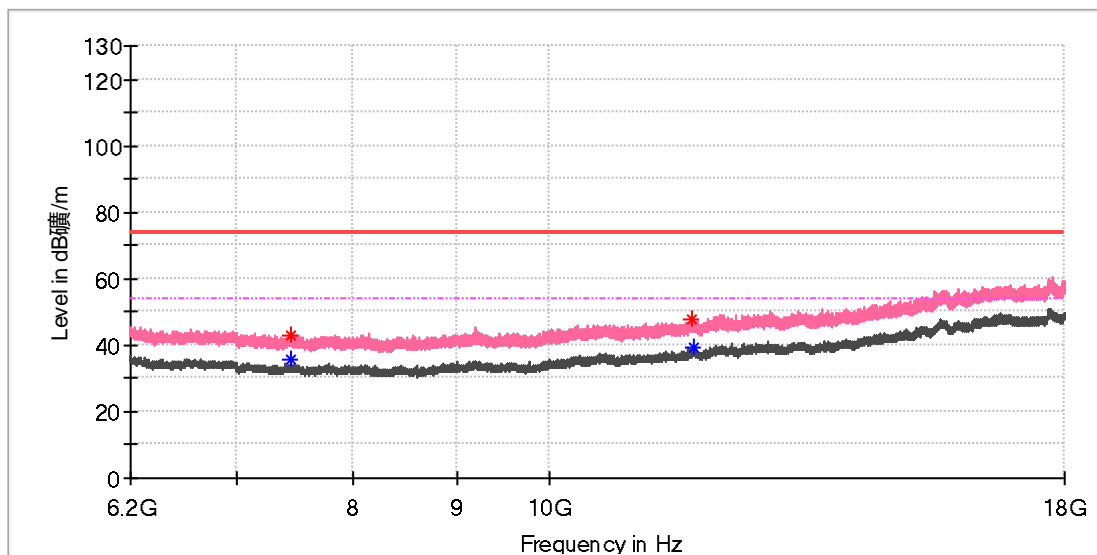


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7438.508333	43.08	---	74.00	30.92	100.0	V	157.0	8.4
7438.508333	---	35.46	54.00	18.54	100.0	V	157.0	8.4
11770.091667	47.87	---	74.00	26.13	100.0	V	304.0	13.4
11793.200000	---	39.26	54.00	14.74	100.0	V	144.0	13.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.2: Test Results of 20dB Bandwidth

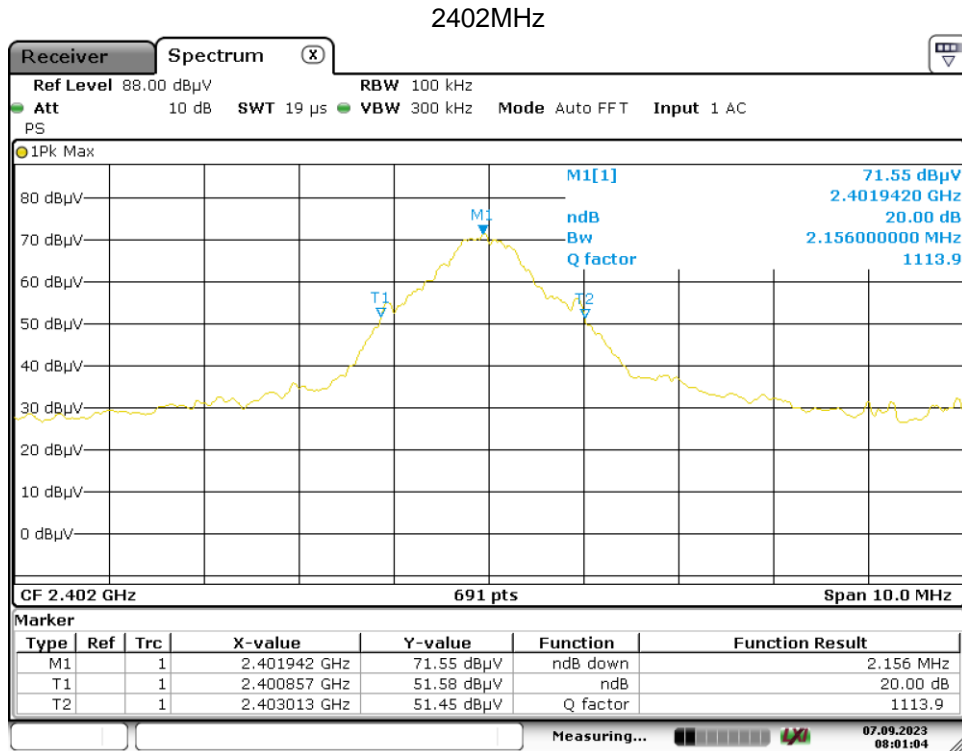


Date: 7.SEP.2023 08:01:04

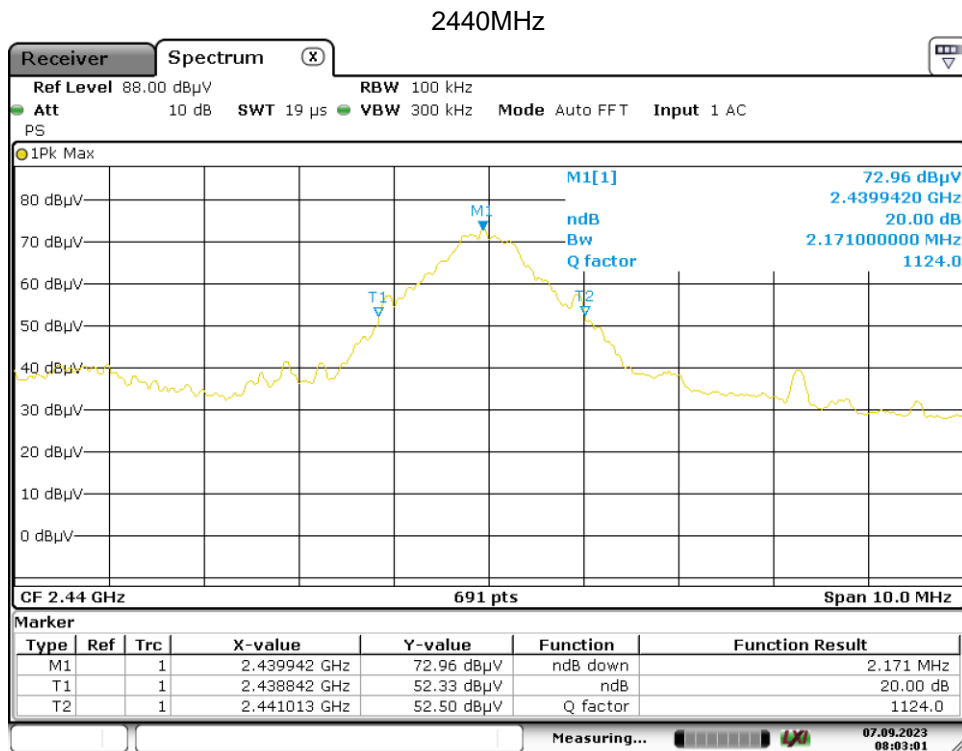


Date: 7.SEP.2023 08:03:01

2480MHz

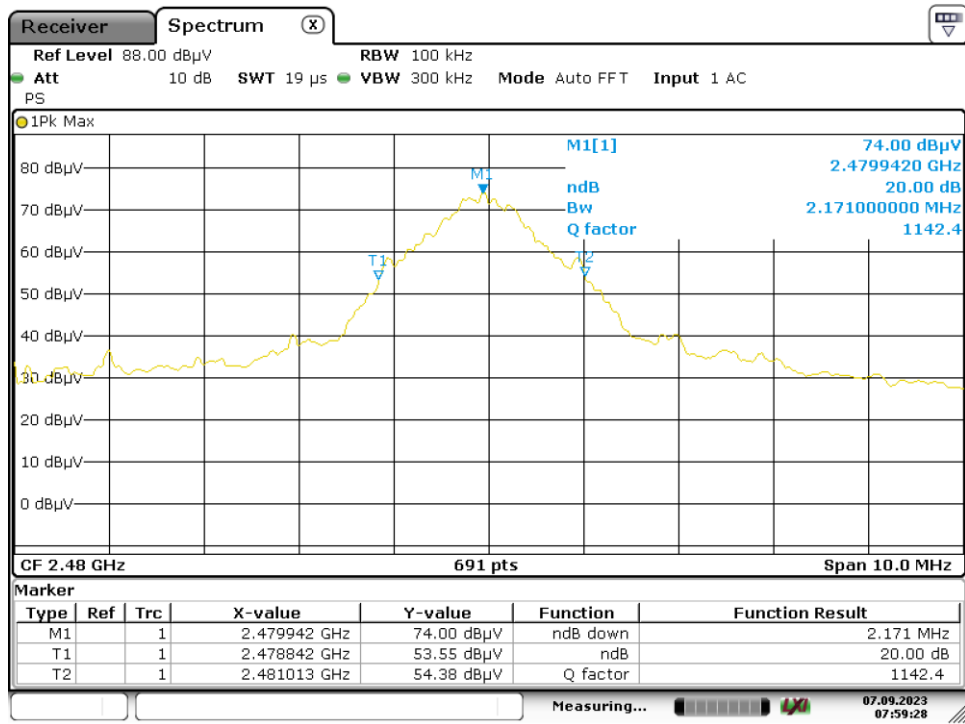


Date: 7.SEP.2023 07:59:28

Appendix A.3: Test Results of 99% Bandwidth

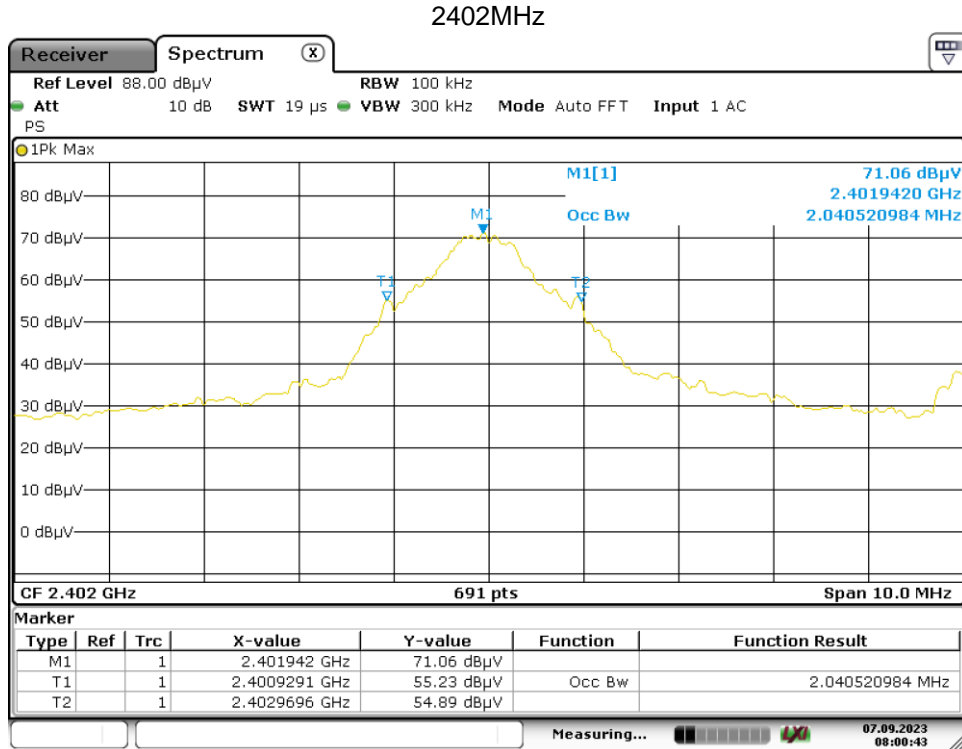


Date: 7.SEP.2023 08:00:44

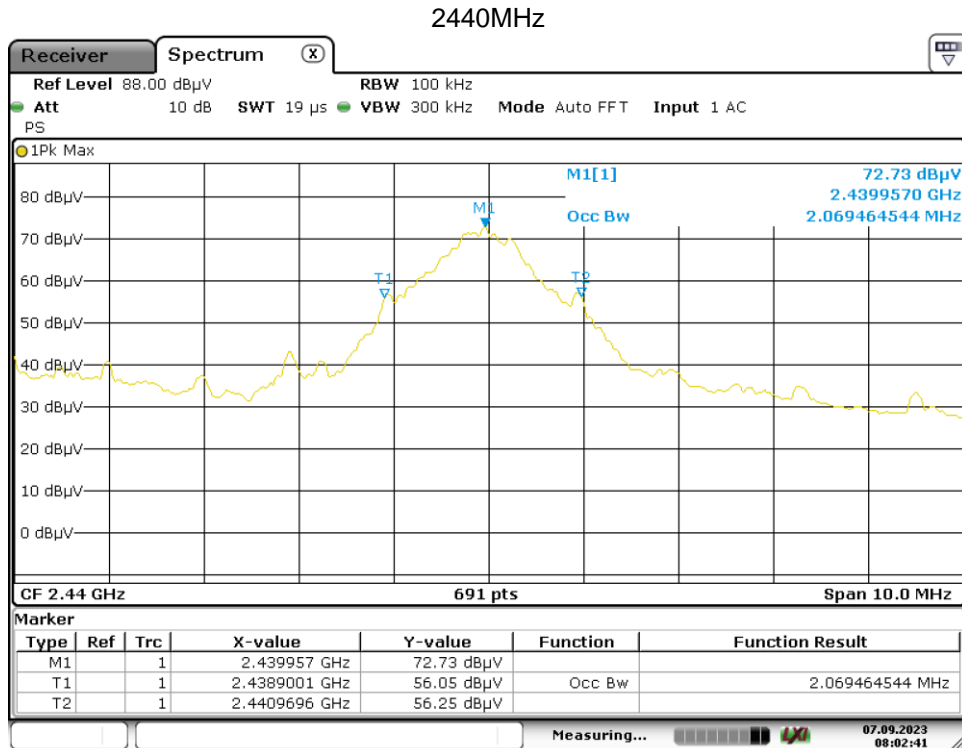

Date: 7.SEP.2023 08:02:42

2480MHz

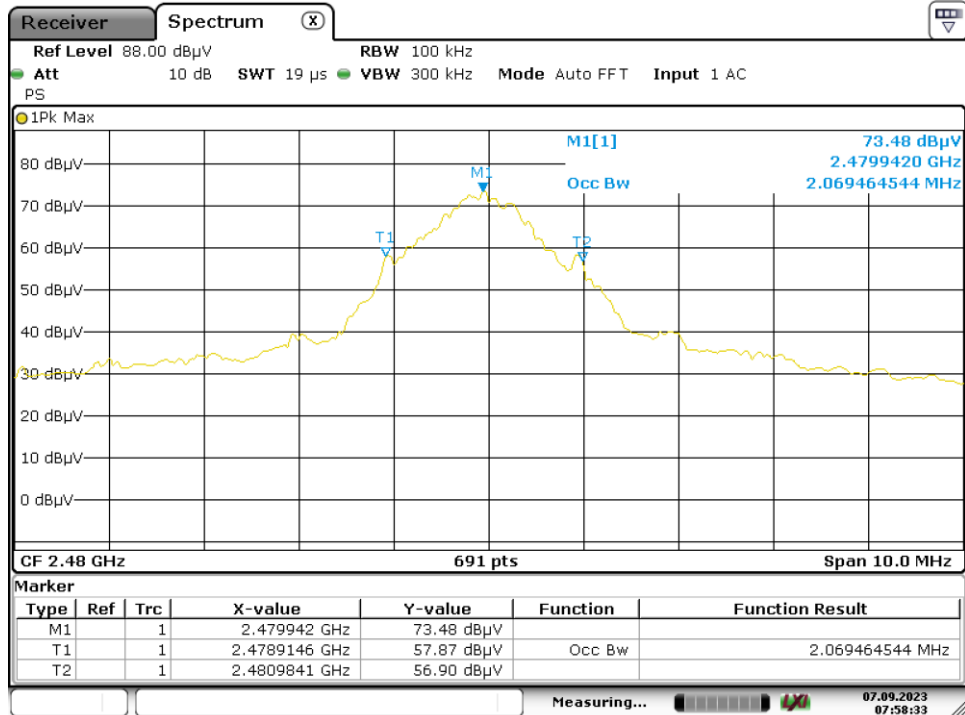


Date: 7.SEP.2023 07:58:33

Appendix A.4: Test Results of Band Edge

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G L CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

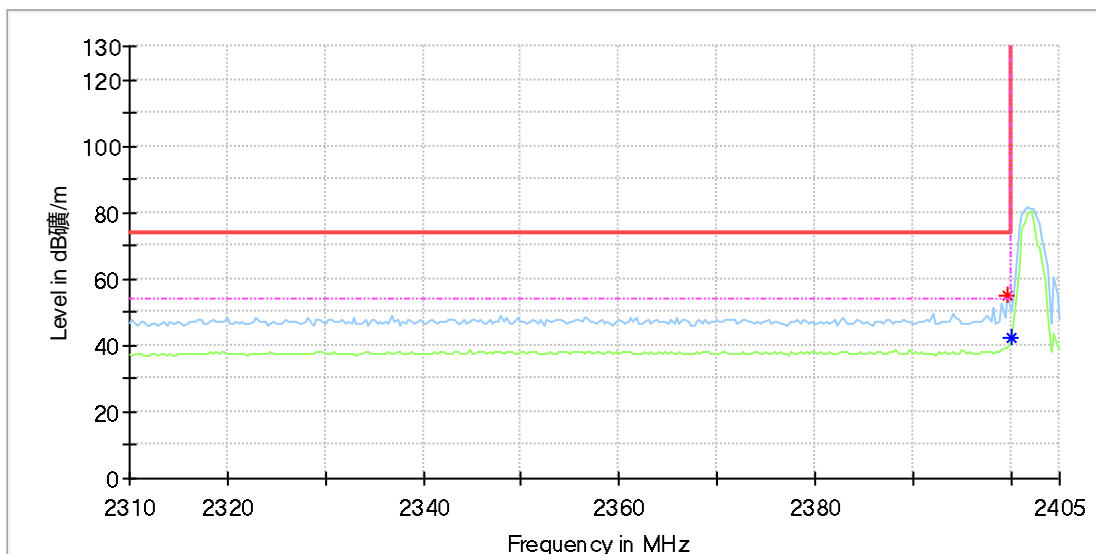

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2399.705882	54.76	---	74.00	19.24	100.0	H	277.0	7.0
2400.000000	---	42.11	54.00	11.89	100.0	H	303.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G L CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

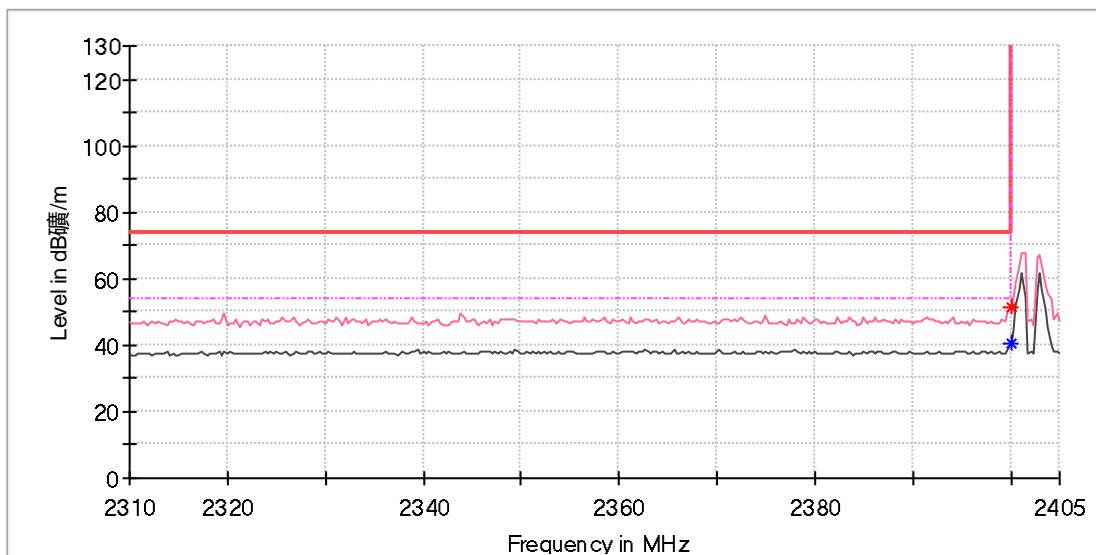

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2400.000000	51.27	---	74.00	22.73	100.0	V	324.0	7.0
2400.000000	---	40.36	54.00	13.64	100.0	V	324.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

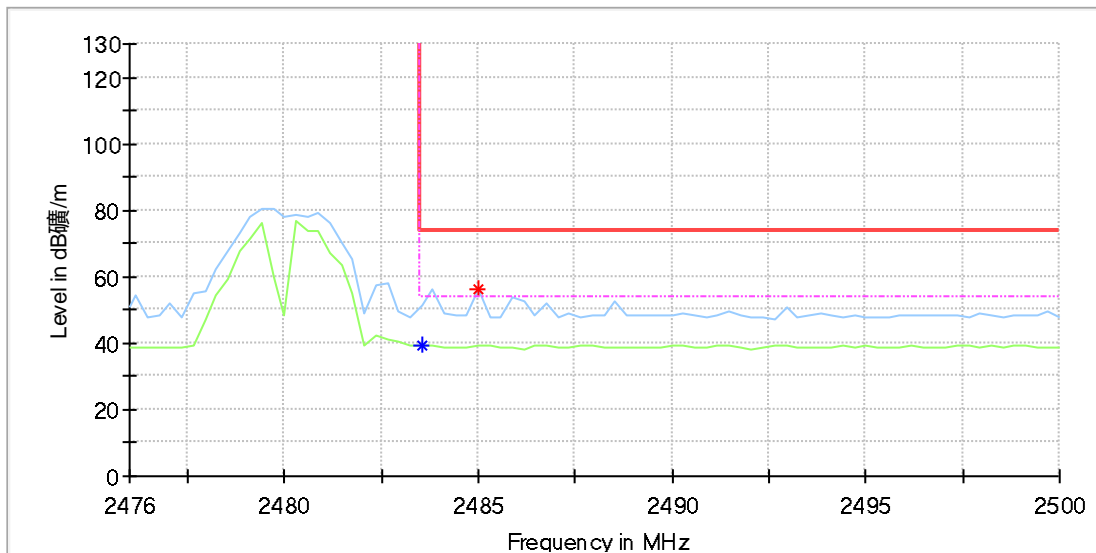

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	39.17	54.00	14.83	100.0	H	320.0	7.4
2485.000000	56.25	---	74.00	17.75	100.0	H	208.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Model: MS-394
 Test Mode: 2.4G H CH
 Order No/Sample No: 168440449/A003544811-005
 Test Voltage: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

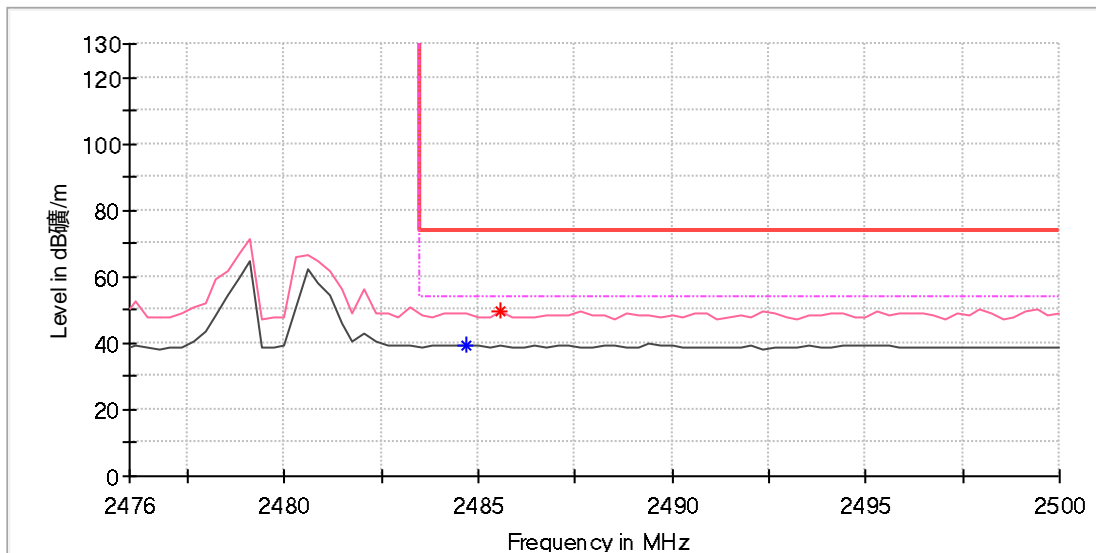

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.705882	---	39.48	54.00	14.52	100.0	V	42.0	7.4
2485.588235	49.75	---	74.00	24.25	100.0	V	37.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.5: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Order Number: 168440449
 Model: MS-394
 Test Mode: Nomral working
 Test Voltage: AC 120V/60Hz
 Test Standard: FCC Part 15
 Test By:/Review By: Soloman Wu/Gary Chen
 Tem./Hum./Pressure: 25.0°C/51.2%/101kPa
 Remark: SR2

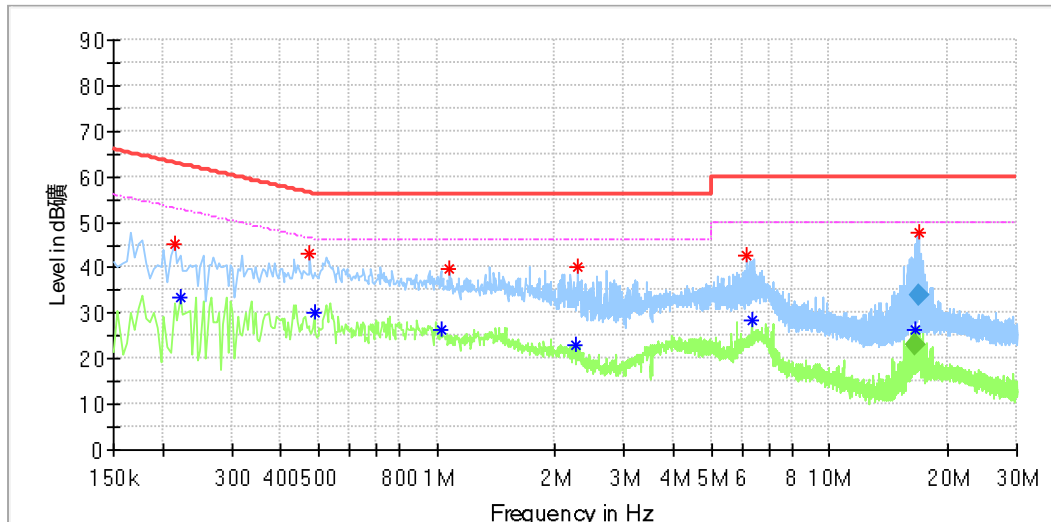

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.214000	45.12	---	63.05	17.93	L1	9.9
0.222000	---	33.52	52.74	19.22	L1	9.9
0.474000	43.01	---	56.44	13.43	L1	10.0
0.486000	---	30.08	46.24	16.16	L1	10.0
1.022000	---	26.37	46.00	19.63	L1	10.0
1.078000	39.97	---	56.00	16.03	L1	10.0
2.254000	---	22.96	46.00	23.04	L1	10.2
2.286000	40.20	---	56.00	15.80	L1	10.2
6.174000	42.55	---	60.00	17.45	L1	10.3
6.318000	---	28.45	50.00	21.55	L1	10.3
16.598500	---	26.56	50.00	23.44	L1	10.4
16.817500	47.64	---	60.00	12.36	L1	10.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
16.598500	---	22.92	50.00	27.08	1000.0	9.000	L1	10.4
16.817500	33.71	---	60.00	26.29	1000.0	9.000	L1	10.4

EUT Information

EUT Name: thinkplus WL500 Rechargeable Silent Mouse
 Order Number: 168440449
 Model: MS-394
 Test Mode: Nomral working
 Test Voltage: AC 120V/60Hz
 Test Standard: FCC Part 15
 Test By:/Review By: Soloman Wu/Gary Chen
 Tem./Hum./Pressure: 25.0°C/51.2%/101kPa
 Remark: SR2

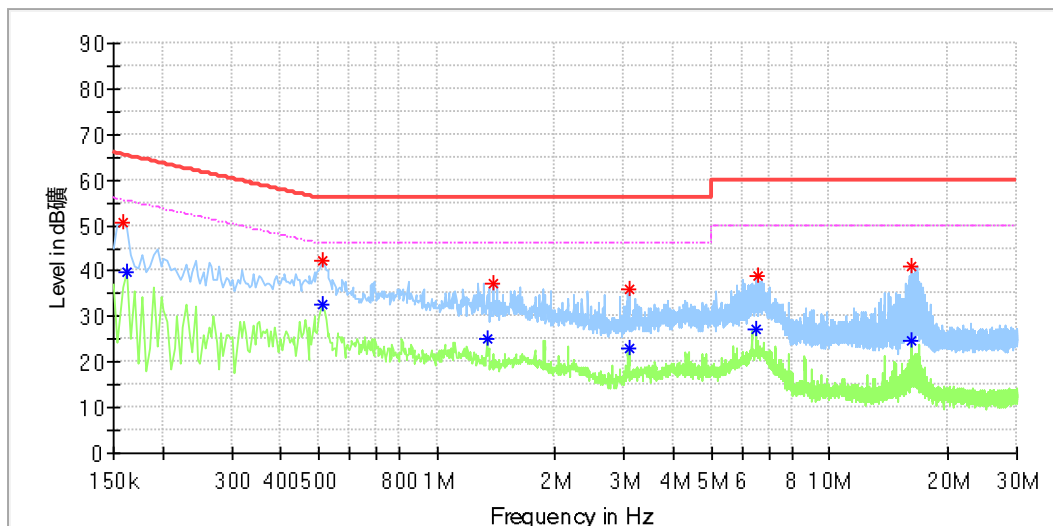

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.158000	50.57	---	65.57	15.00	N	9.8
0.162000	---	39.73	55.36	15.63	N	9.8
0.510000	42.42	---	56.00	13.58	N	9.8
0.510000	---	32.68	46.00	13.32	N	9.8
1.338000	---	25.06	46.00	20.94	N	9.8
1.394000	37.28	---	56.00	18.72	N	9.8
3.086000	---	23.13	46.00	22.87	N	9.9
3.094000	35.97	---	56.00	20.03	N	9.9
6.482000	---	27.09	50.00	22.91	N	9.9
6.554000	39.02	---	60.00	20.98	N	9.9
16.178000	41.20	---	60.00	18.80	N	10.2
16.198000	---	24.75	50.00	25.25	N	10.2