

Appendix A: Test Results

APPENDIX A: TEST RESULTS	1
APPENDIX A.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS	2
30MHz - 1GHz	2
1GHz - 18GHz	4
APPENDIX A.2: TEST RESULTS OF 20DB BANDWIDTH	16
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	18
APPENDIX A.4: TEST RESULTS OF BAND EDGE	20
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	24


Appendix A.1: Test Results of Field Strength of Fundamental & Harmonics

Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz M CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

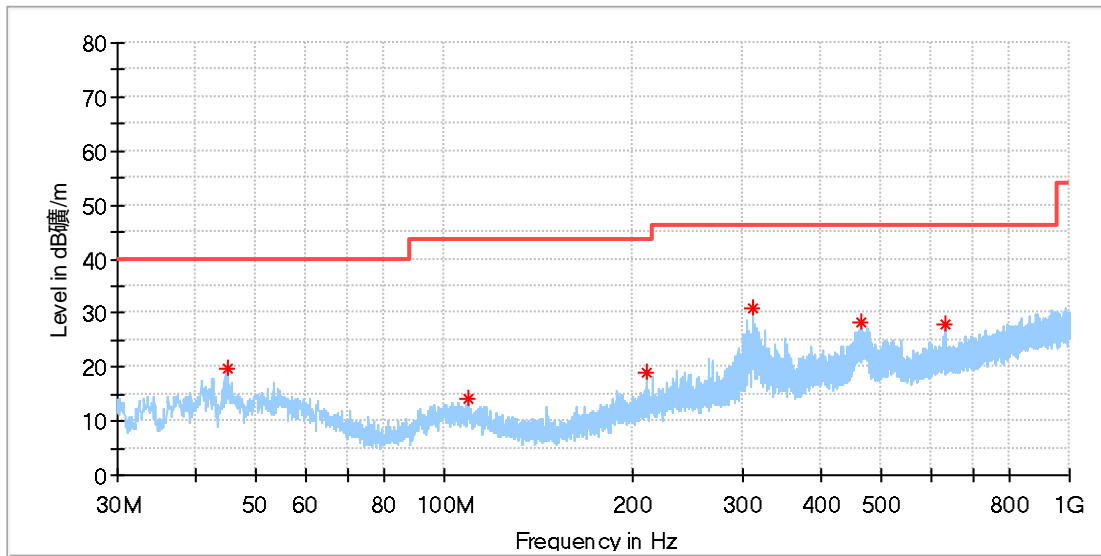

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.035000	19.61	40.00	20.39	100.0	H	295.0	-18.8
109.152000	14.31	43.50	29.19	100.0	H	185.0	-19.0
210.420000	19.05	43.50	24.45	100.0	H	118.0	-18.9
311.979000	31.03	46.00	14.97	100.0	H	246.0	-15.9
462.765500	28.39	46.00	17.61	100.0	H	260.0	-12.6
631.109000	28.04	46.00	17.96	100.0	H	136.0	-9.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz M CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

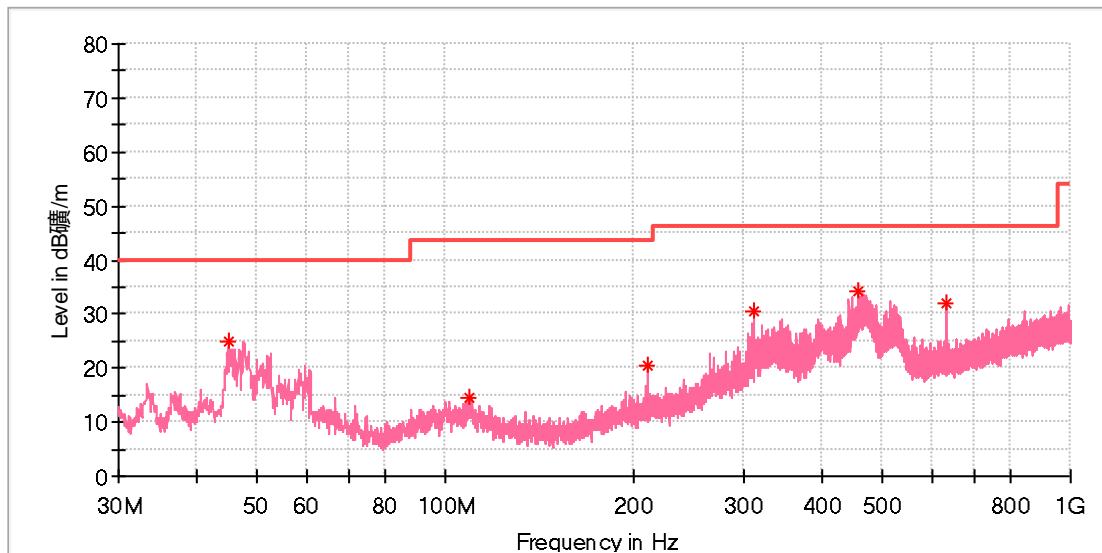

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.938000	25.00	40.00	15.00	100.0	V	154.0	-18.8
109.394500	14.60	43.50	28.90	100.0	V	204.0	-19.0
210.420000	20.65	43.50	22.85	100.0	V	169.0	-18.9
311.979000	30.48	46.00	15.52	100.0	V	359.0	-15.9
457.285000	34.15	46.00	11.85	100.0	V	140.0	-12.8
631.109000	32.00	46.00	14.00	100.0	V	161.0	-9.4

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4G L CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

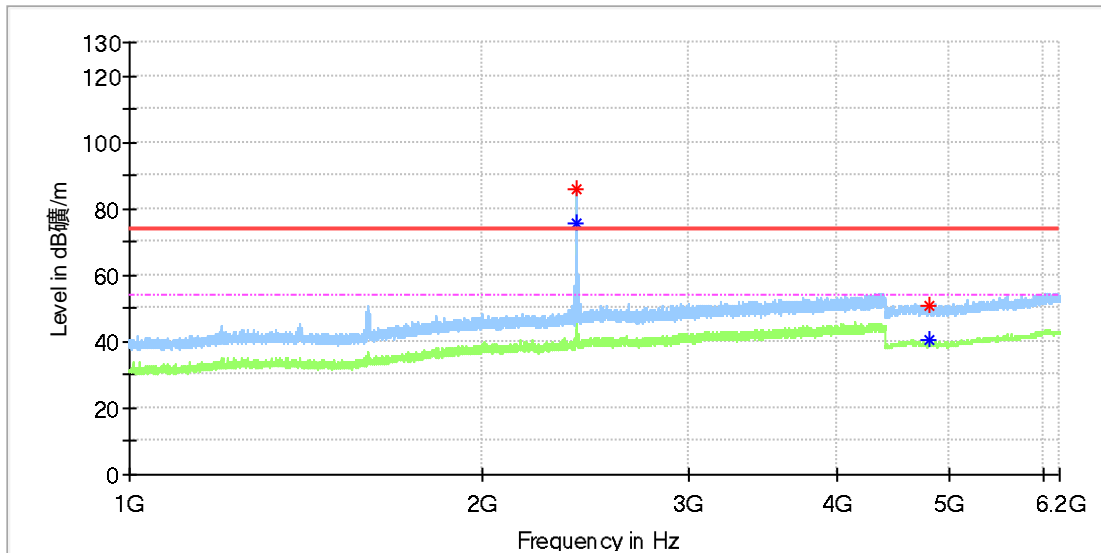

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.820000	---	75.45	94.00	18.55	100.0	H	1.0	7.0
2402.500000	85.89	---	114.00	28.11	100.0	H	1.0	7.0
4806.000000	---	40.67	54.00	13.33	100.0	H	292.0	11.8
4810.000000	50.64	---	74.00	23.36	100.0	H	272.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4G L CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

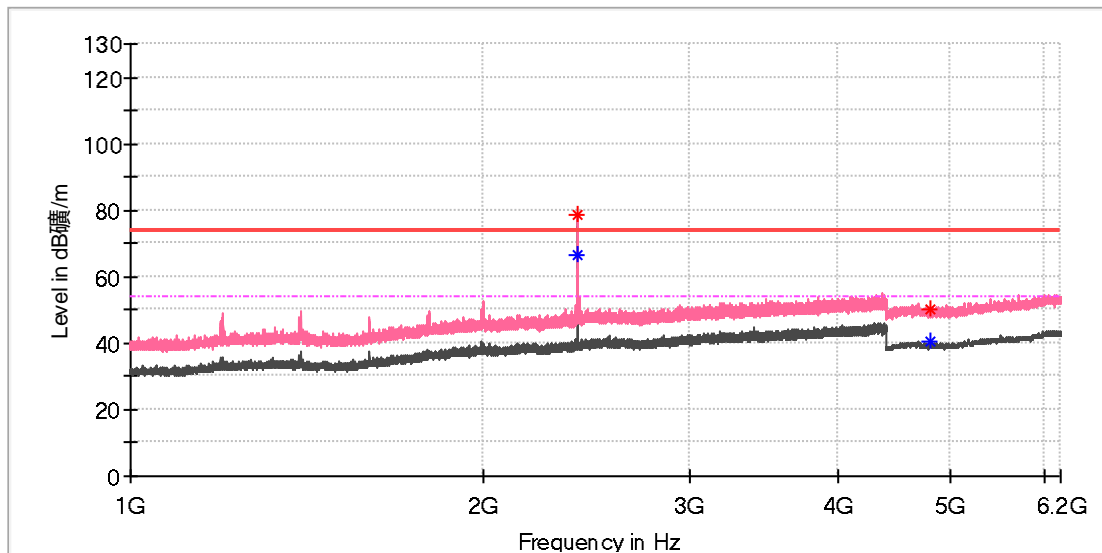

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.500000	78.60	---	114.00	35.40	100.0	V	0.0	7.0
2404.200000	---	66.36	94.00	27.64	100.0	V	144.0	7.0
4807.000000	---	40.72	54.00	13.28	100.0	V	302.0	11.8
4810.500000	50.13	---	74.00	23.87	100.0	V	251.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4G L CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

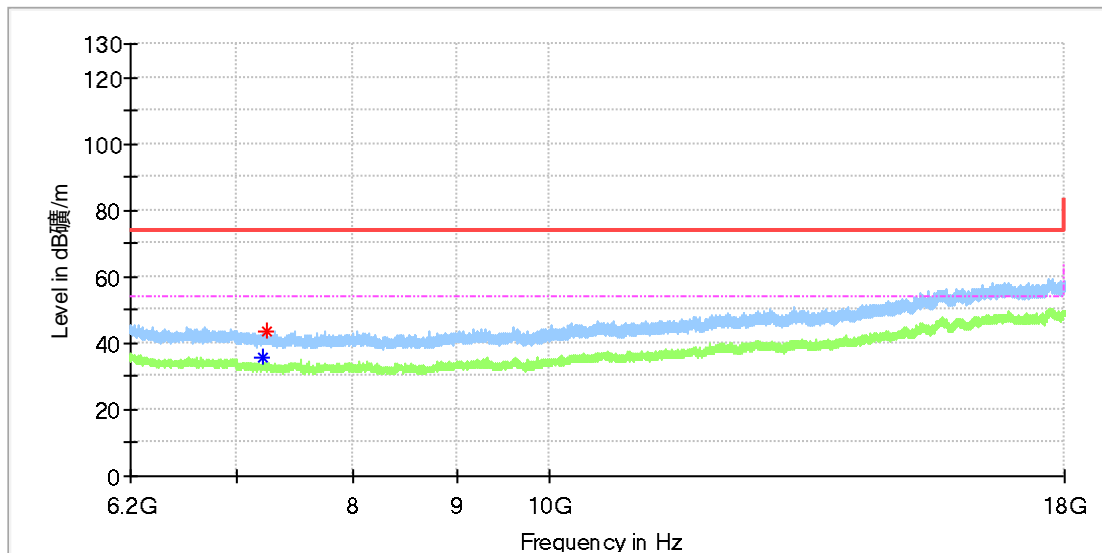

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.425000	---	35.40	54.00	18.60	100.0	H	222.0	8.8
7242.333333	43.48	---	74.00	30.52	100.0	H	126.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4G L CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

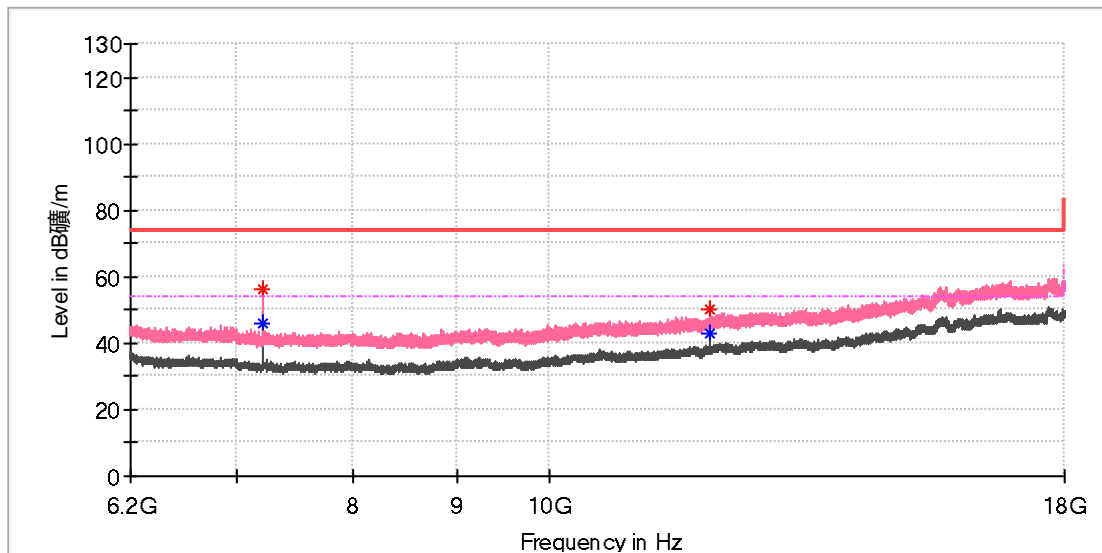

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.425000	---	45.81	54.00	8.19	100.0	V	238.0	8.8
7207.425000	56.27	---	74.00	17.73	100.0	V	238.0	8.8
12012.483333	50.23	---	74.00	23.77	100.0	V	301.0	14.0
12012.483333	---	42.92	54.00	11.08	100.0	V	301.0	14.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz M CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

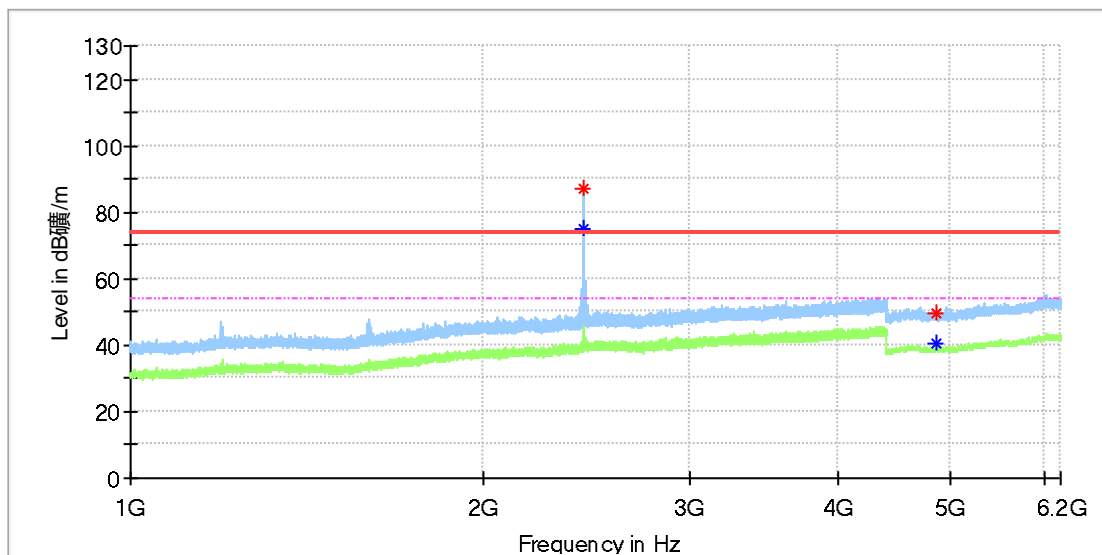

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2431.740000	---	74.83	94.00	19.17	100.0	H	183.0	7.3
2432.590000	86.96	---	114.00	27.04	100.0	H	183.0	7.3
4865.000000	49.81	---	74.00	24.19	100.0	H	275.0	11.8
4866.000000	---	40.57	54.00	13.43	100.0	H	275.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz M CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

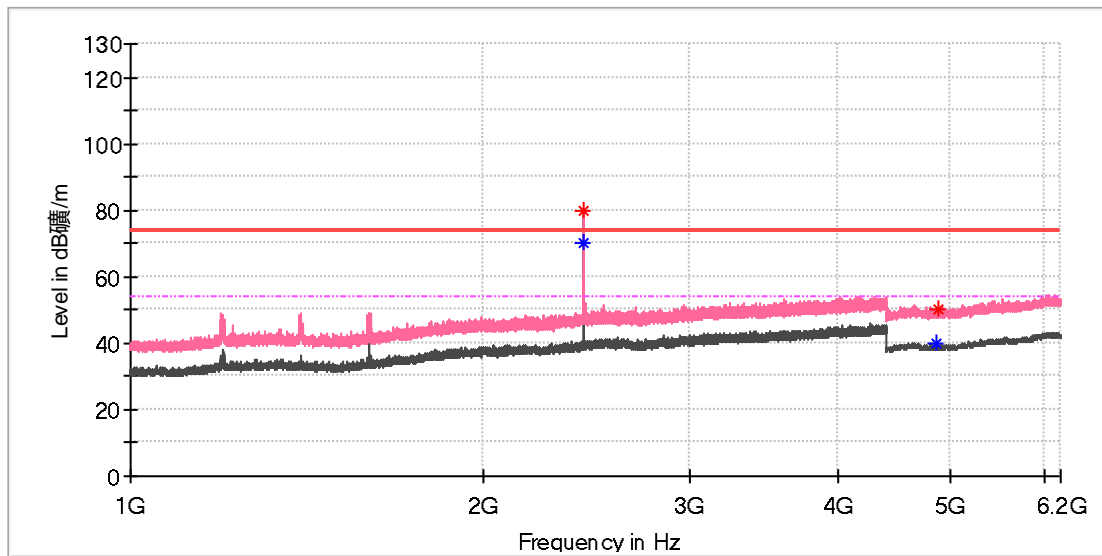

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2432.420000	80.08	---	114.00	33.92	100.0	V	37.0	7.3
2434.120000	---	70.38	94.00	23.62	100.0	V	37.0	7.3
4852.500000	---	39.99	54.00	14.01	100.0	V	237.0	11.8
4873.500000	50.13	---	74.00	23.87	100.0	V	65.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz M CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

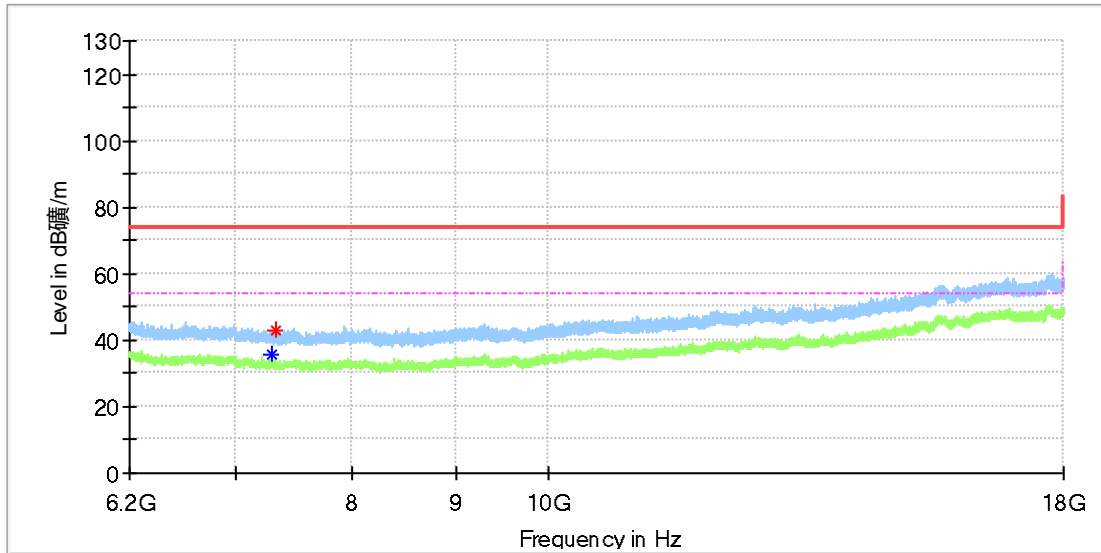

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7297.400000	---	35.85	54.00	18.15	100.0	H	242.0	8.3
7319.525000	42.67	---	74.00	31.33	100.0	H	350.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz M CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

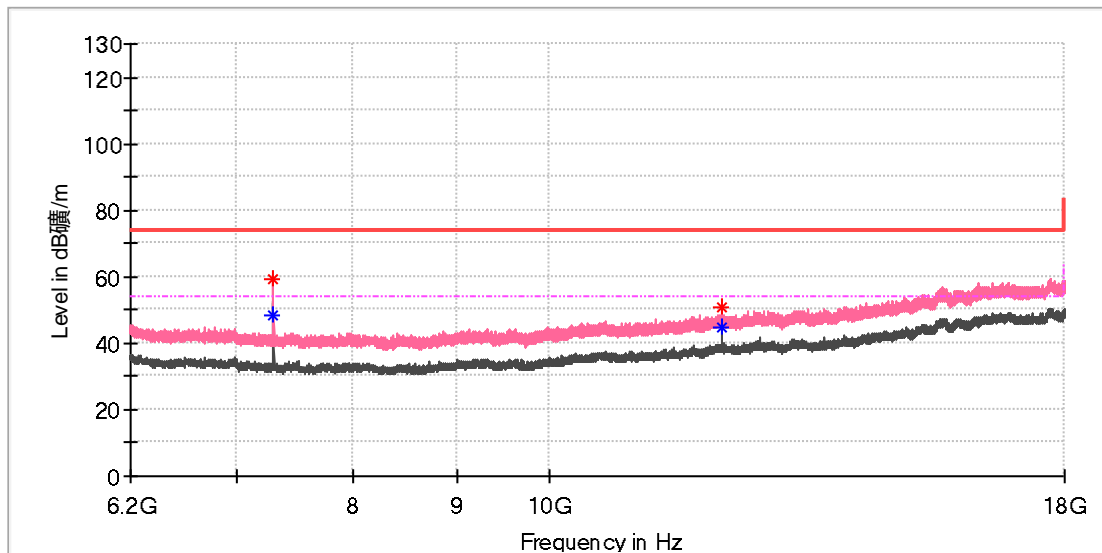

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7297.400000	59.16	---	74.00	14.84	100.0	V	251.0	8.3
7298.383333	---	48.67	54.00	5.33	100.0	V	240.0	8.3
12162.441667	---	44.61	54.00	9.39	100.0	V	263.0	14.5
12162.933333	51.00	---	74.00	23.00	100.0	V	263.0	14.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz H CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

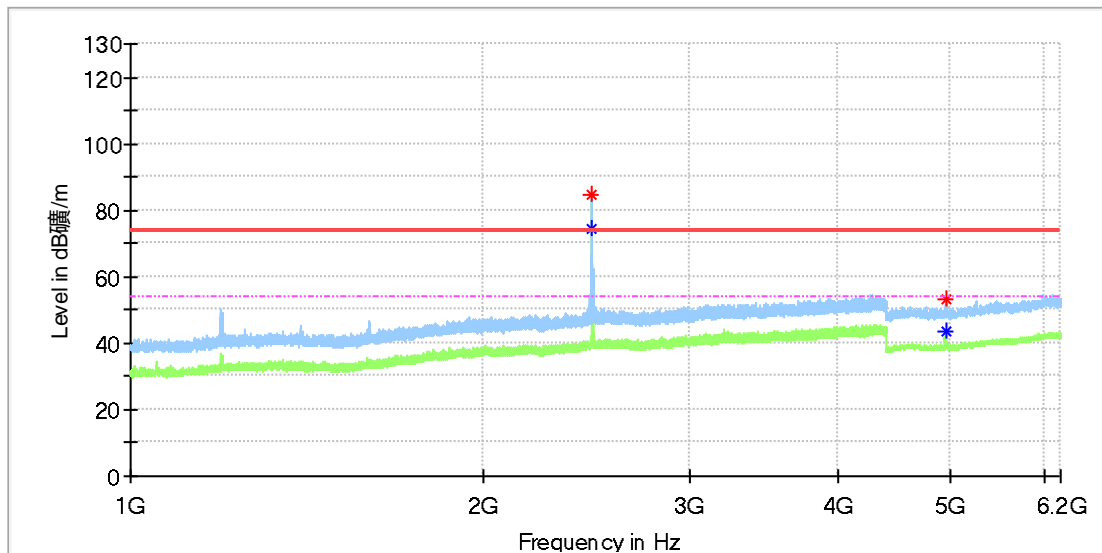

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2472.370000	84.59	---	114.00	29.41	100.0	H	356.0	7.4
2473.900000	53.16	74.08	94.00	19.92	100.0	H	0.0	7.4
4945.500000	---	---	74.00	20.84	100.0	H	268.0	11.8
4947.000000	---	43.43	54.00	10.57	100.0	H	268.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz H CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

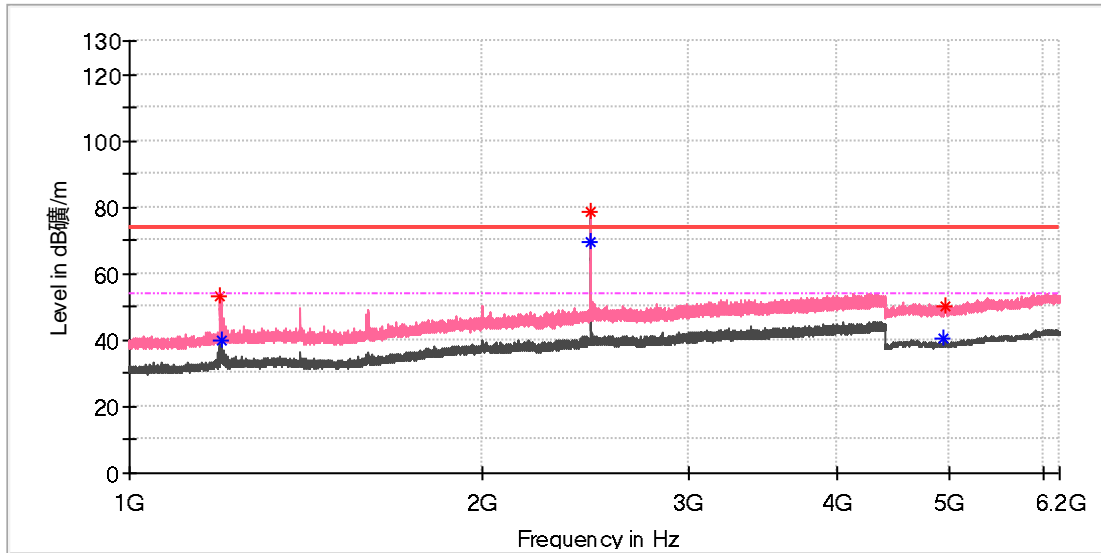

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.990000	53.15	---	74.00	20.85	100.0	V	329.0	1.1
1196.520000	---	40.13	54.00	13.87	100.0	V	329.0	1.1
2472.540000	78.36	---	114.00	35.64	100.0	V	30.0	7.4
2474.070000	---	69.31	94.00	24.69	100.0	V	30.0	7.4
4945.000000	---	40.31	54.00	13.69	100.0	V	112.0	11.8
4961.000000	50.45	---	74.00	23.55	100.0	V	0.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz H CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

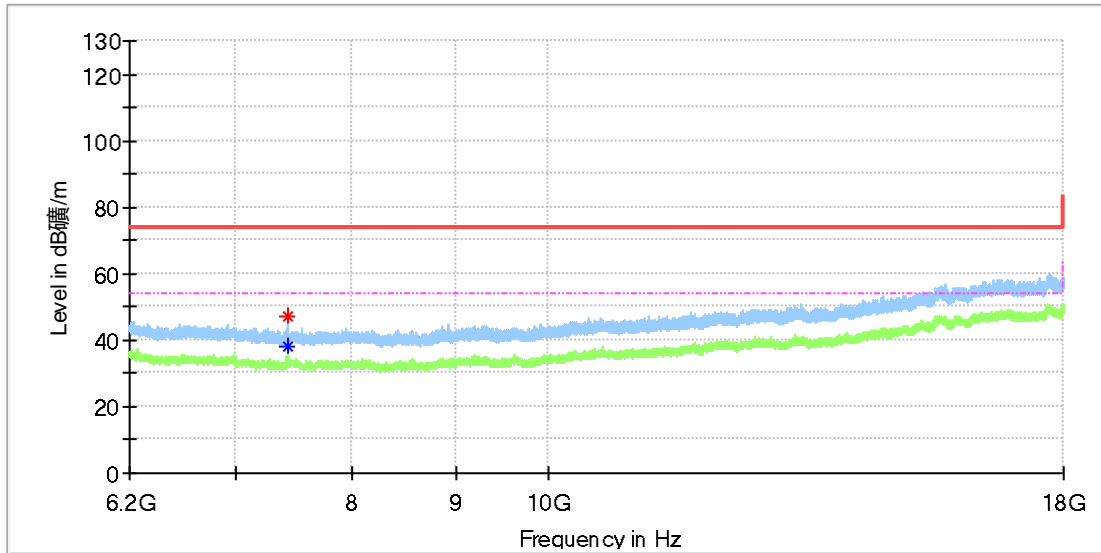

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7420.316667	47.06	---	74.00	26.94	100.0	H	235.0	8.4
7420.316667	---	38.32	54.00	15.68	100.0	H	235.0	8.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz H CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

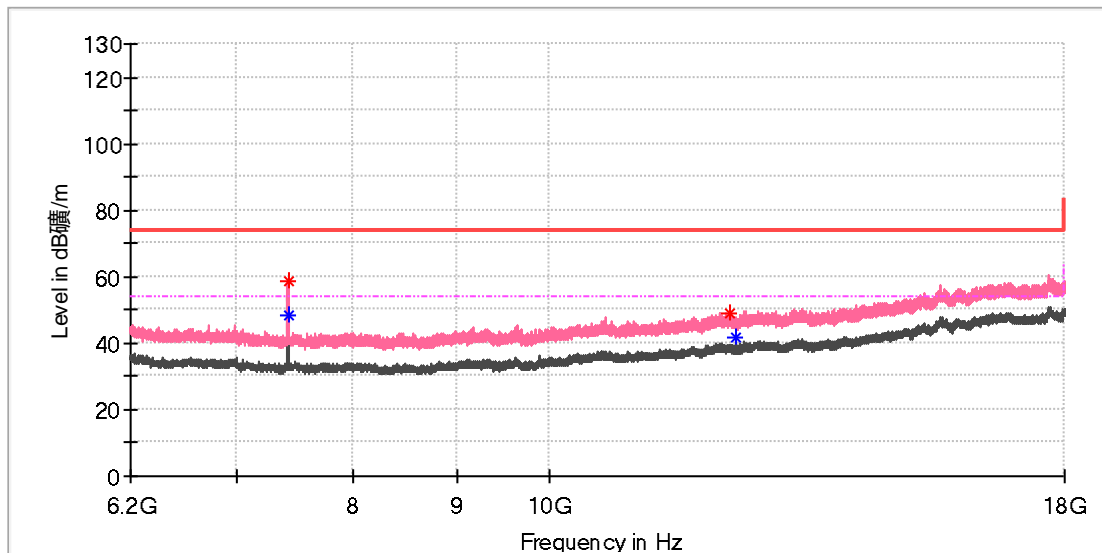


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7419.825000	58.78	---	74.00	15.22	100.0	V	247.0	8.4
7420.316667	---	48.31	54.00	5.69	100.0	V	236.0	8.4
12282.408333	48.93	---	74.00	25.07	100.0	V	272.0	14.8
12362.550000	---	41.62	54.00	12.38	100.0	V	286.0	14.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.2: Test Results of 20dB Bandwidth

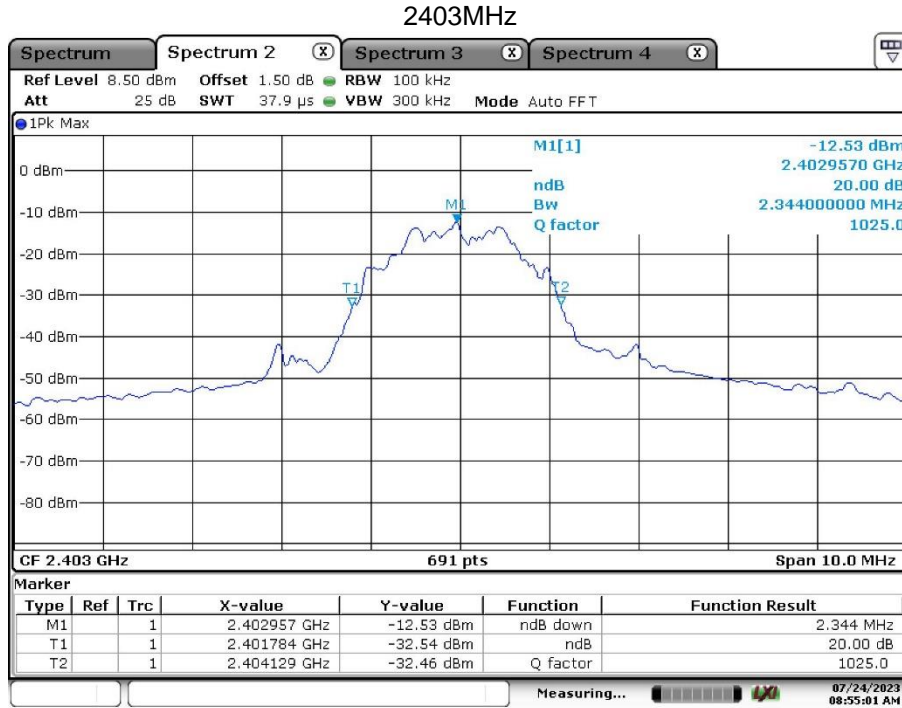


Date: 24.JUL.2023 08:55:01

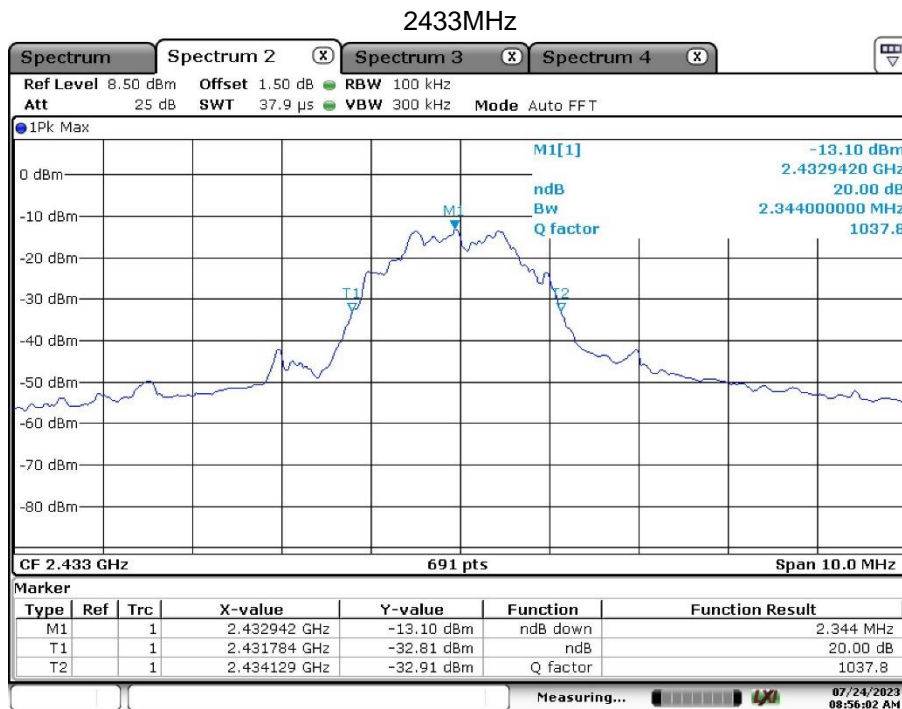



Date: 24.JUL.2023 08:56:02

2473MHz

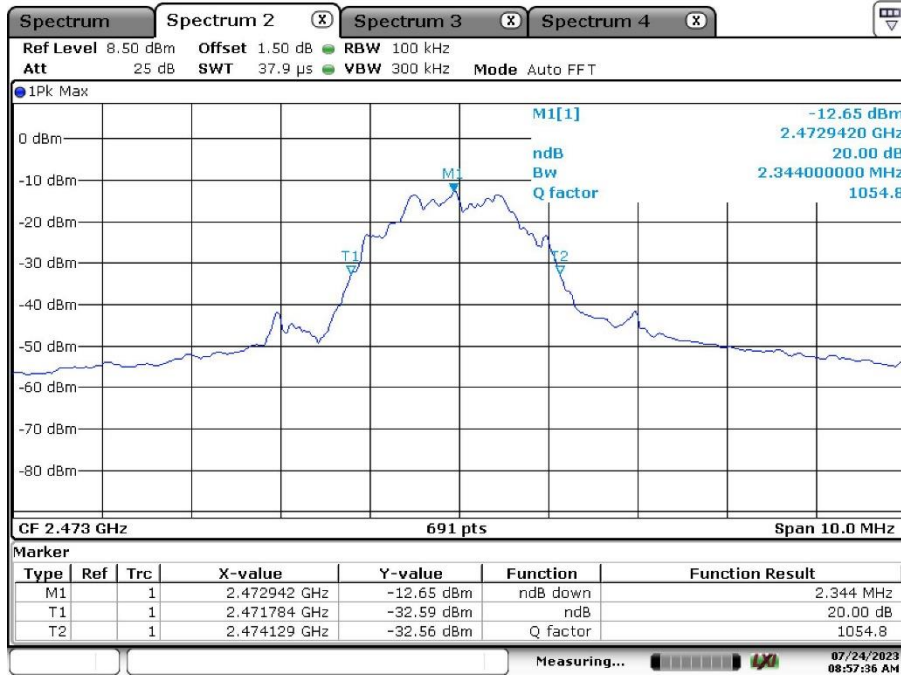


Date: 24.JUL.2023 08:57:36

Appendix A.3: Test Results of 99% Bandwidth

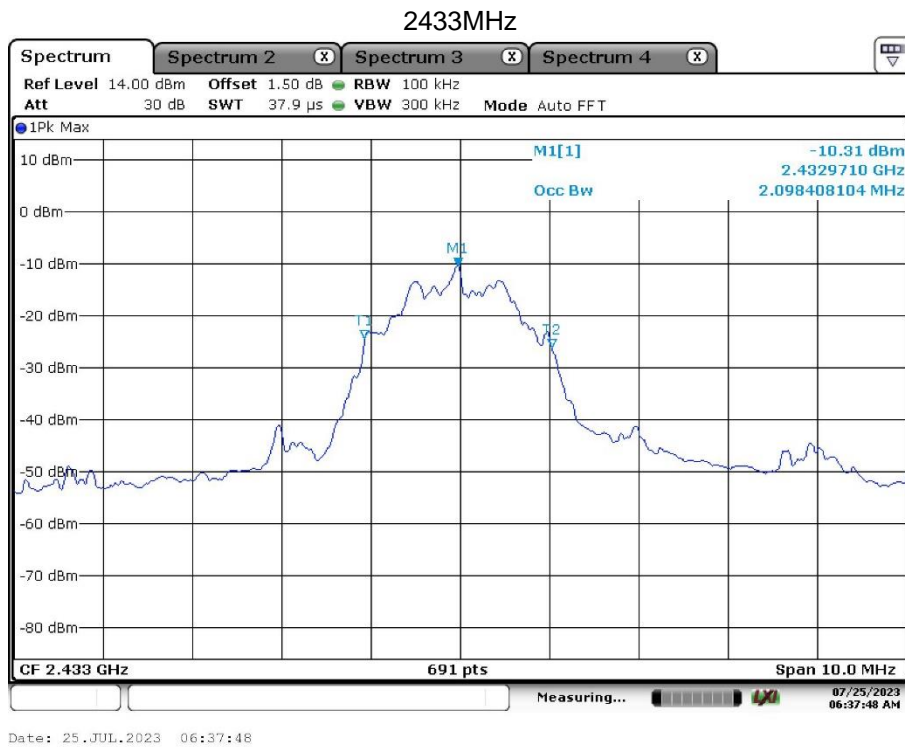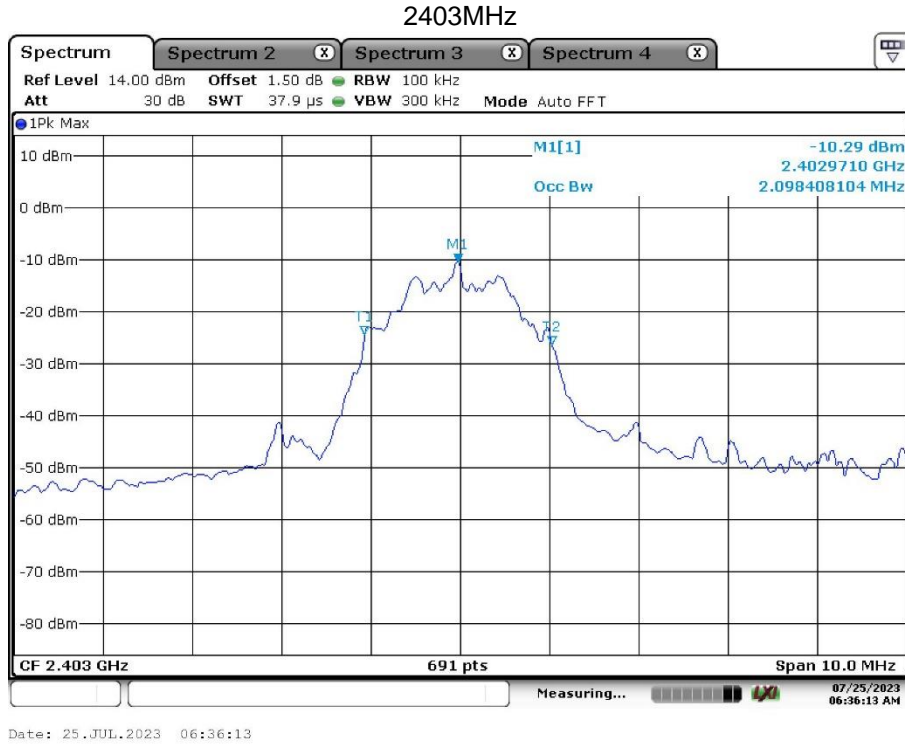

2473MHz

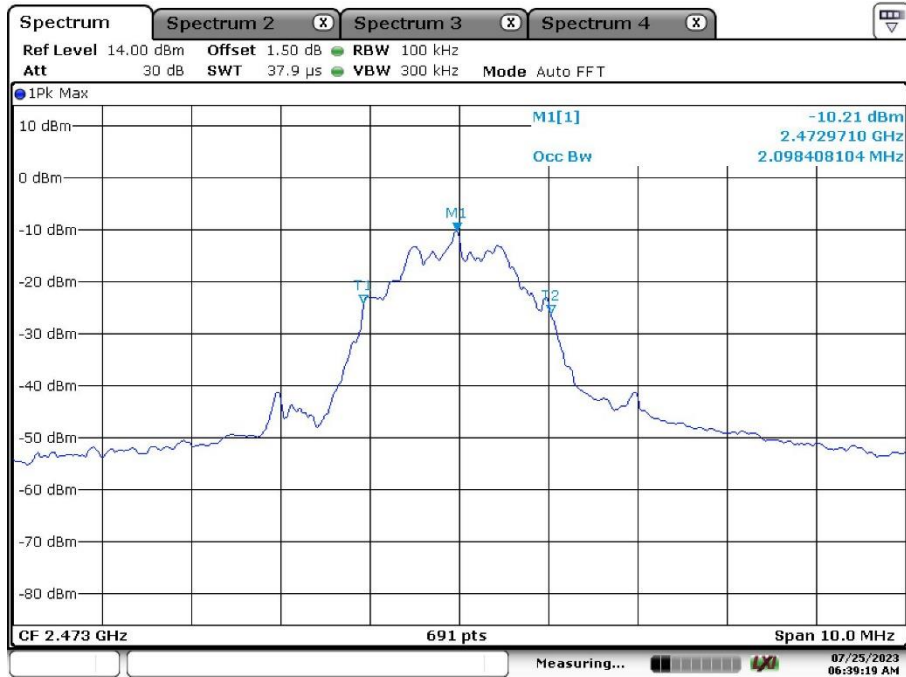


Date: 25.JUL.2023 06:39:19

Appendix A.4: Test Results of Band Edge

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz L CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

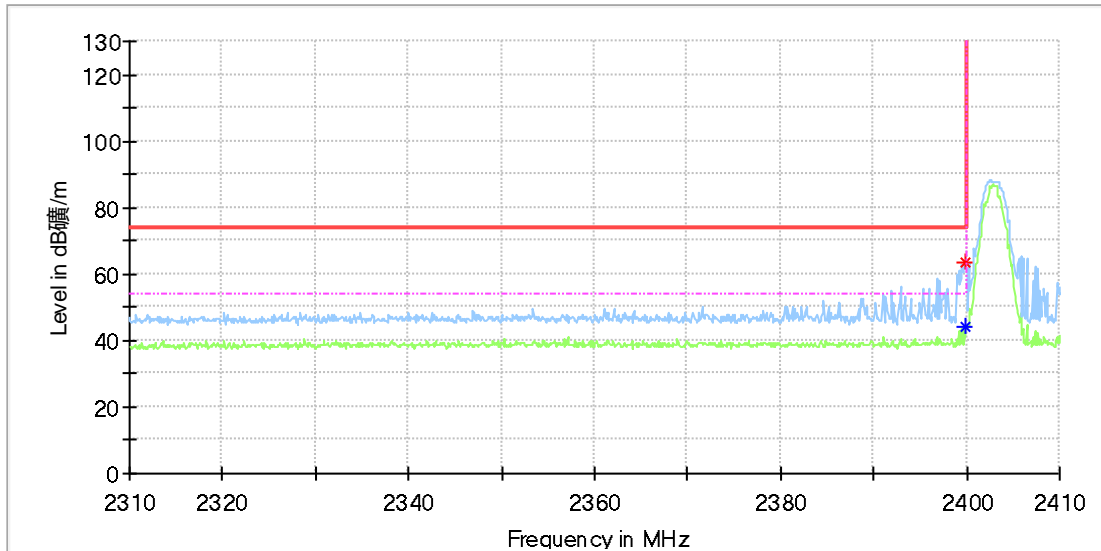

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2399.800000	63.78	---	74.00	10.22	100.0	H	323.0	7.0
2399.900000	---	44.30	54.00	9.70	100.0	H	203.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Wireless Receiver
 Model: RG30
 Test Mode: 2.4GHz L CH
 Order No/Sample No: 168433502/A003510367-004
 Test Voltage: DC 5V
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.249
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

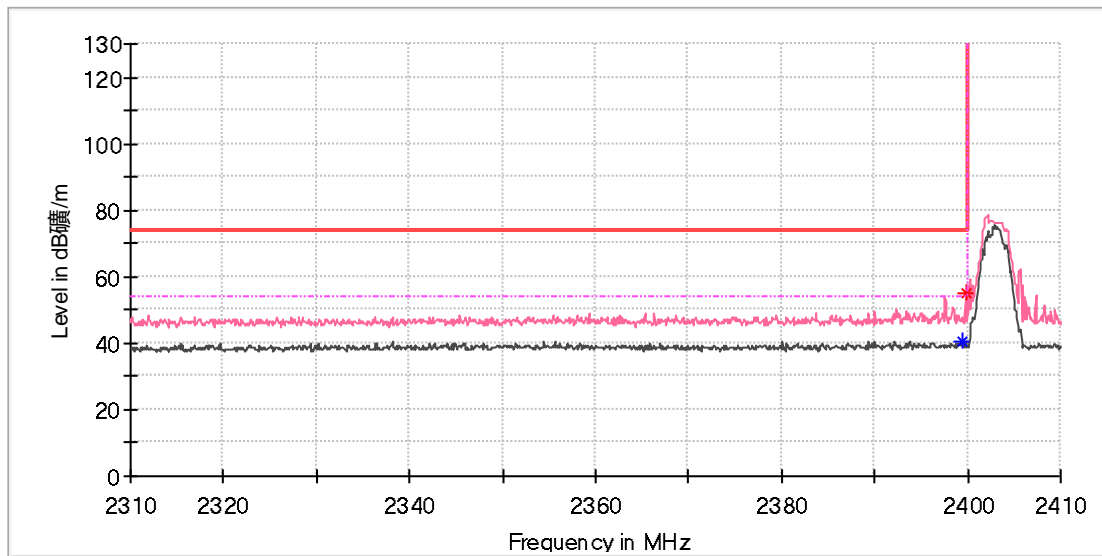

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2399.400000	---	40.76	54.00	13.24	100.0	V	307.0	7.0
2399.800000	54.79	---	74.00	19.21	100.0	V	79.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz H CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

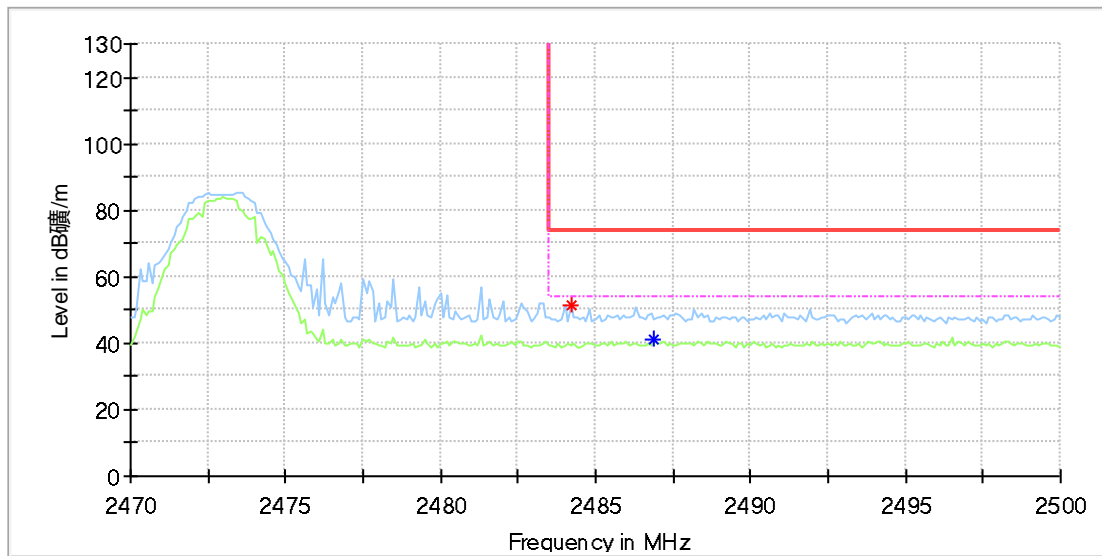

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.200000	51.61	---	74.00	22.39	100.0	H	11.0	7.4
2486.900000	---	41.34	54.00	12.66	100.0	H	28.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Wireless Receiver
Model:	RG30
Test Mode:	2.4GHz H CH
Order No/Sample No:	168433502/A003510367-004
Test Voltage:	DC 5V
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

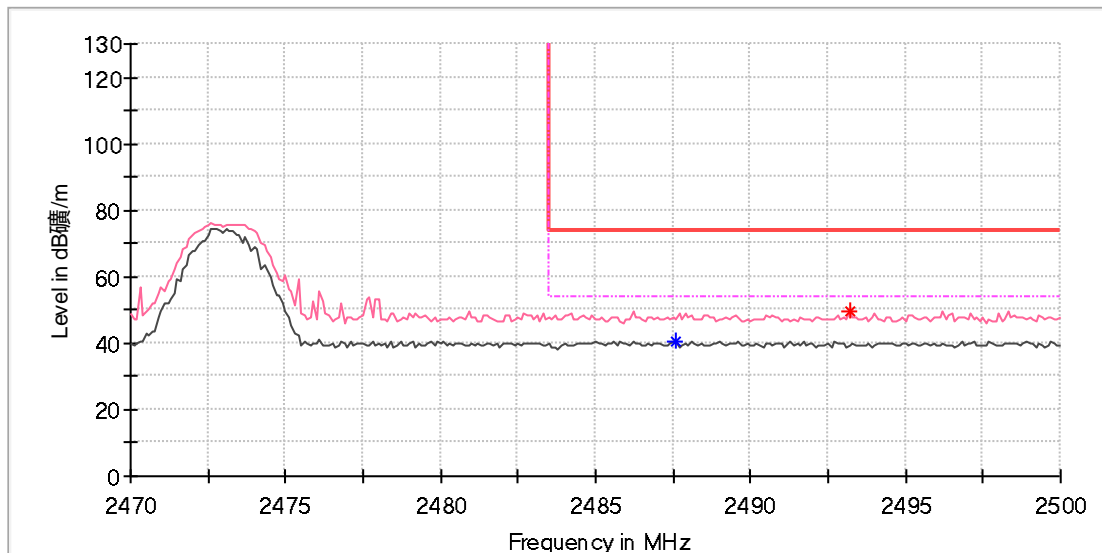

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.600000	---	40.46	54.00	13.54	100.0	V	177.0	7.4
2493.200000	49.58	---	74.00	24.42	100.0	V	204.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.5: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Wireless Receiver
Order Number:	168433502
Model:	RG30
Test Mode:	On
Test Voltage:	AC 120V, 60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Eric Guo / Gary Chen
Tem./Hum./Pressure:	24.6°C/50.6%/101kPa
Remark:	SR2

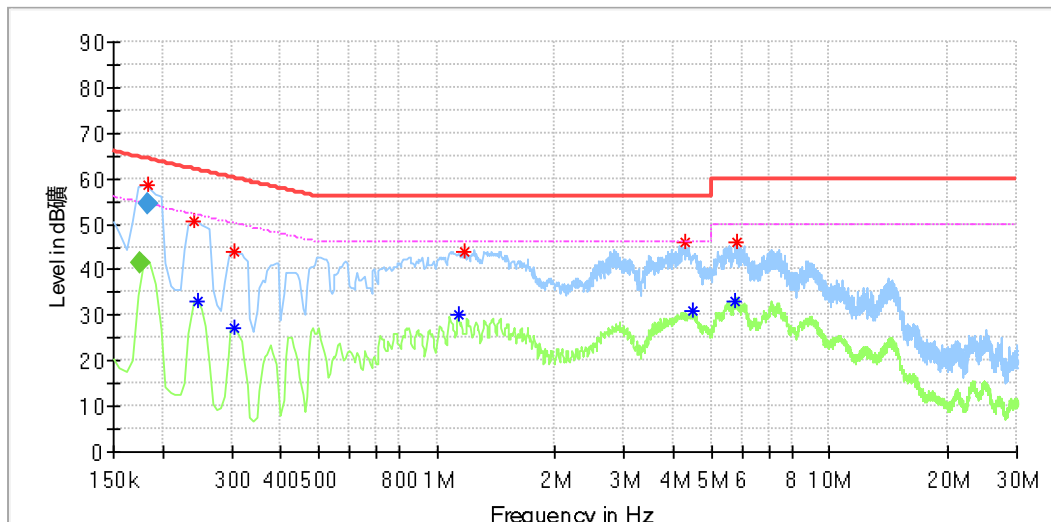

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.175350	---	42.07	54.49	12.42	L1	9.9
0.184350	58.43	---	64.49	6.06	L1	9.9
0.239550	50.85	---	62.11	11.27	L1	9.9
0.245520	---	33.23	51.91	18.68	L1	9.9
0.305220	---	27.26	50.10	22.84	L1	9.9
0.305220	43.74	---	60.10	16.36	L1	9.9
1.135050	---	30.24	46.00	15.76	L1	10.1
1.176840	43.83	---	56.00	12.17	L1	10.1
4.281240	45.91	---	56.00	10.09	L1	10.2
4.478250	---	30.88	46.00	15.12	L1	10.2
5.737920	---	33.14	50.00	16.86	L1	10.3
5.791650	46.01	---	60.00	13.99	L1	10.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.175350	---	41.53	54.70	13.18	1000.0	9.000	L1	9.9
0.184350	54.21	---	64.29	10.08	1000.0	9.000	L1	9.9

EUT Information

EUT Name: Wireless Receiver
 Order Number: 168433502
 Model: RG30
 Test Mode: On
 Test Voltage: AC 120V, 60Hz
 Test Standard: FCC Part 15
 Test By:/Review By: Eric Guo / Gary Chen
 Tem./Hum./Pressure: 24.6°C/50.6%/101kPa
 Remark: SR2

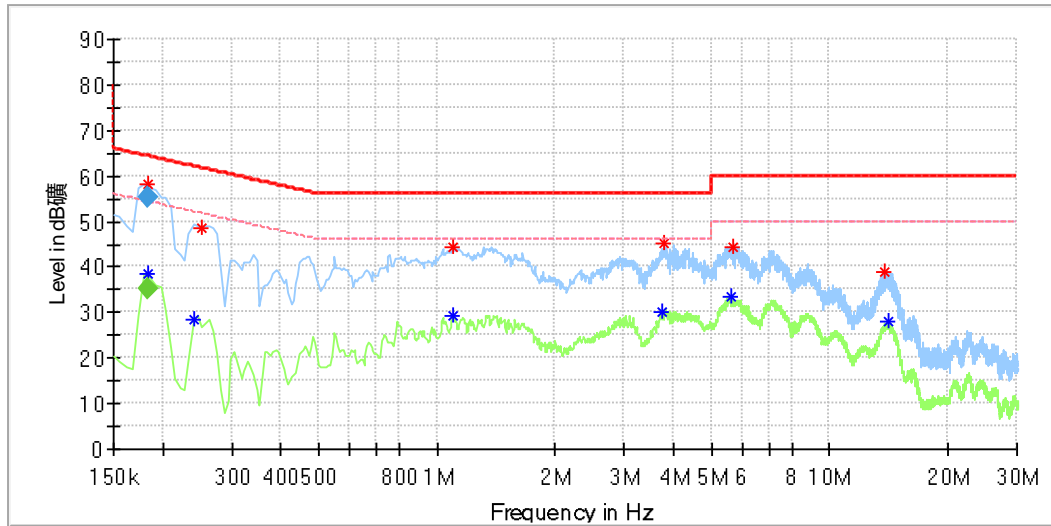

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.183350	58.00	---	64.49	6.49	N	9.8
0.184350	---	38.38	54.49	16.11	N	9.8
0.239550	---	28.63	52.11	23.48	N	9.8
0.251490	48.51	---	61.71	13.20	N	9.8
1.093260	---	29.19	46.00	16.81	N	9.8
1.099230	44.42	---	56.00	11.58	N	9.8
3.755880	---	30.29	46.00	15.71	N	9.9
3.779760	45.15	---	56.00	10.85	N	9.9
5.588670	---	33.58	50.00	16.42	N	9.9
5.702100	44.17	---	60.00	15.83	N	9.9
13.791450	38.88	---	60.00	21.12	N	10.1
14.179500	---	27.88	50.00	22.12	N	10.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.183350	55.29	---	64.33	9.04	1000.0	9.000	N	9.8
0.184350	---	35.32	54.29	18.97	1000.0	9.000	N	9.8