

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Lenovo Smart Bulb

MODEL No.:Lenovo SL-2501F

FCC ID: A5MSL2501F

Trade Mark: Lenovo

REPORT NO:ES180410002W01

ISSUE DATE:April 27, 2018

Prepared for

Lenovo (Beijing) Limited
No.6 Chuang Ye Road, Shangdi Information Industry Base, Haidian
District, Beijing, China

Prepared by

EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES.....	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
7.5	SUPPORT EQUIPMENT.....	12
8	TEST REQUIREMENTS	13
8.1	DTS(6DB)BANDWIDTH.....	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	19
8.3	MAXIMUM POWER SPECTRAL DENSITY	20
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	26
8.5	RADIATED SPURIOUS EMISSION	39
8.6	CONDUCTED EMISSIONS TEST	74
8.7	ANTENNA APPLICATION.....	77

1 TEST RESULT CERTIFICATION

Applicant: Lenovo (Beijing) Limited
No.6 Chuang Ye Road, Shangdi Information Industry Base, Haidian District, Beijing, China

Manufacturer: Lenovo (Beijing) Limited
No.6 Chuang Ye Road, Shangdi Information Industry Base, Haidian District, Beijing, China

EUT Description: Lenovo Smart Bulb

Model Number: Lenovo SL-2501F

Trade Mark: Lenovo

File Number: ES180410002W01

Date of Test: April 03, 2018 to April 27, 2018

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2017, Subpart J	PASS
FCC 47 CFR Part 15 2017, Subpart C	

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : April 03, 2018 to April 27, 2018

Prepared by : Yaping Shen
YapingShen /Tester

Reviewer : Joe Xia
Joe Xia/ Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth)
Data Rate	<input checked="" type="checkbox"/> 802.11 b:1,2,5.5,11Mbps; <input checked="" type="checkbox"/> 802.11 g:6,9,12,18,24,36,48,54Mbps; <input checked="" type="checkbox"/> 802.11n(HT20):MCS0-MCS7;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g; <input checked="" type="checkbox"/> 2412-2462MHz for 802.11n(HT20);
Number of Channels	<input checked="" type="checkbox"/> 11 channels for 802.11b/g; <input checked="" type="checkbox"/> 11 channels for 802.11n(HT20);
Transmit Power Max	17.22dBm for 802.11b; 21.32dBm for 802.11g; 20.31dBm for 802.11n(HT20);
Antenna Type	PCB antenna
Gain	3dBi
Power supply	AC 120V 60Hz
Temperature Range	0°C ~ +40°C

3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted EmissionTest	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2:According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: A5MSL2501Ffiling to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
 FCC KDB 558074 D01 DTS Meas Guidance v04

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50ΩCoaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2017	May 20, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b:1 Mbps;802.11g: 6 Mbps;802.11n(HT20)) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L229

 - : Accredited by TUV Rheinland Shenzhen, 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

 - : Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943

 - : Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

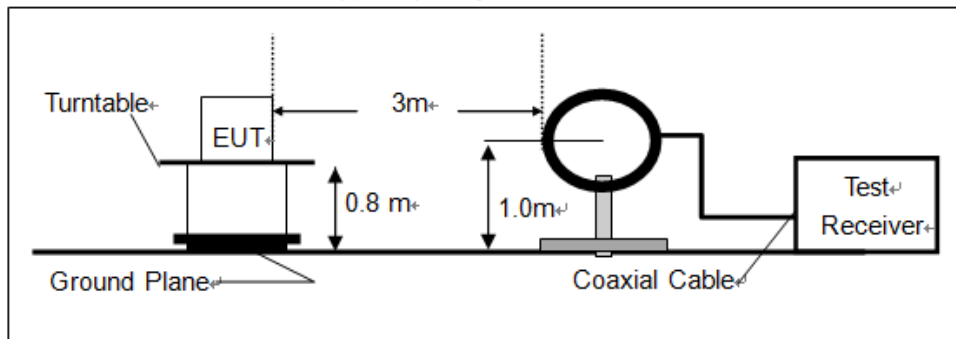

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

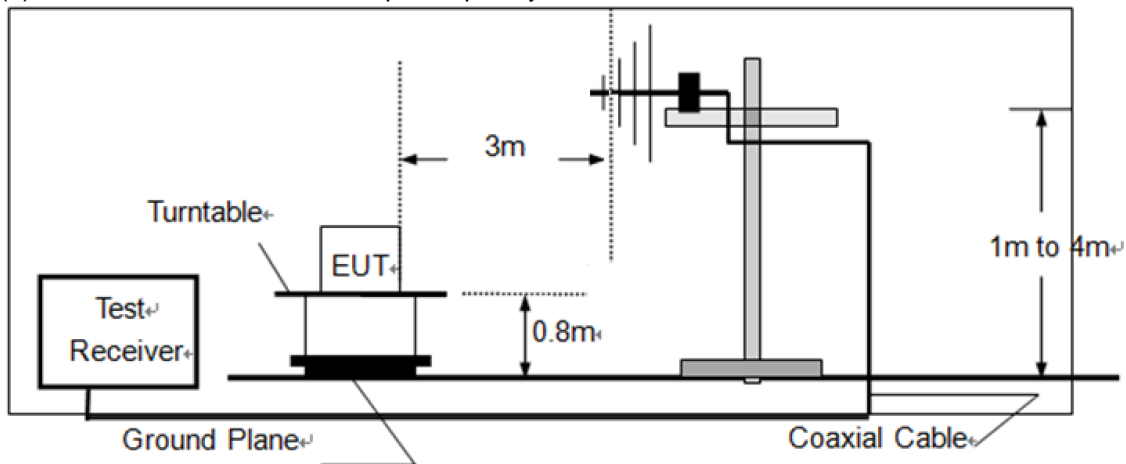

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

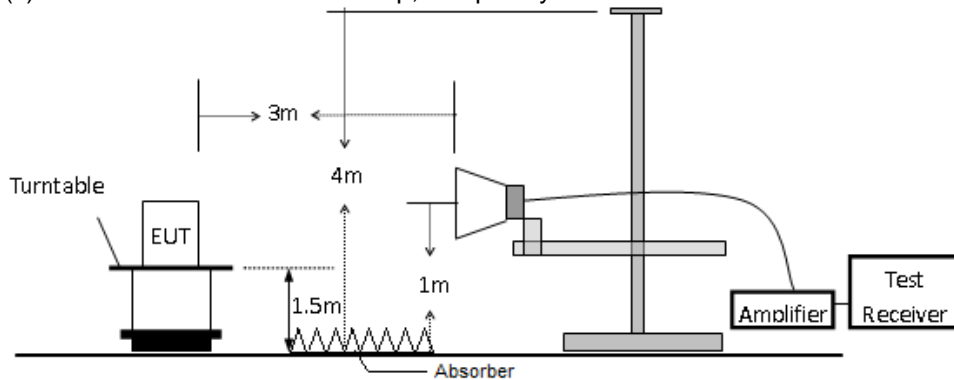


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

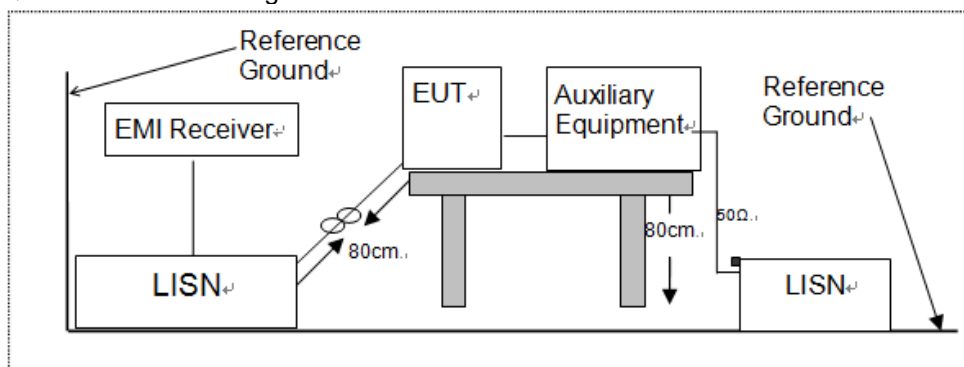

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

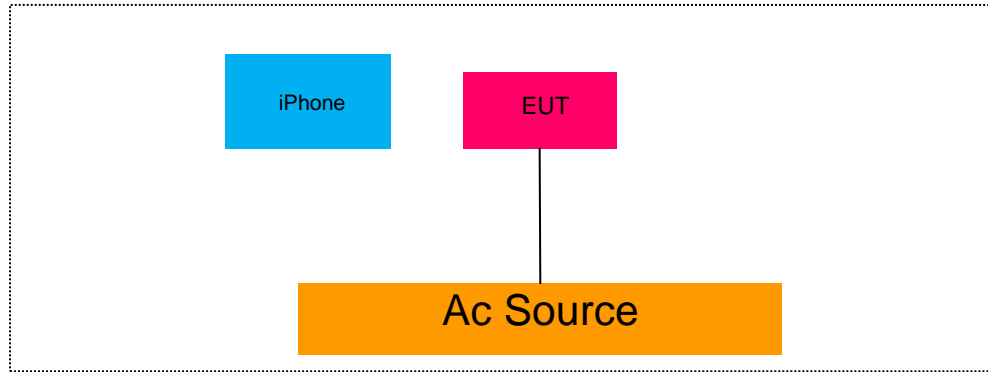

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
N/A	iPhone	Apple	A1526	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

8.1.5 Test Results


Temperature : 26°C Test Date : April 04, 2018
 Humidity : 60 % Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	9.126	>=500	PASS
	6	2437	9.093	>=500	PASS
	11	2462	9.098	>=500	PASS
802.11g	1	2412	15.91	>=500	PASS
	6	2437	15.92	>=500	PASS
	11	2462	16.31	>=500	PASS
802.11n (HT20)	1	2412	16.27	>=500	PASS
	6	2437	16.04	>=500	PASS
	11	2462	16.28	>=500	PASS


Test Model DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

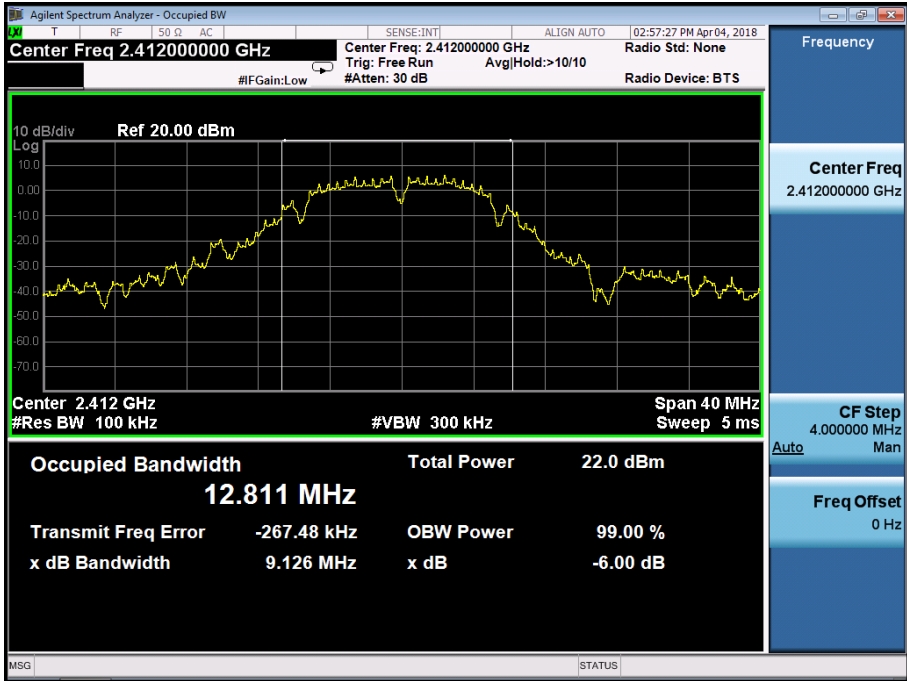


Test Model DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz

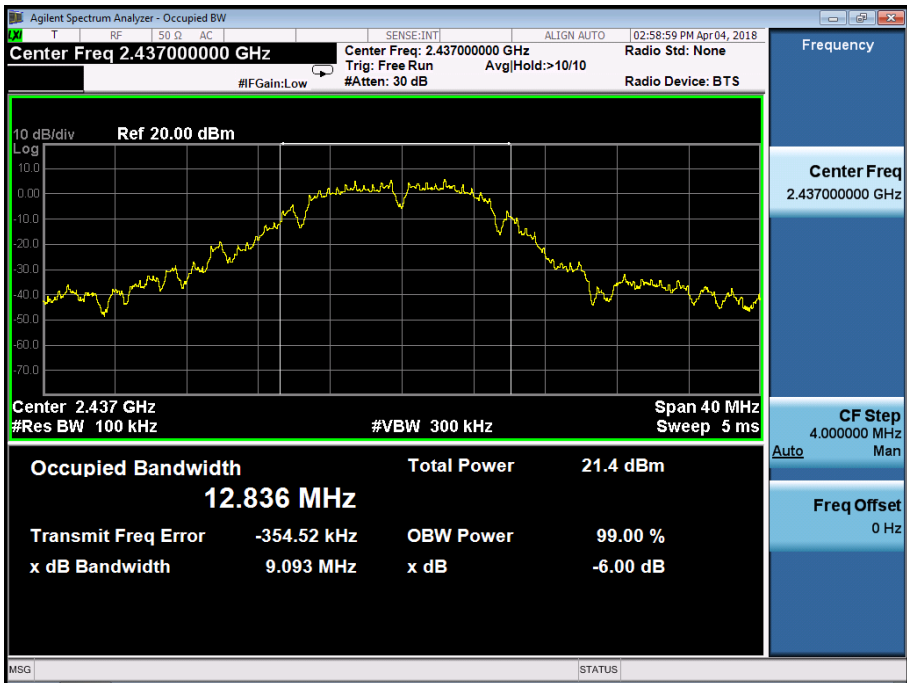


Test Model DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

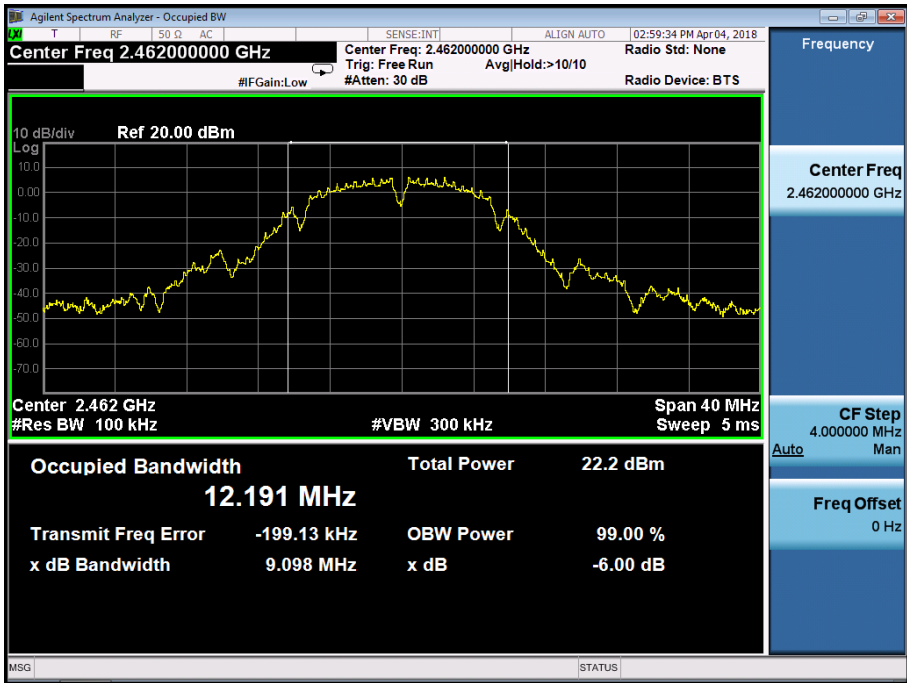


Test Model DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

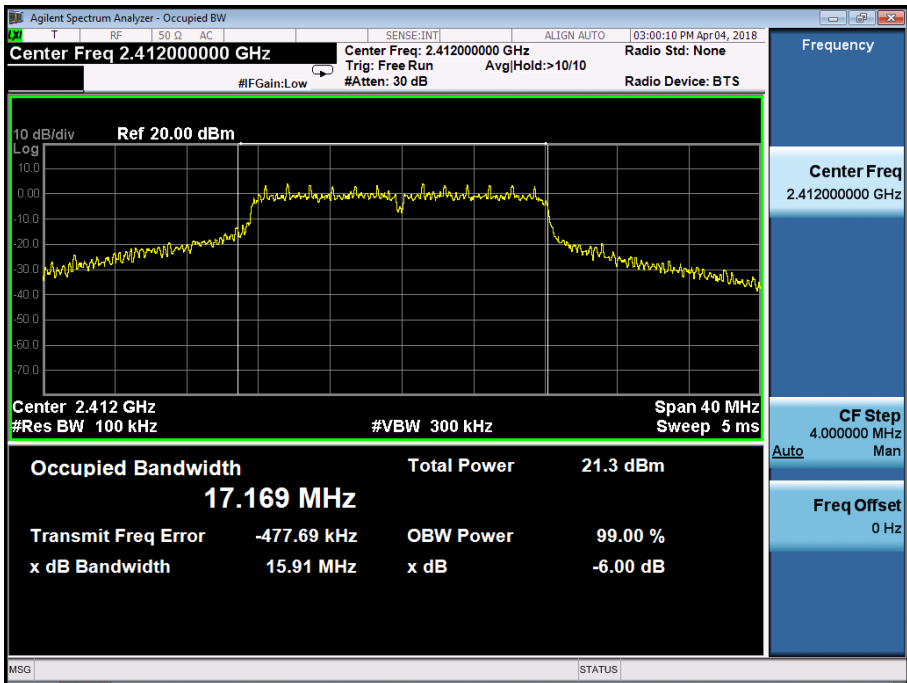


Test Model DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

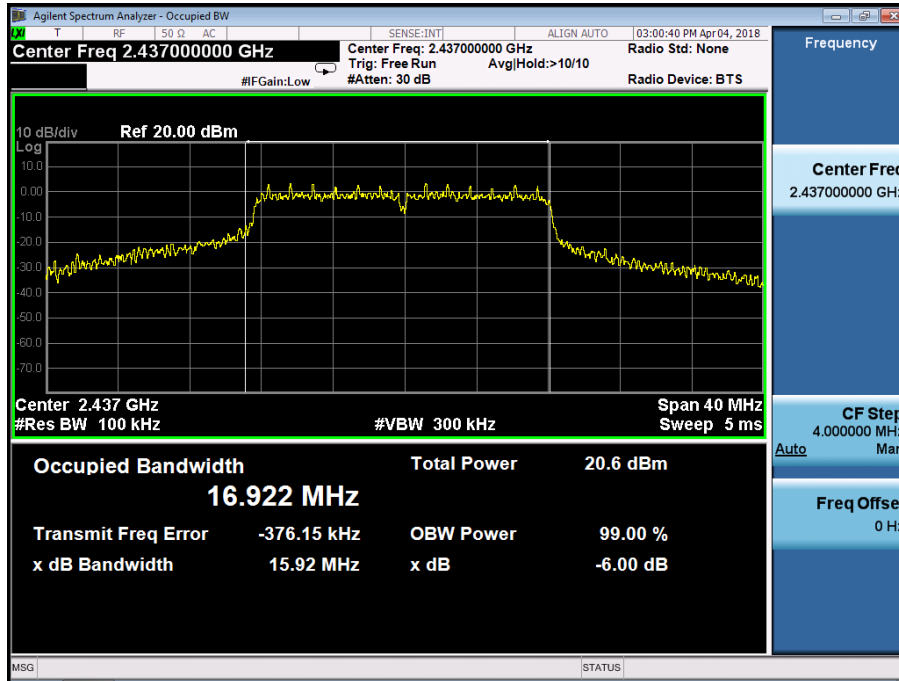


Test Model DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

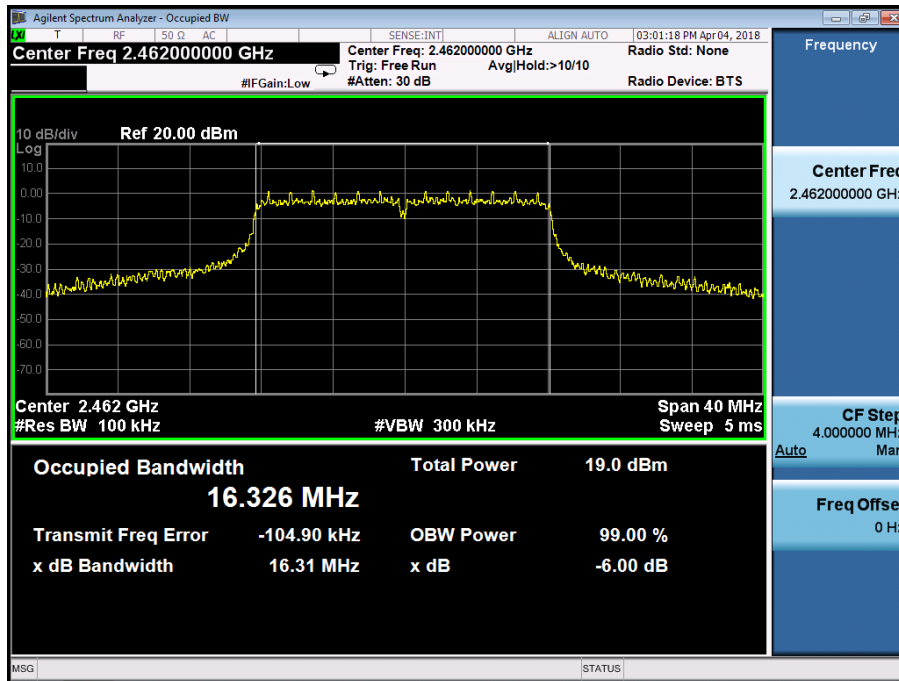


Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

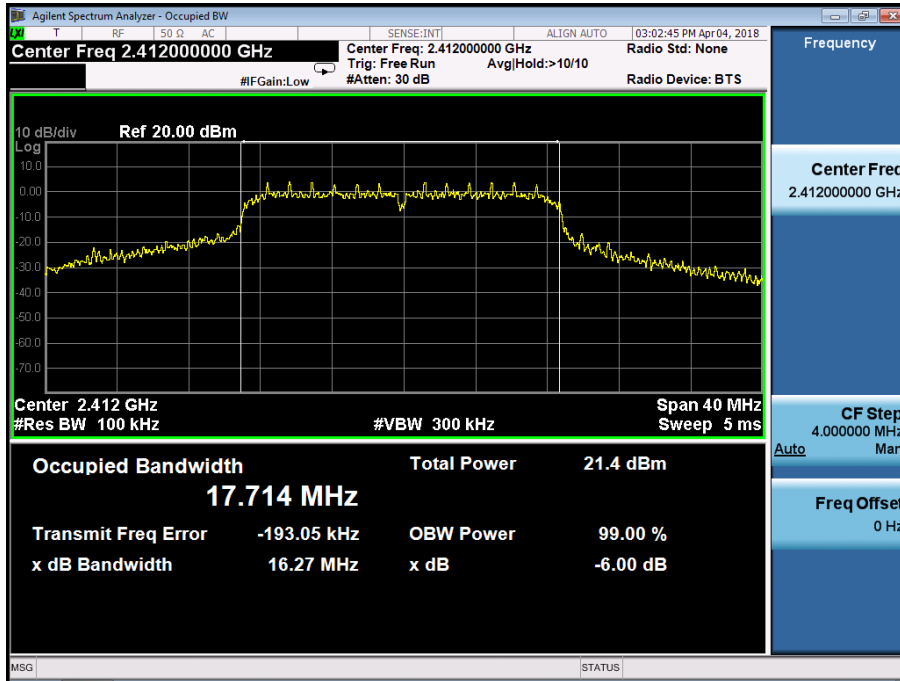

Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

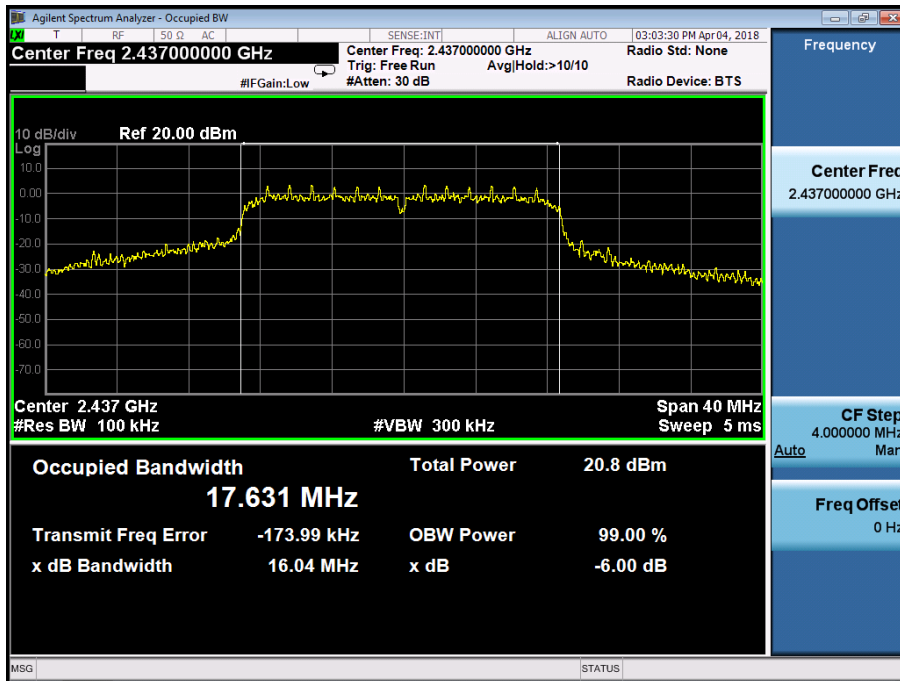

Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

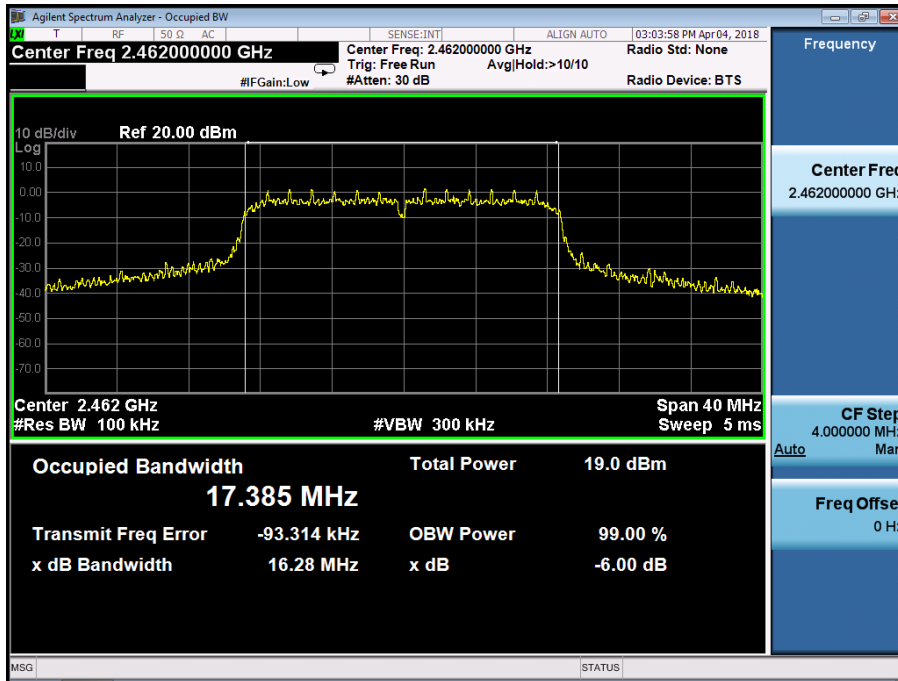

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247(b)(3) and KDB558074 DTS 01 Meas. Guidance v04

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

8.2.5 Test Results

Temperature :	26°C	Test Date :	April 04, 2018
Humidity :	60 %	Test By:	King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	16.50	30	PASS
	6	2437	16.19	30	PASS
	11	2462	17.22	30	PASS
802.11g	1	2412	21.32	30	PASS
	6	2437	20.76	30	PASS
	11	2462	18.99	30	PASS
802.11n (ht20)	1	2412	20.16	30	PASS
	6	2437	20.31	30	PASS
	11	2462	18.64	30	PASS
Note:					

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB558074 DTS 01 Meas. Guidance v04

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.3.5 Test Results

Temperature : 26°C Test Date : April 04, 2018
 Humidity : 60 % Test By: King Kong


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-7.813	8	PASS
	6	2437	-9.680	8	PASS
	11	2462	-8.679	8	PASS
802.11g	1	2412	-11.174	8	PASS
	6	2437	-11.112	8	PASS
	11	2462	-12.615	8	PASS
802.11n (HT20)	1	2412	-10.414	8	PASS
	6	2437	-10.654	8	PASS
	11	2462	-12.566	8	PASS

Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.

Test Model Power Spectral Density
802.11b
Channel 1: 2412MHz




Test Model Power Spectral Density
802.11b
Channel 6: 2437MHz

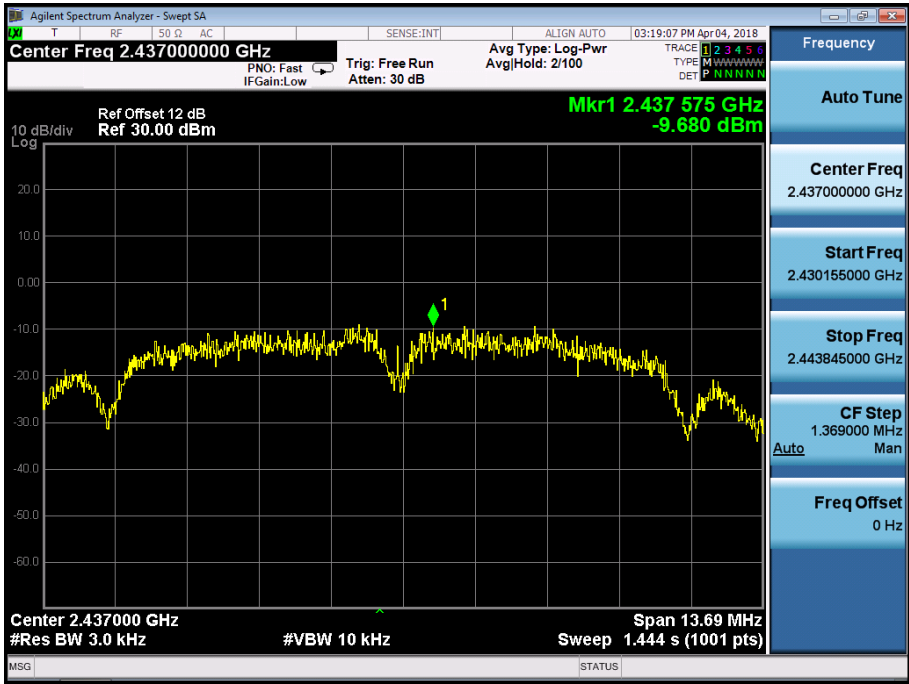


Test Model Power Spectral Density
802.11b
Channel 11: 2462MHz




Test Model Power Spectral Density
802.11g
Channel 1: 2412MHz

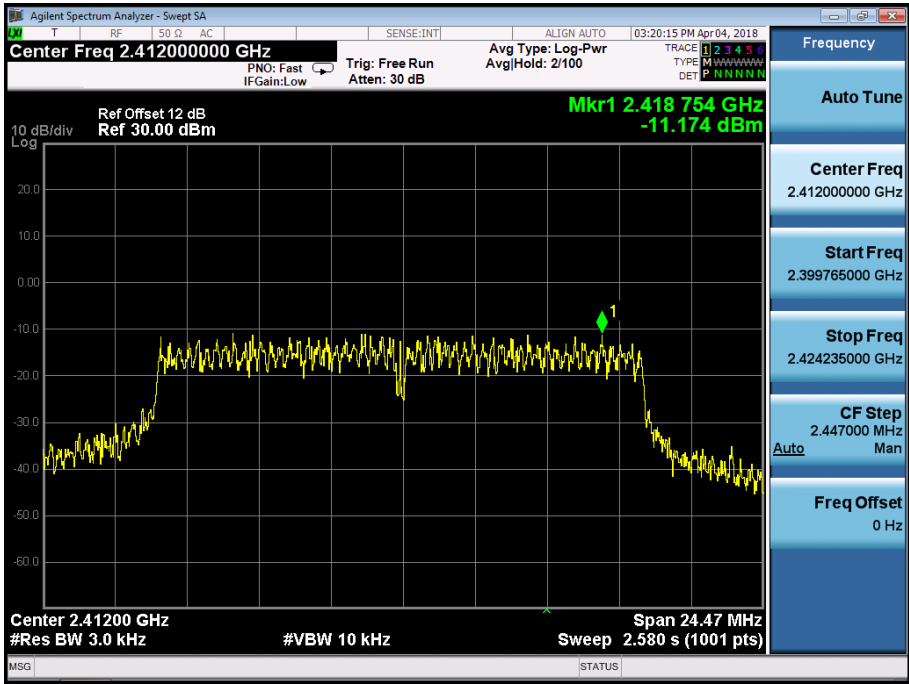


Test Model Power Spectral Density
802.11g
Channel 6: 2437MHz

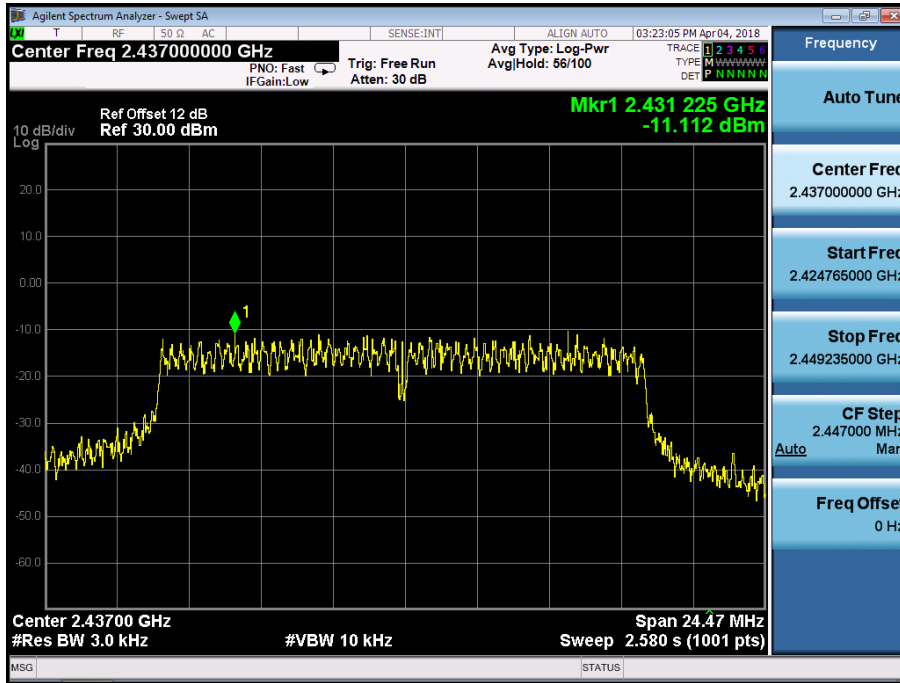


Test Model Power Spectral Density
802.11g
Channel 11: 2462MHz

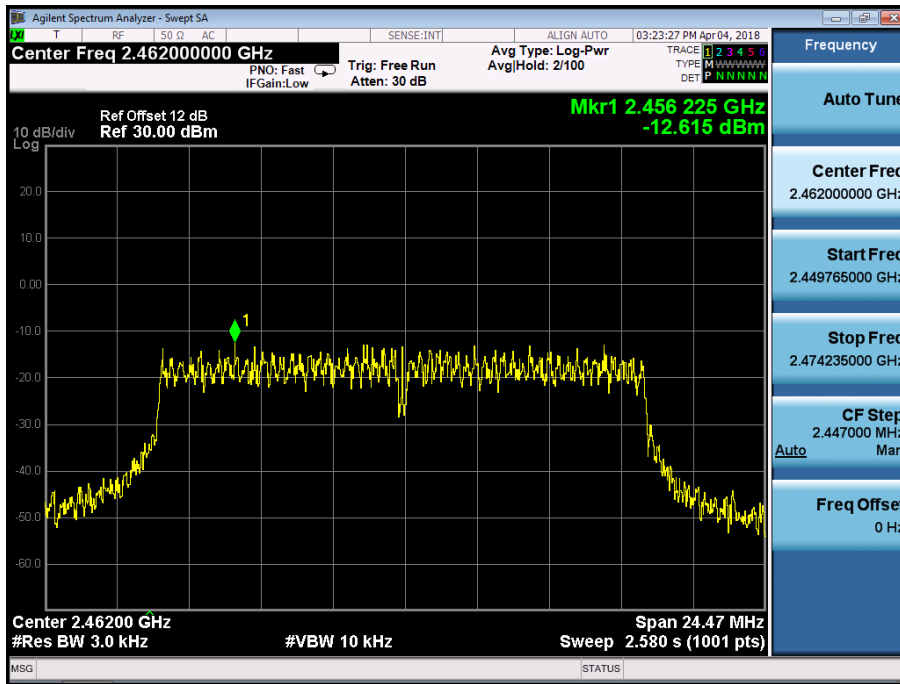


Test Model Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

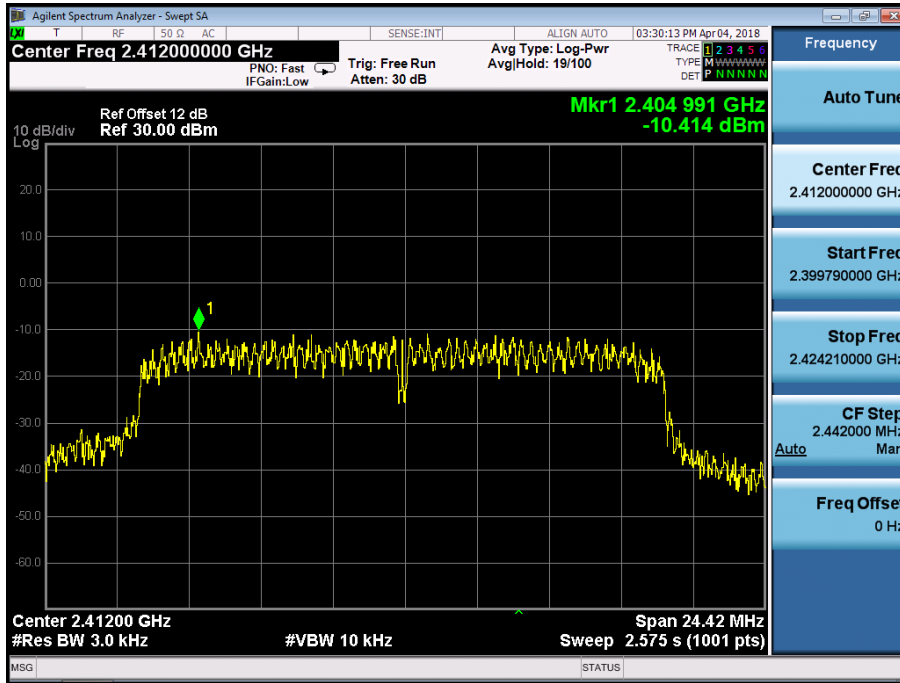

Test Model Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

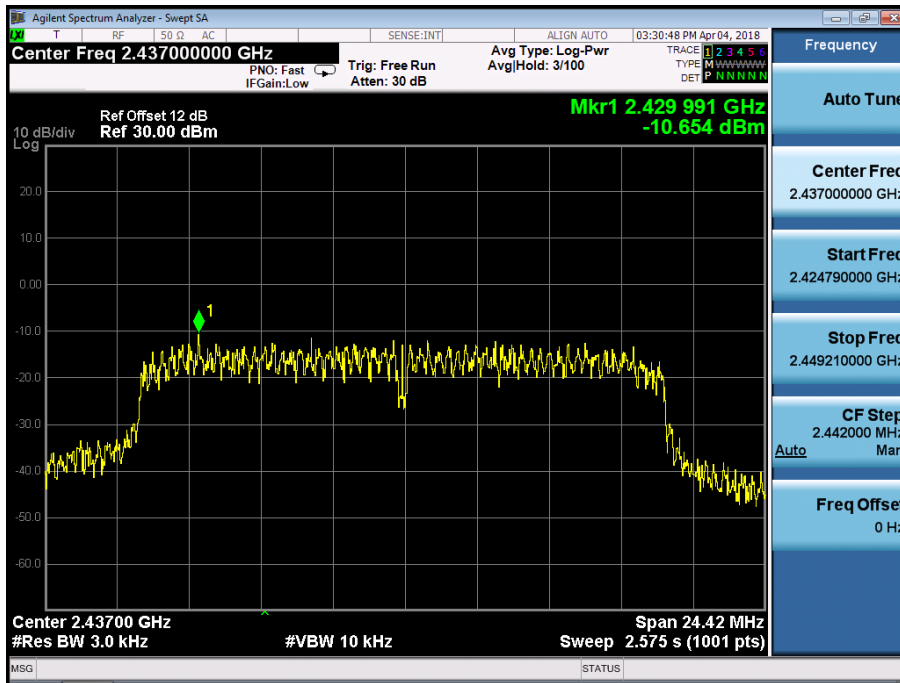

Test Model Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

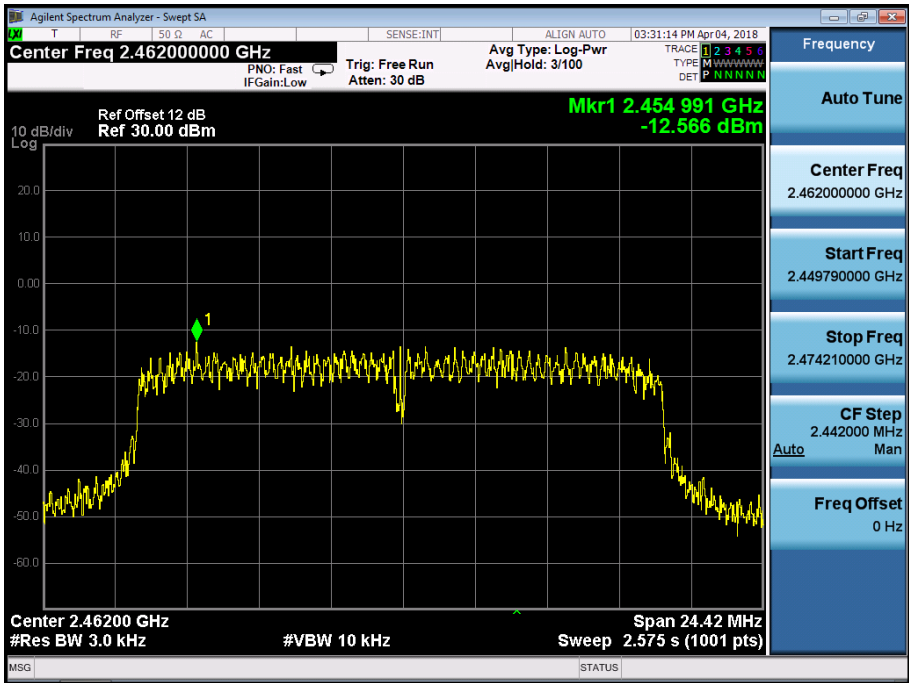

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB558074 DTS 01 Meas. Guidance v04

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.


Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz

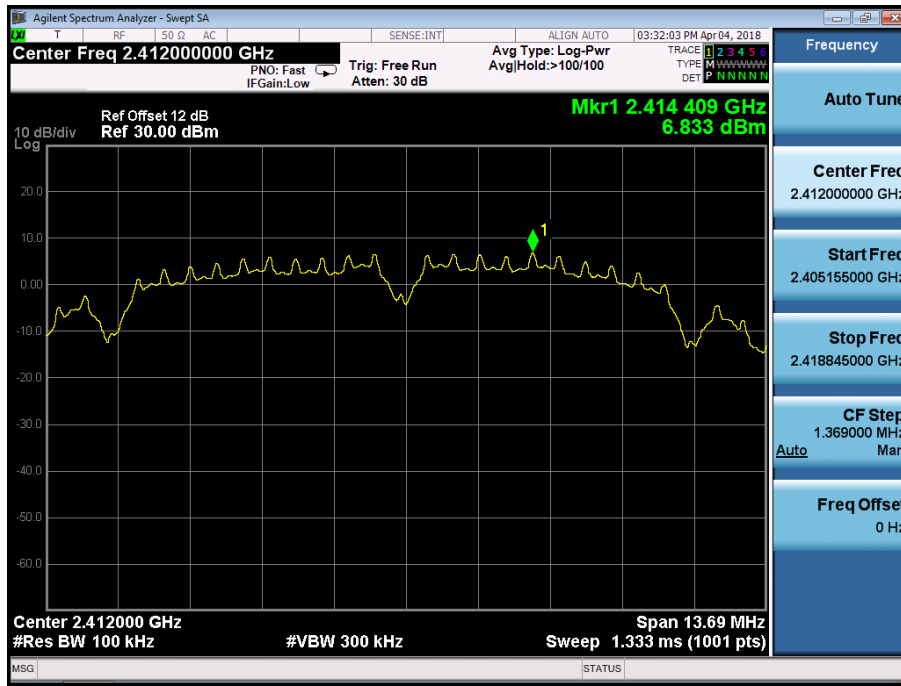

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz

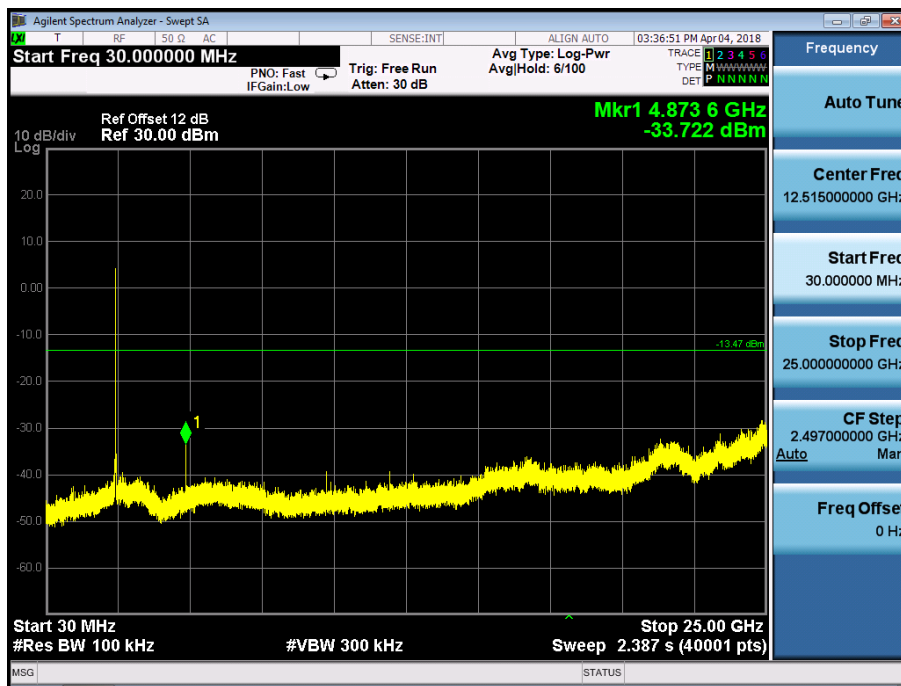


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz

Band edge



Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 6: 2437MHz

PSD(Power Spectral Density) RBW=100kHz

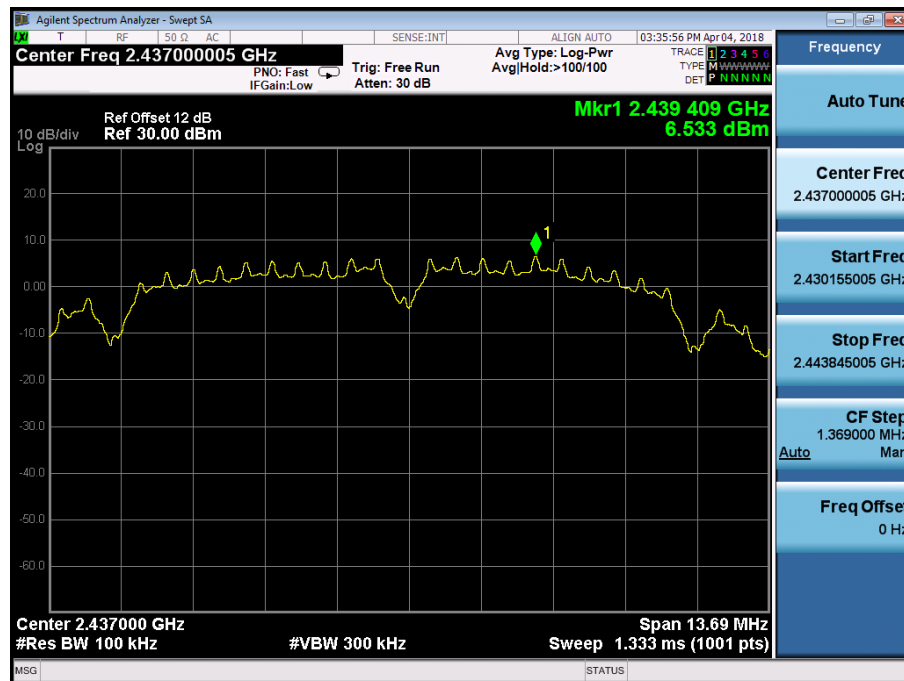

Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 6: 2437MHz



PSD(Power Spectral Density) RBW=100kHz


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 11: 2462MHz Channel 9: 2452MHz



Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

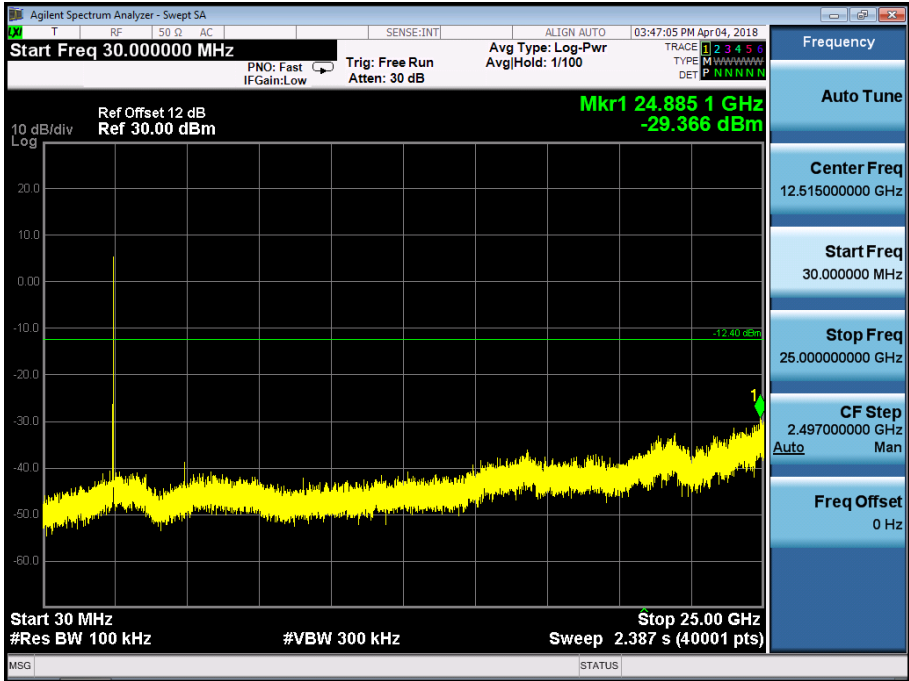

Band edge


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz



PSD(Power Spectral Density) RBW=100kHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 1: 2412MHz Channel 3: 2422MHz

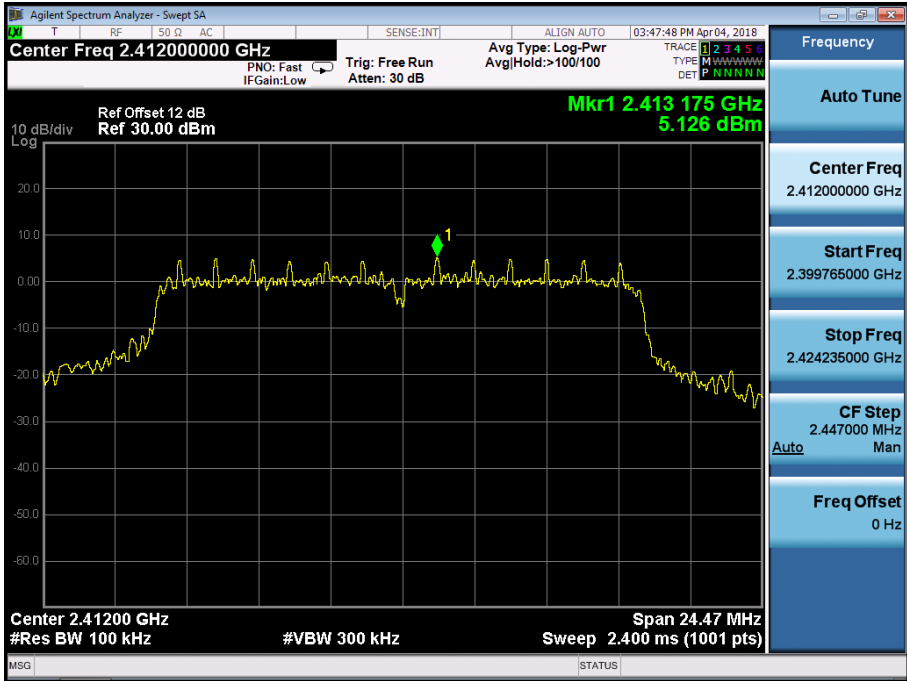

Unwanted Emissions in non-restricted frequency bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 1: 2412MHz Channel 3: 2422MHz

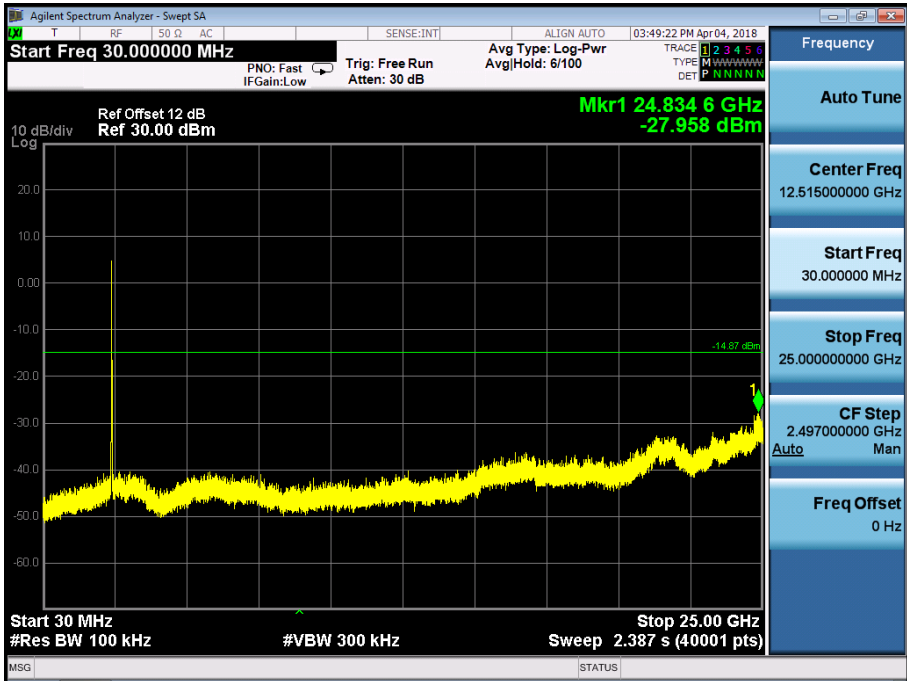

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Band edge


Channel 1: 2412MHz Channel 3: 2422MHz

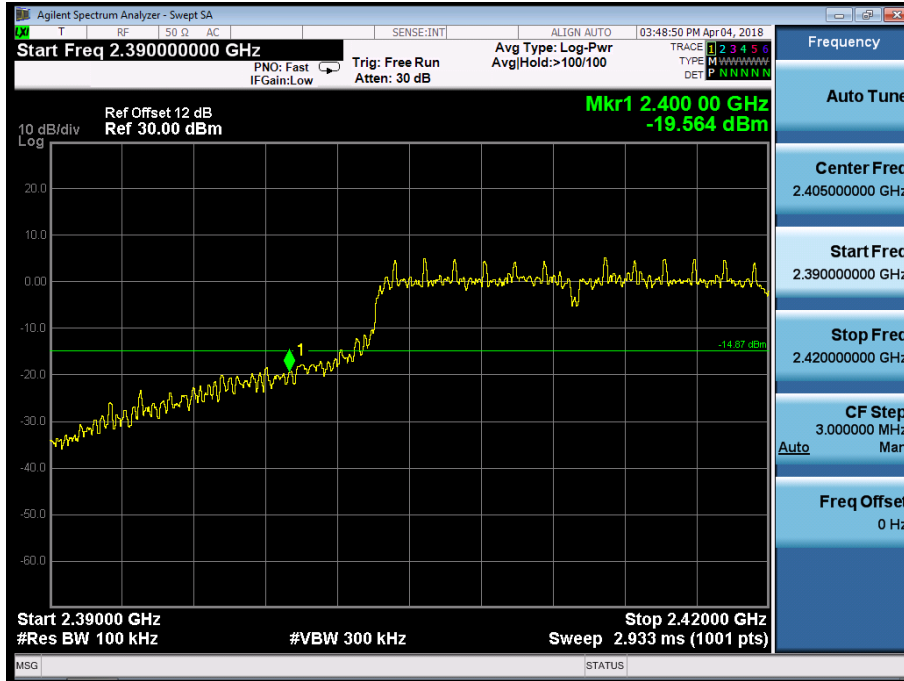

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

PSD(Power Spectral Density) RBW=100kHz


Channel 6: 2437MHz

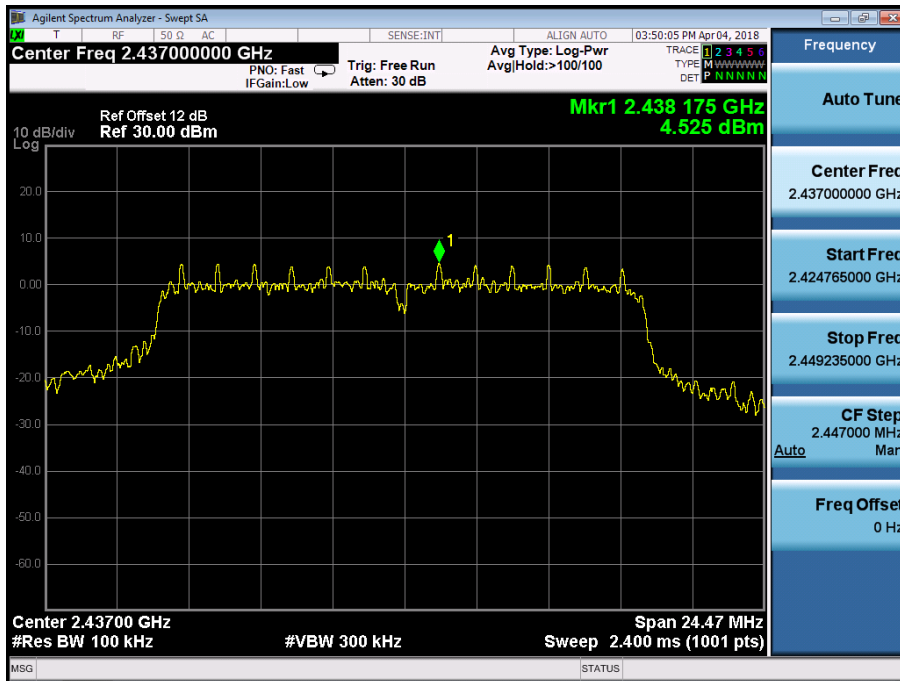

Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 6: 2437MHz

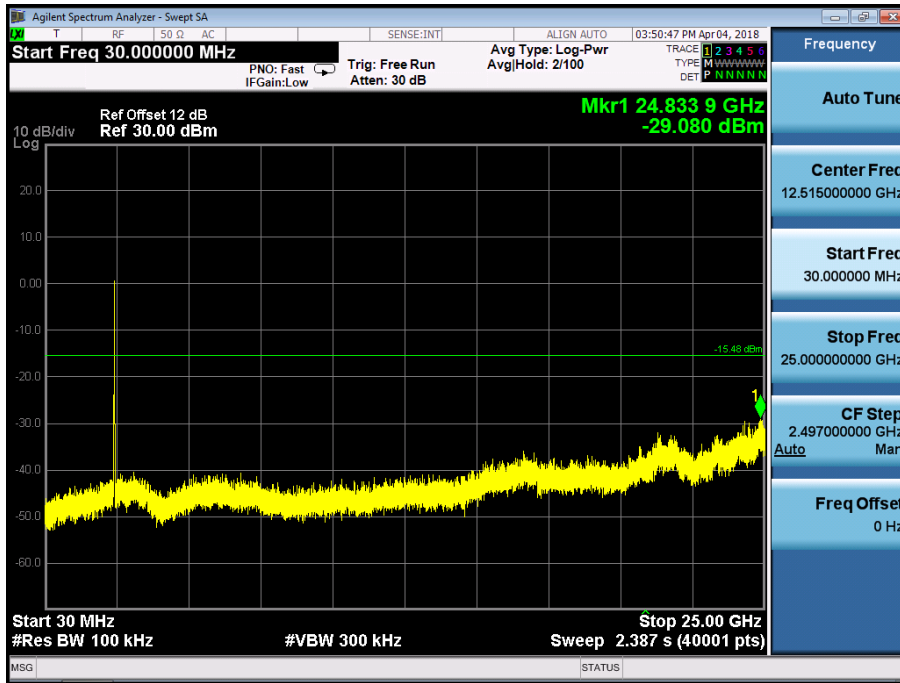

PSD(Power Spectral Density) RBW=100kHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 11: 2462MHz Channel 9: 2452MHz

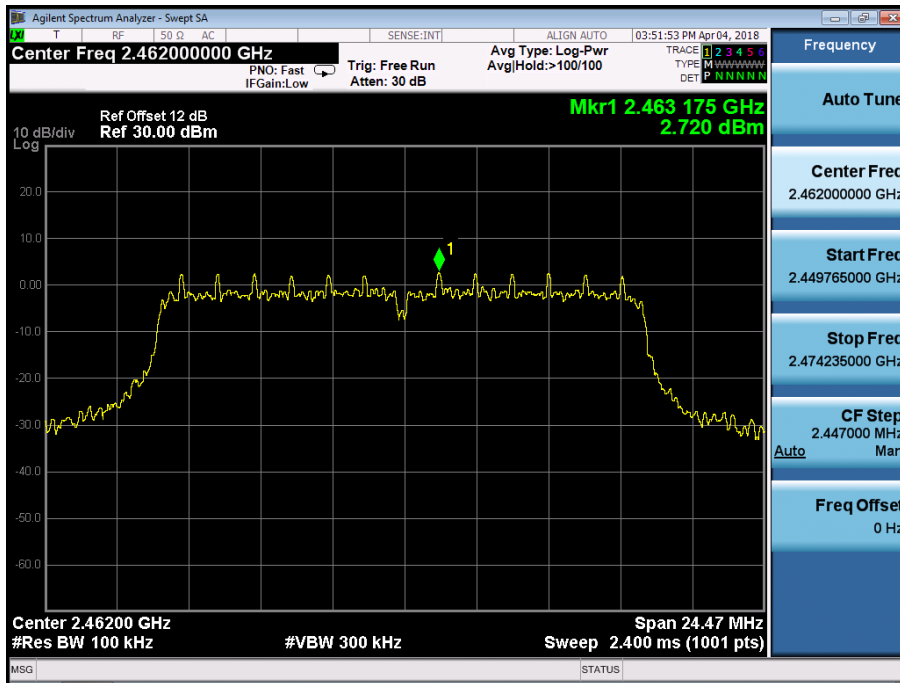


Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz



Band edge


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

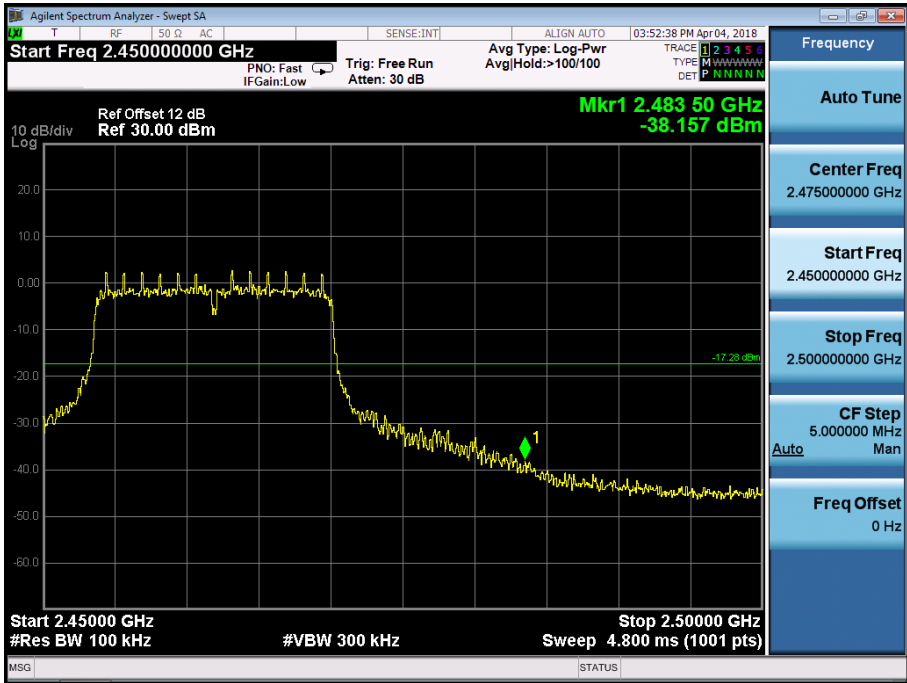

PSD(Power Spectral Density) RBW=100kHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 1: 2412MHz Channel 3: 2422MHz

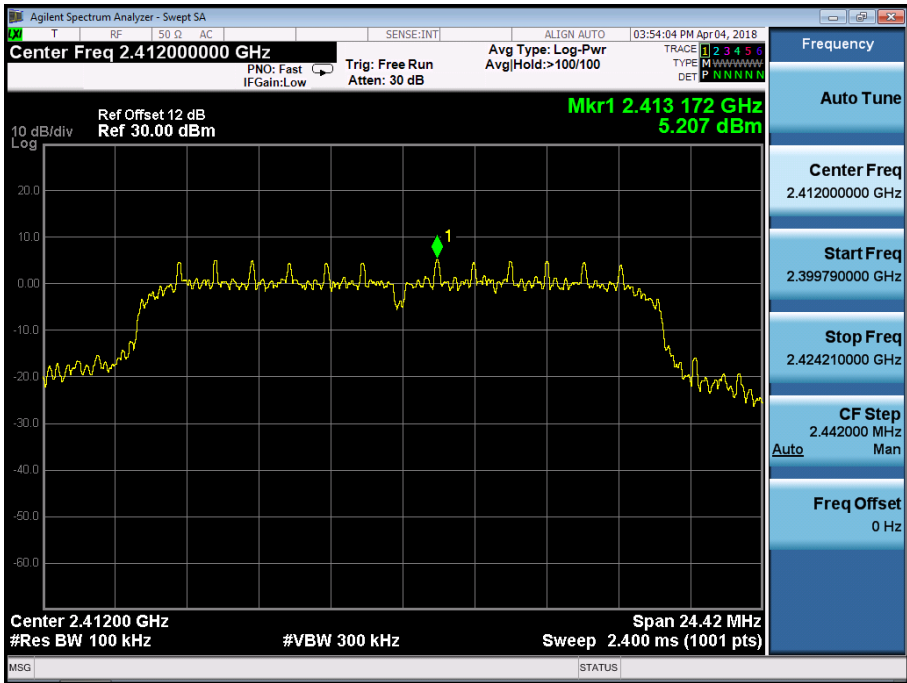

Unwanted Emissions in non-restricted frequency bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 1: 2412MHz Channel 3: 2422MHz

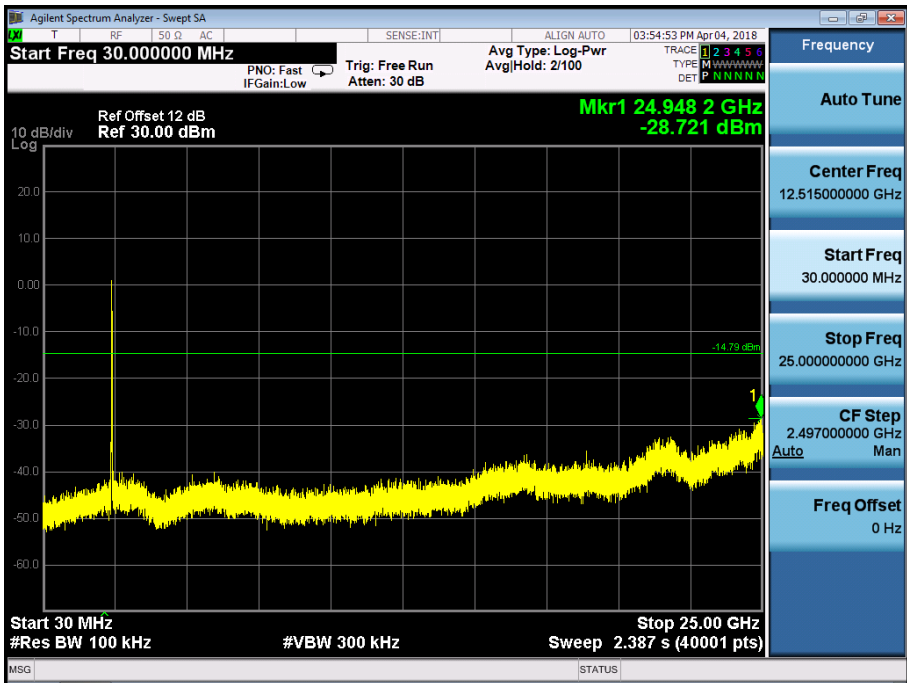


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz

Band edge



Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 6: 2437MHz


PSD(Power Spectral Density) RBW=100kHz

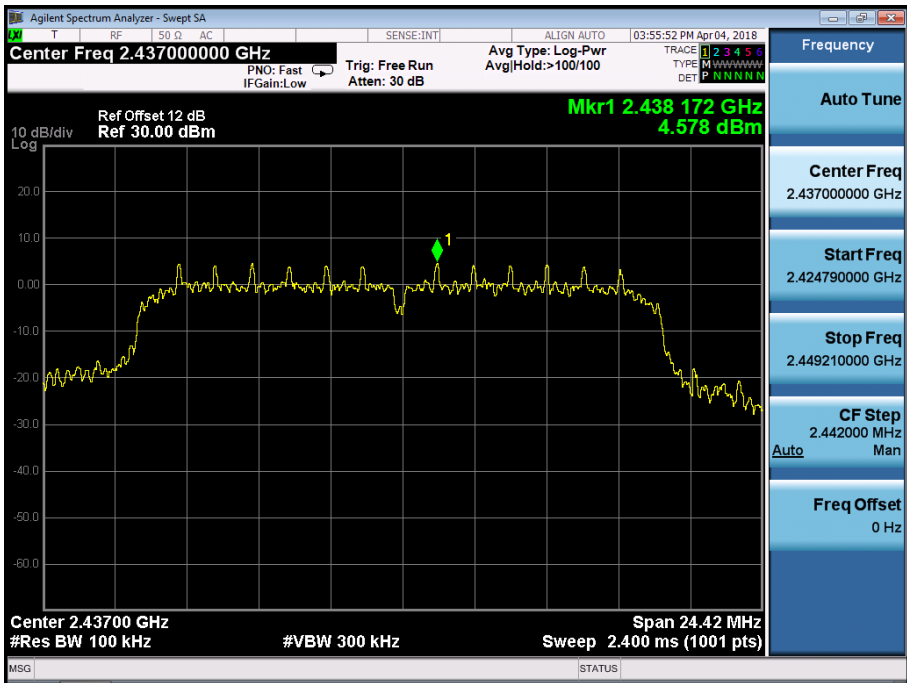

Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 6: 2437MHz

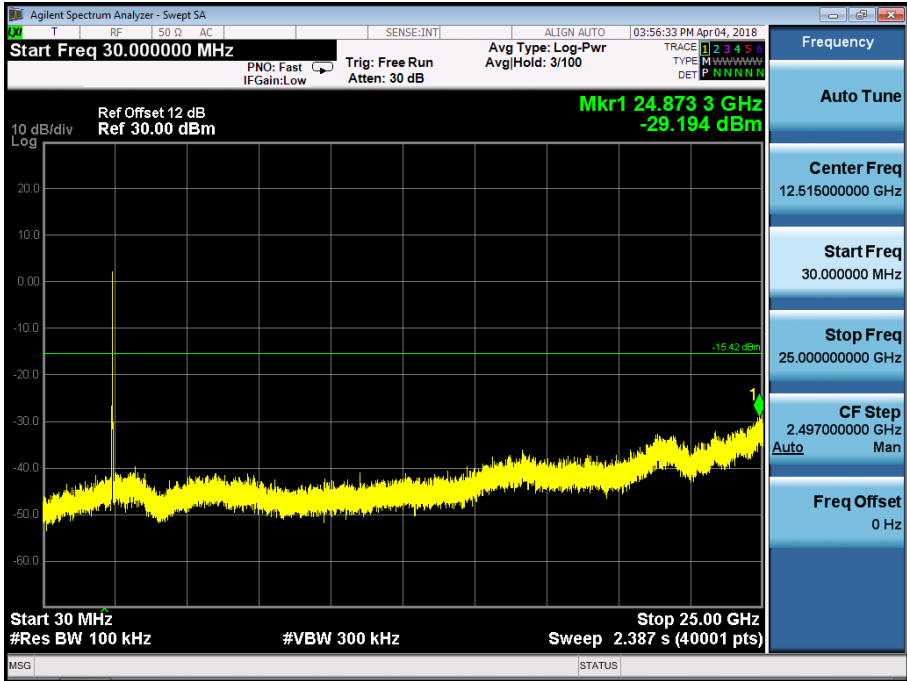

PSD(Power Spectral Density) RBW=100kHz


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 11: 2462MHz Channel 9: 2452MHz

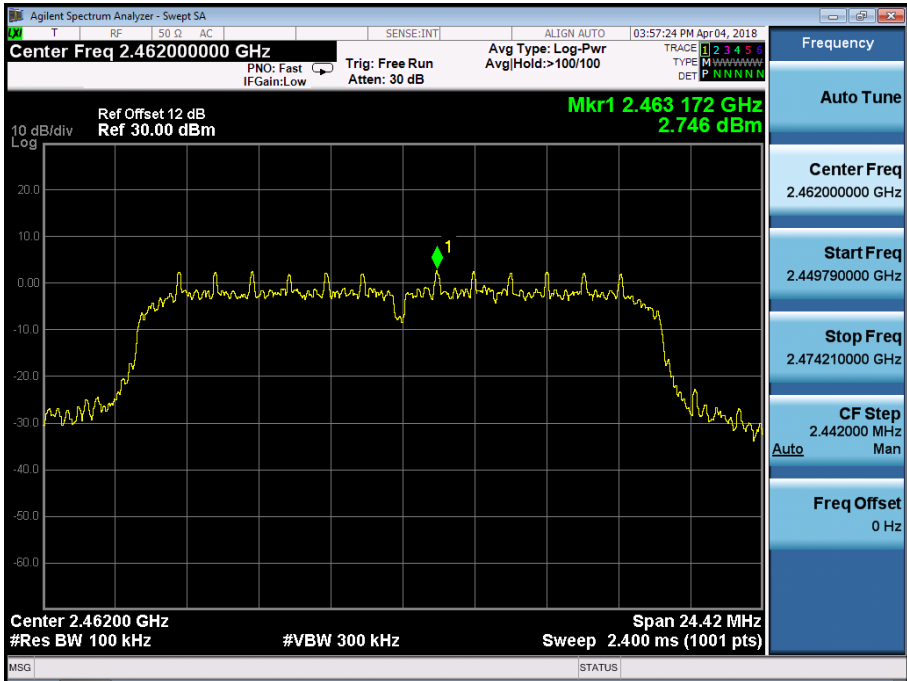


Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

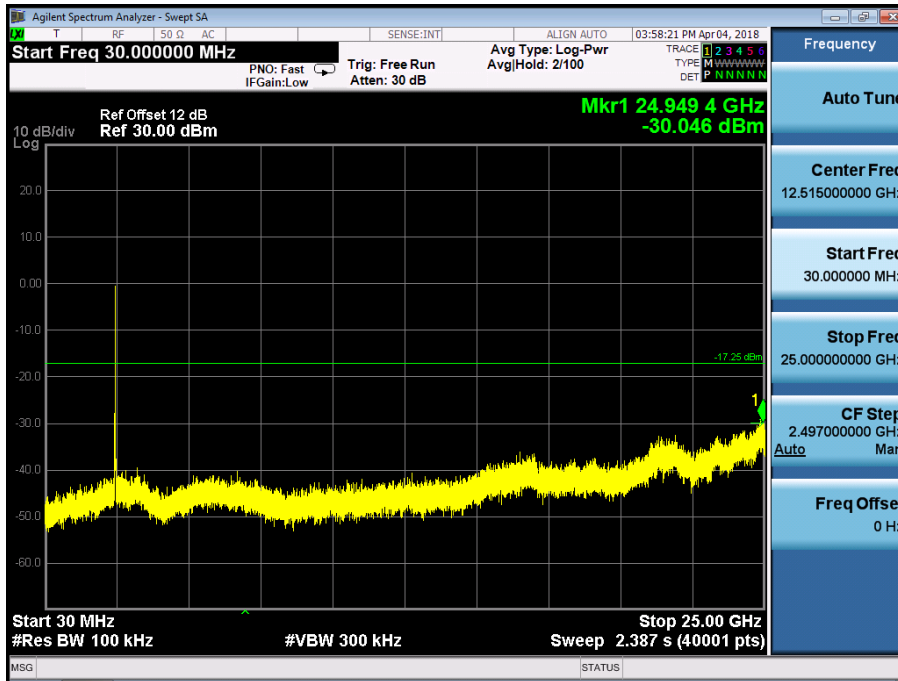

Band edge

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

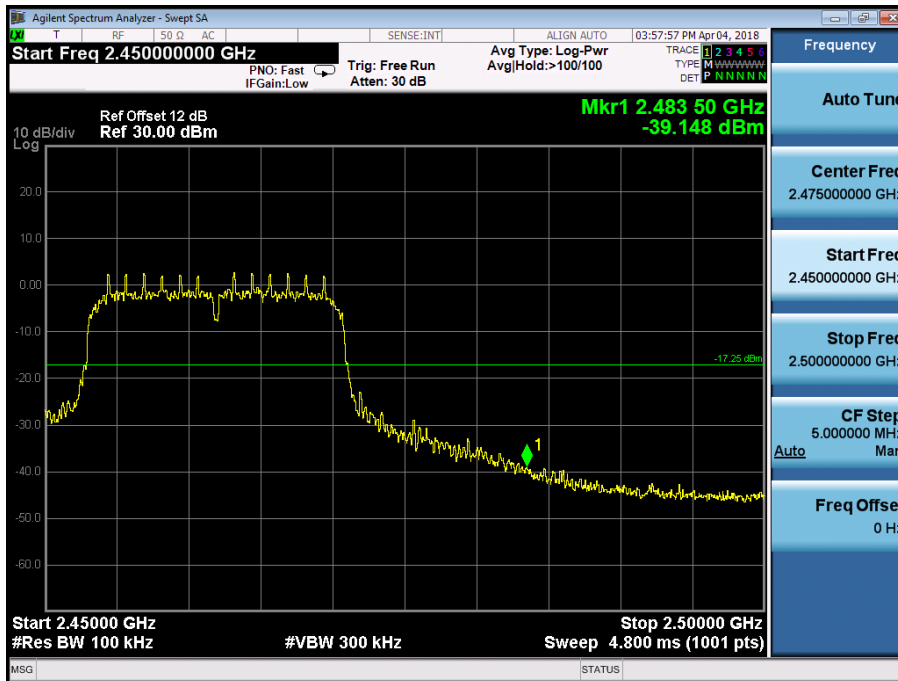

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB558074 DTS 01 Meas. Guidance v04

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	300
0.490-1.705	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11b

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1850.000	V	43.61	31.54	74	54	30.39	22.46
3788.000	V	43.28	32.58	74	54	30.72	21.42
5199.000	V	46.40	34.74	74	54	27.60	19.26
8565.000	V	50.25	40.68	74	54	23.75	13.32
14039.00	V	53.57	39.58	74	54	20.43	14.42
17966.00	V	61.63	42.16	74	54	12.37	11.84
1748.000	H	42.89	31.54	74	54	31.11	22.46
3125.000	H	43.24	32.47	74	54	30.76	21.53
5216.000	H	45.76	32.35	74	54	28.24	21.65
8072.000	H	50.34	40.86	74	54	23.66	13.14
14362.00	H	52.65	39.87	74	54	21.35	14.13
17898.00	H	63.27	43.47	74	54	10.73	10.53

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11b

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1748.000	V	42.78	30.14	74	54	31.22	23.86
3227.000	V	43.68	31.47	74	54	30.32	22.53
5216.000	V	46.49	32.58	74	54	27.51	21.42
8072.000	V	49.97	37.54	74	54	24.03	16.46
10333.00	V	50.95	39.28	74	54	23.05	14.72
17898.00	V	62.28	42.58	74	54	11.72	11.42
1612.000	H	42.89	31.47	74	54	31.11	22.53
3176.000	H	42.97	31.58	74	54	31.03	22.42
5267.000	H	46.29	32.47	74	54	27.71	21.53
7919.000	H	48.68	34.85	74	54	25.32	19.15
13155.00	H	49.62	37.15	74	54	24.38	16.85
18000.00	H	61.50	41.58	74	54	12.50	12.42

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11g

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1697.000	V	43.47	32.54	74	54	30.53	21.46
3159.000	V	43.14	31.54	74	54	30.86	22.46
3737.000	V	43.82	32.58	74	54	30.18	21.42
8089.000	V	48.33	34.87	74	54	25.67	19.13
12730.00	V	51.15	40.26	74	54	22.85	13.74
17847.00	V	60.81	41.56	74	54	13.19	12.44
1748.000	H	43.42	31.54	74	54	30.58	22.46
3193.000	H	43.22	32.58	74	54	30.78	21.42
5182.000	H	45.82	34.58	74	54	28.18	19.42
8667.000	H	48.63	32.74	74	54	25.37	21.26
13121.00	H	50.92	38.96	74	54	23.08	15.04
17898.00	H	61.39	42.16	74	54	12.61	11.84

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11g

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1748.000	V	43.02	32.47	74	54	30.98	21.53
3159.000	V	42.95	31.74	74	54	31.05	22.26
5352.000	V	46.63	32.69	74	54	27.37	21.31
10554.00	V	50.88	40.14	74	54	23.12	13.86
14311.00	V	52.49	41.65	74	54	21.51	12.35
17830.00	V	62.87	42.58	74	54	11.13	11.42
1748.000	H	43.45	31.54	74	54	30.55	22.46
3210.000	H	43.62	32.59	74	54	30.38	21.41
5301.000	H	46.76	34.51	74	54	27.24	19.49
8140.000	H	51.03	40.27	74	54	22.97	13.73
10078.00	H	52.03	41.56	74	54	21.97	12.44
18000.00	H	62.74	42.57	74	54	11.26	11.43

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11g

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1833.000	V	42.74	32.47	74	54	31.26	21.53
3176.000	V	43.55	32.47	74	54	30.45	21.53
5063.000	V	46.45	34.58	74	54	27.55	19.42
7936.000	V	48.40	36.84	74	54	25.60	17.16
10333.00	V	49.19	34.58	74	54	24.81	19.42
17898.00	V	62.55	42.15	74	54	11.45	11.85
1884.000	H	43.53	32.47	74	54	30.47	21.53
3125.000	H	43.74	31.26	74	54	30.26	22.74
5199.000	H	46.32	34.28	74	54	27.68	19.72
7800.000	H	49.98	34.59	74	54	24.02	19.41
13019.00	H	51.11	40.18	74	54	22.89	13.82
17949.00	H	62.09	42.54	74	54	11.91	11.46

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11n20

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1714.000	V	43.62	32.54	74	54	30.38	21.46
3159.000	V	43.67	33.74	74	54	30.33	20.26
5301.000	V	46.63	34.16	74	54	27.37	19.84
7936.000	V	49.42	37.54	74	54	24.58	16.46
14855.00	V	52.88	41.28	74	54	21.12	12.72
17898.00	V	62.18	42.58	74	54	11.82	11.42
1816.000	H	43.89	33.24	74	54	30.11	20.76
3176.000	H	42.66	31.54	74	54	31.34	22.46
4995.000	H	45.81	32.58	74	54	28.19	21.42
11047.00	H	49.92	34.74	74	54	24.08	19.26
14039.00	H	51.74	40.25	74	54	22.26	13.75
17864.00	H	61.68	42.39	74	54	12.32	11.61

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11n20

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1612.000	V	43.85	31.54	74	54	30.15	22.46
3125.000	V	44.46	32.58	74	54	29.54	21.42
5046.000	V	44.74	31.56	74	54	29.26	22.44
7256.000	V	48.37	37.25	74	54	25.63	16.75
14039.00	V	51.51	40.58	74	54	22.49	13.42
17881.00	V	61.44	41.68	74	54	12.56	12.32
1714.000	H	43.05	32.54	74	54	30.95	21.46
3074.000	H	43.13	31.58	74	54	30.87	22.42
5131.000	H	47.07	34.56	74	54	26.93	19.44
8106.000	H	47.98	33.65	74	54	26.02	20.35
11370.00	H	49.08	36.28	74	54	24.92	17.72
17983.00	H	61.48	41.24	74	54	12.52	12.76

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11n20

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 11: 2462MHz


Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
1765.000	V	44.72	32.47	74	54	29.28	21.53
3193.000	V	43.08	31.62	74	54	30.92	22.38
5947.000	V	45.18	35.28	74	54	28.82	18.72
7477.000	V	49.48	34.21	74	54	24.52	19.79
14855.00	V	51.50	40.28	74	54	22.50	13.72
17915.00	V	61.67	43.24	74	54	12.33	10.76
1833.000	H	43.15	32.47	74	54	30.85	21.53
3091.000	H	42.90	30.28	74	54	31.10	23.72
5114.000	H	45.84	31.56	74	54	28.16	22.44
7783.000	H	49.24	34.28	74	54	24.76	19.72
13495.00	H	51.26	39.37	74	54	22.74	14.63
17847.00	H	61.05	41.26	74	54	12.95	12.74

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 1: 2412MHz Channel 3: 2422MHz Polarity: H
 VBW=3MHz Test By: King Kong

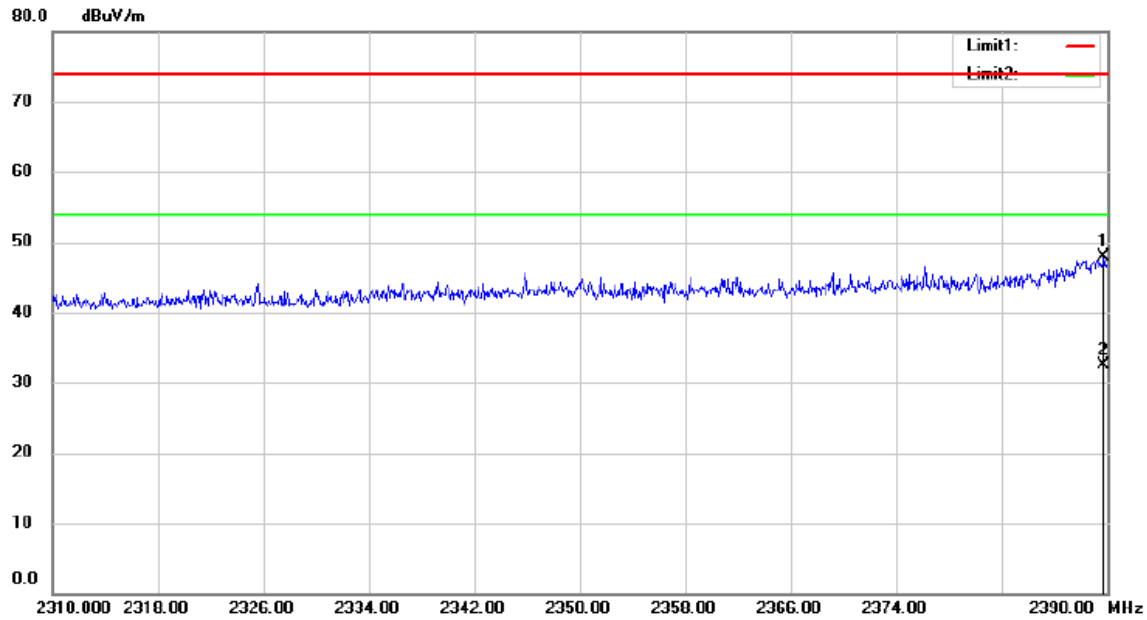


Site 3m Chamber 3# Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:WIFI2.4G TX B20 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2389.760	59.99	-12.10	47.89	74.00	-26.11			peak
2	*	2389.760	44.57	-12.10	32.47	54.00	-21.53			AVG

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz Polarity: V
 VBW=3MHz Test By: King Kong

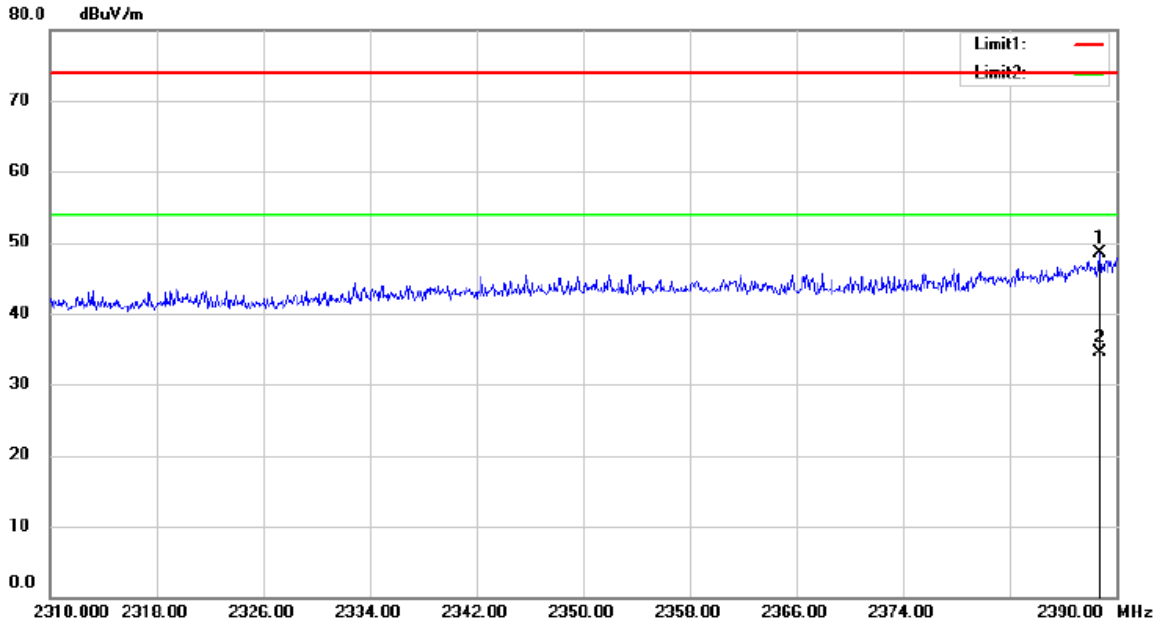


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:WIFI2.4G TX B20 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2388.720	60.54	-12.10	48.44	74.00	-25.56	peak			
2	*	2388.720	46.67	-12.10	34.57	54.00	-19.43	AVG			

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H
 VBW=3MHz Test By: King Kong

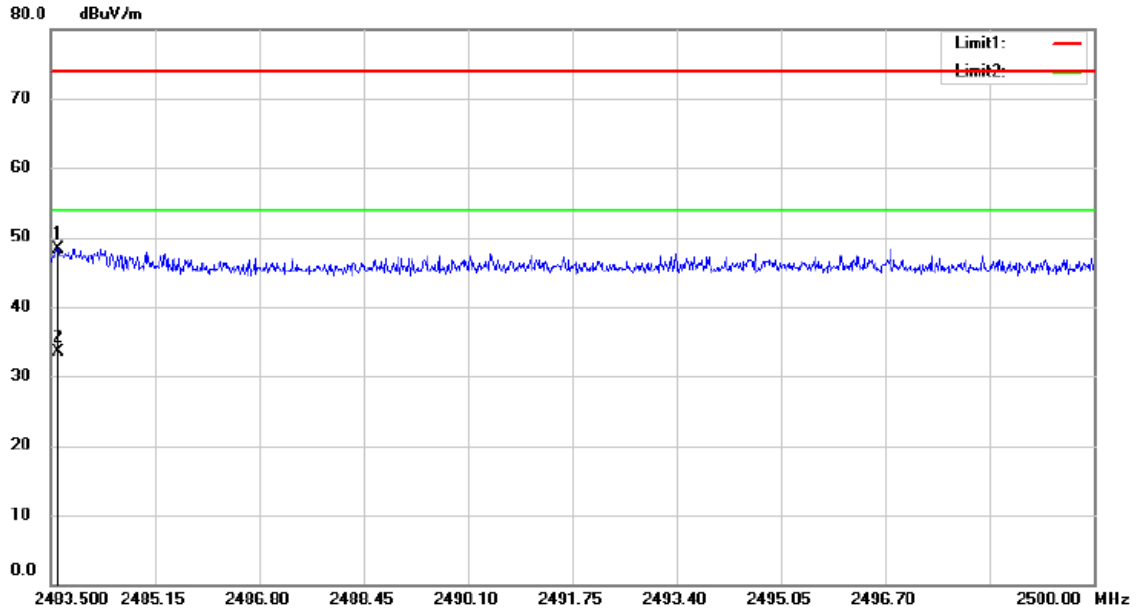


Site 3m Chamber 3# Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:WIFI2.4G TX B20 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2483.615	60.25	-11.87	48.38	74.00	-25.62	peak		
2	*	2483.615	45.45	-11.87	33.58	54.00	-20.42	AVG		

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V
 VBW=3MHz Test By: King Kong

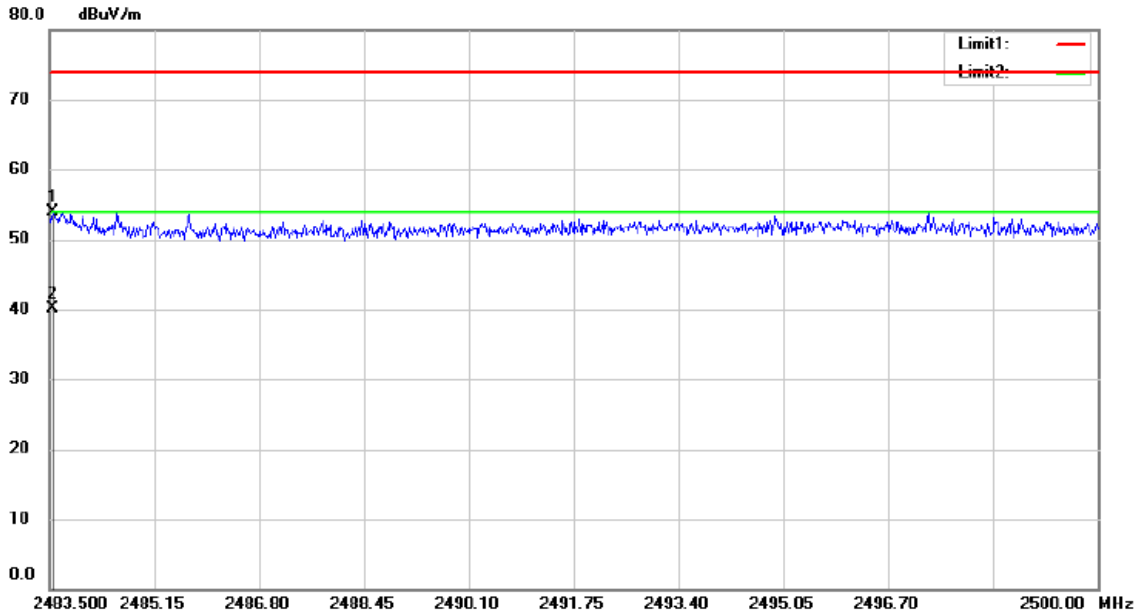


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX B20 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.550	65.87	-11.87	54.00	74.00	-20.00	peak		
2	*	2483.550	52.01	-11.87	40.14	54.00	-13.86	AVG		

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz Polarity: H
 VBW=3MHz Test By: King Kong

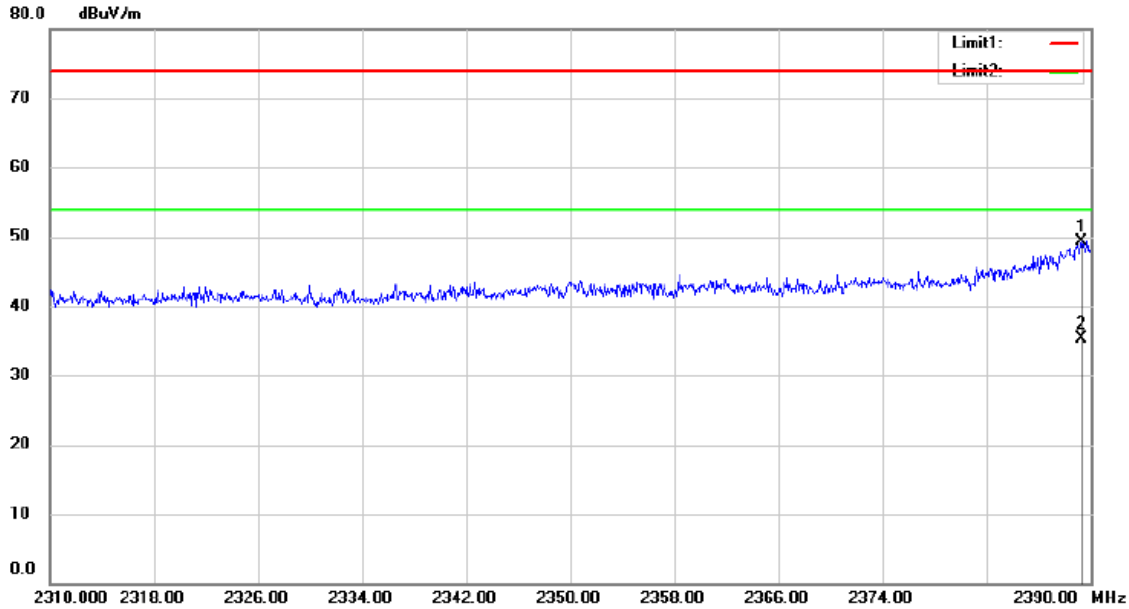


Site: 3m Chamber 3# Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX G20 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2389.280	61.49	-12.10	49.39	74.00	-24.61	peak		
2	*	2389.280	47.36	-12.10	35.26	54.00	-18.74	AVG		

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 1: 2412MHz Channel 3: 2422MHz Polarity:V
 VBW=3MHz Test By: King Kong

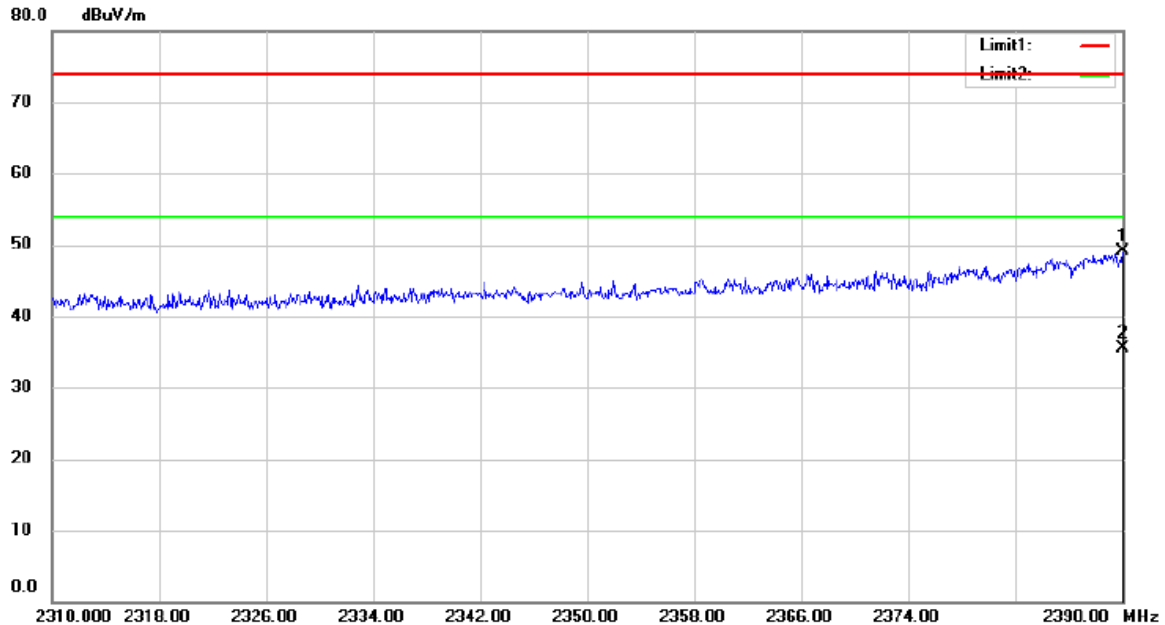


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:WIFI2.4G TX G20 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	61.22	-12.09	49.13	74.00	-24.87			peak
2	*	2390.000	47.50	-12.09	35.41	54.00	-18.59			AVG

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H
 VBW=3MHz Test By: King Kong

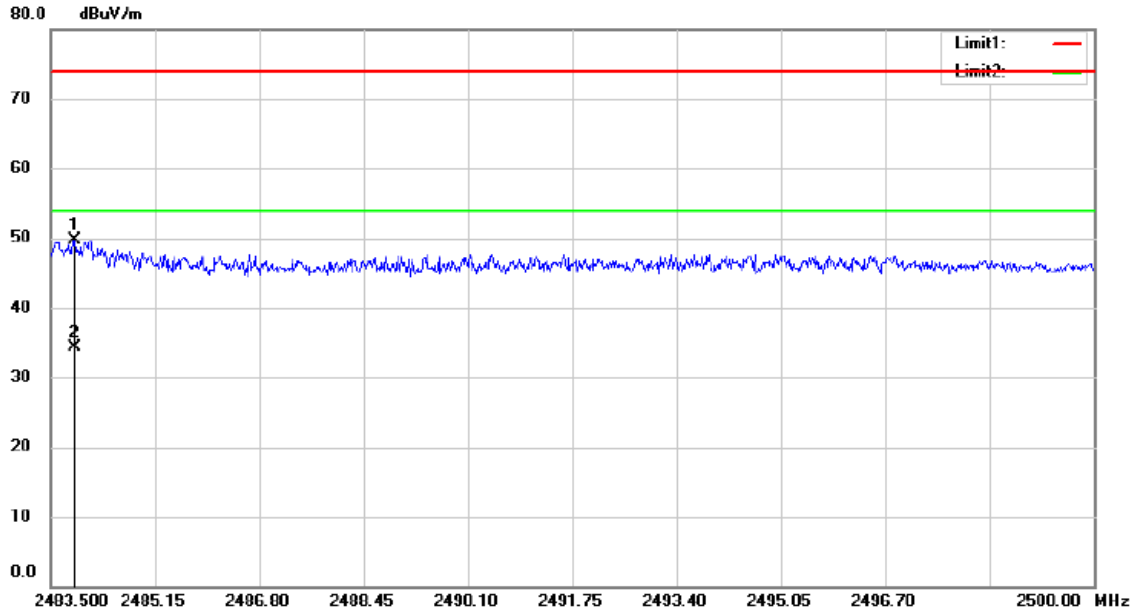


Site 3m Chamber 3# Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX G20 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2483.880	61.64	-11.87	49.77	74.00	-24.23	peak		
2	*	2483.880	46.12	-11.87	34.25	54.00	-19.75	AVG		

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V
 VBW=3MHz Test By: King Kong

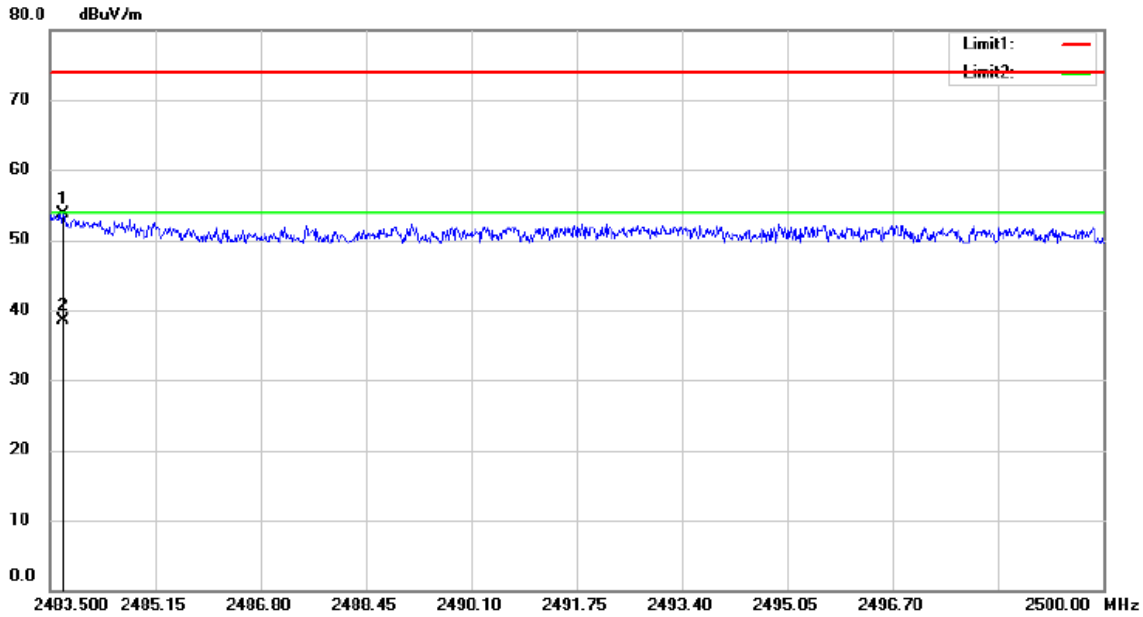


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX G20 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.715	65.66	-11.87	53.79	74.00	-20.21			peak
2	*	2483.715	50.34	-11.87	38.47	54.00	-15.53			AVG

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz Polarity: H
VBW=3MHz Test By: King Kong

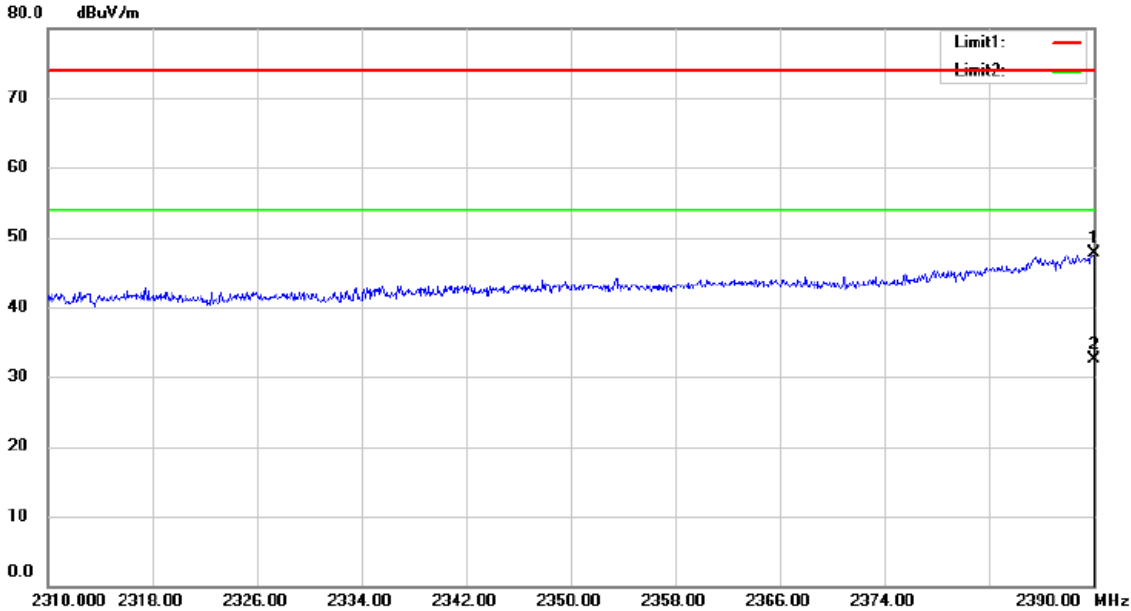


Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
Mode: WIFI2.4G TX N20 2412
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	59.72	-12.09	47.63	74.00	-26.37	peak		
2	*	2390.000	44.67	-12.09	32.58	54.00	-21.42	AVG		

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz Polarity: V
 VBW=3MHz Test By: King Kong

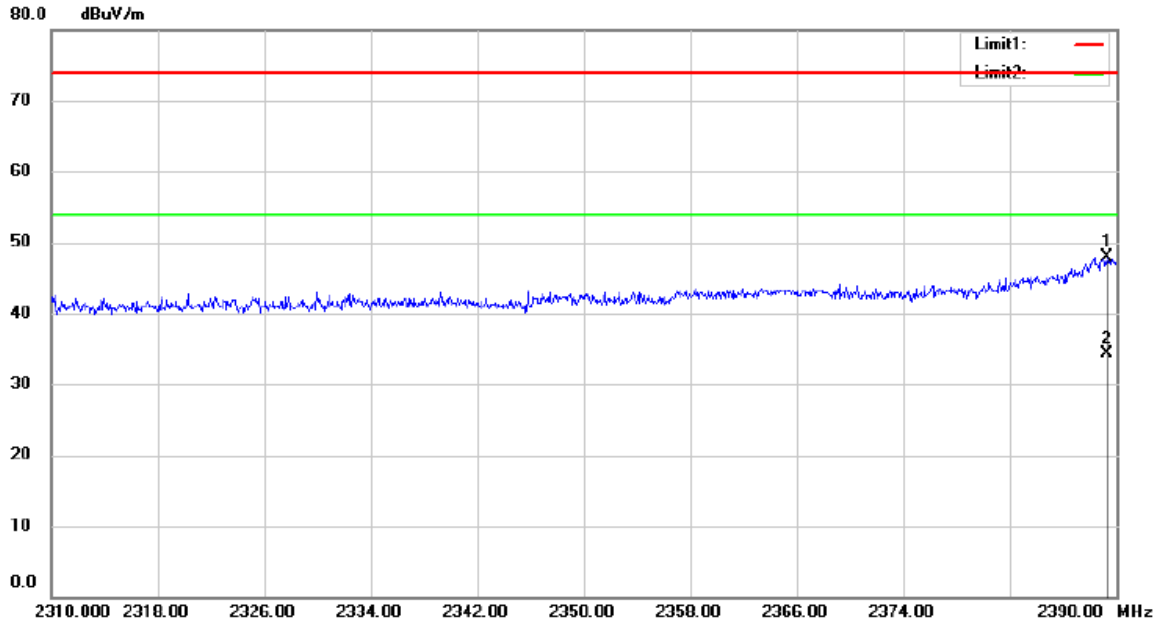


Site 3m Chamber 3# Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX N20 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2389.280	59.99	-12.10	47.89	74.00	-26.11	peak			
2	*	2389.280	46.38	-12.10	34.28	54.00	-19.72	AVG			

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H
 VBW=3MHz Test By: King Kong

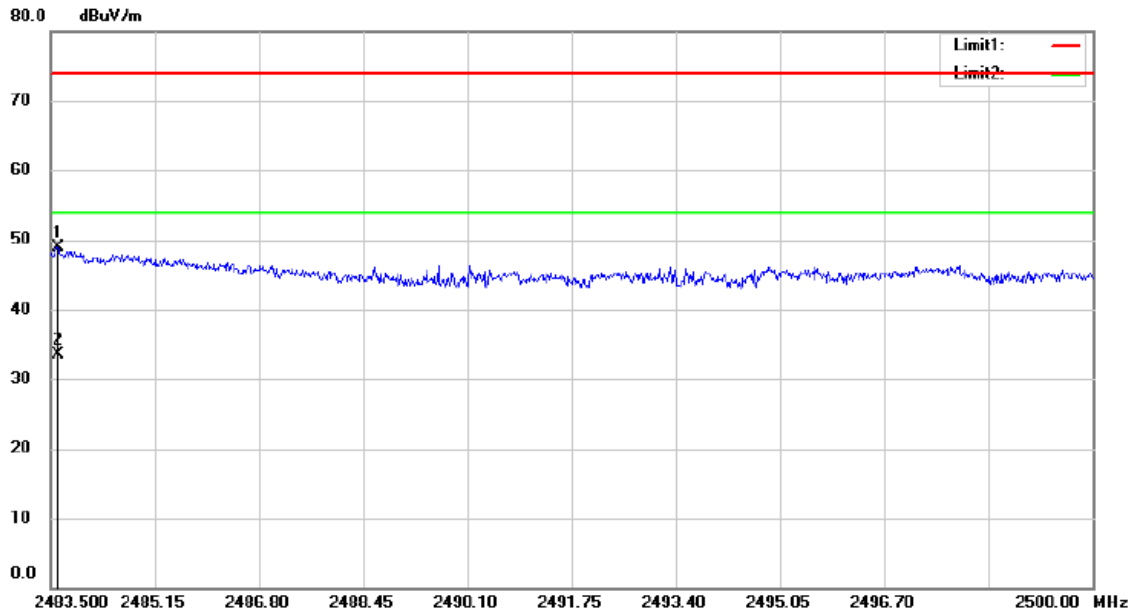


Site 3m Chamber 3# Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:WIFI2.4G TX N20 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.615	60.75	-11.87	48.88	74.00	-25.12			peak
2	*	2483.615	45.45	-11.87	33.58	54.00	-20.42			AVG

Spurious Emission in Restricted Band 2483.5-2500MHz


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V
 VBW=3MHz Test By: King Kong

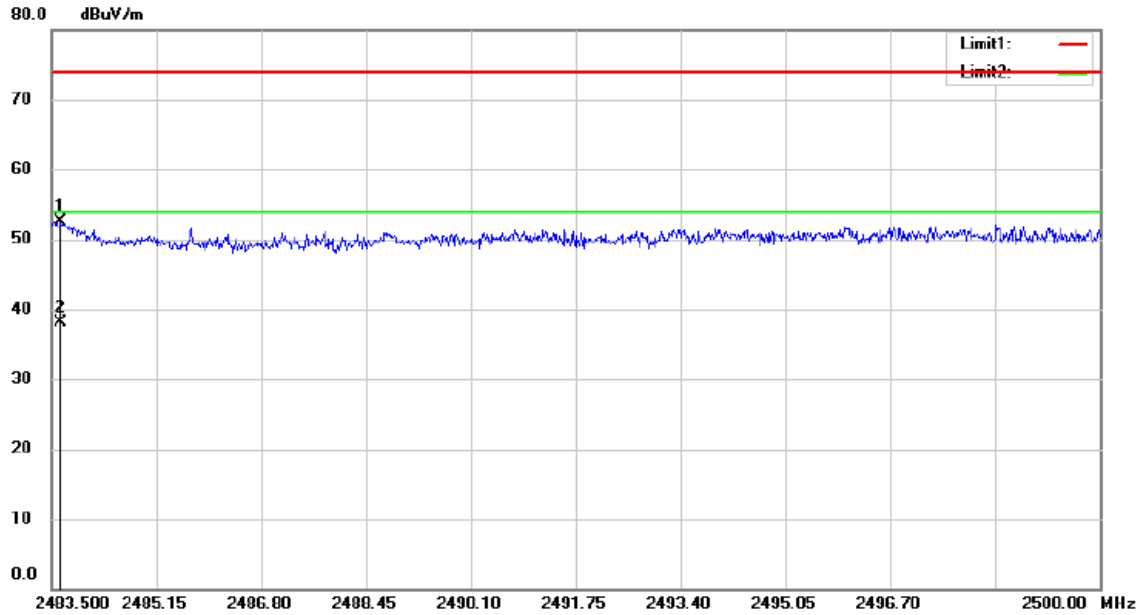

Site 3m Chamber 3# Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: WIFI2.4G TX N20 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		2483.648	64.43	-11.87	52.56	74.00	-21.44			peak	
2	*	2483.648	50.05	-11.87	38.18	54.00	-15.82			AVG	

■ Spurious Emission below 1GHz (30MHz to 1GHz)

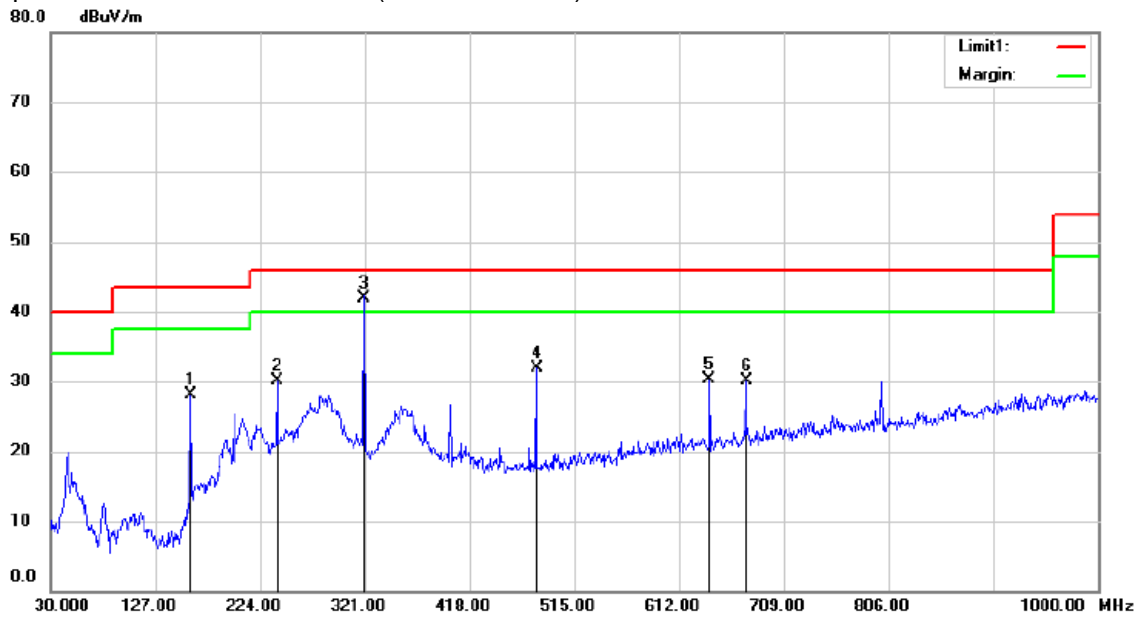

Site RE 3M Chamber #3

Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15C


Power: AC 120V/60Hz

Humidity: 53 %

Mode:802.11b:2412MHz


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		159.9800	46.59	-18.41	28.18	43.50	-15.32			QP	
2		239.5200	44.03	-13.92	30.11	46.00	-15.89			QP	
3	*	320.0300	53.96	-11.96	42.00	46.00	-4.00			QP	
4		480.0800	39.98	-7.98	32.00	46.00	-14.00			QP	
5		640.1300	34.90	-4.66	30.24	46.00	-15.76			QP	
6		674.0800	34.29	-4.19	30.10	46.00	-15.90			QP	

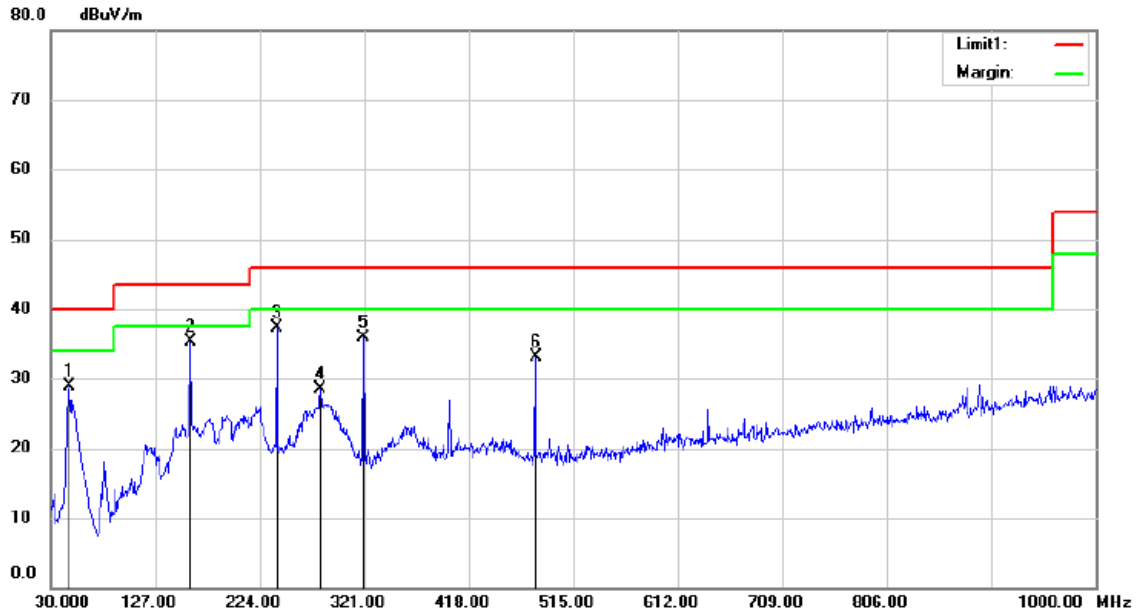


Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11b:2412MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		47.4600	42.69	-13.85	28.84	40.00	-11.16			QP	
2	*	159.9800	53.70	-18.41	35.29	43.50	-8.21			QP	
3		239.5200	51.30	-13.92	37.38	46.00	-8.62			QP	
4		280.2600	41.20	-12.78	28.42	46.00	-17.58			QP	
5		320.0300	47.83	-11.96	35.87	46.00	-10.13			QP	
6		480.0800	41.05	-7.98	33.07	46.00	-12.93			QP	

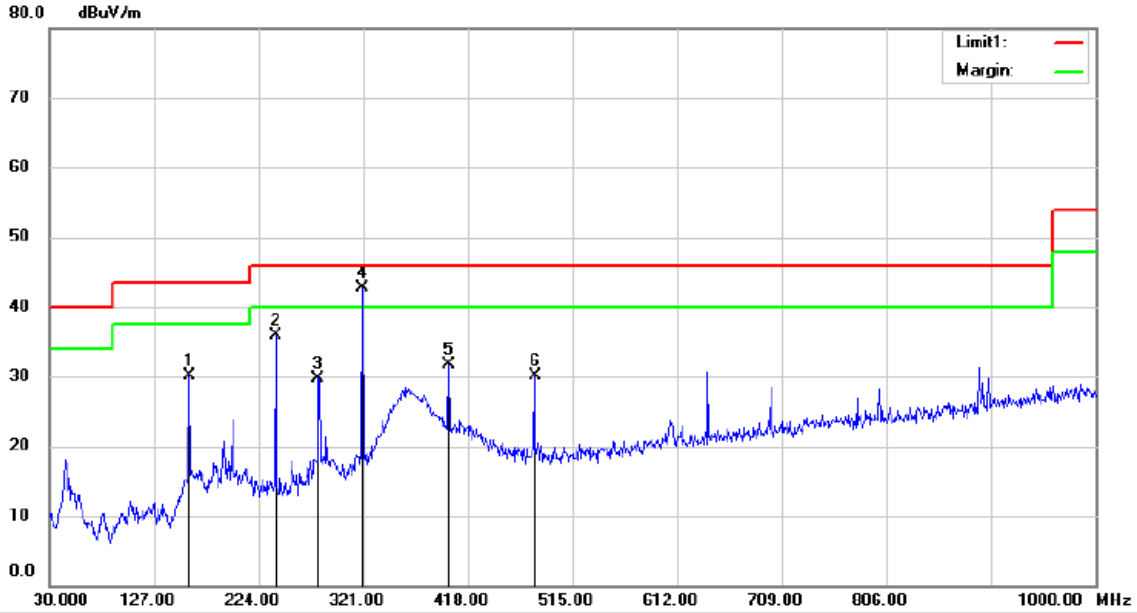


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11b:2437MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		159.9800	48.52	-18.41	30.11	43.50	-13.39	QP		
2		239.5200	49.77	-13.92	35.85	46.00	-10.15	QP		
3		279.2900	42.44	-12.81	29.63	46.00	-16.37	QP		
4	*	320.0300	54.75	-11.96	42.79	46.00	-3.21	QP		
5		400.5400	41.49	-9.71	31.78	46.00	-14.22	QP		
6		480.0800	38.08	-7.98	30.10	46.00	-15.90	QP		

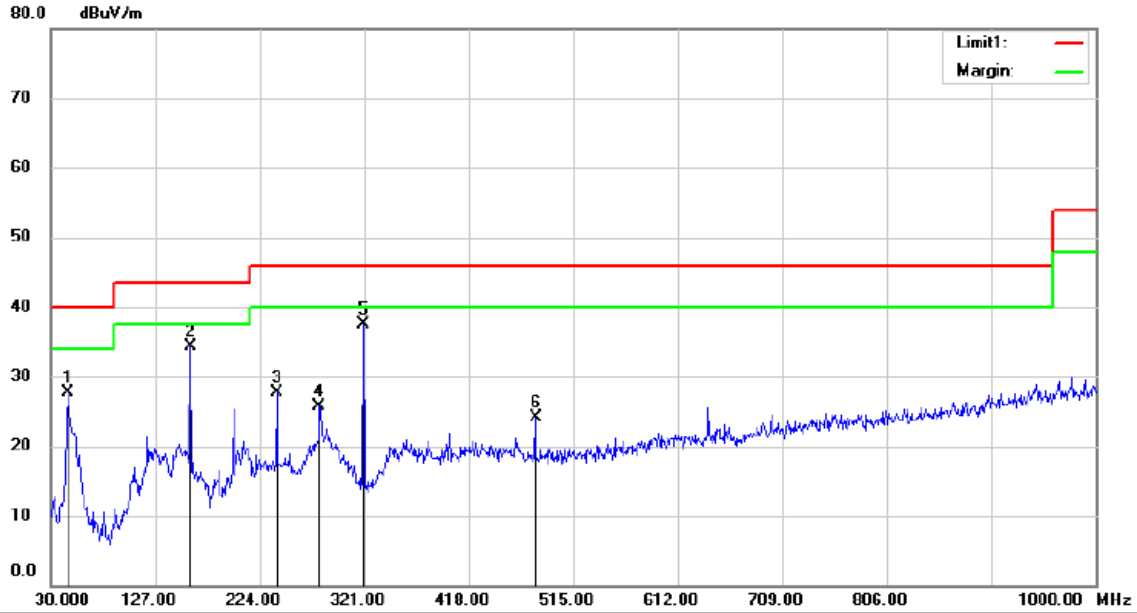


Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11b:2437MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		45.5200	41.73	-14.07	27.66	40.00	-12.34			QP	
2		159.9800	52.66	-18.41	34.25	43.50	-9.25			QP	
3		239.5200	41.67	-13.92	27.75	46.00	-18.25			QP	
4		279.2900	38.58	-12.81	25.77	46.00	-20.23			QP	
5	*	320.0300	49.40	-11.96	37.44	46.00	-8.56			QP	
6		480.0800	32.11	-7.98	24.13	46.00	-21.87			QP	

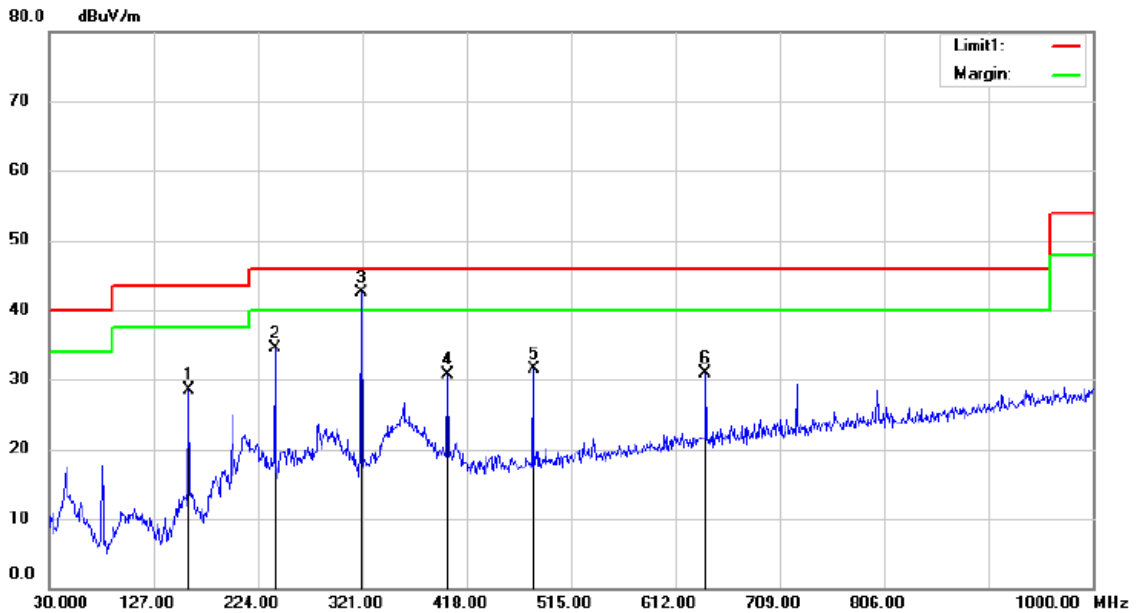


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11b:2462MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		159.9800	46.87	-18.41	28.46	43.50	-15.04			QP	
2		239.5200	48.47	-13.92	34.55	46.00	-11.45			QP	
3	*	320.0300	54.46	-11.96	42.50	46.00	-3.50			QP	
4		400.5400	40.34	-9.71	30.63	46.00	-15.37			QP	
5		480.0800	39.55	-7.98	31.57	46.00	-14.43			QP	
6		640.1300	35.63	-4.66	30.97	46.00	-15.03			QP	

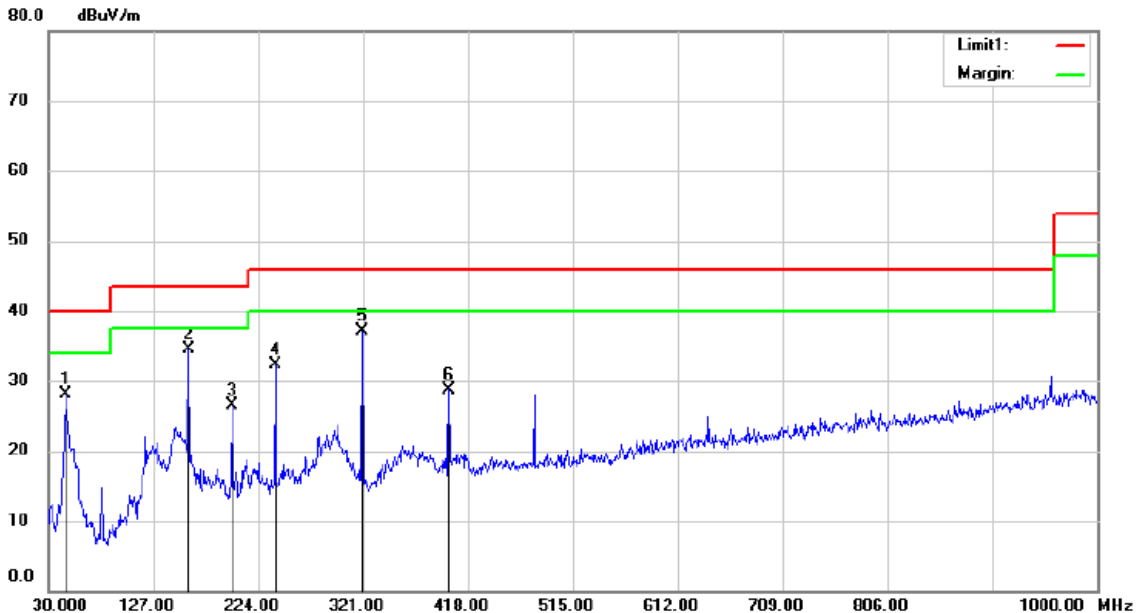


Site RE 3M Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11b:2462MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		45.5200	42.24	-14.07	28.17	40.00	-11.83			QP	
2		159.9800	52.96	-18.41	34.55	43.50	-8.95			QP	
3		199.7500	41.56	-15.08	26.48	43.50	-17.02			QP	
4		239.5200	46.16	-13.92	32.24	46.00	-13.76			QP	
5	*	320.0300	49.05	-11.96	37.09	46.00	-8.91			QP	
6		400.5400	38.51	-9.71	28.80	46.00	-17.20			QP	

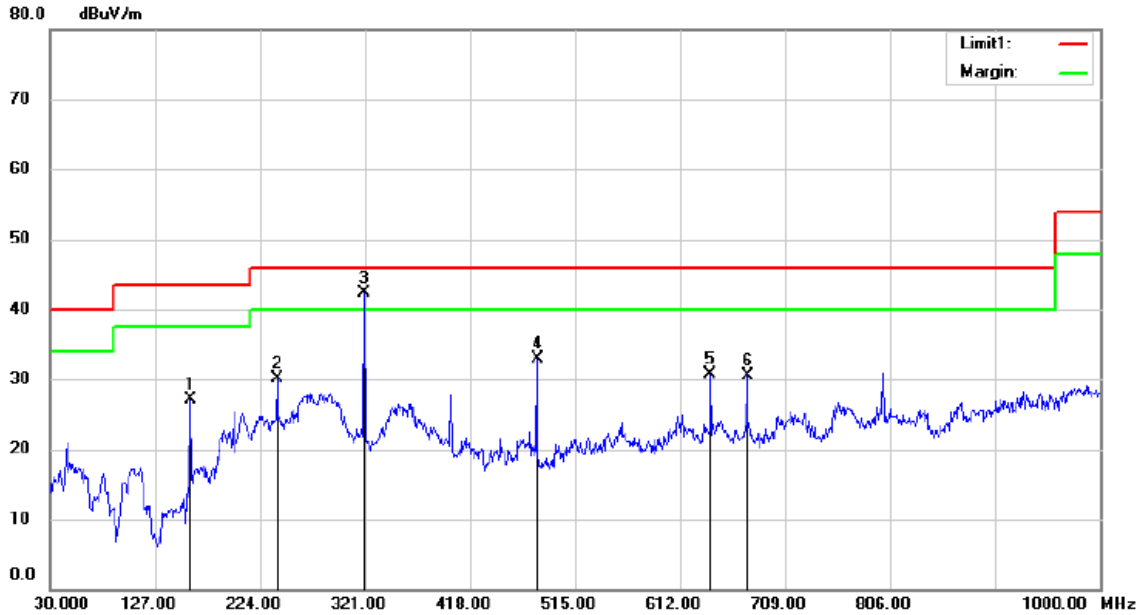


Site RE 3M Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g:2412MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		159.9800	45.59	-18.41	27.18	43.50	-16.32	QP			
2		239.5200	44.03	-13.92	30.11	46.00	-15.89	QP			
3	*	320.0300	54.29	-11.96	42.33	46.00	-3.67	QP			
4		480.0800	40.98	-7.98	33.00	46.00	-13.00	QP			
5		640.1300	35.40	-4.66	30.74	46.00	-15.26	QP			
6		674.0800	34.79	-4.19	30.60	46.00	-15.40	QP			

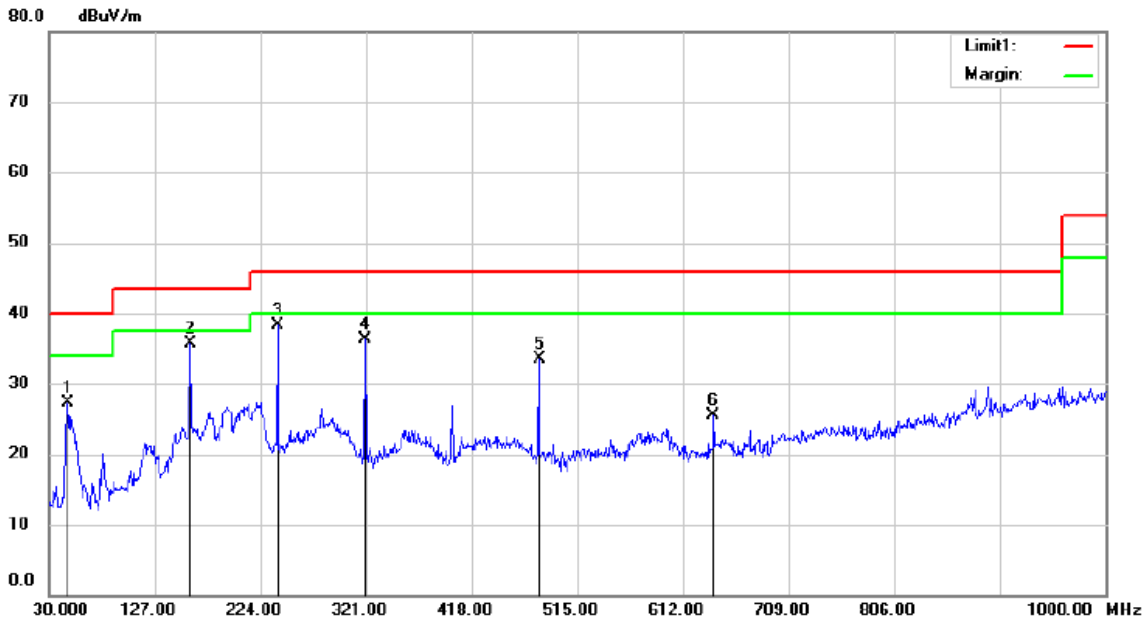


Site: RE 3M Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11g:2412MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		47.4600	41.19	-13.85	27.34	40.00	-12.66	QP			
2		159.9800	54.20	-18.41	35.79	43.50	-7.71	QP			
3	*	239.5200	52.30	-13.92	38.38	46.00	-7.62	QP			
4		320.0300	48.33	-11.96	36.37	46.00	-9.63	QP			
5		480.0800	41.55	-7.98	33.57	46.00	-12.43	QP			
6		640.1300	30.20	-4.66	25.54	46.00	-20.46	QP			

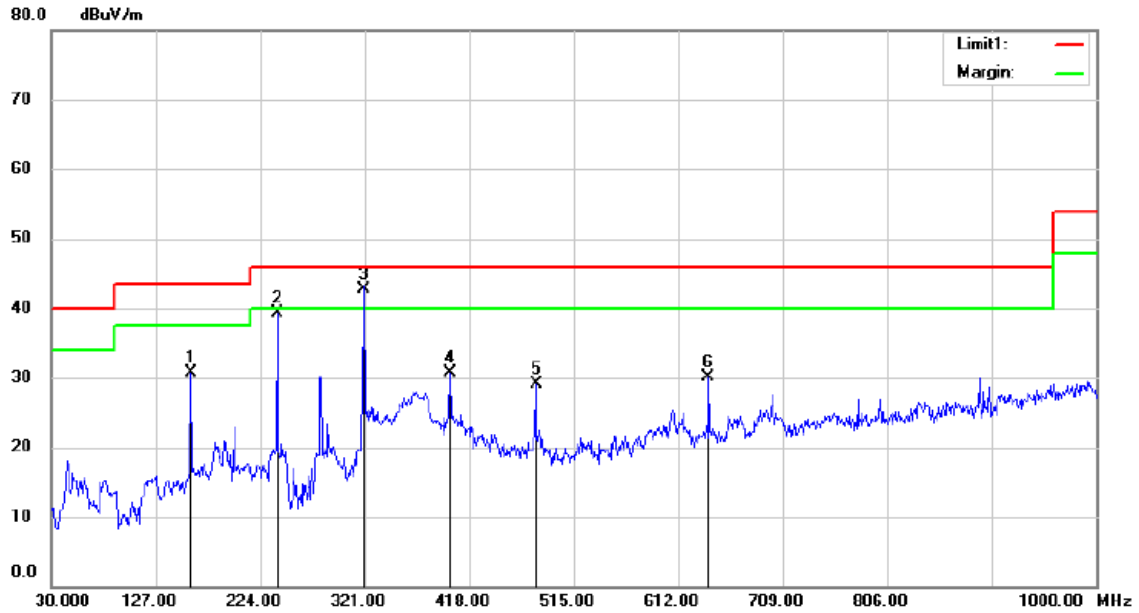


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g:2437MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		159.9800	49.02	-18.41	30.61	43.50	-12.89	QP		
2		239.5200	53.27	-13.92	39.35	46.00	-6.65	QP		
3	*	320.0300	54.76	-11.96	42.80	46.00	-3.20	QP		
4		400.5400	40.49	-9.71	30.78	46.00	-15.22	QP		
5		480.0800	37.08	-7.98	29.10	46.00	-16.90	QP		
6		640.1300	34.86	-4.66	30.20	46.00	-15.80	QP		

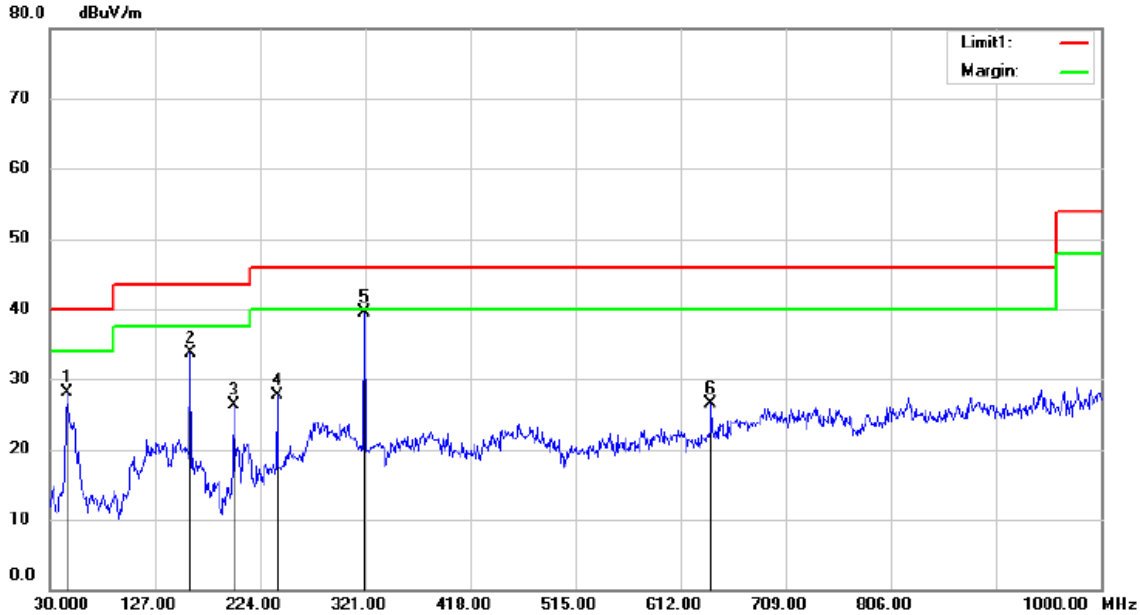


Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11g:2437MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		45.5200	42.23	-14.07	28.16	40.00	-11.84			QP
2		159.9800	52.16	-18.41	33.75	43.50	-9.75			QP
3		199.7500	41.29	-15.08	26.21	43.50	-17.29			QP
4		239.5200	41.67	-13.92	27.75	46.00	-18.25			QP
5	*	320.0300	51.40	-11.96	39.44	46.00	-6.56			QP
6		640.1300	31.21	-4.66	26.55	46.00	-19.45			QP

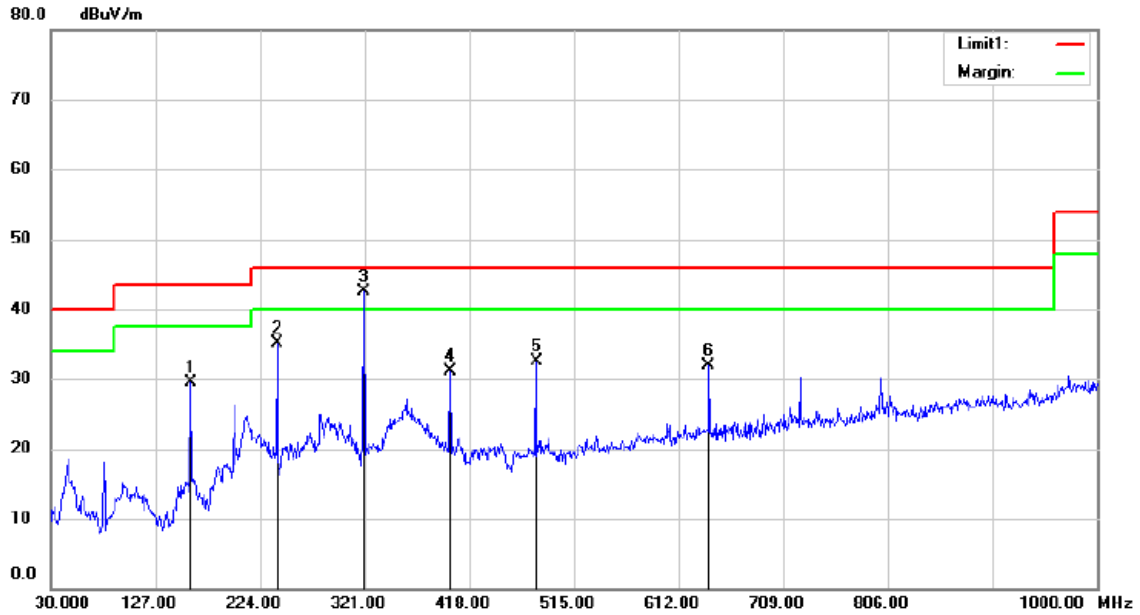


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g:2462MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		159.9800	47.87	-18.41	29.46	43.50	-14.04			QP
2		239.5200	48.97	-13.92	35.05	46.00	-10.95			QP
3	*	320.0300	54.43	-11.96	42.47	46.00	-3.53			QP
4		400.5400	40.84	-9.71	31.13	46.00	-14.87			QP
5		480.0800	40.55	-7.98	32.57	46.00	-13.43			QP
6		640.1300	36.63	-4.66	31.97	46.00	-14.03			QP

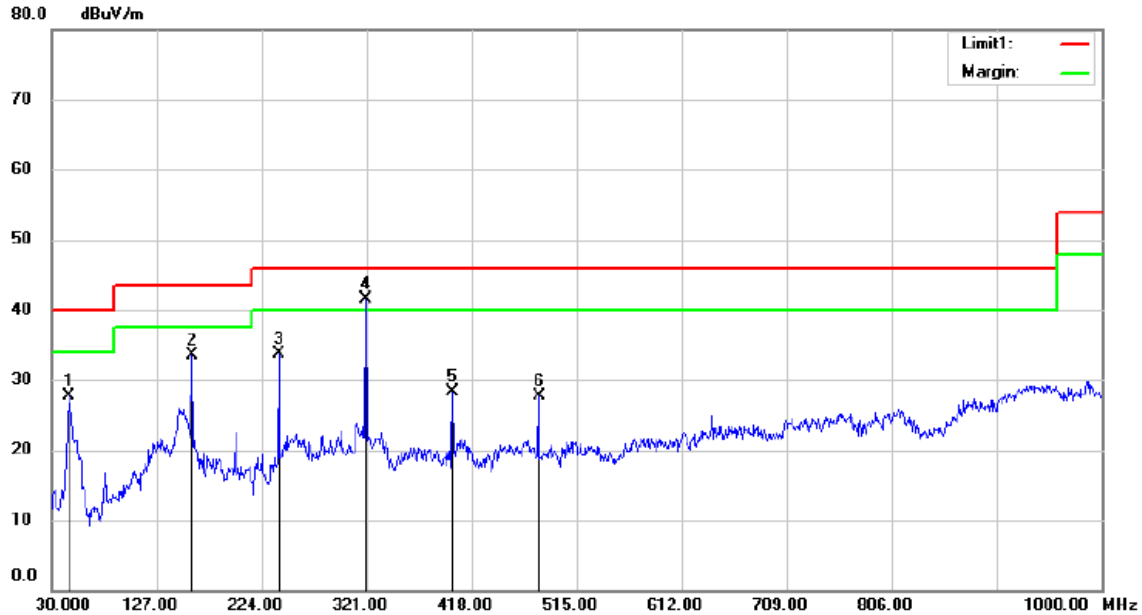


Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g:2462MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		45.5200	41.74	-14.07	27.67	40.00	-12.33			QP
2		159.9800	51.96	-18.41	33.55	43.50	-9.95			QP
3		239.5200	47.66	-13.92	33.74	46.00	-12.26			QP
4	*	320.0300	53.55	-11.96	41.59	46.00	-4.41			QP
5		400.5400	38.01	-9.71	28.30	46.00	-17.70			QP
6		480.0800	35.65	-7.98	27.67	46.00	-18.33			QP

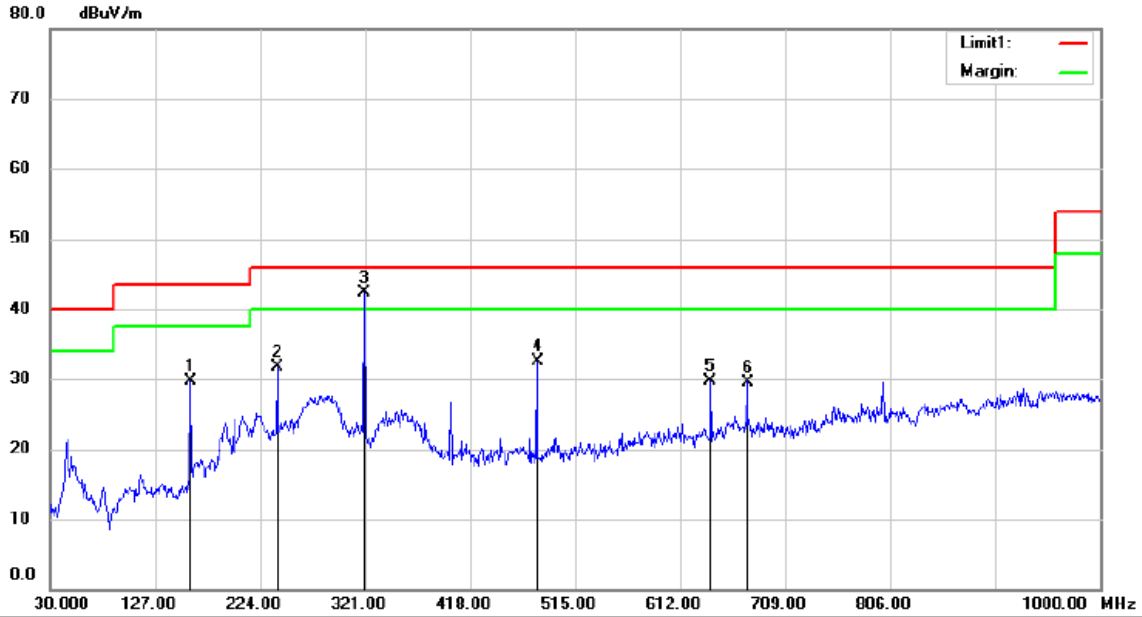


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11n20:2412MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		159.9800	48.09	-18.41	29.68	43.50	-13.82			QP
2		239.5200	45.53	-13.92	31.61	46.00	-14.39			QP
3	*	320.0300	54.29	-11.96	42.33	46.00	-3.67			QP
4		480.0800	40.48	-7.98	32.50	46.00	-13.50			QP
5		640.1300	34.40	-4.66	29.74	46.00	-16.26			QP
6		674.0800	33.79	-4.19	29.60	46.00	-16.40			QP

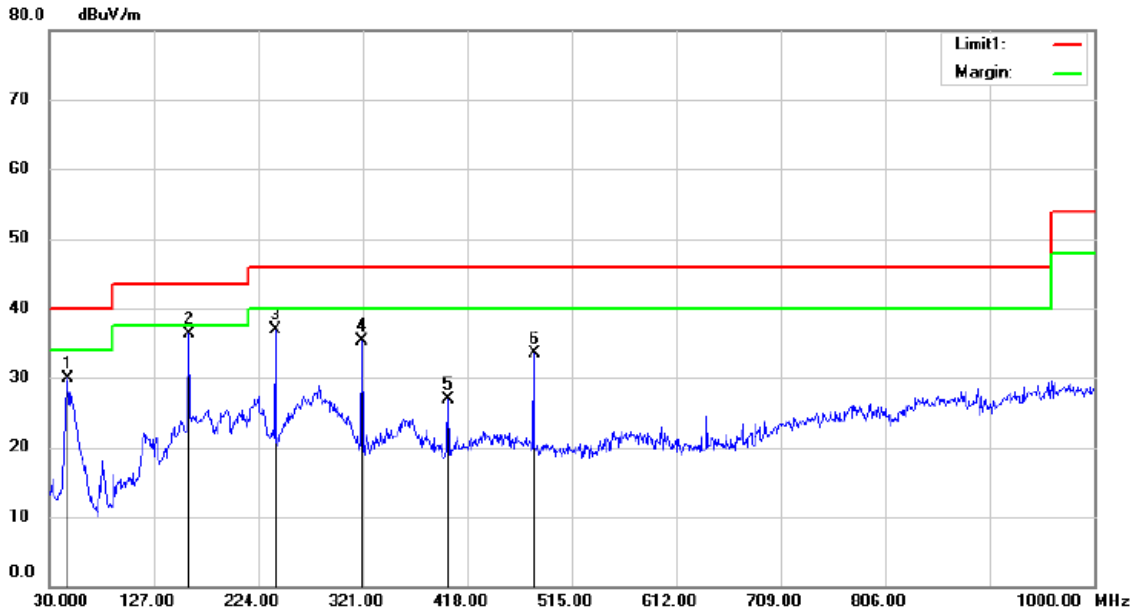


Site RE 3M Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11n20:2412MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		47.4600	43.69	-13.85	29.84	40.00	-10.16	QP		
2	*	159.9800	54.70	-18.41	36.29	43.50	-7.21	QP		
3		239.5200	50.80	-13.92	36.88	46.00	-9.12	QP		
4		320.0300	47.33	-11.96	35.37	46.00	-10.63	QP		
5		400.5400	36.64	-9.71	26.93	46.00	-19.07	QP		
6		480.0800	41.55	-7.98	33.57	46.00	-12.43	QP		

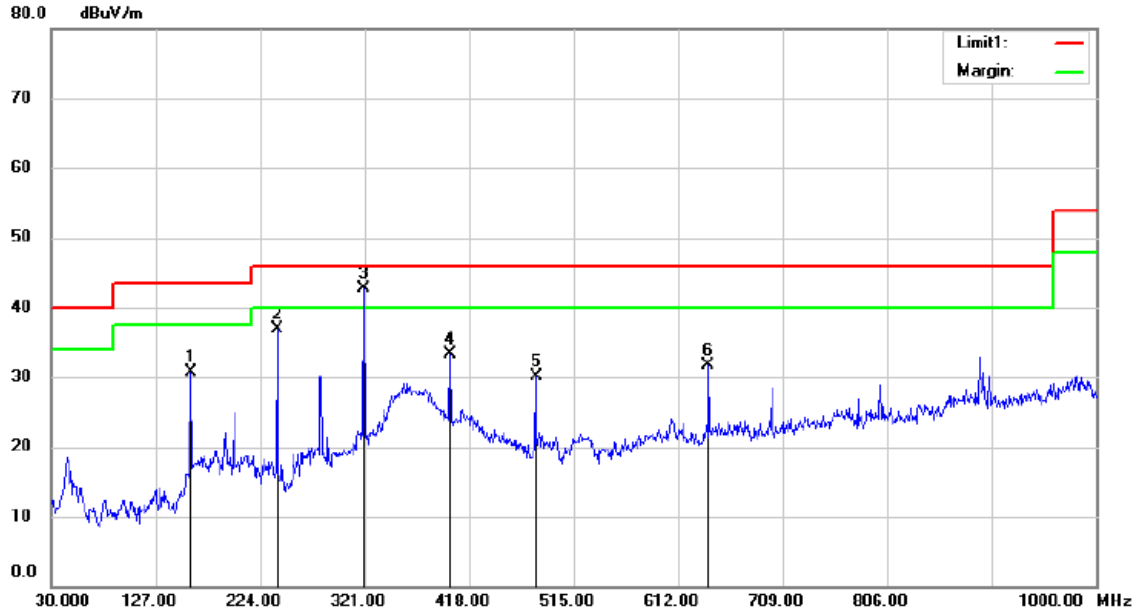


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11n20:2437MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		159.9800	49.02	-18.41	30.61	43.50	-12.89	QP		
2		239.5200	50.77	-13.92	36.85	46.00	-9.15	QP		
3	*	320.0300	54.75	-11.96	42.79	46.00	-3.21	QP		
4		400.5400	42.99	-9.71	33.28	46.00	-12.72	QP		
5		480.0800	38.08	-7.98	30.10	46.00	-15.90	QP		
6		640.1300	36.36	-4.66	31.70	46.00	-14.30	QP		

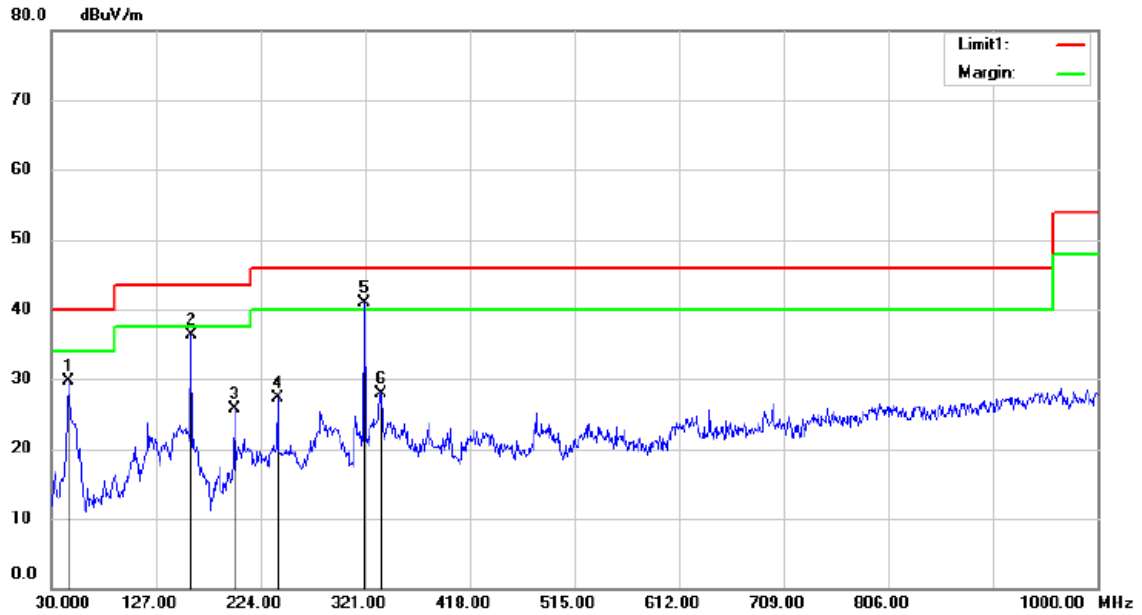

Site RE 3M Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11n20:2437MHz
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		45.5200	43.73	-14.07	29.66	40.00	-10.34			QP
2		159.9800	54.66	-18.41	36.25	43.50	-7.25			QP
3		199.7500	40.79	-15.08	25.71	43.50	-17.79			QP
4		239.5200	41.17	-13.92	27.25	46.00	-18.75			QP
5	*	320.0300	52.90	-11.96	40.94	46.00	-5.06			QP
6		335.5500	38.93	-11.04	27.89	46.00	-18.11			QP

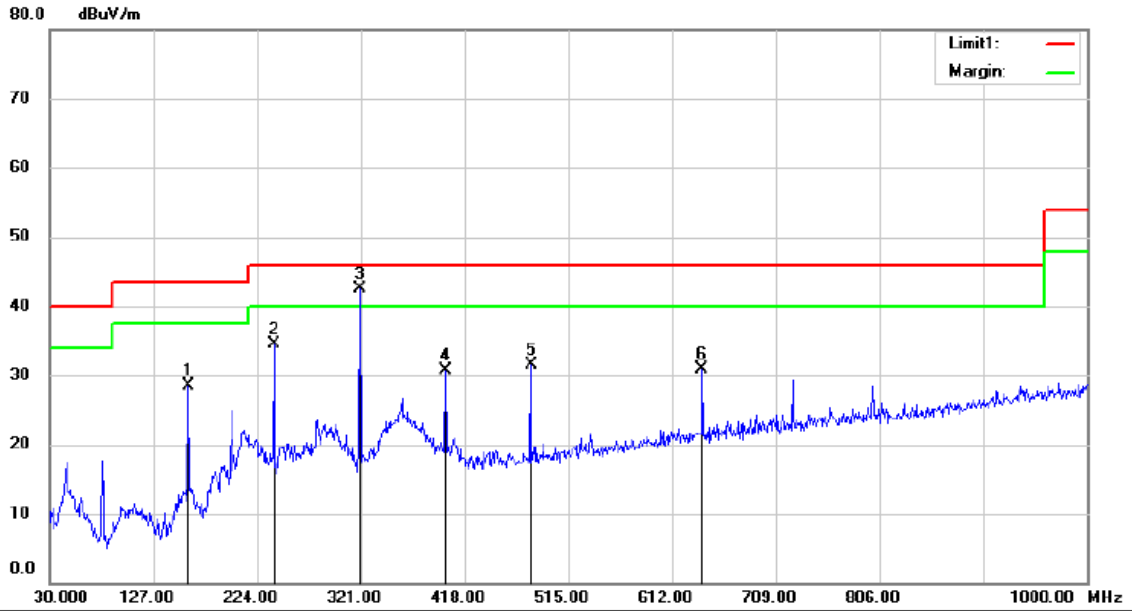

Site RE 3M Chamber #3

Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15C


Power: AC 120V/60Hz

Humidity: 53 %

Mode: 802.11n20:2462MHz

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		159.9800	46.87	-18.41	28.46	43.50	-15.04			QP	
2		239.5200	48.47	-13.92	34.55	46.00	-11.45			QP	
3	*	320.0300	54.46	-11.96	42.50	46.00	-3.50			QP	
4		400.5400	40.34	-9.71	30.63	46.00	-15.37			QP	
5		480.0800	39.55	-7.98	31.57	46.00	-14.43			QP	
6		640.1300	35.63	-4.66	30.97	46.00	-15.03			QP	

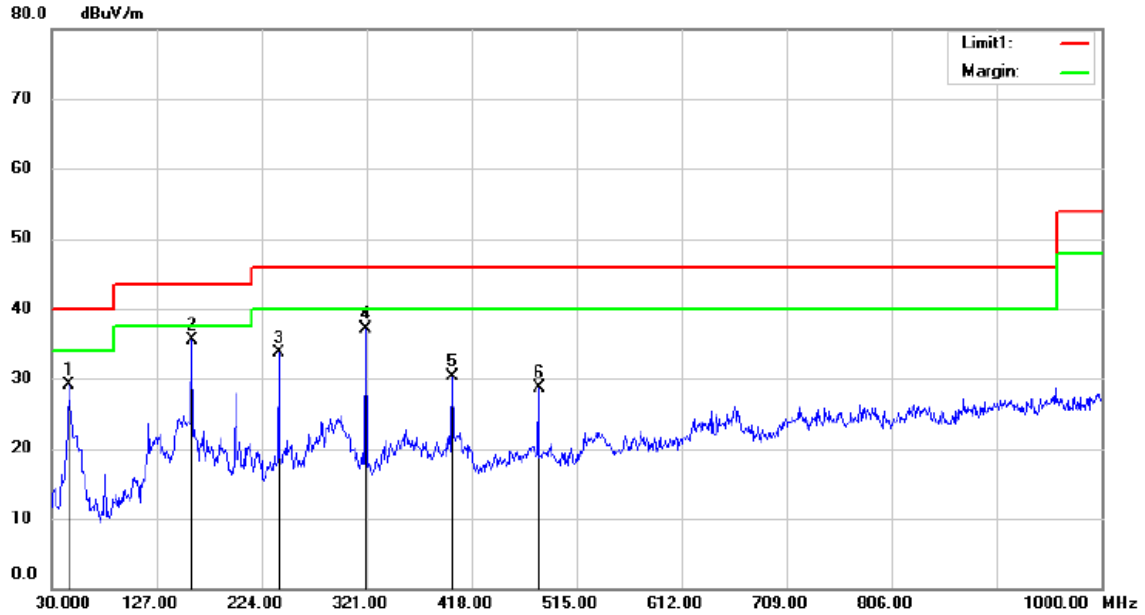

Site RE 3M Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11n20:2462MHz
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		45.5200	43.24	-14.07	29.17	40.00	-10.83			QP	
2	*	159.9800	53.96	-18.41	35.55	43.50	-7.95			QP	
3		239.5200	47.66	-13.92	33.74	46.00	-12.26			QP	
4		320.0300	49.05	-11.96	37.09	46.00	-8.91			QP	
5		400.5400	40.01	-9.71	30.30	46.00	-15.70			QP	
6		480.0800	36.65	-7.98	28.67	46.00	-17.33			QP	

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup


8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

AC 120V/60Hz have been tested, and the worst result recorded was report as below:

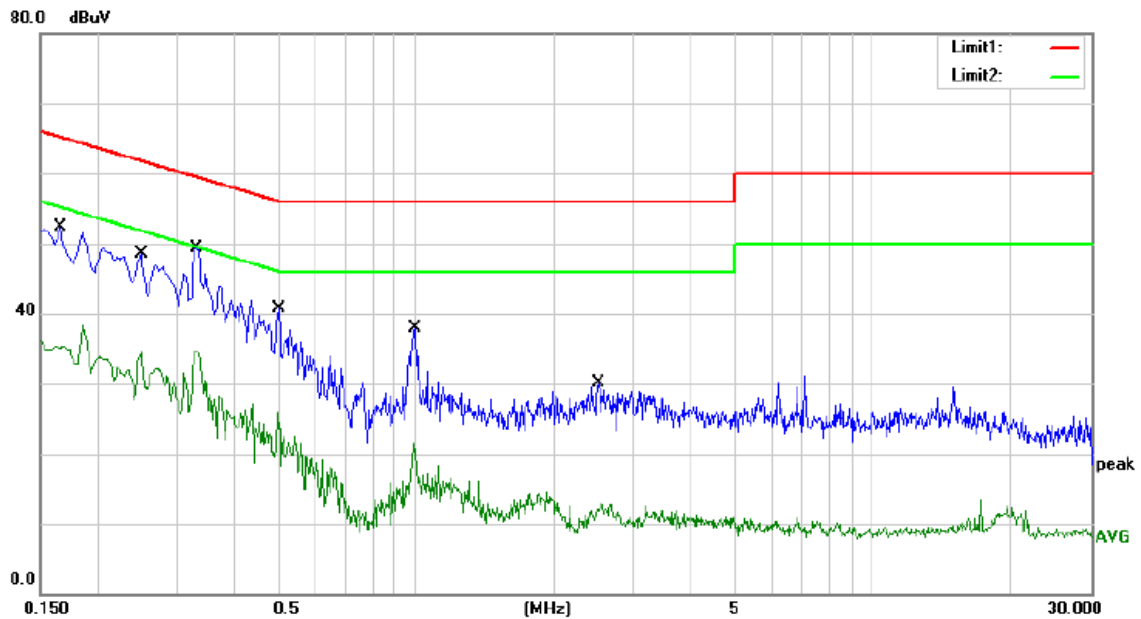


Site: Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: WIFI Connecting mode
 Note:

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	42.62	9.60	52.22	65.16	-12.94	QP	
2		0.1660	28.76	9.60	38.36	55.16	-16.80	AVG	
3		0.2500	38.97	9.63	48.60	61.76	-13.16	QP	
4		0.2500	24.85	9.63	34.48	51.76	-17.28	AVG	
5	*	0.3300	39.74	9.65	49.39	59.45	-10.06	QP	
6		0.3300	24.99	9.65	34.64	49.45	-14.81	AVG	
7		0.5020	31.07	9.70	40.77	56.00	-15.23	QP	
8		0.5020	16.27	9.70	25.97	46.00	-20.03	AVG	
9		0.9940	28.29	9.70	37.99	56.00	-18.01	QP	
10		0.9940	11.75	9.70	21.45	46.00	-24.55	AVG	
11		2.5100	20.38	9.80	30.18	56.00	-25.82	QP	
12		2.5100	3.07	9.80	12.87	46.00	-33.13	AVG	

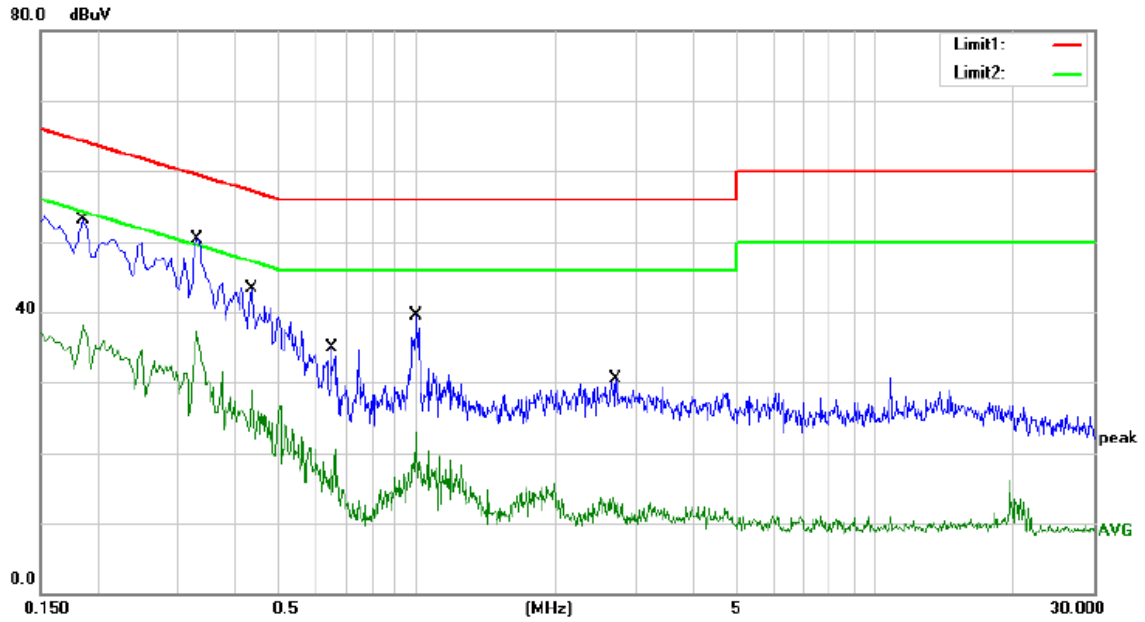

Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: WIFI Connecting mode
 Note:

Phase: *N*
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1860	43.42	9.61	53.03	64.21	-11.18	QP	
2		0.1860	28.47	9.61	38.08	54.21	-16.13	AVG	
3	*	0.3300	40.68	9.65	50.33	59.45	-9.12	QP	
4		0.3300	27.57	9.65	37.22	49.45	-12.23	AVG	
5		0.4340	33.54	9.68	43.22	57.18	-13.96	QP	
6		0.4340	19.27	9.68	28.95	47.18	-18.23	AVG	
7		0.6500	25.11	9.70	34.81	56.00	-21.19	QP	
8		0.6500	11.03	9.70	20.73	46.00	-25.27	AVG	
9		0.9980	29.79	9.70	39.49	56.00	-16.51	QP	
10		0.9980	13.27	9.70	22.97	46.00	-23.03	AVG	
11		2.7140	20.63	9.80	30.43	56.00	-25.57	QP	
12		2.7140	3.93	9.80	13.73	46.00	-32.27	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S antenna is PCB antenna. The antenna's gain is 3 dBi, and the antenna can't be replaced by the user which in accordance to section 15.203, please refer to the photos.