



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## **Code of Federal Regulations 47 Part 15 – Radio Frequency Devices**

### **Subpart C – Intentional Radiators**

#### **Section 15.247**

Operation within the bands 902 - 928 MHz,  
2400 - 2483.5 MHz, 5725 - 5875 MHz,  
and 24.0 - 24.25 GHz.

**THE FOLLOWING MEETS THE ABOVE TEST SPECIFICATION**

#### **FCC ID: A5UMYT360HH**

Formal Name: Maytag Connect 360 Handheld  
Kind of Equipment: Transceiver Classic Bluetooth to Infrared  
Frequency Range: 2402 to 2480 MHz  
Test Configuration: Tabletop  
Model Number(s): MC360HH  
Model(s) Tested: MC360HH  
Serial Number(s): 0003  
Date of Tests: December 21<sup>st</sup> to December 29<sup>th</sup> 2016, and March 18<sup>th</sup> 2017  
Test Conducted For: Whirlpool Corporation  
750 Monte Rd  
Benton Harbor, MI 49022, USA

**NOTICE:** “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 - 2017 D.L.S. Electronic Systems, Inc.

#### **COPYRIGHT NOTICE**

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



Company:  
Model Tested:  
Report Number:  
DLS Project:

Whirlpool Corporation  
MC360HH  
22617  
8153

166 South Carter, Genoa City, WI 53128

## SIGNATURE PAGE

Tested By:

A handwritten signature in black ink that reads "Paul Leo".

Paul Leo  
Test Engineer

A handwritten signature in black ink that reads "Craig Brandt".

Craig Brandt  
Senior Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf".

William Stumpf  
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson".

Brian Mattson  
General Manager



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## Table of Contents

|      |  |    |
|------|--|----|
| i.   | Cover Page .....   | 1  |
| ii.  | Signature Page .....   | 2  |
| iii. | Table of Contents .....  | 3  |
| iv.  | NVLAP Certificate of Accreditation .....                                 | 4  |
| 1.0  | Summary of Test Report .....   | 5  |
| 2.0  | Introduction .....   | 6  |
| 3.0  | Test Facilities .....  | 6  |
| 4.0  | Description of Test Sample .....   | 6  |
| 5.0  | Test Equipment .....   | 8  |
| 6.0  | Test Arrangements .....  | 10 |
| 7.0  | Test Conditions .....  | 10 |
| 8.0  | Modifications Made To EUT For Compliance .....                           | 11 |
| 9.0  | Additional Descriptions .....  | 11 |
| 10.0 | FCC 15.31 (e) Supply Voltage Requirement statement .....                 | 11 |
| 11.0 | FCC 15.23 Antenna Requirement statement .....                            | 12 |
| 12.0 | Results .....  | 12 |
| 13.0 | Conclusion .....   | 12 |
|      | Appendix A – Test Setup Photos .....                                     | 13 |
|      | Appendix B – Measurement Data .....                                      | 17 |
|      | B1.0 Duty Cycle during continuous Low, Mid, & High channel testing ..... | 17 |
|      | B2.0 Occupied Bandwidth (20 dB bandwidth) .....                          | 20 |
|      | B3.0 Carrier Frequency Separation .....                                  | 22 |
|      | B4.0 Number of Hopping Frequencies .....                                 | 24 |
|      | B5.0 Time of Occupancy (dwell time) .....                                | 26 |
|      | B6.0 Output Power .....  | 29 |
|      | B7.0 Operating Band-Edge – RF Conducted .....                            | 33 |
|      | B8.0 Restricted Band-Edge – Radiated .....                               | 38 |
|      | B9.0 Spurious Emissions – RF Conducted .....                             | 47 |
|      | B10.0 Spurious Emissions – Radiated in Restricted Bands .....            | 63 |
|      | B11.0 AC Line Conducted Emissions .....                                  | 73 |
|      | Appendix C – Measurement Uncertainty .....                               | 99 |



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

United States Department of Commerce  
National Institute of Standards and Technology



**Certificate of Accreditation to ISO/IEC 17025:2005**

NVLAP LAB CODE: 100276-0

**D.L.S. Electronic Systems, Inc.**  
Wheeling, IL

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2016-08-16 through 2017-09-30

*Effective Dates*



*[Signature]*  
For the National Voluntary Laboratory Accreditation Program

**ELECTROMAGNETIC  
COMPATIBILITY &  
TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

**Emissions**

**Designation**

Off-site test location

**Description**

D.L.S. Electronics performs radiated emissions testing at an additional location, 166 South Carter Street, Genoa City, WI 53128.



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## 1.0 Summary of Test Report

It was determined that the Whirlpool Corporation, Maytag Connect 360 Handheld, model MC360HH, complies with the requirements of CFR 47 Part 15 Subpart C Section 15.247.

### Subpart C Section 15.247 Applicable Technical Requirements Tested:

| Section                             | Description   | Procedure                                | Note | Compliant? |
|-------------------------------------|---|--|------|------------|
| Informative                         | Duty Cycle  | ANSI C63.10-2013<br>Section 11.6(b)      | 1    | NA         |
| Informative                         | Occupied Bandwidth<br>(20 dB Bandwidth)                 | ANSI C63.10-2013<br>Section 6.9.2        | 1    | NA         |
| 15.247(a)(1)                        | Carrier Frequency<br>Separation                         | ANSI C63.10-2013<br>Section 7.8.2        | 1    | Yes        |
| 15.247(a)(1)(iii)                   | Number of Hopping<br>Frequencies                        | ANSI C63.10-2013<br>Section 7.8.3        | 1    | Yes        |
| 15.247(a)(1)(iii)                   | Time of Occupancy (dwell<br>time)                       | ANSI C63.10-2013<br>Section 7.8.4        | 1    | Yes        |
| 15.247(b)(1)                        | Output Power  | ANSI C63.10-2013<br>Section 7.8.5        | 1    | Yes        |
| 15.247(d)                           | Operating Band-Edge – RF<br>Conducted                   | ANSI C63.10-2013<br>Section 6.10.4       | 1    | Yes        |
| 15.247(d)<br>15.205(a)<br>15.209(a) | Restricted Band-Edge –<br>Radiated                      | ANSI C63.10-2013<br>Section 6.10.5.2     | 2    | Yes        |
| 15.247(d)                           | Spurious Emissions – RF<br>Conducted                    | ANSI C63.10-2013<br>Section 7.8.8        | 1    | Yes        |
| 15.247(d)<br>15.205(a)<br>15.209(a) | Spurious Emissions –<br>Radiated in Restricted<br>Bands | ANSI C63.10-2013<br>Sections 6.5 and 6.6 | 2    | Yes        |
| 15.207                              | AC Line Conducted<br>Emissions                          | ANSI C63.10-2013<br>Section 6.2          | 3    | Yes        |

Note 1: RF conducted measurement.

Note 2: Radiated emission measurement.

Note 3: AC power line conducted measurement.



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## 2.0 Introduction

From December 21<sup>st</sup> to December 29<sup>th</sup> 2016, and March 18<sup>th</sup> 2017, the Maytag Connect 360 Handheld, model MC360HH, as provided from Whirlpool Corporation was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.247. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

## 3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

### Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc.  
166 S. Carter Street  
Genoa City, Wisconsin 53128

### Wheeling Test Facility:

D.L.S. Electronic Systems, Inc.  
1250 Peterson Drive  
Wheeling, IL 60090

**FCC Registration #90531**

## 4.0 Description of Test Sample

### Description:

The Maytag Connect 360 Handheld battery operated device communicates between Maytag Commercial Laundry Machines and Smart Phones or Tablets. The Maytag Connect 360 Handheld communicates with Infrared to the Commercial Laundry Washers and Dryers, and communicates to the Smart Phone or Tablet using Bluetooth Classic. It is used to set appliance pricing, and set cycle times, collects counts of cycles run by the appliance, and collects any error code from the appliances.

### Type of Equipment / Frequency Range:

Hand-Held (portable) / 2402-2480 MHz

### Physical Dimensions of Equipment Under Test:

Length: 3 in., Width: 2 in., Height: 1 in.



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

#### 4.0 Description of Test Sample - continued

##### Power Source:

3.7 Volt rechargeable battery  
120V / 60Hz power supply for charging the battery (used for AC line conducted testing)

##### Internal Frequencies:

32.768 kHz, 26 MHz

##### Transmit / Receive Frequencies Used For Test Purpose:

Low channel: 2402 MHz, Middle channel: 2441 MHz, High channel: 2480 MHz

##### Type of Modulation(s) / Antenna Type:

Gaussian frequency-shift keying– GFSM, BR/EDR

Ceramic Monopole (0.5 dBi gain)

##### Description of Circuit Board(s) / Part Number:

|            |                 |
|------------|-----------------|
| Assy - PCB | W10870145 Rev 3 |
|------------|-----------------|



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## 5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

### Radiated 30 – 1000 MHz (Site 2)

| Description   | Manufacturer    | Model Number | Serial Number | Frequency Range  | Cal Date | Cal Due Dates |
|---------------|-----------------|--------------|---------------|------------------|----------|---------------|
| Receiver      | Rohde & Schwarz | ESI 40       | 837808/006    | 20 Hz – 40 GHz   | 6-23-16  | 6-23-17       |
| Preamplifier  | Rohde & Schwarz | TS-PR10      | 032001/004    | 9 kHz – 1 GHz    | 12-2-16  | 12-2-17       |
| Antenna       | EMCO            | 3104C        | 00054892      | 20 MHz – 200 MHz | 3-11-16  | 3-11-18       |
| Antenna       | EMCO            | 3146         | 1205          | 200 MHz – 1 GHz  | 3-23-16  | 3-23-18       |
| Test Software | Rohde & Schwarz | ESK-1        | V1.7.1        | N/A              | N/A      | N/A           |

### AC Line Conducted (Screen Room)

| Description       | Manufacturer    | Model Number       | Serial Number | Frequency Range  | Cal Date | Cal Due Dates |
|-------------------|-----------------|--------------------|---------------|------------------|----------|---------------|
| Receiver          | Narda PMM       | 9010F              | 020WW40102    | 10Hz-50MHz       | 6-23-16  | 6-23-17       |
| LISN              | Solar           | 9252-50-R-24-BNC   | 961019        | 9 kHz – 30 MHz   | 5-4-16   | 5-4-17        |
| Filter- High-Pass | SOLAR           | 7930-120           | 090702        | 120 kHz – 30 MHz | 11-4-16  | 11-4-17       |
| Limiter           | Electro-Metrics | EM-7600            | 705           | 9 kHz – 30 MHz   | 11-4-16  | 11-4-17       |
| Test Software     | Narda PMM       | PMM Emission Suite | Rel.2.17      | N/A              | N/A      | N/A           |





Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## 5.0 Test Equipment - continued

### Radiated 1-26 GHz (Site G1)

| Description       | Manufacturer    | Model Number             | Serial Number | Frequency Range | Cal Date | Cal Due Dates |
|-------------------|-----------------|--------------------------|---------------|-----------------|----------|---------------|
| Receiver          | Rohde & Schwarz | ESI 40                   | 837808/005    | 20 Hz – 40 GHz  | 6-23-16  | 6-23-17       |
| Preamp            | Ciao            | CA118-4010               | 101           | 1GHz-18GHz      | 1-20-16  | 1-20-17*      |
| Horn Antenna      | EMCO            | 3115                     | 9502-4451     | 1-18GHz         | 6-1-15   | 6-1-17        |
| Filter- High-Pass | Q-Microwave     | 100462                   | 1             | 4.2GHz-18GHz    | 8-1-16   | 8-1-17        |
| Preamp            | Miteq           | AMF-8B-180265-40-10P-H/S | 438727        | 18GHz-26GHz     | 6-6-16   | 6-6-17        |
| Horn Antenna      | EMCO            | 3116                     | 2549          | 18 – 40GHz      | 9-2-16   | 9-2-18        |
| High Pass Filter  | Planar          | CL22500-9000-CD-SS       | PF1229/0728   | 15-40 GHz       | 6-5-16   | 6-5-17        |
| Test Software     | Rohde & Schwarz | ESK-1                    | V1.7.1        | N/A             | N/A      | N/A           |

\* Testing using this equipment (radiated emissions 1-18 GHz) was completed before 1-20-17

### RF Conducted / Other

| Description      | Manufacturer       | Model Number | Serial Number | Frequency Range | Cal Date | Cal Due Dates |
|------------------|--------------------|--------------|---------------|-----------------|----------|---------------|
| Receiver         | Rohde & Schwarz    | ESI 26       | 837491/010    | 20 Hz – 26 GHz  | 6-23-16  | 6-23-17       |
| 20 dB attenuator | Aeroflex/weinschel | 75A-20-12    | 1071          | DC – 40 GHz     | 6-5-16   | 6-5-17        |



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## 6.0 Test Arrangements

### Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.10-2013, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up. See Appendix C for measurement uncertainty.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

| Frequency Range   | Bandwidth (-6 dB) |
|-------------------|-------------------|
| 10 to 150 kHz     | 200 Hz            |
| 150 kHz to 30 MHz | 9 kHz             |
| 30 MHz to 1 GHz   | 120 kHz           |
| Above 1 GHz       | 1 MHz             |

### RF Conducted Emissions Measurement Arrangement:

All RF conducted emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.10-2013, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up. See Appendix C for measurement uncertainty.

## 7.0 Test Conditions

### Temperature and Humidity:

67°F at 28% RH unless otherwise noted on test data

### Supply Voltage:

3.7 Volt rechargeable battery

120V / 60Hz power supply for charging the battery (used for AC line conducted testing) – Stontronics Ltd. Model: DSA-12CA-05



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## 8.0 Modifications Made To EUT For Compliance

No modifications were made to the EUT.

## 9.0 Additional Descriptions

The EUT was programmed for continuous frequency hopping on all channels.

The EUT was programmed for continuous transmission on Low, Mid, and High channels, with a 95% duty cycle.

For radiated emissions, the EUT with was rotated through 3 orthoganal axis to find worst-case.

## 10.0 FCC 15.31 (e) Supply Voltage Requirement statement

**FCC 15.31 (e)** - For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

**Compliance Statement:** This device complies with the requirements of Part 15.31(e):

- ☒ This device is battery operated. All tests were performed using a new (or fully charged) battery.
- ☐ This device provides a constant regulated voltage to the RF circuitry regardless of supply voltage (see schematic diagrams).
- ☐ This device does not provide a constant regulated voltage to the RF circuitry regardless of supply voltage. Data has been supplied in this test report that supports compliance. Details:



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## 11.0 FCC 15.23 Antenna Requirement statement

### SECTION 15.203 ANTENNA REQUIREMENT

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.... This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221.

**Statement:** This wireless device (Intentional Radiator) meets the requirements of FCC Part 15.203:

- ☒ The antenna is permanently attached
- ☐ The antenna has a unique coupling to the intentional radiator.  
Description of coupling:
- ☐ This intentional radiator is professionally installed
- ☐ This intentional radiator, in accordance with Section 15.31(d), must be measured at the installation site.

## 12.0 Results

Measurements were performed in accordance with CFR 47 Part 15 Subpart C Section 15.247 and ANSI C63.10-2013. Graphical and tabular data can be found in Appendix B at the end of this report.

## 13.0 Conclusion

The Maytag Connect 360 Handheld, model MC360HH, as provided from Whirlpool Corporation, tested from December 21<sup>st</sup> to December 29<sup>th</sup> 2016, and March 18<sup>th</sup> 2017 **meets** the requirements of CFR 47 Part 15 Subpart C Section 15.247.

166 South Carter, Genoa City, WI 53128

**Appendix A – Test Setup Photos**

**Radiated Emissions below 1 GHz – Position 1**



**Radiated Emissions below 1 GHz – Position 2**







166 South Carter, Genoa City, WI 53128

**Appendix A – Test Setup Photos - continued**

**Radiated Emissions below 1 GHz – Position 3**

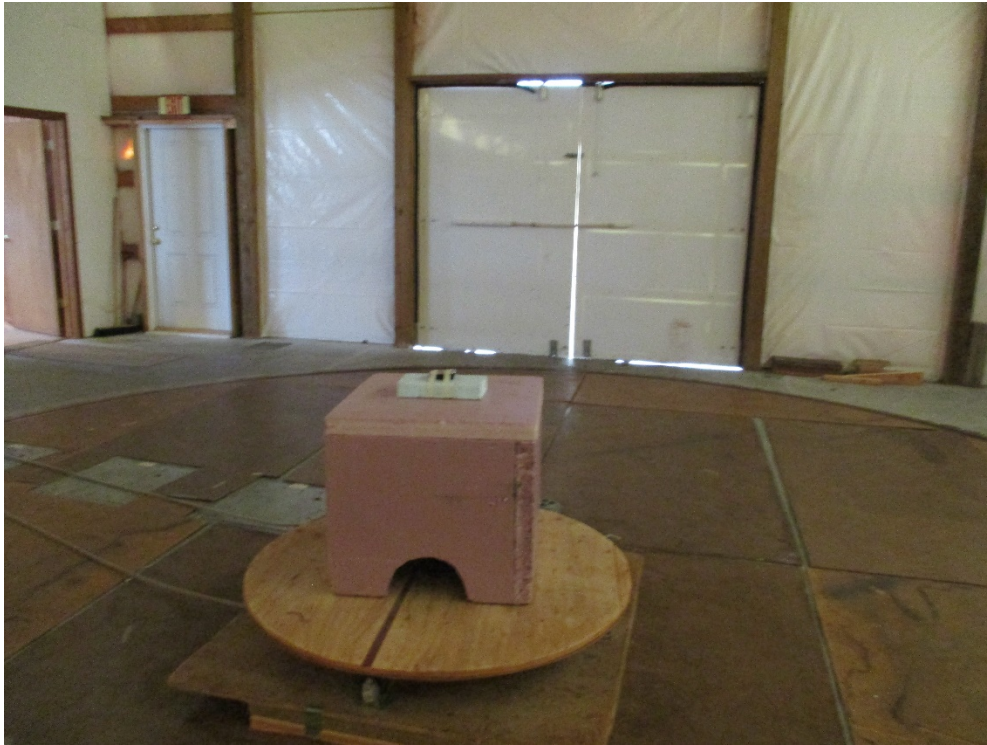

**Radiated Emissions above 1 GHz – Position 1**

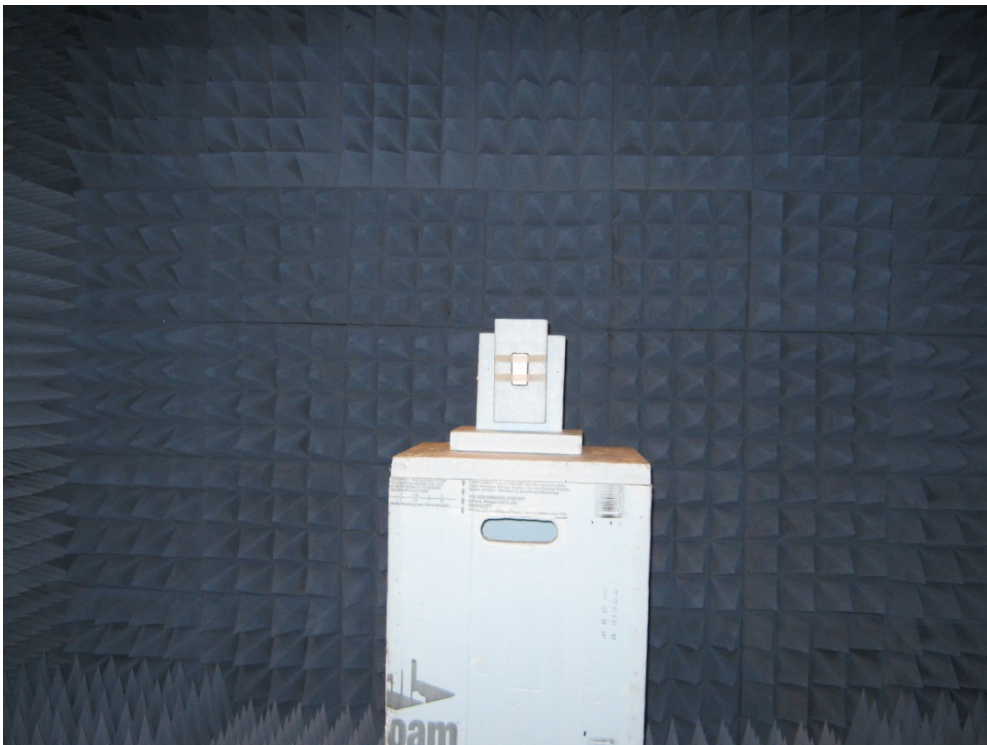

166 South Carter, Genoa City, WI 53128

**Appendix A – Test Setup Photos - continued**

**Radiated Emissions above 1 GHz – Position 2**



**Radiated Emissions above 1 GHz – Position 3**






166 South Carter, Genoa City, WI 53128

**Appendix A – Test Setup Photos - continued**

**RF Conducted**

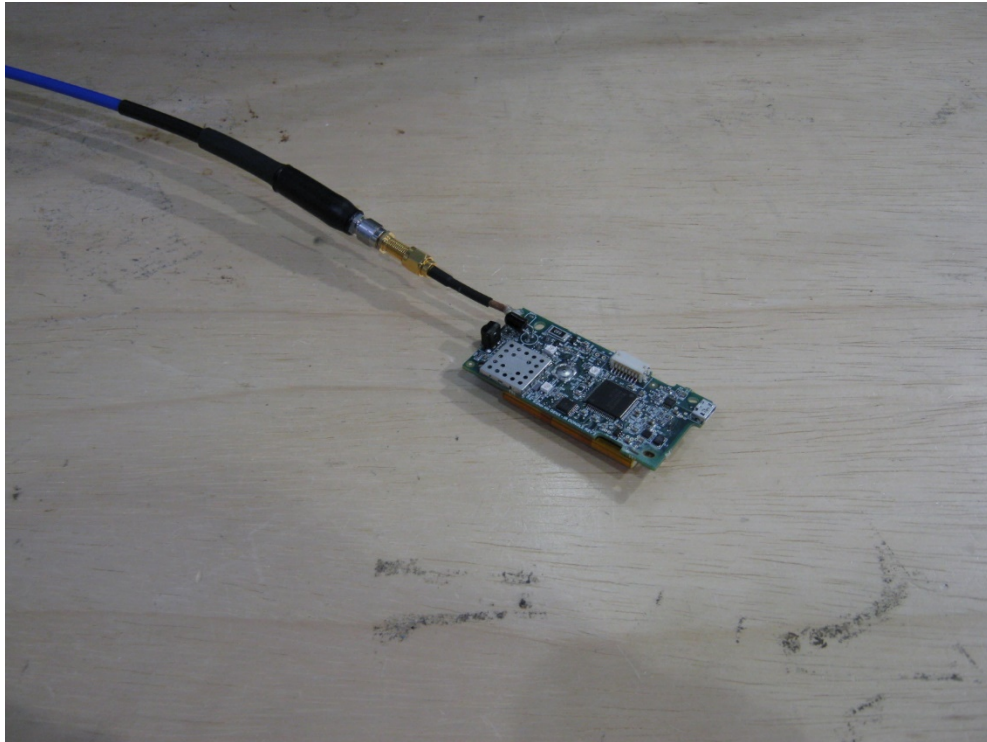

**RF Conducted**







|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B – Measurement Data

### B1.0 Duty Cycle during continuous Low, Mid, & High channel testing

**Rule Part:** Informative

**Test Procedure:** ANSI 63.10-2013, section 11.6(b)

**Limit:** Not Applicable

**Results:** Duty Cycle = 95% over a 30 ms period  
Duty Cycle Correction = 0.45 dB (for voltage measurements)

**Sample Equations:** Total on Time = 7.094188 ms  
Total on + off Time = 7.454910 ms  
Duty cycle  $x = (7.094188 \text{ ms} / 7.454910 \text{ ms}) = 0.95 = 95\%$   
 $20 \log (1.0 / .95) = 0.445$   
Duty Cycle Correction Factor = 0.45 dB (for voltage measurements)

Test Date: 12-21-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Duty Cycle - Conducted – KDB558074 (6.0)  
Operator: Paul L  
Comment: Mid Channel: 39 Frequency: 2441 MHz

1 cycle time = 7.454910 ms

Duty cycle  $x = (7.094188 \text{ ms} / 7.454910 \text{ ms}) = 0.95 = 95\%$


Power duty cycle correction factor =  $10 \log (1/0.94) = 0.22 \text{ dB}$

Voltage duty cycle correction factor =  $20 \log (1/0.94) = 0.45 \text{ dB}$

On time = 7.094188 ms



|              |     |        |        |       |
|--------------|-----|--------|--------|-------|
| Delta 1 [T1] | RBW | 10 MHz | RF Att | 30 dB |
| 0.00 dB      | VBW | 10 MHz |        |       |
| 7.094188 ms  | SWT | 30 ms  | Unit   | dBm   |
| Ref Lvl      |     |        |        |       |
| 0 dBm        |     |        |        |       |

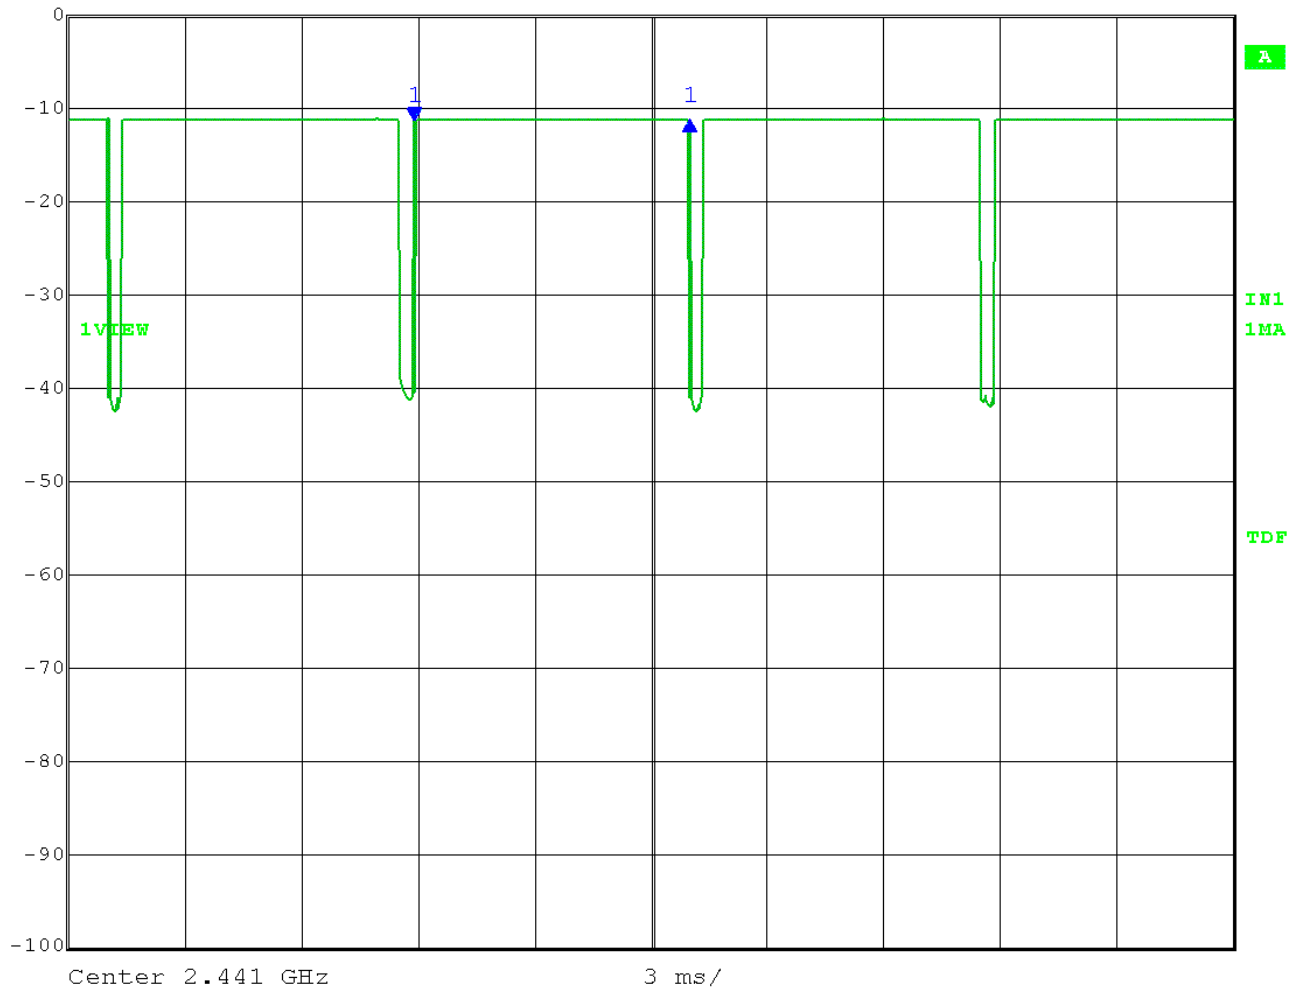


Date: 21.DEC.2016 16:30:25

Test Date: 12-21-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Duty Cycle - Conducted – KDB558074 (6.0)  
 Operator: Paul L  
 Comment: Mid Channel: 39 Frequency: 2441 MHz

1 cycle time = 7.454910 ms  
 Duty cycle x = (7.094188 ms / 7.454910 ms) = 0.95 = 95%

Power duty cycle correction factor =  $10 \log (1/0.94) = 0.22 \text{ dB}$   
 Voltage duty cycle correction factor =  $20 \log (1/0.94) = 0.45 \text{ dB}$

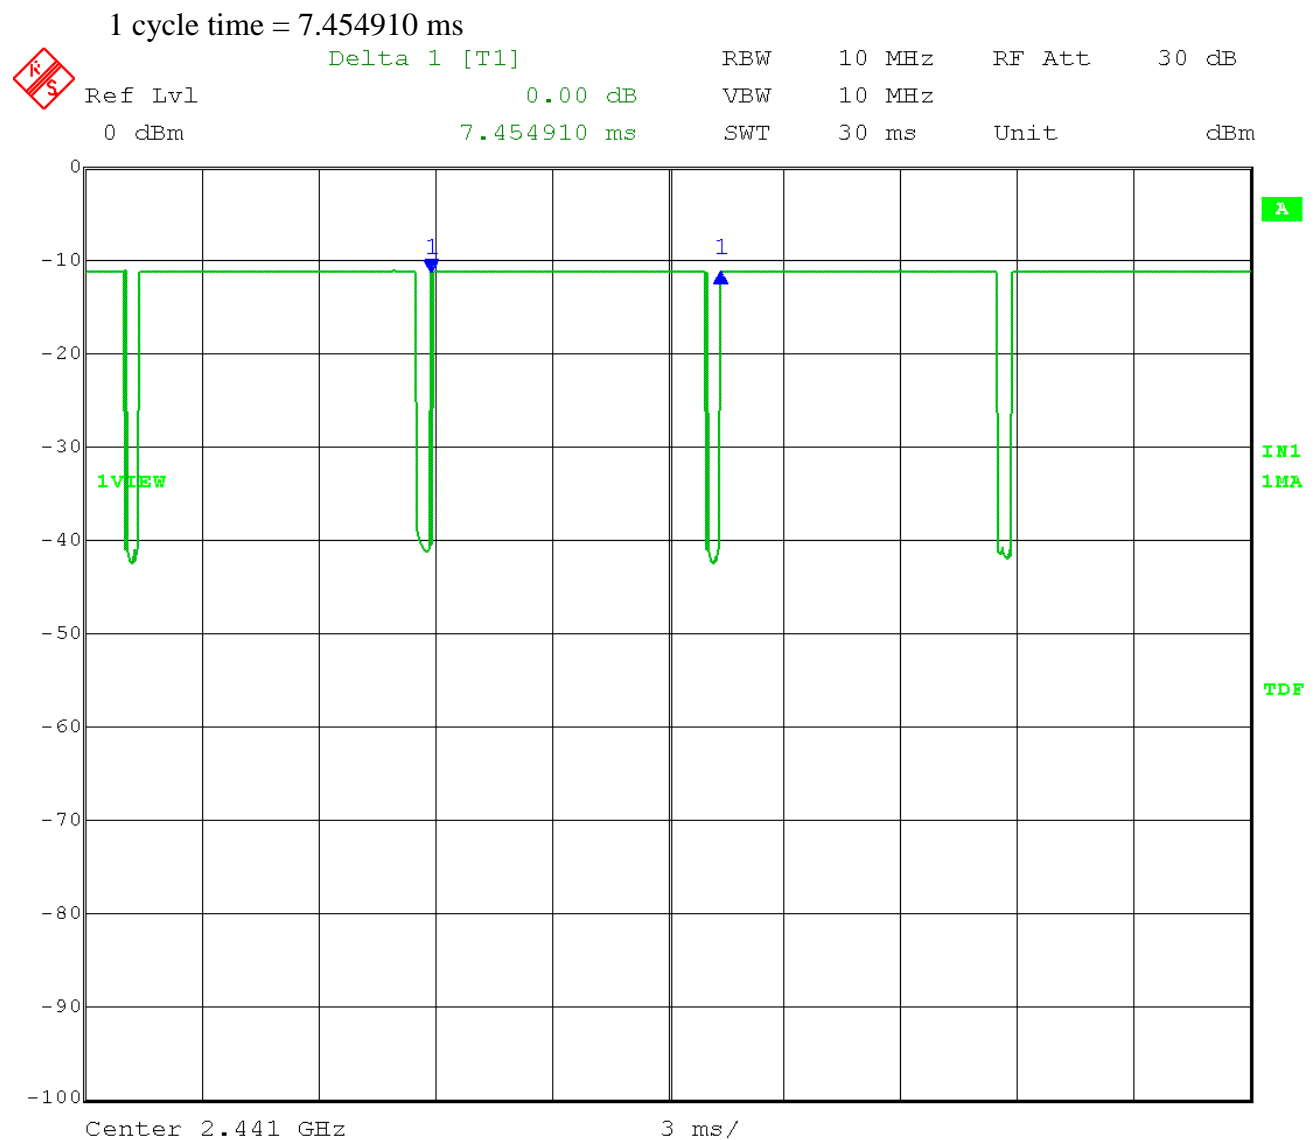

Date: 21.DEC.2016 16:33:34



Company:  
Model Tested:  
Report Number:  
DLS Project:

Whirlpool Corporation  
MC360HH  
22617  
8153

166 South Carter, Genoa City, WI 53128

## Appendix B

### B2.0 Occupied Bandwidth (20 dB bandwidth)

**Rule Part:** Informative

**Test Procedure:** ANSI C63.10-2013, section 6.9.2


**Limit:** Not Applicable

**Results:** 20 dB bandwidth = 806 kHz

**Notes:** The EUT was set to transmit at its maximum power and maximum duty cycle (95%). The EUT was tested at the middle channel of operation.

Test Date: 02-28-2017  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: 20 dB Bandwidth  
 Operator: Craig B  
 Comment: Mid channel  
 SPAN: between 2 and 5 times the 20 dB Bandwidth  
 RBW: between 1% and 5% of the 20 dB Bandwidth  
 Peak detector; max hold

20 dB Bandwidth = 806 kHz

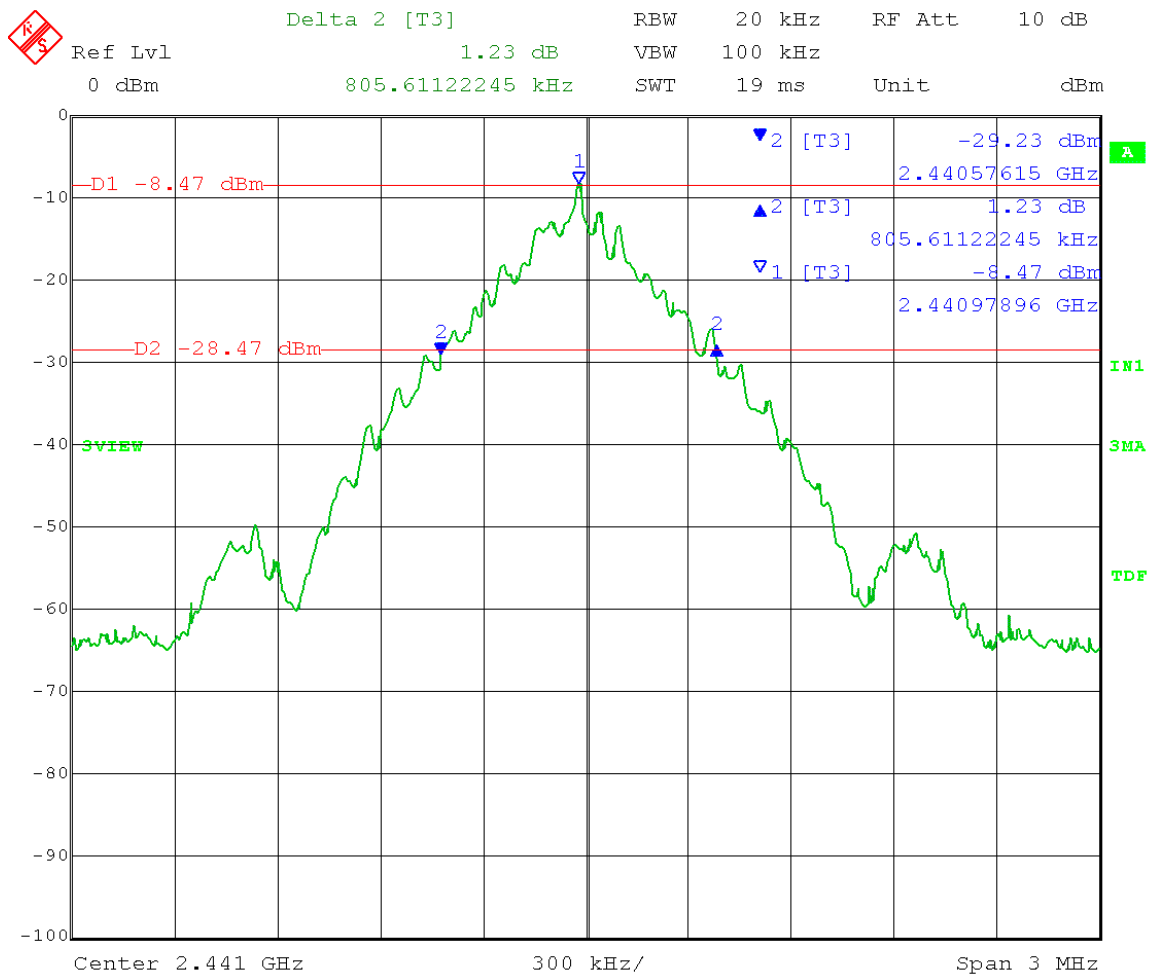

Date: 28.FEB.2017 10:25:55



Company:  
Model Tested:  
Report Number:  
DLS Project:

Whirlpool Corporation  
MC360HH  
22617  
8153

166 South Carter, Genoa City, WI 53128

## Appendix B

### B3.0 Carrier Frequency Separation

**Rule Part:** FCC 15.247(a)(1)

**Test Procedure:** ANSI C63.10-2013, section 7.8.2


**Limit:**  $\geq 25$  kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the output power is  $< 125$  mW

**Results:** Compliant  
Frequency separation = 1.00 MHz

**Notes:** The EUT was set to transmit on all channels in a continuous hopping mode.

Test Date: 03-18-2017  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Carrier Frequency Separation  
 Operator: Craig B  
 Limit: Minimum separation of 25 kHz or  $\frac{2}{3}$  of the 20 dB bandwidth, whichever is greater.  
 Notes: 20 dB bandwidth = 805.6 kHz,  $\frac{2}{3}$  BW = 537.1 kHz  
 Limit: separation  $\geq$  537.1 kHz

Carrier Frequency Separation = 1.00 MHz

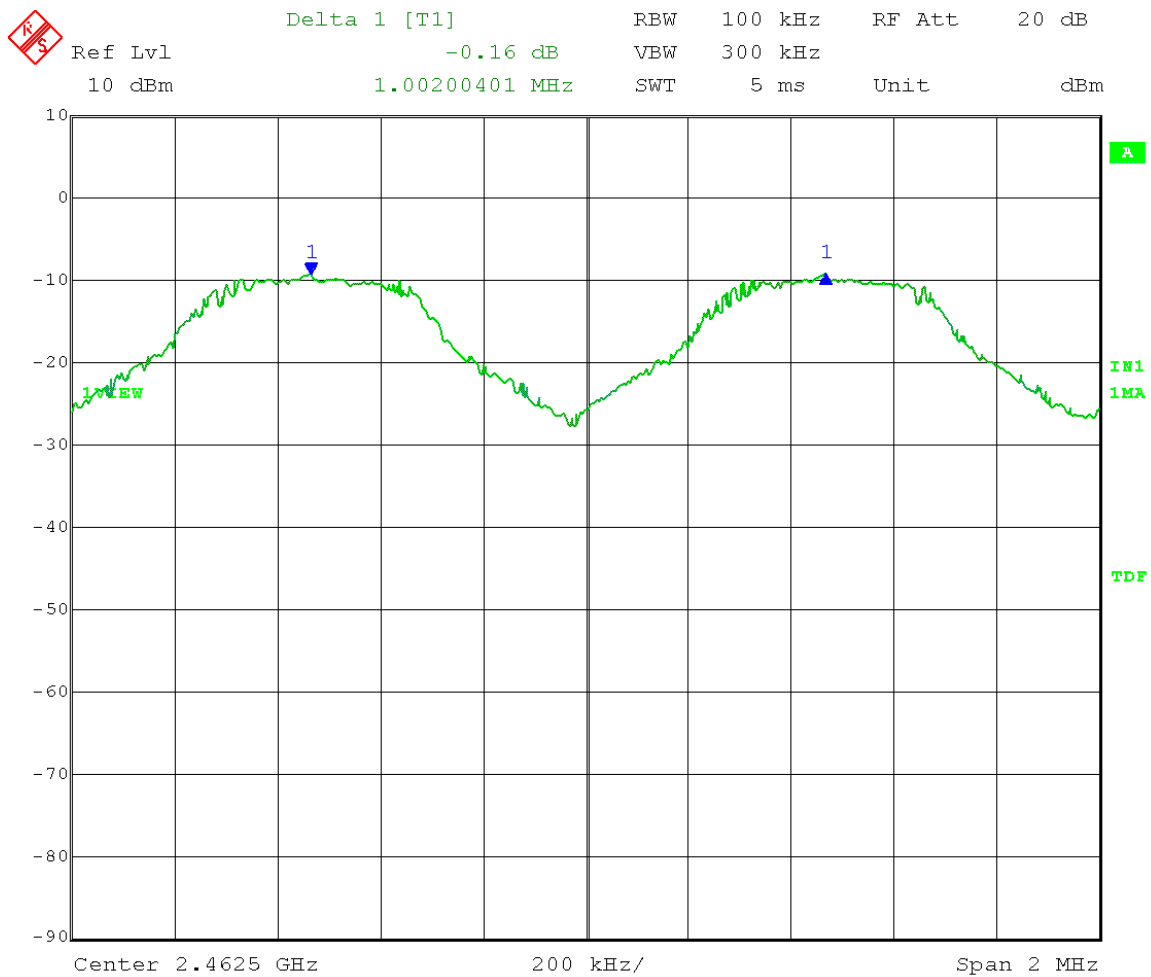

Date: 18.MAR.2017 09:46:44



Company:  
Model Tested:  
Report Number:  
DLS Project:

Whirlpool Corporation  
MC360HH  
22617  
8153

166 South Carter, Genoa City, WI 53128

## Appendix B

### B4.0 Number of Hopping Frequencies

**Rule Part:** FCC 15.247(a)(1)(iii)

**Test Procedure:** ANSI C63.10-2013, section 7.8.3

**Limit:** Shall use at least 15 channels


**Results:** Compliant  
Number of hopping frequencies = 79

**Notes:** The EUT was set to transmit on all channels in a continuous hopping mode.



Test Date: 03-18-2017  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Number of hopping frequencies  
Operator: Craig B

Number of hopping frequencies = 79

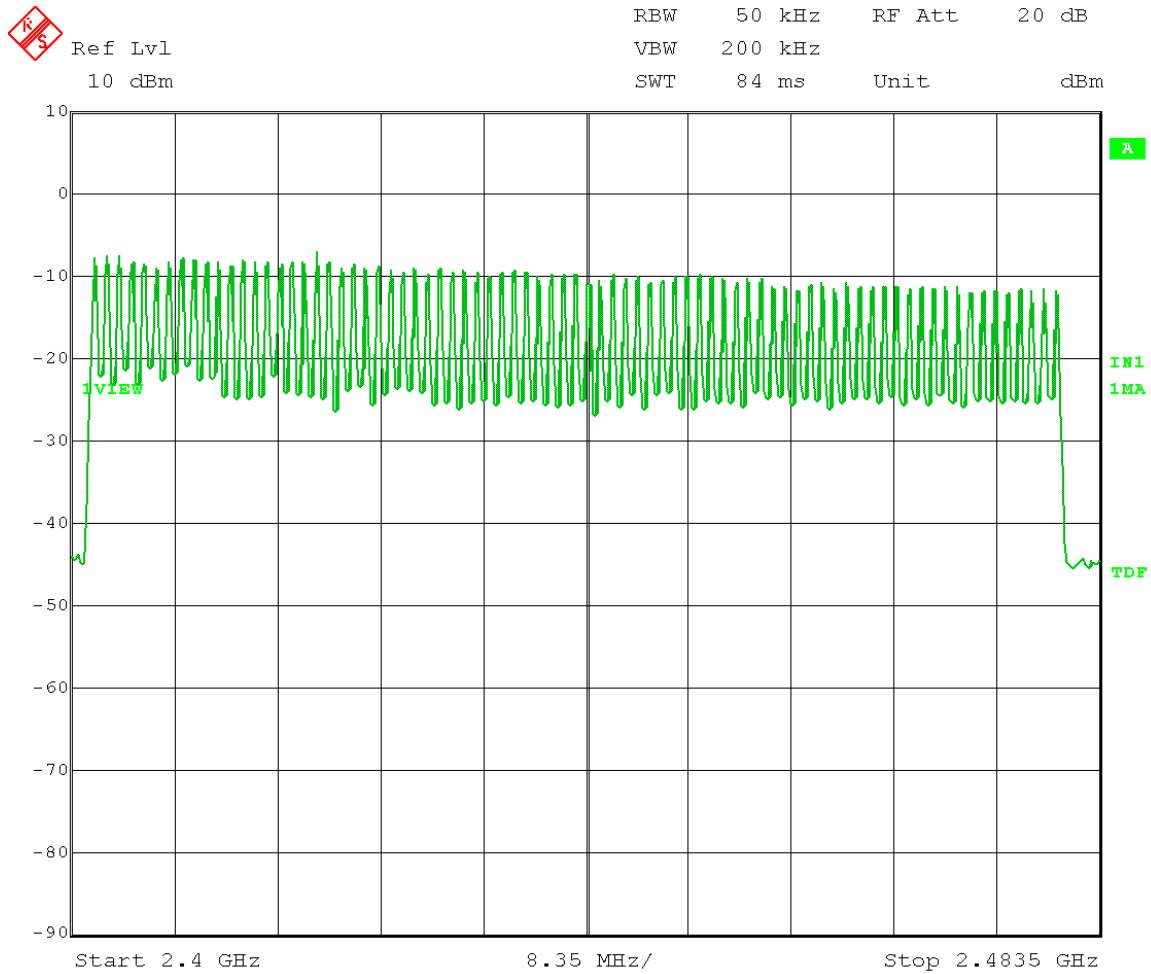

Date: 18.MAR.2017 10:04:32



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B5.0 Time of Occupancy (dwell time)

**Rule Part:** FCC 15.247(a)(1)(iii)

**Test Procedure:** ANSI C63.10-2013, section 7.8.4

**Limit:** The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**Results:** Compliant  
Average time of occupancy = 0.395 seconds

**Notes:** The EUT was set to transmit on all channels in a continuous hopping mode.


Test Date: 03-18-2017  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Time of occupancy  
 Operator: Craig B  
 Limit: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

Limit: < 0.4 seconds within a period of 31.6 seconds (0.4 seconds x 79 channels)

Time of occupancy = 8.056 ms x 49 ON times per 31.6 seconds

= **0.395 seconds** within a period of 31.6 seconds


Duration of one ON time: 8.056 ms

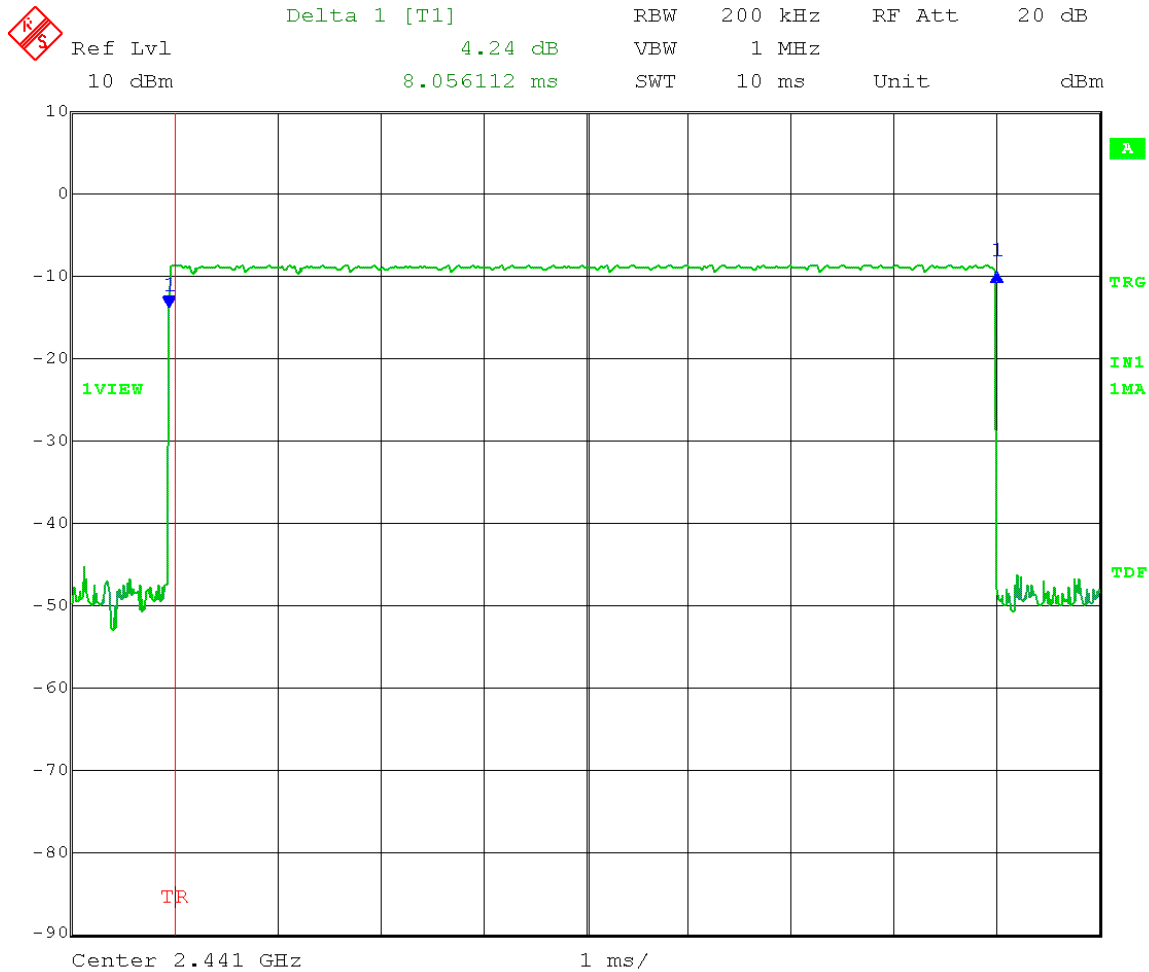

Date: 18.MAR.2017 10:23:59

Test Date: 03-18-2017  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Time of occupancy  
 Operator: Craig B  
 Limit: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

Number of ON times per 31.6 seconds: 49

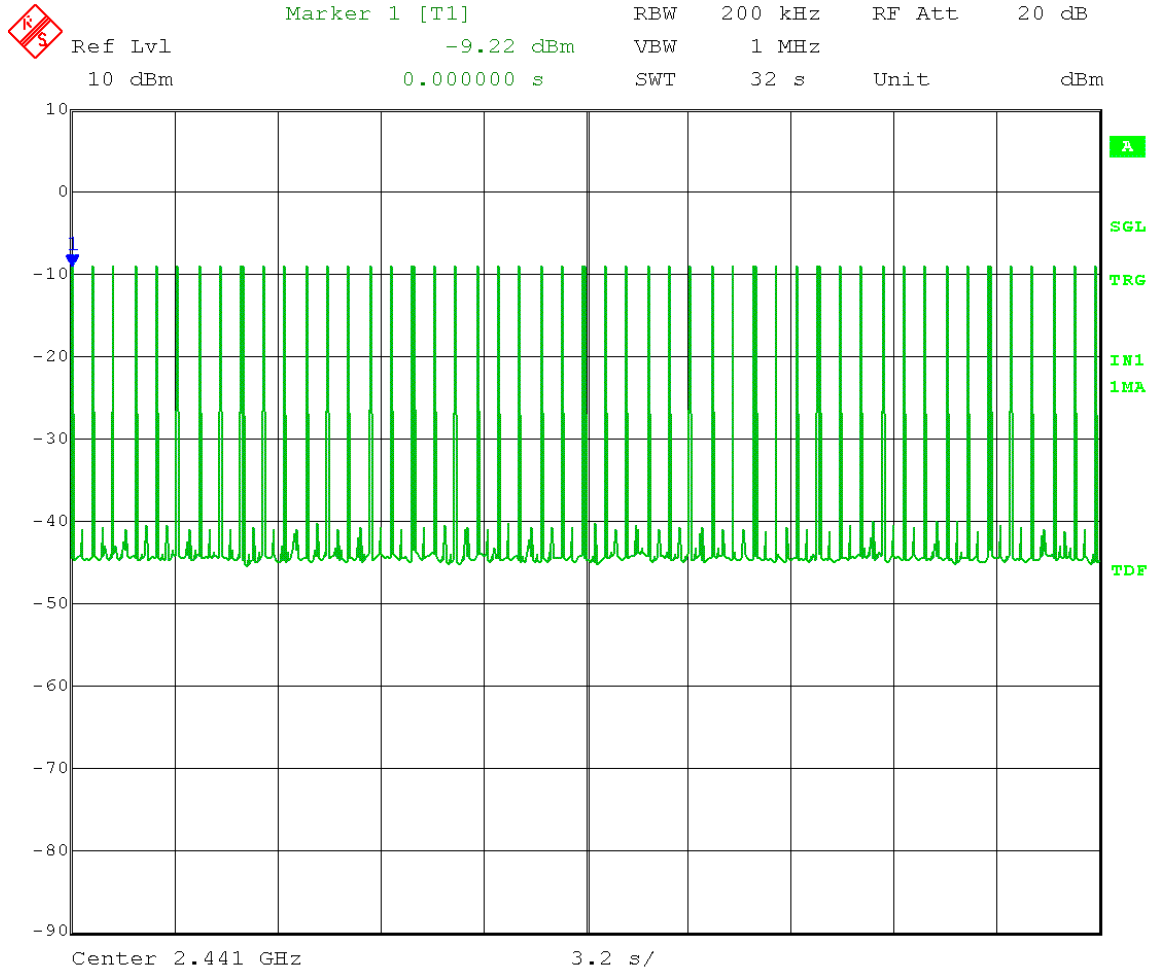

Date: 18.MAR.2017 10:52:42



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B6.0 Output Power

**Rule Part:** FCC 15.247(b)(1)

**Test Procedure:** ANSI C63.10-2013, section 7.8.5

**Limit:** 1 Watt if at least 75 hopping frequencies are used.

**Results:** Compliant  
Maximum output power = -5.43 dBm = 0.29 mW


**Notes:** This was an RF conducted measurement. The EUT was connected to the measuring equipment through a temporary external antenna connector. Cable loss and attenuation were accounted for in the transducer factors set in the analyzer.

The EUT was set to transmit continuously (95% Duty Cycle) at its maximum power level at the low, middle and high channels of the operating band. Peak Output power was measured with a spectrum analyzer.

Test Date: 12-27-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Peak output power -  
Operator: Conducted Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz

**Peak Output Power = -5.43 dBm = .286 mW**

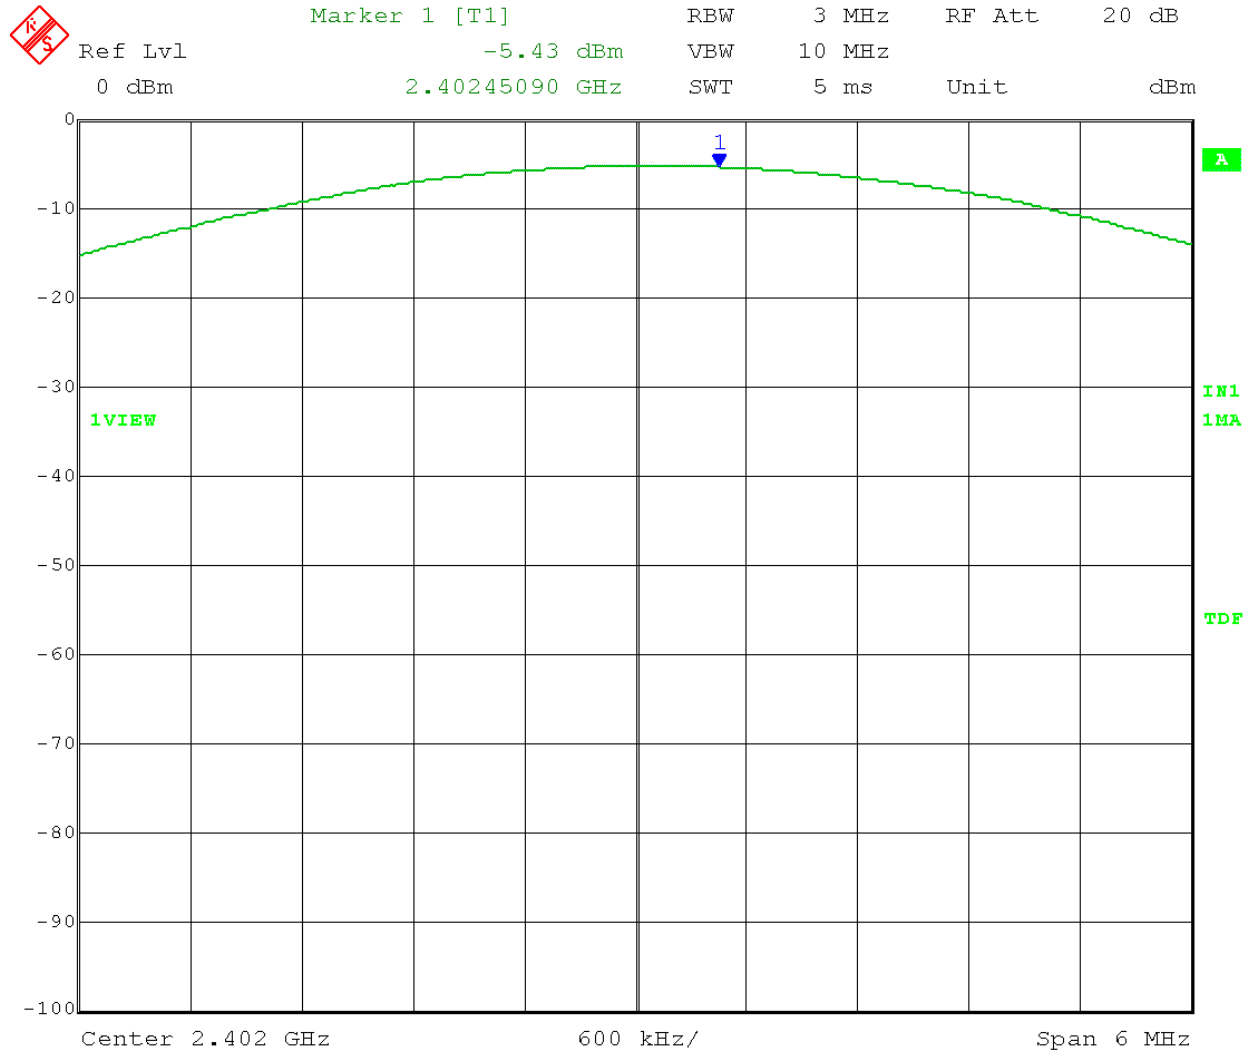


Date: 27.DEC.2016 16:34:22

Test Date: 12-27-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Peak output power - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz

**Peak Output Power = -12.39 dBm = .058 mW**

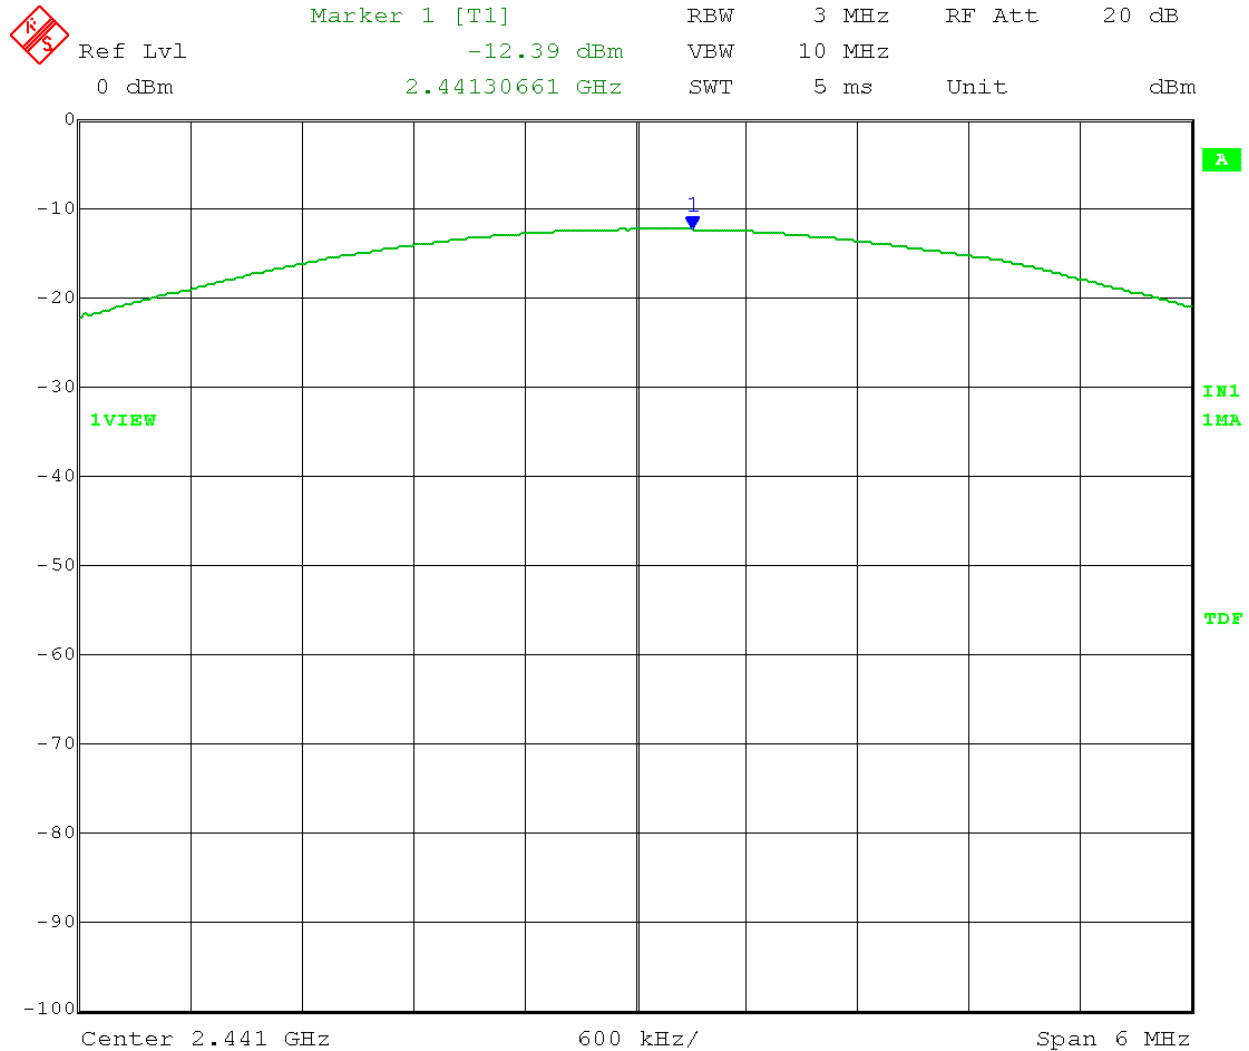


Date: 27.DEC.2016 16:50:19

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Peak output power -  
Operator: Conducted Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz

**Peak Output Power = -13.48 dBm = 0.045 mW**

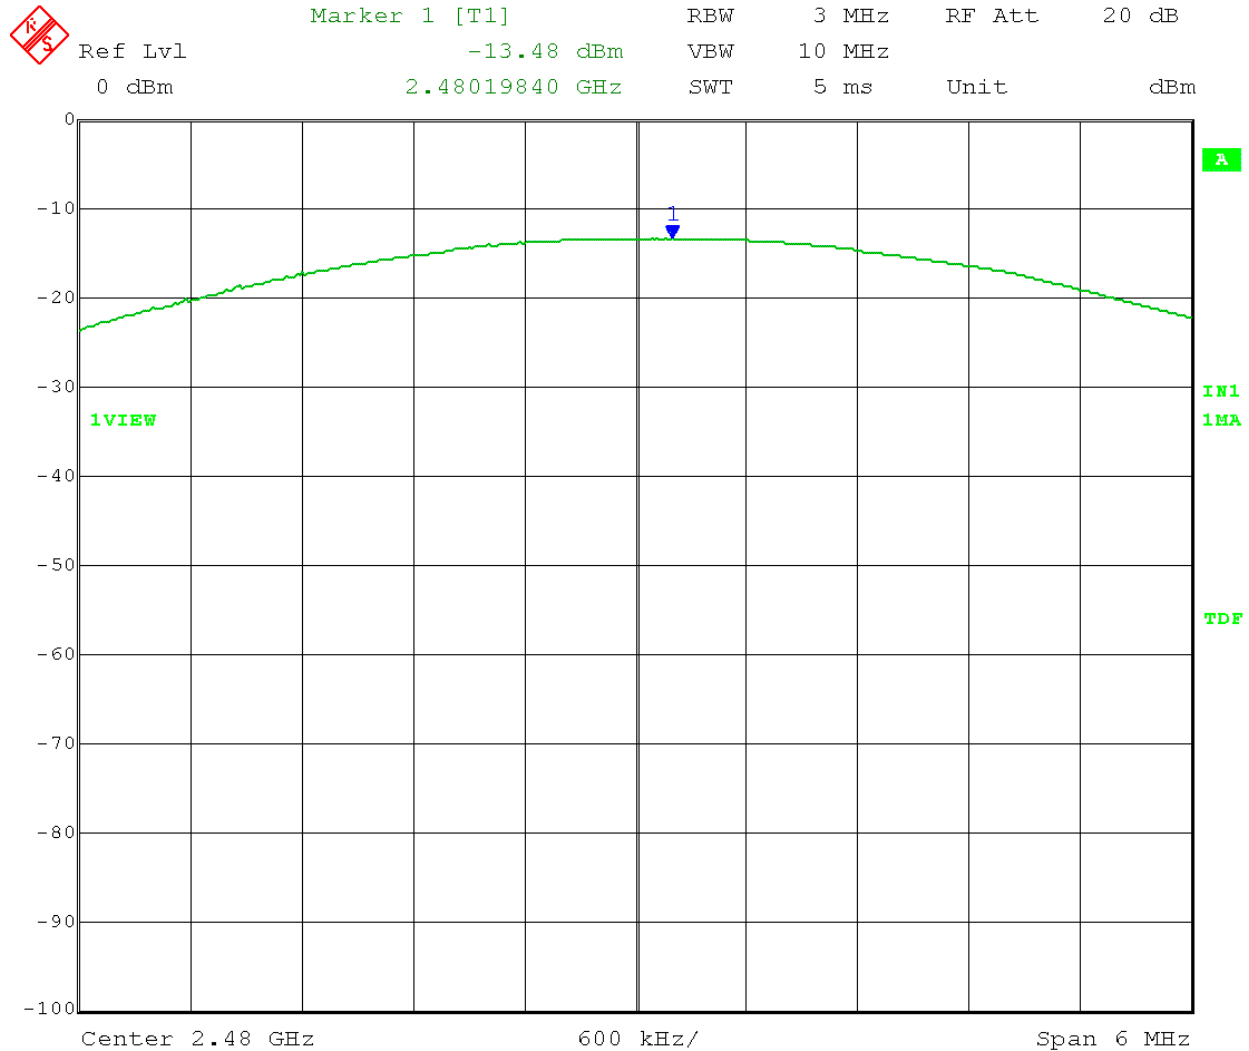

Date: 28.DEC.2016 12:16:59





|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B7.0 Operating Band-Edge – RF Conducted

**Rule Part:** FCC 15.247(d)

**Test Procedure:** ANSI C63.10-2013, section 6.10.4

**Limit:** 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

**Results:** Compliant


**Notes:** This was an RF conducted measurement. The EUT was connected to the measuring equipment through a temporary external antenna connector. Cable loss and attenuation were accounted for in the transducer factors set in the analyzer.

The EUT was set to transmit continuously (95% Duty Cycle) at its maximum power level at the low and high channels of the operating band.

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Lower operating band edge - Conducted  
Operator: Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz

**Band-Edge Frequency = 2.400 GHz**  
**Band-Edge > 20 dB Below Peak In-Band Emission**

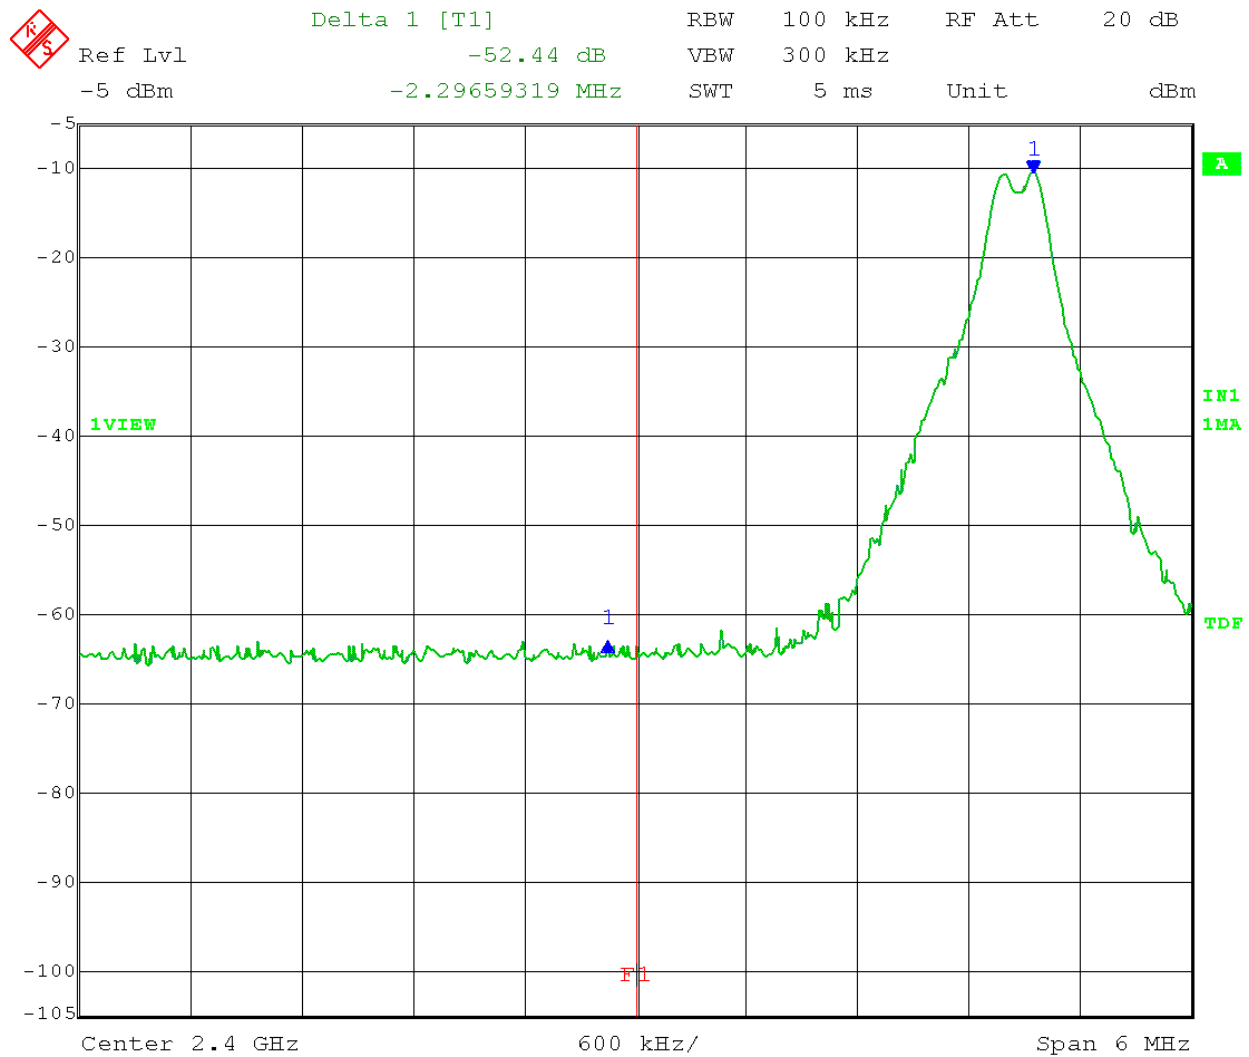


Date: 28.DEC.2016 11:11:18

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Lower operating band edge - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz


**Band-Edge Frequency = 2.4835 GHz**  
**Band-Edge > 20 dB Below Peak In-Band Emission**

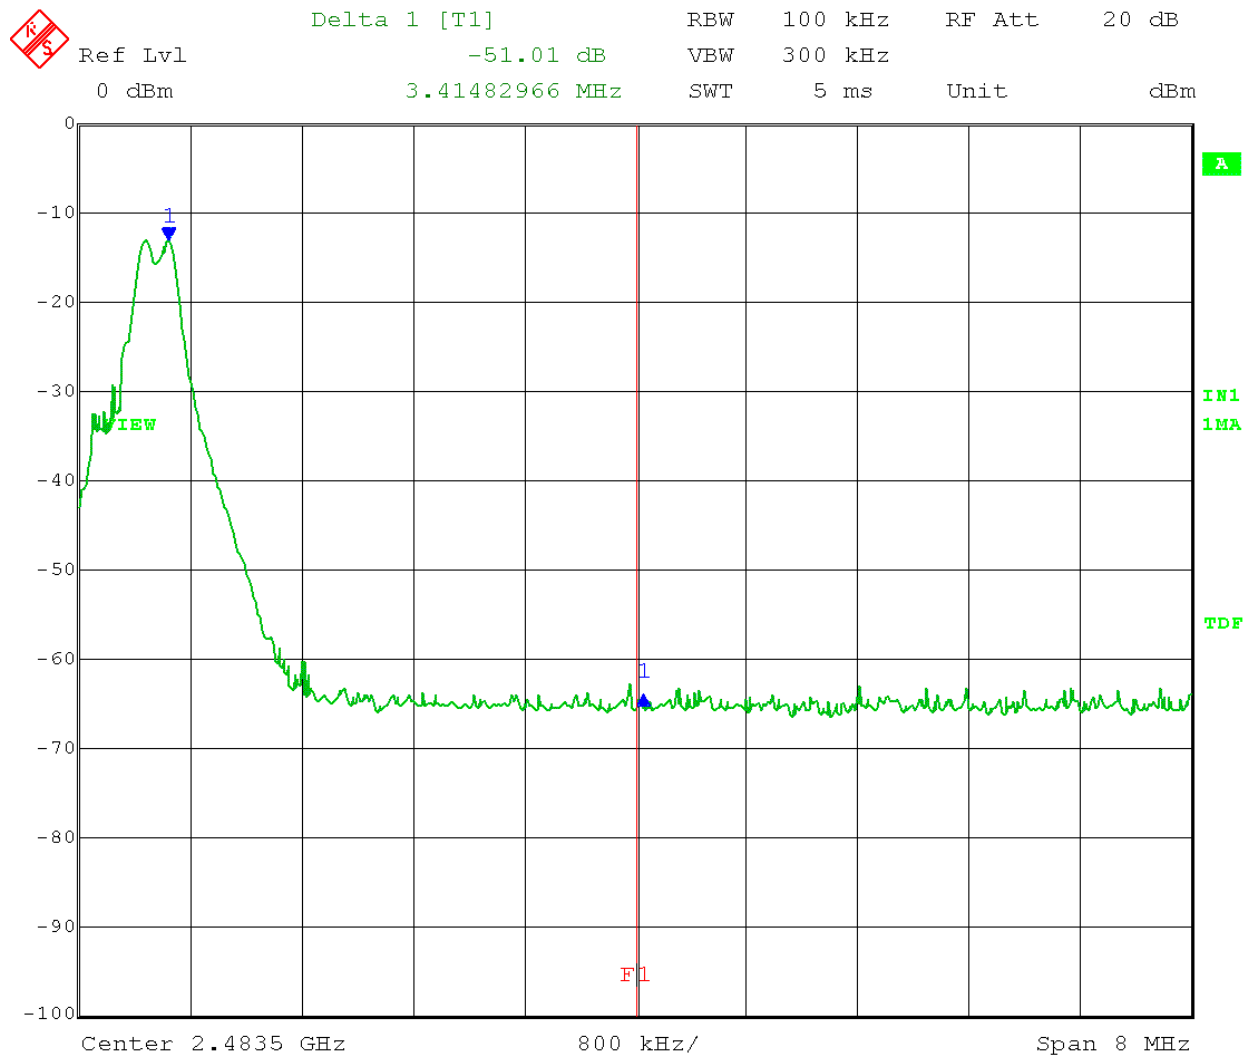

Date: 28.DEC.2016 12:25:53

Test Date: 03-18-2017  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Band-Edge  
 Operator: Craig B  
 Comment: Low Channel: Frequency – 2.402 GHz  
 Hopping ON


Band-Edge Frequency = 2.4 GHz  
 Band-Edge > 20 dB Below Peak In-Band Emission

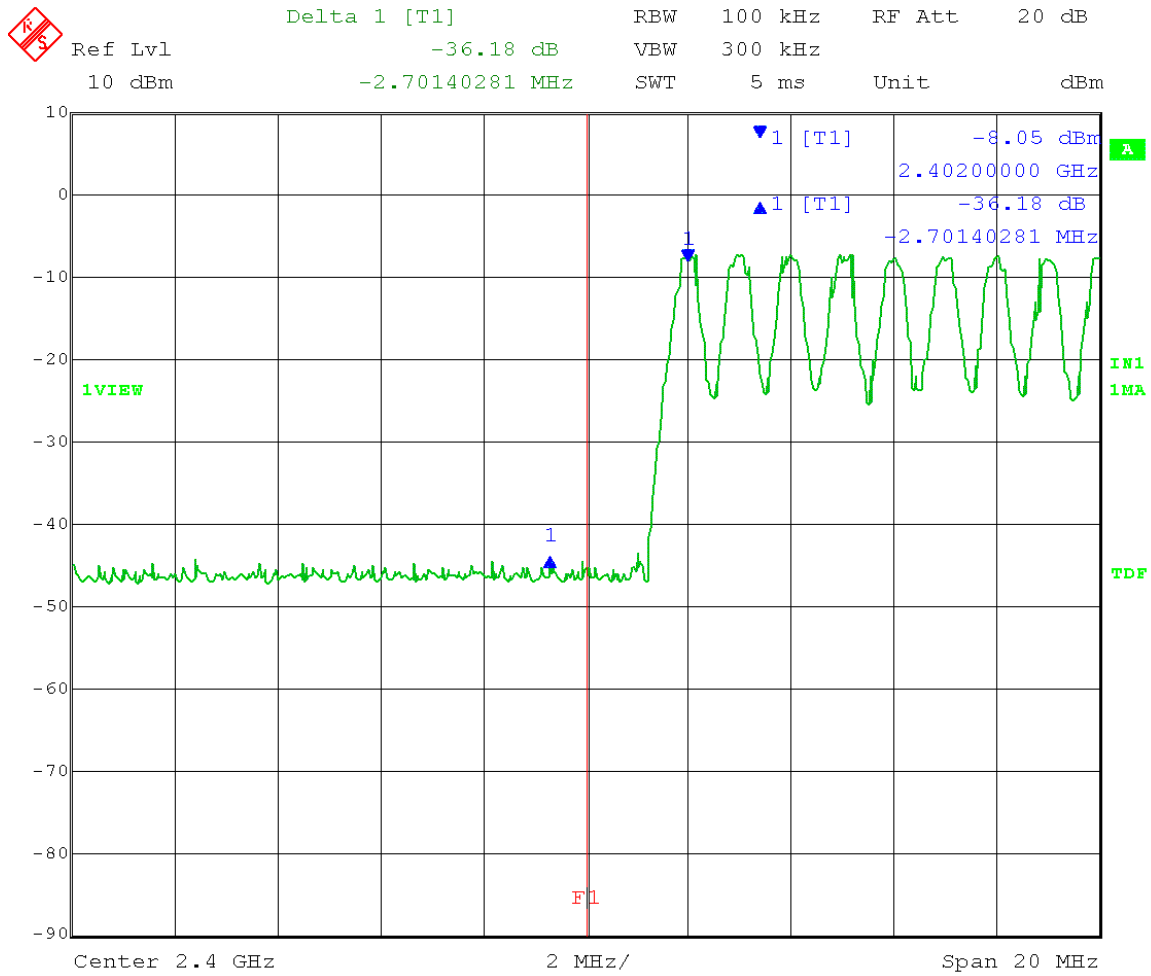

Date: 18.MAR.2017 11:00:32

Test Date: 03-18-2017 Company:  
 Whirlpool Corporation  
 EUT: MC360HH  
 Test: Band-Edge  
 Operator: Craig B  
 Comment: High Channel: Frequency – 2.480 GHz  
 Hopping ON

Band-Edge Frequency = 2.4835 GHz  
 Band-Edge > 20 dB Below Peak In-Band Emission

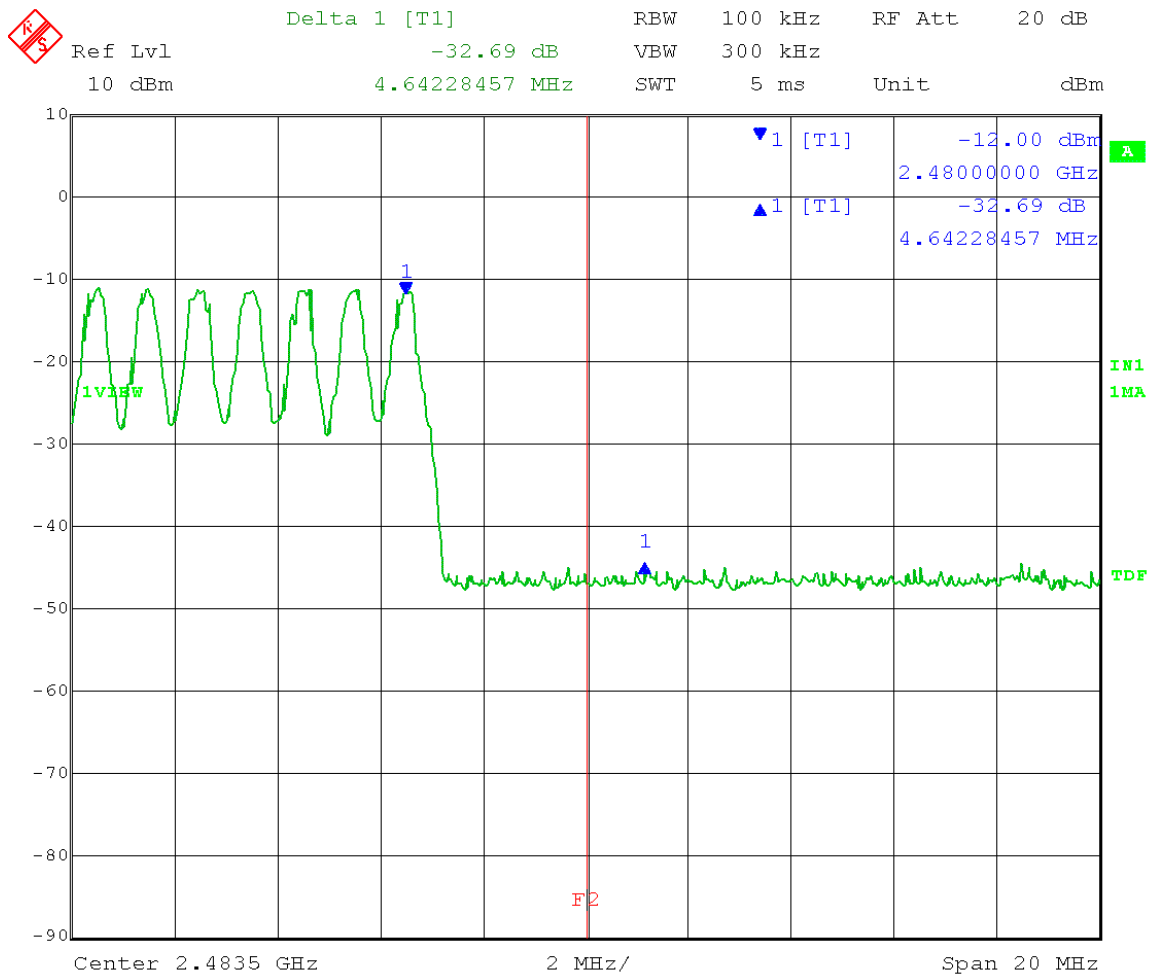

Date: 18.MAR.2017 11:02:21



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B8.0 Restricted Band-Edge – Radiated

**Rule Part:** FCC 15.247(d), 15.205(a), 15.209(a)

**Test Procedure:** ANSI C63.10-2013, section 6.10.5.2

**Limit:** FCC 15.209


**Results:** Compliant

**Notes:** The EUT was set to transmit continuously (95% Duty Cycle) at its maximum power level at the low and high channels of the operating band. A duty cycle correction factor of 0.45 dB was added to the measured average level. Peak measurements were taken with RBW = 1 MHz, VBW = 3 MHz. Average measurements were taken with RBW = 1 MHz, VBW = 3 MHz.

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Lower Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: Low Channel: 0 Frequency: 2402 MHz  
 Lower Restricted Band-Edge frequency: 2.4 GHz  
 Duty cycle correction (95% duty cycle) =  $20 \log(1/0.95) = 0.45 \text{ dB}$

Average level at restricted band edge:  $45.46 \text{ dB}\mu\text{V/m} + 0.45 \text{ dB} = \mathbf{45.91 \text{ dB}\mu\text{V/m}}$

VERTICAL:  
 AVERAGE: Limit:  $54 \text{ dB}\mu\text{V/m}$  at 3meters

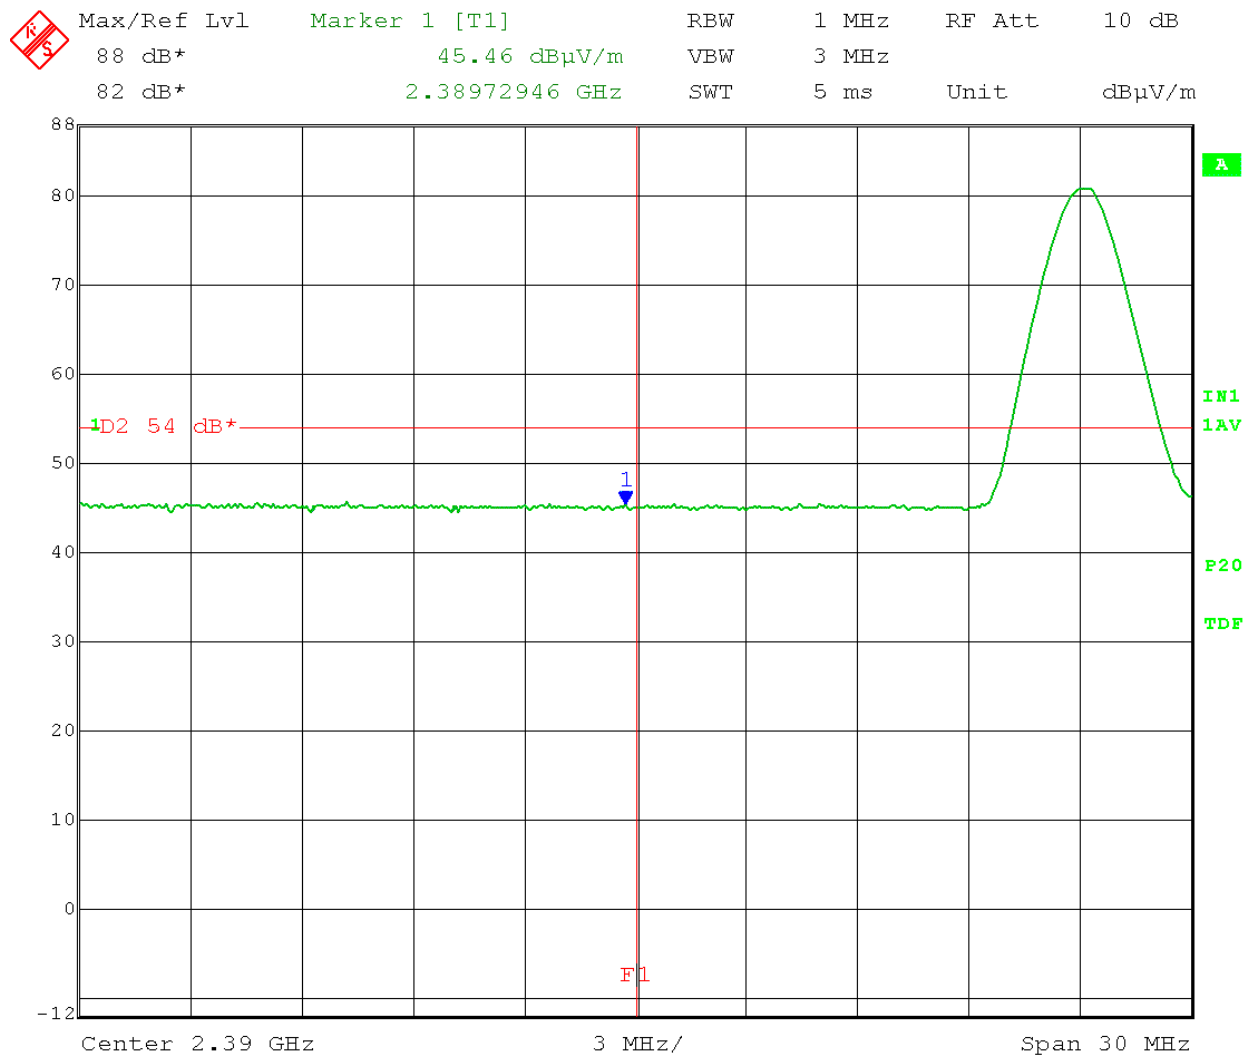


Date: 28.DEC.2016 15:31:41

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Lower Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: Low Channel: 0 Frequency: 2402 MHz  
 Lower Restricted Band-Edge frequency: 2.4 GHz

Peak level at restricted band edge: **56.11 dB $\mu$ V/m**

VERTICAL:

PEAK: Limit: 74 dB $\mu$ V/m at 3meters

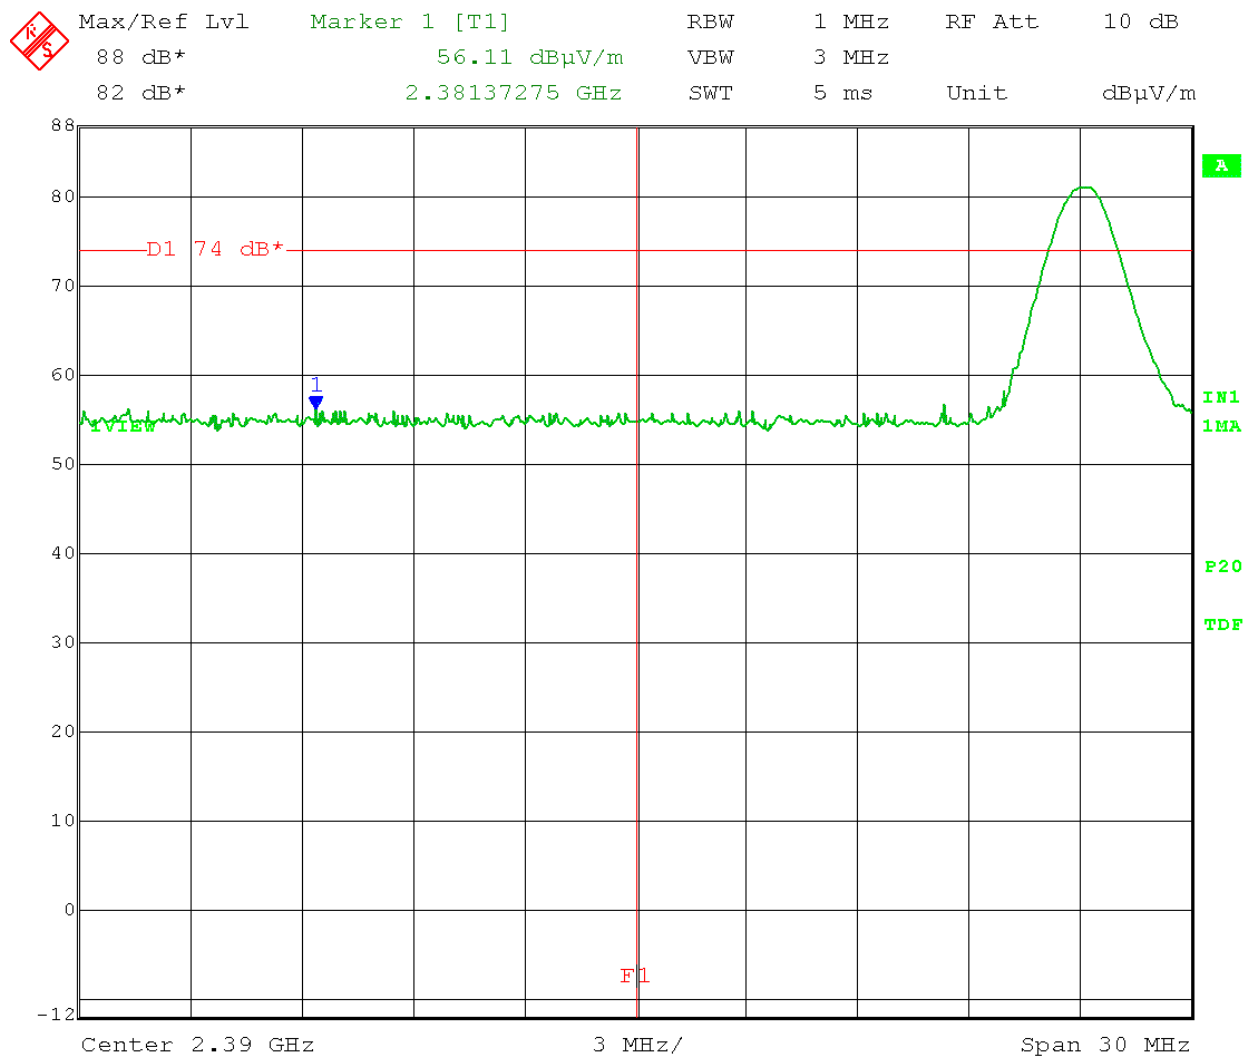

Date: 28.DEC.2016 15:39:19




Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Lower Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: Low Channel: 0 Frequency: 2402 MHz  
 Lower Restricted Band-Edge frequency: 2.4 GHz  
 Duty cycle correction (95% duty cycle) =  $20 \log(1/0.95) = 0.45 \text{ dB}$

Average level at restricted band edge:  $45.45 \text{ dB}\mu\text{V/m} + 0.45 \text{ dB} = \mathbf{45.90 \text{ dB}\mu\text{V/m}}$

HORIZONTAL:

AVERAGE: Limit:  $54 \text{ dB}\mu\text{V/m}$  at 3meters

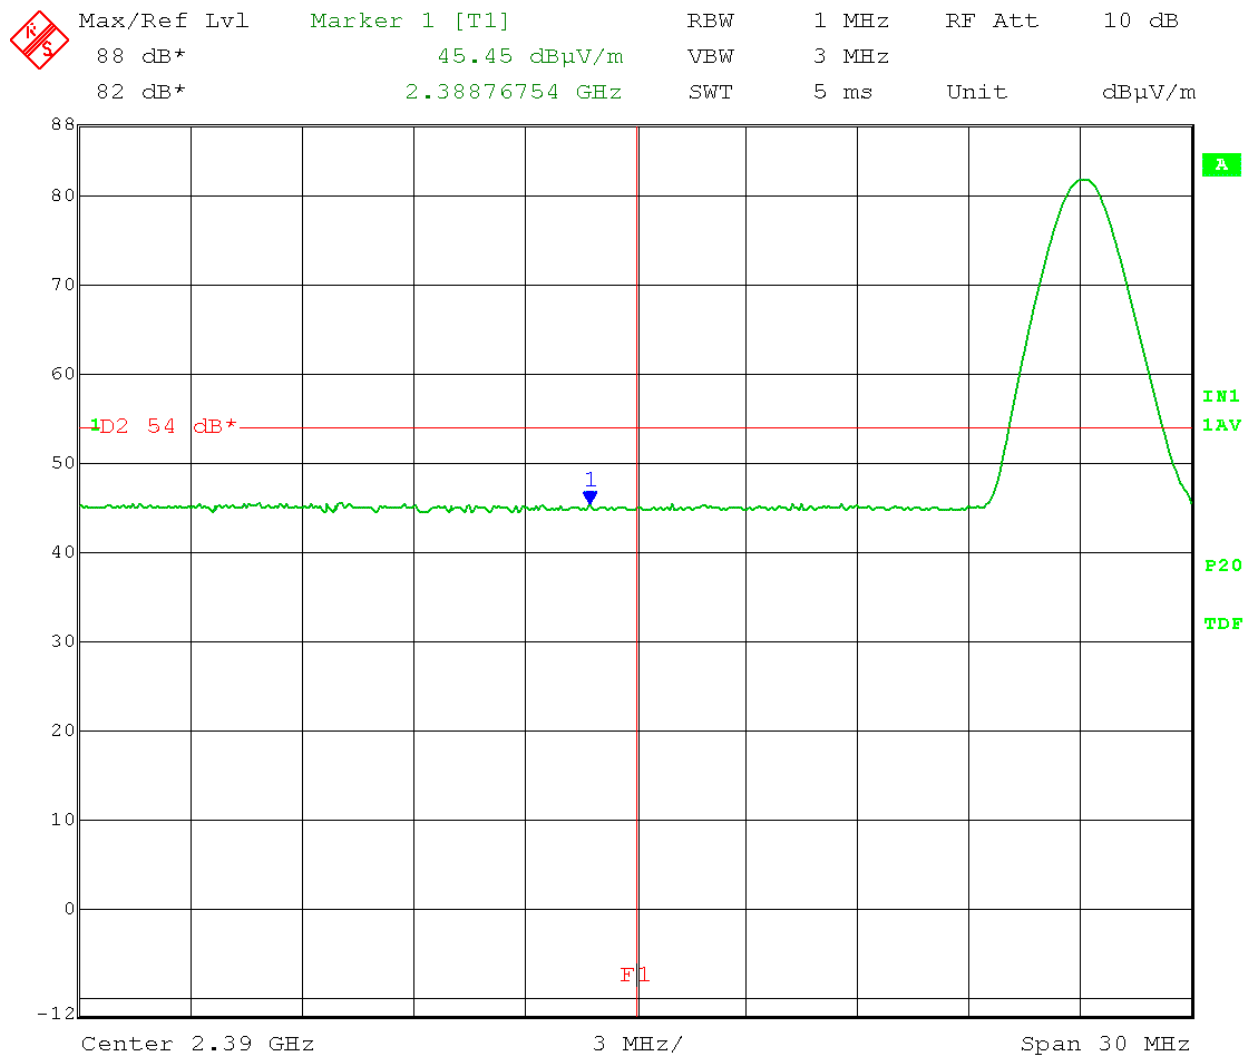


Date: 28.DEC.2016 15:52:54

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Lower Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: Low Channel: 0 Frequency: 2402 MHz  
 Lower Restricted Band-Edge frequency: 2.4 GHz

Peak level at restricted band edge: **56.43 dB $\mu$ V/m**

HORIZONTAL:

PEAK: Limit: 74 dB $\mu$ V/m at 3meters

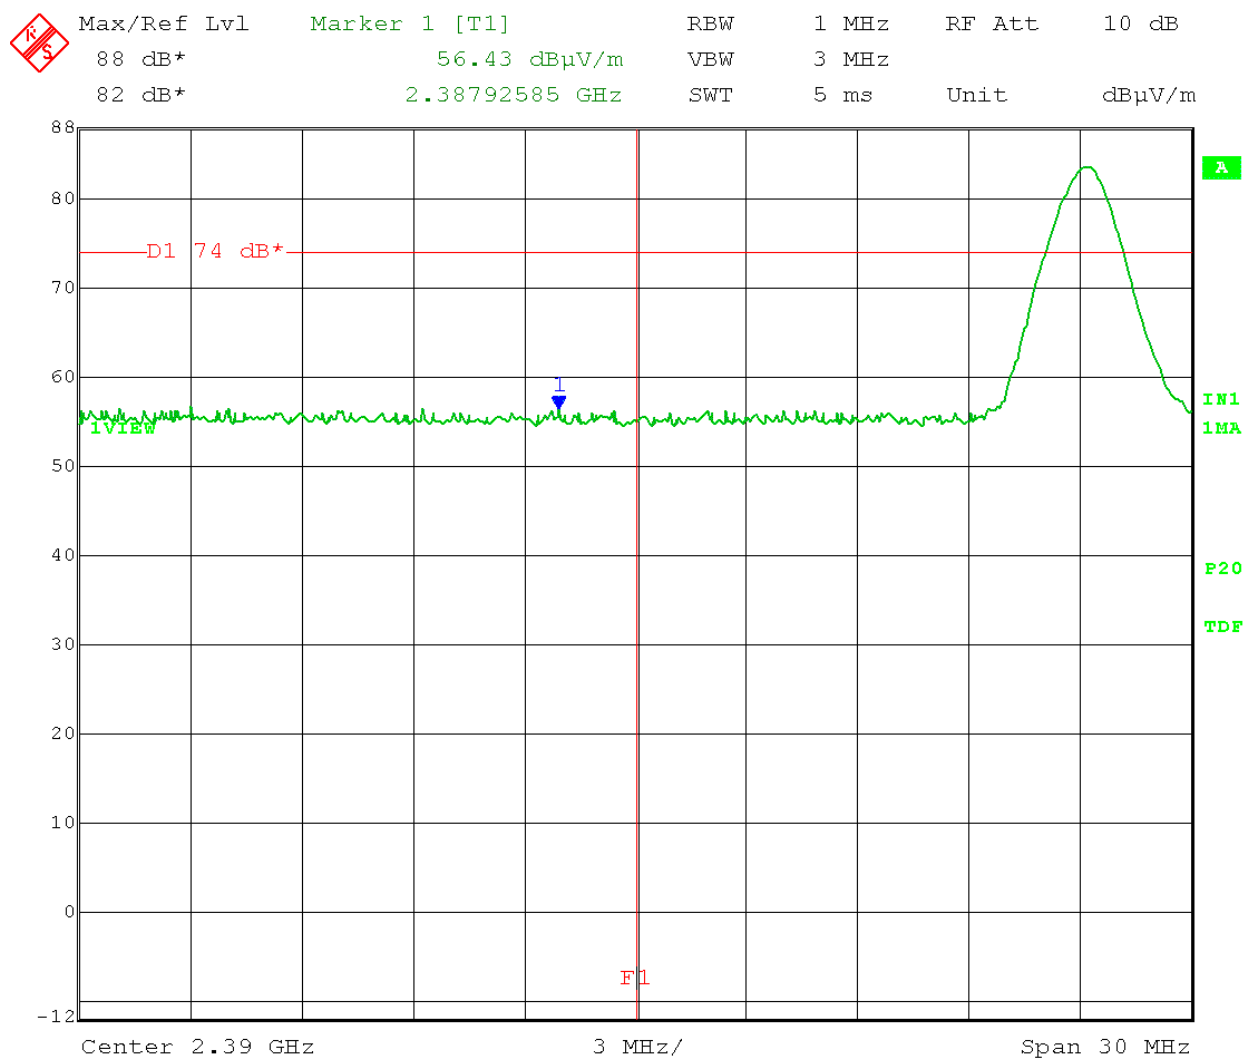


Date: 28.DEC.2016 15:47:40

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Upper Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: High Channel: 78 Frequency: 2480 MHz  
 Upper Restricted Band-Edge frequency: 2.4835 GHz  
 Duty cycle correction (95% duty cycle) =  $20 \log(1/0.95) = 0.45 \text{ dB}$

Average level at restricted band edge:  $45.33 \text{ dB}\mu\text{V/m} + 0.45 \text{ dB} = 45.78 \text{ dB}\mu\text{V/m}$

VERTICAL:  
 AVERAGE: Limit:  $54 \text{ dB}\mu\text{V/m}$  at 3meters

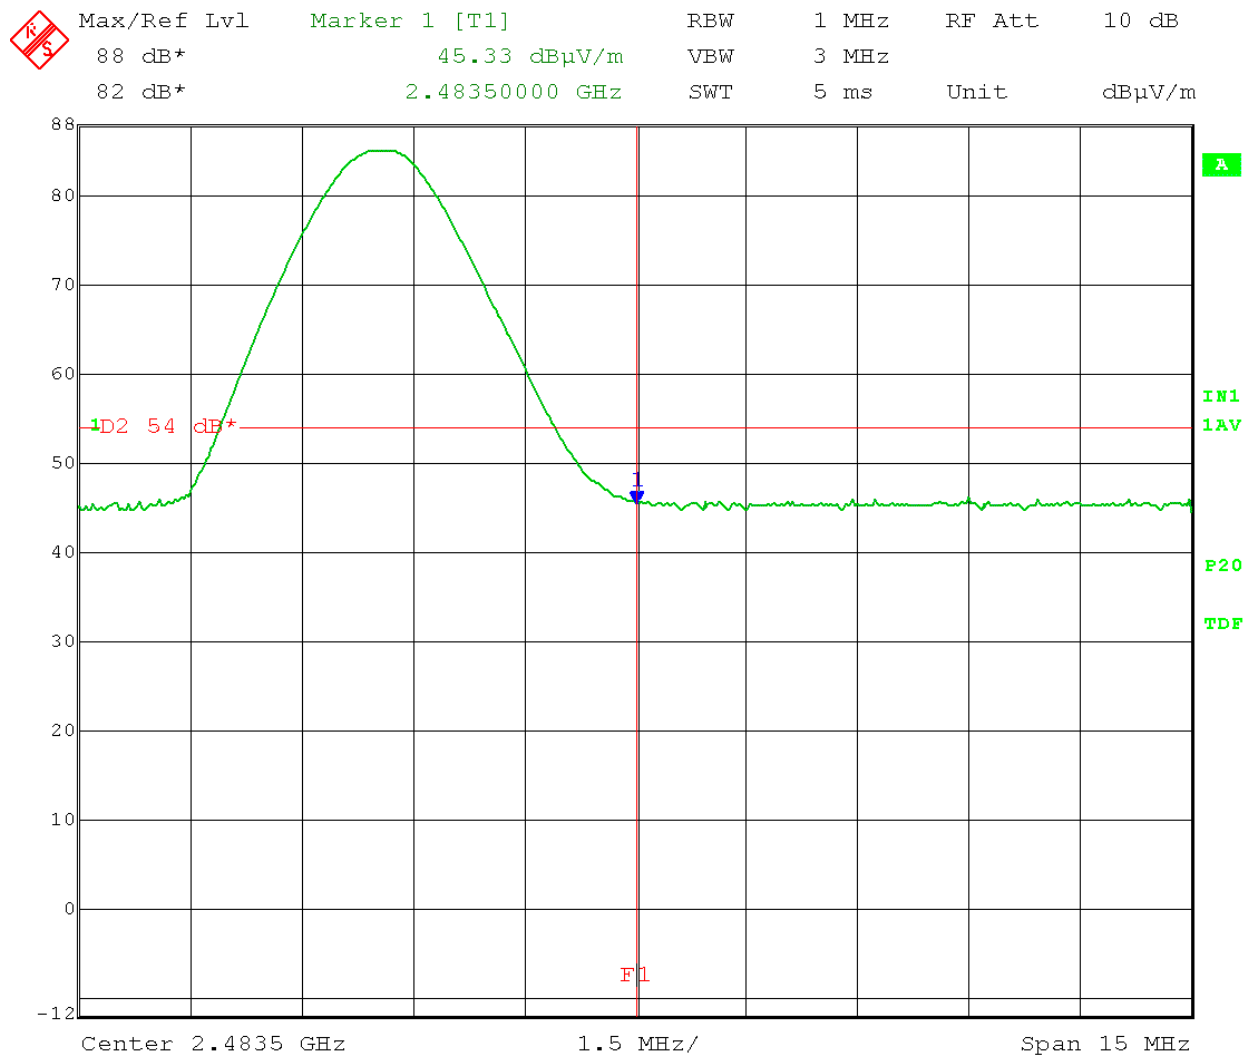


Date: 28.DEC.2016 16:49:24

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Upper Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: High Channel: 78 Frequency: 2480 MHz  
 Upper Restricted Band-Edge frequency: 2.4835 GHz

Peak level at restricted band edge: **57.18 dB $\mu$ V/m**

VERTICAL:

PEAK: Limit: 74 dB $\mu$ V/m at 3meters

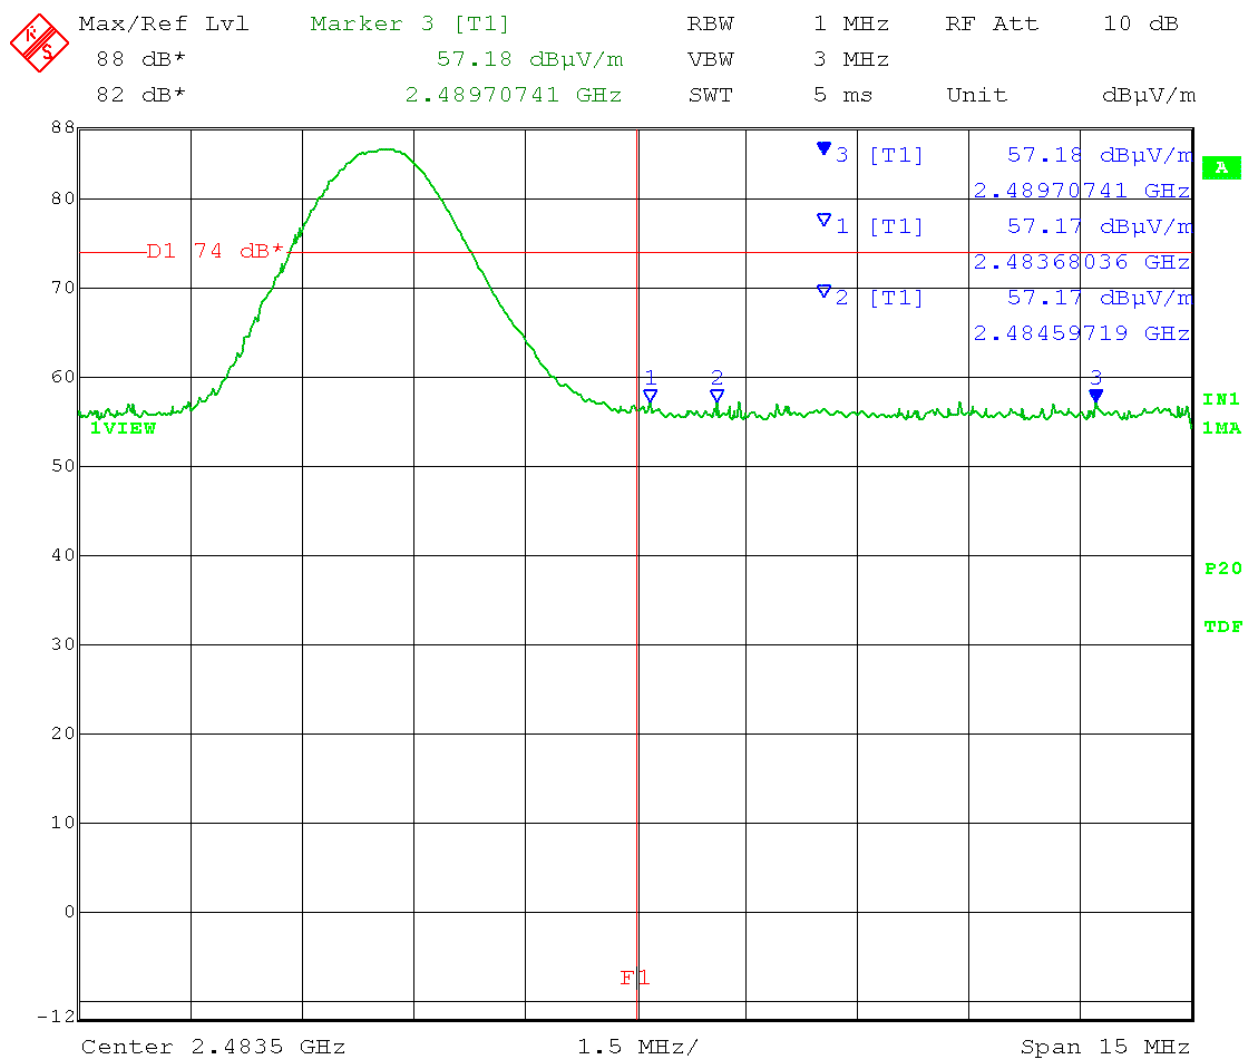


Date: 28.DEC.2016 16:39:00

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Upper Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: High Channel: 78 Frequency: 2480 MHz  
 Upper Restricted Band-Edge frequency: 2.4835 GHz  
 Duty cycle correction (95% duty cycle) =  $20 \log(1/0.95) = 0.45 \text{ dB}$

Average level at restricted band edge:  $45.64 \text{ dB}\mu\text{V/m} + 0.45 \text{ dB} = 46.09 \text{ dB}\mu\text{V/m}$

HORIZONTAL:

AVERAGE: Limit:  $54 \text{ dB}\mu\text{V/m}$  at 3meters

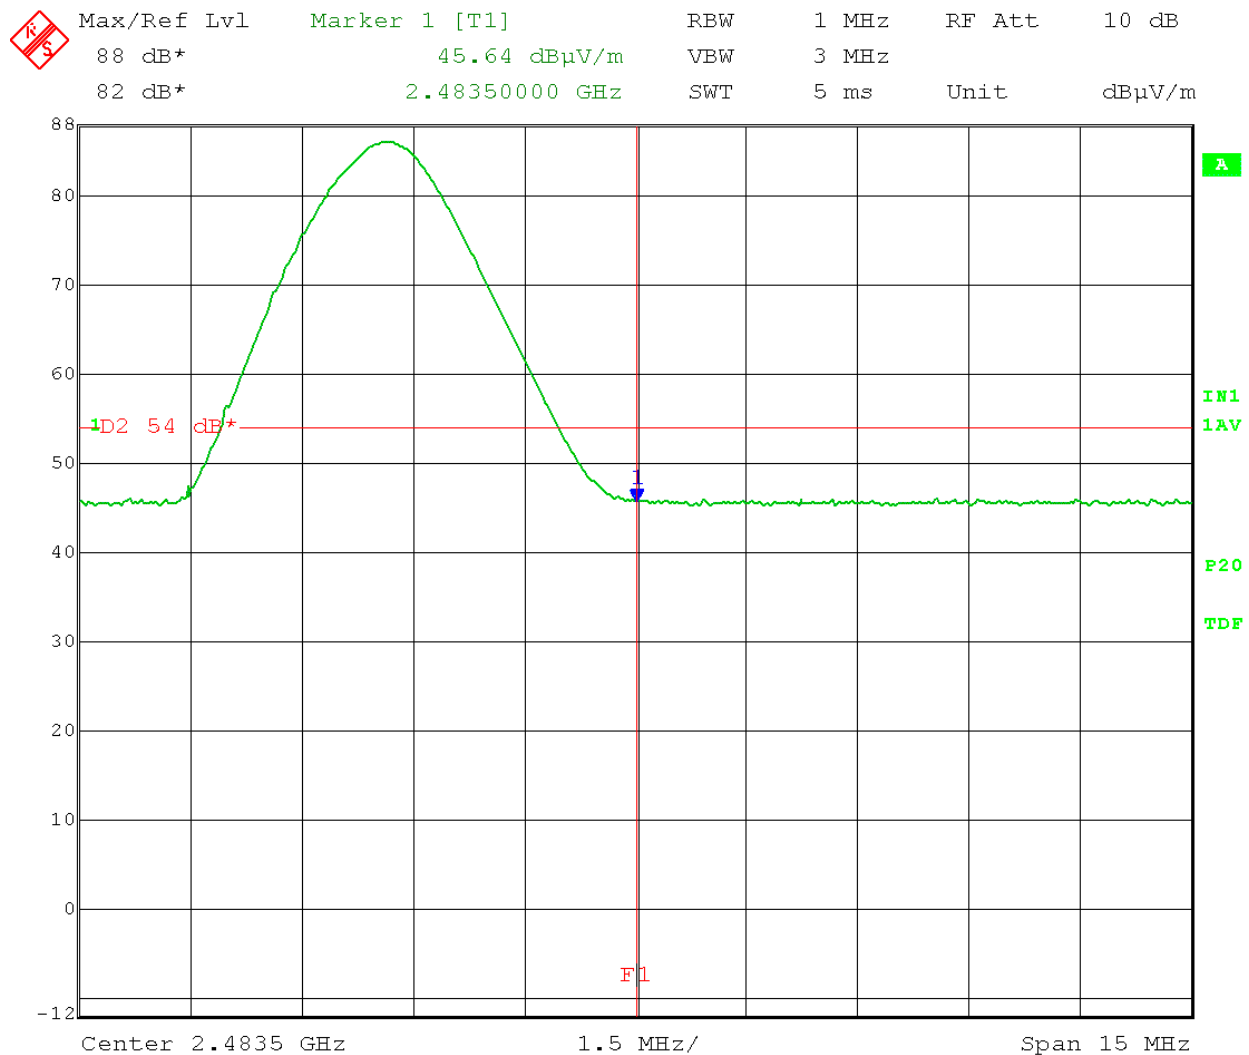


Date: 28.DEC.2016 16:27:30

Test Date: 12-28-2016  
 Company: Whirlpool Corporation  
 EUT: MC360HH  
 Test: Upper Restricted Band-Edge - Radiated  
 Operator: Paul L  
 Comment: High Channel: 78 Frequency: 2480 MHz  
 Upper Restricted Band-Edge frequency: 2.4835 GHz

Peak level at restricted band edge: **56.67 dB $\mu$ V/m**

HORIZONTAL:

PEAK: Limit: 74 dB $\mu$ V/m at 3meters

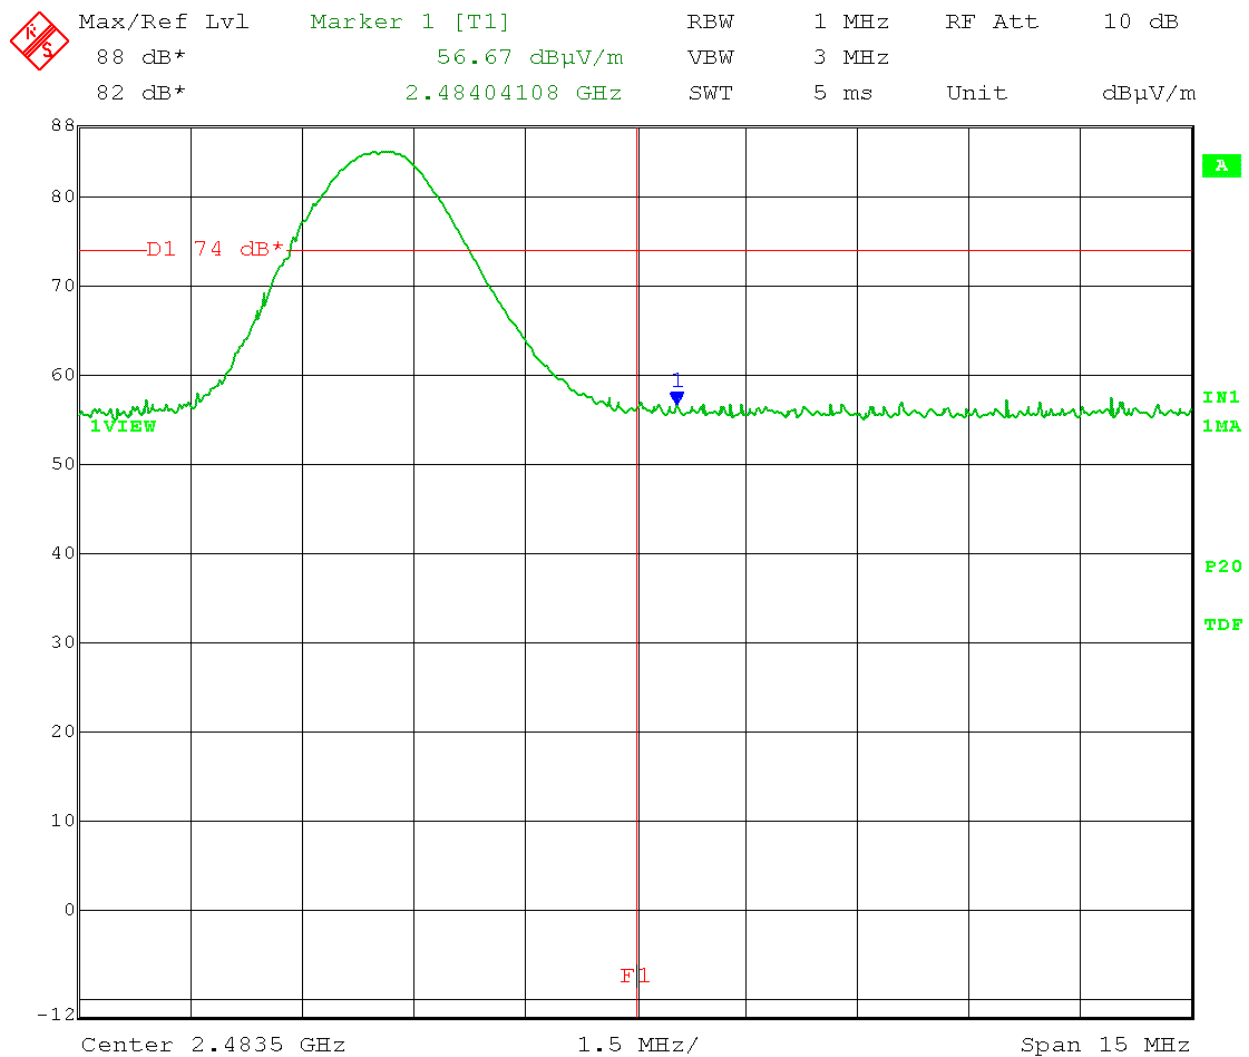

Date: 28.DEC.2016 16:31:08



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B9.0 Spurious Emissions – RF Conducted

**Rule Part:** FCC 15.247(d)

**Test Procedure:** ANSI C63.10-2013, section 7.8.8

**Limit:** 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

**Results:** Compliant


**Notes:** This was an RF conducted measurement. The EUT was connected to the measuring equipment through a temporary external antenna connector. Cable loss and attenuation were accounted for in the transducer factors set in the analyzer.

The EUT was set to transmit continuously (95% Duty Cycle) at its maximum power level at the low, middle and high channels of the operating band. A peak detector was used for this test.

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: **Low Channel: Ch.0 Frequency: 2402 MHz**  
Reference Level: -11.48 dBm  
Limit: -11.48 dBm -20 dB = -31.48 dBm

Reference level measurement:

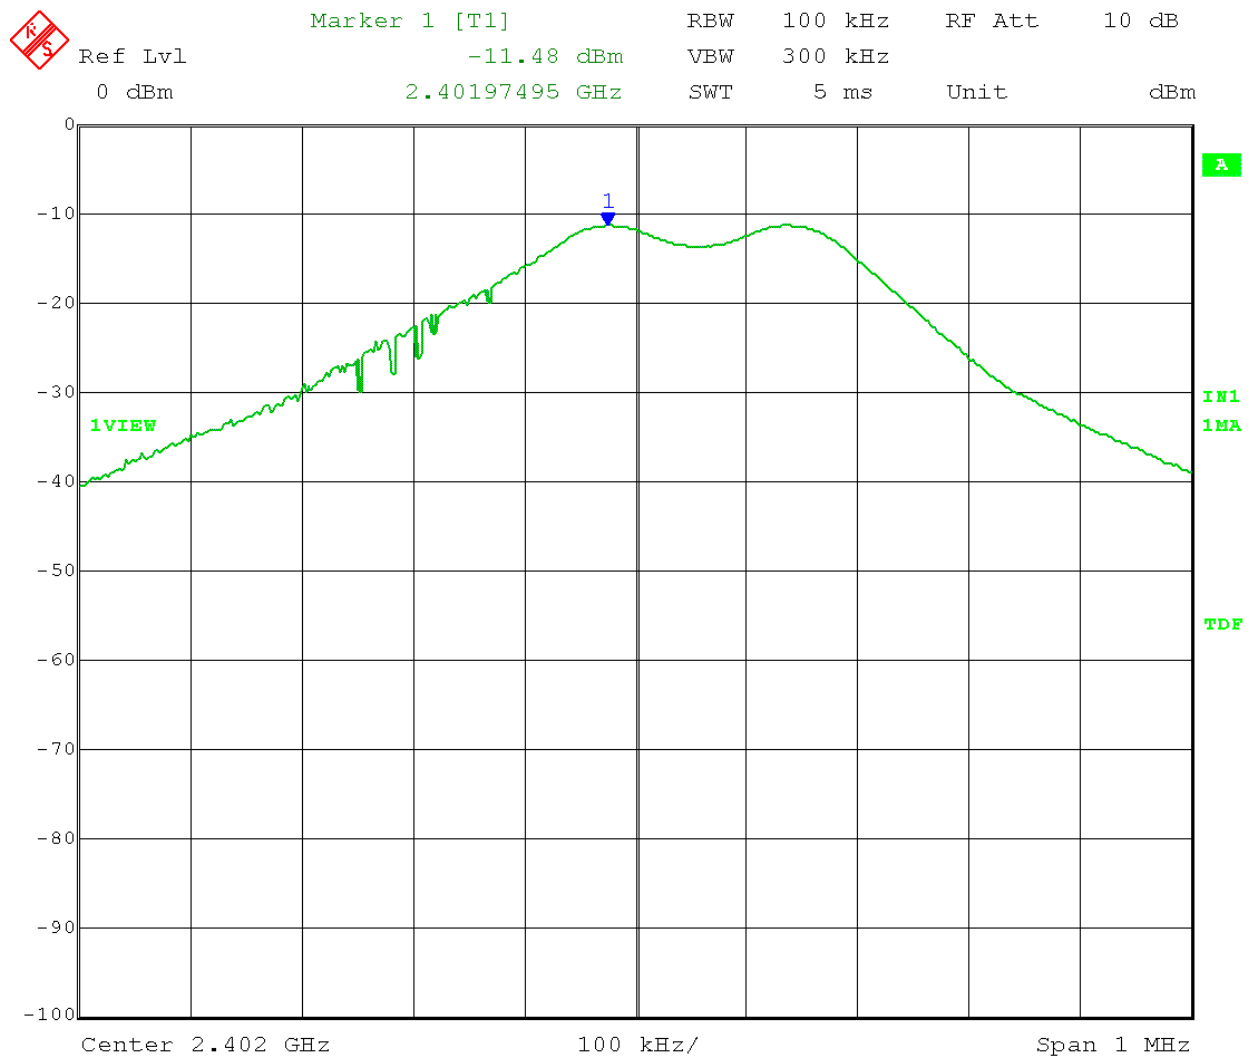


Date: 28.DEC.2016 11:49:40



Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz  
Reference Level: -11.48 dBm  
Limit: -11.48 dBm -20 dB = -31.48 dBm

Emission level measurement: Frequency Range: 30-1000 MHz

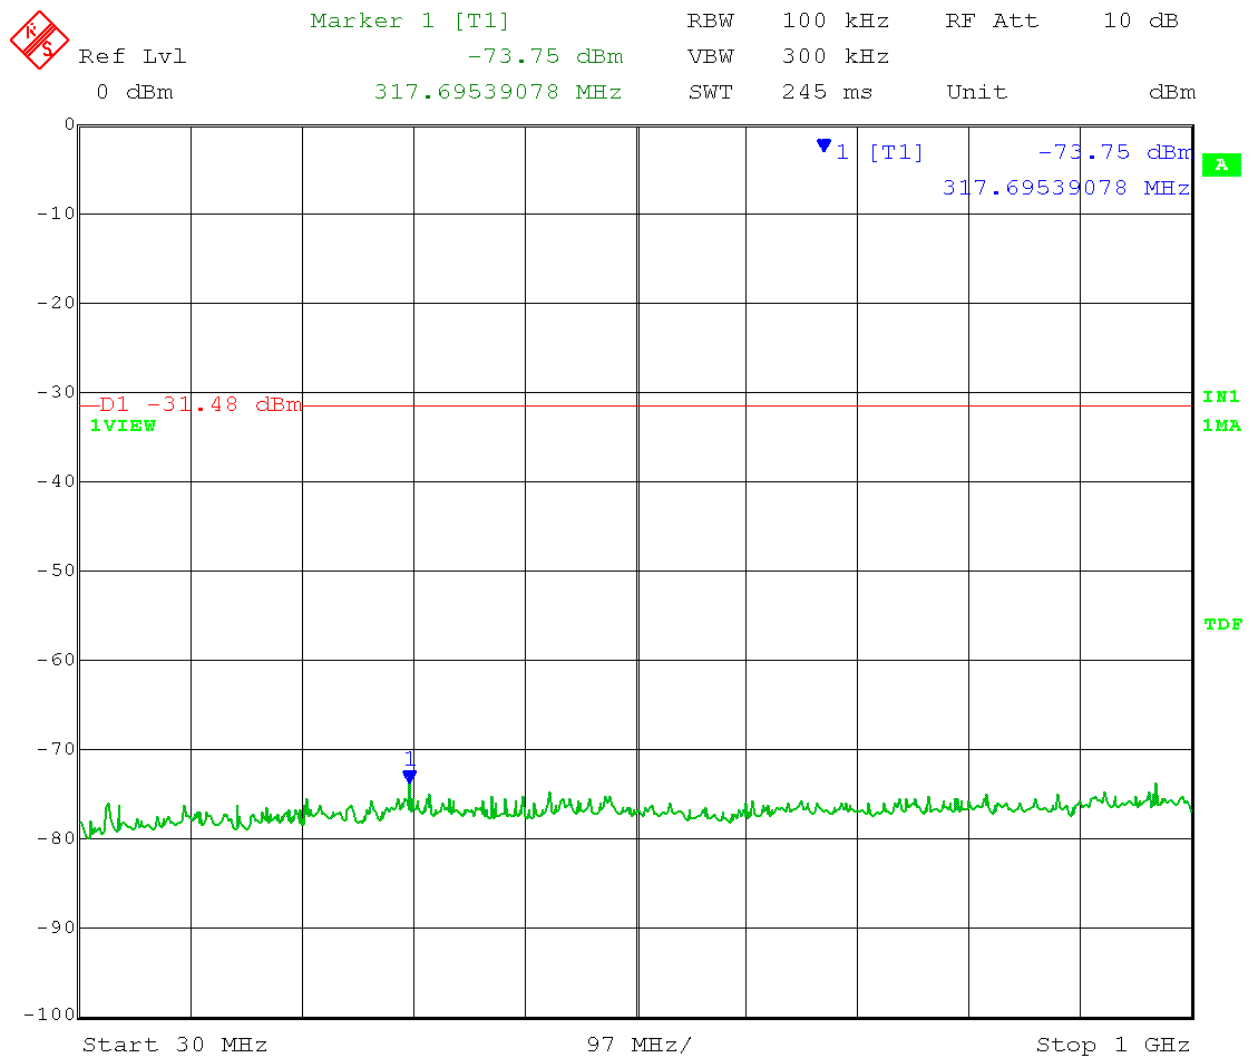


Date: 28.DEC.2016 12:06:38

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz  
Reference Level: -11.48 dBm  
Limit: -11.48 dBm -20 dB = -31.48 dBm

Emission level measurement: Frequency Range: 1 – 7 GHz

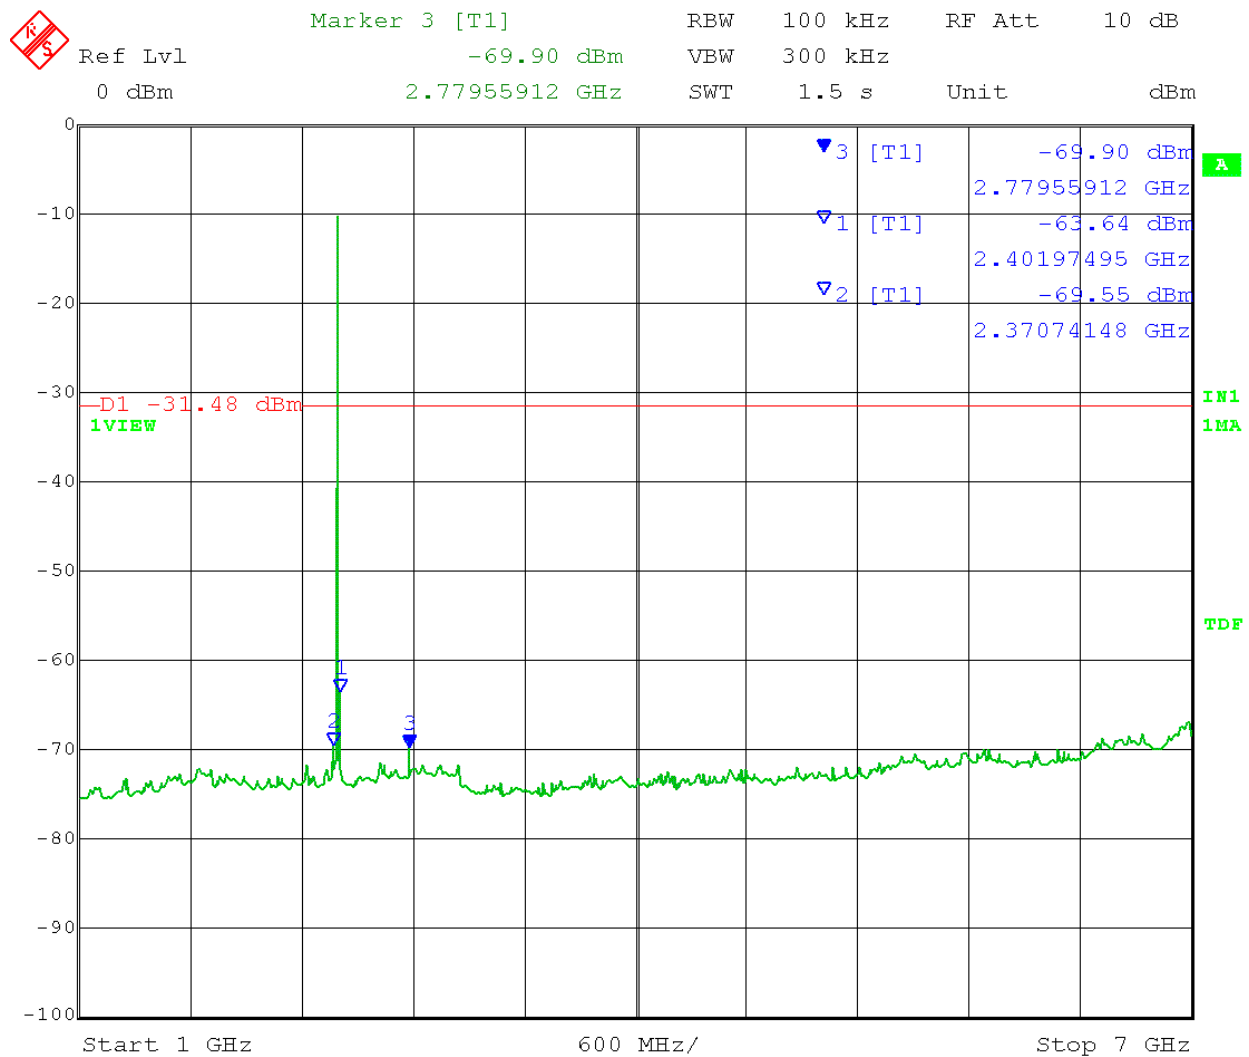


Date: 28.DEC.2016 11:58:07

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz  
Reference Level: -11.48 dBm  
Limit: -11.48 dBm -20 dB = -31.48 dBm

Emission level measurement: Frequency Range: 7 – 16 GHz

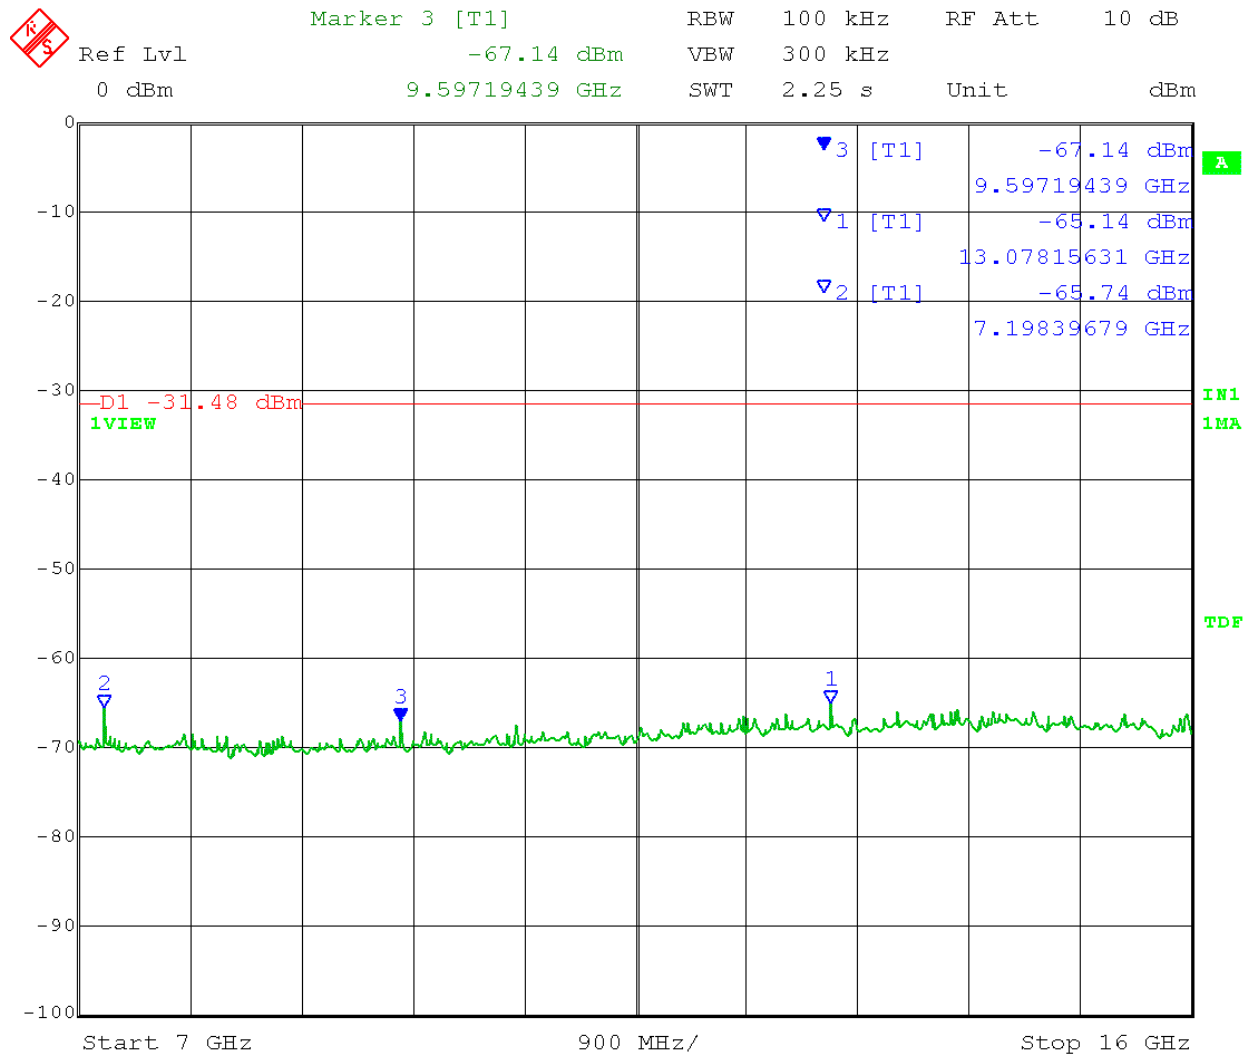


Date: 28.DEC.2016 12:01:42

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Low Channel: Ch.0 Frequency: 2402 MHz  
Reference Level: -11.48 dBm  
Limit: -11.48 dBm -20 dB = -31.48 dBm

Emission level measurement: Frequency Range: 16 – 25 GHz

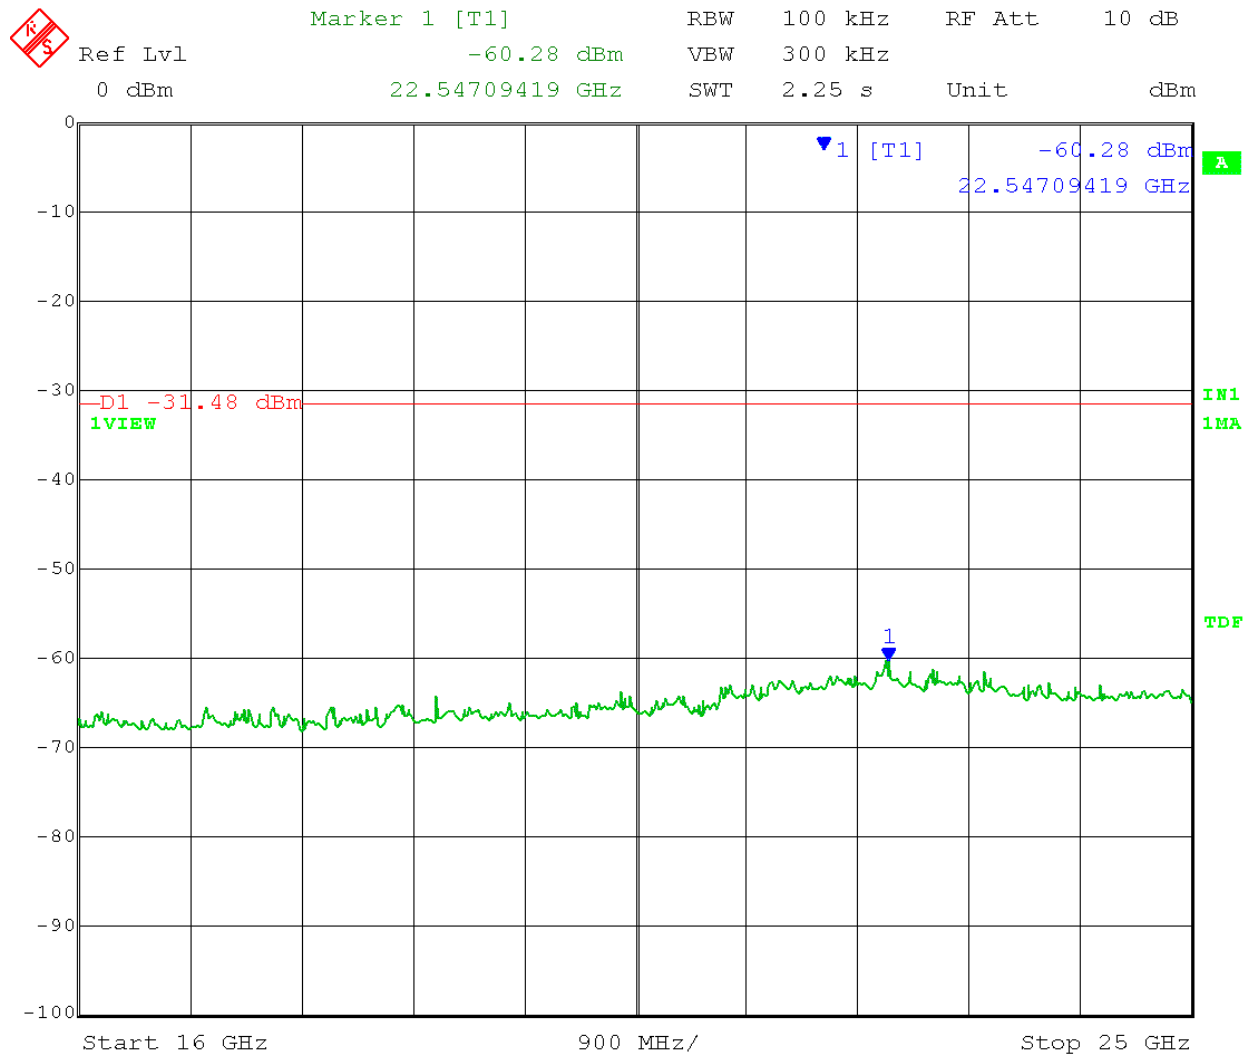


Date: 28.DEC.2016 12:03:57

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz  
Reference Level: -13.35 dBm  
Limit: -13.35 dBm -20 dB = -33.35 dBm

Reference level measurement:

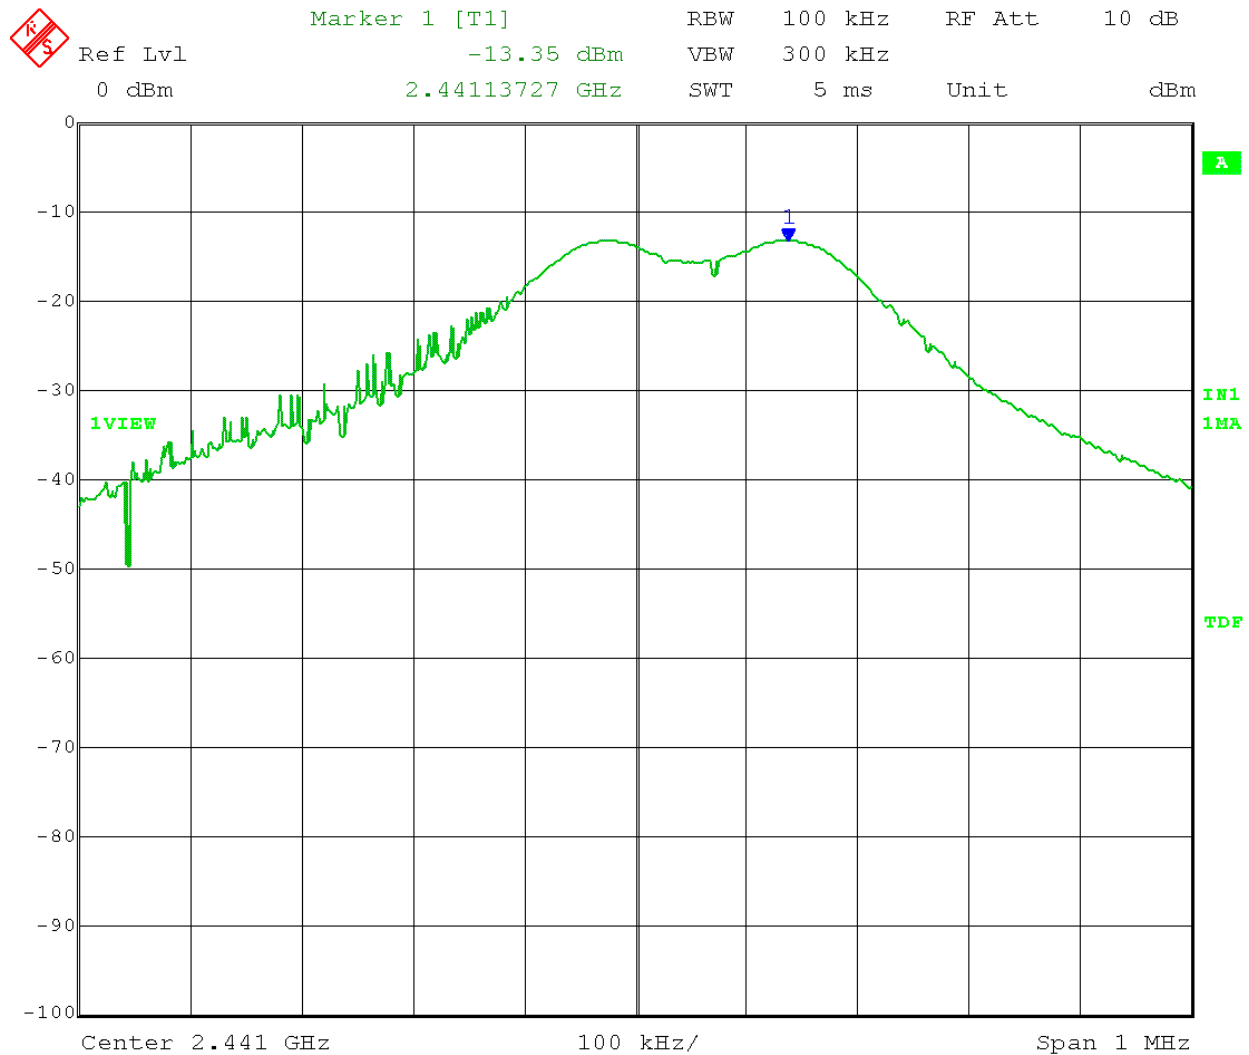


Date: 28.DEC.2016 13:13:10

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz  
Reference Level: -13.35 dBm  
Limit: -13.35 dBm -20 dB = -33.35 dBm

Emission level measurement: Frequency Range: 30-1000 MHz

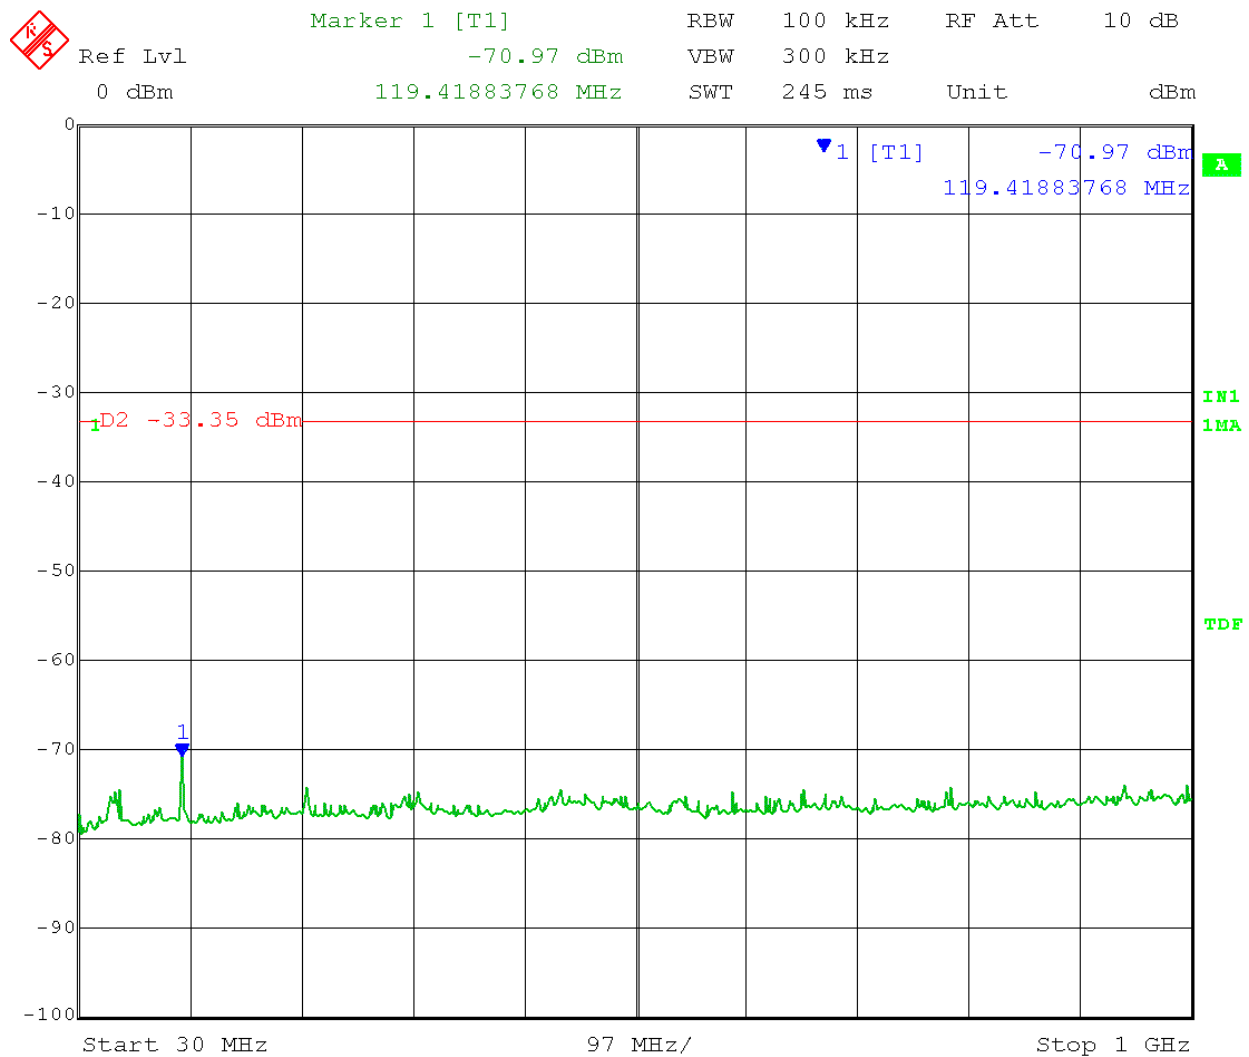


Date: 28.DEC.2016 13:24:29

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz  
Reference Level: -13.35 dBm  
Limit: -13.35 dBm -20 dB = -33.35 dBm

Emission level measurement: Frequency Range: 1 – 7 GHz

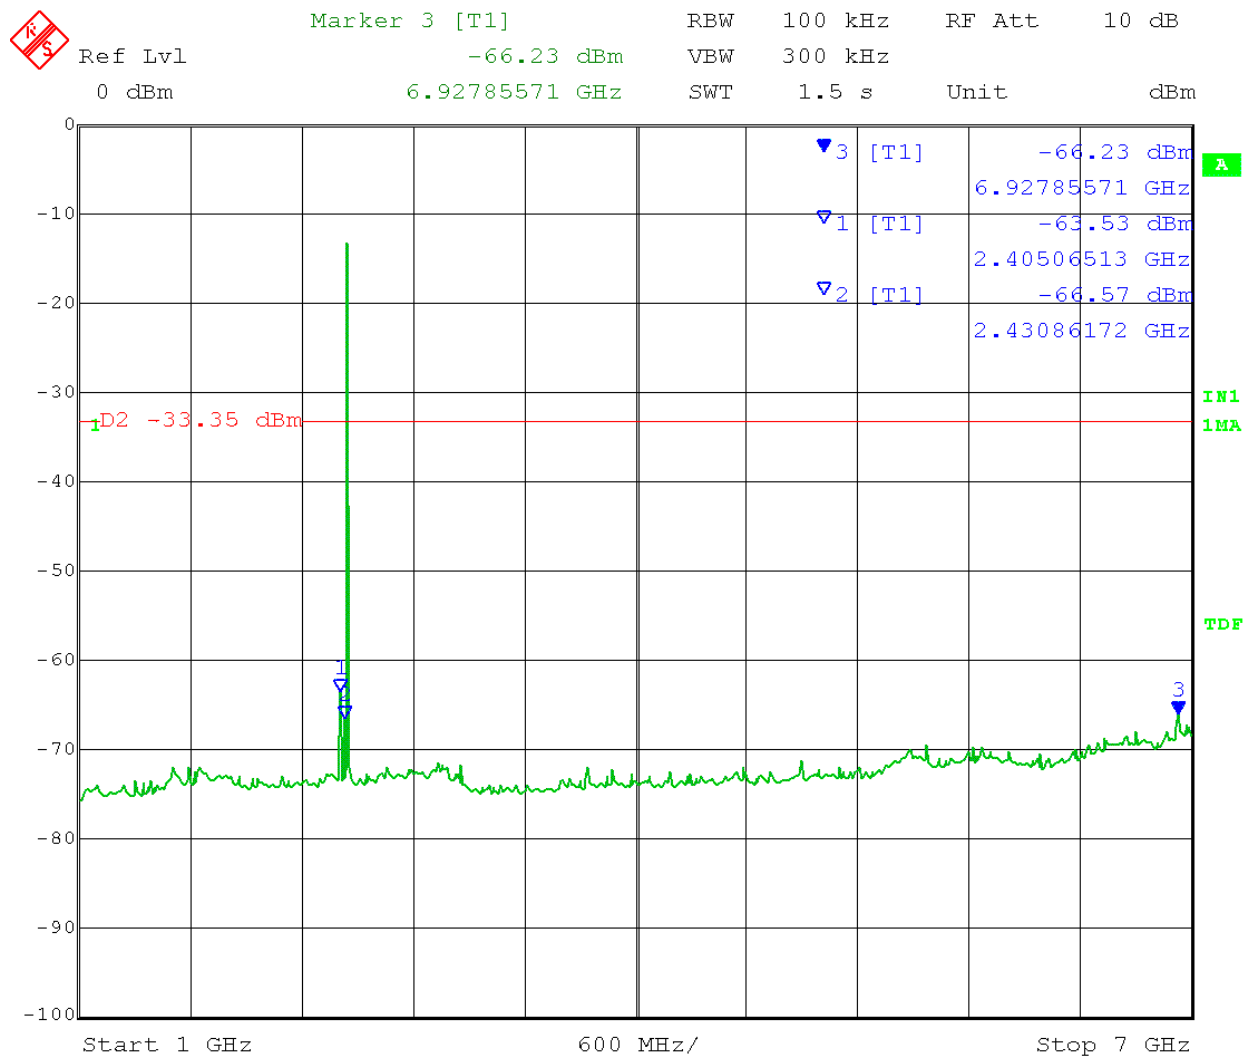


Date: 28.DEC.2016 13:18:08

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz  
Reference Level: -13.35 dBm  
Limit: -13.35 dBm -20 dB = -33.35 dBm

Emission level measurement: Frequency Range: 7-16 GHz

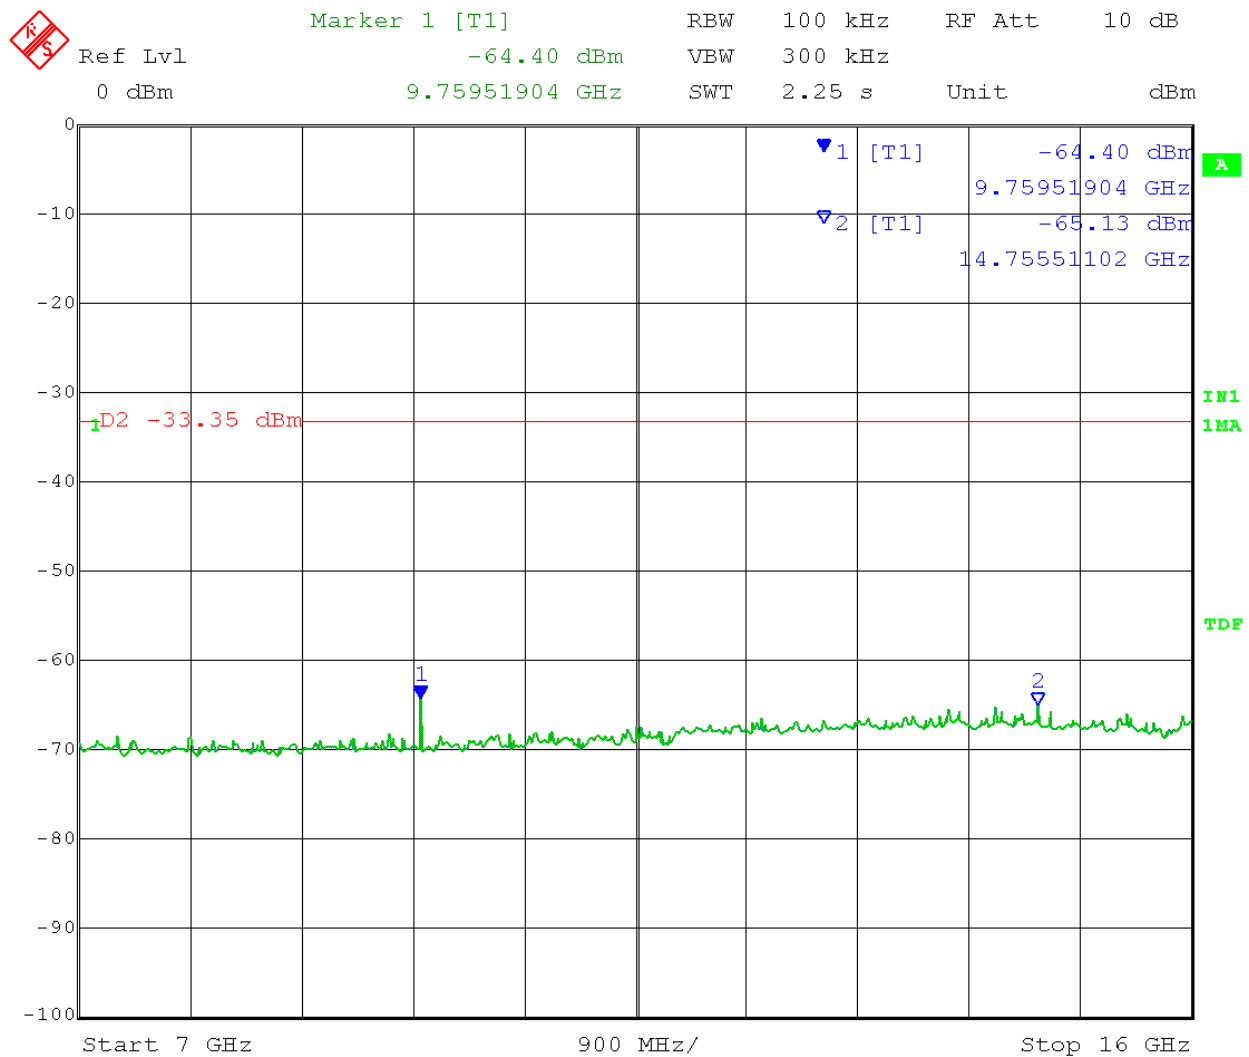


Date: 28.DEC.2016 13:20:22



Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: Mid Channel: Ch.39 Frequency: 2441 MHz  
Reference Level: -13.35 dBm  
Limit: -13.35 dBm -20 dB = -33.35 dBm

Emission level measurement: Frequency Range: 16-25 GHz

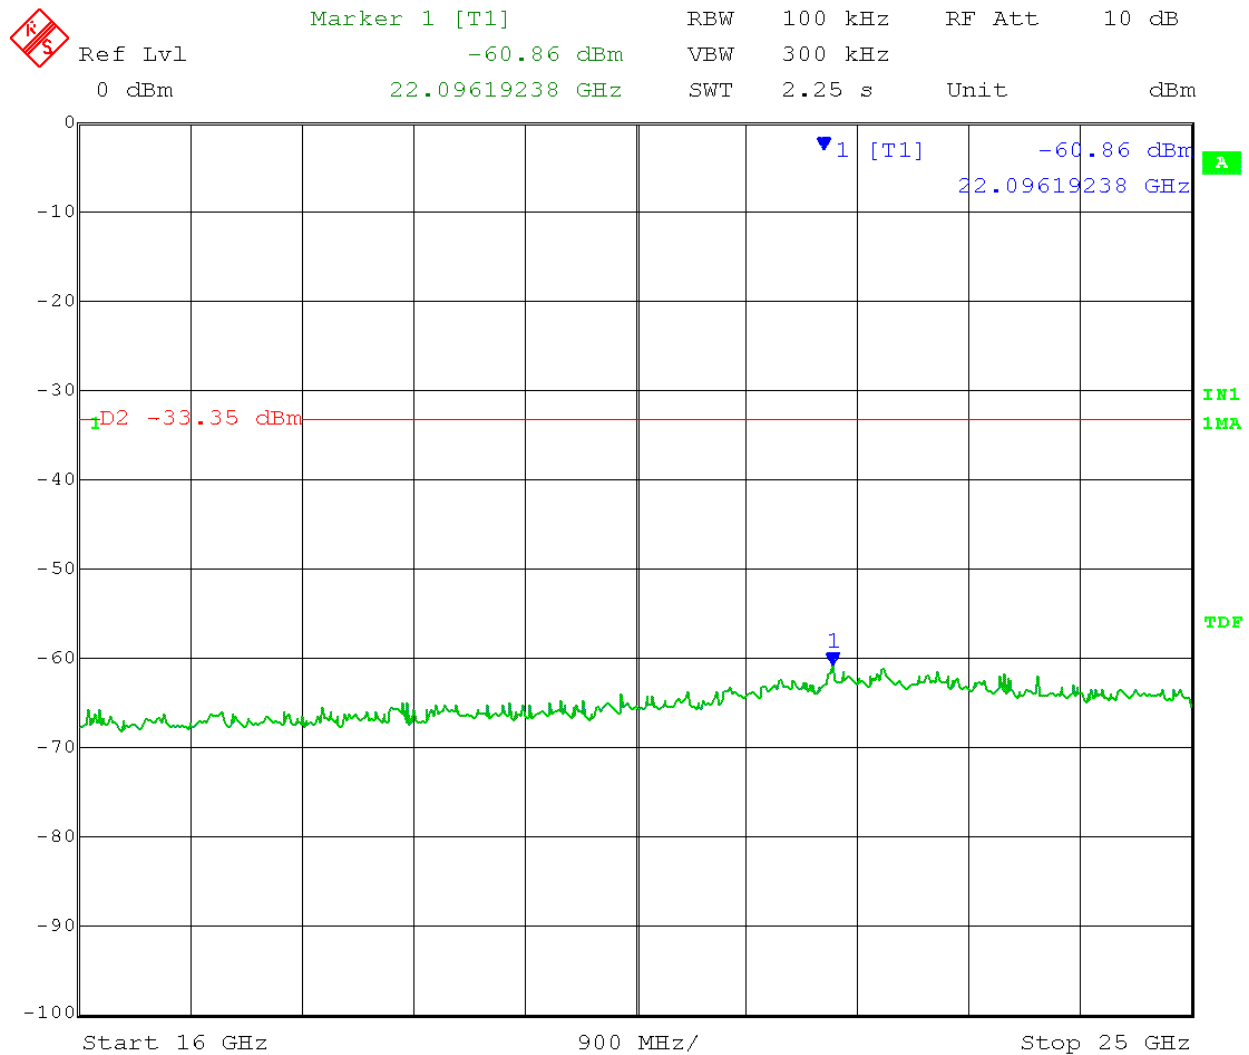


Date: 28.DEC.2016 13:21:57

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz  
Reference Level: -13.32 dBm  
Limit: -13.32 dBm -20 dB = -33.32 dBm

Reference level measurement:

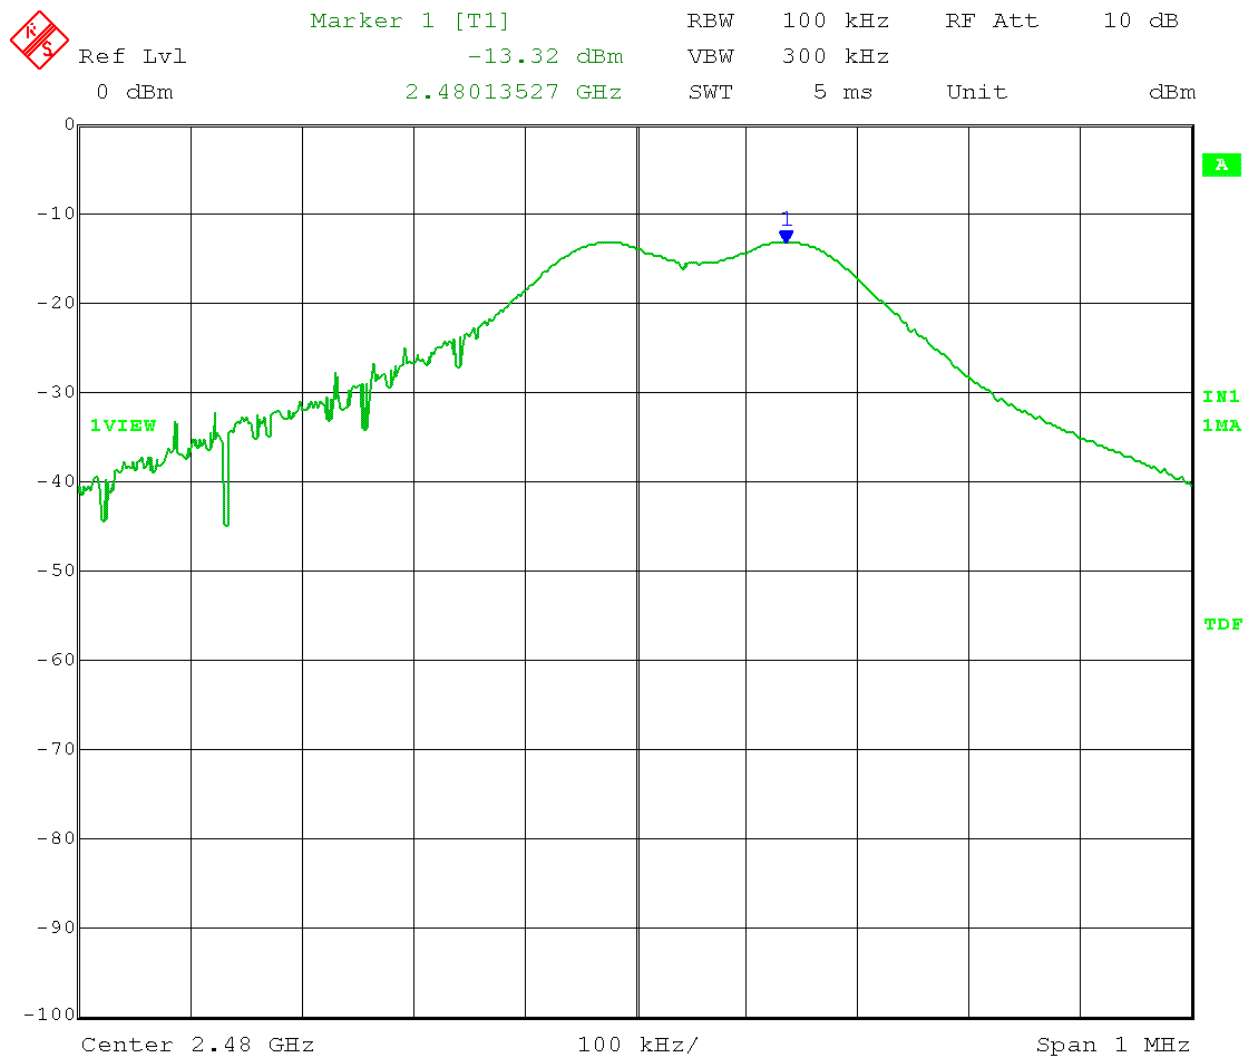


Date: 28.DEC.2016 12:41:57

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz  
Reference Level: -13.32 dBm  
Limit: -13.32 dBm -20 dB = -33.32 dBm

Emission level measurement: Frequency Range: 30-1000 MHz

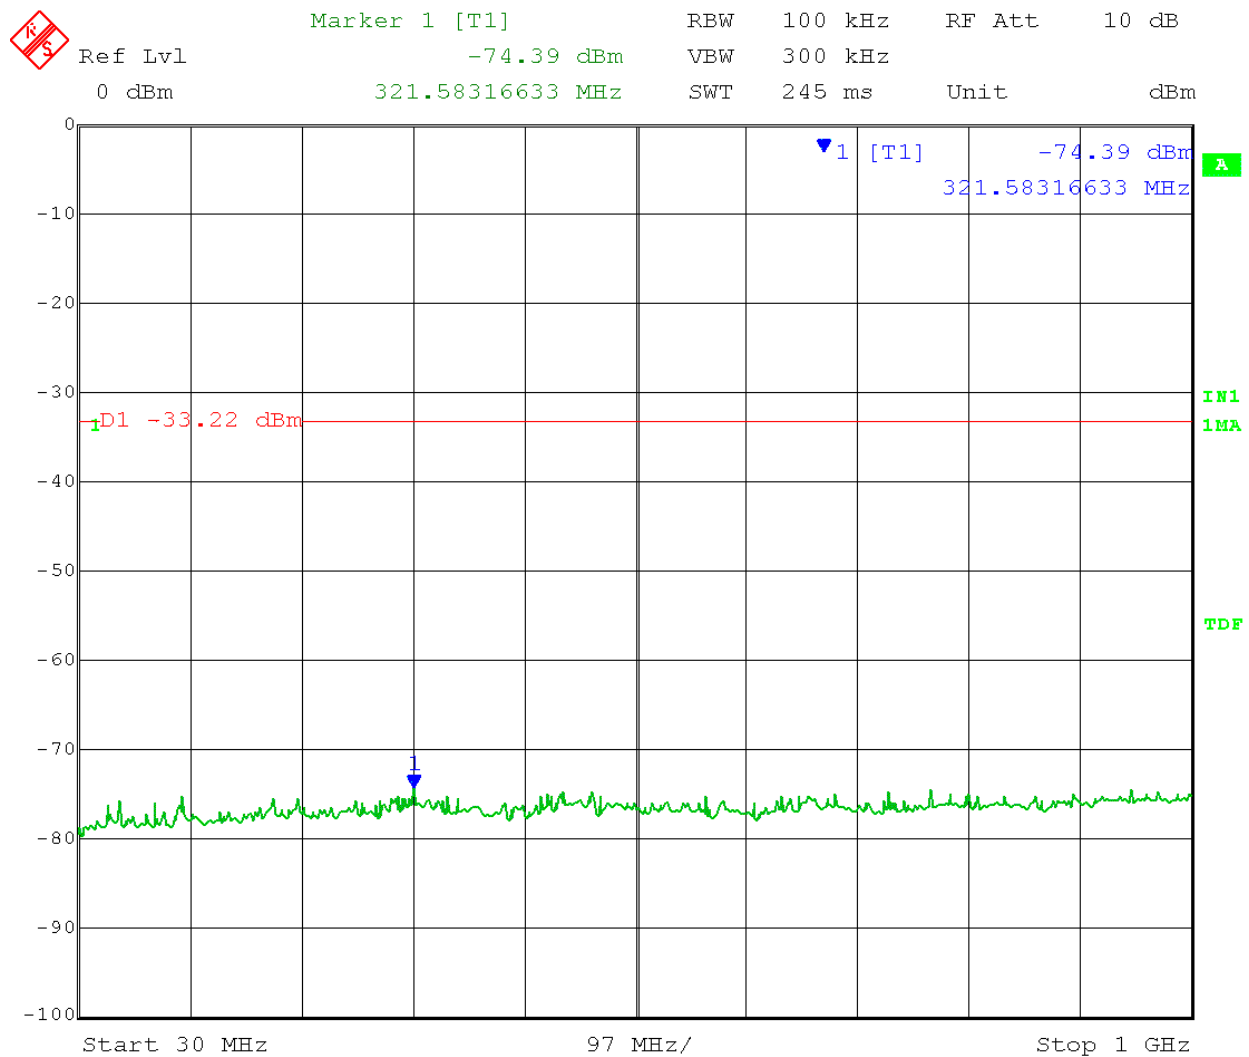


Date: 28.DEC.2016 12:57:07

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz  
Reference Level: -13.32 dBm  
Limit: -13.32 dBm -20 dB = -33.32 dBm

Emission level measurement: Frequency Range: 1 – 7 GHz

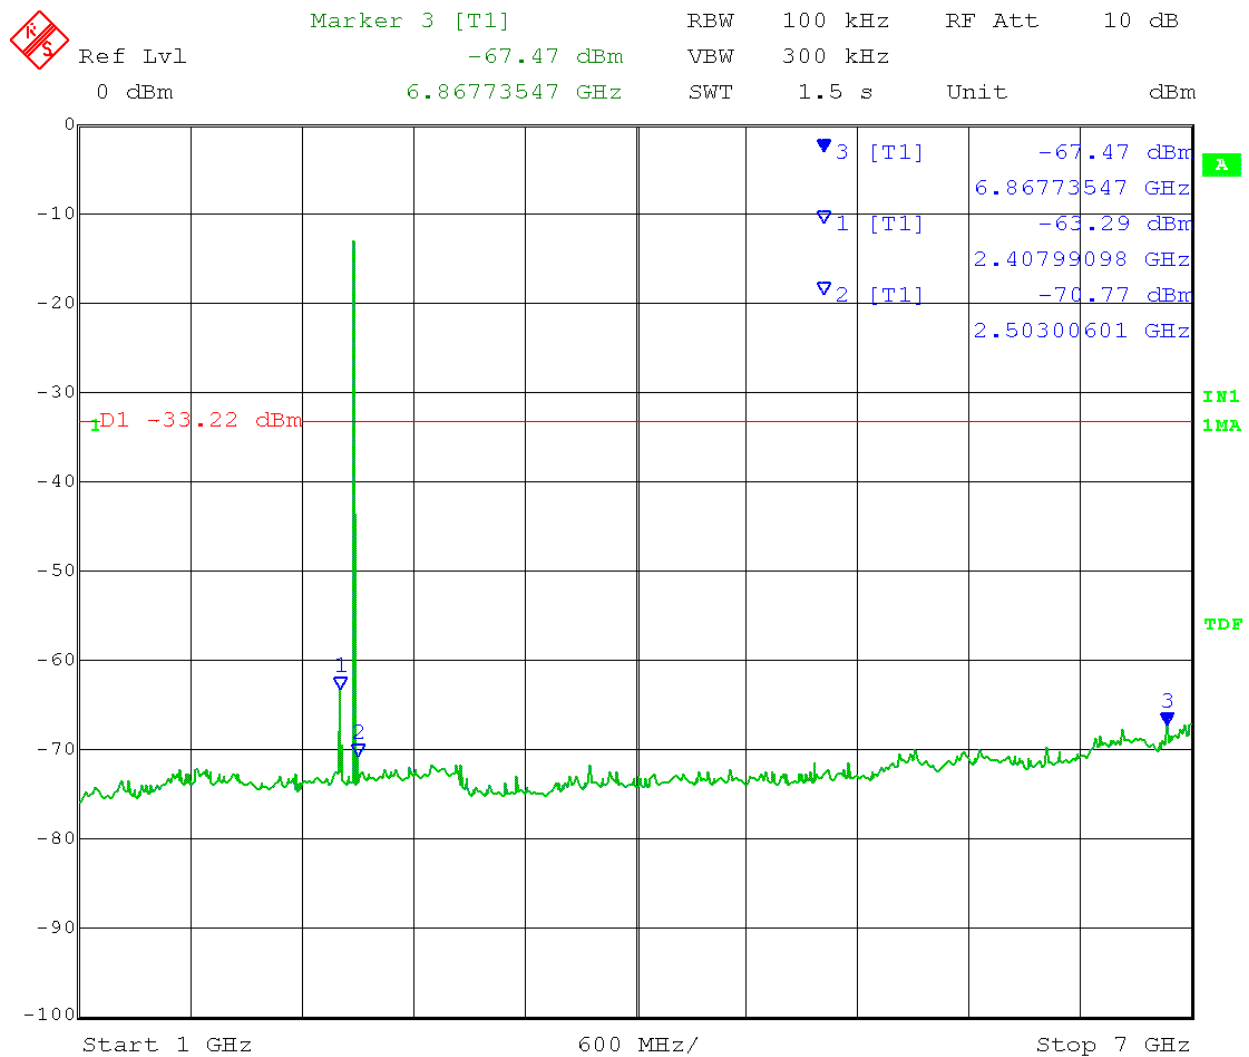


Date: 28.DEC.2016 12:49:10

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz  
Reference Level: -13.32 dBm  
Limit: -13.32 dBm -20 dB = -33.32 dBm

Emission level measurement: Frequency Range: 7-16 GHz

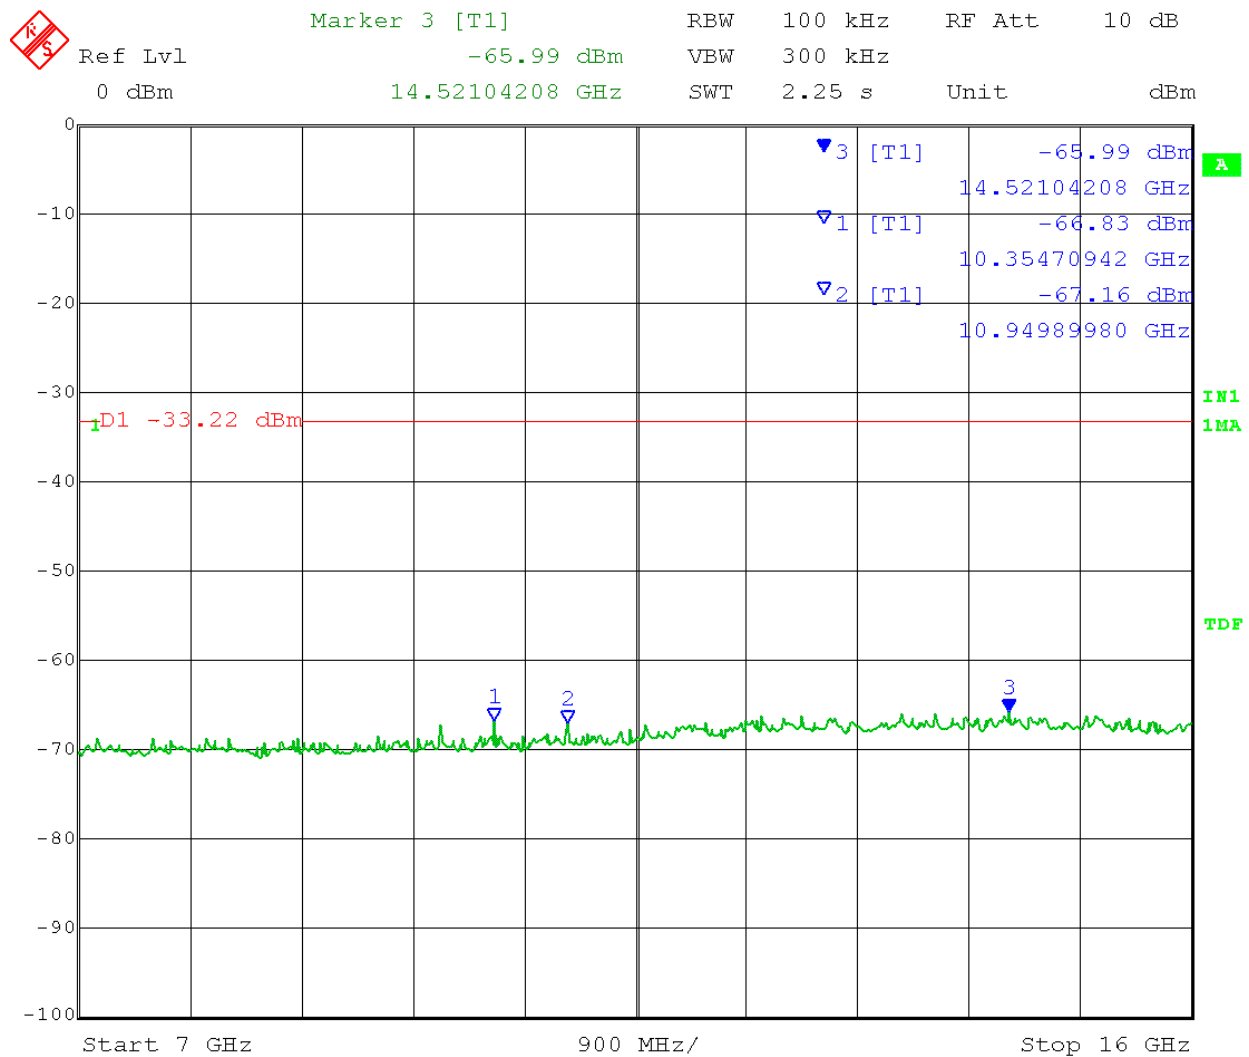


Date: 28.DEC.2016 12:52:07

Test Date: 12-28-2016  
Company: Whirlpool Corporation  
EUT: MC360HH  
Test: Spurious Emissions - Conducted  
Operator: Paul L

Comment: High Channel: Ch.78 Frequency: 2480 MHz  
Reference Level: -13.32 dBm  
Limit: -13.32 dBm -20 dB = -33.32 dBm

Emission level measurement: Frequency Range: 16-25 GHz

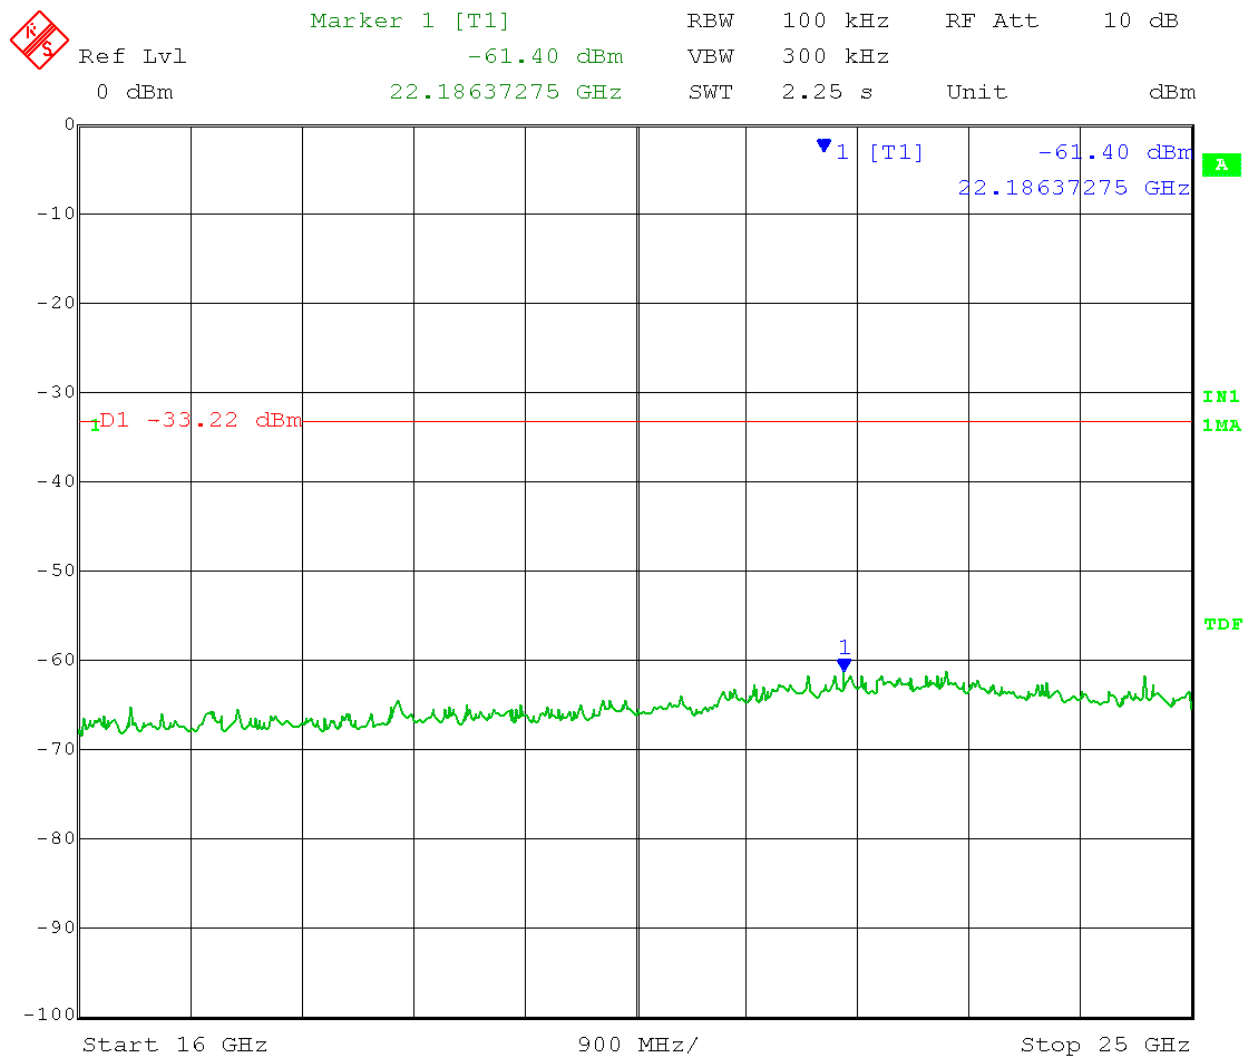

Date: 28.DEC.2016 12:54:18



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B10.0 Spurious Emissions – Radiated in Restricted Bands

**Rule Part:** FCC 15.247(d), 15.205(a), 15.209(a)

**Test Procedure:** ANSI C63.10-2013, sections 6.5 and 6.6

**Limit:** FCC 15.209

**Results:** Compliant

**Notes:** The EUT was set to transmit continuously (95% Duty Cycle) at its maximum power level at the low, middle and high channels of the operating band.

**FCC Pt.15 Class B**

**Electric Field Strength**

EUT: MC360HH  
Manufacturer: Whirlpool Corporation  
Operating Condition: 68deg. F; 28% R.H.  
Test Site: DLS Site 2  
Operator: Paul L #8153  
Test Specification: 3.7V DC  
Comment: Ch.0 2402MHz  
Date: 12-29-2016

**TEXT: "Vert 3 meters"**


Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

Equations: 
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)  
| Final maximized level using Quasi-Peak detector  
X Final maximized level using Average detector  
# Final maximized level using Peak detector



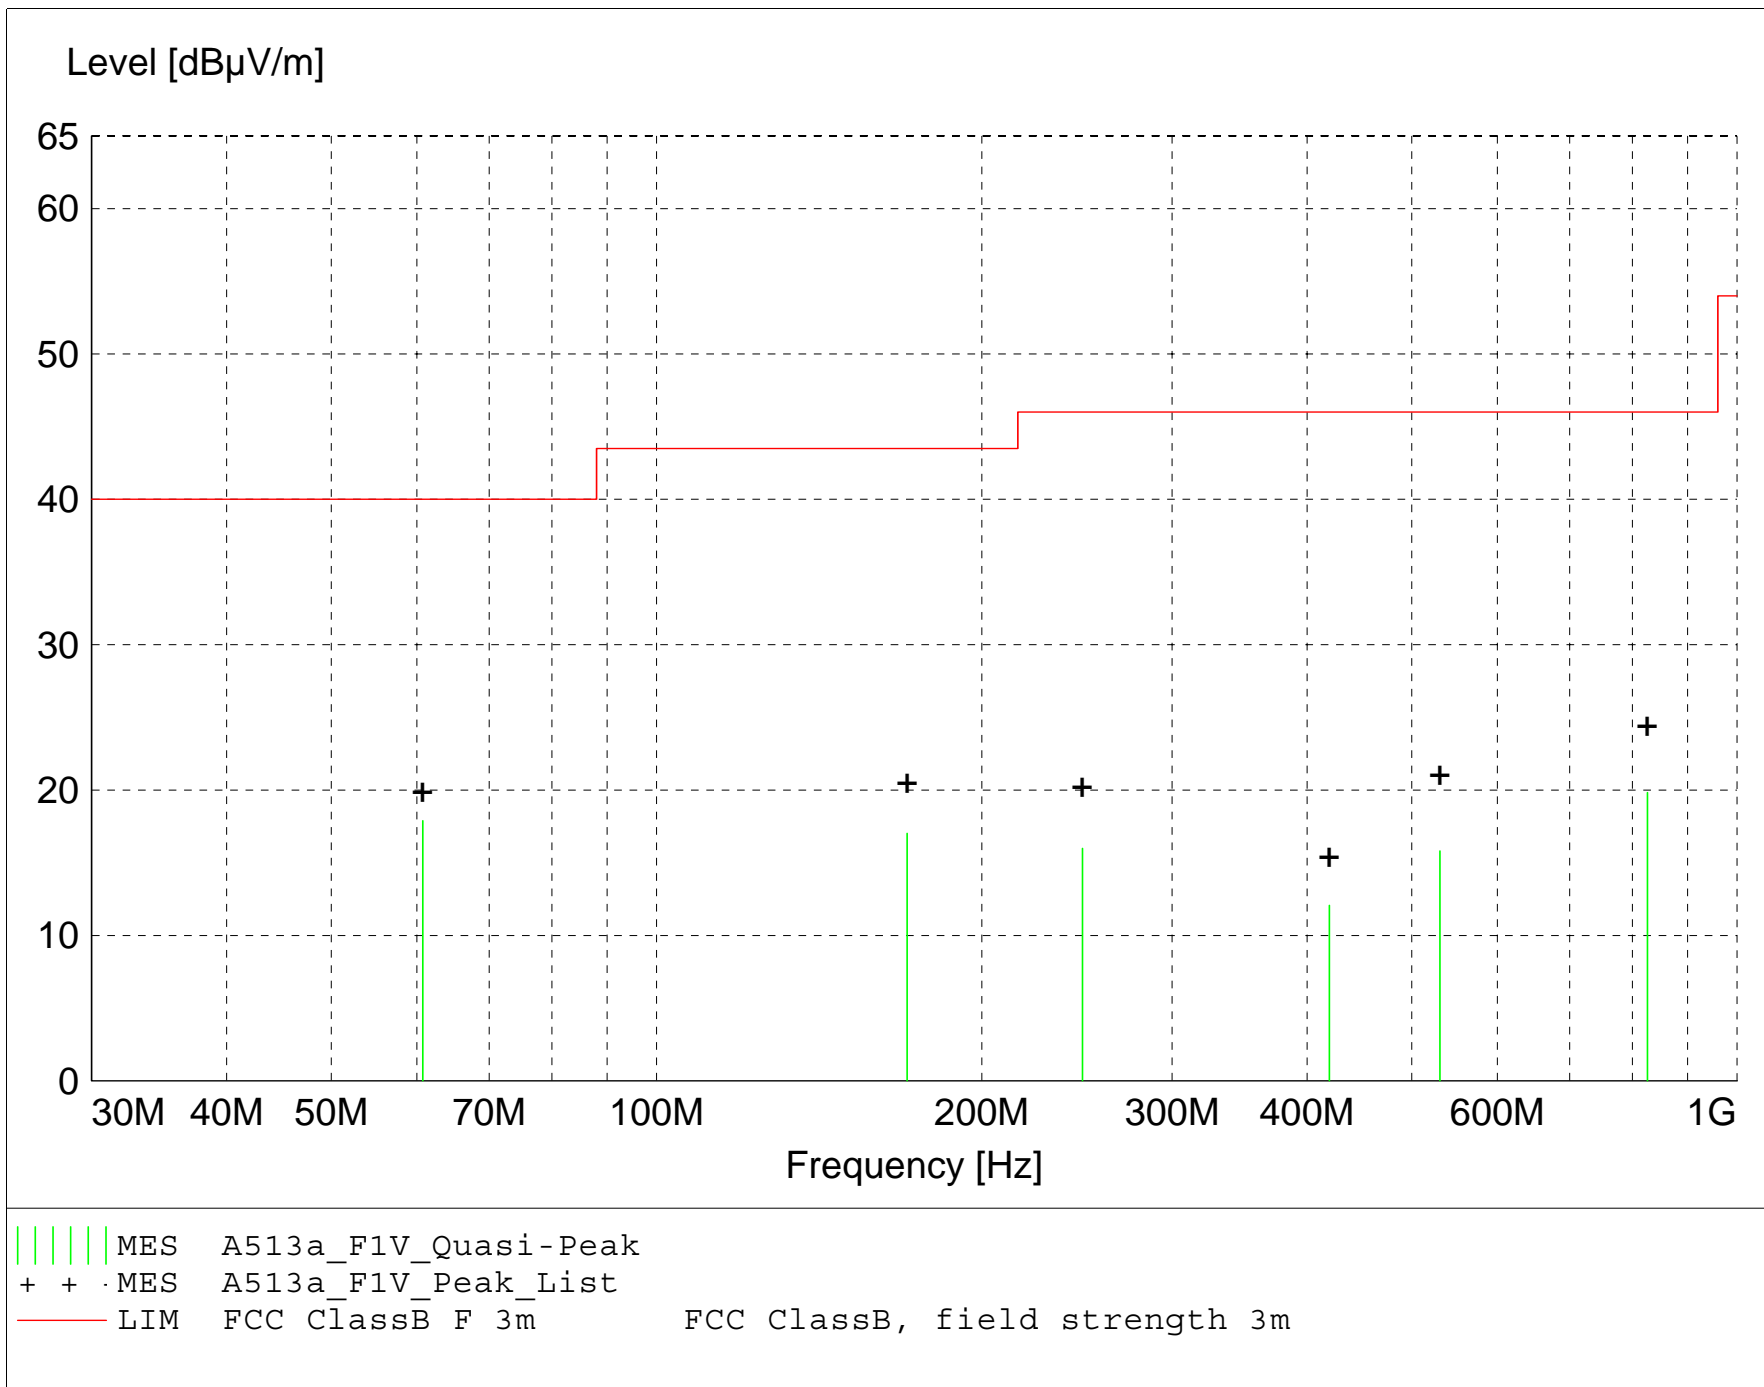

**MEASUREMENT RESULT: "A513a\_F1V\_Final"**

12/29/2016 10:26AM

| Frequency  | Level | Antenna | System | Total  | Limit  | Margin | Height | EuT   | Final      | Comment     |
|------------|-------|---------|--------|--------|--------|--------|--------|-------|------------|-------------|
| MHz        | dBμV  | Factor  | Loss   | Level  |        |        | Ant.   | Angle | Detector   |             |
|            |       | dBμV/m  | dB     | dBμV/m | dBμV/m | dB     | m      | deg   |            |             |
| 60.750000  | 31.21 | 9.80    | -23.1  | 17.9   | 40.0   | 22.1   | 1.00   | 0     | QUASI-PEAK | noise floor |
| 826.050000 | 16.05 | 22.00   | -18.2  | 19.8   | 46.0   | 26.2   | 1.00   | 0     | QUASI-PEAK | noise floor |
| 170.600000 | 24.59 | 14.56   | -22.1  | 17.0   | 43.5   | 26.5   | 1.00   | 0     | QUASI-PEAK | noise floor |
| 247.800000 | 25.48 | 12.17   | -21.7  | 16.0   | 46.0   | 30.0   | 1.00   | 0     | QUASI-PEAK | noise floor |
| 530.950000 | 17.50 | 18.22   | -19.9  | 15.8   | 46.0   | 30.2   | 1.00   | 0     | QUASI-PEAK | noise floor |
| 419.450000 | 16.34 | 16.19   | -20.5  | 12.1   | 46.0   | 33.9   | 1.00   | 0     | QUASI-PEAK | noise floor |

**FCC Pt.15 Class B**

**Electric Field Strength**

EUT: MC360HH  
Manufacturer: Whirlpool Corporation  
Operating Condition: 68deg. F; 28% R.H.  
Test Site: DLS Site 2  
Operator: Paul L #8153  
Test Specification: 3.7V DC  
Comment: Ch.0 2402MHz  
Date: 12-29-2016


**TEXT: "Horz 3 meters"**

Short Description: Test Set-up

Test Set-up: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

Equations: 
$$\text{Total Level (dB}\mu\text{V/m)} = \text{Level (dB}\mu\text{V)} + \text{System Loss (dB)} + \text{Antenna Factor (dB}\mu\text{V/m)}$$
$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

Graph Markers: + Frequency marker (Level of marker not related to final level)  
| Final maximized level using Quasi-Peak detector  
X Final maximized level using Average detector  
# Final maximized level using Peak detector

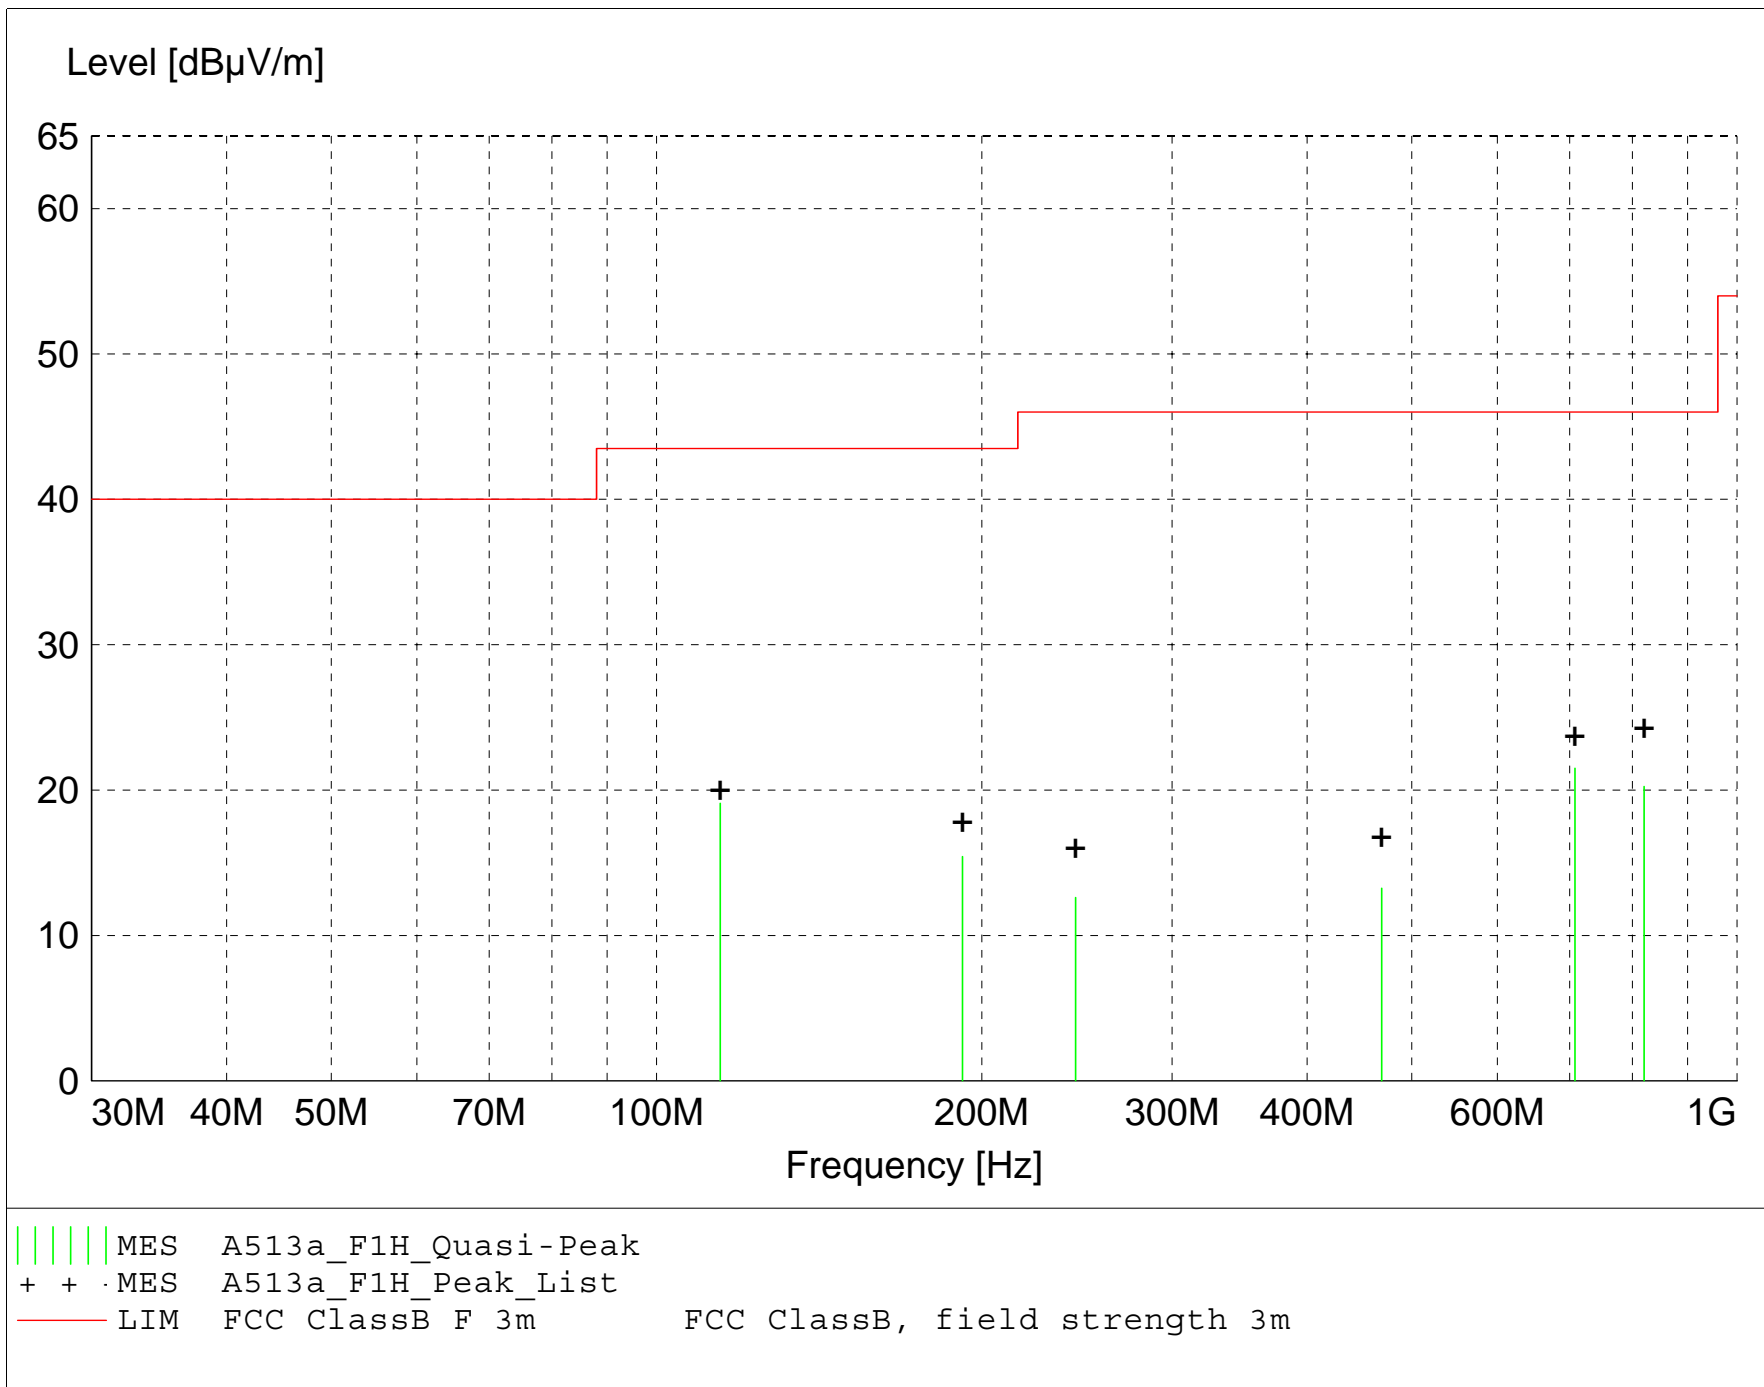

**MEASUREMENT RESULT: "A513a\_F1H\_Final"**

12/29/2016 10:44AM

| Frequency  | Level | Antenna | System | Total  | Limit  | Margin | Height | EuT   | Final      | Comment     |
|------------|-------|---------|--------|--------|--------|--------|--------|-------|------------|-------------|
| MHz        | dBμV  | Factor  | Loss   | Level  |        |        | Ant.   | Angle | Detector   |             |
|            |       | dBμV/m  | dB     | dBμV/m | dBμV/m | dB     | m      | deg   |            |             |
| 114.500000 | 29.38 | 12.25   | -22.5  | 19.1   | 43.5   | 24.4   | 4.00   | 0     | QUASI-PEAK | noise floor |
| 707.950000 | 19.44 | 21.06   | -19.0  | 21.5   | 46.0   | 24.5   | 4.00   | 0     | QUASI-PEAK | noise floor |
| 820.400000 | 16.41 | 22.09   | -18.3  | 20.3   | 46.0   | 25.7   | 4.00   | 0     | QUASI-PEAK | noise floor |
| 191.950000 | 19.82 | 17.69   | -22.1  | 15.4   | 43.5   | 28.1   | 4.00   | 0     | QUASI-PEAK | noise floor |
| 468.850000 | 16.17 | 17.32   | -20.2  | 13.2   | 46.0   | 32.8   | 4.00   | 0     | QUASI-PEAK | noise floor |
| 244.200000 | 22.33 | 11.97   | -21.7  | 12.6   | 46.0   | 33.4   | 4.00   | 0     | QUASI-PEAK | noise floor |

# Radiated Emissions in Restricted Bands – 1 GHz to 25 GHz

## 1 GHz to 18 GHz Tested at a 3 Meter Distance

**EUT:** MC360HH  
**Manufacturer:** Whirlpool Corporation  
**Operating Condition:** 67deg F 28%R.H.  
**Test Site:** G1  
**Operator:** Paul L  
**Test Specification:** Low channel: 2402MHz, 95% Duty Cycle, .45dB Duty Cycle Correction Factor  
**Comment:** **FCC Pt15.247 FCC Pt15.205**  
**Date:** 12-22-2016  
**Notes:** All other emissions at least 20 dB under the limit. No emissions found from 30-1000MHz or 18-25GHz

| Frequency (MHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Duty Cycle Correction (dB) | Total Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment      |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------------|----------------------|----------------|-------------|--------------------|-----------------|--------------|
| 7206.40         | Max Peak         | Vert                 | 58.41        | 35.79                 | -36.4            | 0                          | 57.8                 | 74             | 16.2        | 2.3                | 337             | 3rd Harmonic |
| 7206.40         | Average          | Vert                 | 53.50        | 35.79                 | -36.4            | 0.45                       | 53.3                 | 54             | 0.7         | 2.3                | 337             | 3rd Harmonic |
| 7206.40         | Max Peak         | Horz                 | 55.51        | 35.79                 | -34.3            | 0                          | 57.0                 | 74             | 17.0        | 2.0                | 336             | 3rd Harmonic |
| 7206.40         | Average          | Horz                 | 52.40        | 35.79                 | -36.4            | 0.45                       | 52.2                 | 54             | 1.8         | 2.0                | 336             | 3rd Harmonic |

## Radiated Emissions in Restricted Bands – 1 GHz to 25 GHz

1 GHz to 18 GHz Tested at a 3 Meter Distance

18 GHz to 25GHz Tested at a 3 Meter Distance

**EUT:** MC360HH  
**Manufacturer:** Whirlpool Corporation  
**Operating Condition:** 67deg F 28%R.H.  
**Test Site:** G1  
**Operator:** Paul L  
**Test Specification:** Mid channel: 2441MHz, 95% Duty Cycle, .45dB Duty Cycle Correction Factor  
**Comment:** **FCC Pt15.247 FCCPart15.205**  
**Date:** 12-22-2016  
**Notes:** All other emissions at least 20 dB under the limit. No emissions found from 30-1000MHz

| Frequency (MHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Duty Cycle Correction (dB) | Total Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment      |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------------|----------------------|----------------|-------------|--------------------|-----------------|--------------|
| 7323.60         | Max Peak         | Vert                 | 54.13        | 36.47                 | -33.5            | 0                          | 57.1                 | 74             | 16.9        | 1.0                | 346             | 3rd Harmonic |
| 7323.60         | Average          | Vert                 | 48.97        | 36.47                 | -33.5            | 0.45                       | 52.4                 | 54             | 1.6         | 1.0                | 346             | 3rd Harmonic |
| 7323.60         | Max Peak         | Horz                 | 53.73        | 36.47                 | -33.5            | 0                          | 56.7                 | 74             | 17.3        | 2.0                | 359             | 3rd Harmonic |
| 7323.60         | Average          | Horz                 | 47.95        | 36.47                 | -33.5            | 0.45                       | 51.4                 | 54             | 2.6         | 2.0                | 359             | 3rd Harmonic |
|                 |                  |                      |              |                       |                  |                            |                      |                |             |                    |                 |              |
| 19529.20        | Max Peak         | Vert                 | 51.83        | 45.67                 | -38.0            | 0                          | 59.5                 | 74             | 14.5        | 1.0                | 343             | 8th Harmonic |
| 19529.20        | Average          | Vert                 | 40.24        | 45.67                 | -38.0            | 0.45                       | 48.4                 | 54             | 5.6         | 1.0                | 343             | 8th Harmonic |
| 19529.20        | Max Peak         | Horz                 | N/A          |                       |                  |                            |                      |                |             |                    |                 |              |
| 19529.20        | Average          | Horz                 | N/A          |                       |                  |                            |                      |                |             |                    |                 |              |
|                 |                  |                      |              |                       |                  |                            |                      |                |             |                    |                 |              |

# Radiated Emissions in Restricted Bands – 1 GHz to 25 GHz

## 1 GHz to 18 GHz Tested at a 3 Meter Distance

**EUT:** MC360HH  
**Manufacturer:** Whirlpool Corporation  
**Operating Condition:** 67deg F 28%R.H.  
**Test Site:** G1  
**Operator:** Paul L  
**Test Specification:** High channel: 2480MHz, 95% Duty Cycle, .45dB Duty Cycle Correction Factor  
**Comment:** **FCC Pt15.247 FCCPart15.205**  
**Date:** 12-22-2016  
**Notes:** All other emissions at least 20 dB under the limit. No emissions found from 30-1000MHz or 18-25GHz

| Frequency (MHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Duty Cycle Correction (dB) | Total Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment      |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------------|----------------------|----------------|-------------|--------------------|-----------------|--------------|
| 4960.00         | Max Peak         | Vert                 | 50.82        | 33.08                 | -36.4            | 0                          | 47.5                 | 74             | 26.5        | 1.0                | 147             | 2nd Harmonic |
| 4960.00         | Average          | Vert                 | 39.64        | 33.08                 | -36.4            | 0.45                       | 36.8                 | 54             | 17.2        | 1.0                | 147             | 2nd Harmonic |
| 4960.00         | Max Peak         | Horz                 | 50.52        | 33.08                 | -36.4            | 0                          | 47.2                 | 74             | 26.8        | 1.0                | 177             | 2nd Harmonic |
| 4960.00         | Average          | Horz                 | 40.28        | 33.08                 | -36.4            | 0.45                       | 37.4                 | 54             | 16.6        | 1.0                | 177             | 2nd Harmonic |
|                 |                  |                      |              |                       |                  |                            |                      |                |             |                    |                 |              |
| 7440.40         | Max Peak         | Vert                 | 53.14        | 36.56                 | -32.8            | 0                          | 56.9                 | 74             | 17.1        | 1.1                | 210             | 3rd Harmonic |
| 7440.40         | Average          | Vert                 | 47.14        | 36.56                 | -32.8            | 0.45                       | 51.4                 | 54             | 2.6         | 1.1                | 210             | 3rd Harmonic |
| 7440.40         | Max Peak         | Horz                 | 51.24        | 36.56                 | -32.8            | 0                          | 55.0                 | 74             | 19.0        | 1.0                | 168             | 3rd Harmonic |
| 7440.40         | Average          | Horz                 | 48.20        | 36.56                 | -32.8            | 0.45                       | 52.4                 | 54             | 1.6         | 1.0                | 168             | 3rd Harmonic |
|                 |                  |                      |              |                       |                  |                            |                      |                |             |                    |                 |              |





|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix B

### B11.0 AC Line Conducted Emissions

**Rule Part:** FCC 15.207

**Test Procedure:** ANSI C63.10-2013, section 6.2

**Limit:** FCC 15.207(a)

**Results:** Compliant

**Notes:** This was an AC line conducted emissions measurement.  
The EUT was powered from a Stontronics Ltd. Model: DSA-12CA-05 power adapter with an input of 120 VAC 60 Hz and 240 VAC 60 Hz.



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 1 Avg  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 120VAC 60Hz

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

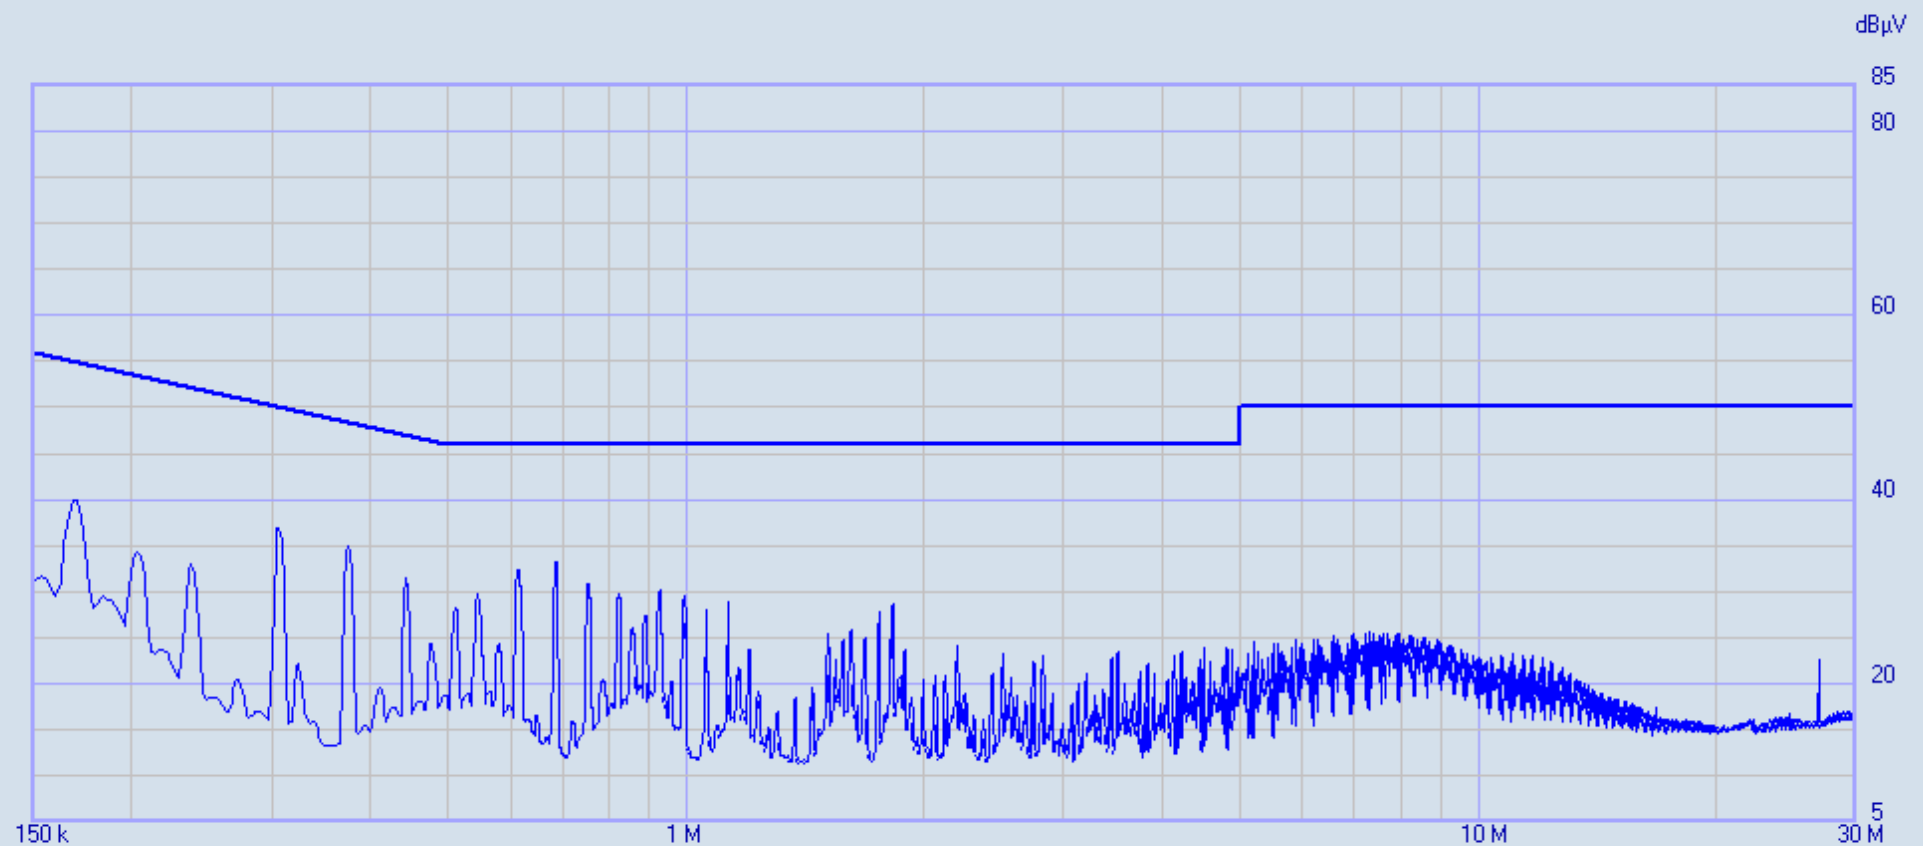

8153 Whirlpool Corp MC360 120V 60Hz L1\_000

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V AV

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

C-Avg

8153 Whirlpool Corp MC360 120V 60Hz L1\_000 29/12/2016 14:34:18  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 15 dB

|    | Frequency | C-Avg  | Limit       | Delta  | Factor      | Factor      | Factor   | Factor  |
|----|-----------|--------|-------------|--------|-------------|-------------|----------|---------|
|    | [MHz]     | [dBµV] | Class B V.. | [dB]   | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|    |           |        | [dBµV]      |        | [dB]        | [dB]        | [dB]     | [dB]    |
| 1  | 0.17045   | 40.00  | 54.94       | -14.94 | 1.39        | 0.08        | 1.97     | 10.01   |
| 2  | 0.30542   | 36.89  | 50.09       | -13.20 | 0.69        | 0.07        | 1.30     | 10.15   |
| 3  | 0.307465  | 36.98  | 50.04       | -13.06 | 0.68        | 0.07        | 1.29     | 10.15   |
| 4  | 0.30951   | 35.60  | 49.98       | -14.38 | 0.68        | 0.07        | 1.28     | 10.15   |
| 5  | 0.372905  | 34.26  | 48.44       | -14.18 | 0.56        | 0.09        | 1.06     | 10.13   |
| 6  | 0.37495   | 34.87  | 48.39       | -13.52 | 0.56        | 0.09        | 1.06     | 10.13   |
| 7  | 0.376995  | 34.59  | 48.35       | -13.76 | 0.56        | 0.09        | 1.05     | 10.14   |
| 8  | 0.614215  | 32.28  | 46.00       | -13.72 | 0.40        | 0.15        | 0.70     | 10.18   |
| 9  | 0.61626   | 32.38  | 46.00       | -13.62 | 0.40        | 0.15        | 0.70     | 10.18   |
| 10 | 0.6817    | 32.13  | 46.00       | -13.87 | 0.38        | 0.15        | 0.64     | 10.19   |
| 11 | 0.683745  | 33.17  | 46.00       | -12.83 | 0.37        | 0.15        | 0.64     | 10.19   |
| 12 | 0.68579   | 32.37  | 46.00       | -13.63 | 0.37        | 0.15        | 0.64     | 10.19   |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 1 QP  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld Charging Mode)  
Notes : 120VAC 60Hz

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

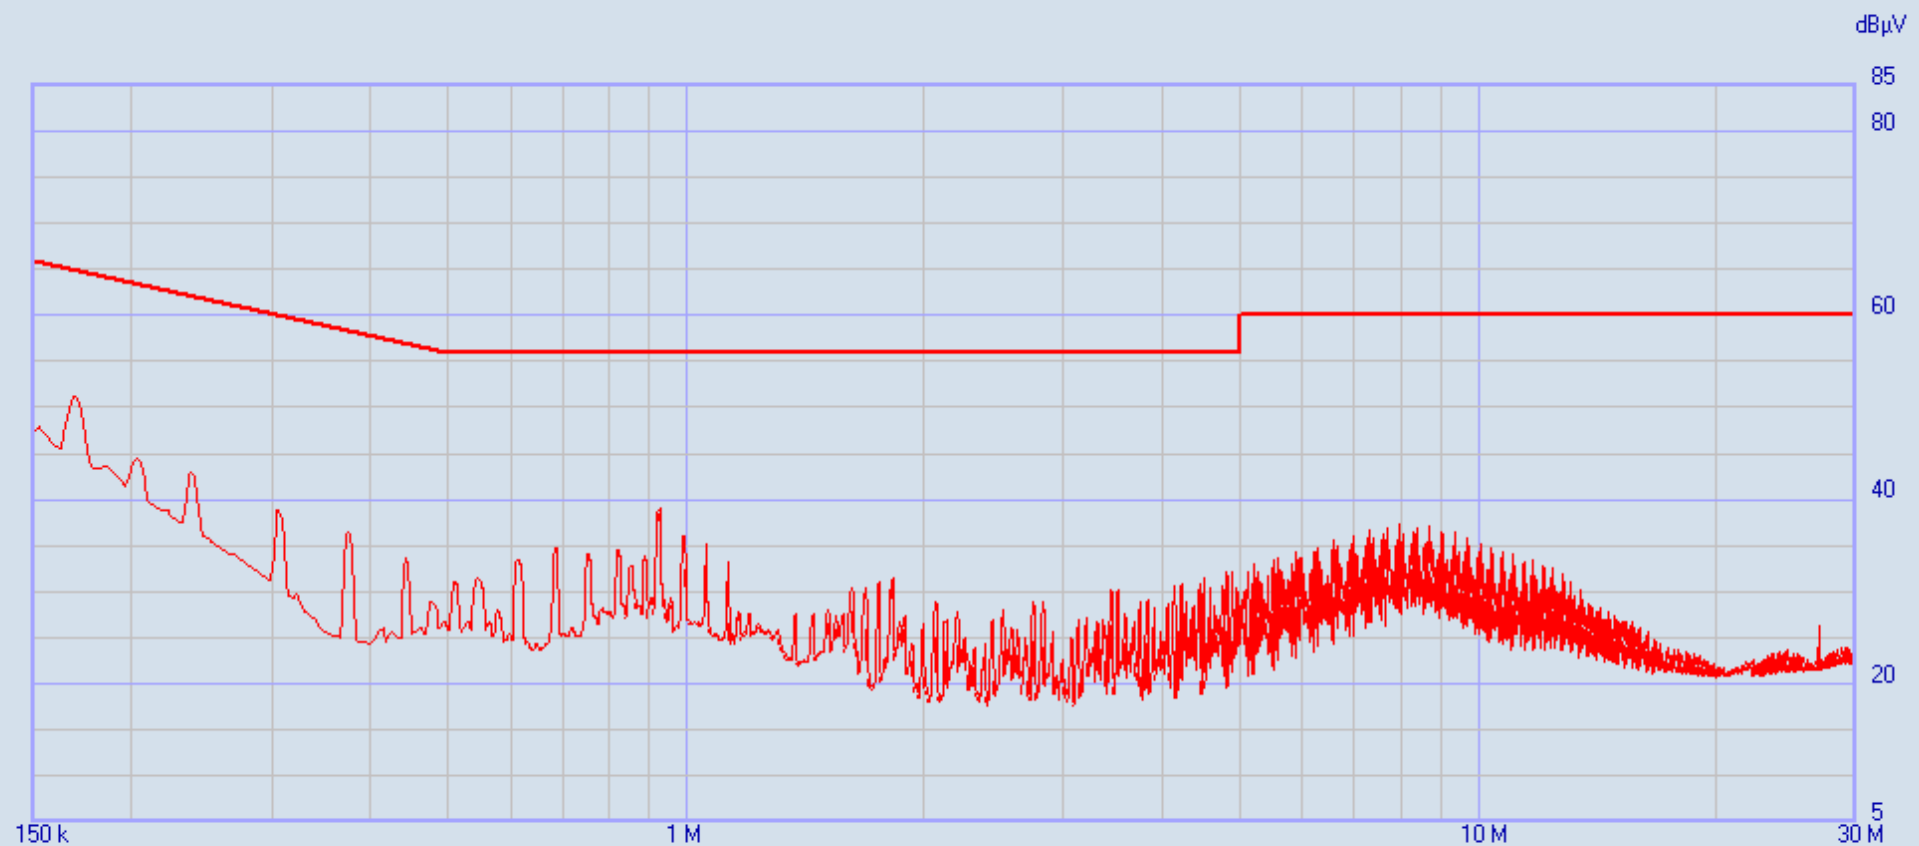

8153 Whirlpool Corp MC360 120V 60Hz L1\_000

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V QP

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

QPeak —

8153 Whirlpool Corp MC360 120V 60Hz L1\_000 29/12/2016 14:34:18  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 20 dB

| Frequency | QPeak    | Limit       | Delta | Factor      | Factor      | Factor   | Factor  |       |
|-----------|----------|-------------|-------|-------------|-------------|----------|---------|-------|
|           |          | Class B V.. |       | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |       |
| [MHz]     | [dBμV]   | [dBμV]      | [dB]  | [dB]        | [dB]        | [dB]     | [dB]    |       |
| 1         | 0.15     | 47.20       | 66.00 | -18.80      | 1.66        | 0.17     | 2.19    | 9.97  |
| 2         | 0.152045 | 47.87       | 65.89 | -18.02      | 1.62        | 0.16     | 2.17    | 9.98  |
| 3         | 0.15409  | 47.47       | 65.78 | -18.31      | 1.59        | 0.15     | 2.14    | 9.98  |
| 4         | 0.156135 | 46.87       | 65.67 | -18.80      | 1.57        | 0.14     | 2.12    | 9.98  |
| 5         | 0.15818  | 46.19       | 65.56 | -19.37      | 1.54        | 0.13     | 2.10    | 9.99  |
| 6         | 0.160225 | 45.78       | 65.45 | -19.67      | 1.51        | 0.12     | 2.07    | 9.99  |
| 7         | 0.16227  | 45.49       | 65.35 | -19.86      | 1.49        | 0.11     | 2.05    | 10.00 |
| 8         | 0.164315 | 47.17       | 65.24 | -18.07      | 1.46        | 0.10     | 2.03    | 10.00 |
| 9         | 0.16636  | 49.99       | 65.14 | -15.15      | 1.43        | 0.09     | 2.01    | 10.01 |
| 10        | 0.168405 | 51.11       | 65.04 | -13.93      | 1.41        | 0.09     | 1.99    | 10.01 |
| 11        | 0.17045  | 50.98       | 64.94 | -13.96      | 1.39        | 0.08     | 1.97    | 10.01 |
| 12        | 0.172495 | 49.74       | 64.84 | -15.10      | 1.37        | 0.07     | 1.96    | 10.01 |
| 13        | 0.17454  | 46.79       | 64.74 | -17.95      | 1.35        | 0.07     | 1.94    | 10.01 |
| 14        | 0.201125 | 43.95       | 63.56 | -19.61      | 1.11        | 0.03     | 1.74    | 10.00 |
| 15        | 0.20317  | 44.38       | 63.48 | -19.10      | 1.10        | 0.03     | 1.73    | 9.99  |
| 16        | 0.205215 | 44.00       | 63.40 | -19.40      | 1.09        | 0.03     | 1.71    | 9.99  |
| 17        | 0.23589  | 42.57       | 62.24 | -19.67      | 0.91        | 0.11     | 1.56    | 10.05 |
| 18        | 0.237935 | 43.01       | 62.17 | -19.16      | 0.90        | 0.10     | 1.55    | 10.06 |
| 19        | 0.23998  | 42.57       | 62.10 | -19.53      | 0.89        | 0.10     | 1.54    | 10.07 |
| 20        | 0.91892  | 38.22       | 56.00 | -17.78      | 0.34        | 0.18     | 0.48    | 10.20 |
| 21        | 0.920965 | 38.94       | 56.00 | -17.06      | 0.34        | 0.18     | 0.48    | 10.20 |
| 22        | 0.92301  | 39.15       | 56.00 | -16.85      | 0.34        | 0.18     | 0.48    | 10.20 |
| 23        | 0.925055 | 37.84       | 56.00 | -18.16      | 0.34        | 0.18     | 0.48    | 10.20 |
| 24        | 0.990495 | 36.00       | 56.00 | -20.00      | 0.33        | 0.19     | 0.45    | 10.20 |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 2 Avg  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT

-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 120VAC 60Hz Stontronics Ltd Switching Adapter


-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.



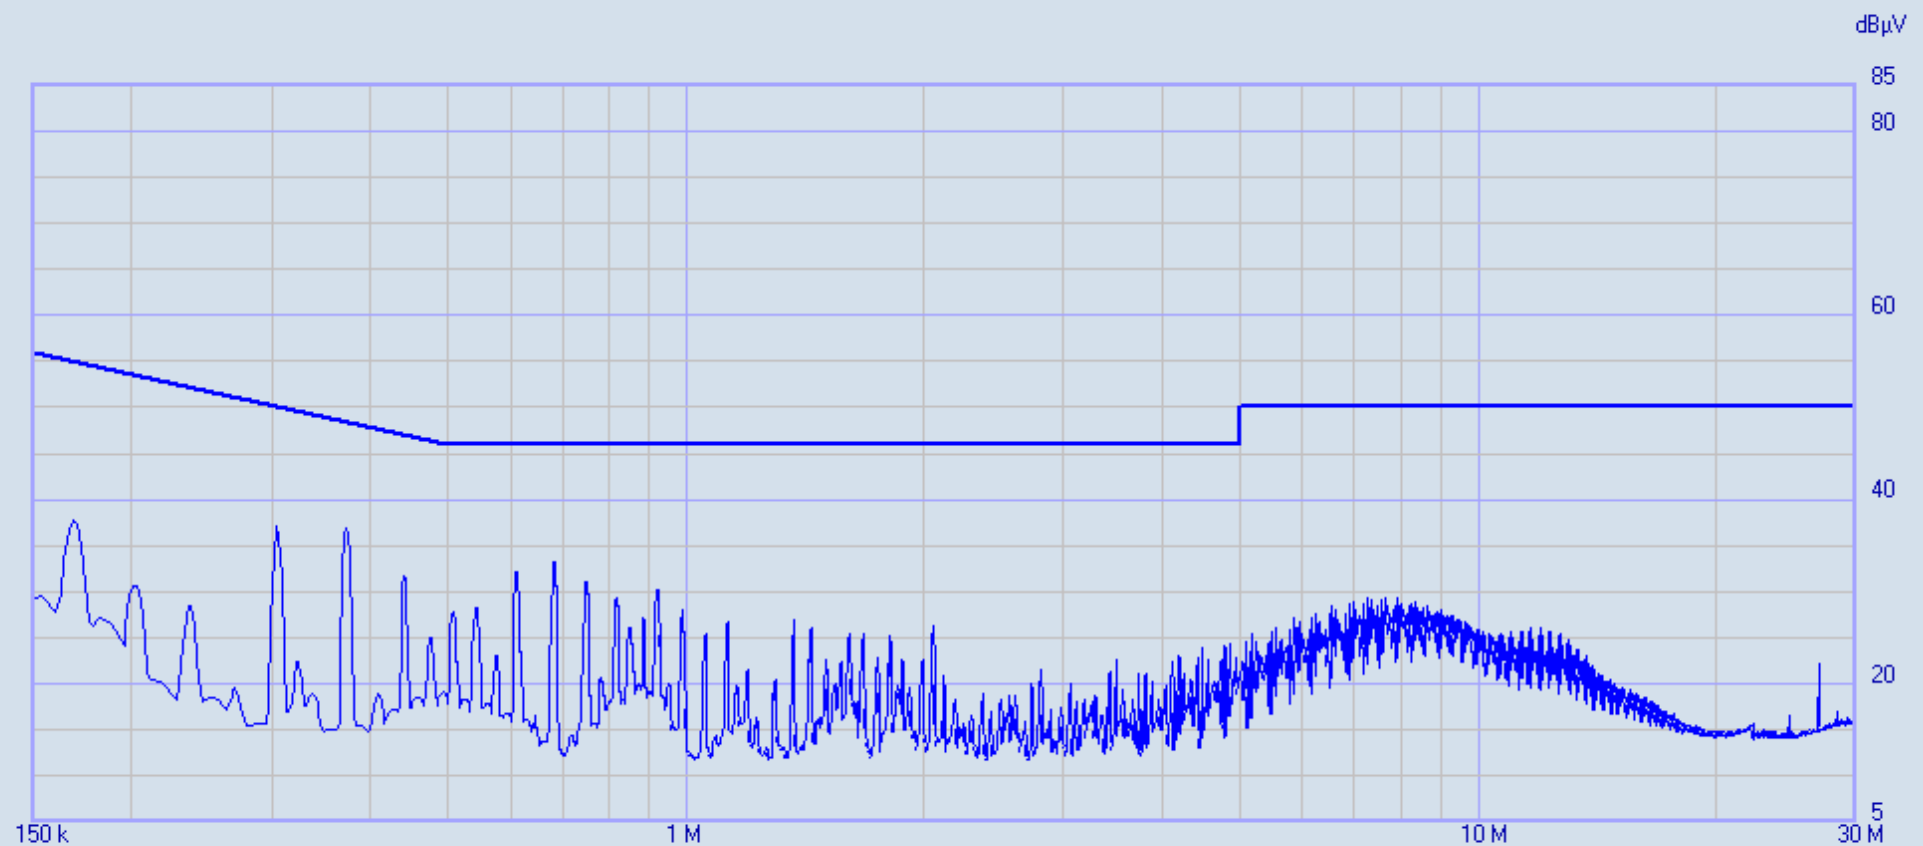

8153 Whirlpool Corp MC360 120V 60Hz L2

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V AV

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

C-Avg

8153 Whirlpool Corp MC360 120V 60Hz L2 29/12/2016 14:46:26  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 15 dB

|    | Frequency | C-Avg  | Limit       | Delta  | Factor      | Factor      | Factor   | Factor  |
|----|-----------|--------|-------------|--------|-------------|-------------|----------|---------|
|    | [MHz]     | [dBµV] | Class B V.. | [dB]   | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|    |           |        | [dBµV]      |        | [dB]        | [dB]        | [dB]     | [dB]    |
| 1  | 0.303375  | 36.69  | 50.15       | -13.46 | 0.69        | 0.07        | 1.31     | 10.15   |
| 2  | 0.30542   | 36.99  | 50.09       | -13.10 | 0.69        | 0.07        | 1.30     | 10.15   |
| 3  | 0.307465  | 36.06  | 50.04       | -13.98 | 0.68        | 0.07        | 1.29     | 10.15   |
| 4  | 0.37086   | 36.17  | 48.48       | -12.31 | 0.56        | 0.09        | 1.07     | 10.13   |
| 5  | 0.372905  | 36.79  | 48.44       | -11.65 | 0.56        | 0.09        | 1.06     | 10.13   |
| 6  | 0.37495   | 36.52  | 48.39       | -11.87 | 0.56        | 0.09        | 1.06     | 10.13   |
| 7  | 0.376995  | 33.68  | 48.35       | -14.67 | 0.56        | 0.09        | 1.05     | 10.14   |
| 8  | 0.610125  | 31.14  | 46.00       | -14.86 | 0.40        | 0.15        | 0.70     | 10.18   |
| 9  | 0.61217   | 32.09  | 46.00       | -13.91 | 0.40        | 0.15        | 0.70     | 10.18   |
| 10 | 0.614215  | 31.05  | 46.00       | -14.95 | 0.40        | 0.15        | 0.70     | 10.18   |
| 11 | 0.67761   | 31.68  | 46.00       | -14.32 | 0.38        | 0.15        | 0.64     | 10.19   |
| 12 | 0.679655  | 33.21  | 46.00       | -12.79 | 0.38        | 0.15        | 0.64     | 10.19   |
| 13 | 0.6817    | 32.89  | 46.00       | -13.11 | 0.38        | 0.15        | 0.64     | 10.19   |
| 14 | 0.749185  | 31.07  | 46.00       | -14.93 | 0.36        | 0.16        | 0.58     | 10.20   |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 2 QP  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

#### EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 120VAC 60Hz Stontronics Ltd Switching Adapter

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

#### Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

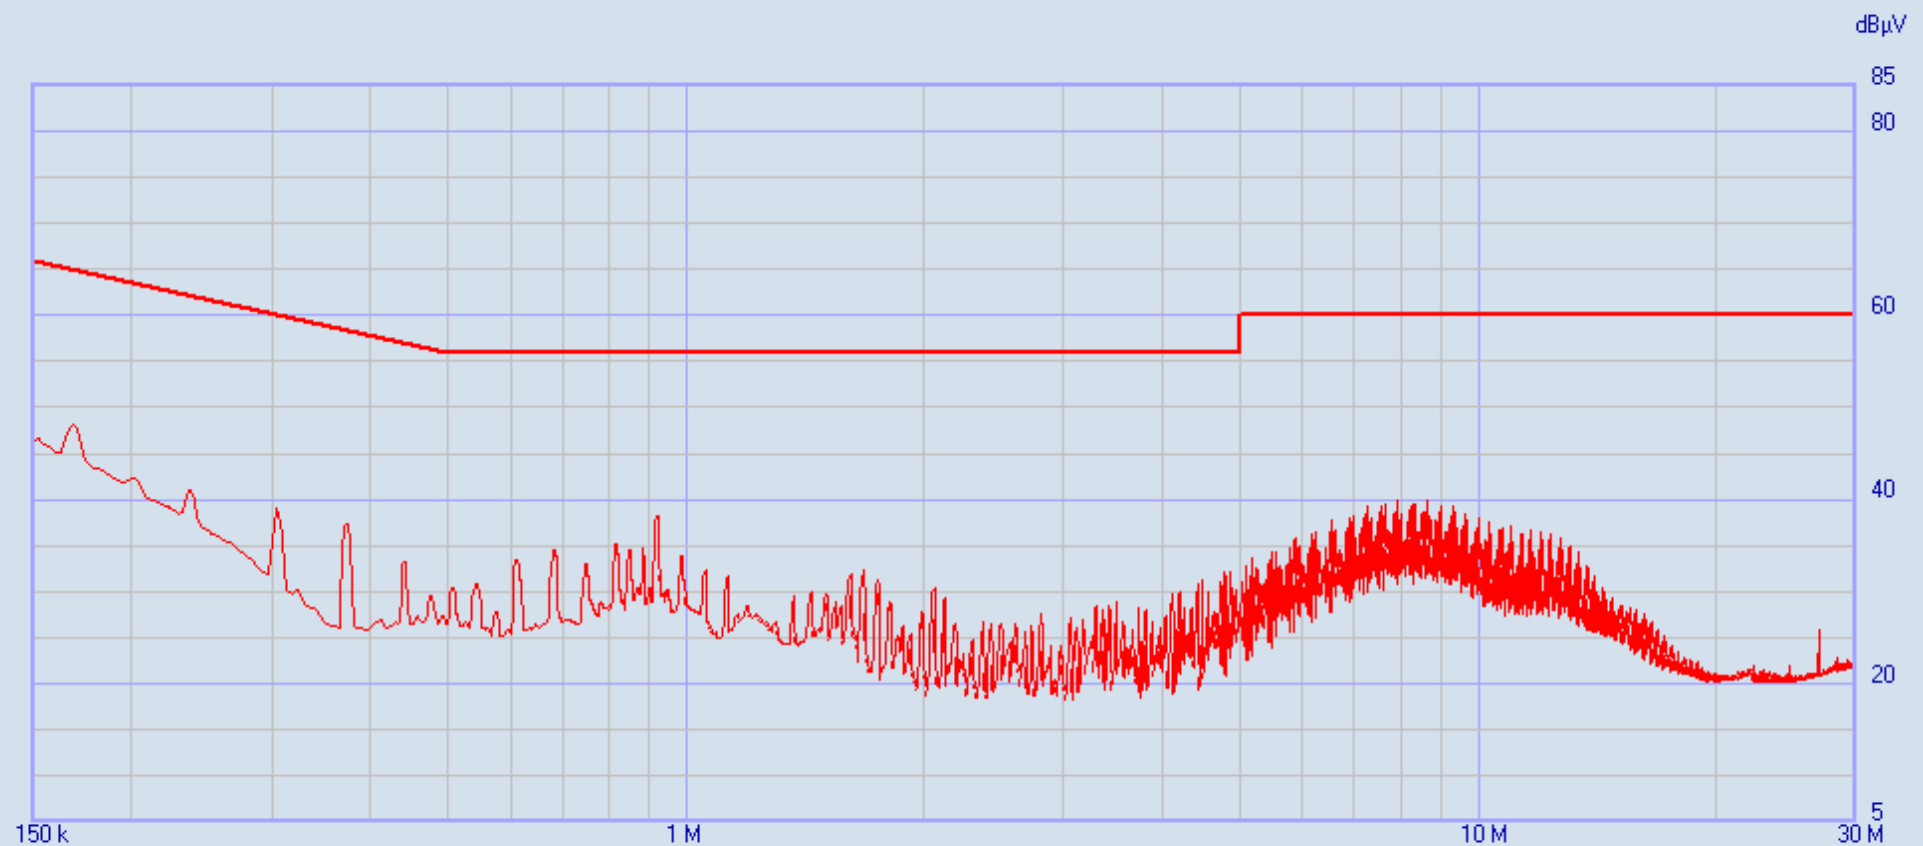

8153 Whirlpool Corp MC360 120V 60Hz L2

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V QP

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

QPeak —

8153 Whirlpool Corp MC360 120V 60Hz L2 29/12/2016 14:46:26  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 20 dB

| Frequency   | QPeak  | Limit       | Delta  | Factor      | Factor      | Factor   | Factor  |
|-------------|--------|-------------|--------|-------------|-------------|----------|---------|
| [MHz]       | [dBµV] | Class B V.. | [dB]   | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|             |        | [dBµV]      |        | [dB]        | [dB]        | [dB]     | [dB]    |
| 1 0.15      | 46.37  | 66.00       | -19.63 | 1.66        | 0.17        | 2.19     | 9.97    |
| 2 0.152045  | 46.68  | 65.89       | -19.21 | 1.62        | 0.16        | 2.17     | 9.98    |
| 3 0.15409   | 46.14  | 65.78       | -19.64 | 1.59        | 0.15        | 2.14     | 9.98    |
| 4 0.156135  | 45.71  | 65.67       | -19.96 | 1.57        | 0.14        | 2.12     | 9.98    |
| 5 0.164315  | 45.99  | 65.24       | -19.25 | 1.46        | 0.10        | 2.03     | 10.00   |
| 6 0.16636   | 47.72  | 65.14       | -17.42 | 1.43        | 0.09        | 2.01     | 10.01   |
| 7 0.168405  | 48.12  | 65.04       | -16.92 | 1.41        | 0.09        | 1.99     | 10.01   |
| 8 0.17045   | 47.62  | 64.94       | -17.32 | 1.39        | 0.08        | 1.97     | 10.01   |
| 9 0.172495  | 45.97  | 64.84       | -18.87 | 1.37        | 0.07        | 1.96     | 10.01   |
| 10 0.912785 | 36.25  | 56.00       | -19.75 | 0.34        | 0.18        | 0.48     | 10.20   |
| 11 0.91483  | 37.42  | 56.00       | -18.58 | 0.34        | 0.18        | 0.48     | 10.20   |
| 12 0.916875 | 38.01  | 56.00       | -17.99 | 0.34        | 0.18        | 0.48     | 10.20   |
| 13 0.91892  | 38.15  | 56.00       | -17.85 | 0.34        | 0.18        | 0.48     | 10.20   |
| 14 0.920965 | 36.46  | 56.00       | -19.54 | 0.34        | 0.18        | 0.48     | 10.20   |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 1 Avg  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 240VAC 60Hz Stontronics Ltd Switching Adapter

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

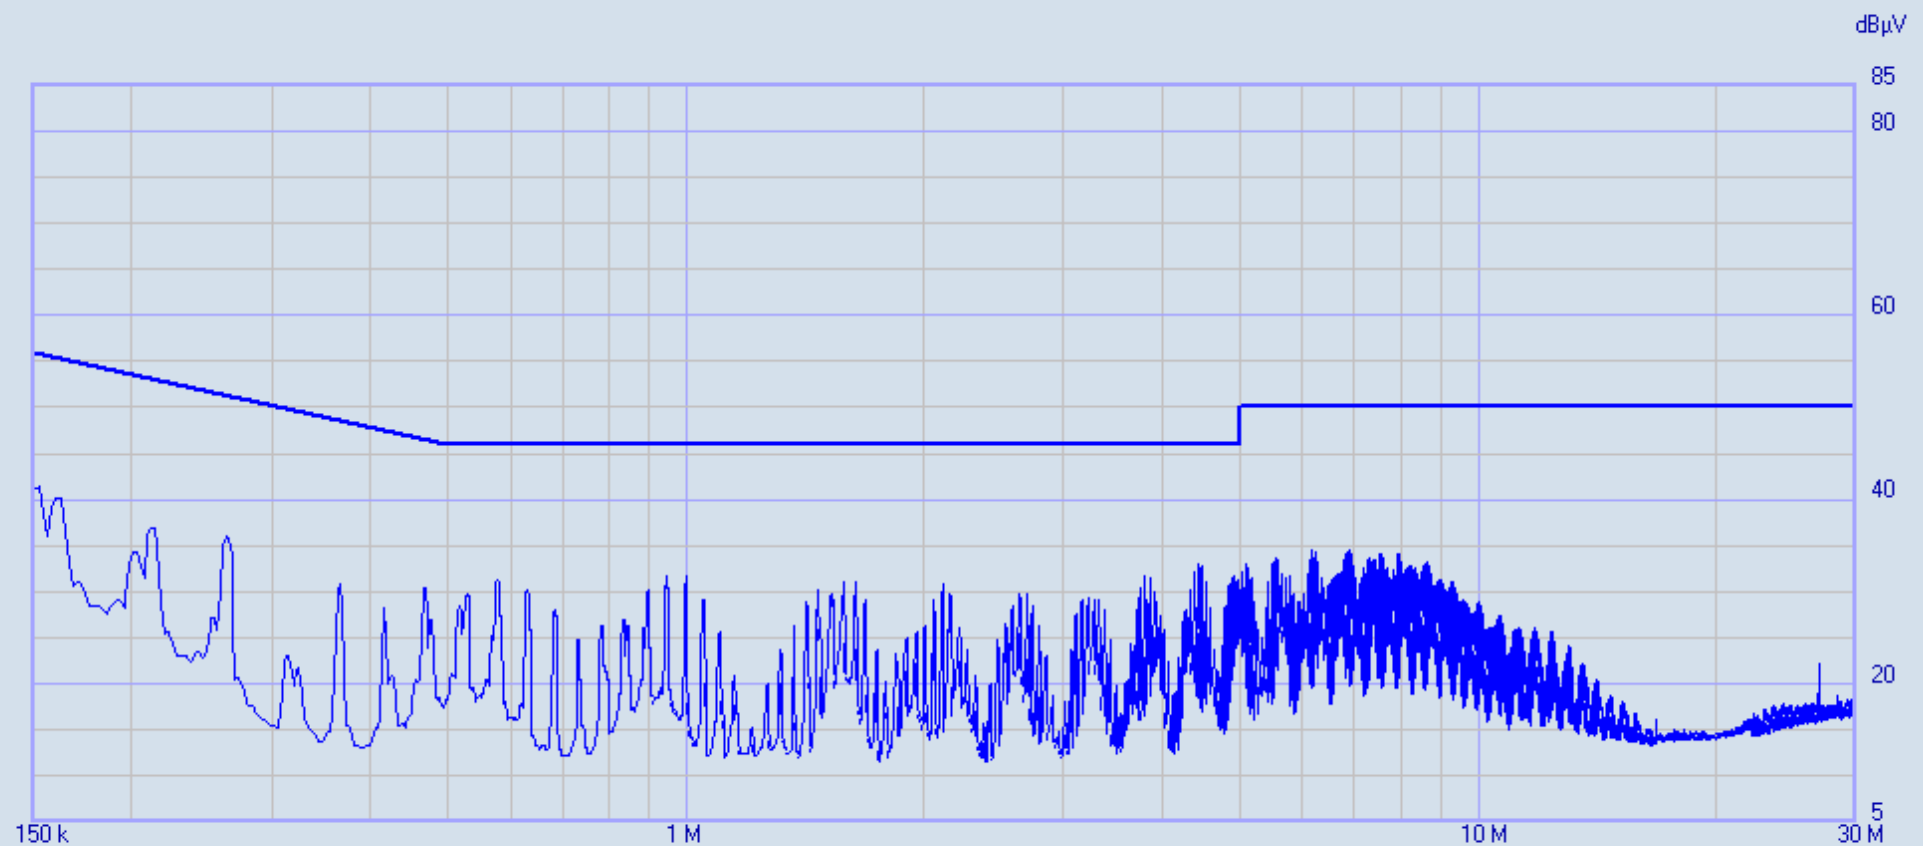

8153 Whirlpool Corp MC360 240V 60Hz L1

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V AV

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

C-Avg

8153 Whirlpool Corp MC360 240V 60Hz L1 29/12/2016 14:49:25  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 15 dB

| Frequency | C-Avg    | Limit       | Delta | Factor      | Factor      | Factor   | Factor  |
|-----------|----------|-------------|-------|-------------|-------------|----------|---------|
| [MHz]     | [dBμV]   | Class B V.. | [dB]  | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|           |          | [dBμV]      |       | [dB]        | [dB]        | [dB]     | [dB]    |
| 1         | 0.15     | 41.08       | 56.00 | -14.92      | 1.66        | 0.17     | 2.19    |
| 2         | 0.152045 | 41.38       | 55.89 | -14.51      | 1.62        | 0.16     | 2.17    |
| 3         | 0.577405 | 31.02       | 46.00 | -14.98      | 0.41        | 0.14     | 0.73    |
| 4         | 0.57945  | 31.33       | 46.00 | -14.67      | 0.41        | 0.14     | 0.73    |
| 5         | 0.945505 | 31.52       | 46.00 | -14.48      | 0.33        | 0.18     | 0.47    |
| 6         | 0.94755  | 31.56       | 46.00 | -14.44      | 0.33        | 0.18     | 0.47    |
| 7         | 0.99663  | 31.59       | 46.00 | -14.41      | 0.33        | 0.20     | 0.45    |
| 8         | 0.998675 | 31.62       | 46.00 | -14.38      | 0.33        | 0.20     | 0.45    |
| 9         | 1.579455 | 31.11       | 46.00 | -14.89      | 0.29        | 0.30     | 0.31    |
| 10        | 1.63058  | 31.09       | 46.00 | -14.91      | 0.29        | 0.30     | 0.31    |
| 11        | 3.78601  | 31.60       | 46.00 | -14.40      | 0.27        | 0.39     | 0.21    |
| 12        | 3.788055 | 31.55       | 46.00 | -14.45      | 0.27        | 0.39     | 0.21    |
| 13        | 3.837135 | 31.34       | 46.00 | -14.66      | 0.27        | 0.38     | 0.21    |
| 14        | 3.83918  | 31.35       | 46.00 | -14.65      | 0.27        | 0.38     | 0.21    |
| 15        | 4.36679  | 31.82       | 46.00 | -14.18      | 0.27        | 0.40     | 0.22    |
| 16        | 4.368835 | 32.10       | 46.00 | -13.90      | 0.27        | 0.40     | 0.22    |
| 17        | 4.37088  | 31.56       | 46.00 | -14.44      | 0.27        | 0.40     | 0.22    |
| 18        | 4.41587  | 31.02       | 46.00 | -14.98      | 0.27        | 0.41     | 0.22    |
| 19        | 4.417915 | 32.48       | 46.00 | -13.52      | 0.27        | 0.41     | 0.22    |
| 20        | 4.41996  | 32.93       | 46.00 | -13.07      | 0.27        | 0.41     | 0.22    |
| 21        | 4.422005 | 32.47       | 46.00 | -13.53      | 0.27        | 0.41     | 0.22    |
| 22        | 4.42405  | 31.11       | 46.00 | -14.89      | 0.27        | 0.41     | 0.22    |
| 23        | 4.46904  | 32.25       | 46.00 | -13.75      | 0.27        | 0.41     | 0.22    |
| 24        | 4.471085 | 32.73       | 46.00 | -13.27      | 0.27        | 0.41     | 0.22    |
| 25        | 4.47313  | 32.32       | 46.00 | -13.68      | 0.27        | 0.41     | 0.22    |
| 26        | 4.475175 | 31.00       | 46.00 | -15.00      | 0.27        | 0.41     | 0.22    |
| 27        | 4.52221  | 31.12       | 46.00 | -14.88      | 0.28        | 0.41     | 0.22    |
| 28        | 4.888265 | 31.25       | 46.00 | -14.75      | 0.27        | 0.42     | 0.21    |
| 29        | 4.89031  | 31.75       | 46.00 | -14.25      | 0.27        | 0.42     | 0.21    |
| 30        | 4.892355 | 31.50       | 46.00 | -14.50      | 0.27        | 0.42     | 0.21    |
| 31        | 4.941435 | 31.28       | 46.00 | -14.72      | 0.27        | 0.43     | 0.20    |
| 32        | 4.94348  | 31.33       | 46.00 | -14.67      | 0.27        | 0.43     | 0.20    |
| 33        | 4.945525 | 31.16       | 46.00 | -14.84      | 0.27        | 0.43     | 0.20    |
| 34        | 4.99665  | 31.09       | 46.00 | -14.91      | 0.27        | 0.43     | 0.20    |



|    |          |       |       |        |      |      |      |       |
|----|----------|-------|-------|--------|------|------|------|-------|
| 35 | 4.998695 | 31.80 | 46.00 | -14.20 | 0.27 | 0.43 | 0.20 | 10.23 |
|----|----------|-------|-------|--------|------|------|------|-------|



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 1 QP  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 240VAC 60Hz Stontronics Ltd Switching Adapter

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

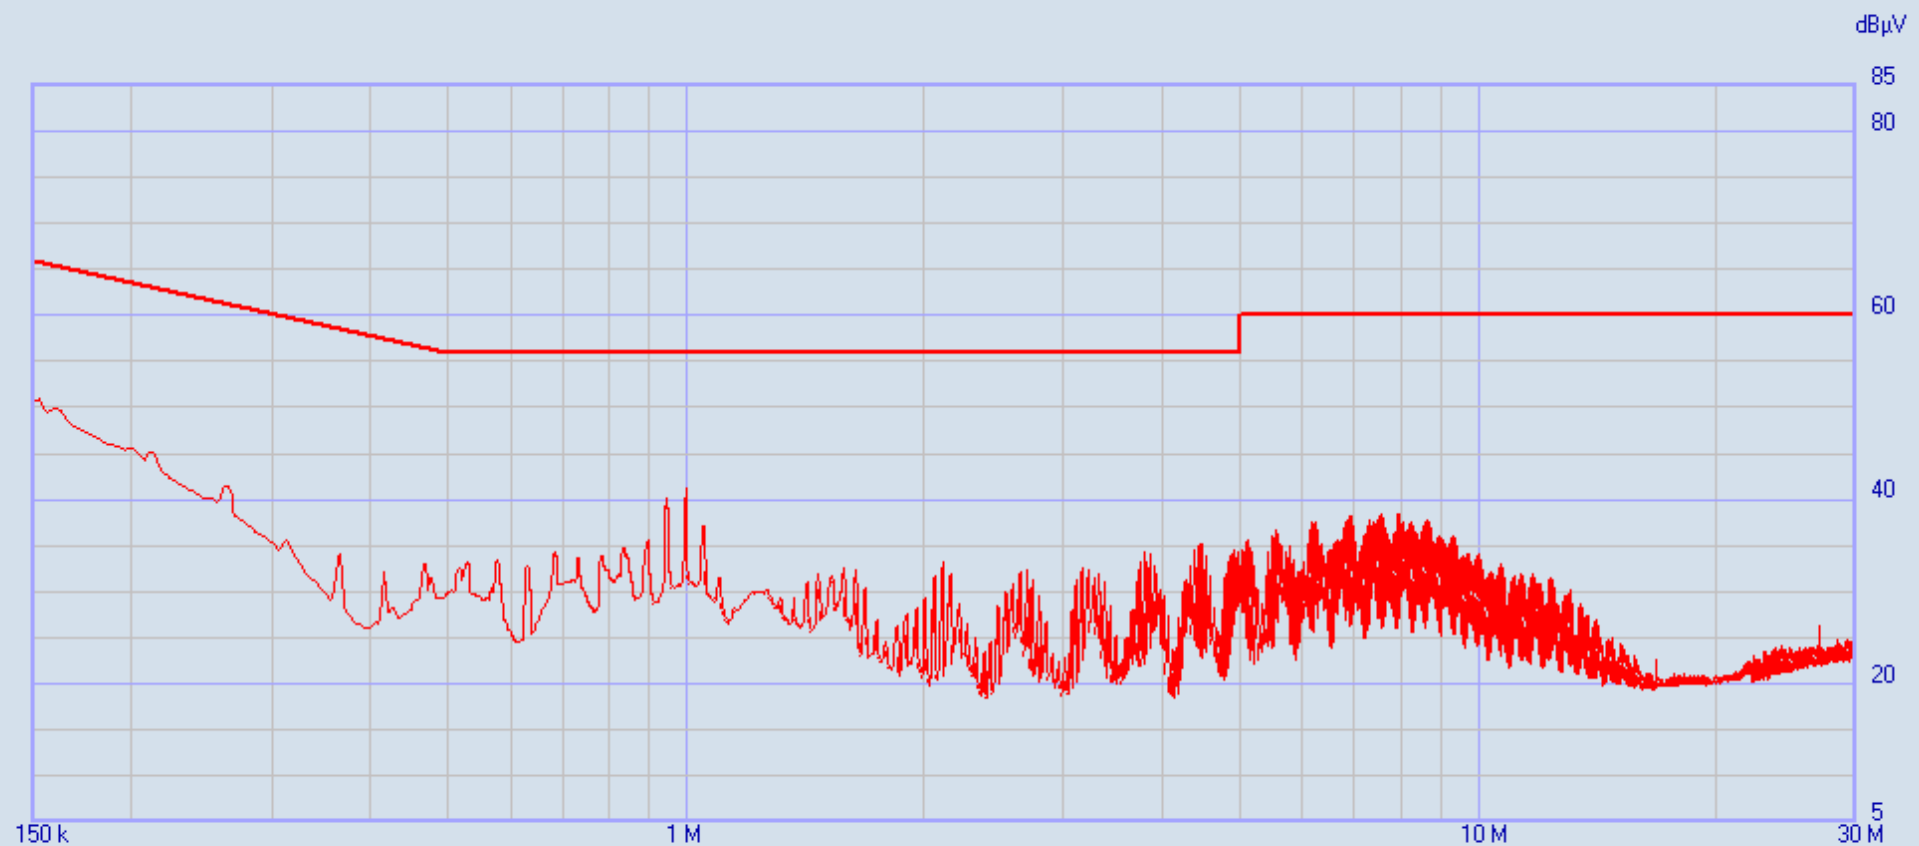

8153 Whirlpool Corp MC360 240V 60Hz L1

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V QP

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

QPeak —

8153 Whirlpool Corp MC360 240V 60Hz L1 29/12/2016 14:49:25  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 18 dB

| Frequency | QPeak    | Limit       | Delta | Factor      | Factor      | Factor   | Factor  |       |
|-----------|----------|-------------|-------|-------------|-------------|----------|---------|-------|
| [MHz]     | [dBμV]   | Class B V.. | [dB]  | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |       |
|           |          | [dBμV]      |       | [dB]        | [dB]        | [dB]     | [dB]    |       |
| 1         | 0.15     | 50.61       | 66.00 | -15.39      | 1.66        | 0.17     | 2.19    | 9.97  |
| 2         | 0.152045 | 50.88       | 65.89 | -15.01      | 1.62        | 0.16     | 2.17    | 9.98  |
| 3         | 0.15409  | 50.35       | 65.78 | -15.43      | 1.59        | 0.15     | 2.14    | 9.98  |
| 4         | 0.156135 | 49.51       | 65.67 | -16.16      | 1.57        | 0.14     | 2.12    | 9.98  |
| 5         | 0.15818  | 49.77       | 65.56 | -15.79      | 1.54        | 0.13     | 2.10    | 9.99  |
| 6         | 0.160225 | 49.85       | 65.45 | -15.60      | 1.51        | 0.12     | 2.07    | 9.99  |
| 7         | 0.16227  | 49.65       | 65.35 | -15.70      | 1.49        | 0.11     | 2.05    | 10.00 |
| 8         | 0.164315 | 49.17       | 65.24 | -16.07      | 1.46        | 0.10     | 2.03    | 10.00 |
| 9         | 0.16636  | 48.28       | 65.14 | -16.86      | 1.43        | 0.09     | 2.01    | 10.01 |
| 10        | 0.168405 | 47.94       | 65.04 | -17.10      | 1.41        | 0.09     | 1.99    | 10.01 |
| 11        | 0.17045  | 47.81       | 64.94 | -17.13      | 1.39        | 0.08     | 1.97    | 10.01 |
| 12        | 0.172495 | 47.60       | 64.84 | -17.24      | 1.37        | 0.07     | 1.96    | 10.01 |
| 13        | 0.17454  | 47.38       | 64.74 | -17.36      | 1.35        | 0.07     | 1.94    | 10.01 |
| 14        | 0.176585 | 47.09       | 64.64 | -17.55      | 1.32        | 0.06     | 1.92    | 10.01 |
| 15        | 0.17863  | 46.84       | 64.55 | -17.71      | 1.30        | 0.05     | 1.91    | 10.01 |
| 16        | 0.180675 | 46.65       | 64.45 | -17.80      | 1.28        | 0.05     | 1.89    | 10.01 |
| 17        | 0.18272  | 46.47       | 64.36 | -17.89      | 1.26        | 0.04     | 1.88    | 10.01 |
| 18        | 0.184765 | 46.28       | 64.27 | -17.99      | 1.24        | 0.03     | 1.86    | 10.01 |
| 19        | 0.94346  | 38.56       | 56.00 | -17.44      | 0.33        | 0.18     | 0.47    | 10.20 |
| 20        | 0.945505 | 40.01       | 56.00 | -15.99      | 0.33        | 0.18     | 0.47    | 10.20 |
| 21        | 0.94755  | 40.06       | 56.00 | -15.94      | 0.33        | 0.18     | 0.47    | 10.20 |
| 22        | 0.949595 | 39.01       | 56.00 | -16.99      | 0.33        | 0.18     | 0.47    | 10.20 |
| 23        | 0.994585 | 39.20       | 56.00 | -16.80      | 0.33        | 0.19     | 0.45    | 10.20 |
| 24        | 0.99663  | 41.09       | 56.00 | -14.91      | 0.33        | 0.20     | 0.45    | 10.20 |
| 25        | 0.998675 | 41.27       | 56.00 | -14.73      | 0.33        | 0.20     | 0.45    | 10.20 |
| 26        | 1.00072  | 40.39       | 56.00 | -15.61      | 0.33        | 0.20     | 0.45    | 10.20 |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 2 Avg  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

EUT


-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 240VAC 60Hz Stontronics Ltd Switching Adapter

-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.

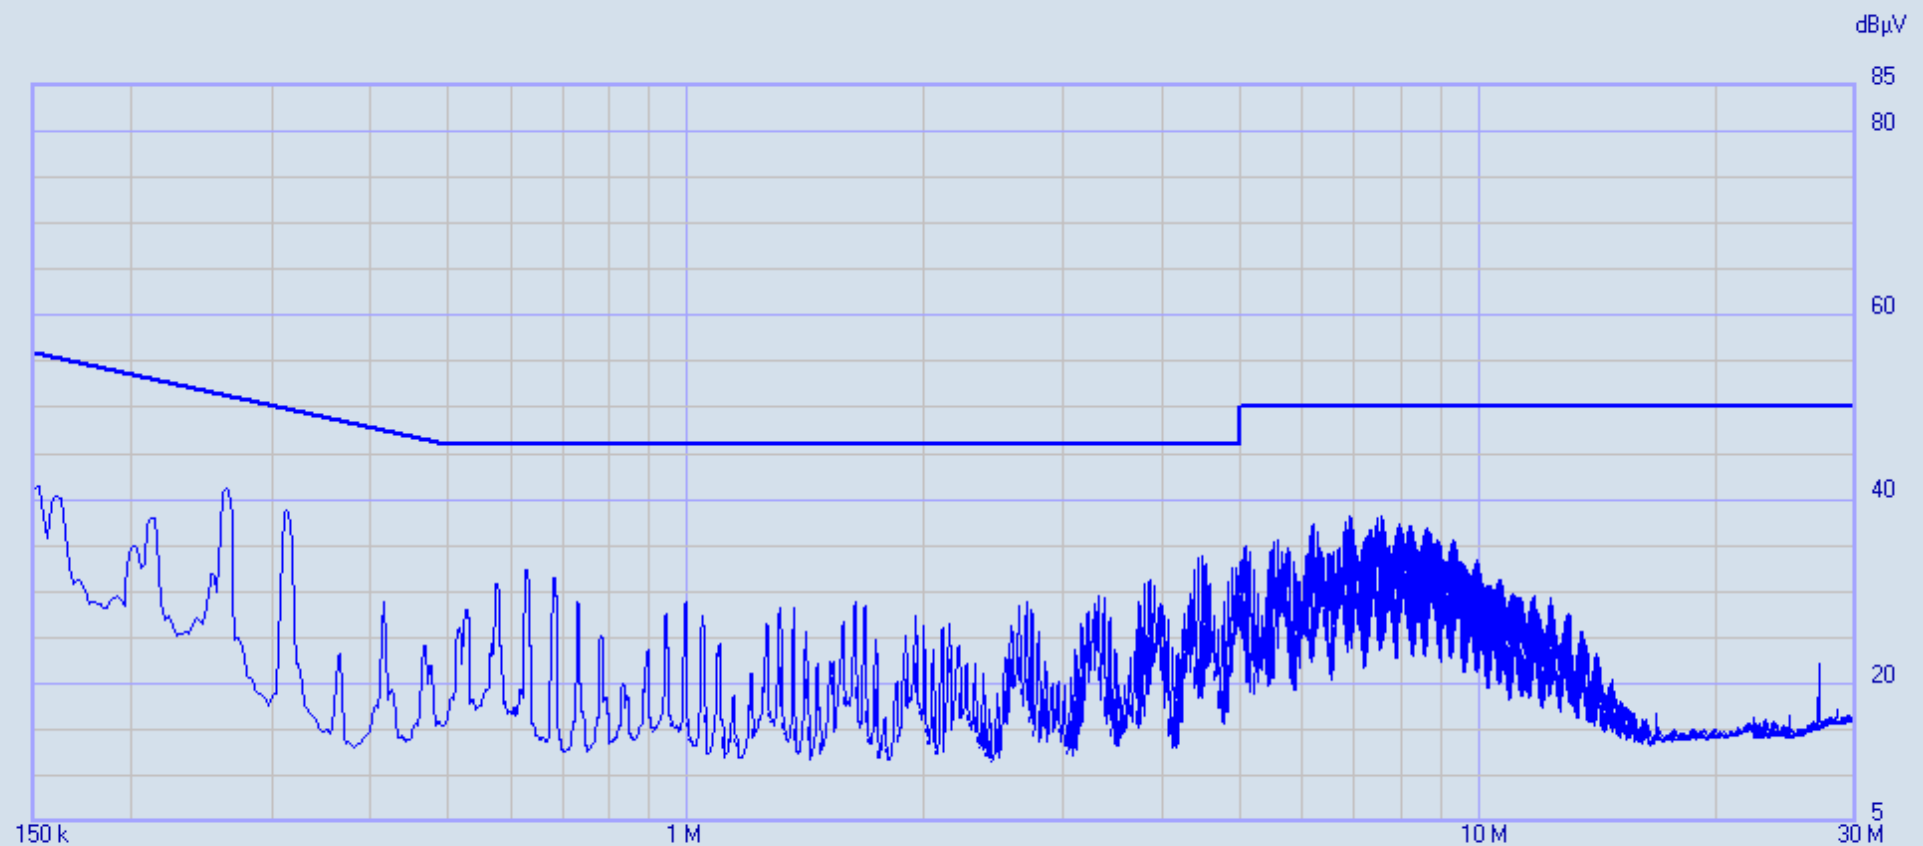

8153 Whirlpool Corp MC360 240V 60Hz L2

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V AV

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

C-Avg

8153 Whirlpool Corp MC360 240V 60Hz L2 29/12/2016 14:50:50  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 12 dB

|   | Frequency | C-Avg  | Limit       | Delta  | Factor      | Factor      | Factor   | Factor  |
|---|-----------|--------|-------------|--------|-------------|-------------|----------|---------|
|   | [MHz]     | [dBµV] | Class B V.. | [dB]   | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|   |           |        | [dBµV]      |        | [dB]        | [dB]        | [dB]     | [dB]    |
| 1 | 0.26043   | 40.73  | 51.42       | -10.69 | 0.81        | 0.06        | 1.43     | 10.17   |
| 2 | 0.262475  | 41.28  | 51.35       | -10.07 | 0.81        | 0.06        | 1.43     | 10.17   |
| 3 | 0.26452   | 41.10  | 51.29       | -10.19 | 0.80        | 0.06        | 1.43     | 10.17   |
| 4 | 0.311555  | 38.51  | 49.93       | -11.42 | 0.67        | 0.06        | 1.27     | 10.14   |
| 5 | 0.3136    | 38.92  | 49.87       | -10.95 | 0.67        | 0.06        | 1.26     | 10.14   |
| 6 | 0.315645  | 38.63  | 49.82       | -11.19 | 0.66        | 0.06        | 1.25     | 10.14   |
| 7 | 6.831015  | 38.18  | 50.00       | -11.82 | 0.28        | 0.53        | 0.19     | 10.25   |
| 8 | 7.46292   | 38.05  | 50.00       | -11.95 | 0.28        | 0.57        | 0.15     | 10.24   |
| 9 | 7.514045  | 38.14  | 50.00       | -11.86 | 0.28        | 0.57        | 0.16     | 10.24   |



Report issuing date : 12-29-2016

Standard : FCC Pt.15 Class B  
Test Type : Voltage Mains Test  
Test Site : DLS O.F. Screen Room  
Temperature : 70 °F  
Humidity : 23%  
Test Specs : Line 2 QP  
Operator : Paul L  
DLS Project # : 8153  
Result : Pass

#### EUT

-----  
Manufacturer : Whirlpool Corporation  
Model : MC360HH  
Product : Maytag Connect 360 Handheld (Charging Mode)  
Notes : 240VAC 60Hz Stontronics Ltd Switching Adapter


-----  
Testing Company : DLS Electronic Systems  
Tel./Fax : 262-279-0210  
Web site : <http://www.dlsemc.com>

#### Receiver Details

-----  
Model : PMM 9010F  
Brand : Narda  
S/N : 020WW40102  
Last Calibration : 06/23/2016

NOTE: The column in the table that is labeled "delta" shows the margin in dB with respect to the limit. A negative number indicates the level of the emission is under the limit by the given value, while a positive number indicates the emission level is above the limit by the given value.



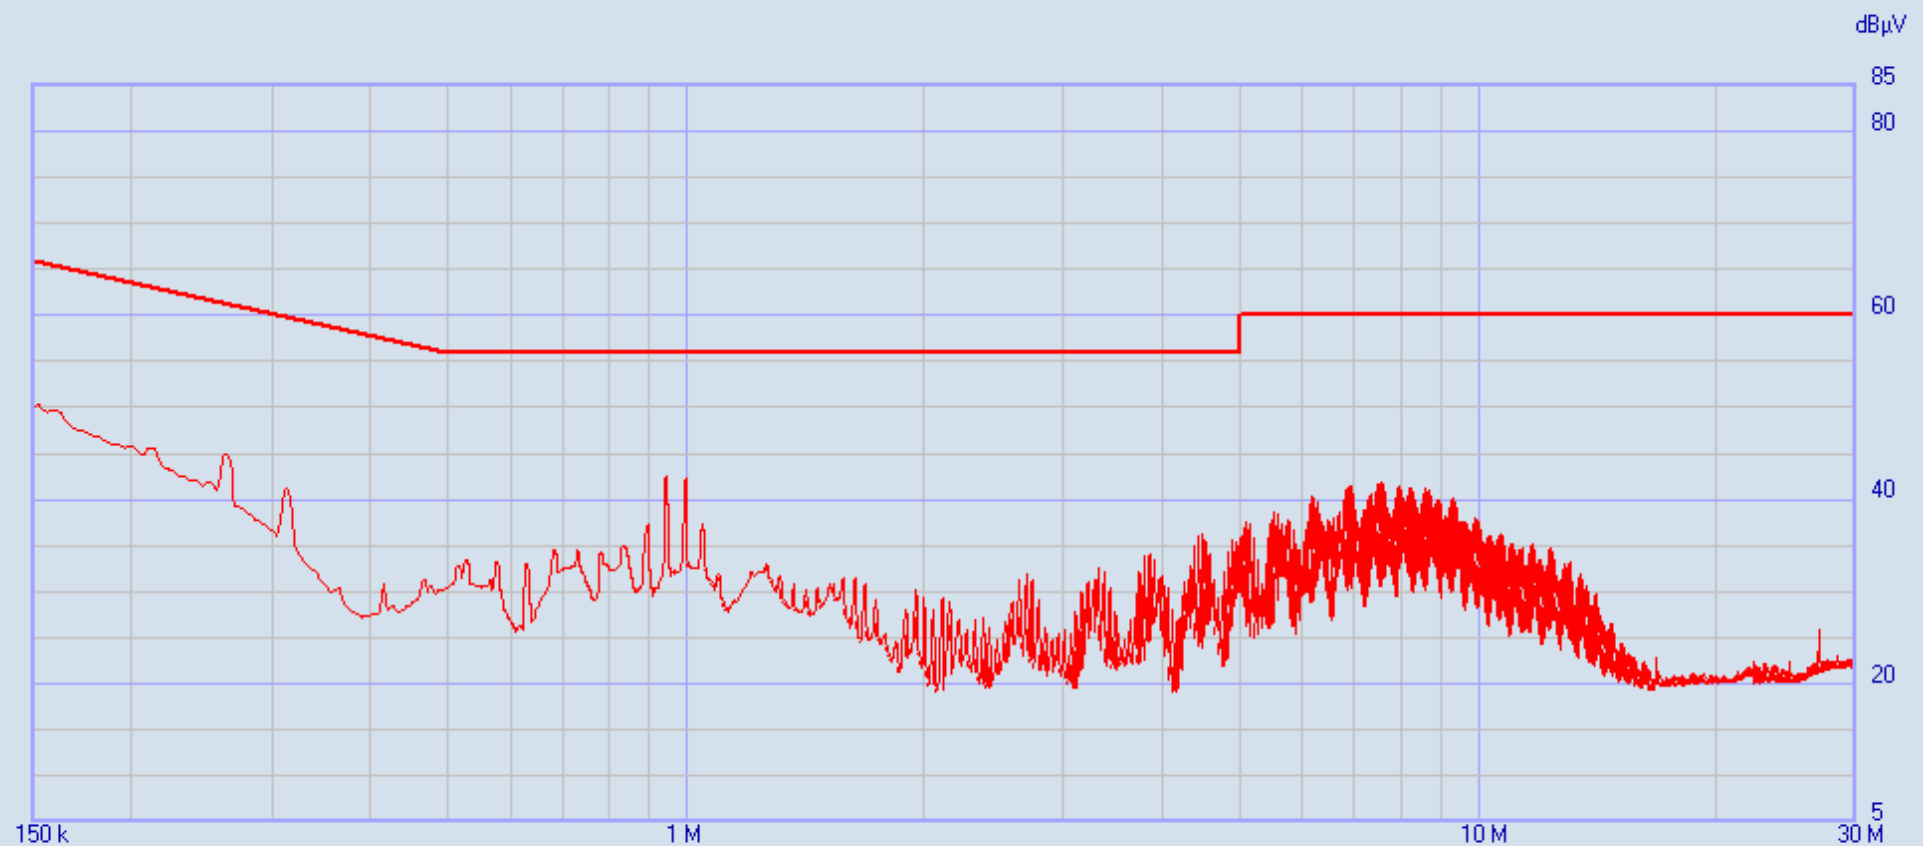

8153 Whirlpool Corp MC360 240V 60Hz L2

|   | Start [MHz] | Stop [MHz] | Step             | Detector                              | Hold Time | RBW   | Min Att | Pre Amp | Pre Sel | Prompt start | Ancillary |
|---|-------------|------------|------------------|---------------------------------------|-----------|-------|---------|---------|---------|--------------|-----------|
| 1 | 0.15        | 30         | AUTO (2.045 kHz) | P Q C<br>Class B V QP<br>Class B V AV | 1500 ms   | 9 kHz | 10      | OFF     | ON      | ...          | ...       |

Ancillary = General

Limits:  
Class B V QP

Factors:  
LISN DLS#128  
Cables 43 & 45  
DLS #592  
EM-L705

QPeak —

8153 Whirlpool Corp MC360 240V 60Hz L2 29/12/2016 14:50:50  
 Rel. SW 2.22 (August 2015)  
 Rel. FW 1.54 20/04/16  
 Margin: 16 dB

|    | Frequency | QPeak  | Limit       | Delta  | Factor      | Factor      | Factor   | Factor  |
|----|-----------|--------|-------------|--------|-------------|-------------|----------|---------|
|    | [MHz]     | [dBµV] | Class B V.. | [dB]   | LISN DLS#.. | Cables 43.. | DLS #592 | EM-L705 |
|    |           |        | [dBµV]      |        | [dB]        | [dB]        | [dB]     | [dB]    |
| 1  | 0.15      | 50.12  | 66.00       | -15.88 | 1.66        | 0.17        | 2.19     | 9.97    |
| 2  | 0.152045  | 50.32  | 65.89       | -15.57 | 1.62        | 0.16        | 2.17     | 9.98    |
| 3  | 0.15409   | 49.85  | 65.78       | -15.93 | 1.59        | 0.15        | 2.14     | 9.98    |
| 4  | 0.15818   | 49.65  | 65.56       | -15.91 | 1.54        | 0.13        | 2.10     | 9.99    |
| 5  | 0.160225  | 49.61  | 65.45       | -15.84 | 1.51        | 0.12        | 2.07     | 9.99    |
| 6  | 0.16227   | 49.40  | 65.35       | -15.95 | 1.49        | 0.11        | 2.05     | 10.00   |
| 7  | 0.94346   | 42.14  | 56.00       | -13.86 | 0.33        | 0.18        | 0.47     | 10.20   |
| 8  | 0.945505  | 42.61  | 56.00       | -13.39 | 0.33        | 0.18        | 0.47     | 10.20   |
| 9  | 0.94755   | 42.18  | 56.00       | -13.82 | 0.33        | 0.18        | 0.47     | 10.20   |
| 10 | 0.994585  | 41.88  | 56.00       | -14.12 | 0.33        | 0.19        | 0.45     | 10.20   |
| 11 | 0.99663   | 42.35  | 56.00       | -13.65 | 0.33        | 0.20        | 0.45     | 10.20   |
| 12 | 0.998675  | 41.83  | 56.00       | -14.17 | 0.33        | 0.20        | 0.45     | 10.20   |



|                |                       |
|----------------|-----------------------|
| Company:       | Whirlpool Corporation |
| Model Tested:  | MC360HH               |
| Report Number: | 22617                 |
| DLS Project:   | 8153                  |

166 South Carter, Genoa City, WI 53128

## Appendix C – Measurement Uncertainty

Compliance with the limits in this standard are based on the results of the compliance measurement. Our calculated measurement uncertainty including the measurement instrumentation, associated connections between the various instruments in the measurement chain, and other contributions, are provided in this section of the test report.

| Parameter                     | Expanded Uncertainty (K=2) |
|-------------------------------|----------------------------|
| Occupied Channel Bandwidth    | +/-1.14%                   |
| RF Output Power, Conducted    | +/-0.89dB                  |
| Unwanted Emissions, Conducted | +/-2.62dB                  |
| All Emissions, Radiated       | +/-4.95dB                  |
| DC and Low Frequency Voltages | +/-2.42%                   |
| Time                          | +/-0.01%                   |
| Duty Cycle                    | +/-0.05%                   |

| AC Line Conducted             |                          | Uncertainty ( + / - dB ) |
|-------------------------------|--------------------------|--------------------------|
| Contribution                  | Probability Distribution |                          |
|                               |                          | 150 kHz - 30 MHz         |
| Combined Standard Uncertainty | Normal                   | 1.05                     |
| <b>Expanded Uncertainty</b>   | <b>Normal (k=2)</b>      | <b>2.10</b>              |



Company: Whirlpool Corporation  
Model Tested: MC360HH  
Report Number: 22617  
DLS Project: 8153

166 South Carter, Genoa City, WI 53128

## END OF REPORT

| Revision # | Date           | Comments        | By |
|------------|----------------|-----------------|----|
| 1.0        | March 30, 2017 | Initial Release | CB |
|            |                |                 |    |
|            |                |                 |    |
|            |                |                 |    |
|            |                |                 |    |