




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

LTE BAND 2


Channel Bandwidth: 1.4MHz QPSK

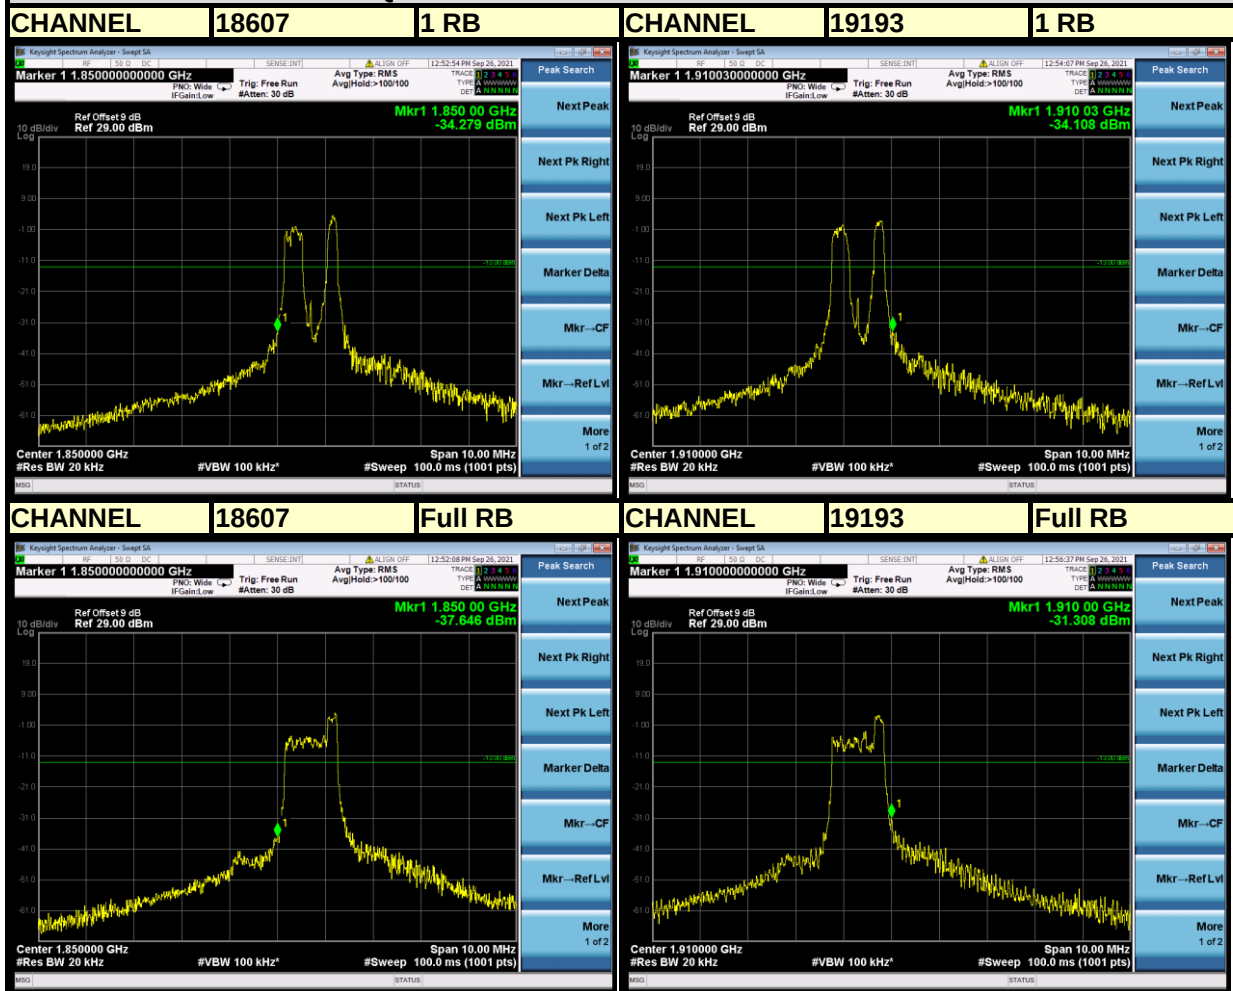




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

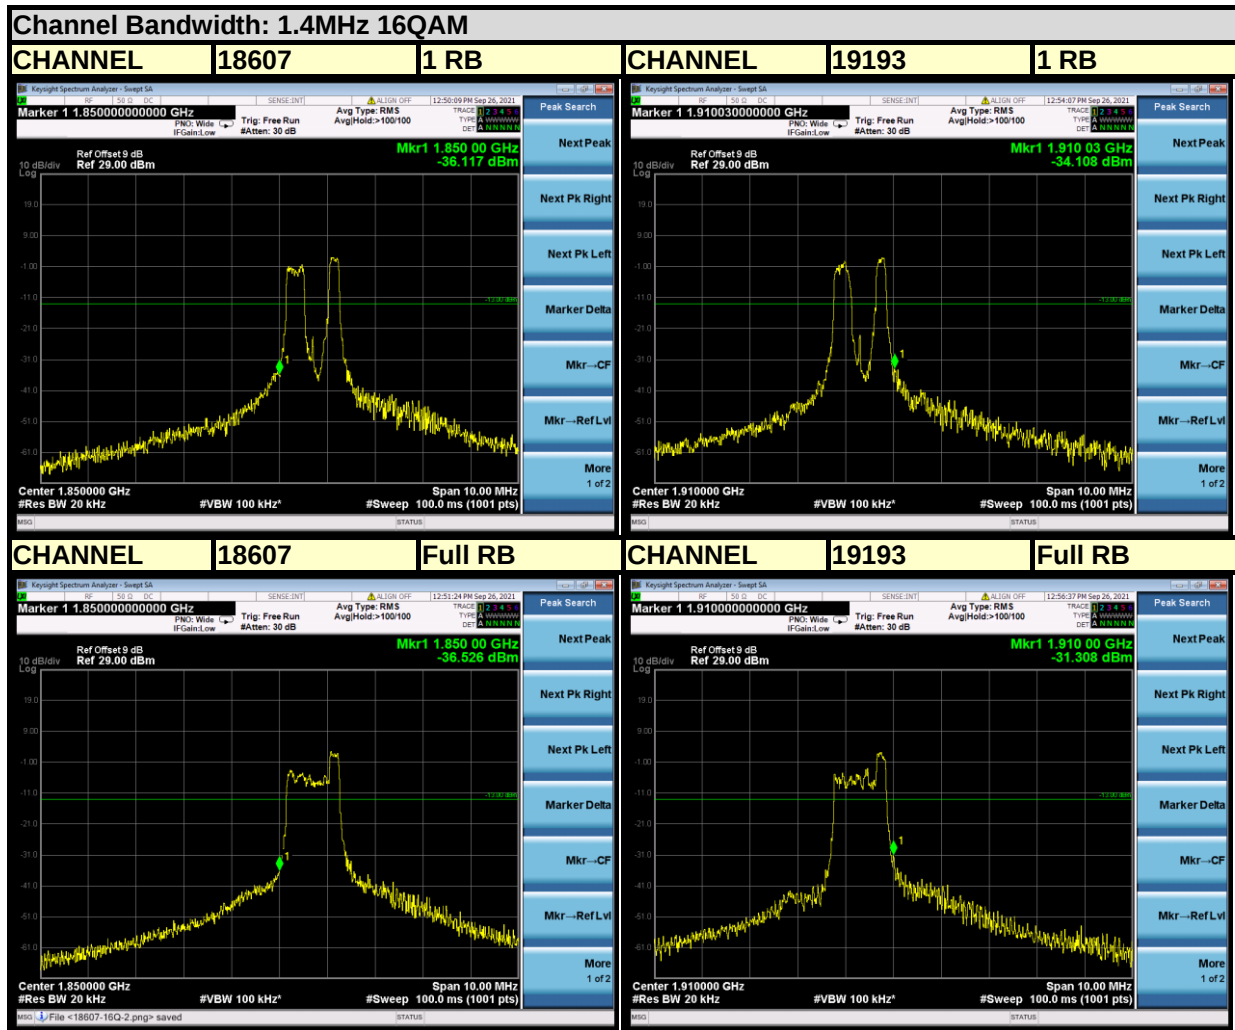


LTE BAND 2

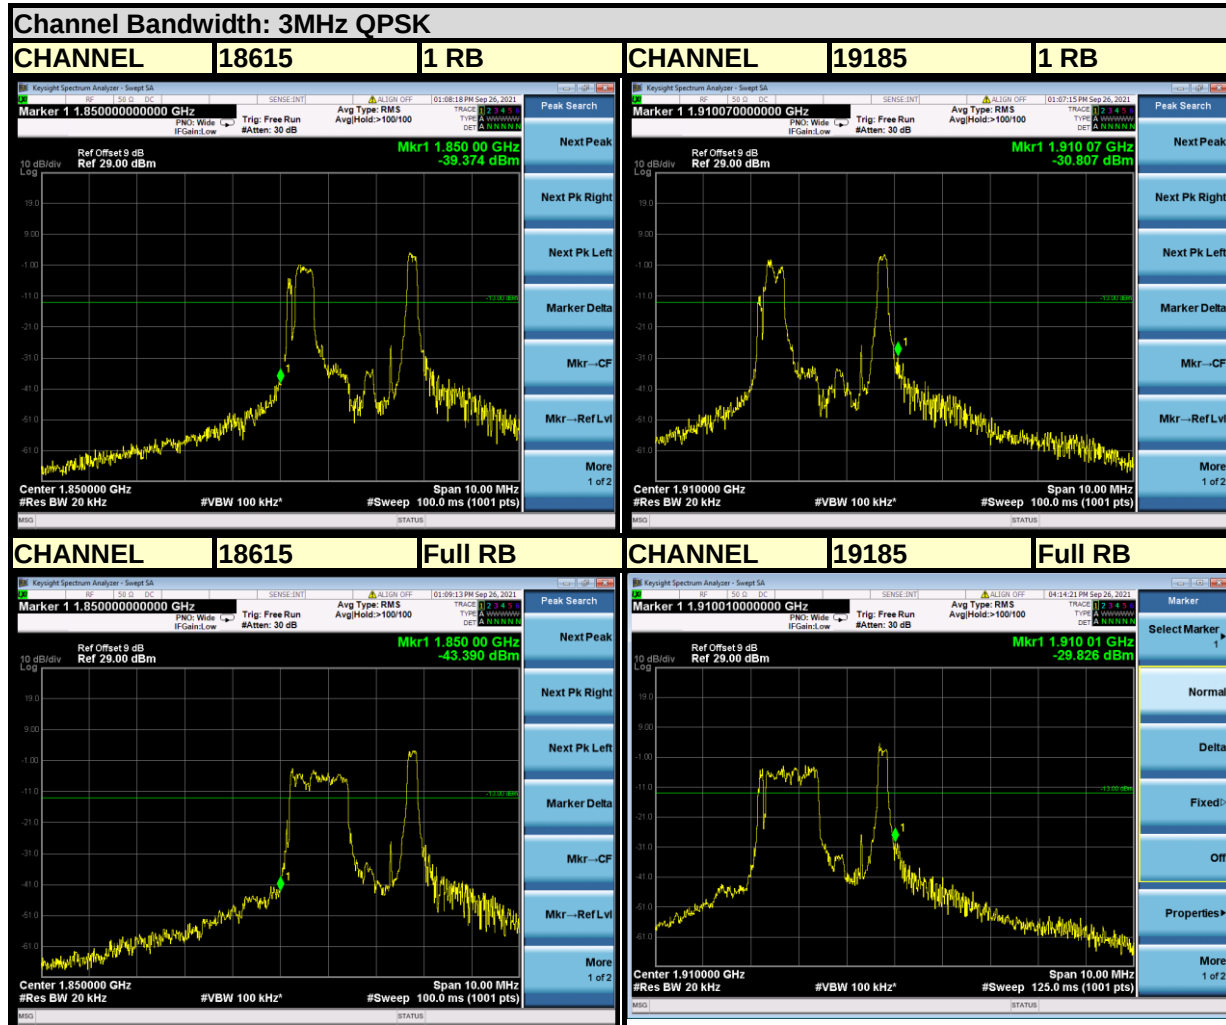



BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

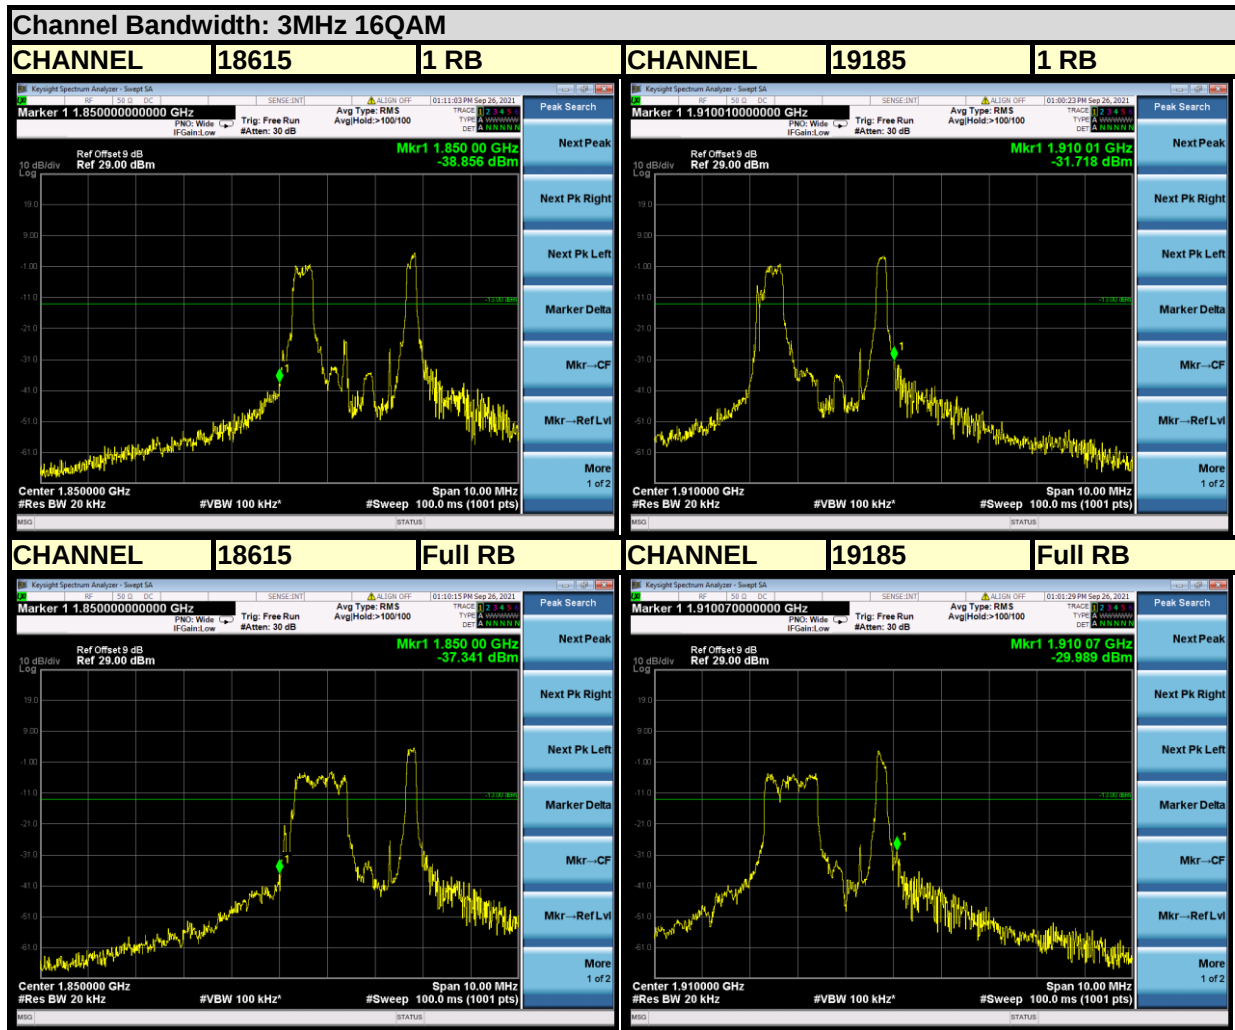




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

LTE BAND 2


Channel Bandwidth: 5MHz QPSK

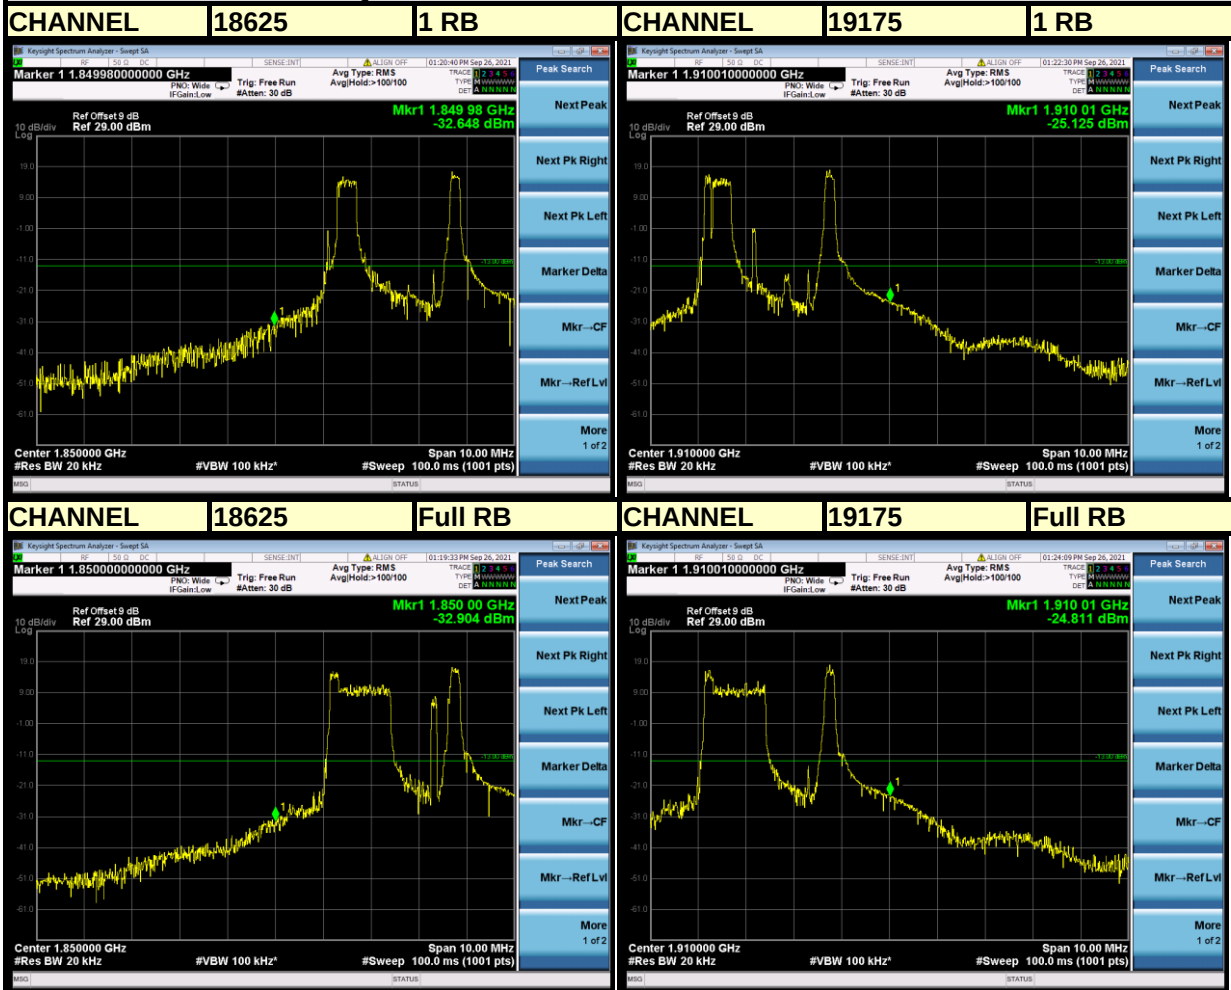




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

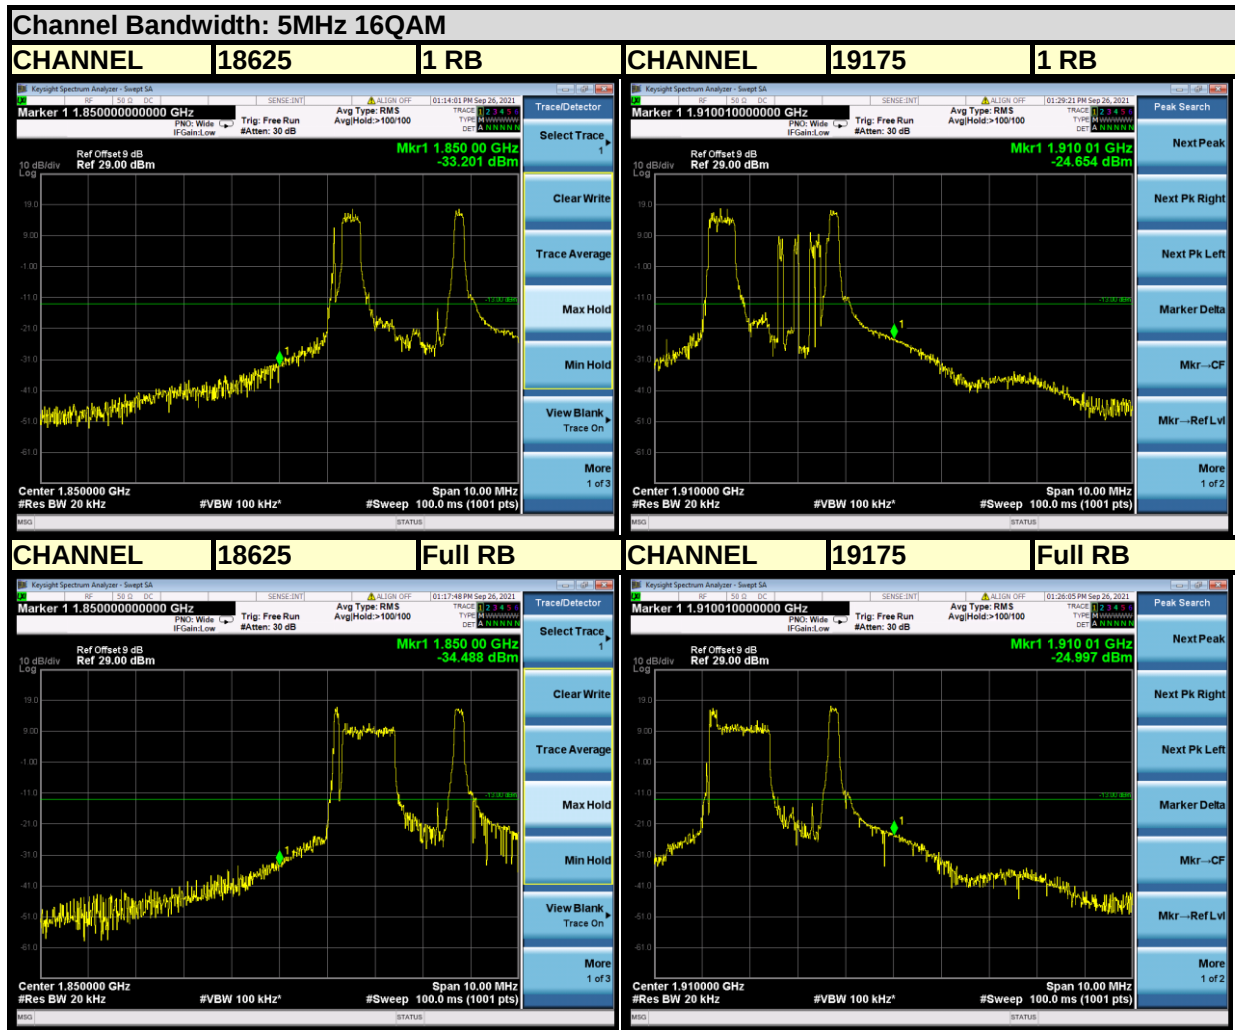


LTE BAND 2

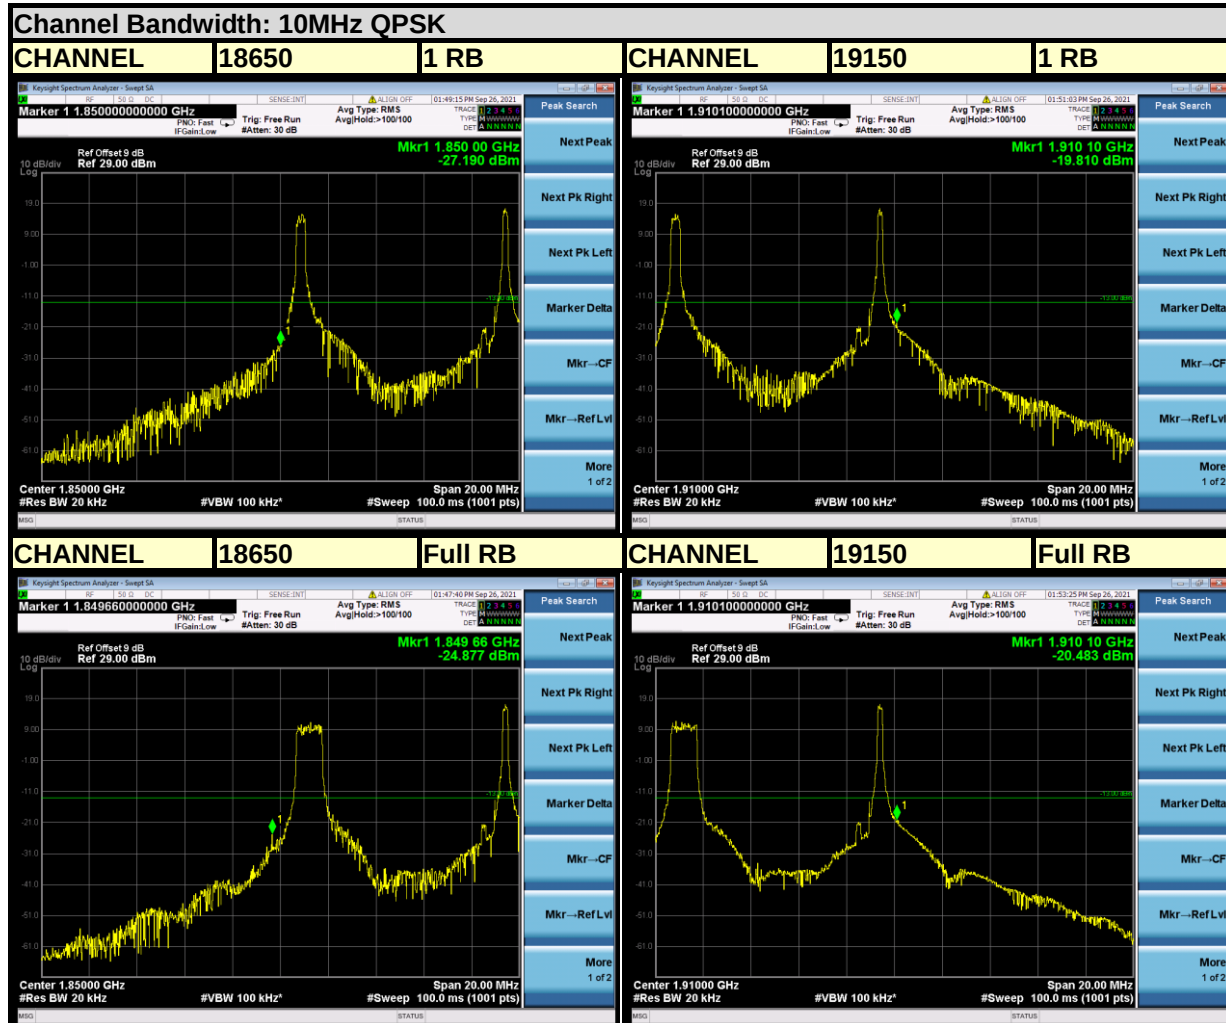




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

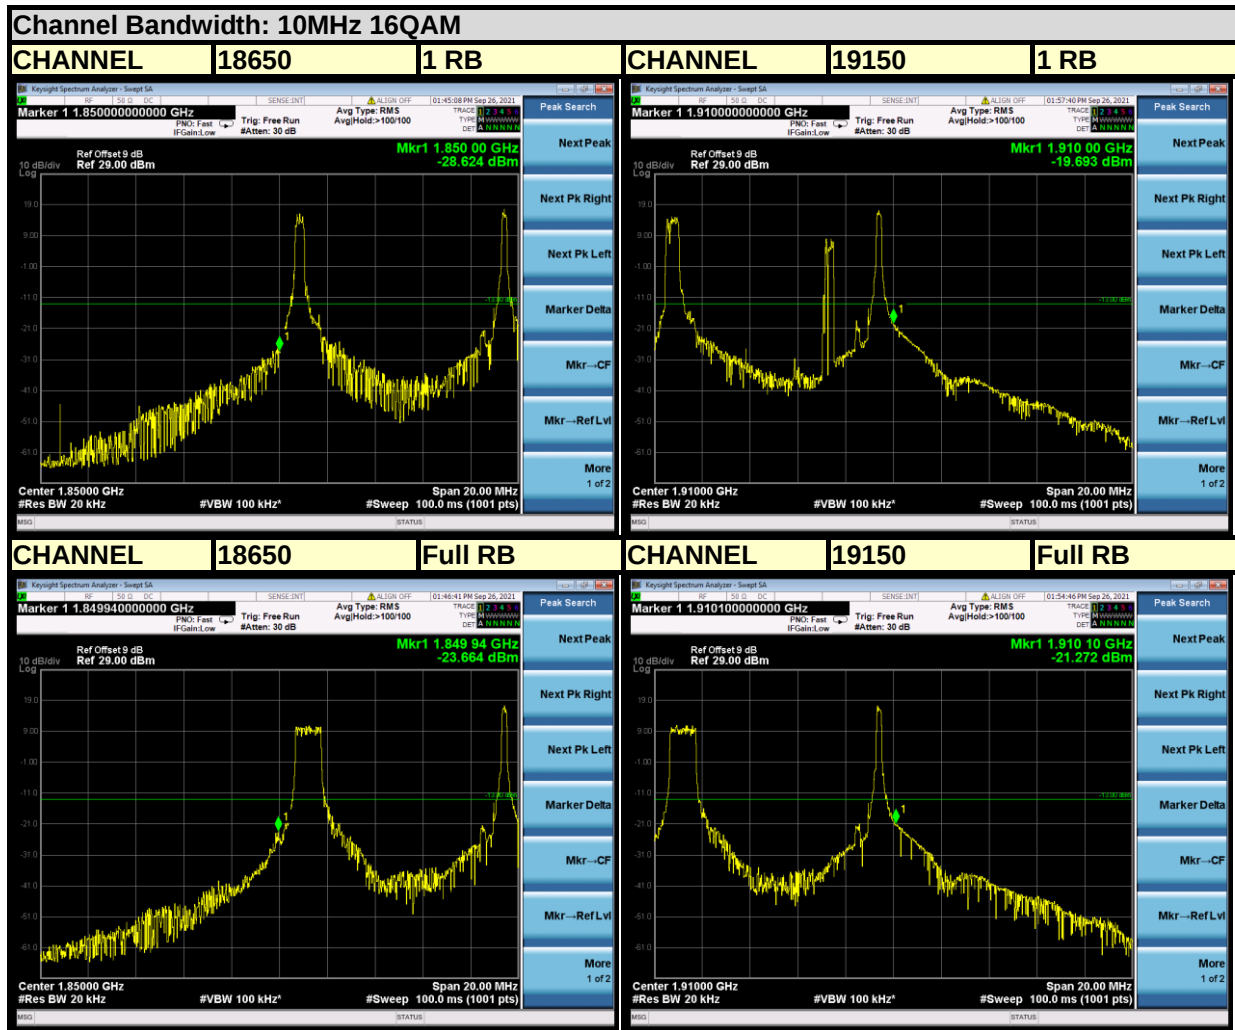


LTE BAND 2

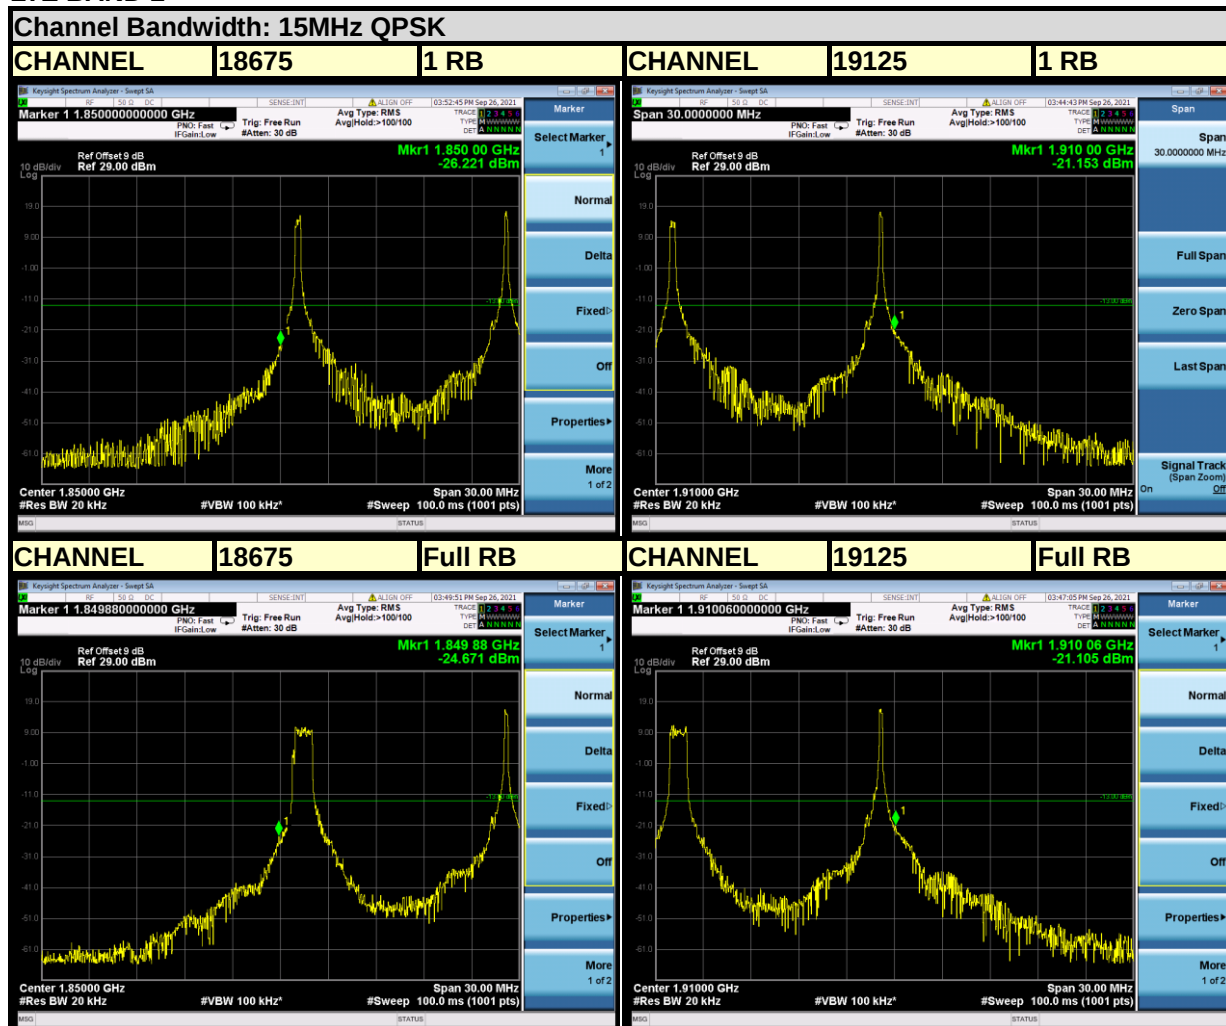




BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

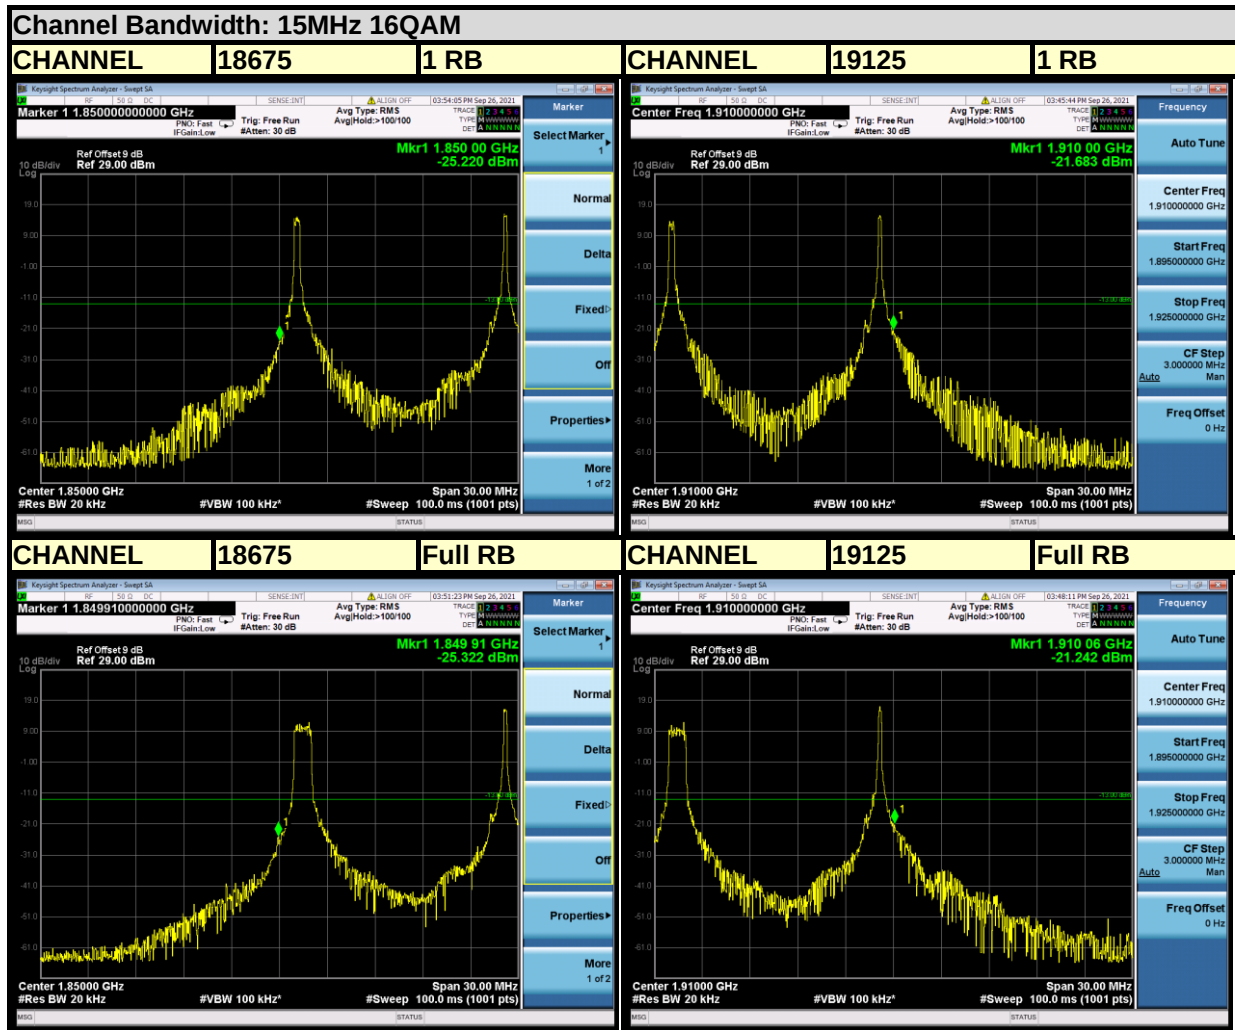


LTE BAND 2

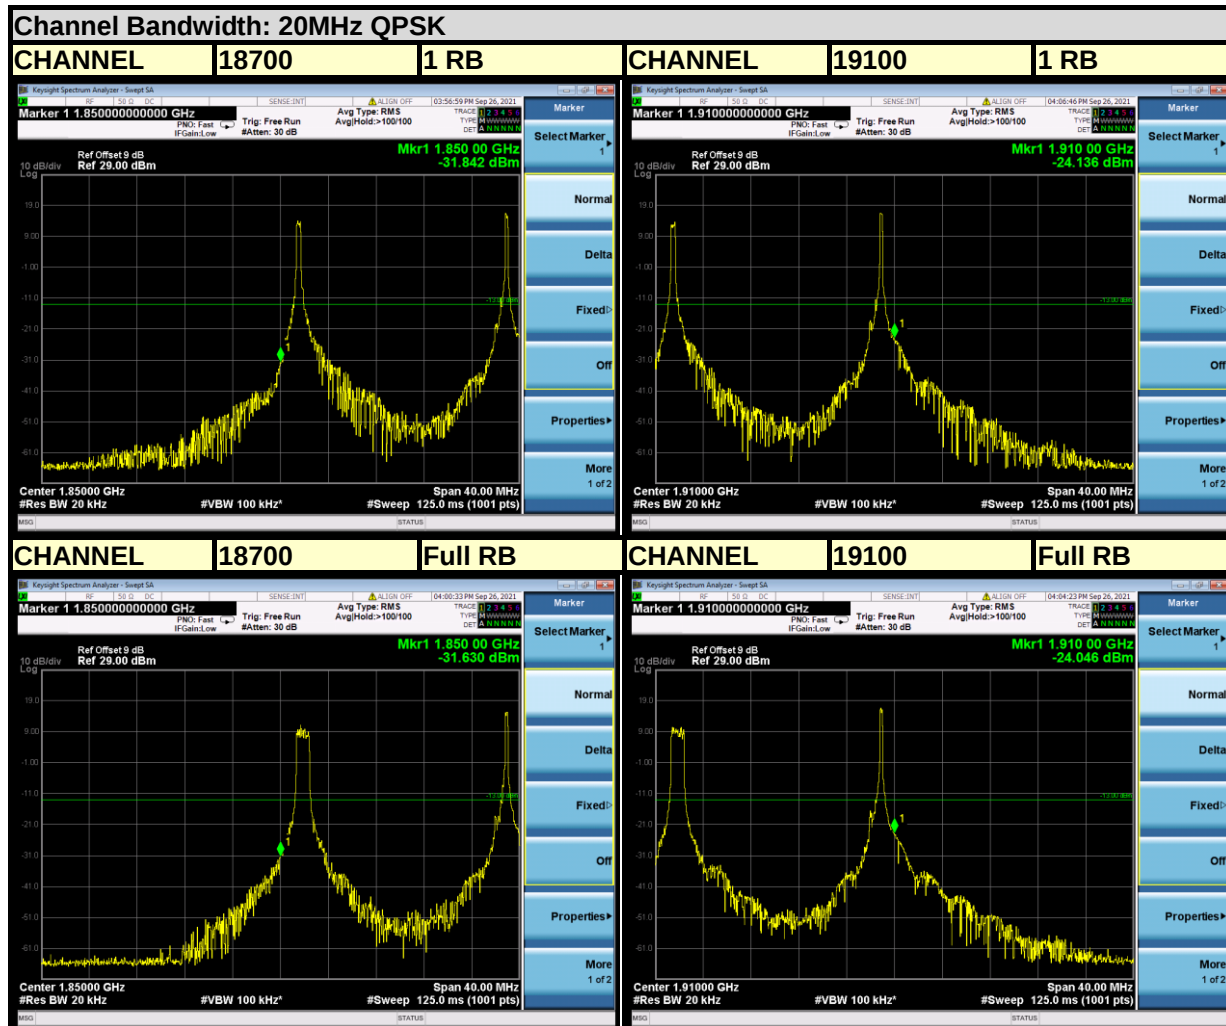



BUREAU
VERITAS

Test Report No.: W7L-P21090017RF01

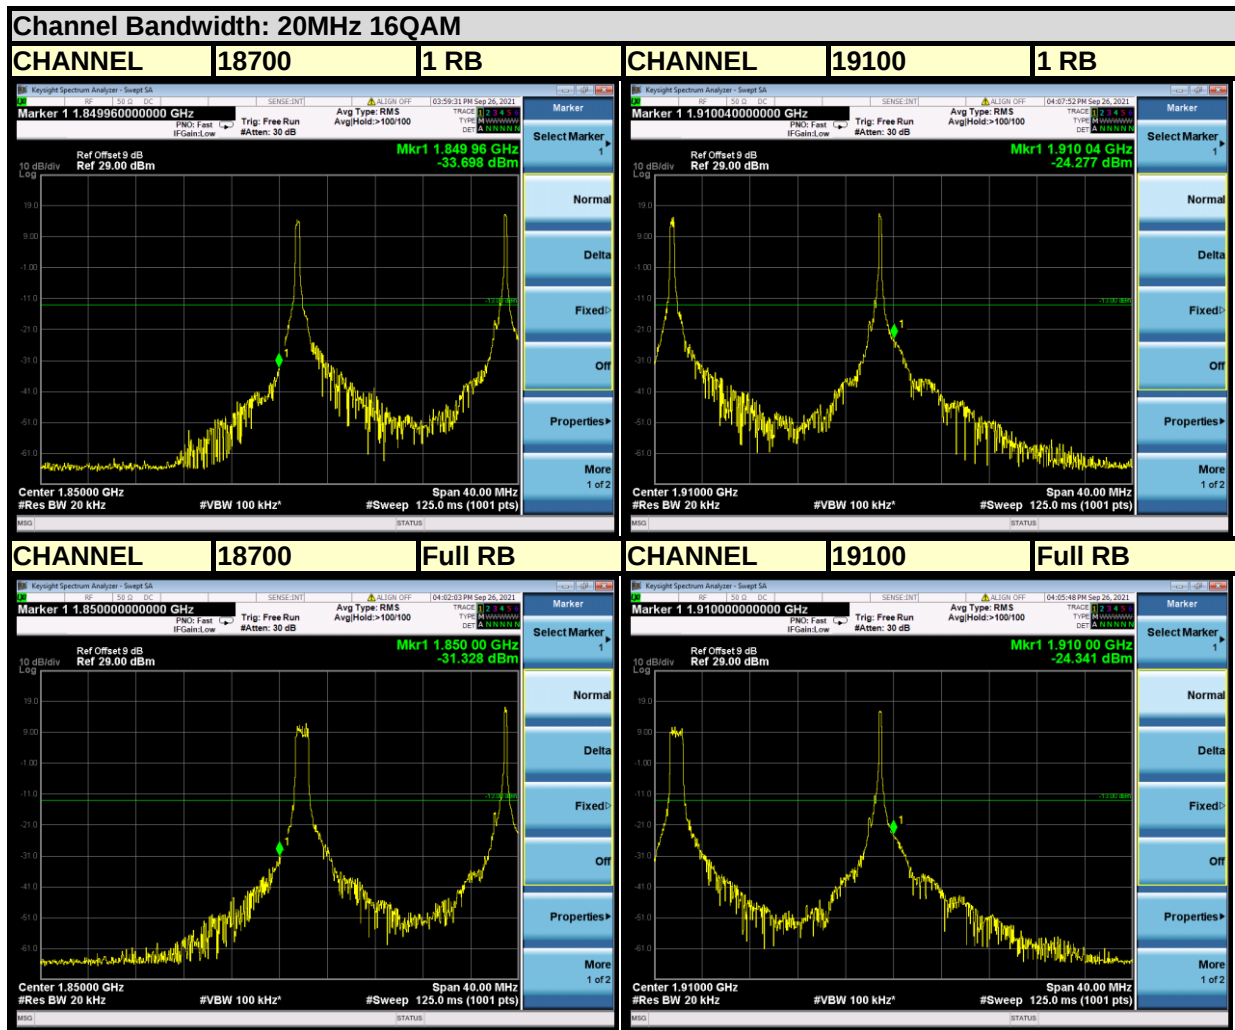



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.0/19.1/20 GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

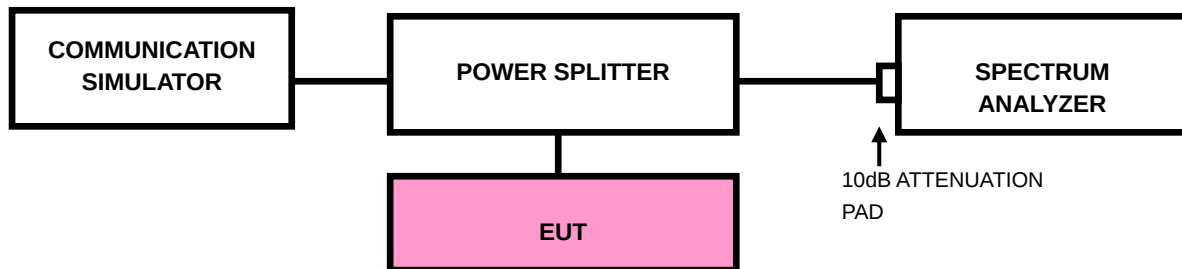



3.5.4 TEST RESULTS

Note: For 9KHz-30MHz, all emission lower than the limit 20dB, not recording data
Worst case as below

