



# Variant FCC RF Test Report

**APPLICANT** : Mobile Devices Ingénierie  
**EQUIPMENT** : Telematics embedded system  
**BRAND NAME** : Mobile Devices Ingenierie  
**MODEL NAME** : C4Max-3GNA-E  
**MARKETING NAME** : C4Max-3GNA-E V2  
**FCC ID** : A6GC4MAX-3GNA  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

This is a variant report which is only valid together with the original report. The product was received on Mar. 31, 2015 and testing was completed on Jun. 15, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,  
Nanshan District, Shenzhen, Guangdong, P. R. China**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Test Mode..... 7

    2.2 Connection Diagram of Test System..... 7

    2.3 Support Unit used in test configuration and system ..... 8

    2.4 EUT Operation Test Setup ..... 8

**3 TEST RESULT ..... 9**

    3.1 Radiated Band Edges and Spurious Emission Measurement ..... 9

**4 LIST OF MEASURING EQUIPMENT..... 14**

**5 UNCERTAINTY OF EVALUATION..... 15**

**APPENDIX A. RADIATED SPURIOUS EMISSION**

**APPENDIX B. SETUP PHOTOGRAPHS**

**APPENDIX C. PRODUCT EQUALITY DECLARATION**



REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION  | ISSUED DATE   |
|--------------|---------|--|---------------|
| FR533103-01B | Rev. 01 | This is a variant report for C4Max-3GNA-E. The product equality description could be referred to Appendix C. Based on the similarity between two models, only the worst case of Radiated Spurious Emission from original test report (Sporton Report Number FR533103B) was verified. | Jun. 24, 2015 |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |
|              |         |  |               |



### SUMMARY OF TEST RESULT

| Report Section | FCC Rule  | IC Rule        | Description                                  | Limit                    | Result | Remark                                     |
|----------------|-----------|----------------|--|--------------------------|--------|--|
| 3.1            | 15.247(d) | RSS-247<br>5.5 | Radiated Band Edges<br>and Spurious Emission | 15.209(a) &<br>15.247(d) | Pass   | Under limit<br>17.96 dB at<br>2389.290 MHz |



# 1 General Description

## 1.1 Applicant

Mobile Devices Ingénierie

100 Avenue de Stalingrad 94800 Villejuif FRANCE

## 1.2 Manufacturer

Mobile Devices Ingénierie

100 Avenue de Stalingrad 94800 Villejuif FRANCE

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |  |
|---------------------------------|--|
| Equipment                       | Telematics embedded system   |
| Brand Name                      | Mobile Devices Ingenierie  |
| Model Name                      | C4Max-3GNA-E   |
| Marketing Name                  | C4Max-3GNA-E V2  |
| FCC ID                          | A6GC4MAX-3GNA  |
| EUT supports Radios application | GSM/GPRS/EGPRS/WCDMA/HSPA/<br>WLAN 2.4GHz 802.11b/g/n HT20/HT40/<br>Bluetooth v3.0 + EDR/Bluetooth v4.0 LE |
| IMEI Code                       | Radiation: 354676050519874   |
| HW Version                      | SAP00256   |
| SW Version                      | V1944  |
| EUT Stage                       | Production Unit  |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |  |
|---|--|
| Tx/Rx Frequency Range                             | 2402 MHz ~ 2480 MHz                            |
| Number of Channels                                | 40   |
| Carrier Frequency of Each Channel                 | 40 Channel(37 hopping + 3 advertising channel) |
| Antenna Type                                      | Chip Antenna                                   |
| Type of Modulation                                | Bluetooth LE : GFSK                            |



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

|                           |   |                                |
|---------------------------|---|--------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (SHENZHEN) INC.   |                                |
| <b>Test Site Location</b> | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China<br>TEL: +86-755- 3320-2398 |                                |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC/IC Registration No.</b> |
|                           | 03CH01-SZ   | 831040/4086F                   |

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2013
- IC RSS-247 Issue 1
- IC RSS-Gen Issue 4

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.


## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases   |  |
|---|--|
| Test Item   | Data Rate / Modulation                   |
|   | Bluetooth 4.0 – LE / GFSK                |
| Radiated TCs  | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps |
| <b>Remark:</b> For Radiated TCs, The tests were performance with Battery. |  |

### 2.2 Connection Diagram of Test System

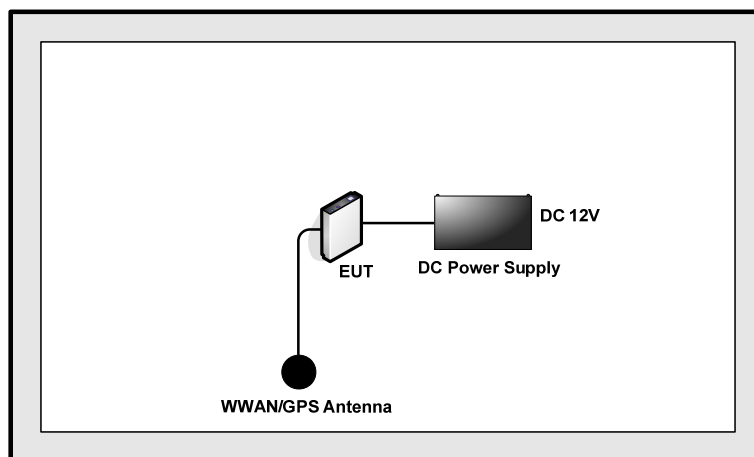



### **2.3 Support Unit used in test configuration and system**

| <b>Item</b> | <b>Equipment</b> | <b>Trade Name</b> | <b>Model Name</b> | <b>FCC ID</b> | <b>Data Cable</b> | <b>Power Cord</b> |
|-------------|------------------|-------------------|-------------------|---------------|-------------------|-------------------|
| 1.          | DC Power Supply  | Solite            | 36B20L            | Fcc DoC       | N/A               | N/A               |
| 2.          | WWAN/GPS Antenna | N/A               | N/A               | N/A           | N/A               | N/A               |

### **2.4 EUT Operation Test Setup**

For Bluetooth v4.0 LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.





### 3 Test Result

#### 3.1 Radiated Band Edges and Spurious Emission Measurement

##### 3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                       | 300                           |
| 0.490 – 1.705   | 24000/F(kHz)                      | 30                            |
| 1.705 – 30.0    | 30                                | 30                            |
| 30 – 88         | 100                               | 3                             |
| 88 – 216        | 150                               | 3                             |
| 216 - 960       | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.
 


For average measurement:

    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Band              | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|-------------------|---------------|-------|----------|-------------|
| Bluetooth v4.0 LE | 63.92         | 0.40  | 2.50     | 3kHz        |

### 3.1.4 Test Setup


For radiated emissions below 30MHz

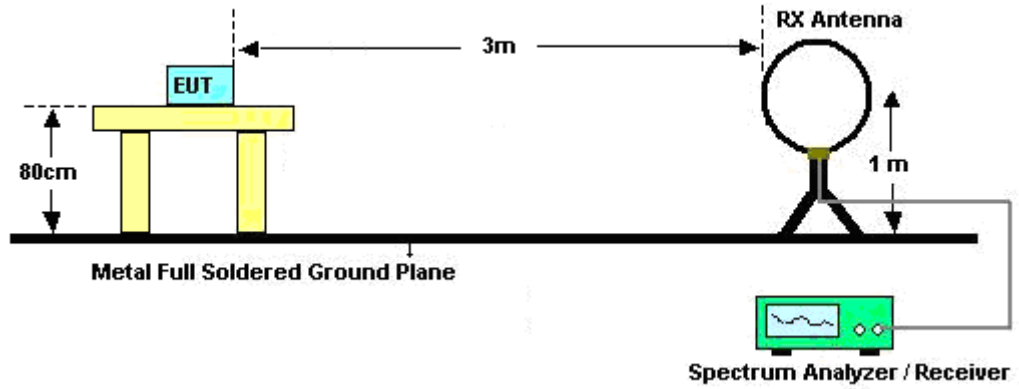

For radiated emissions from 30MHz to 1GHz

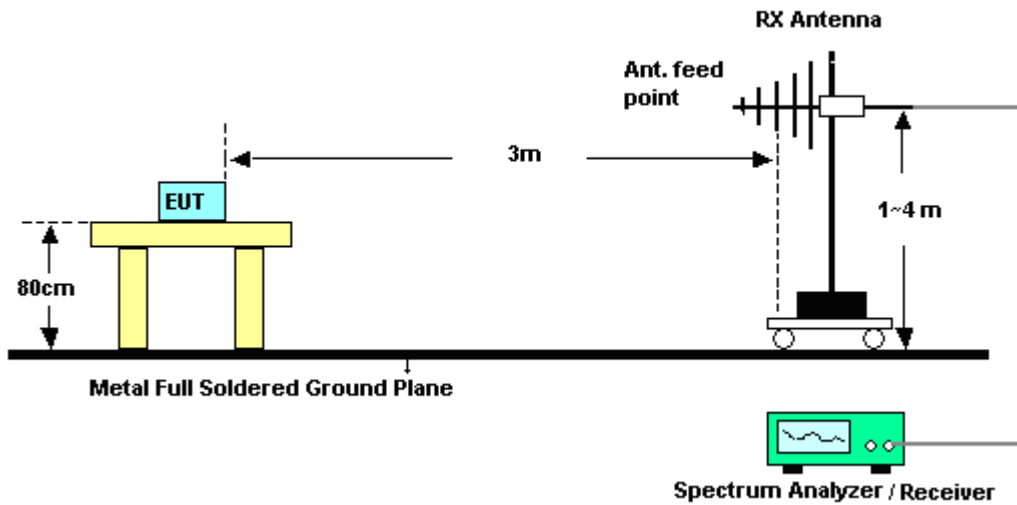

For radiated emissions above 1GHz

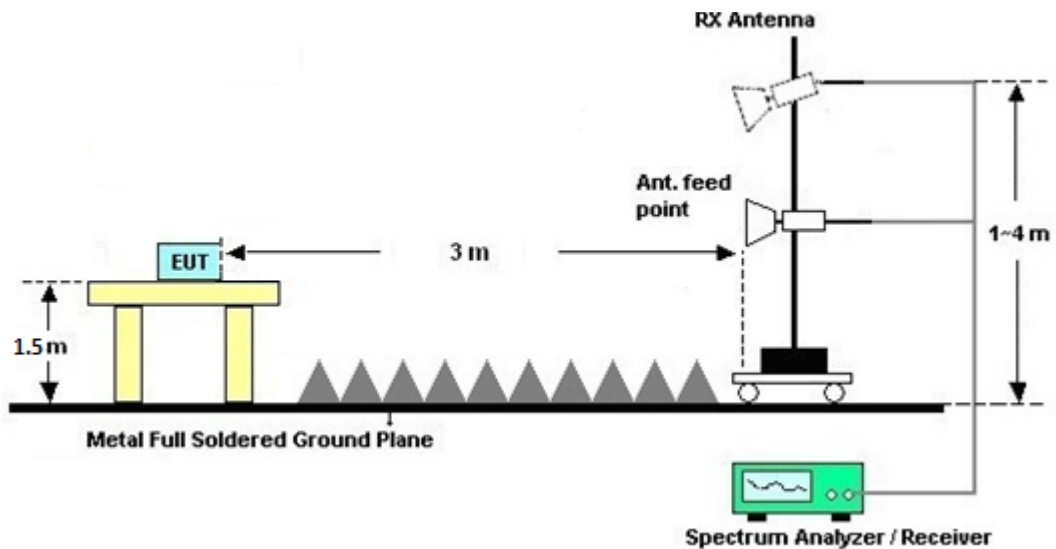

### 3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



**3.1.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A.

**3.1.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A.



## 4 List of Measuring Equipment

| Instrument                | Manufacturer         | Model No. | Serial No.   | Characteristics        | Calibration Date | Test Date     | Due Date      | Remark                |
|---------------------------|----------------------|-----------|--------------|------------------------|------------------|---------------|---------------|-----------------------|
| EMI Test Receiver&SA      | Agilent Technologies | N9038A    | MY52260185   | 20Hz~26.5GHz           | May 26, 2015     | Jun. 15, 2015 | May 25, 2016  | Radiation (03CH01-SZ) |
| Spectrum Analyzer         | R&S                  | FSV40     | 101041       | 10kHz~40GHz; Max 30dBm | Sep. 25, 2014    | Jun. 15, 2015 | Sep. 24, 2015 | Radiation (03CH01-SZ) |
| Loop Antenna              | R&S                  | HFH2-Z2   | 100354       | 9kHz~30MHz             | May 06, 2015     | Jun. 15, 2015 | May 05, 2016  | Radiation (03CH01-SZ) |
| Bilog Antenna             | TeseQ                | CBL6112D  | 23188        | 30MHz~2GHz             | Nov. 07, 2014    | Jun. 15, 2015 | Nov. 06, 2015 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna | ETS-Lindgren         | 3117      | 00119436     | 1GHz~18GHz             | Oct. 15, 2014    | Jun. 15, 2015 | Oct. 14, 2015 | Radiation (03CH01-SZ) |
| SHF-EHF Horn              | com-power            | AH-840    | 101071       | 18GHz~40GHz            | Sep. 04, 2014    | Jun. 15, 2015 | Sep. 03, 2015 | Radiation (03CH01-SZ) |
| Amplifier                 | ADVANTEST            | BB525C    | E9007003     | 9kHz~3000MHz / 30 dB   | Jan. 28, 2015    | Jun. 15, 2015 | Jan. 27, 2016 | Radiation (03CH01-SZ) |
| Amplifier                 | Yiai                 | AV3860B   | 04030        | 2GHz~26.5GHz           | May 05, 2015     | Jun. 15, 2015 | May 04, 2016  | Radiation (03CH01-SZ) |
| Amplifier                 | Agilent Technologies | 83017A    | MY39501302   | 500MHz~26.5G Hz        | Jan. 28, 2015    | Jun. 15, 2015 | Jan. 27, 2016 | Radiation (03CH01-SZ) |
| AC Power Source           | Chroma               | 61601     | 616010001985 | N/A                    | NCR              | Jun. 15, 2015 | NCR           | Radiation (03CH01-SZ) |
| Turn Table                | EM                   | EM1000    | N/A          | 0~360 degree           | NCR              | Jun. 15, 2015 | NCR           | Radiation (03CH01-SZ) |
| Antenna Mast              | EM                   | EM1000    | N/A          | 1 m~4 m                | NCR              | Jun. 15, 2015 | NCR           | Radiation (03CH01-SZ) |



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |       |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 3.9dB |
|---|-------|



# Appendix A. Radiated Spurious Emission

## 2.4GHz 2400~2483.5MHz

### BLE (Band Edge @ 3m)

| BLE                     | Note  | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak  | Pol.  |
|-------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
|                         |   |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.  |       |
|                         |   | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | (P/A) | (H/V) |
| BLE<br>CH 00<br>2402MHz |   | 2377.05   | 54.48      | -19.52 | 74         | 57.52    | 27.19    | 4.79   | 35.02  | 200    | 146     | P     | H     |
|                         |   | 2389.29   | 36.04      | -17.96 | 54         | 39.02    | 27.25    | 4.79   | 35.02  | 200    | 146     | A     | H     |
|                         | *   | 2402      | 99         | -      | -          | 101.96   | 27.25    | 4.79   | 35     | 200    | 146     | P     | H     |
|                         | *   | 2402      | 89.18      | -      | -          | 92.14    | 27.25    | 4.79   | 35     | 200    | 146     | A     | H     |
|                         |   | 2377.14   | 44.77      | -29.23 | 74         | 47.81    | 27.19    | 4.79   | 35.02  | 150    | 203     | P     | V     |
|                         |   | 2389.02   | 32.03      | -21.97 | 54         | 35.01    | 27.25    | 4.79   | 35.02  | 150    | 203     | A     | V     |
|                         | *   | 2402      | 90.49      | -      | -          | 93.45    | 27.25    | 4.79   | 35     | 150    | 203     | P     | V     |
|                         | *   | 2402      | 81.61      | -      | -          | 84.57    | 27.25    | 4.79   | 35     | 150    | 203     | A     | V     |
| Remark                  | <ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol> |           |            |        |            |          |          |        |        |        |         |       |       |





15C 2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

| BLE                     | Note  | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|-------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
|                         |   | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| BLE<br>CH 00<br>2402MHz |   | 4804      | 50.41      | -23.59 | 74         | 70.73    | 31.03    | 6.95   | 58.3   | 119    | 148     | P       | H       |
|                         |   | 4804      | 50.35      | -23.65 | 74         | 70.67    | 31.03    | 6.95   | 58.3   | 119    | 148     | P       | V       |
| Remark                  | 1. No other spurious found.<br>2. All results are PASS against Peak and Average limit line. |           |            |        |            |          |          |        |        |        |         |         |         |



**Emission below 1GHz**

**2.4GHz BLE (LF)**

| BLE                 | Note   | Frequency | Level            | Over   | Limit            | Read           | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|---------------------|--|-----------|------------------|--------|------------------|----------------|----------|--------|--------|--------|---------|---------|---------|
|                     |  |           |                  | Limit  | Line             | Level          | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
|                     |  | ( MHz )   | ( dB $\mu$ V/m ) | ( dB ) | ( dB $\mu$ V/m ) | ( dB $\mu$ V ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| 2.4GHz<br>BLE<br>LF |  | 31.94     | 17.66            | -22.34 | 40               | 32.9           | 17.14    | 1      | 33.38  | 100    | 360     | P       | H       |
|                     |  | 102.75    | 21.04            | -22.46 | 43.5             | 40.78          | 12.24    | 1.38   | 33.36  | -      | -       | P       | H       |
|                     |  | 166.77    | 17.93            | -25.57 | 43.5             | 38.78          | 10.83    | 1.53   | 33.21  | -      | -       | P       | H       |
|                     |  | 281.23    | 23.26            | -22.74 | 46               | 41.37          | 13.12    | 1.83   | 33.06  | -      | -       | P       | H       |
|                     |  | 322.94    | 21.93            | -24.07 | 46               | 38.54          | 14.43    | 1.94   | 32.98  | -      | -       | P       | H       |
|                     |  | 418.97    | 21.06            | -24.94 | 46               | 34.79          | 16.77    | 2.22   | 32.72  | -      | -       | P       | H       |
|                     |  | 92.08     | 24.03            | -19.47 | 43.5             | 45.01          | 11.02    | 1.38   | 33.38  | 100    | 0       | P       | V       |
|                     |  | 197.81    | 17.23            | -26.27 | 43.5             | 38.68          | 10.14    | 1.57   | 33.16  | -      | -       | P       | V       |
|                     |  | 288.02    | 20.25            | -25.75 | 46               | 38.1           | 13.37    | 1.83   | 33.05  | -      | -       | P       | V       |
|                     |  | 323.91    | 20.19            | -25.81 | 46               | 36.77          | 14.46    | 1.94   | 32.98  | -      | -       | P       | V       |
|                     |  | 421.88    | 21.5             | -24.5  | 46               | 35.18          | 16.81    | 2.22   | 32.71  | -      | -       | P       | V       |
|                     | 521.79   | 22.31     | -23.69           | 46     | 34.22            | 18.09          | 2.41     | 32.41  | -      | -      | P       | V       |         |
| Remark              | 1. No other spurious found.<br>2. All results are PASS against limit line. |           |                  |        |                  |                |          |        |        |        |         |         |         |



**Note symbol**

|     |  |
|-----|--|
| *   | <b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c). |
| !   | Test result is <b>over limit</b> line.   |
| P/A | <b>Peak</b> or <b>Average</b>  |
| H/V | <b>Horizontal</b> or <b>Vertical</b>   |



A calculation example for radiated spurious emission is shown as below:

| WIFI    | Note | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant.    |      |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
| 1+2     |      | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| 802.11b |      | 2390      | 55.45      | -18.55 | 74         | 54.51    | 32.22    | 4.58   | 35.86  | 103    | 308     | P       | H       |
| CH 01   |      |           |            |        |            |          |          |        |        |        |         |         |         |
| 2412MHz |      | 2390      | 43.54      | -10.46 | 54         | 42.6     | 32.22    | 4.58   | 35.86  | 103    | 308     | A       | H       |

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## **Appendix C. Product Equality Declaration**