



**CENTRE OF TESTING SERVICE
INTERNATIONAL**

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER : CGZ3130823-00771-EFI



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China



TEST REPORT For FCC ID/IC FCC Part 15:2012, RSS-210 ISSUE 8, RSS-Gen ISSUE 3	
Report Reference No.	CGZ3130823-00771-EFI
Date of issue	03 September 2013
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD.
Address	A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China
Testing location/ procedure	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
Applicant's name	THERMOR LTD.
Address	16975 LESLIE STREET, NEWMARKET, ON L3Y 9A1
Test specification	
Standard	RSS-210 ISSUE 8 RSS-Gen ISSUE 3 FCC Part 15:2012
Test Report Form No.	CTSEMC-1.0
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD
Master TRF	Dated 2009-01
CENTRE OF TESTING SERVICE CO., LTD. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the CENTRE OF TESTING SERVICE CO., LTD is acknowledged as copyright owner and source of the material. CENTRE OF TESTING SERVICE CO., LTD takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description	: 8" Digital Photo Frame Weather Station
Trade Mark	National Geographic and BIOS Weather
Manufacturer	Charter Profit Technologies Ltd.
Model/Type reference	378NC
Ratings	Battery 1.5V*2
Operating Frequency	917.0 MHz
Result	Positive

Compiled by:

Kate zhang / File administrators

Supervised by:

Duke yang / Technique principal

Approved by:

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



FCC ID/IC -- TEST REPORT

Test Report No. : CGZ3130823-00771-EFI	<u>03 August 2013</u> Date of issue
---	--

Type / Model.....	378NC
EUT.....	8" Digital Photo Frame Weather Station
Applicant	THERMOR LTD.
Address.....	16975 LESLIE STREET, NEWMARKET, ON L3Y 9A1
Telephone.....	+905-952-3737 Ext.6119
Fax.....	+905-952-3731
Contact.....	Joanna Biniek
Manufacturer	Charter Profit Technologies Ltd.
Address.....	5/F,Block 1,ZhongKeNuo Industrial Park, Hezhou,Xixiang Town,Bao'an District Shenzhen China
Telephone.....	+86-755-27346605
Fax.....	+86-755-27346604
Contact.....	Mary Zhao
Factory	Charter Profit Technologies Ltd.
Address.....	5/F,Block 1,ZhongKeNuo Industrial Park, Hezhou,Xixiang Town,Bao'an District Shenzhen China
Telephone.....	+86-755-27346605
Fax.....	+86-755-27346604
Contact.....	Mary Zhao

Test Result according to the standards on page 1: **PASSED**

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



TABLE OF CONTENTS

Description	Page
1.TEST STANDARDS	5
2.SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3.EQUIPMENT UNDER TEST	5
3.1 POWER SUPPLY SYSTEM UTILISED	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	5
3.4 EUT CONFIGURATION	6
4.TEST ENVIRONMENT	7
4.1 ADDRESS OF THE TEST LABORATORY	7
4.2 TEST FACILITY	7
4.3 ENVIRONMENTAL CONDITIONS	7
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
4.6 MEASUREMENT UNCERTAINTY	8
5.SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRPTION OF STANDARDS AND RESULTS	8
6TEST CONDITIONS AND RESULTS	9
6.1 POWER LINE CONDUCTED EMISSION TEST	9
7.TRANSMITTER OUPUT POWER AND SPURIOUS EMISSION (ELECTRIC FIELD)	12
7.1.TEST EQUIPMENT	12
7.2.BLOCK DIAGRAM OF TEST SETUP	12
7.3. TRANSMITTER OUTPUT POWER AND SPURIOUS EMISSIONS LIMIT :	13
7.4.TEST PROCEDURE	14
7.5.RADIATED EMISSION TEST RESULTS	14
8.BAND EDGE COMPLIANCE TEST	20
8.1. TEST EQUIPMENT	20
8.2. TEST INFORMATION	20
8.3. TEST PROCEDURE	20
8.4. TEST RESULTS	20
9 20 DB BANDWIDTH TEST	23

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhujing Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



9.1. TEST EQUIPMENT.....	23
9.2. TEST INFORMATION.....	23
9.3. TEST RESULTS	23
10. 99% BANDWIDTH	25
10.1 TEST PROCEDURE.....	25
10.2. TEST EQUIPMENT.....	25
10.3. TEST INFORMATION.....	25
10.4. TEST RESULTS	25
11.DEVIATION TO TEST SPECIFICATIONS	27

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhujia Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



1 . TEST STANDARDS

The tests were performed according to following standards:

- RSS-210 ISSUE 8
- RSS-Gen ISSUE 3
- FCC Part 15:2012
- ANSI C63.4-2009

2 . SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	23 August 2013
Testing commenced on	23 ~ 30 August 2013
Testing concluded on	03 September 2013

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

- - fulfilled.
- - **not** fulfilled.

The equipment under test

- - fulfils the IC requirements cited on page 1.
- - **does not** fulfil the IC requirements cited on page 1.

3 . EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ **Battery 1.5V*2**

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: **1**
Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- TX- Y position
- TX- Zposition
- TX- X position

TX-X position: TX-X Position

Note: TX -X position of EUT is the worst case, so only these test results be recorded in the test report.



3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	8" Digital Photo Frame Weather Station
Model Number	:	378NC
Operation frequency	:	917.0 MHz
Radio Technology	:	FSK
Modulation Technology	:	FSKmodulation
Antenna	:	Integral antenna

3.4.2. Tested Supporting System Details

N/A

4 . TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- - The black square indicates that the listed condition, standard or equipment is applicable for this report.
- - The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)
	1GHz~18GHz	±3.54dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5 . SUMMARY OF STANDARDS AND RESULTS

5.1.Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Transmitter Output power and Spurious Emissions	FCC Part 15 C: 15.249 RSS-Gen:7.2 RSS-210 A7 ANSI C63.4-2009	PASSED
Conducted Emission Test	FCC Part 15 : 15.207 ANSI C63.4-2009 RSS-Gen:7.2.4	N/A
Band Edge Compliance Test	FCC Part 15 C: 15.249 RSS-Gen 7.2.2 ANSI C63.4-2009	PASSED
20dB bandwidth	FCC Part 15 C: 15.249 RSS-Gen:4.6.3 ANSI C63.4-2009	PASSED
99% Bandwidth	RSS-210 Annex 8 RSS-Gen 4.6.1	PASSED

N/A is an abbreviation for Not Applicable.

6 TEST CONDITIONS AND RESULTS

6.1 Power Line Conducted Emission Test

For test instruments and accessories used see section 6.1.5

6.1.1 Description of the test location


Test location : Shielding Room

6.1.2 Description of the test set-up

6.1.2.1 Operating Condition

The EUT is engraving during the test, and the results of the maximum emanation are recorded

6.1.2.2 Block Diagram of Test Setup

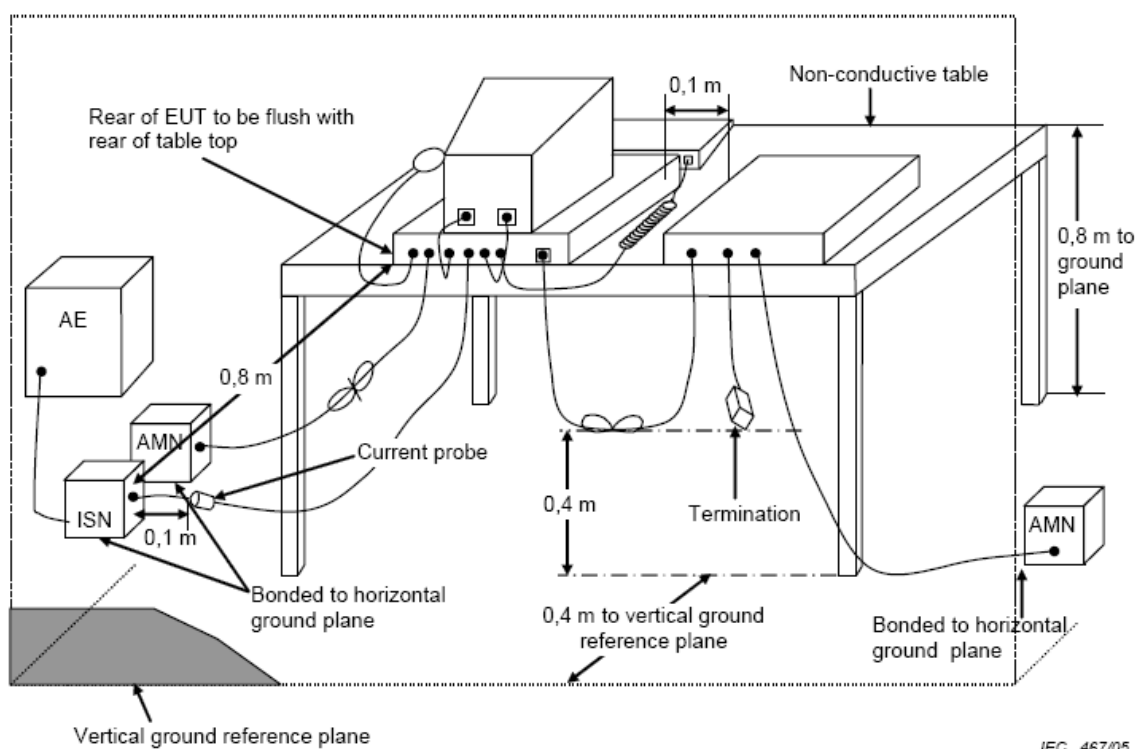

6.1.3 Limits of disturbance (Class B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note: (1) The tighter limit shall apply at the edge between two frequency bands.


Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
 A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China
 Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

6.1.4. Block Diagram of Test Setup

6.1.4.1 Block Diagram of connection between EUT and simulators



(EUT: 8" Digital Photo Frame Weather Station)

6.1.5. Conduced disturbance Test Equipment

Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2012/11
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2012/11
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2012/11
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2012/11

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



6.1.6 Test result

The requirements are	Fulfilled
Band width	9kHz
Frequency range	0.15kHz - 30 MHz
Min. limit margin	>N/A at 0.15MHz - 30 MHz

Remarks: The EUT power supply by battery, Not applicable.




7 . TRANSMITTER OUPUT POWER AND SPURIOUS EMISSION (electric field)

7.1.Test Equipment

Radiated disturbance (electric field)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2012/11
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2013/03
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2013/03
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2013/03
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2013/03
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2013/03


7.2.Block Diagram of Test Setup

6.2.1 Block Diagram of connection between EUT and simulators



(EUT: 8'' Digital Photo Frame Weather Station)

7.2.2 Anechoic Chamber Setup Diagram

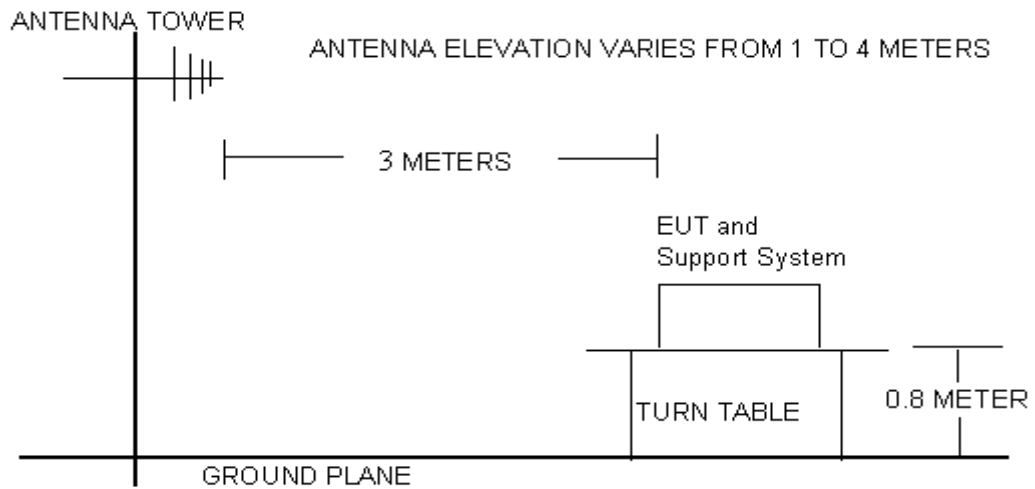

7.3. Transmitter Output power and Spurious Emissions Limit :

Standard:RSS-210 A7, FCC Part 15:249.

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Frequency (Hz)	Field Strength (µV/m at meter)	Measurement Distance (meter)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

- Remark:
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

7.4. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 1MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with 1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5. Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz, 30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.



Test Mode:	TX –X Position Mode	Result:	<input checked="" type="checkbox"/> - passed
Frequency range:	9KHz~30MHz		<input type="checkbox"/> - not passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
Remark:Other frequency no specific emission form the EUT (Margin > 6dB form the applicable Limit)							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Test Model:	TX -X	Result:	■ - passed □ - not passed
Test point:	Horizontal		
Frequency range:	30MHz~18GHz		

EUT	8" Digital Photo Frame Weather Station
Firm Name	THERMOR LTD.
Operating Condition	Battery 1.5V*2
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Operator	Duke

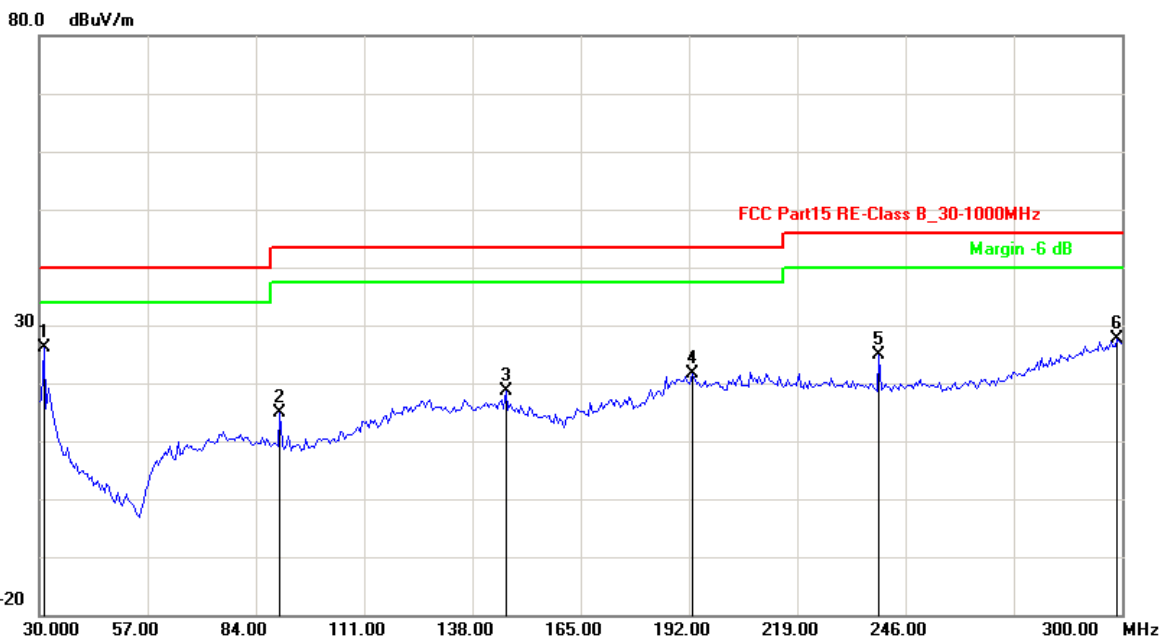


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	31.0822	-19.43	45.68	26.25	40.00	-13.75	QP
2	90.0601	-22.62	37.41	14.79	43.50	-28.71	QP
3	146.3327	-16.99	35.51	18.52	43.50	-24.98	QP
4	192.8657	-12.20	33.75	21.55	43.50	-21.95	QP
5	239.3988	-13.08	37.99	24.91	46.00	-21.09	QP
6	298.9178	-5.73	33.32	27.59	46.00	-18.41	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
 A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China
 Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

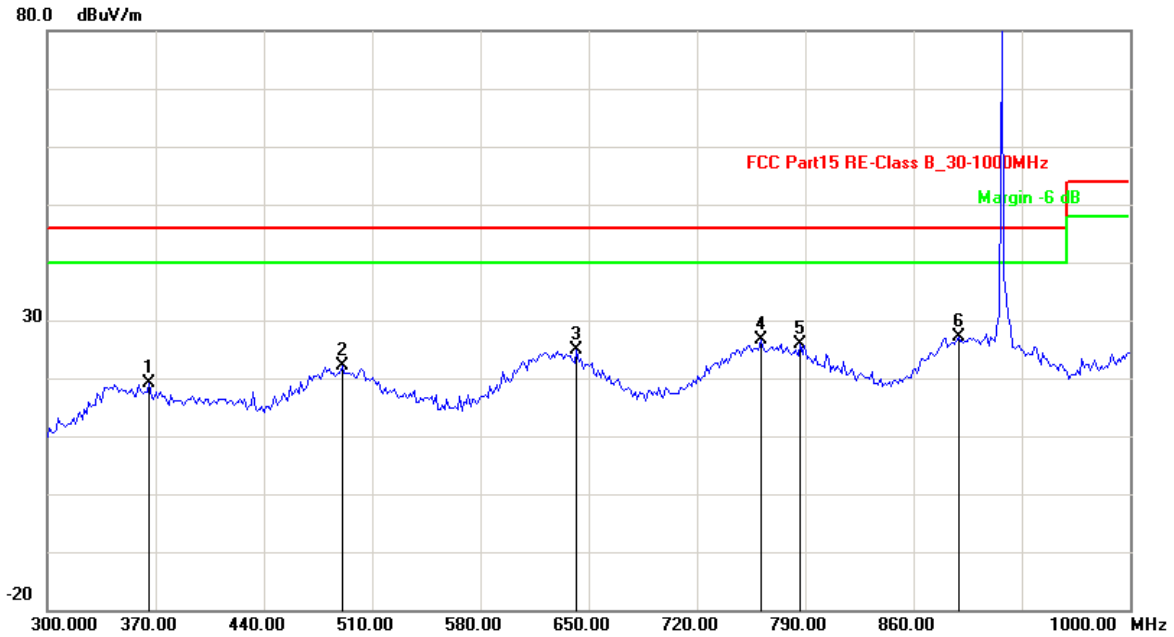

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	917.0	-4.39	95.97	91.58	114.00	-22.42	Peak
2	917.0	-4.39	91.01	86.62	94.00	-7.38	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	365.9319	-14.18	33.22	19.04	46.00	-26.96	QP
2	490.7816	-9.95	32.04	22.09	46.00	-23.91	QP
3	642.2846	-7.98	32.76	24.78	46.00	-21.22	QP
4	761.5230	-5.53	32.26	26.73	46.00	-19.27	QP
5	786.7735	-6.81	32.66	25.85	46.00	-20.15	QP
6	889.1784	-4.47	31.54	27.07	46.00	-18.93	QP

Above 1GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1815.631	-1.23	47.95	46.72	74.00	-27.28	peak
2	1815.631	-1.23	23.87	22.64	54.00	-31.36	AVG
3	2719.439	5.01	44.30	49.31	74.00	-24.69	peak
4	2719.439	5.01	29.51	34.52	54.00	-19.48	AVG
5	3711.423	8.88	41.14	50.02	74.00	-23.98	peak
6	3711.423	8.88	26.80	35.68	54.00	-18.32	AVG
7	4747.495	11.57	38.96	50.53	74.00	-23.47	peak
8	4747.495	11.57	24.15	35.72	54.00	-18.28	AVG
9	7591.182	18.62	39.42	58.04	74.00	-15.96	peak
10	7591.182	18.62	25.07	43.69	54.00	-10.31	AVG
11	8032.064	19.28	38.06	57.34	74.00	-16.66	peak
12	8032.064	19.28	22.88	42.16	54.00	-11.84	AVG

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



Test Model:	TX -X	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	30MHz~18GHz		

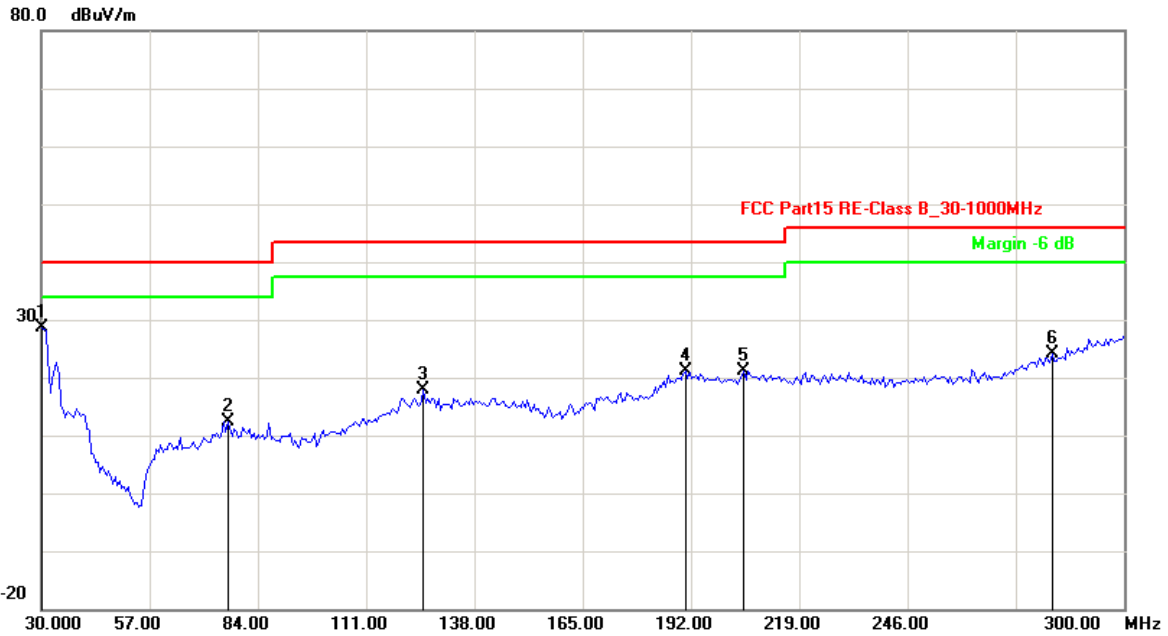


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	30.0000	-18.45	47.08	28.63	40.00	-11.37	QP
2	76.5331	-21.44	33.93	12.49	40.00	-27.51	QP
3	125.2305	-17.57	35.33	17.76	43.50	-25.74	QP
4	190.7014	-12.06	33.08	21.02	43.50	-22.48	QP
5	205.3106	-12.34	33.53	21.19	43.50	-22.31	QP
6	282.1443	-8.86	32.93	24.07	46.00	-21.93	QP

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.
 A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China
 Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
 Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

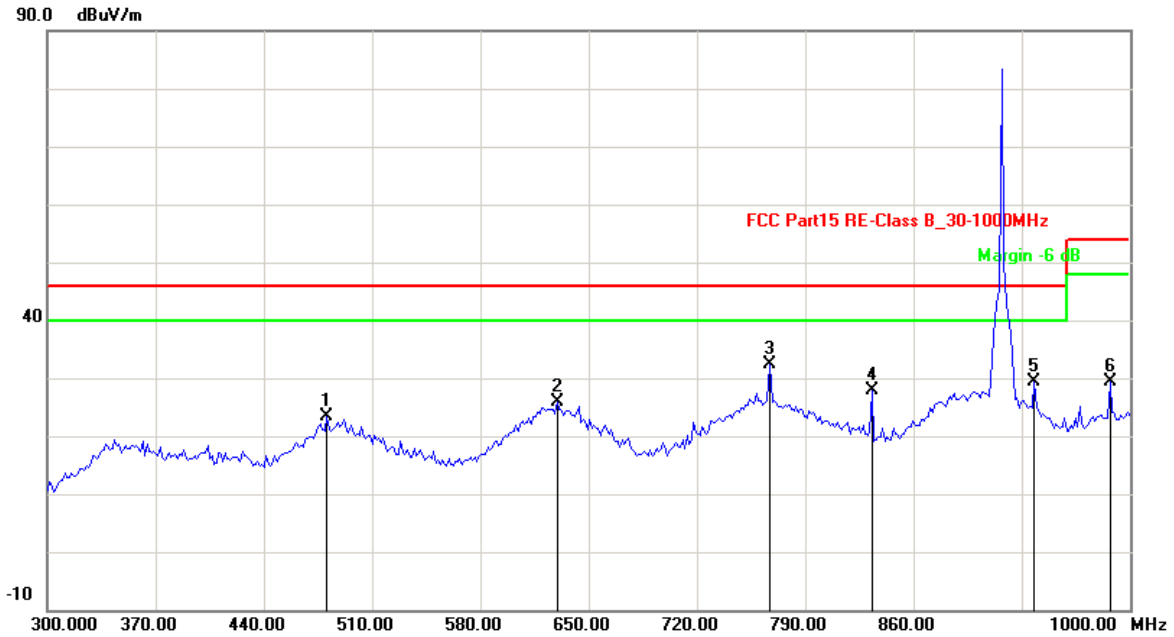

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	917.0	-4.39	99.02	94.63	114.00	-19.37	Peak
2	917.0	-4.39	93.60	89.21	94.00	-4.79	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	480.9619	-9.71	32.98	23.27	46.00	-22.73	QP
2	629.6593	-7.33	33.31	25.98	46.00	-20.02	QP
3	767.1343	-5.65	38.15	32.50	46.00	-13.50	QP
4	833.0661	-10.95	38.89	27.94	46.00	-18.06	QP
5	938.2766	-6.79	36.05	29.26	46.00	-16.74	QP
6	987.3747	-8.22	37.64	29.42	54.00	-24.58	QP

Above 1GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1815.631	-1.23	58.25	57.02	74.00	-16.98	peak
2	1815.631	-1.23	51.00	49.77	54.00	-4.23	AVG
3	2741.483	5.14	51.25	56.39	74.00	-17.61	peak
4	2741.483	5.14	43.08	48.22	54.00	-5.78	AVG
5	3270.541	7.47	42.55	50.02	74.00	-23.98	peak
6	3270.541	7.47	27.74	35.21	54.00	-18.79	AVG
7	4064.128	9.96	39.71	49.67	74.00	-24.33	peak
8	4064.128	9.96	24.19	34.15	54.00	-19.85	AVG
9	4505.010	11.00	39.02	50.02	74.00	-23.98	peak
10	4505.010	11.00	24.66	35.66	54.00	-18.34	AVG
11	5849.699	14.90	41.25	56.15	74.00	-17.85	peak
12	5849.699	14.90	26.12	41.02	54.00	-12.98	AVG

Remark: Others frequency test result margin all >6dB of the limit.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



8 . BAND EDGE COMPLIANCE TEST

8.1. Test Equipment

Band Edge Compliance test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2012/11
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2013/03
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2013/03
4	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2013/03

8.2. Test Information

EUT	8'' Digital Photo Frame Weather Station
Firm Name	THERMOR LTD.
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Operator	Duke

8.3. Test procedure

- 1、 The EUT operates at TX mode. The transmitter channel are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2、 Max hold the trace of the setp 1,and the EUT operates at Normal test mode to verify the largest spurious emissions power.

8.4. Test Results

PASSED.

The EUT operates at TX test mode. The transmitter channel are tested to verify the band edge emissions.


Test Mode	Channel Marked Frequency	Test Result Highest Emission (dBuV/m)			
		Horizontal		Vertical	
		Peak	Limit	Peak	Limit
TX	614MHz	38.95	46	39.49	46
	960MHz	40.69	54	41.40	54

Remark: Other Spurious Emissions mini margin all >6 dB of Limit.



Band Edges(Low)
 Detector mode:Peak


Polarity:Horizontal

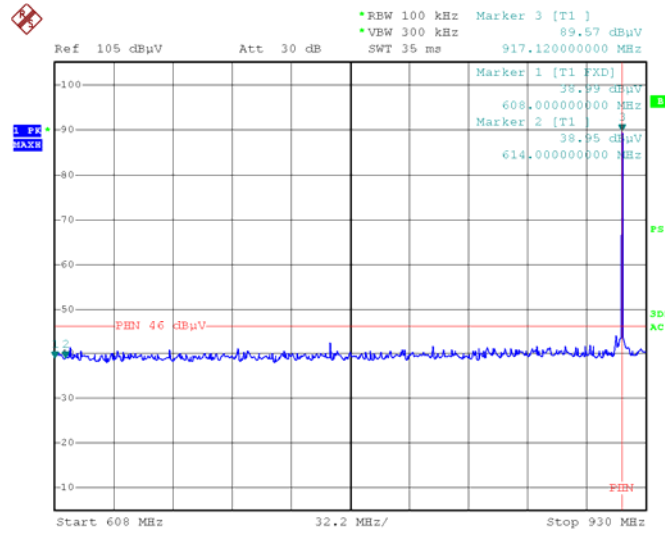

Date: 29.AUG.2013 13:22:59

Band Edges(Low)
 Detector mode:Peak

Polarity:Vertical

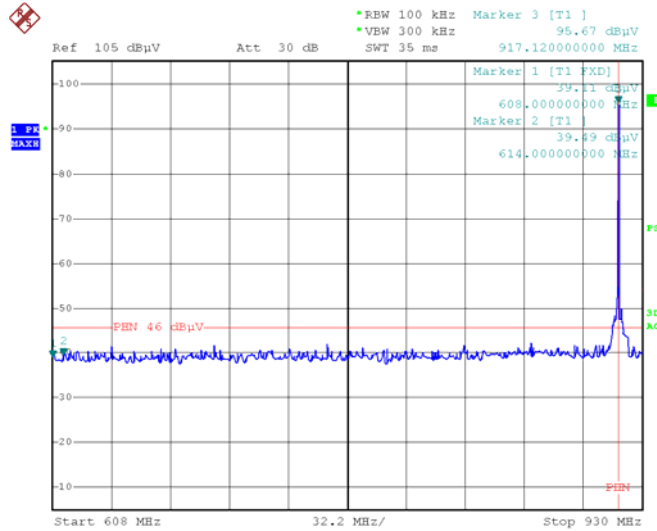

Date: 29.AUG.2013 13:23:26

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Band Edges(High)
Detector mode:Peak


Polarity:Horizontal

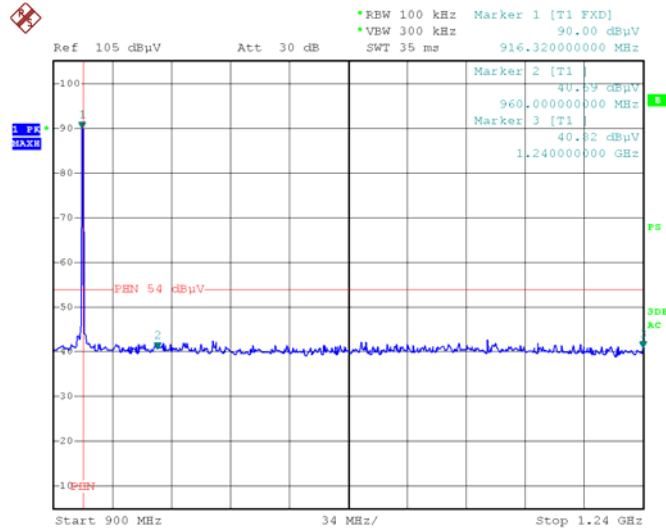

Date: 29.AUG.2013 13:21:47

Band Edges(High)
Detector mode:Peak

Polarity:Vertical

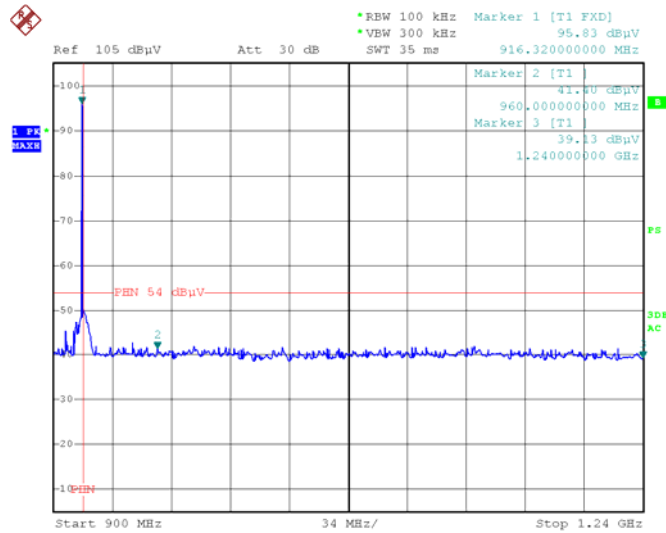

Date: 29.AUG.2013 13:21:06

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



9 20 dB BANDWIDTH TEST

9.1. Test Equipment

20 dB Bandwidth test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2012/11
2	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2013/03
3	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2013/03
4	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2013/03

9.2. Test Information

EUT	8" Digital Photo Frame Weather Station
Firm Name	THERMOR LTD.
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Operator	Duke

9.3. Test Results


PASSED.

The testing data was attached in the next table.

Test Model	Frequency (MHz)	20dB Bandwidth (MHz)
TX	917.0	0.480



20dB BandWidth

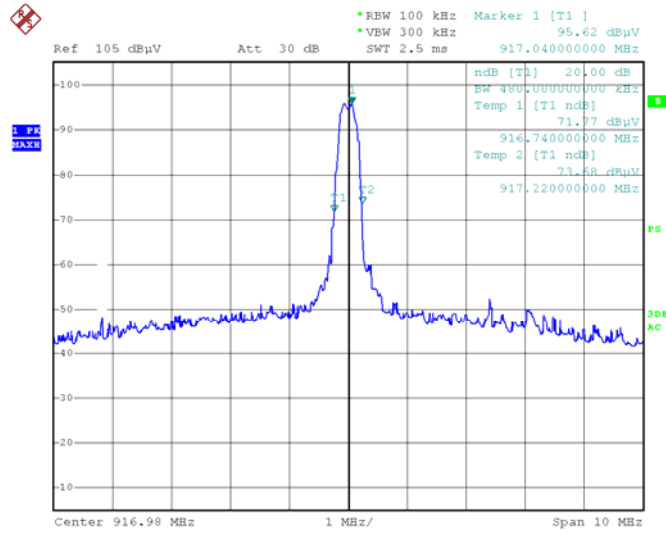

Date: 29.AUG.2013 13:25:05

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



10. 99% BANDWIDTH

10.1 Test procedure

According to RSS-210 Annex 8 and RSS-Gen 4.6.1 The transmitter output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

10.2. Test Equipment

Band Edge Compliance test					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2012/11
2	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2013/03
3	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2013/03
4	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2013/03

10.3. Test Information

EUT	8" Digital Photo Frame Weather Station
Firm Name	THERMOR LTD.
Operating Condition	Battery 1.5V*2
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Operator	Duke

10.4. Test Results


PASSED.

The testing data was attached in the next table.

Test Model	Frequency (MHz)	Bandwidth (MHz)
TX	917.0	0.40



99% Bandwidth

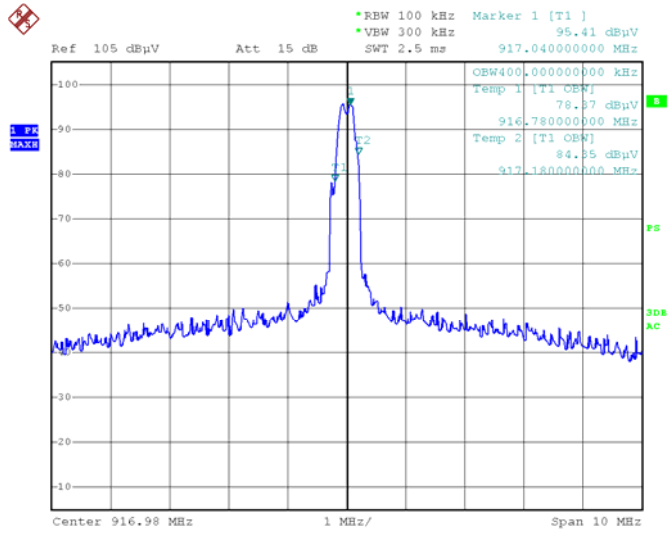

Date: 29.AUG.2013 13:25:59

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service



1 1 . DEVIATION TO TEST SPECIFICATIONS

The following identical model(s):

378NU, 378BC, 378BU

Belong to the tested device:

Product description: **8" Digital Photo Frame Weather Station**

Model name: **378NC**

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Fax: +86-20-38780406

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service