



RADIO TEST REPORT

Test Report No. : 29CE0117-HO-01-A

Applicant : YAMAHA CORPORATION
Type of Equipment : YAMAHA Wi-Fi PCB
Model No. : WR11780
FCC ID : A6RYMC700A
Test regulation : FCC Part 15 Subpart C 2008
Section 15.207, Section 15.247
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: November 4 to 14, 2008

Tested by:

T. Nakagawa
Tomohisa Nakagawa
EMC Services

T. Choda
Takeshi Choda
EMC Services

A. Hayashi
Akio Hayashi
EMC Services

Approved by :

T. Maeno
Tetsuo Maeno
Site Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission	10
SECTION 6: Spurious Emission.....	11
SECTION 7: Bandwidth.....	12
SECTION 8: Maximum Peak Output Power	13
SECTION 9: Peak Power Density	13
APPENDIX 1: Photographs of test setup.....	14
Conducted Emission	14
Spurious Emission (Radiated).....	15
Module Worst Case Position	16
Antenna Worst Case Position.....	17
APPENDIX 2: Data of EMI test	18
Conducted Emission	18
6dB Bandwidth	25
Maximum Peak Output Power.....	28
Radiated Spurious Emission (below 1GHz).....	29
Radiated Spurious Emission (above 1GHz).....	36
Conducted Spurious Emission.....	44
Conducted emission Band Edge compliance.....	51
Power Density	52
99%Occupied Bandwidth	55
APPENDIX 3: Test instruments	57

SECTION 1: Customer information

Company Name : YAMAHA CORPORATION
Address : 10-1 Nakazawa-cho, Naka-ku, Hamamatsu, Shizuoka 430-8650, Japan
Telephone Number : +81-53-460-3311
Facsimile Number : +81-53-460-3310
Contact Person : Hiromi Imura

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : YAMAHA Wi-Fi PCB
Model No. : WR11780
Serial No. : 2: used for Conducted Emission, Radiated Spurious emission tests
1: used for Antenna Terminal Conducted test only
Rating : DC5.0V
Receipt Date of Sample : October 31, 2008
Country of Mass-production : China (assembled in Japan)
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: WR11780 (referred to as the EUT in this report) is the YAMAHA Wi-Fi PCB.

Clock frequency(ies) in the system : 40MHz
Equipment Type : Transceiver
Frequency of Operation : 2412-2462MHz
Bandwidth & Channel Spacing : 18MHz & 5MHz
Modulation : DSSS/OFDM
Power Supply (inner) : DC 3.3V
Antenna Type : Pole Antenna
Antenna Connector Type : U.FL-R-SMT-1(01)
Antenna Gain : 1.8dBi max

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2008, final revised on May 19, 2008

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

FCC 15.31 (e)

This EUT provides stable voltage (DC3.3V) constantly to RF Module regardless of input voltage (DC4.0-6.0V). Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has an external antenna connector, but it is installed in the host devices of EUT by the professionals. Therefore, the equipment complies with the antenna requirement of Section 15.203/212.

3.2 Procedures and results

[DSSS and other forms of modulation]

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements ----- IC: RSS-Gen 7.2.2	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.2	Conducted	N/A	[QP] 18.9dB, N, Tx (0.57948MHz) (0.56378MHz) (0.56560MHz) [AV] 20.8dB, L, Tx (0.58038MHz) (0.57980MHz)	Complied
2	6dB Bandwidth	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.6.2	FCC: Section 15.247(a)(2) ----- IC: RSS-210 A8.2(a)	Conducted	N/A	See data.	Complied
3	Maximum Peak Output Power	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.8	FCC: Section 15.247(b)(3) ----- IC: RSS-210 A8.4(4)	Conducted	N/A		Complied
4	Restricted Band Edges	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: -	FCC: Section 15.247 (d) ----- IC: RSS-210 A8.5	Conducted/ Radiated	N/A		Complied
5	Power Density	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: -	FCC: Section 15.247 (e) ----- IC: RSS-210 A8.2(b)	Conducted	N/A		Complied
6	Spurious Emission	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247" ----- IC: RSS-Gen 4.9 RSS-Gen 4.10	FCC: Section15.247(d) ----- IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3	Conducted/ Radiated	N/A	[Tx] 5.8dB 2390MHz, AV, Horizontal [Rx] 12.0dB 199.998MHz, Horizontal	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*These tests were performed without any deviations from test procedure except for addition or exclusion.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	Conducted	N/A	N/A	N/A

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)			Radiated emission (3m*)			Radiated emission (3m*)	
	150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-40GHz
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

[Tx] The data listed in this report meets the limits unless the uncertainty is taken into consideration.

[Rx] The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is 3.0dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test Item	Operating Mode	Tested frequency
Conducted emission Spurious Emission (Conducted/Radiated)	IEEE802.11b Transmitting (Tx), 11Mbps, PN15	2412MHz(L)
	IEEE802.11g Transmitting (Tx), 54Mbps, PN15	2437MHz(M)
	----- IEEE802.11b/g Receiving (Rx)	2462MHz(H)
6dB Bandwidth Maximum Peak Output Power Power Density 99% Occupied Bandwidth	IEEE802.11b Transmitting (Tx), 11Mbps, PN15	2412MHz(L)
	IEEE802.11g Transmitting (Tx), 54Mbps, PN15	2437MHz(M)
	----- IEEE802.11g Transmitting (Tx), 54Mbps, PN15	2462MHz(H)
Restricted Band Edge (Conducted/Radiated)	IEEE802.11b Transmitting (Tx), 11Mbps, PN15	2412MHz(L)
	IEEE802.11g Transmitting (Tx), 54Mbps, PN15	2462MHz(H)
	----- IEEE802.11g Transmitting (Tx), 54Mbps, PN15	

*Transmitting duty was 100% on all tests.


* IEEE802.11b Transmitting (Tx): DSSS 11Mbps, Payload: PN15

* IEEE802.11g Transmitting (Tx): OFDM 54Mbps, Payload: PN15


*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum rated power.

4.2 Configuration and peripherals

For Conducted emission test

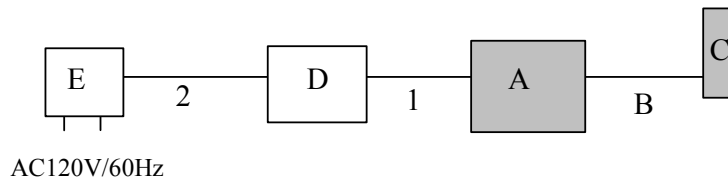

For Radiated emission test

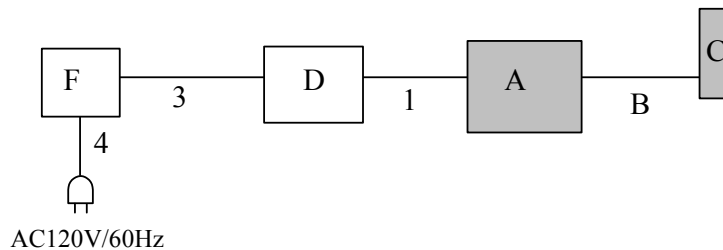

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	YAMAHA Wi-Fi PCB	WR11780	2 *1) 1 *2)	YAMAHA CORPORATION	EUT
B	Coaxial Cable	ANTB98-024AS	2	Silex Technology, Inc.	EUT
C	2.4GHz Antenna	ANTB918-119B0	2	Silex Technology, Inc.	EUT
D	PCB SDIO I/F	-	-	YAMAHA CORPORATION	-
E	I.T.E Power Supply	-	-	YAMAHA CORPORATION	*3)
F	YAMAHA YBA-10	TEST Power Supply-1	-	YAMAHA CORPORATION	*4)

*1) used for Conducted Emission, Radiated Spurious emission tests

*2) used for Antenna Terminal Conducted test only

*3) used for Conducted emission test only

*4) used for Radiated emission test only

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	FFC Cable	0.3	Unshielded	Unshielded	-
2	Mini-USB Cable	0.9	Shielded	Shielded	*5)
3	DC Cable	0.6	Unshielded	Unshielded	-
4	AC Cable	1.8	Unshielded	Unshielded	*6)

*5) used for Conducted emission test only

*6) used for Radiated emission test only

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane.

The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector	: quasi-peak and average detector (IF BW 9 kHz)
Measurement range	: 0.15-30MHz
Test data	: APPENDIX 2
Test result	: Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

It was measured based on "1. RF antenna conducted test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

The following spectrum analyzer setting was used:

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

It was measured based on "2. Radiated emission test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC15.205 / Table 1 of RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW: 1MHz/VBW: 1MHz
IF Bandwidth		AV *1): RBW: 1MHz/VBW: 10Hz 20dBc: RBW: 100kHz/VBW: 300kHz

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Bandwidth

6dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port. It was measured based on "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

The following spectrum analyzer setting was used:

- Span: 50MHz
- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2

Test result : Pass

99% Occupied Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port. The following spectrum analyzer setting was used:

- Span: Enough width to display 20dB Bandwidth
- RBW: as close to 1% of the Span as is possible without being below 1%
- VBW: Three times of RBW
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

It was measured based on "Power Output Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

Test data : APPENDIX 2

Test result : Pass

SECTION 9: Peak Power Density

[Conducted]

Test Procedure

The Peak Power Density was measured with a spectrum analyzer connected to the antenna port.

It was measured based on "PSD Option 1" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

	[IEEE802.11b]	[IEEE802.11g]
- Span	: 9MHz	9MHz
- RBW	: 30kHz *)	30kHz *)
- VBW	: 100kHz	100kHz
- Sweep	: 300sec (Span/RBW)	300sec (Span/RBW)
- Detector	: Peak	Peak
- Trace	: Clear Write	Clear Write

*) The test was not performed at RBW: 3kHz since the test data met the limit with RBW: 30kHz.

Test data : APPENDIX 2

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124