

FCC PART 15.247

TEST REPORT

For

LZeal Information Technology Co., Ltd.

F18, Unit 2, 530 Building, No.100, Dicui Road, Liyuan Development Zone, Wuxi City, Jiangsu Province, China

FCC ID: A7JEZS128

Report Type: Original Report	Product Type: Wi-Fi SD Card
Test Engineer:	Leon Chen <i>leon chen</i>
Report Number:	R1SH121227050-00A
Report Date:	2013-01-10
Reviewed By:	Ivan Cao <i>Ivan Cao</i> RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
PRINTER	6
KEYBOARD	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (I) AND §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(e) - POWER SPECTRAL DENSITY	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	44
DECLARATION LETTER.....	51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *LZeal Information Technology Co., Ltd.*'s product, model number: *DS100-4G (FCC ID: A7JEZS128)* (the "EUT") in this report was a *Wi-Fi SD Card*, which was measured approximately: 3.2 cm (L) x 2.4 cm (W) x 0.2 cm (H), rated input voltage: DC 3.3 V from system.

Note: the series product, model DS100 (DS100-4G, DS100-8G, DS100-16G, DS100-32G) are electrically identical, and the difference between them please refers to the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 121227050 (Assigned by BACL.Dongguan). The EUT was received on 2012-12-28.*

Objective

This report is prepared on behalf of *LZeal Information Technology Co., Ltd.* accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: *A7JEZS128*

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 3.46 dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB

6G~18GHz: 5.23 dB

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing at testing mode, which was provided by manufacturer. For 802.11b 802.11g and 802.11n20, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT for 802.11b, 802.11g, and 802.11n20 modes were tested with Channel 1, 6 and 11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

EUT Exercise Software “TCMD_v2.0.2.exe” was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
Chuanyu	Card Reader	/	/

External Cable

Cable Description	Length (m)	From Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Laptop	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Laptop	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Laptop	Keyboard

Block Diagram of Test Setup

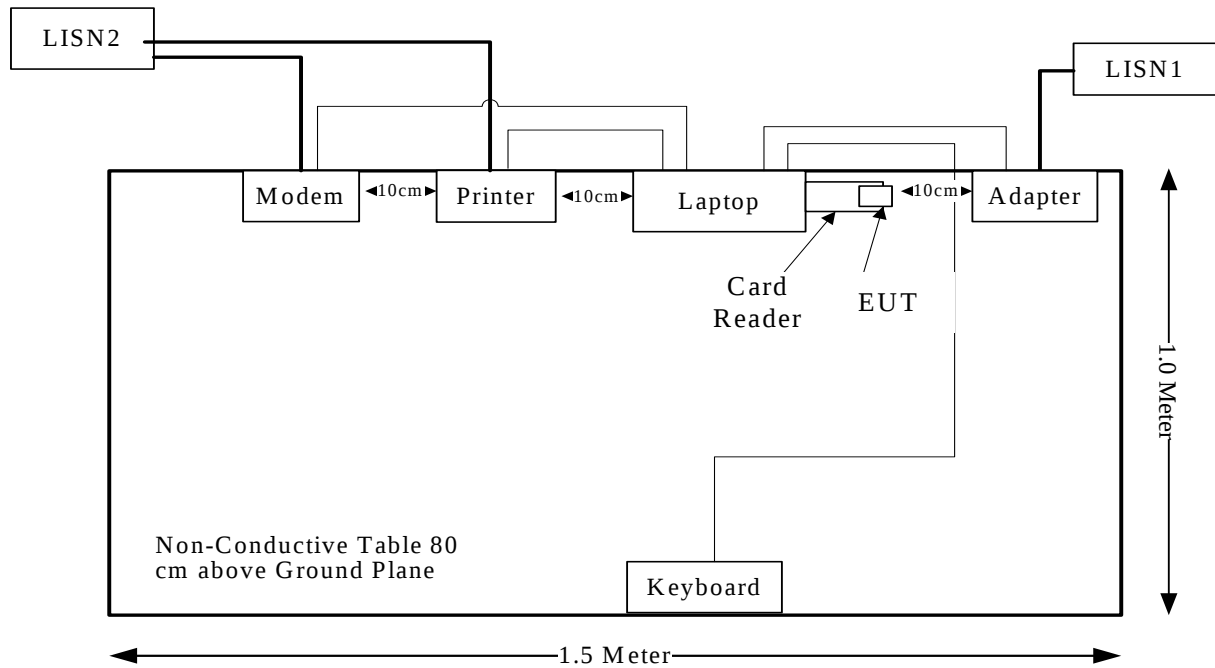

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307(b) (1), §2.1093	RF Exposure (SAR)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (I) AND §2.1093 – RF EXPOSURE

Applicable Standard

FCC§15.247 (I) §1.1307 and §2.1093.

Test Result

Compliance, please refer to the SAR report: R1SH121227050-20

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has a printed antenna, which was permanently attached on the PCB, and the maximum gain is -6dBi, please refer to the internal photos.

Result: Compliance.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	LISN1	ESH3-Z5	843331/015	2012-09-17	2013-09-16
R&S	LISN2	ESH3-Z5	100113	2012-11-29	2013-11-28

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

15.53 dB at 1.960MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	23.2 ° C
Relative Humidity:	56 %
ATM Pressure:	101.0kPa


The testing was performed by Leon Chen on 2013-01-09.

Test Mode: Transmitting

120 V, 60 Hz, Line:

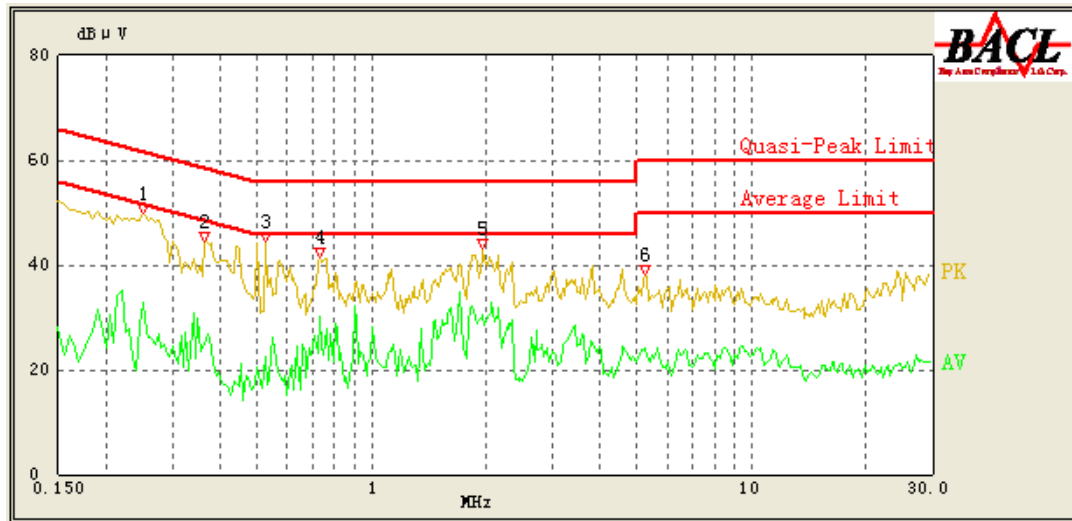

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.250	42.57	0.42	63.14	20.57	QP
0.250	32.99	0.42	53.14	20.15	AV
0.365	39.88	0.42	59.86	19.98	QP
0.365	24.85	0.42	49.86	25.01	AV
0.525	39.69	0.42	56.00	16.31	QP
0.525	22.66	0.42	46.00	23.34	AV
0.730	35.00	0.44	56.00	21.00	QP
0.735	30.11	0.44	46.00	15.89	AV
1.965	36.56	0.48	56.00	19.44	QP
1.960	30.47	0.48	46.00	15.53	AV
5.275	30.20	0.51	60.00	29.80	QP
5.230	24.01	0.51	50.00	25.99	AV

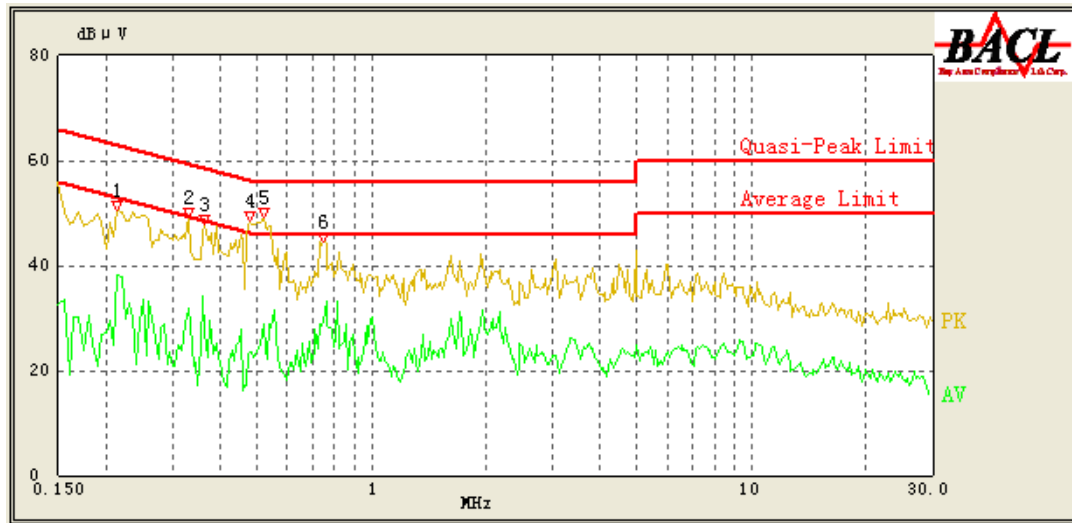120 V, 60 Hz, Neutral:

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.215	42.26	0.42	64.14	21.88	QP
0.215	38.26	0.42	54.14	15.88	AV
0.330	40.11	0.42	60.86	20.75	QP
0.330	31.98	0.42	50.86	18.88	AV
0.365	38.95	0.42	59.86	20.91	QP
0.365	27.04	0.42	49.86	22.82	AV
0.480	39.00	0.42	56.57	17.57	QP
0.475	23.04	0.42	46.71	23.67	AV
0.520	39.67	0.42	56.00	16.33	QP
0.520	28.90	0.42	46.00	17.10	AV
0.745	37.01	0.44	56.00	18.99	QP
0.750	29.47	0.44	46.00	16.53	AV

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB


1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

And the uncertainty will not be taken into consideration for all test data recorded in the report.

EUT Setup

Below 1GHz:

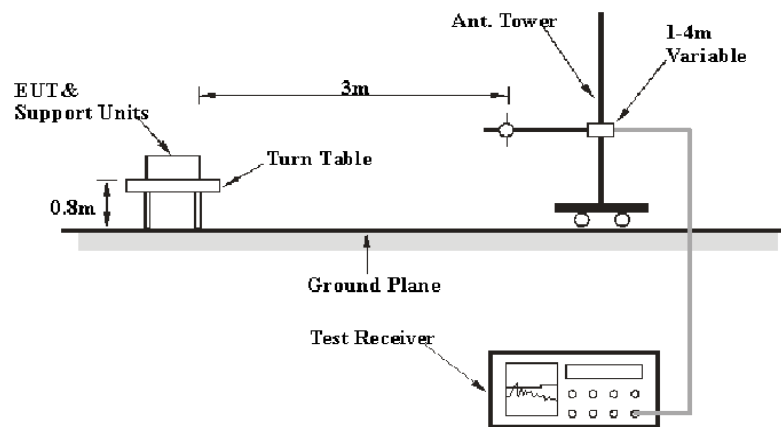

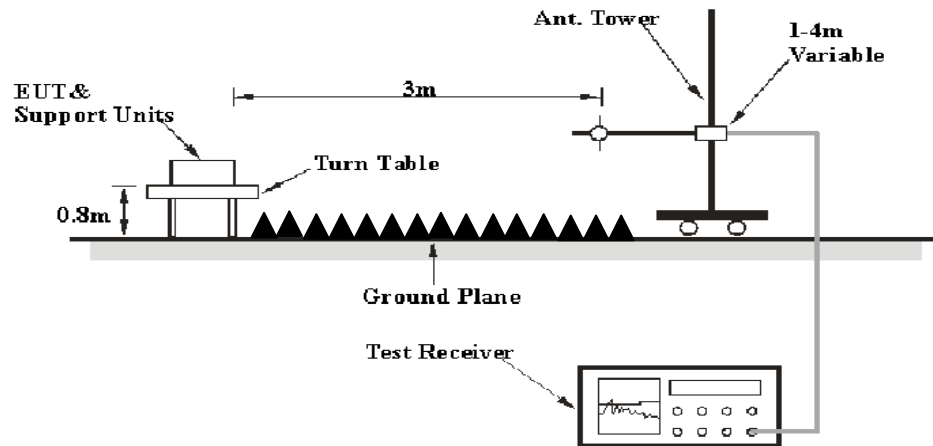Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>	<u>Detector</u>
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2012-05-14	2013-05-13
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-09-06	2013-09-05
HP	Pre-amplifier	8447E	2434A02181	2012-10-08	2013-10-07
R&S	Spectrum Analyzer	FSEM 30	DE31388	2012-03-15	2013-03-14
ETS-LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2014-09-05
PICOSECOND	Amplifier	5828	2708	N/A	N/A

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.97 dB at 7386 MHz in the **Vertical** polarization for 802.11g Mode

Test Data

Environmental Conditions

Temperature:	19.4 ° C
Relative Humidity:	56 %
ATM Pressure:	101.8kPa

The testing was performed by Leon Chen on 2013-01-06.

Mode: Transmitting

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	(LP0002)	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	65.97	AV	H	25.67	3.93	8.45	87.12	N/A	N/A
2412	70.09	PK	H	25.67	3.93	8.45	91.24	N/A	N/A
2412	74.08	AV	V	25.67	3.93	8.45	95.23	N/A	N/A
2412	78.17	PK	V	25.67	3.93	8.45	99.32	N/A	N/A
9648	14.23	AV	V	33.06	8.70	6.09	49.90	54.00	4.10
9648	34.11	PK	V	33.06	8.70	6.09	69.78	74.00	4.22
7236	15.96	AV	V	34.17	6.56	7.05	49.64	54.00	4.36
6631.2	18.84	AV	V	32.64	5.57	8.29	48.76	54.00	5.24
4824	17.05	AV	V	30.64	4.73	7.38	45.04	54.00	8.96
7236	30.13	PK	V	34.17	6.56	7.05	63.81	74.00	10.19
6631.2	32.81	PK	V	32.64	5.57	8.29	62.73	74.00	11.27
4824	30.09	PK	V	30.64	4.73	7.38	58.08	74.00	15.92
2390	15.6	AV	V	25.61	3.84	8.53	36.52	54.00	17.48
2390	29.87	PK	V	25.61	3.84	8.53	50.79	74.00	23.21
105.66	46.01	QP	V	12.00	1.26	21.40	37.87	43.50	5.63
Middle Channel: 2437 MHz									
2437	65.88	AV	H	25.74	3.98	8.35	87.25	N/A	N/A
2437	69.97	PK	H	25.74	3.98	8.35	91.34	N/A	N/A
2437	74.01	AV	V	25.74	3.98	8.35	95.38	N/A	N/A
2437	78.07	PK	V	25.74	3.98	8.35	99.44	N/A	N/A
9748	14.21	AV	V	33.30	8.60	6.49	49.62	54.00	4.38
7311	15.88	AV	V	34.35	6.70	7.17	49.76	54.00	4.24
9748	34.12	PK	V	33.30	8.60	6.49	69.53	74.00	4.47
6630.4	18.71	AV	V	32.64	5.57	8.29	48.63	54.00	5.37
4874	17.15	AV	V	30.77	4.76	7.33	45.35	54.00	8.65
7311	30.15	PK	V	34.35	6.70	7.17	64.03	74.00	9.97
4084.2	15.2	AV	V	29.88	7.02	8.59	43.51	54.00	10.49
6630.4	32.21	PK	V	32.64	5.57	8.29	62.13	74.00	11.87
4874	29.93	PK	V	30.77	4.76	7.33	58.13	74.00	15.87
4084.2	28.93	PK	V	29.88	7.02	8.59	57.24	74.00	16.76
191.99	40.85	QP	H	11.59	1.71	21.46	32.69	43.50	10.81
High Channel: 2462 MHz									
2462	66.03	AV	H	25.80	3.93	8.25	87.51	N/A	N/A
2462	70.11	PK	H	25.80	3.93	8.25	91.59	N/A	N/A
2462	74.09	AV	V	25.80	3.93	8.25	95.57	N/A	N/A
2462	78.14	PK	V	25.80	3.93	8.25	99.62	N/A	N/A
9848	14.24	AV	V	33.54	8.49	6.92	49.35	54.00	4.65
7386	15.93	AV	V	34.53	6.84	7.28	50.02	54.00	3.98*
9848	34.05	PK	V	33.54	8.49	6.92	69.16	74.00	4.84
6631	18.82	AV	V	32.64	5.57	8.29	48.74	54.00	5.26
4924	16.95	AV	V	30.90	4.70	7.28	45.27	54.00	8.73
7386	30.1	PK	V	34.53	6.84	7.28	64.19	74.00	9.81
6631	32.76	PK	V	32.64	5.57	8.29	62.68	74.00	11.32
4924	29.31	PK	V	30.90	4.70	7.28	57.63	74.00	16.37
2483.5	15.67	AV	V	25.86	3.80	8.17	37.16	54.00	16.84
2483.5	29.75	PK	V	25.86	3.80	8.17	51.24	74.00	22.76
384.05	39.38	QP	H	15.81	2.37	21.73	35.83	46.00	10.17

*Within measurement uncertainty!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	(LP0002)	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	56.67	AV	H	25.67	3.93	8.45	77.82	N/A	N/A
2412	68.25	PK	H	25.67	3.93	8.45	89.40	N/A	N/A
2412	64.97	AV	V	25.67	3.93	8.45	86.12	N/A	N/A
2412	76.61	PK	V	25.67	3.93	8.45	97.76	N/A	N/A
9648	14.23	AV	V	33.06	8.70	6.09	49.90	54.00	4.10
9648	33.47	PK	V	33.06	8.70	6.09	69.14	74.00	4.86
7236	15.88	AV	V	34.17	6.56	7.05	49.56	54.00	4.44
7236	30.26	PK	V	34.17	6.56	7.05	63.94	74.00	10.06
4122	14.49	AV	V	29.88	7.83	8.50	43.70	54.00	10.30
4824	14.58	AV	V	30.64	4.73	7.38	42.57	54.00	11.43
4122	29.25	PK	V	29.88	7.83	8.50	58.46	74.00	15.54
2390	16.17	AV	V	25.61	3.84	8.53	37.09	54.00	16.91
4824	28.64	PK	V	30.64	4.73	7.38	56.63	74.00	17.37
2390	30.56	PK	V	25.61	3.84	8.53	51.48	74.00	22.52
105.66	45.5	QP	V	12.00	1.26	21.40	37.36	43.50	6.14
Middle Channel: 2437 MHz									
2437	56.44	AV	H	25.74	3.98	8.35	77.81	N/A	N/A
2437	68.03	PK	H	25.74	3.98	8.35	89.40	N/A	N/A
2437	64.82	AV	V	25.74	3.98	8.35	86.19	N/A	N/A
2437	76.41	PK	V	25.74	3.98	8.35	97.78	N/A	N/A
9748	14.24	AV	V	33.30	8.60	6.49	49.65	54.00	4.35
9748	34.27	PK	V	33.30	8.60	6.49	69.68	74.00	4.32
7311	15.73	AV	V	34.35	6.70	7.17	49.61	54.00	4.39
6630.4	18.83	AV	V	32.64	5.57	8.29	48.75	54.00	5.25
7311	30.18	PK	V	34.35	6.70	7.17	64.06	74.00	9.94
4084.2	14.56	AV	V	29.88	7.02	8.59	42.87	54.00	11.13
4874	14.57	AV	V	30.77	4.76	7.33	42.77	54.00	11.23
6630.4	32.37	PK	V	32.64	5.57	8.29	62.29	74.00	11.71
4084.2	29.14	PK	V	29.88	7.02	8.59	57.45	74.00	16.55
4874	28.66	PK	V	30.77	4.76	7.33	56.86	74.00	17.14
191.99	41.37	QP	H	11.59	1.71	21.46	33.21	43.50	10.29
High Channel: 2462 MHz									
2462	56.58	AV	H	25.80	3.93	8.25	78.06	N/A	N/A
2462	68.13	PK	H	25.80	3.93	8.25	89.61	N/A	N/A
2462	64.91	AV	V	25.80	3.93	8.25	86.39	N/A	N/A
2462	76.52	PK	V	25.80	3.93	8.25	98.00	N/A	N/A
9848	14.21	AV	V	33.54	8.49	6.92	49.32	54.00	4.68
7386	15.94	AV	V	34.53	6.84	7.28	50.03	54.00	3.97*
9848	34.36	PK	V	33.54	8.49	6.92	69.47	74.00	4.53
6631	18.83	AV	V	32.64	5.57	8.29	48.75	54.00	5.25
7386	30.59	PK	V	34.53	6.84	7.28	64.68	74.00	9.32
4924	14.36	AV	V	30.90	4.70	7.28	42.68	54.00	11.32
6631	32.53	PK	V	32.64	5.57	8.29	62.45	74.00	11.55
2483.5	16.17	AV	V	25.86	3.80	8.17	37.66	54.00	16.34
4924	28.49	PK	V	30.90	4.70	7.28	56.81	74.00	17.19
2483.5	30.56	PK	V	25.86	3.80	8.17	52.05	74.00	21.95
384.05	40.64	QP	H	15.81	2.37	21.73	37.09	46.00	8.91

*Within measurement uncertainty!


802.11 n20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	(LP0002)	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	56.61	AV	H	25.67	3.93	8.45	77.76	N/A	N/A
2412	68.13	PK	H	25.67	3.93	8.45	89.28	N/A	N/A
2412	64.51	AV	V	25.67	3.93	8.45	85.66	N/A	N/A
2412	76.11	PK	V	25.67	3.93	8.45	97.26	N/A	N/A
9648	14.23	AV	V	33.06	8.70	6.09	49.90	54.00	4.10
9648	34.11	PK	V	33.06	8.70	6.09	69.78	74.00	4.22
7236	15.86	AV	V	34.17	6.56	7.05	49.54	54.00	4.46
6631.2	18.84	AV	V	32.64	5.57	8.29	48.76	54.00	5.24
7236	30.13	PK	V	34.17	6.56	7.05	63.81	74.00	10.19
4824	15.12	AV	V	30.64	4.73	7.38	43.11	54.00	10.89
6631.2	32.81	PK	V	32.64	5.57	8.29	62.73	74.00	11.27
2390	17.12	AV	V	25.61	3.84	8.53	38.04	54.00	15.96
4824	29.21	PK	V	30.64	4.73	7.38	57.20	74.00	16.80
2390	33.73	PK	V	25.61	3.84	8.53	54.65	74.00	19.35
105.66	45.35	QP	V	12.00	1.26	21.40	37.21	43.50	6.29
Middle Channel: 2437 MHz									
2437	56.27	AV	H	25.74	3.98	8.35	77.64	N/A	N/A
2437	67.49	PK	H	25.74	3.98	8.35	88.86	N/A	N/A
2437	64.11	AV	V	25.74	3.98	8.35	85.48	N/A	N/A
2437	75.84	PK	V	25.74	3.98	8.35	97.21	N/A	N/A
9748	14.24	AV	V	33.30	8.60	6.49	49.65	54.00	4.35
7311	15.86	AV	V	34.35	6.70	7.17	49.74	54.00	4.26
9748	34.18	PK	V	33.30	8.60	6.49	69.59	74.00	4.41
6630.4	18.81	AV	V	32.64	5.57	8.29	48.73	54.00	5.27
7311	30.24	PK	V	34.35	6.70	7.17	64.12	74.00	9.88
4084.2	15.2	AV	V	29.88	7.02	8.59	43.51	54.00	10.49
4874	14.75	AV	V	30.77	4.76	7.33	42.95	54.00	11.05
6630.4	32.21	PK	V	32.64	5.57	8.29	62.13	74.00	11.87
4084.2	28.93	PK	V	29.88	7.02	8.59	57.24	74.00	16.76
4874	28.93	PK	V	30.77	4.76	7.33	57.13	74.00	16.87
191.99	38.88	QP	H	11.59	1.71	21.46	30.72	43.50	12.78
High Channel: 2462 MHz									
2462	56.69	AV	H	25.80	3.93	8.25	78.17	N/A	N/A
2462	68.22	PK	H	25.80	3.93	8.25	89.70	N/A	N/A
2462	64.63	AV	V	25.80	3.93	8.25	86.11	N/A	N/A
2462	76.36	PK	V	25.80	3.93	8.25	97.84	N/A	N/A
9848	14.25	AV	V	33.54	8.49	6.92	49.36	54.00	4.64
7386	15.74	AV	V	34.53	6.84	7.28	49.83	54.00	4.17
9848	34.31	PK	V	33.54	8.49	6.92	69.42	74.00	4.58
6631	18.86	AV	V	32.64	5.57	8.29	48.78	54.00	5.22
7386	30.41	PK	V	34.53	6.84	7.28	64.50	74.00	9.50
4924	14.67	AV	V	30.90	4.70	7.28	42.99	54.00	11.01
6631	32.54	PK	V	32.64	5.57	8.29	62.46	74.00	11.54
4924	29.65	PK	V	30.90	4.70	7.28	57.97	74.00	16.03
2483.5	16.13	AV	V	25.86	3.80	8.17	37.62	54.00	16.38
2483.5	30.81	PK	V	25.86	3.80	8.17	52.30	74.00	21.70
384.05	39.19	QP	H	15.81	2.37	21.73	35.64	46.00	10.36

*Within measurement uncertainty!


Conducted Spurious Emissions at Antenna Port

802.11b Low Channel

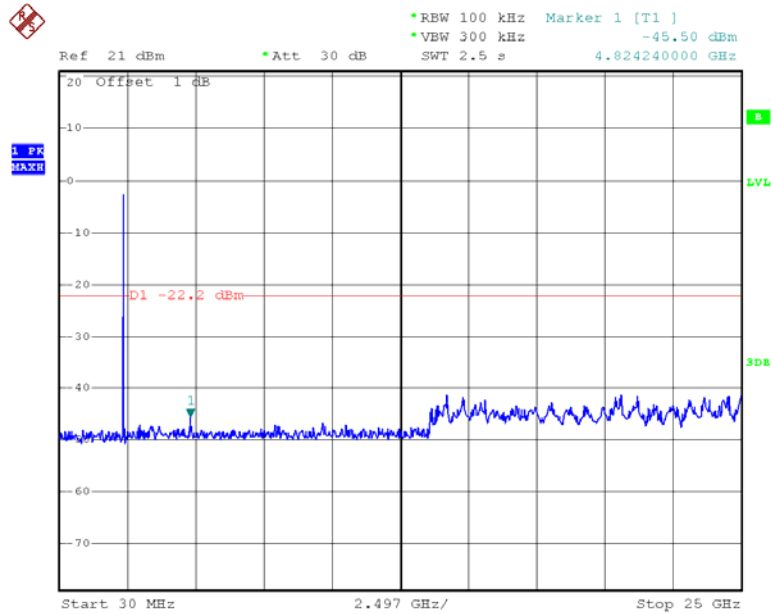


Date: 6.JAN.2013 13:08:38

802.11b Middle Channel

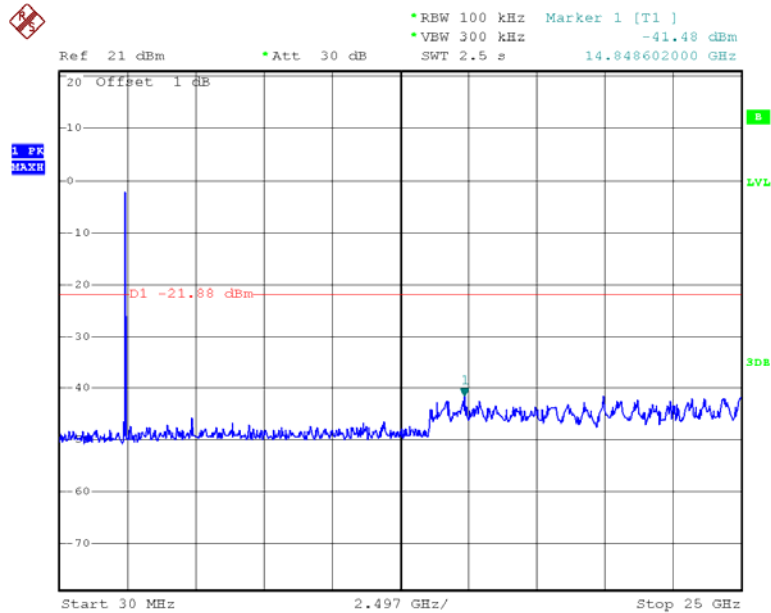


Date: 6.JAN.2013 13:14:52

802.11b High Channel

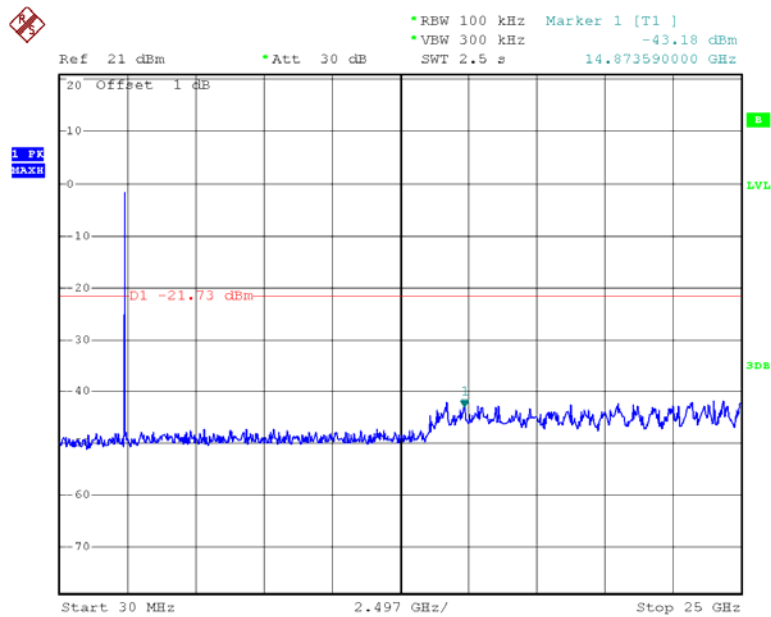


Date: 6.JAN.2013 13:18:00

802.11g Low Channel

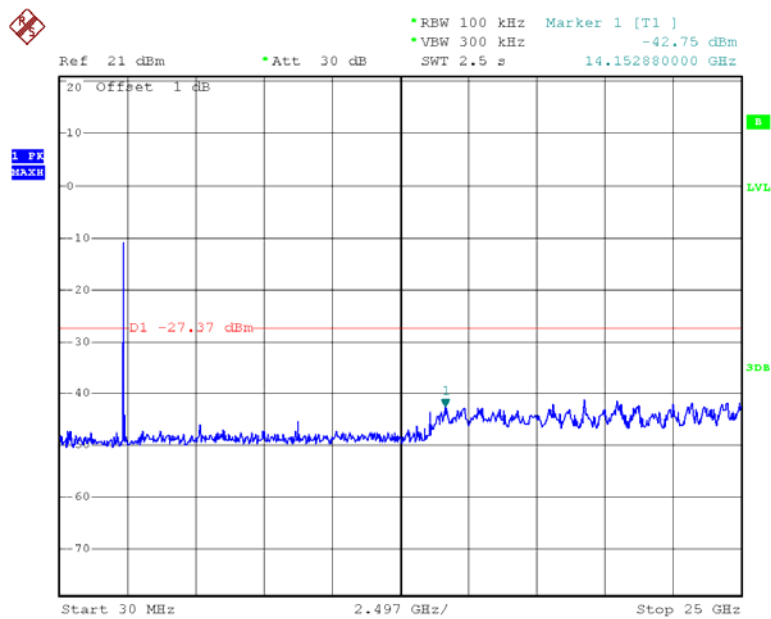


Date: 6.JAN.2013 13:37:48

802.11g Middle Channel

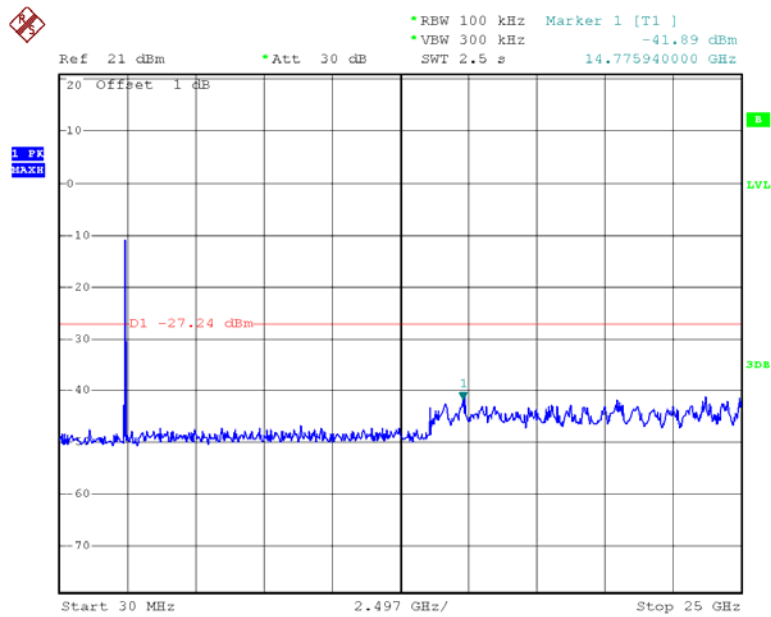


Date: 6.JAN.2013 13:43:21

802.11g High Channel

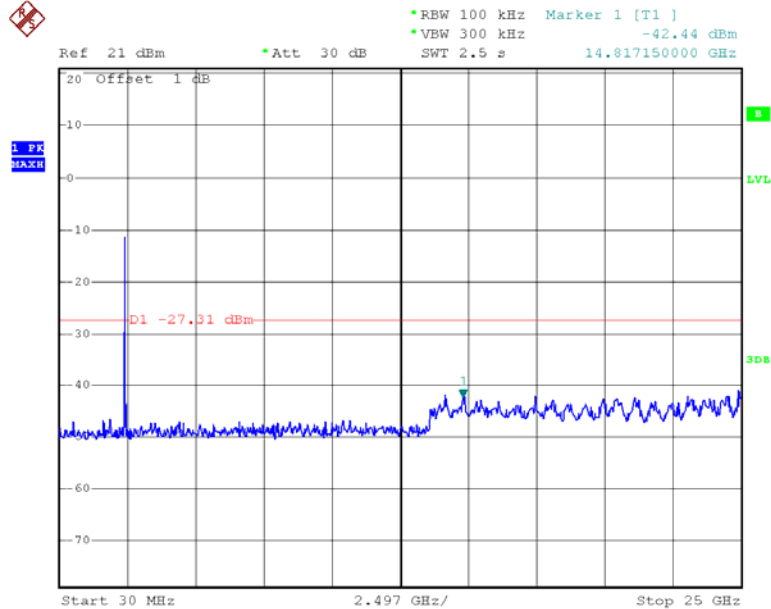


Date: 6.JAN.2013 13:28:33

802.11n20 Low Channel

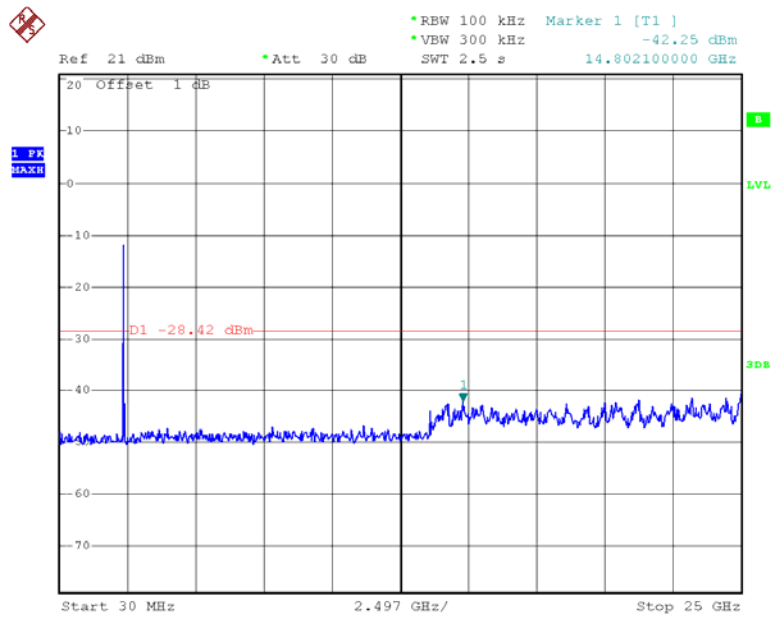


Date: 6.JAN.2013 13:51:57

802.11n20 Middle Channel

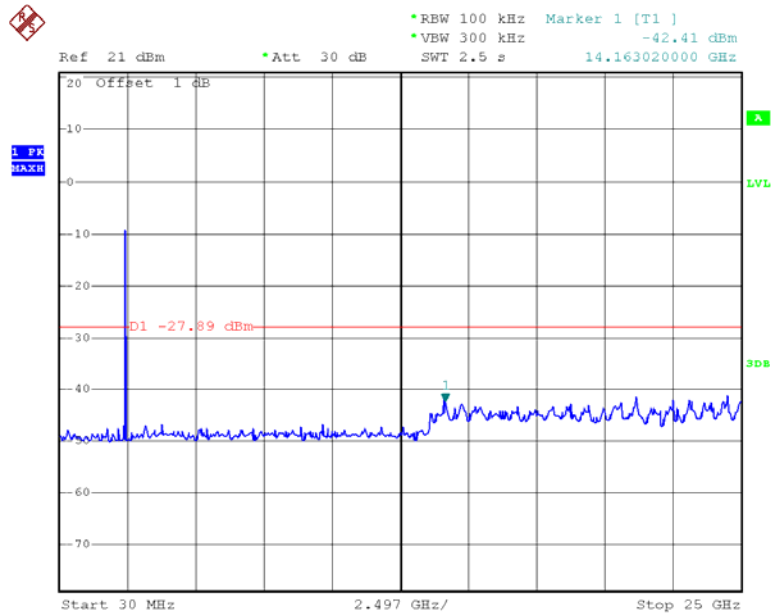

Date: 6.JAN.2013 15:17:12

802.11n20 High Channel

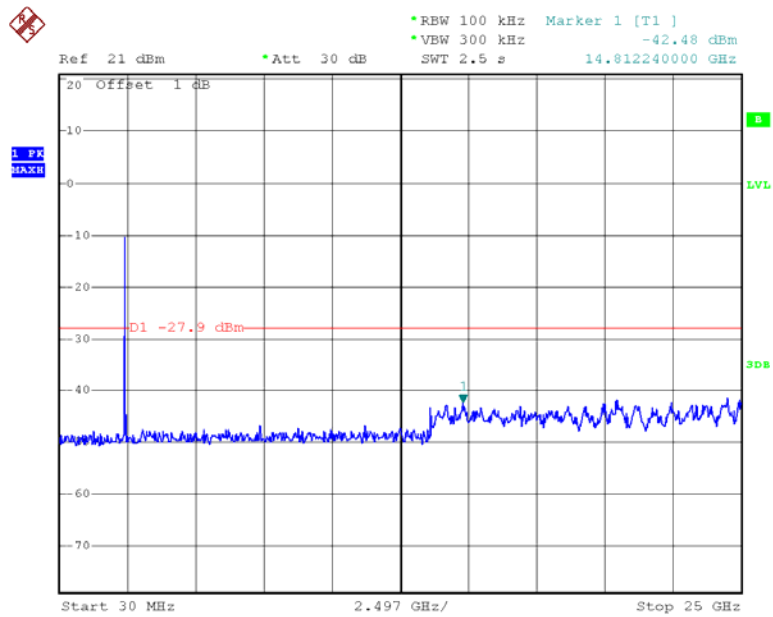


Date: 6.JAN.2013 13:56:59

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	19.8 ° C
Relative Humidity:	42 %
ATM Pressure:	101.8kPa


The testing was performed by Leon Chen on 2013-01-06.

Test Result: Pass.

Please refer to the following tables and plots.


Channel	Frequency	6 dB Bandwidth	Limit
	(MHz)	(MHz)	(kHz)
802.11b mode			
Low	2412	10.36	>500
Middle	2437	10.36	>500
High	2462	10.36	>500
802.11g mode			
Low	2412	16.60	>500
Middle	2437	16.60	>500
High	2462	16.60	>500
802.11n20 mode			
Low	2412	17.84	>500
Middle	2437	17.84	>500
High	2462	17.84	>500

802.11b Low Channel

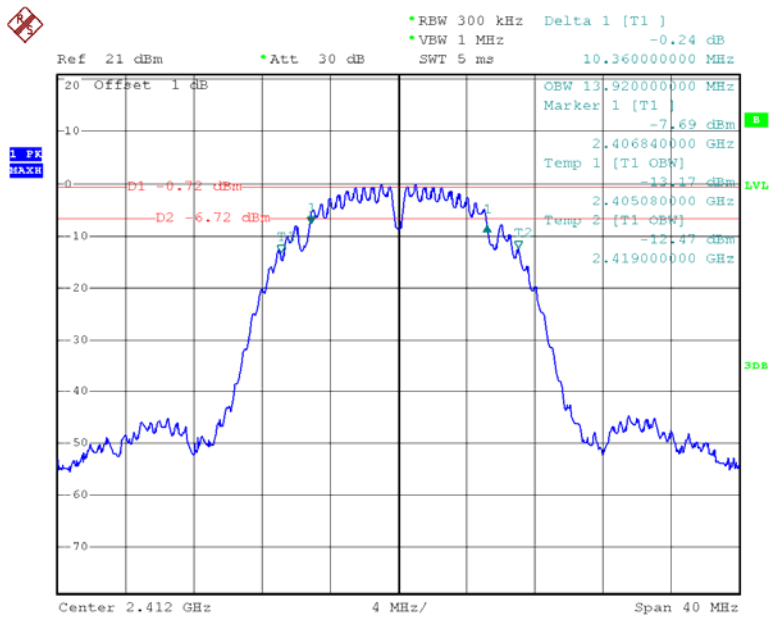


Date: 6.JAN.2013 11:56:29

802.11b Middle Channel

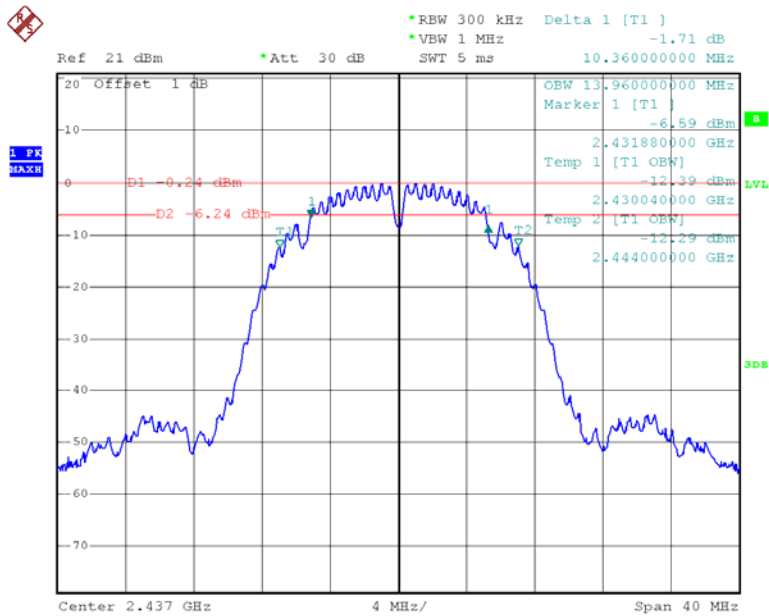


Date: 6.JAN.2013 13:13:30

802.11b High Channel

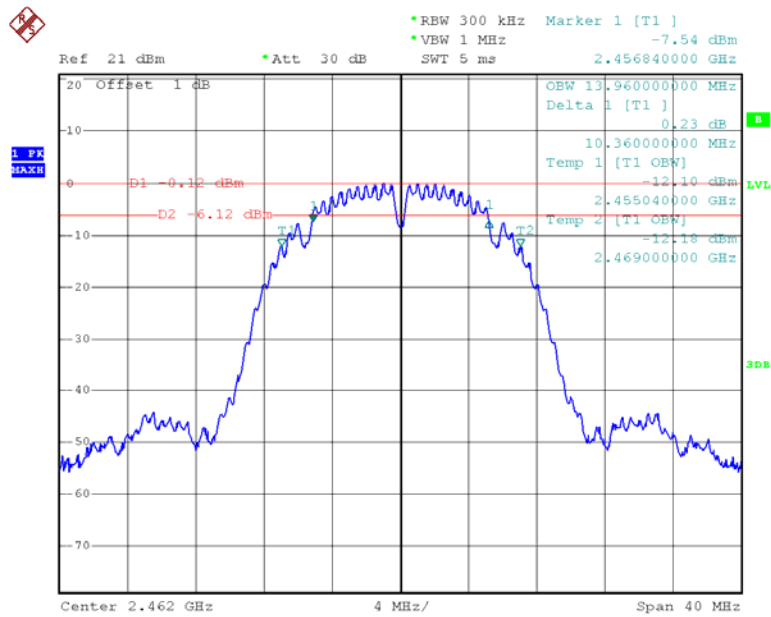


Date: 6.JAN.2013 13:16:48


802.11g Low Channel

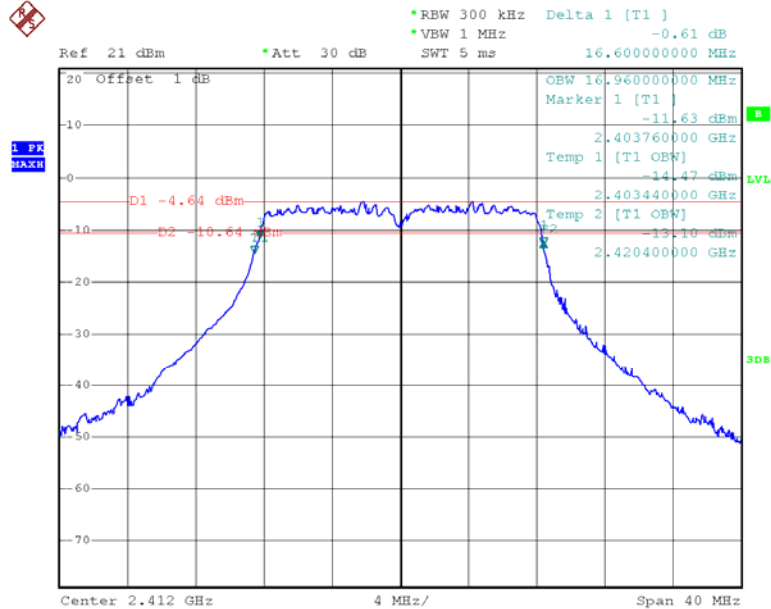


Date: 6.JAN.2013 13:35:44

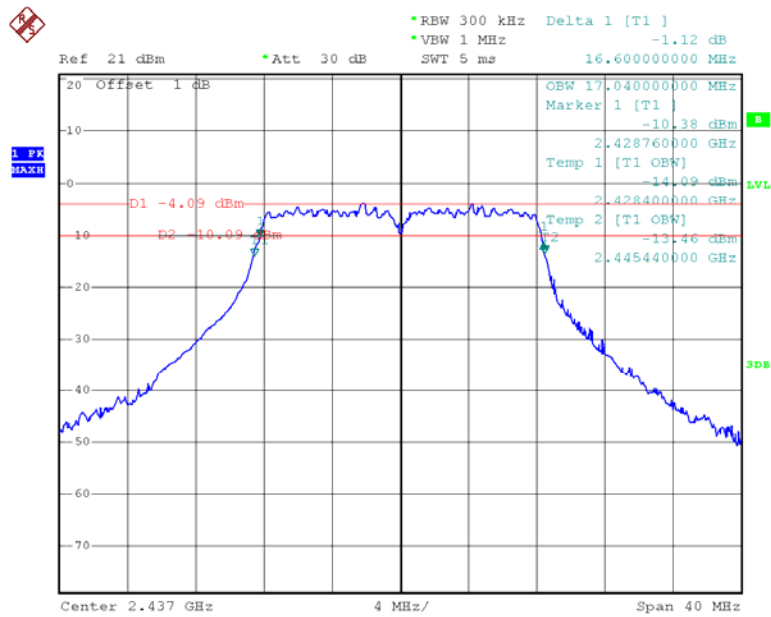802.11g Middle Channel


Date: 6.JAN.2013 13:44:43

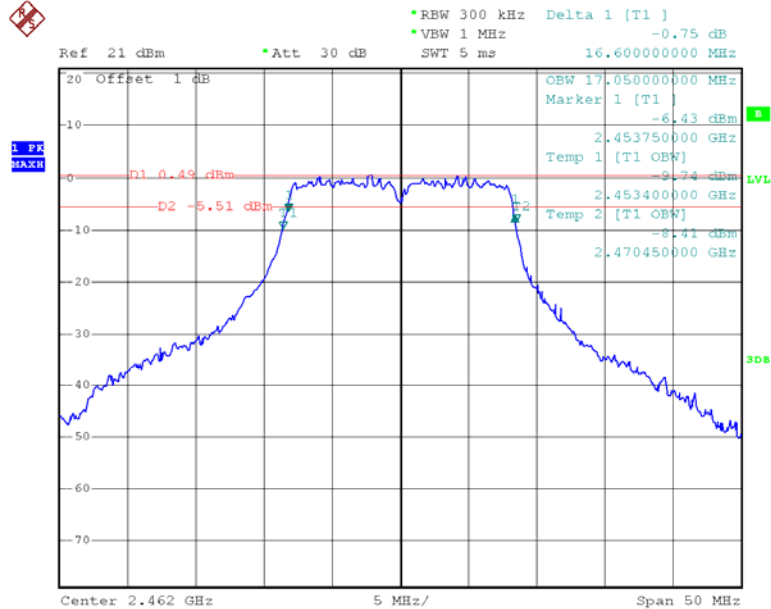802.11g High Channel

Date: 6.JAN.2013 13:24:22

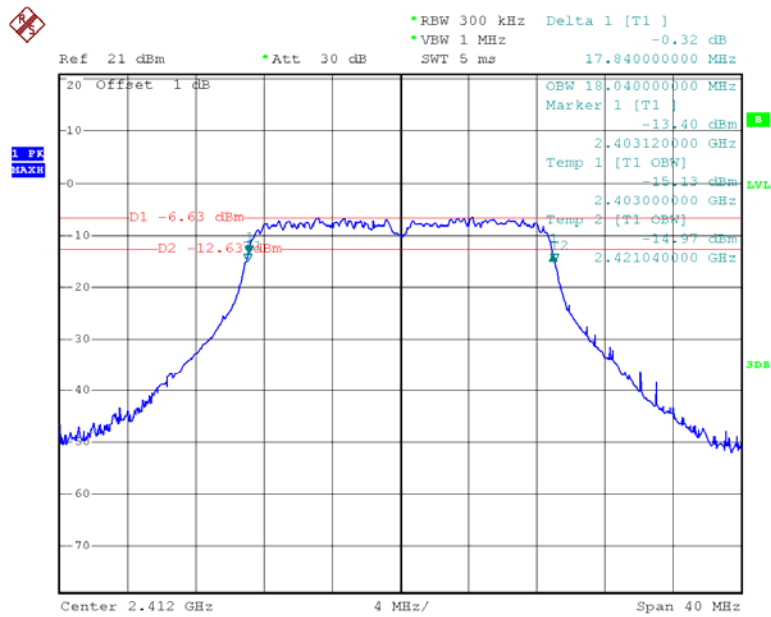
802.11n20 Low Channel

Date: 6.JAN.2013 13:50:08

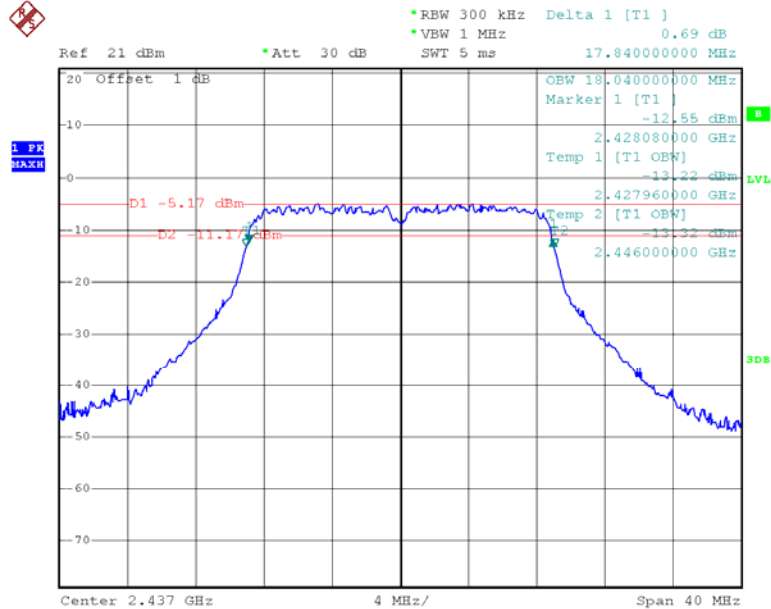802.11n20 Middle Channel

Date: 6.JAN.2013 13:45:42

802.11n20 High Channel

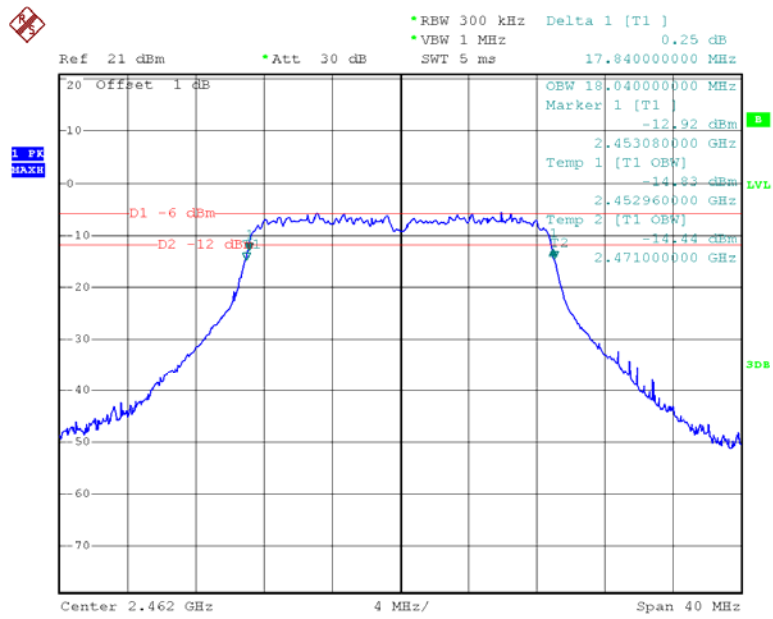


Date: 6.JAN.2013 13:55:40

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	19.8 ° C
Relative Humidity:	42 %
ATM Pressure:	101.8kPa


The testing was performed by Leon Chen on 2013-01-06.

Test Mode: Transmitting

Channel	Frequency	Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
802.11b mode				
Low	2412 MHz	10.92	30	PASS
Middle	2437 MHz	11.14	30	PASS
High	2462 MHz	11.29	30	PASS
802.11g mode				
Low	2412 MHz	10.84	30	PASS
Middle	2437 MHz	11.18	30	PASS
High	2462 MHz	11.16	30	PASS
802.11n20 mode				
Low	2412 MHz	10.01	30	PASS
Middle	2437 MHz	10.58	30	PASS
High	2462 MHz	10.64	30	PASS


Please refer to the following plots

802.11b RF Output Power, Low Channel

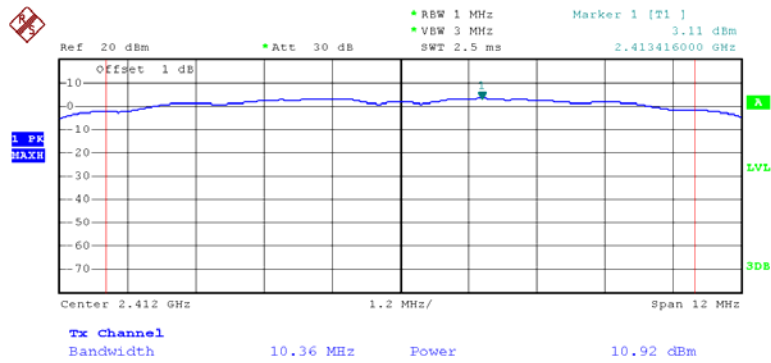


Date: 6.JAN.2013 13:06:09

802.11b RF Output Power, Middle Channel

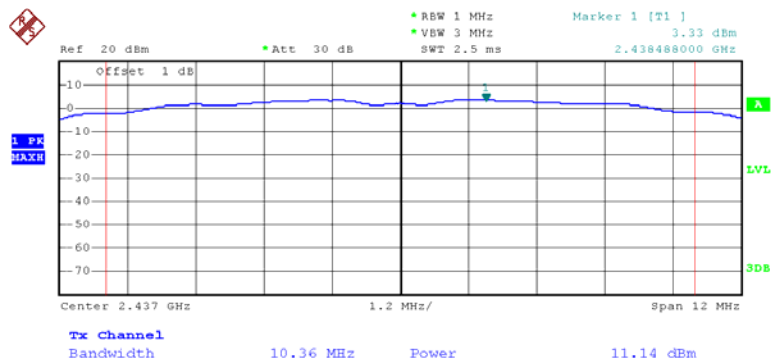


Date: 6.JAN.2013 13:13:40

802.11b RF Output Power, High Channel

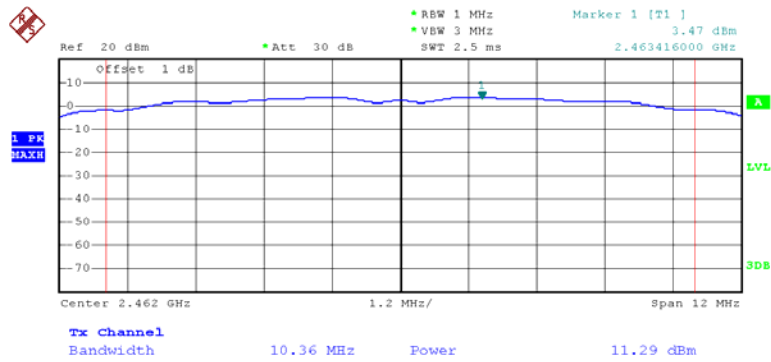


Date: 6.JAN.2013 13:16:58

802.11g RF Output Power, Low Channel

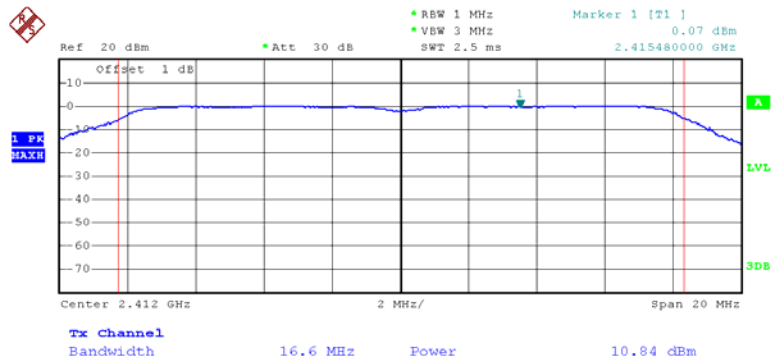


Date: 6.JAN.2013 13:35:54

802.11g RF Output Power, Middle Channel

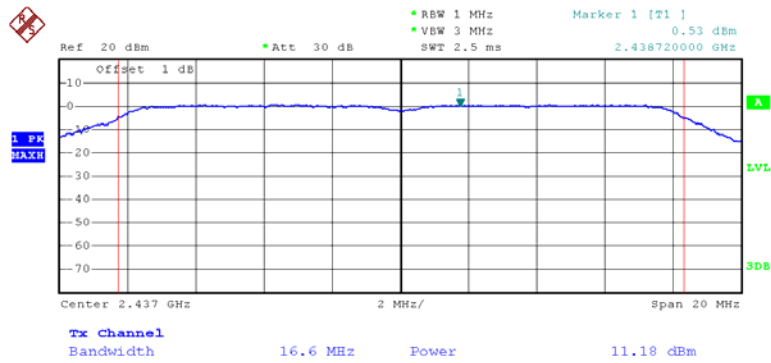


Date: 6.JAN.2013 13:41:51

802.11g RF Output Power, High Channel

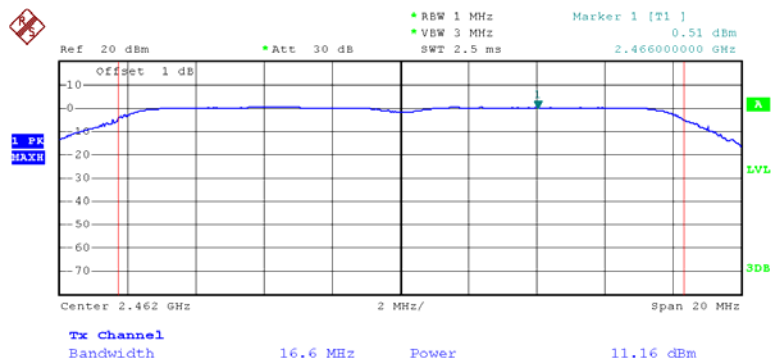


Date: 6.JAN.2013 13:26:48

802.11n20 RF Output Power, Low Channel

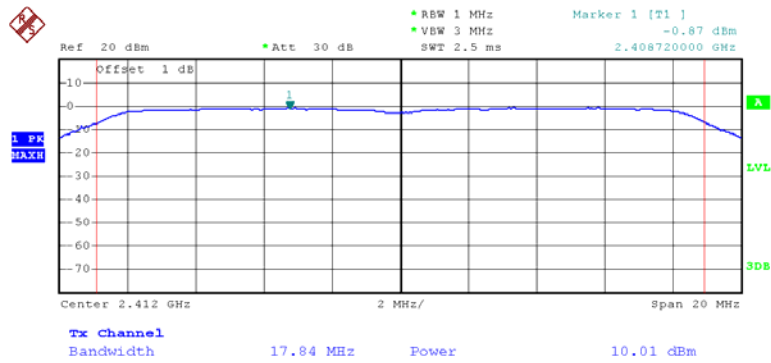


Date: 6.JAN.2013 13:49:08

802.11n20 RF Output Power, Middle Channel

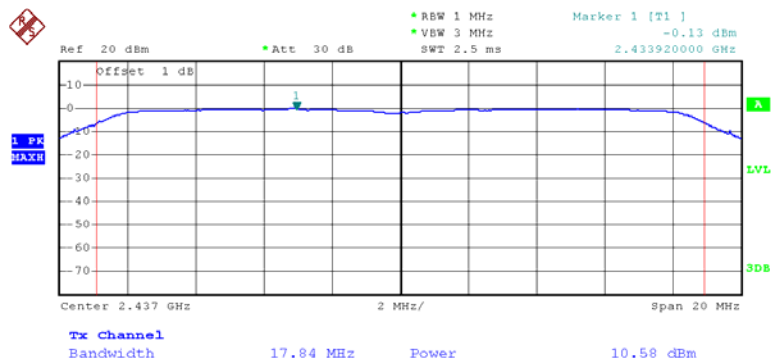

Date: 6.JAN.2013 13:46:39

802.11n20 RF Output Power, High Channel

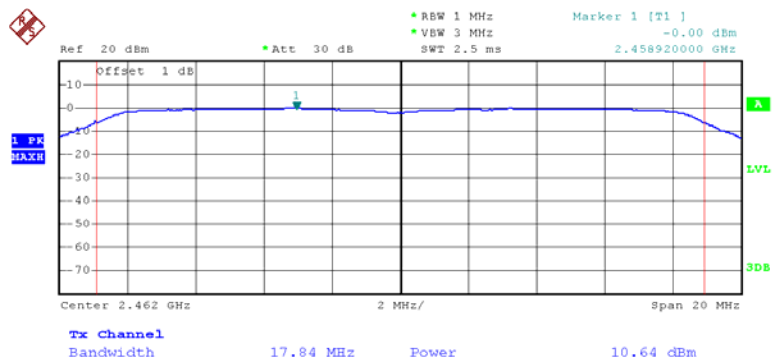

Date: 6.JAN.2013 13:54:41

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data


Environmental Conditions

Temperature:	19.8 °C
Relative Humidity:	42 %
ATM Pressure:	101.8kPa


The testing was performed by Leon Chen on 2013-01-06.

Test Result: Compliance


Please refer to following plots.

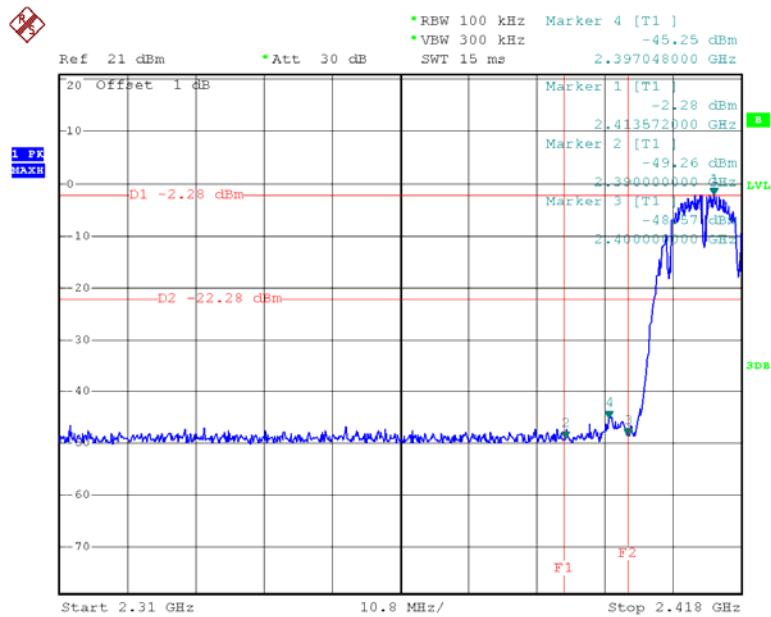802.11b: Band Edge, Left Side


Date: 6.JAN.2013 13:11:25

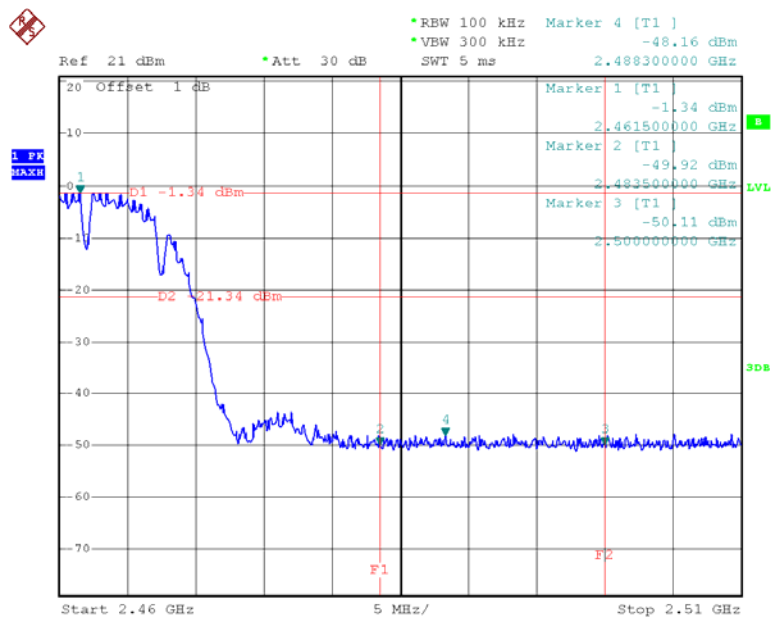802.11b: Band Edge, Right Side


Date: 6.JAN.2013 13:31:52

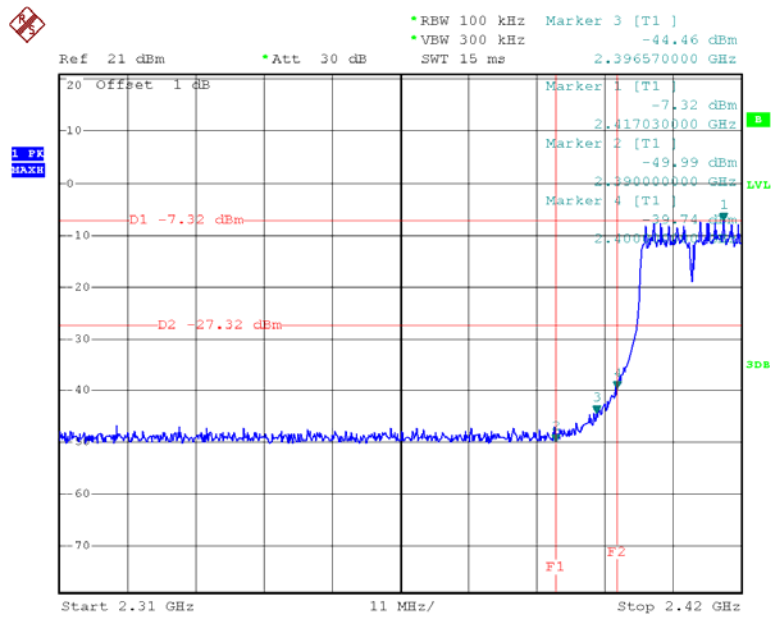802.11g: Band Edge, Left Side


Date: 6.JAN.2013 13:40:33

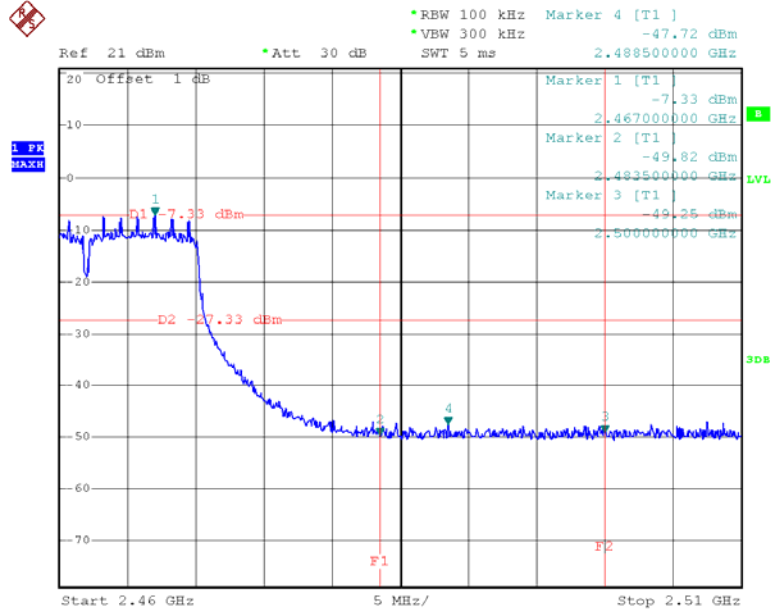802.11g: Band Edge, Right Side

Date: 6.JAN.2013 13:30:17

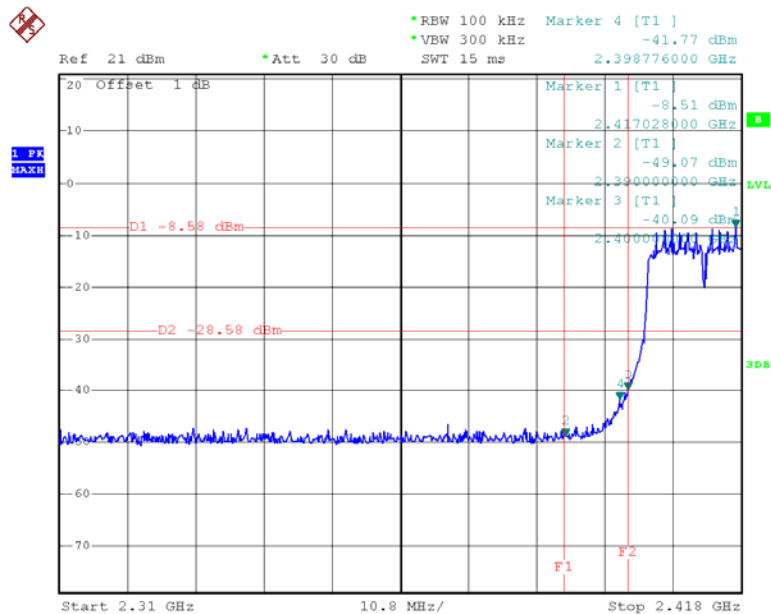802.11n20: Band Edge, Left Side

Date: 6.JAN.2013 13:53:16

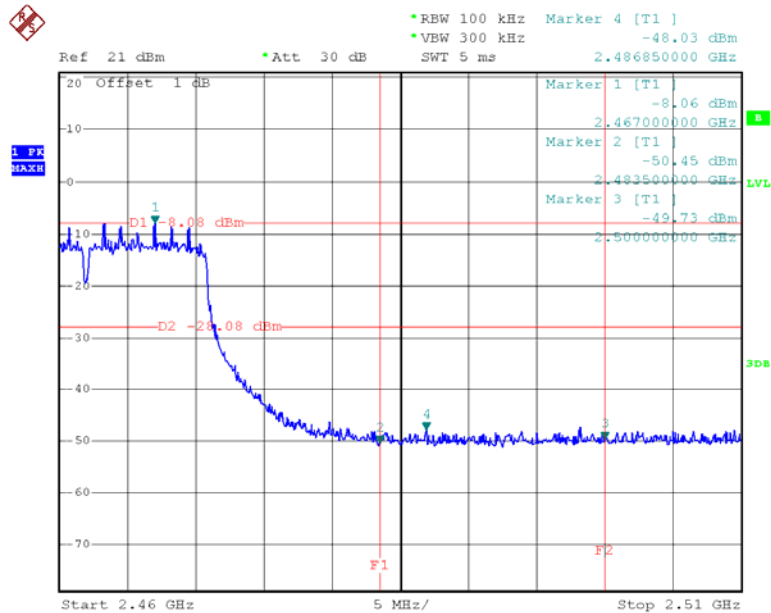802.11n20: Band Edge, Right Side

Date: 6.JAN.2013 13:57:54

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. According to KDB 558074 D01 DTS Meas Guidance v02, set the RBW = 3 kHz, VBW = 30 kHz, Set the span to 1.5 times the DTS channel bandwidth.
4. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	19.8 ° C
Relative Humidity:	42 %
ATM Pressure:	101.8kPa



The testing was performed by Leon Chen on 2013-01-06.

Test Mode: Transmitting


Test Result: Pass

Channel	PSD	Limit	Result
	(dBm/3kHz)	(dBm/3kHz)	
802.11b mode			
Low	-16.09	8	PASS
Middle	-15.97	8	PASS
High	-15.18	8	PASS
802.11g mode			
Low	-22.49	8	PASS
Middle	-22.57	8	PASS
High	-21.40	8	PASS
802.11n20 mode			
Low	-23.34	8	PASS
Middle	-22.69	8	PASS
High	-22.97	8	PASS


Please refer to the following plots

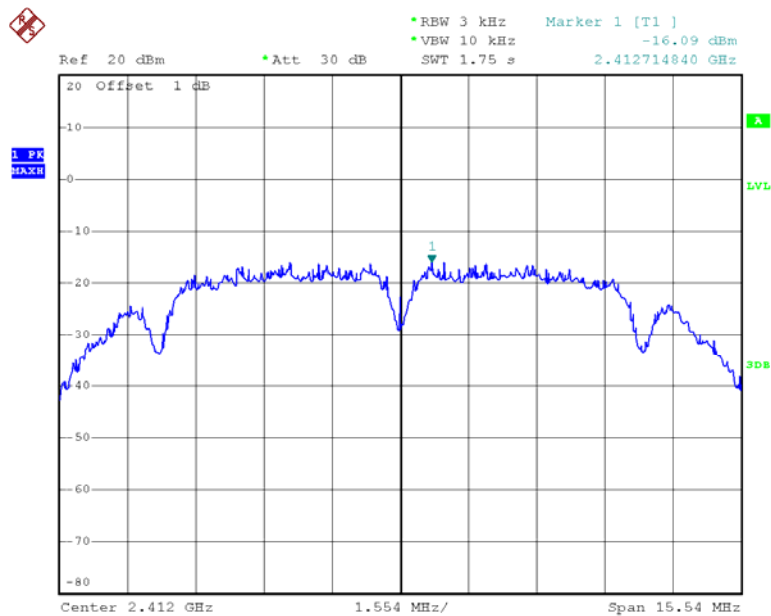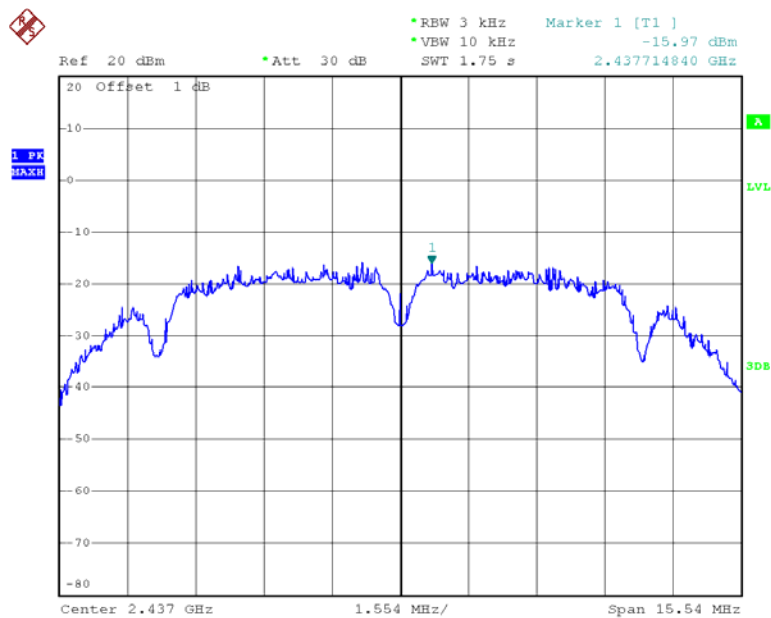Power Spectral Density, 802.11b Low Channel**Power Spectral Density, 802.11b Middle Channel**


Power Spectral Density, 802.11b High Channel

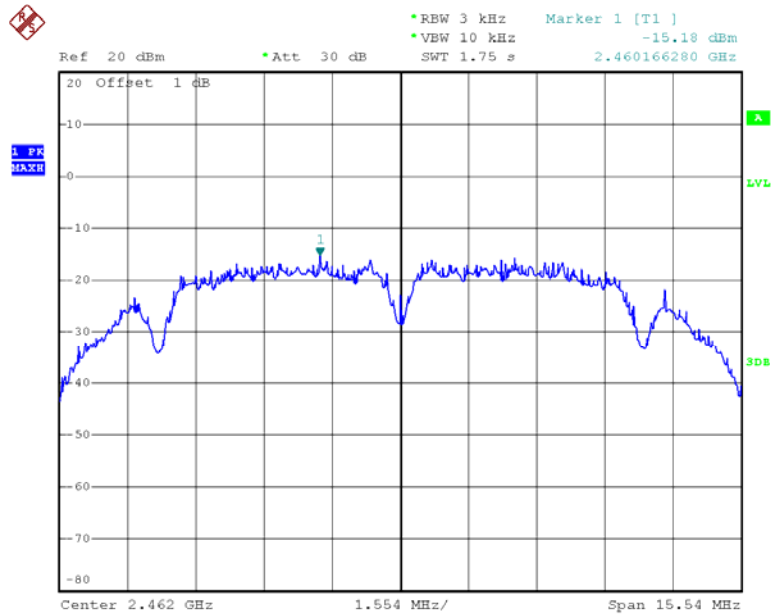


Power Spectral Density, 802.11g Low Channel

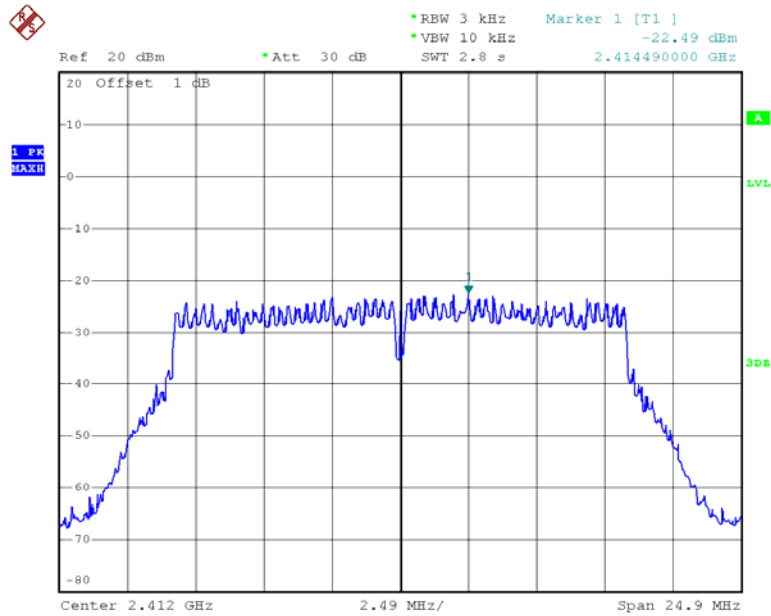


Power Spectral Density, 802.11g Middle Channel

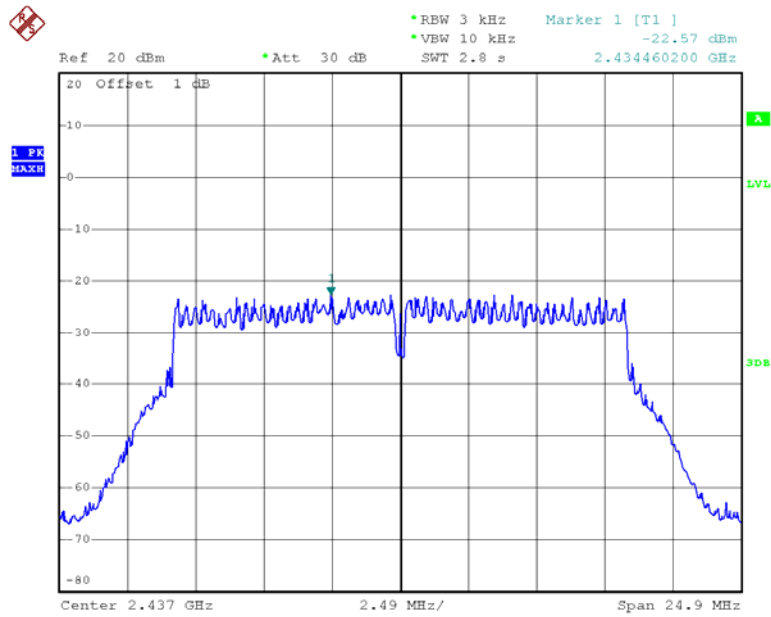


Power Spectral Density, 802.11g High Channel

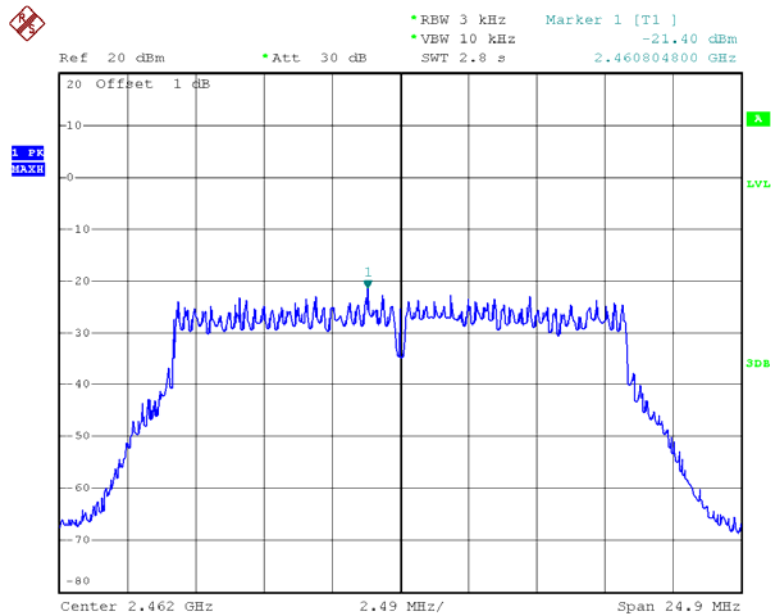


Power Spectral Density, 802.11n20 Low Channel

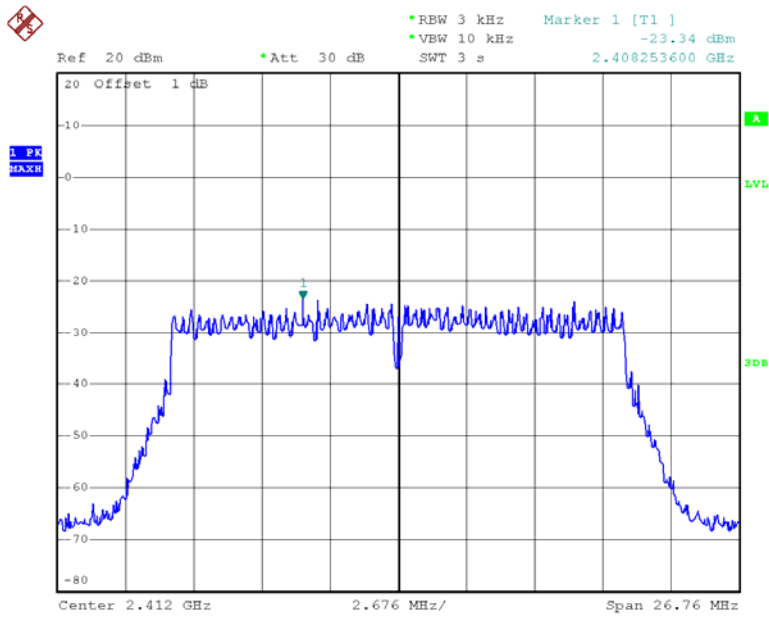

Power Spectral Density, 802.11n20 Middle Channel

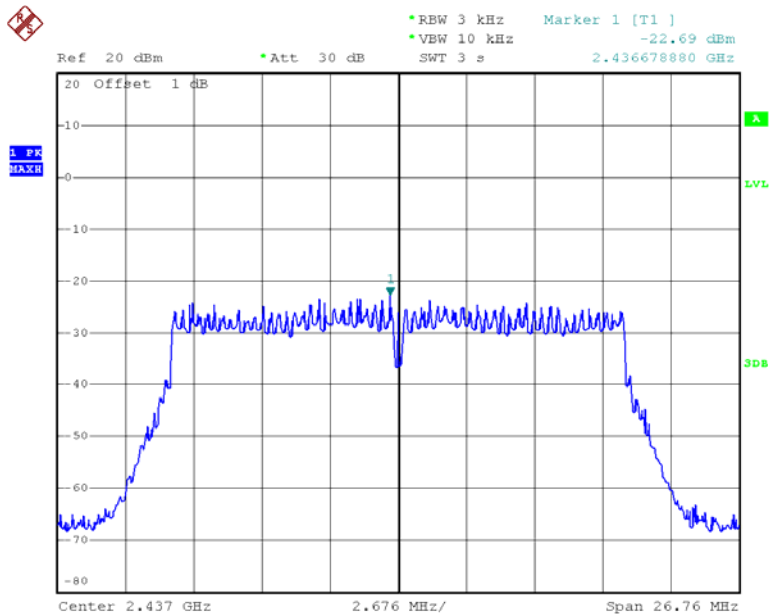

Power Spectral Density, 802.11n20 High Channel

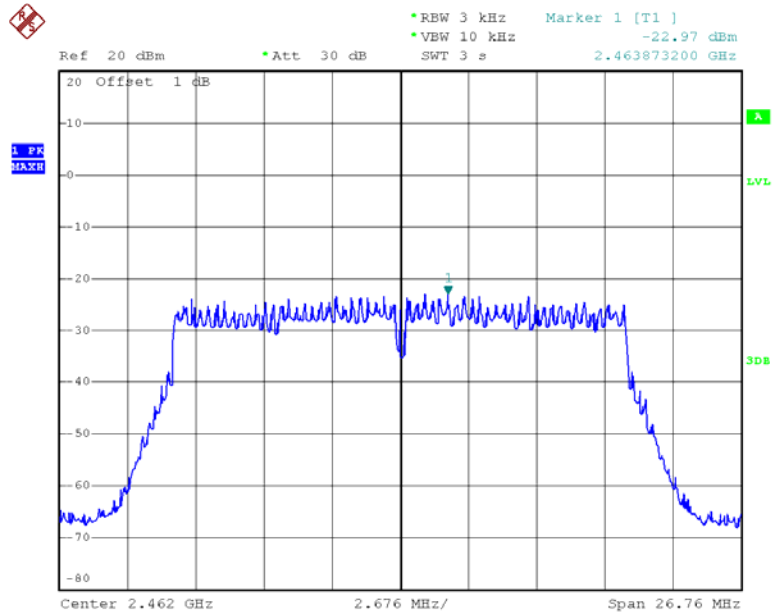

DECLARATION LETTER



LZeal Information Technology Co., Ltd.

Address: F18, Unit 2, 530 Building, No.100, Dicui Road, Liyuan Development Zone,
Wuxi City, Jiangsu Province, China

Tel: +86 510 81170199 Fax: +86 510 81170187

DECLARATION OF SIMILARITY

December 27, 2012

To:

Bay Area Compliance Laboratories Corp. (Dongguan)

No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Tel: +86 769 86858888 Fax: +86 769 86858891

<http://www.baclcorp.com>

Dear Sir or Madam:

We, LZeal Information Technology Co., Ltd., hereby declare that product: Wi-Fi SD Card, model(s): DS100 (DS100-4G, DS100-8G, DS100-16G, DS100-32G) are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. And they were tested by BACL, the results of which are featured in BACL project: R1SH121227050, R1SH121227051, R1SH121227053, R1SH121227054

The only difference is inside capacity of the TF card:

Model no. DS100-4G with 4G TF card (4G microSD card)

Model no. DS100-8G with 8G TF card (8G microSD card)

Model no. DS100-16G with 16G TF card (16G microSD card)

Model no. DS100-32G with 32G TF card (32G microSD card)

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature: *Wu, JunAn*

Typed or Printed Name: Wu. Junan

Title: HW Director

***** END OF REPORT *****