

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
AWOX

HDMI WI-FI Smart TV Stick
Model No.: ST-W

FCC ID: A7KST-W

Prepared for : AWOX
Address : 93 Place Pierre Duhem Montpellier 34000 France

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20130457
Date of Test : March 21- April 15, 2013
Date of Report : April 15, 2013

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels.....	6
1.3. Test Procedure	6
1.4. Special Accessory and Auxiliary Equipment	6
1.5. Description of Test Facility	7
1.6. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode.....	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 6DB BANDWIDTH MEASUREMENT.....	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(2).....	11
5.3. EUT Configuration on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Test Result	12
6. MAXIMUM PEAK OUTPUT POWER	26
6.1. Block Diagram of Test Setup.....	26
6.2. The Requirement For Section 15.247(b)(3).....	26
6.3. EUT Configuration on Measurement	26
6.4. Operating Condition of EUT	26
6.5. Test Procedure	27
6.6. Test Result	28
7. POWER SPECTRAL DENSITY MEASUREMENT.....	42
7.1. Block Diagram of Test Setup.....	42
7.2. The Requirement For Section 15.247(e).....	42
7.3. EUT Configuration on Measurement	42
7.4. Operating Condition of EUT	42
7.5. Test Procedure	43
7.6. Test Result	44
8. BAND EDGE COMPLIANCE TEST	58
8.1. Block Diagram of Test Setup.....	58
8.2. The Requirement For Section 15.247(d)	58
8.3. EUT Configuration on Measurement	58
8.4. Operating Condition of EUT	59
8.5. Test Procedure	59
8.6. Test Result	60
9. RADIATED SPURIOUS EMISSION TEST	93
9.1. Block Diagram of Test Setup.....	93
9.2. The Limit For Section 15.247(d)	94
9.3. Restricted bands of operation	94

- 9.4. Configuration of EUT on Measurement95
- 9.5. Operating Condition of EUT95
- 9.6. Test Procedure95
- 9.7. The Field Strength of Radiation Emission Measurement Results96
- 10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST 180**
 - 10.1. Block Diagram of Test Setup..... 180
 - 10.2. The Requirement For Section 15.247(d) 180
 - 10.3. EUT Configuration on Measurement 180
 - 10.4. Operating Condition of EUT 181
 - 10.5. Test Procedure 181
 - 10.6. Test Result 181
- 11. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) 194**
 - 11.1. Block Diagram of Test Setup..... 194
 - 11.2. The Emission Limit 194
 - 11.3. Configuration of EUT on Measurement 195
 - 11.4. Operating Condition of EUT 195
 - 11.5. Test Procedure 195
 - 11.6. Power Line Conducted Emission Measurement Results 196
- 12. ANTENNA REQUIREMENT..... 199**
 - 12.1. The Requirement 199
 - 12.2. Antenna Construction 199

Test Report Certification

Applicant : AWOX
Manufacturer : NEWMI TECH.(HK)CO., LTD.
EUT Description : HDMI WI-FI Smart TV Stick
(A) MODEL NO.: ST-W
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 5V (Power by Adapter)

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2009**

The EUT was tested according to 558074 D01 DTS Meas Guidance v03r01

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : March 21- April 15, 2013

Prepared by : Apple Lv
(Engineer)

Approved & Authorized Signer : Heunb
(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	HDMI WI-FI Smart TV Stick
Model Number	:	ST-W
Frequency Range	:	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	:	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Antenna Gain	:	2dBi
Power Supply	:	DC 5V (Power by Adapter)
Adapter	:	Model number: ECF0500100U1BU Input: AC 100-240V; 50/60Hz 0.15A Output: DC 5V/1.0A
Data Rate	:	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Applicant	:	AWOX
Address	:	93 Place Pierre Duhem Montpellier 34000 France
Manufacturer	:	NEWMI TECH.(HK)CO., LTD.
Address	:	908-B, Xin Neng Yuan Building, Nan Hai Rd., Nanshan District, Shenzhen, China 518054
Date of sample received	:	March 21, 2013
Date of Test	:	March 21- April 15, 2013

1.2. Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

1.3. Test Procedure

The EUT was tested according to 558074 D01 DTS Meas Guidance v03r01

1.4. Special Accessory and Auxiliary Equipment

LED TV

Manufacturer: DELL

M/N: ST2310f

S/N: CN-05MKKK-72872-053-05MS

1.5. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.6. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 12, 2013	Jan. 11, 2014
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 12, 2013	Jan. 11, 2014
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 12, 2013	Jan. 11, 2014
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 12, 2013	Jan. 11, 2014
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Feb. 6, 2013	Feb. 5, 2014
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Feb. 6, 2013	Feb. 5, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Feb. 6, 2013	Feb. 5, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Feb. 6, 2013	Feb. 5, 2014
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 12, 2013	Jan. 11, 2014
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 12, 2013	Jan. 11, 2014
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 12, 2013	Jan. 11, 2014
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 12, 2013	Jan. 11, 2014

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode

The mode is used: **1.802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

2.802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

3.802.11n (20MHz) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz


4.802.11n (40MHz) Transmitting mode

Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

3.2. Configuration and peripherals

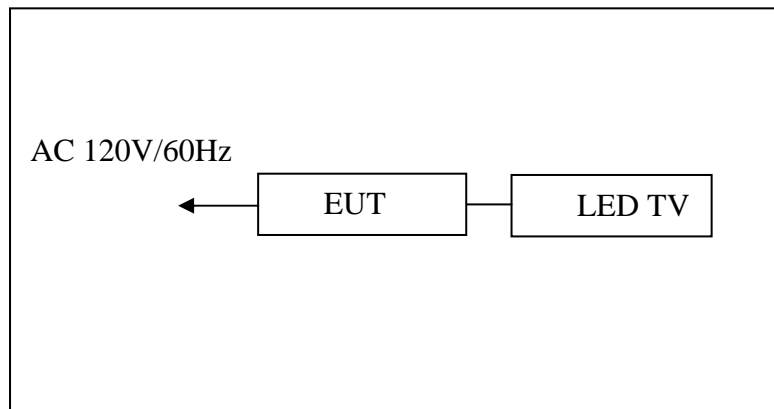


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup

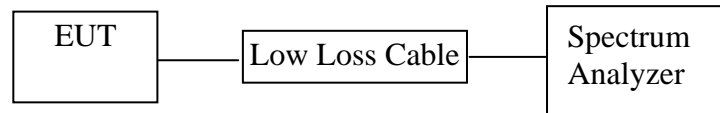

(EUT: HDMI WI-FI Smart TV Stick)

5.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. HDMI WI-FI Smart TV Stick (EUT)

Model Number : ST-W
 Serial Number : N/A
 Manufacturer : NEWMI TECH.(HK)CO., LTD.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

5.5. Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6. Test Result

PASS.

Date of Test:	<u>April 10, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	10.12	> 0.5MHz
Middle	2437	10.12	> 0.5MHz
High	2462	10.12	> 0.5MHz

The test was performed with 802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.40	> 0.5MHz
Middle	2437	16.40	> 0.5MHz
High	2462	16.40	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 20 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	17.60	> 0.5MHz
Middle	2437	17.60	> 0.5MHz
High	2462	17.60	> 0.5MHz

The test was performed with 802.11n (Bandwidth: 40 MHz)			
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2422	35.28	> 0.5MHz
Middle	2437	35.36	> 0.5MHz
High	2452	35.28	> 0.5MHz


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

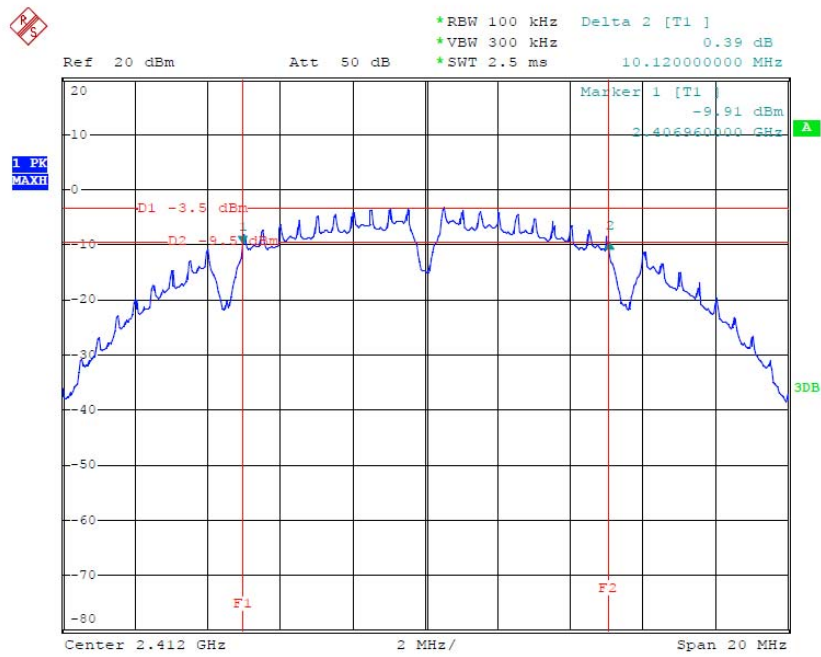


Date: 10.APR.2013 09:56:32

802.11b Channel Middle 2437MHz

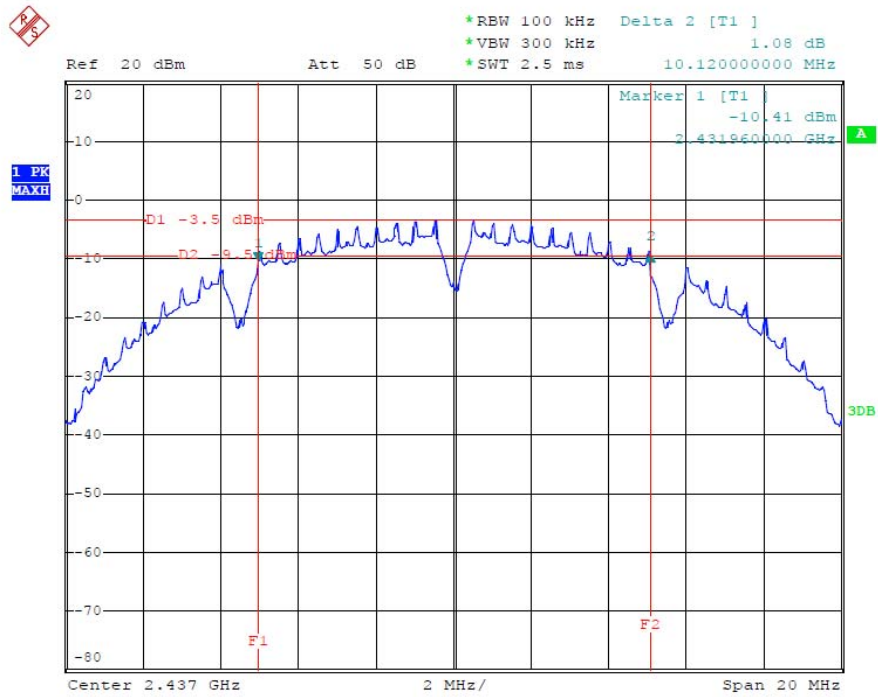


Date: 10.APR.2013 09:58:04

802.11b Channel High 2462MHz

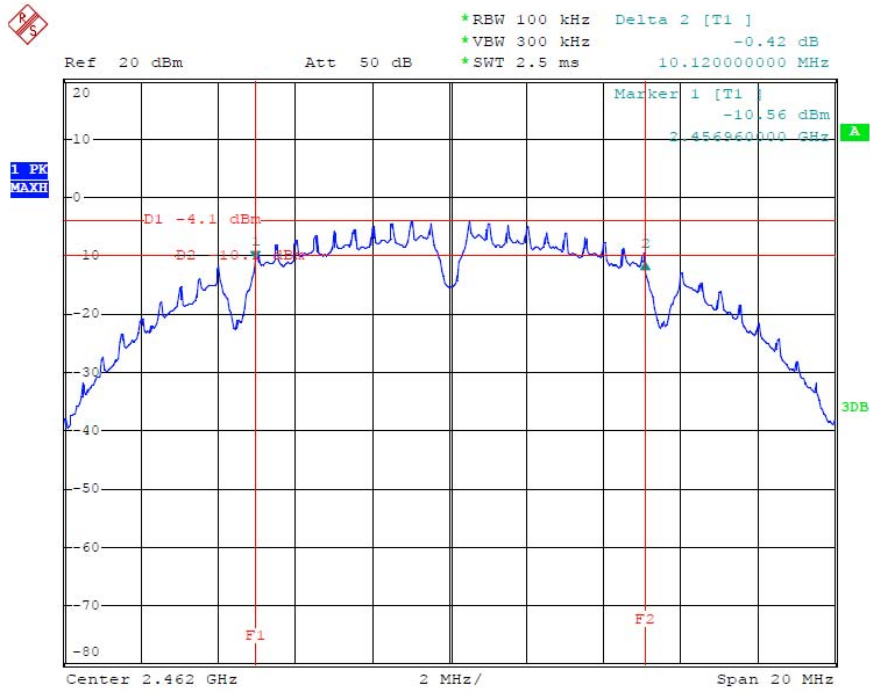


Date: 10.APR.2013 09:59:28

802.11g Channel Low 2412MHz

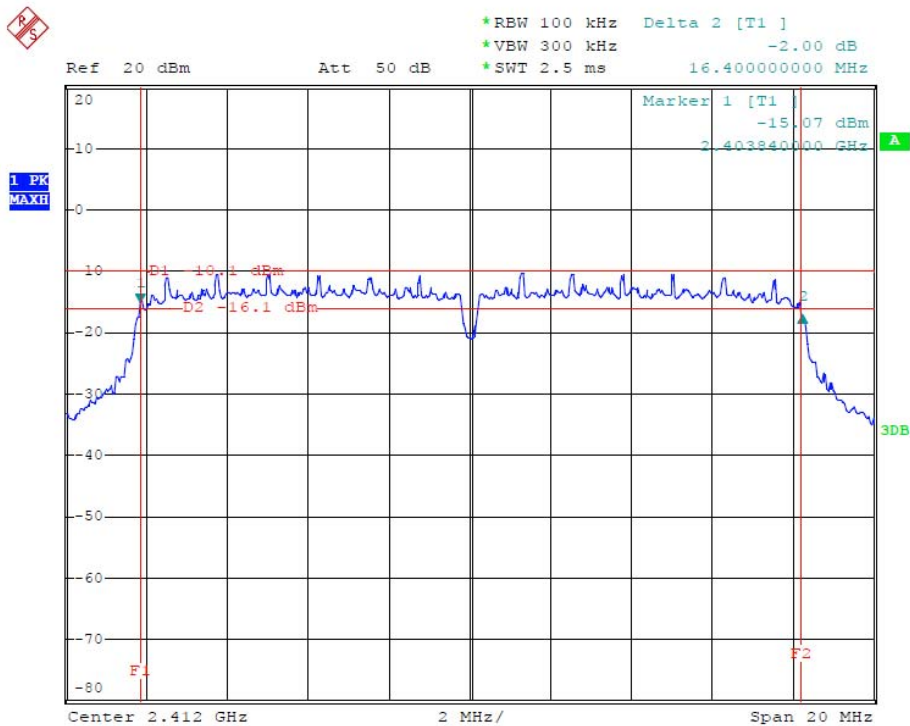


Date: 10.APR.2013 10:11:15

802.11g Channel Middle 2437MHz

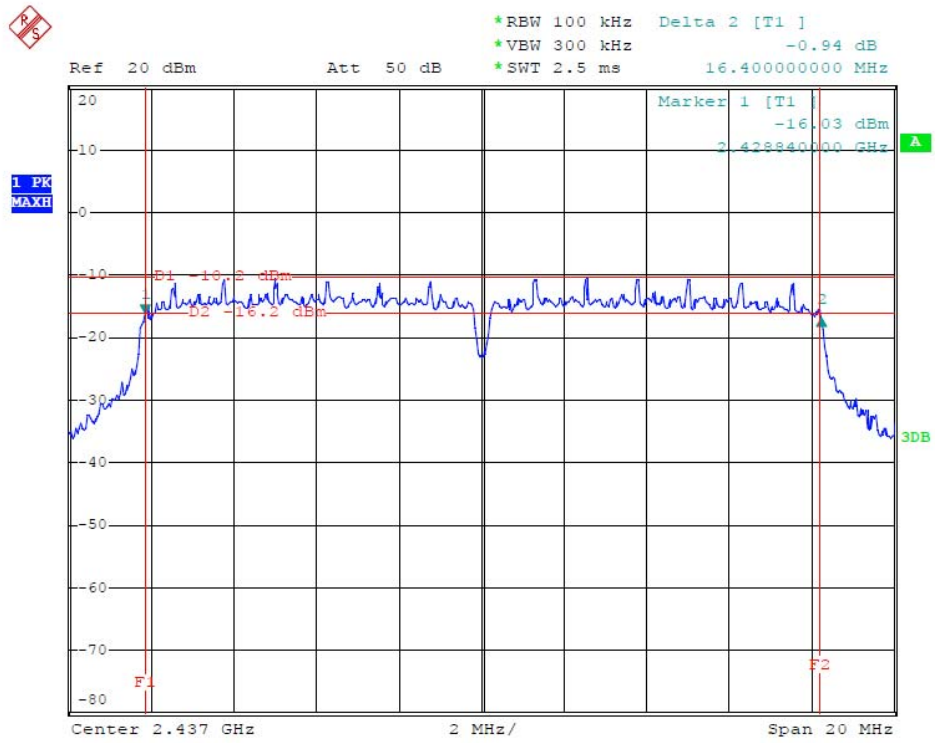


Date: 10.APR.2013 10:13:15

802.11g Channel High 2462MHz

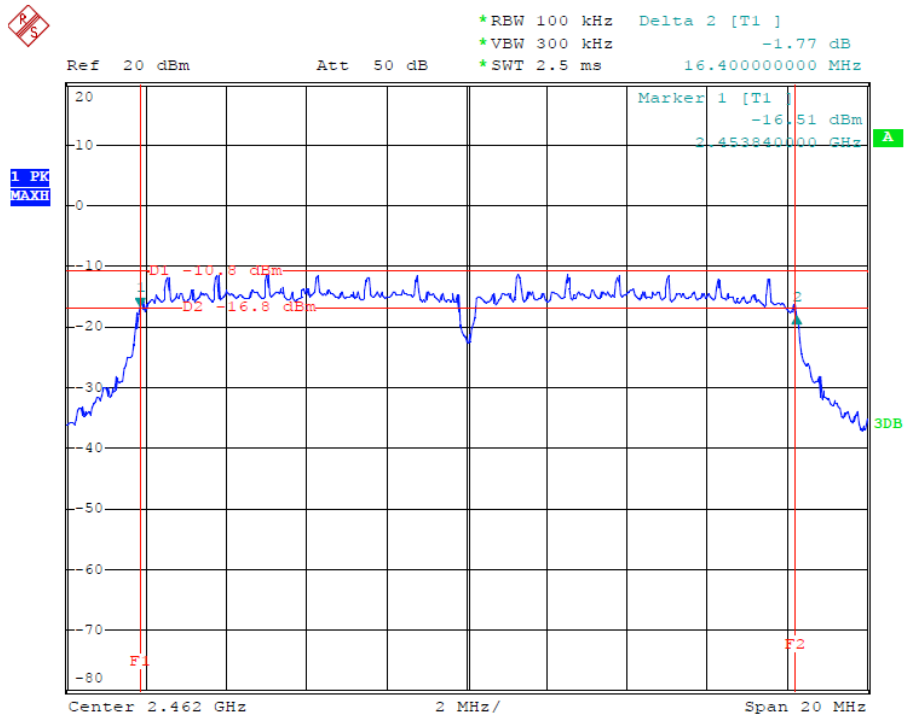


Date: 10.APR.2013 10:14:27

802.11n Channel Low 2412MHz (20MHz)

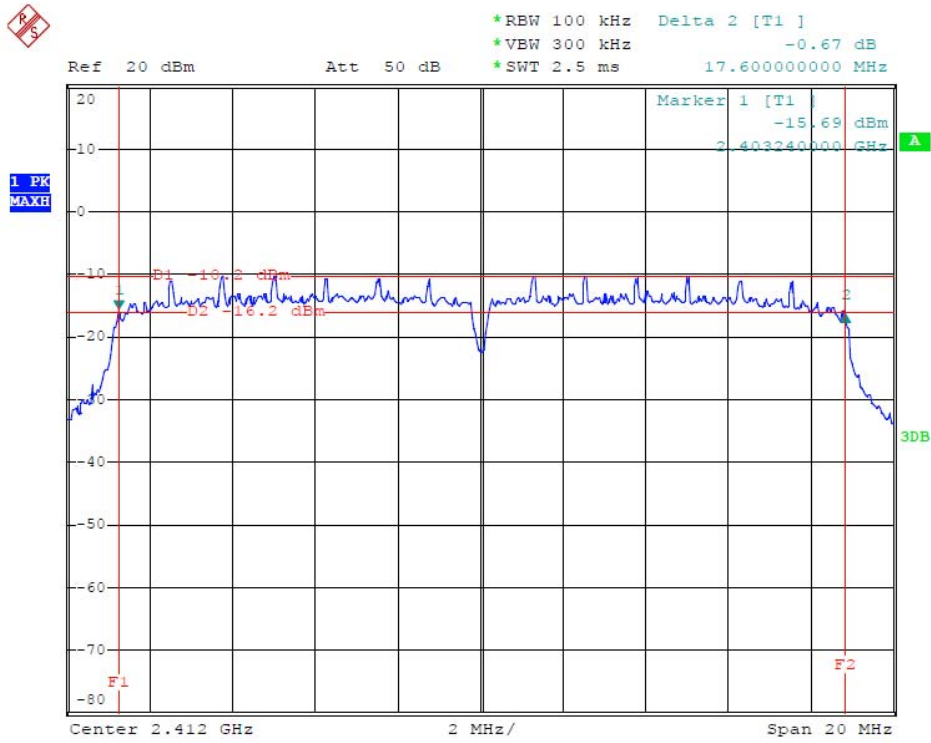


Date: 10.APR.2013 11:01:04

802.11n Channel Middle 2437MHz(20MHz)

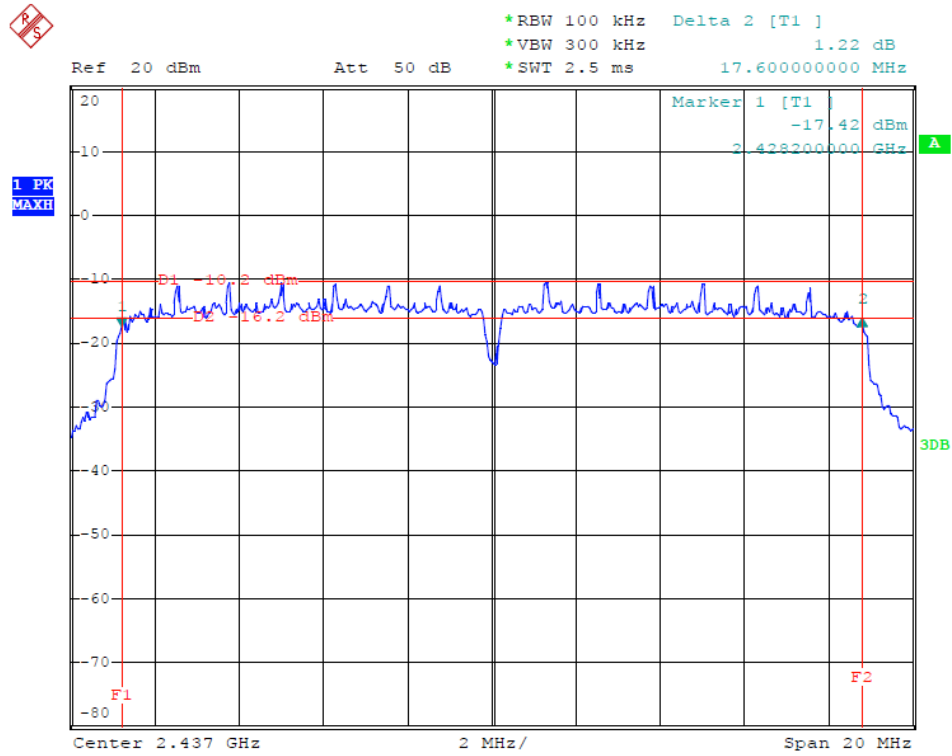


Date: 10.APR.2013 11:02:12

802.11n Channel High 2462MHz(20MHz)

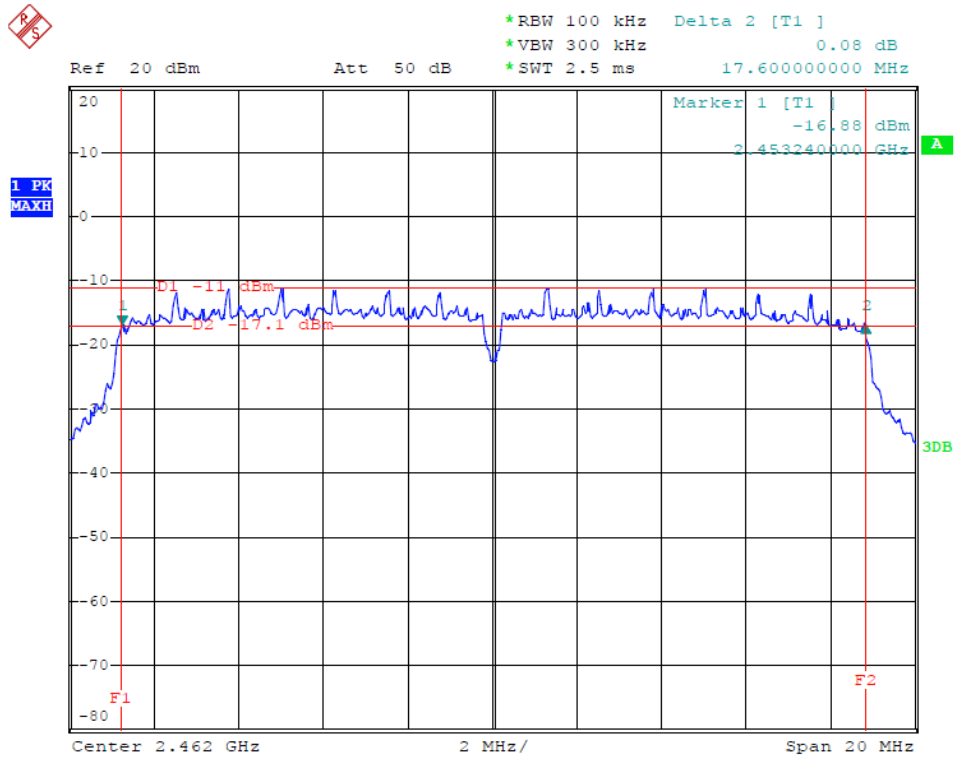


Date: 10.APR.2013 11:03:25

802.11n Channel Low 2422MHz (40MHz)

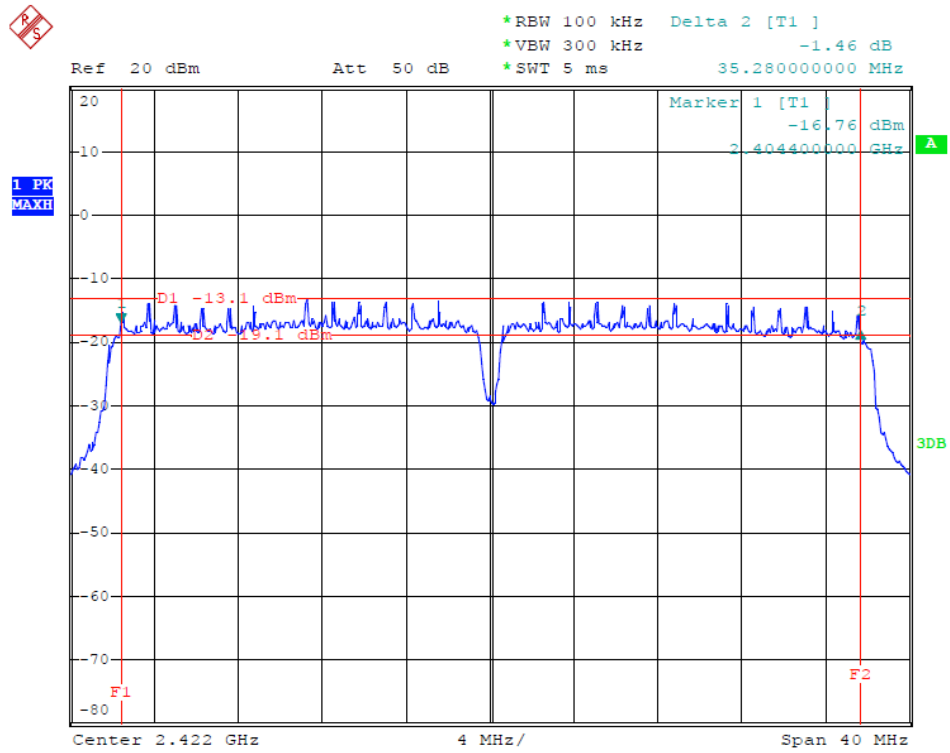


Date: 10.APR.2013 11:13:20

802.11n Channel Middle 2437MHz(40MHz)

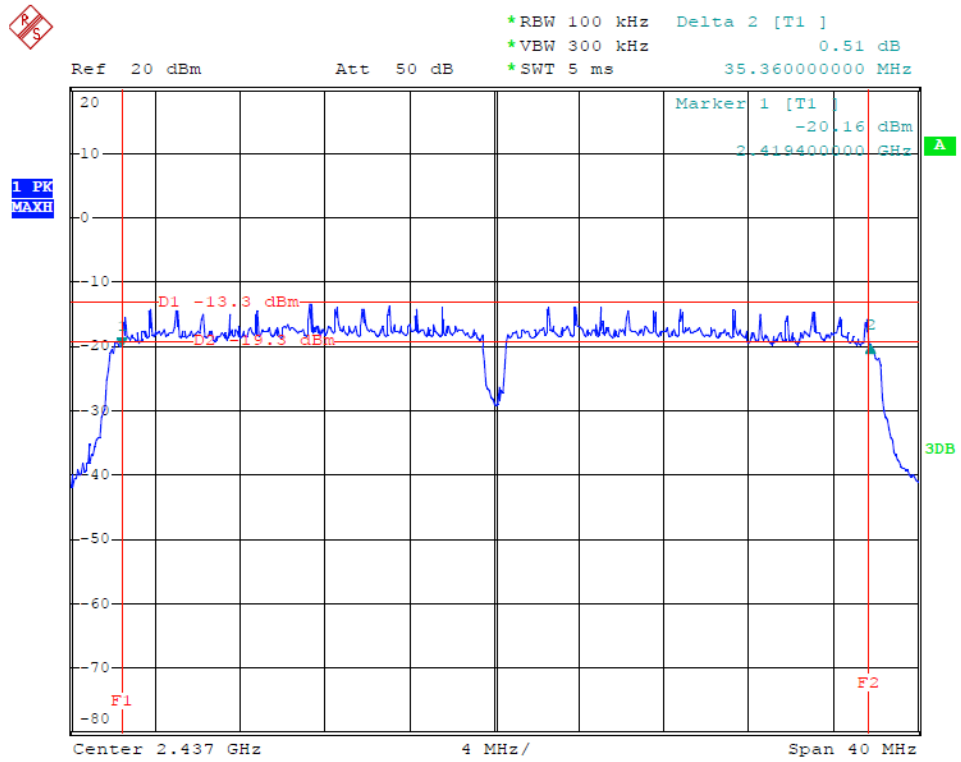

Date: 10.APR.2013 11:14:30

802.11n Channel High 2452MHz(40MHz)

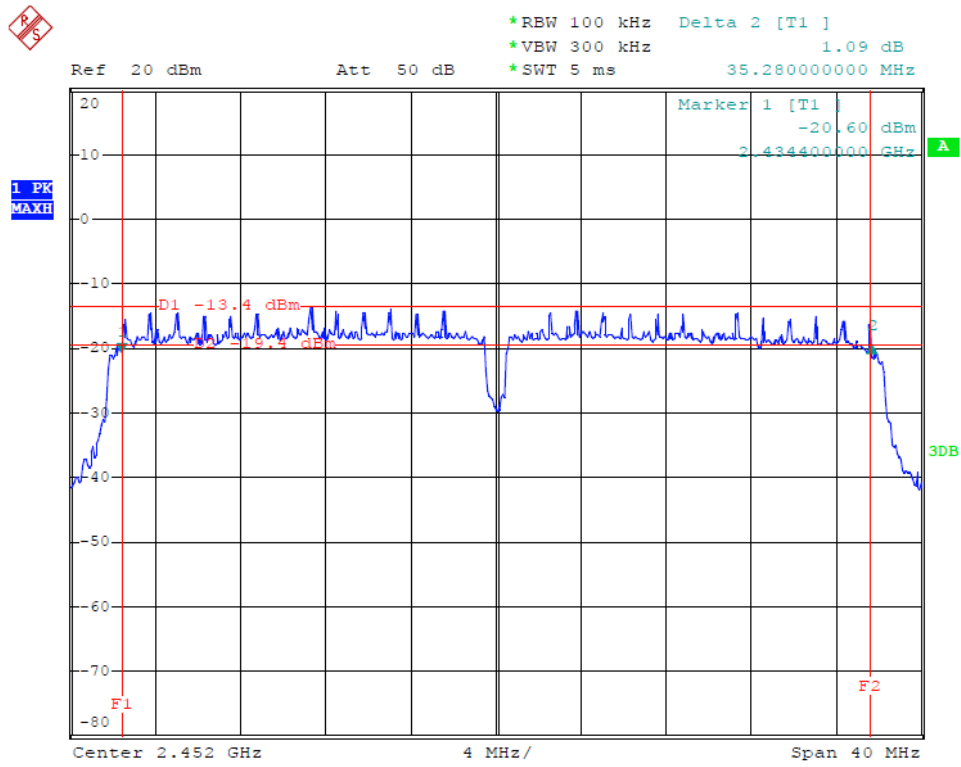

Date: 10.APR.2013 11:15:56

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



(EUT: HDMI WI-FI Smart TV Stick)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. HDMI WI-FI Smart TV Stick (EUT)

Model Number : ST-W
 Serial Number : N/A
 Manufacturer : NEWMI TECH.(HK)CO., LTD.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The EUT was tested according to Section 9.1.2 of the 558074 D01 DTS Meas Guidance v03r01

6.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.3. a) Set the RBW = 1 MHz.

b) Set the VBW \geq 3 RBW

c) Set the span \geq 1.5 x DTS bandwidth.

d) Detector = peak.

e) Sweep time = auto couple.

f) Trace mode = max hold.

g) Allow trace to fully stabilize.

h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

6.5.4. Measurement the maximum peak output power.

6.6. Test Result

PASS.

Date of Test:	<u>April 10, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	8.80	7.59	30 dBm / 1 W
Middle	2437	8.44	6.98	30 dBm / 1 W
High	2462	7.72	5.92	30 dBm / 1 W


The test was performed with 802.11g				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.54	8.99	30 dBm / 1 W
Middle	2437	9.16	8.29	30 dBm / 1 W
High	2462	8.53	7.13	30 dBm / 1 W

The test was performed with 802.11n (20MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	9.50	8.91	30 dBm / 1 W
Middle	2437	9.18	8.28	30 dBm / 1 W
High	2462	8.81	7.60	30 dBm / 1 W

The test was performed with 802.11n (40MHz)				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2422	9.07	8.07	30 dBm / 1 W
Middle	2437	8.76	7.52	30 dBm / 1 W
High	2452	8.37	6.87	30 dBm / 1 W


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

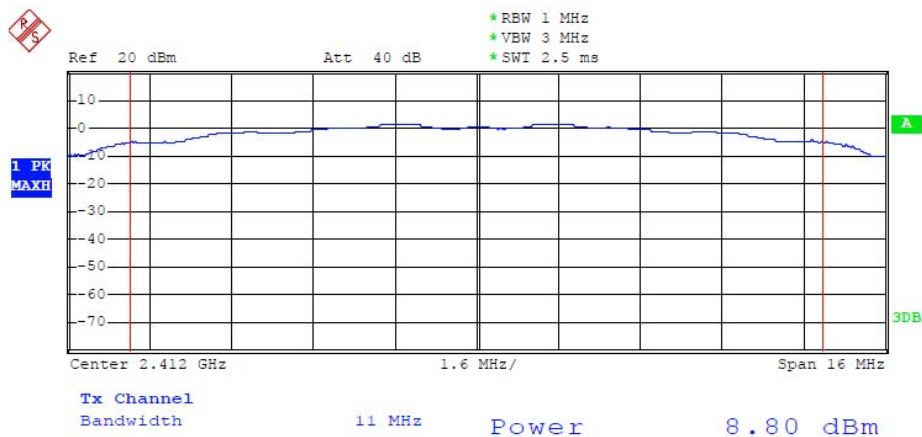


Date: 10.APR.2013 10:01:15

802.11b Channel Middle 2437MHz

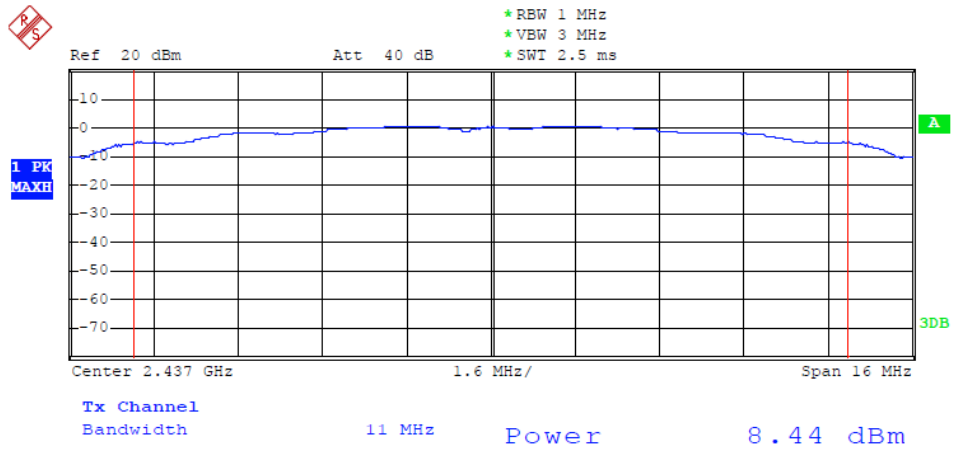


Date: 10.APR.2013 10:00:50

802.11b Channel High 2462MHz

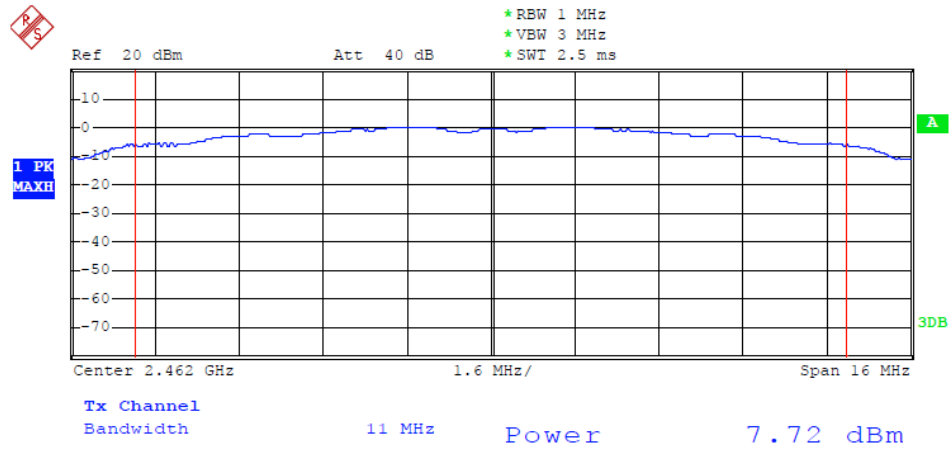


Date: 10.APR.2013 10:00:25

802.11g Channel Low 2412MHz

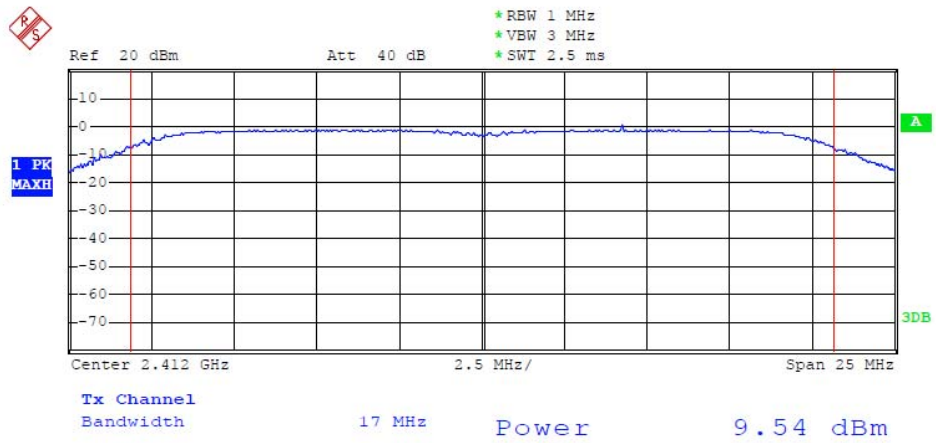


Date: 10.APR.2013 10:16:53

802.11g Channel Middle 2437MHz

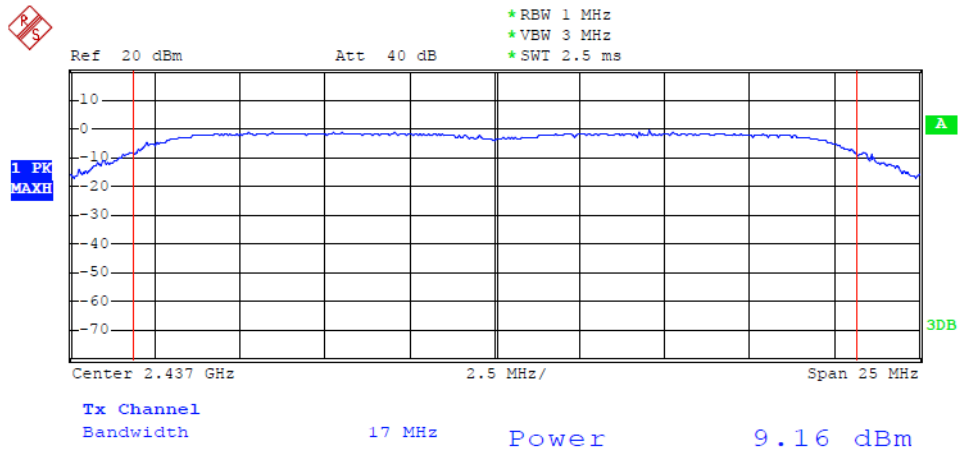


Date: 10.APR.2013 10:16:09

802.11g Channel High 2462MHz

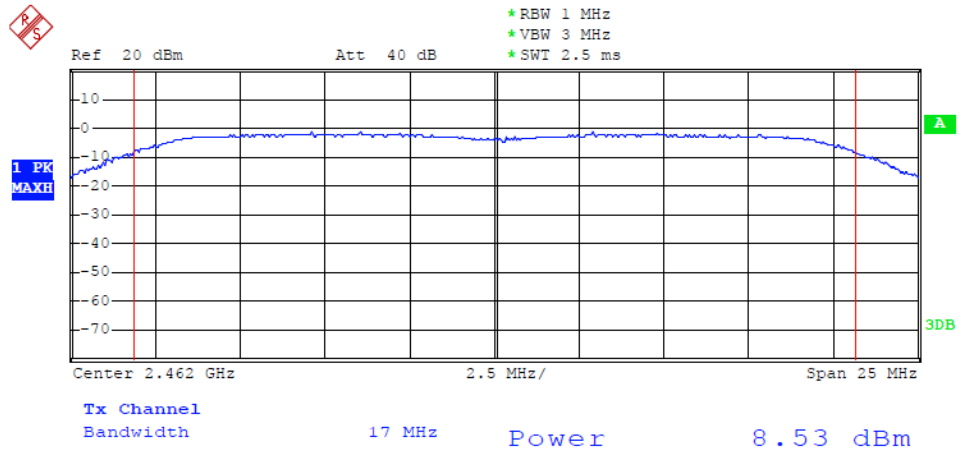


Date: 10.APR.2013 10:15:38

802.11n Channel Low 2412MHz (20MHz)

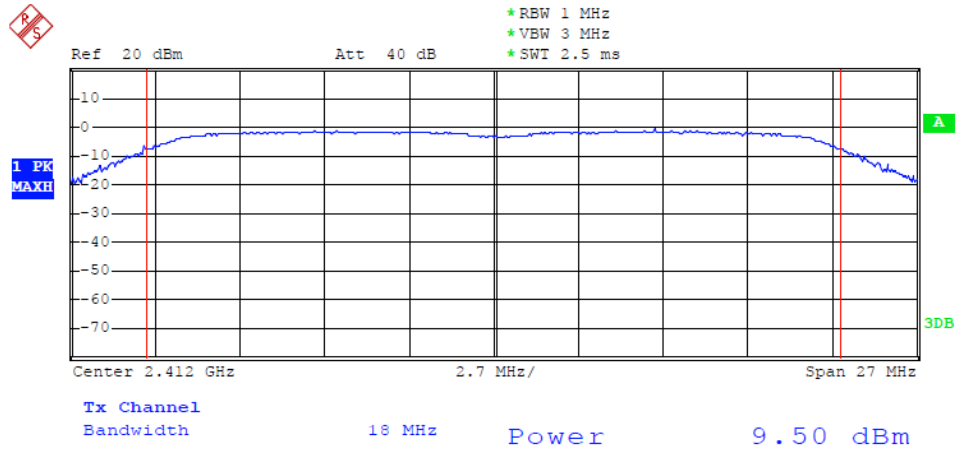


Date: 10.APR.2013 11:06:33

802.11n Channel Middle 2437MHz (20MHz)

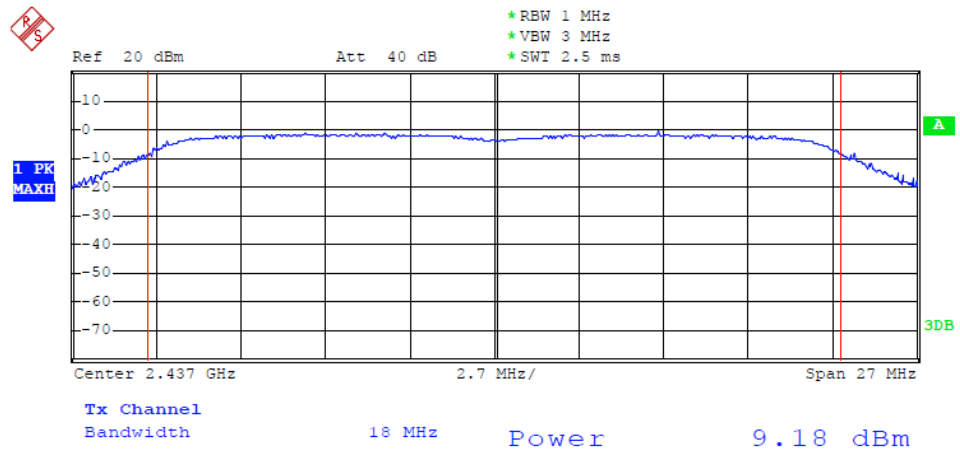


Date: 10.APR.2013 11:05:53

802.11n Channel High 2462MHz (20MHz)

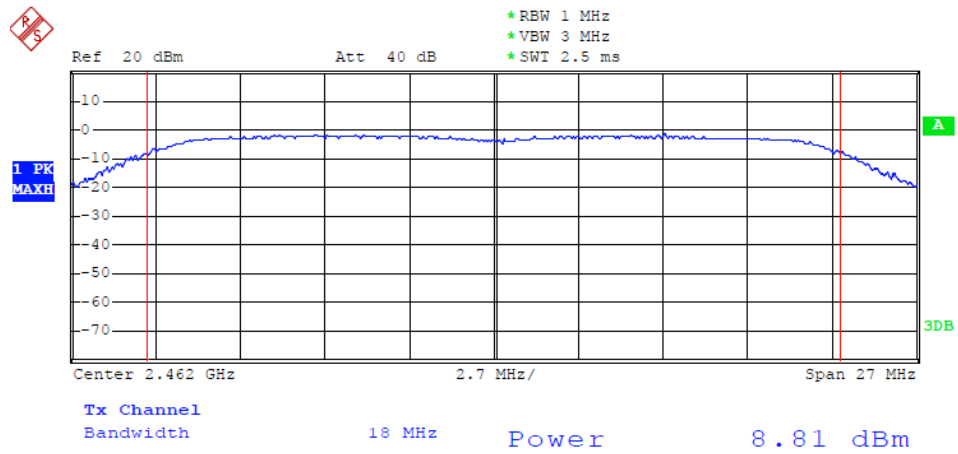


Date: 10.APR.2013 11:05:17

802.11n Channel Low 2422MHz (40MHz)

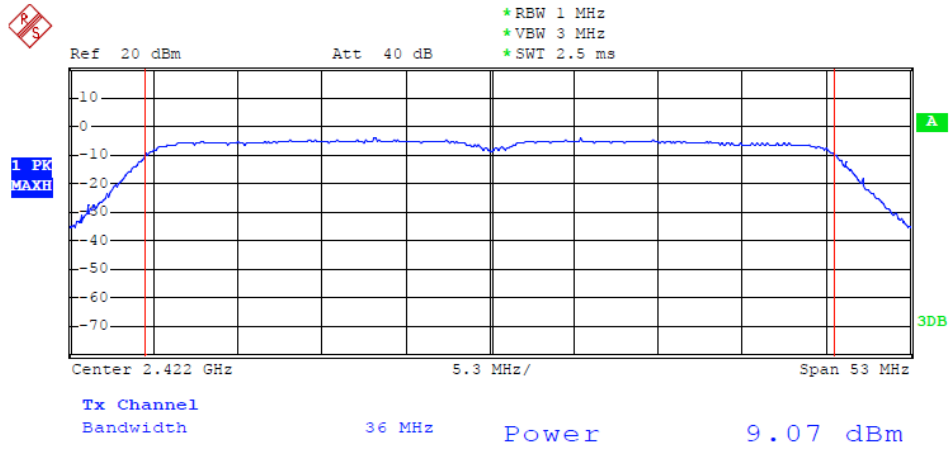


Date: 10.APR.2013 11:18:13

802.11n Channel Middle 2437MHz (40MHz)

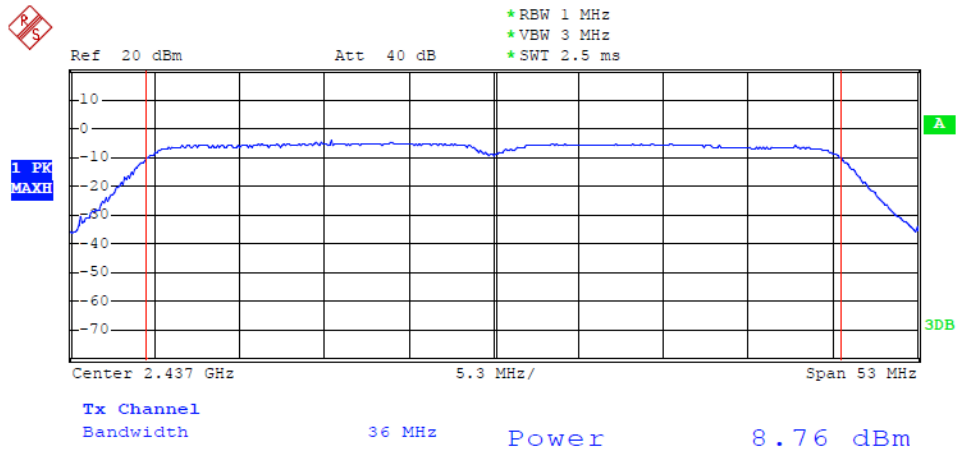

Date: 10.APR.2013 11:17:29

802.11n Channel High 2452MHz (40MHz)

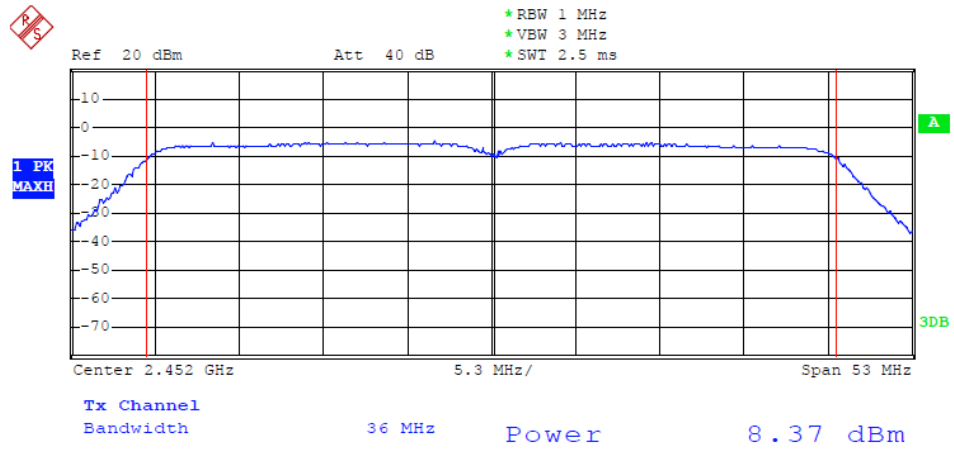

Date: 10.APR.2013 11:16:53

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: HDMI WI-FI Smart TV Stick)

7.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. HDMI WI-FI Smart TV Stick (EUT)

Model Number : ST-W
 Serial Number : N/A
 Manufacturer : NEWMI TECH.(HK)CO., LTD.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The EUT was tested according to Section 10.2 of the 558074 D01 DTS Meas Guidance v03r01.

7.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.3. Measurement Procedure PKPSD (peak PSD):

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.5.4. Measurement the maximum power spectral density.

7.6. Test Result

PASS.

Date of Test:	<u>April 10, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-17.98	8 dBm
Middle	2437	-18.97	8 dBm
High	2462	-18.64	8 dBm

The test was performed with 802.11g

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-25.22	8 dBm
Middle	2437	-24.30	8 dBm
High	2462	-24.63	8 dBm

The test was performed with 802.11n (20MHz)


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-23.84	8 dBm
Middle	2437	-24.79	8 dBm
High	2462	-25.42	8 dBm

The test was performed with 802.11n (40MHz)

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2422	-28.36	8 dBm
Middle	2437	-27.20	8 dBm
High	2452	-28.69	8 dBm


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

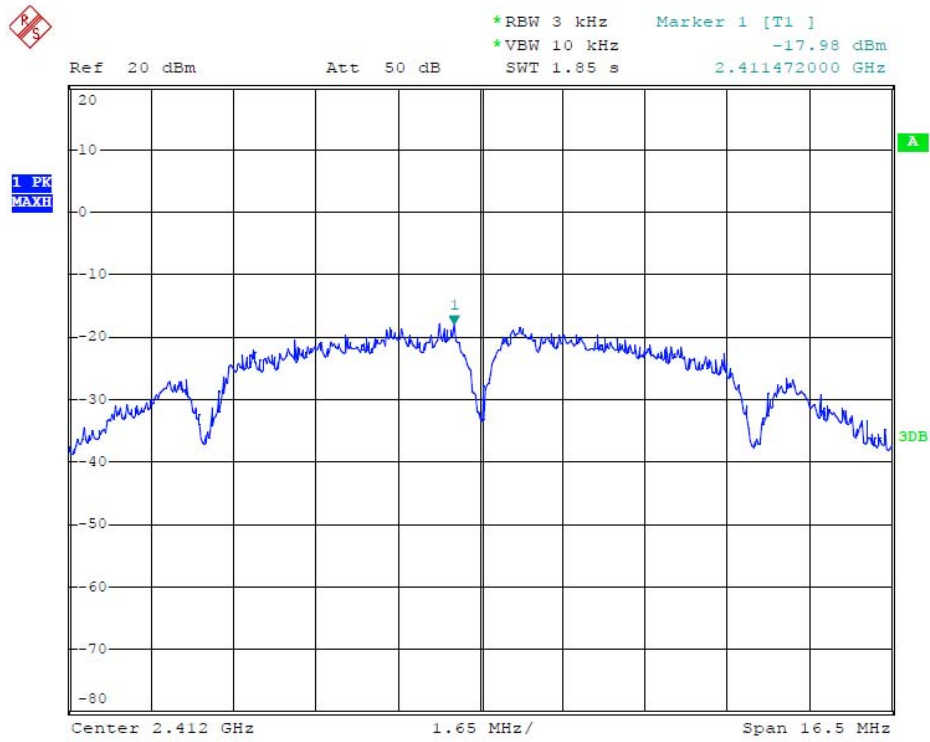


Date: 10.APR.2013 10:02:10

802.11b Channel Middle 2437MHz

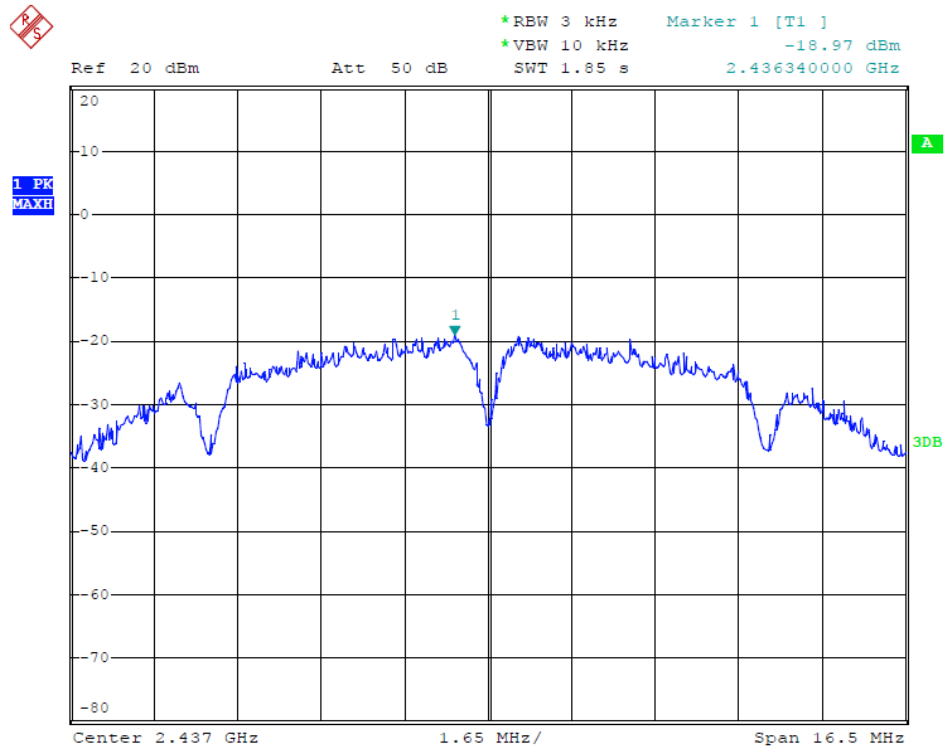


Date: 10.APR.2013 10:02:52

802.11b Channel High 2462MHz

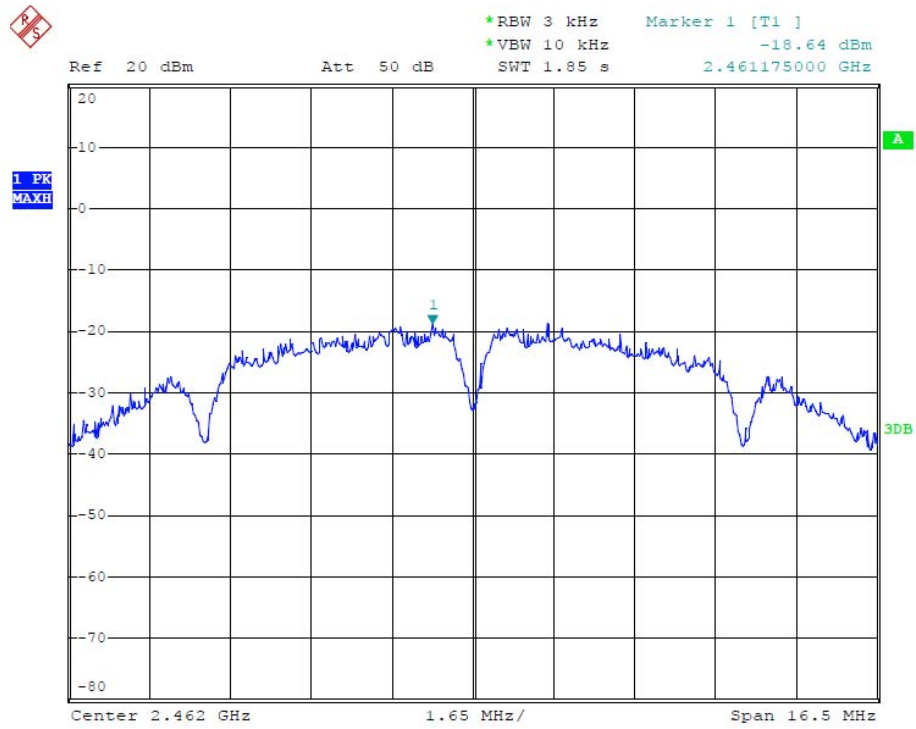


Date: 10.APR.2013 10:03:34

802.11g Channel Low 2412MHz

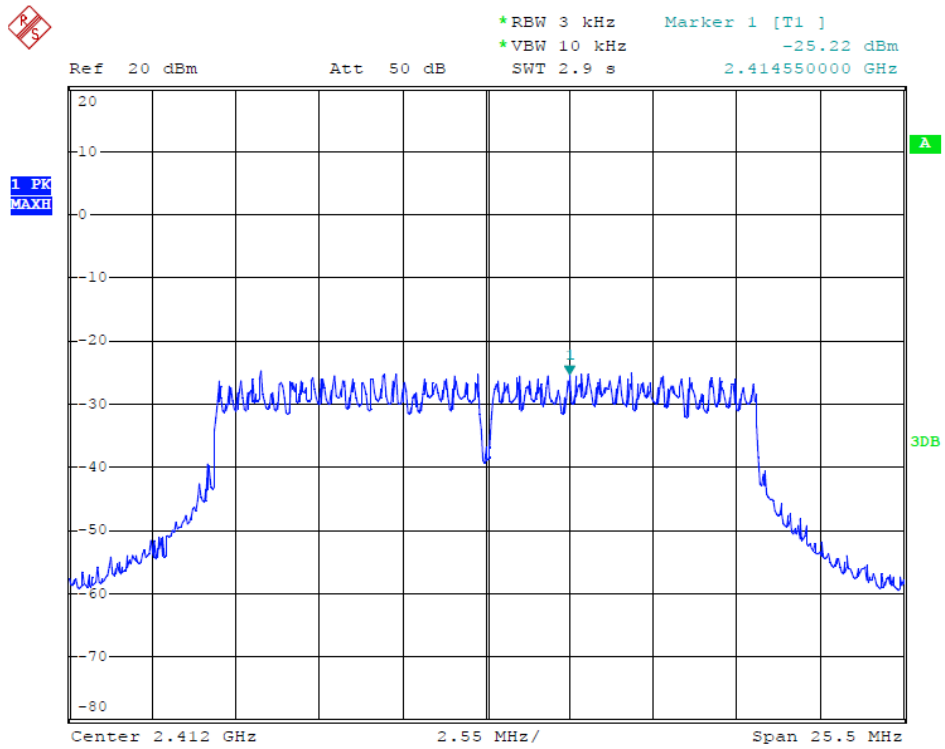


Date: 10.APR.2013 10:18:14

802.11g Channel Middle 2437MHz

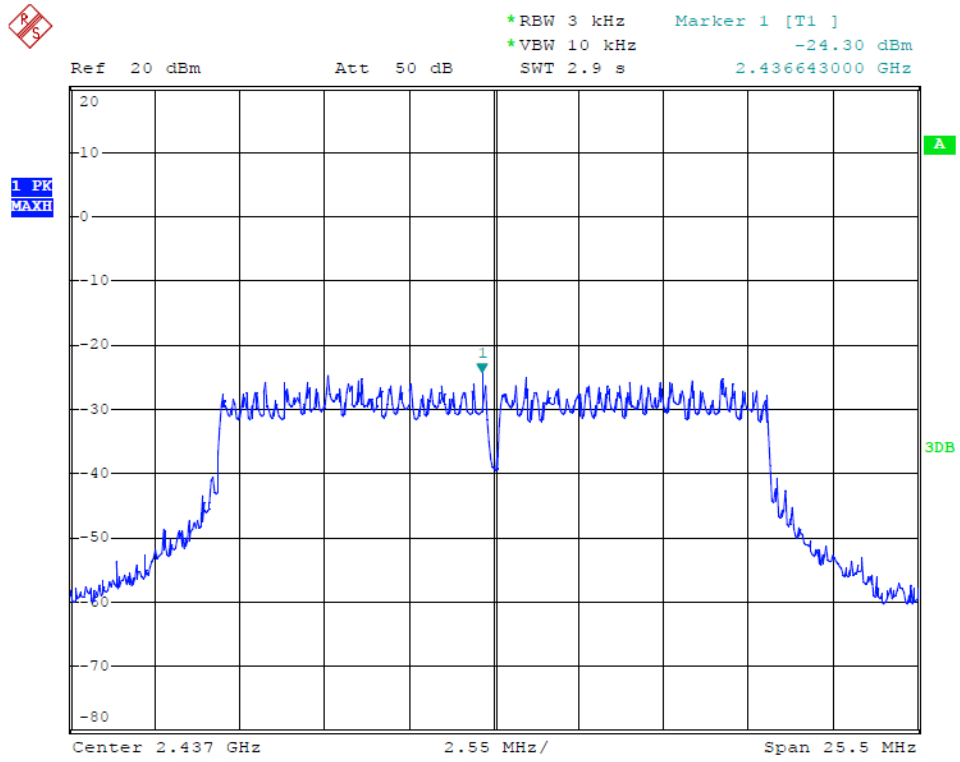


Date: 10.APR.2013 10:18:53

802.11g Channel High 2462MHz

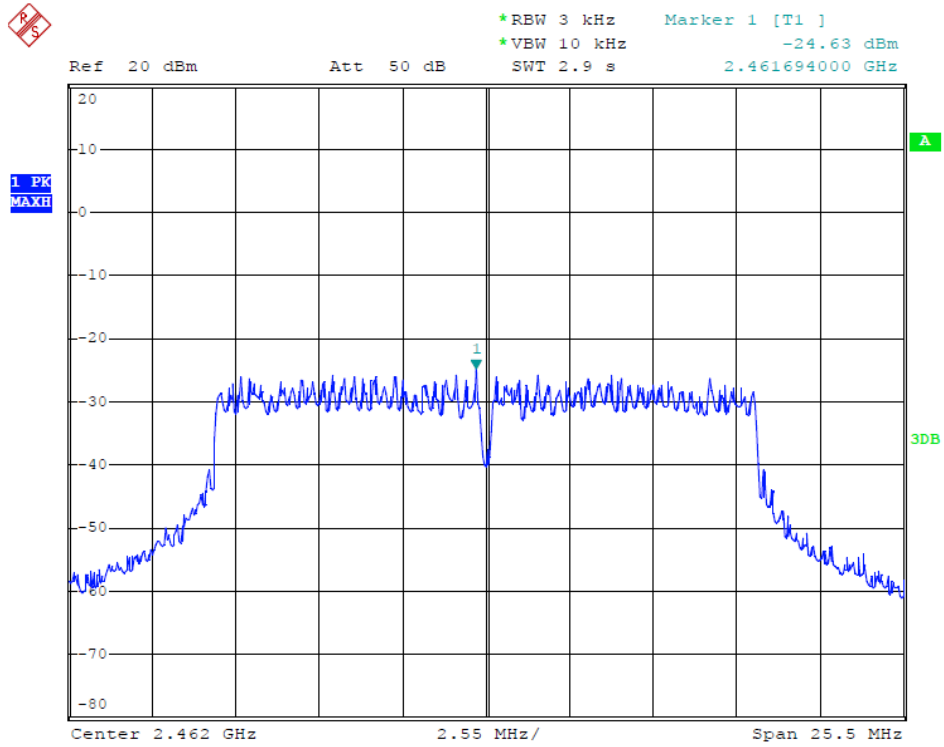


Date: 10.APR.2013 10:19:31

802.11n Channel Low 2412MHz (20MHz)

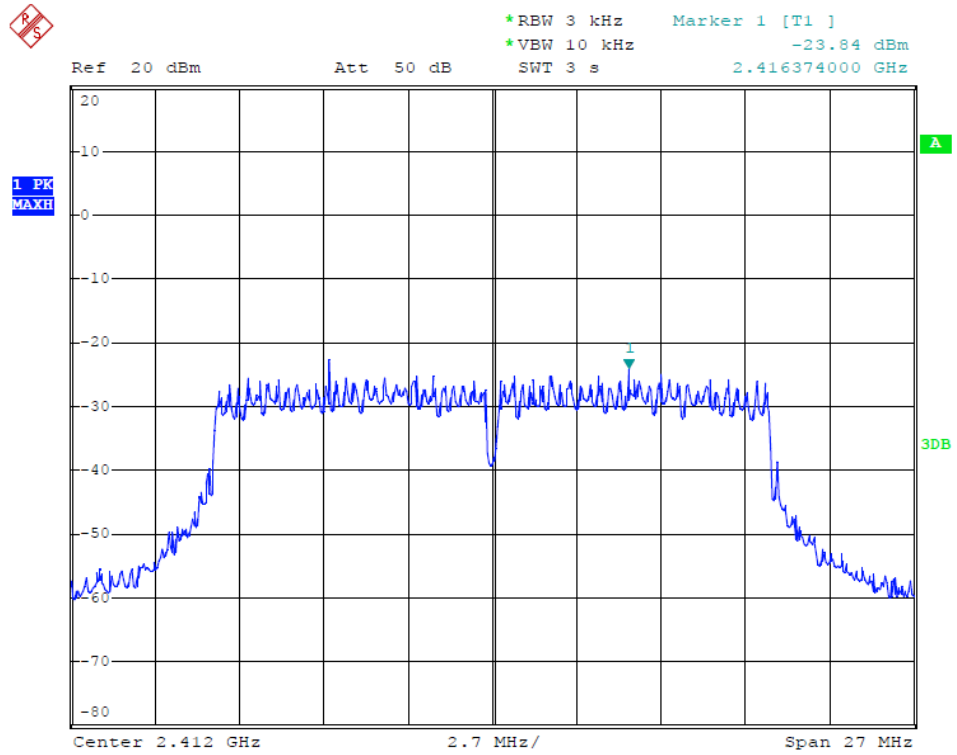


Date: 10.APR.2013 11:07:41

802.11n Channel Middle 2437MHz (20MHz)

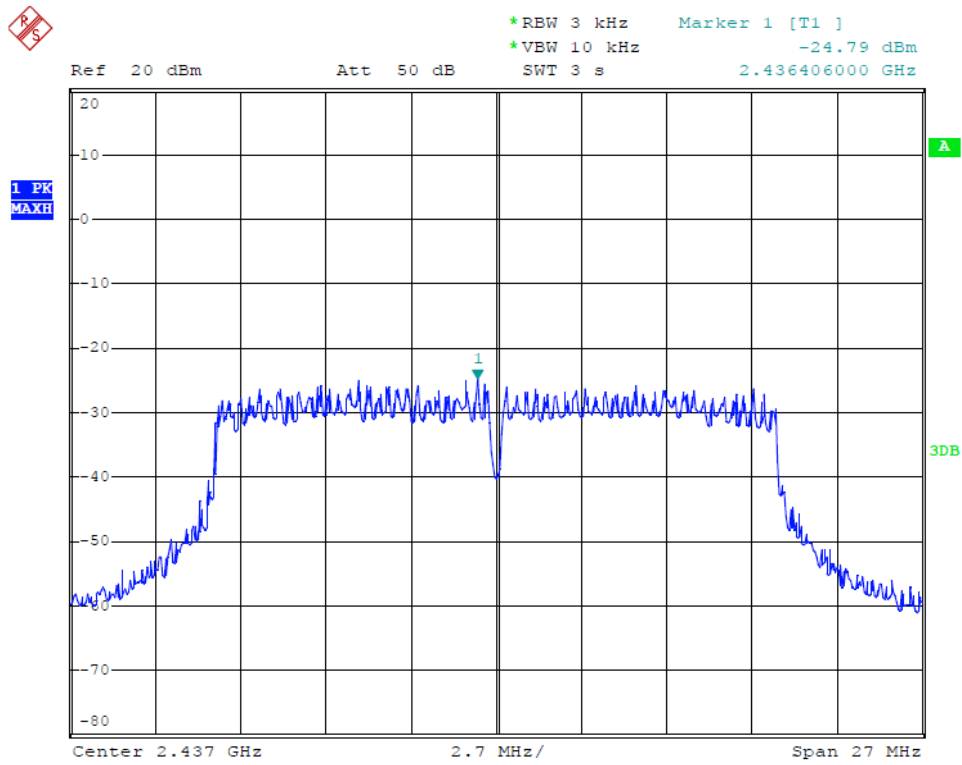


Date: 10.APR.2013 11:08:34

802.11n Channel Low 2422MHz (40MHz)

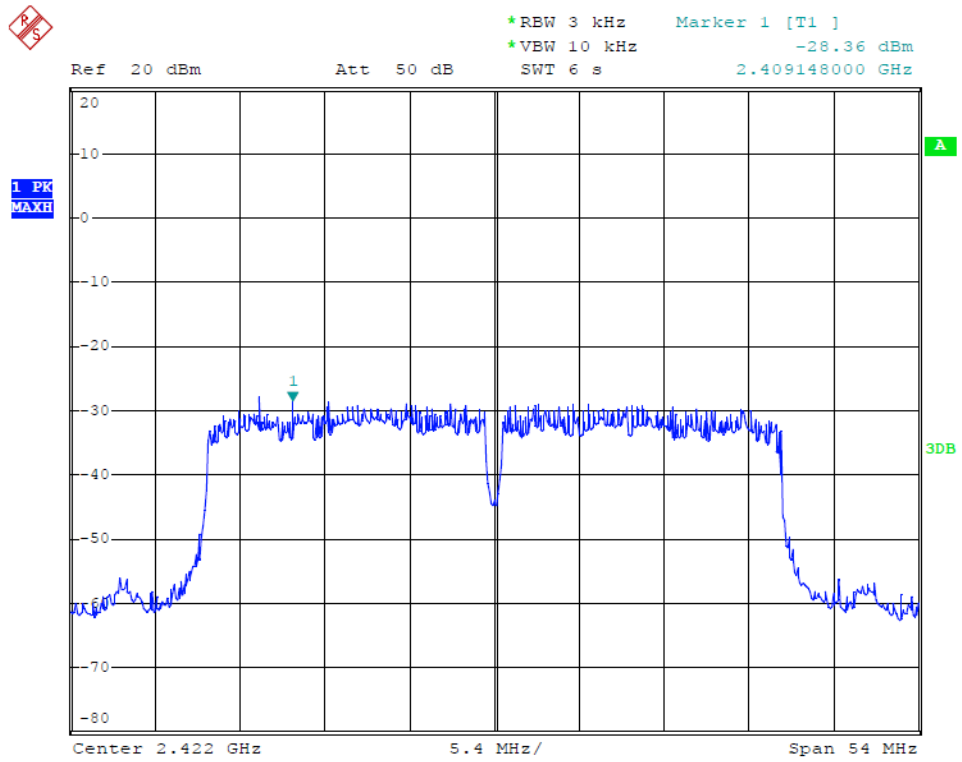


Date: 10.APR.2013 11:19:27

802.11n Channel Middle 2437MHz(40MHz)

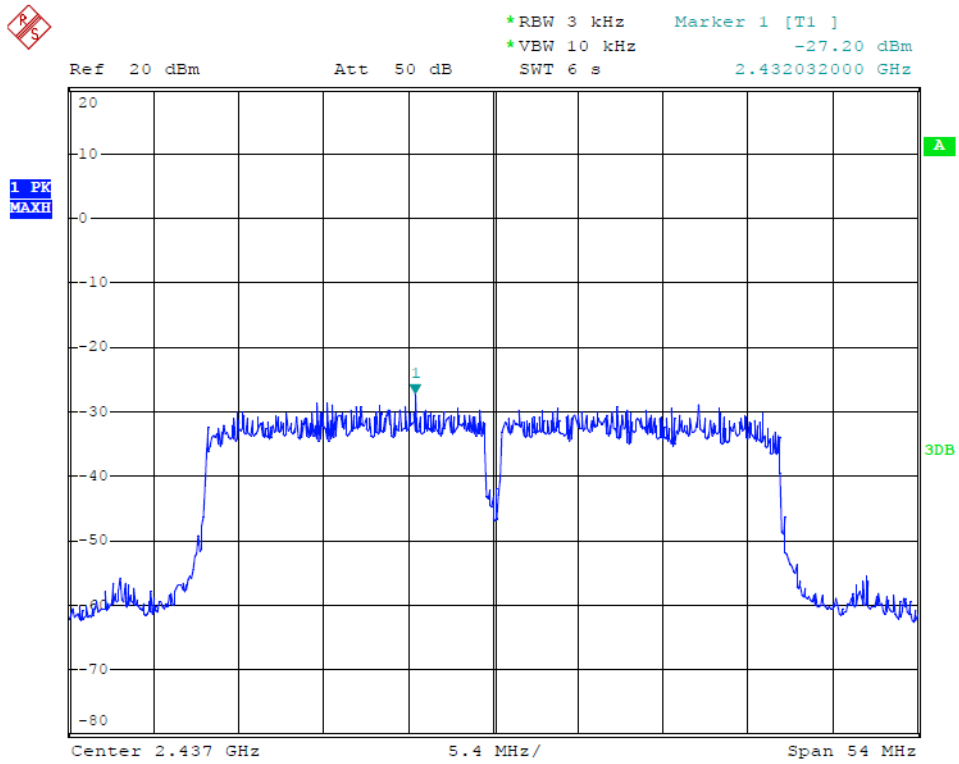

Date: 10.APR.2013 11:20:06

802.11n Channel High 2452MHz(40MHz)

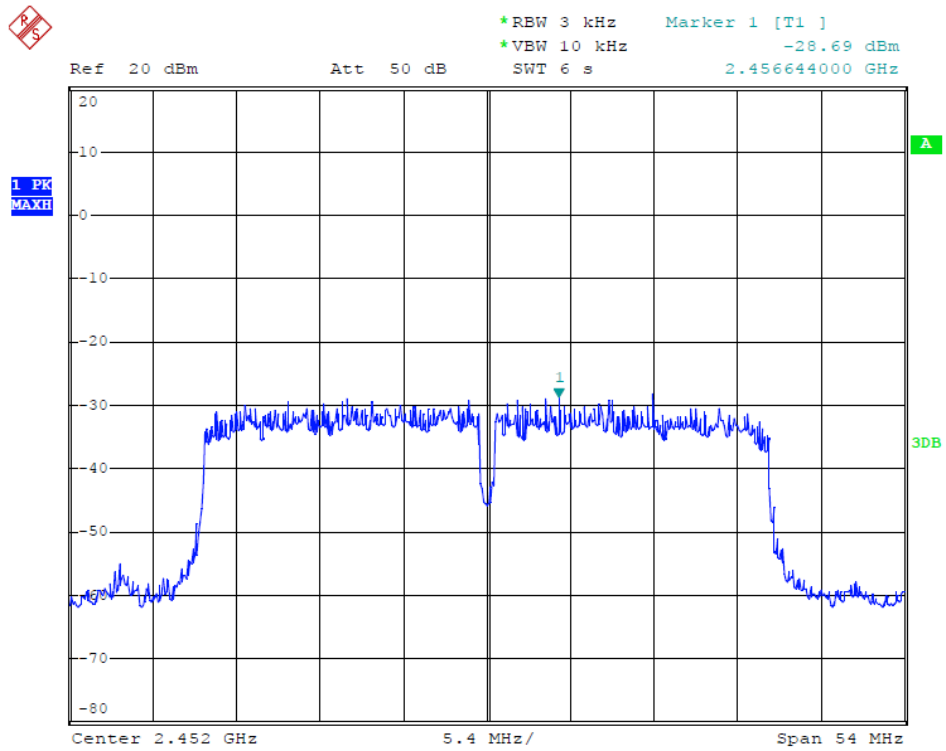

Date: 10.APR.2013 11:20:55

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



(EUT: HDMI WI-FI Smart TV Stick)

8.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. HDMI WI-FI Smart TV Stick (EUT)

Model Number : ST-W
 Serial Number : N/A
 Manufacturer : NEWMI TECH.(HK)CO., LTD.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz MHz. We select 2412MHz, 2462MHz and 2422MHz, 2452MHz TX frequency to transmit.

8.5. Test Procedure

Conducted Band Edge:

8.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

8.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

8.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

8.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

8.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz

8.5.7. The band edges was measured and recorded.

8.6. Test Result

Pass**Conducted test**

Date of Test:	<u>April 10, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Pei</u>

The test was performed with 802.11b

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	38.02	> 20dBc
2462	39.35	> 20dBc

The test was performed with 802.11g

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	31.11	> 20dBc
2462	31.68	> 20dBc


The test was performed with 802.11n (20MHz)

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	27.83	> 20dBc
2462	31.81	> 20dBc

The test was performed with 802.11n (40MHz)


Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2422	26.18	> 20dBc
2452	28.88	> 20dBc

802.11b Channel Low 2412MHz

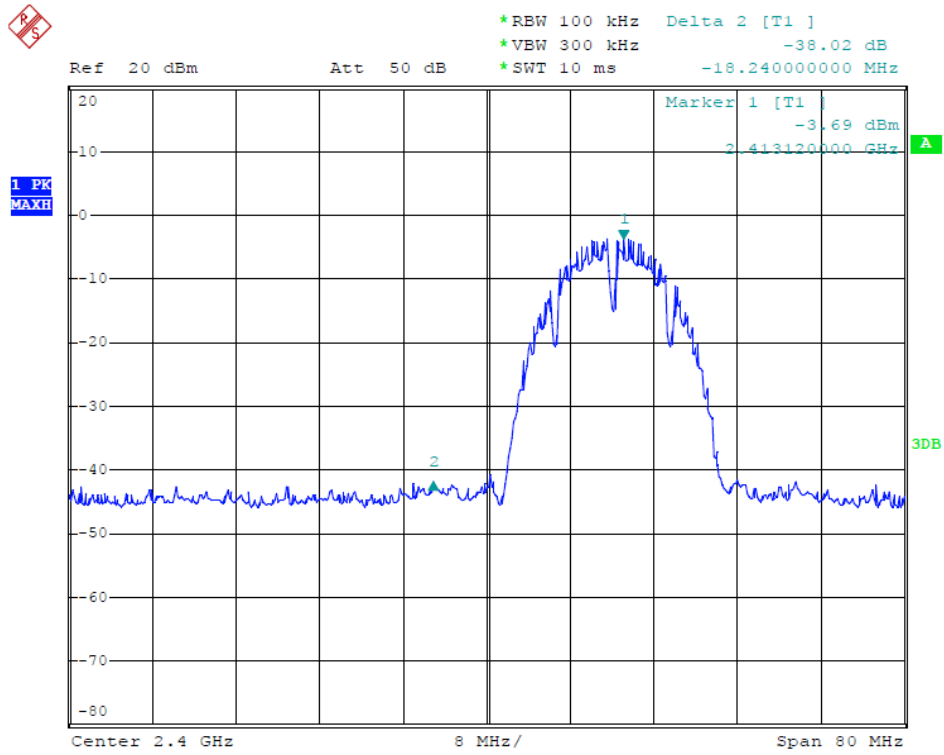


Date: 10.APR.2013 10:05:03

802.11b Channel High 2462MHz

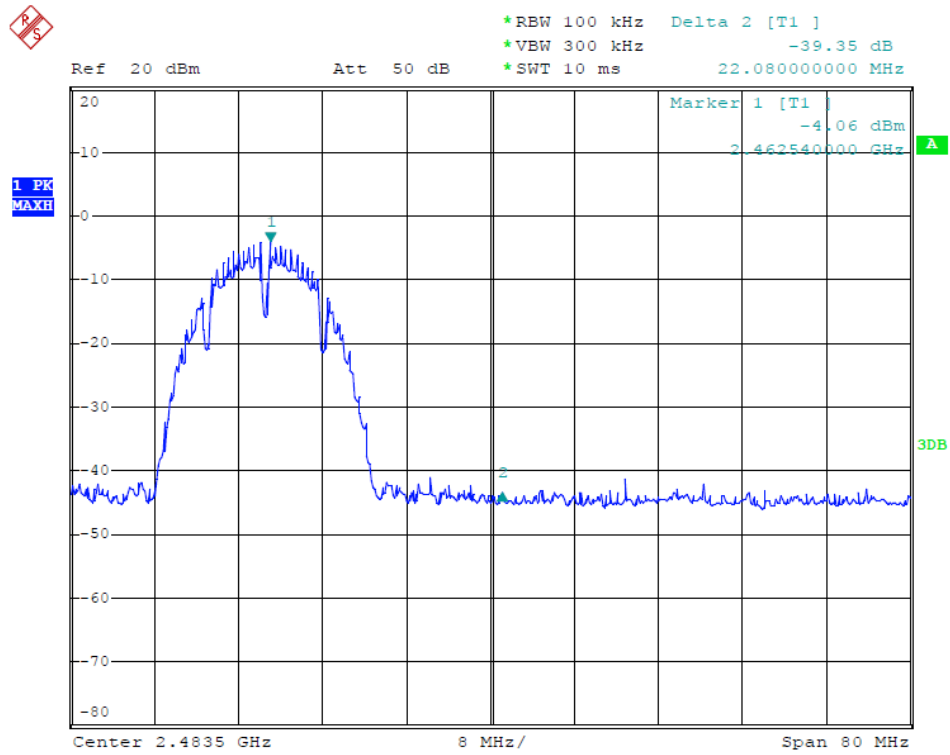


Date: 10.APR.2013 10:04:28

802.11g Channel Low 2412MHz

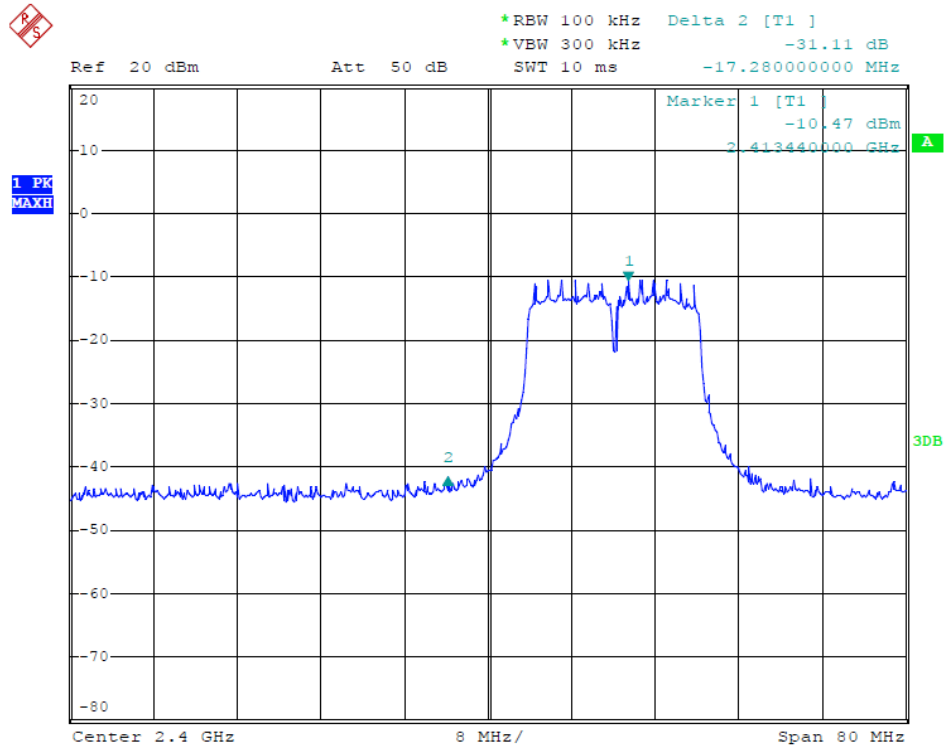


Date: 10.APR.2013 10:21:10

802.11g Channel High 2462MHz

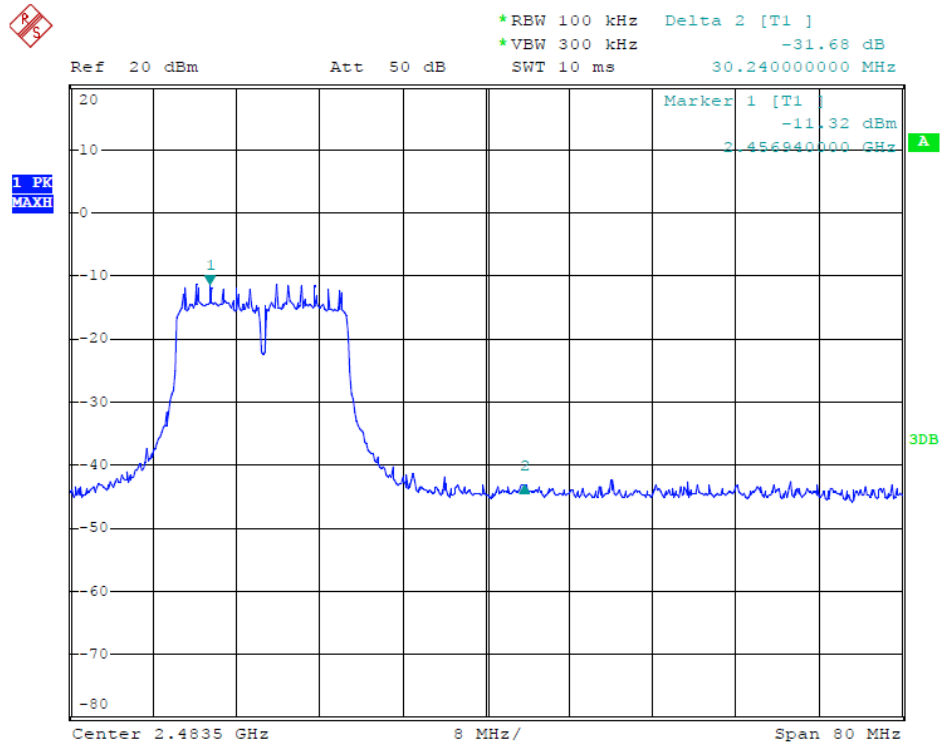


Date: 10.APR.2013 10:20:17

802.11n Channel Low 2412MHz (20MHz)

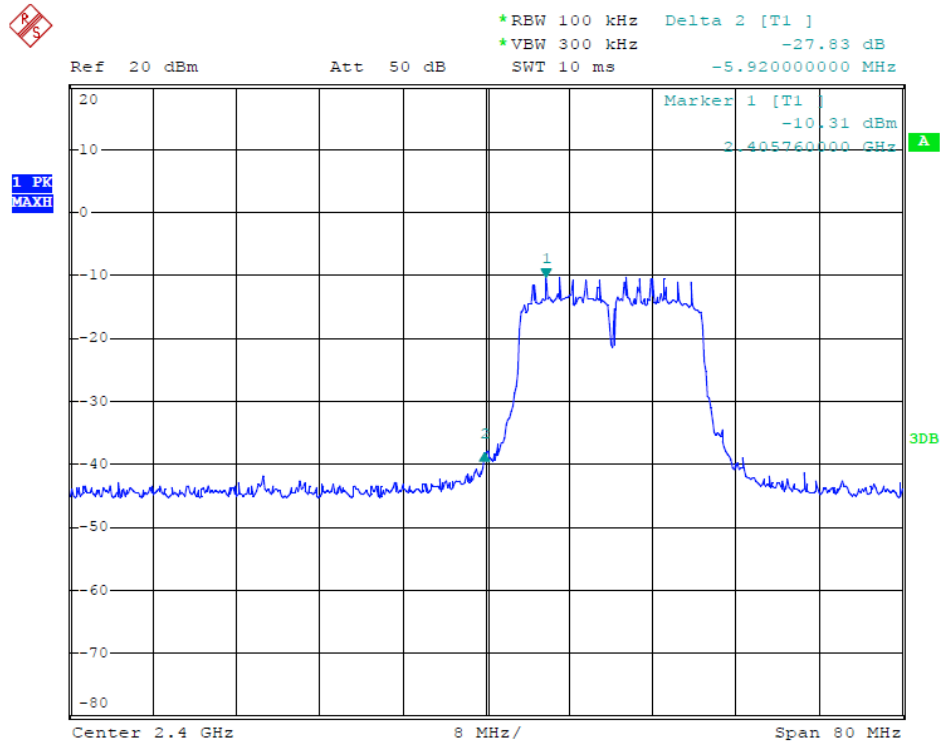


Date: 10.APR.2013 11:10:55

802.11n Channel High 2462MHz (20MHz)

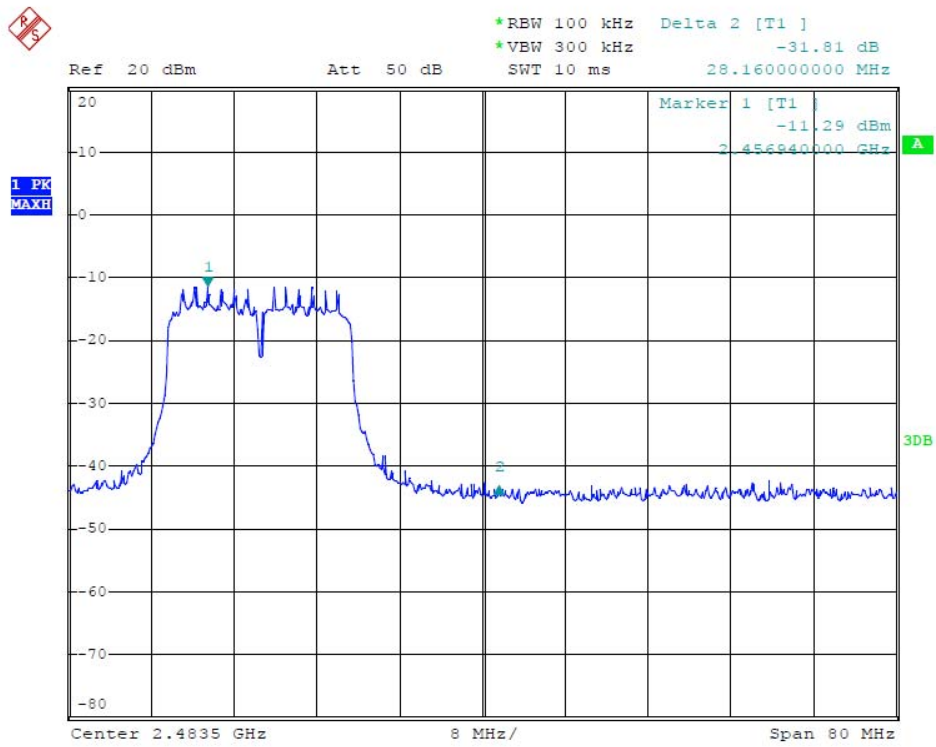


Date: 10.APR.2013 11:10:01

802.11n Channel Low 2422MHz (40MHz)

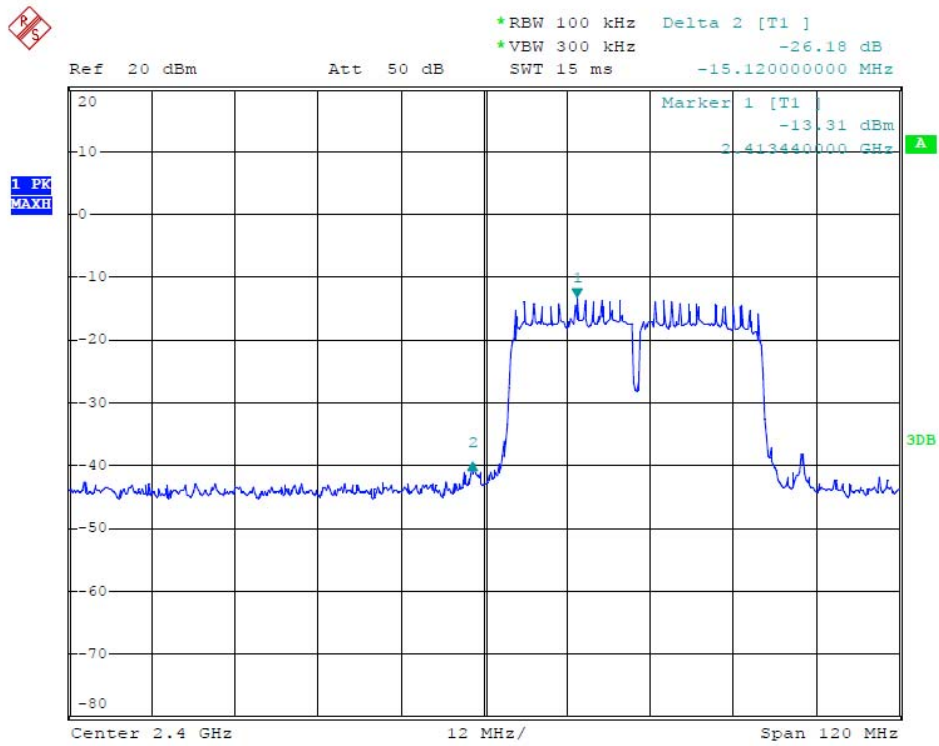

Date: 10.APR.2013 11:23:05

802.11n Channel High 2452MHz (40MHz)

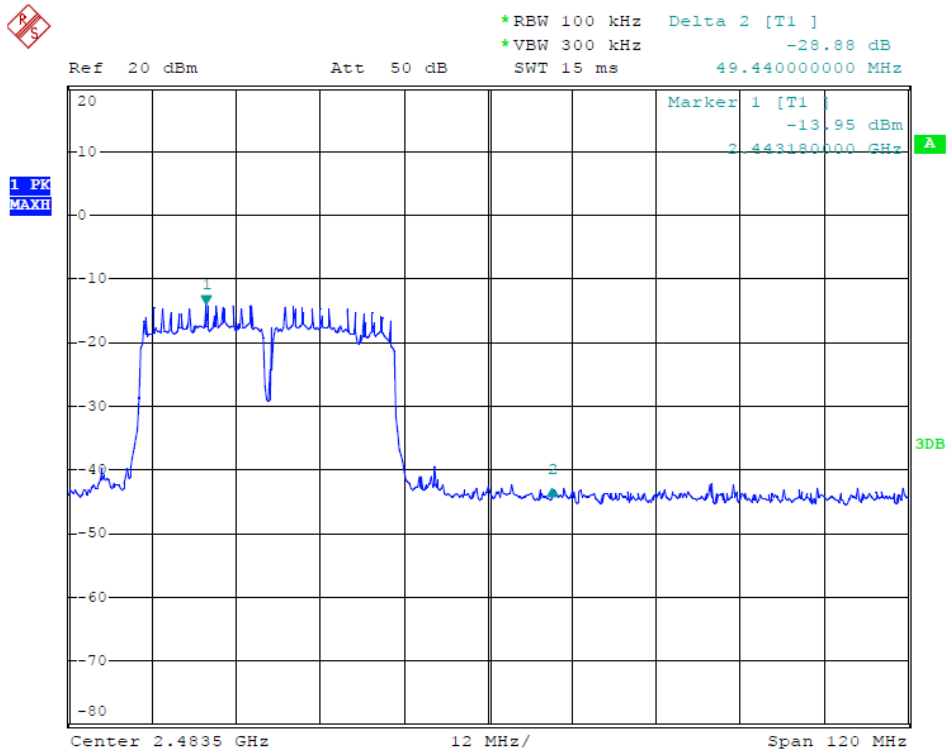

Date: 10.APR.2013 11:22:08

Radiated Band Edge Result

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11b Channel Low 2412MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	30.20	35.24	-6.99	23.21	28.25	54.00	74.00	-30.79	-45.75	Vertical
2321.420	33.40	38.34	-6.95	26.45	31.39	54.00	74.00	-27.55	-42.61	Vertical
2390.000	28.64	34.40	-6.78	21.86	27.62	54.00	74.00	-32.14	-46.38	Vertical
2310.000	31.25	35.36	-6.99	24.26	28.37	54.00	74.00	-29.74	-45.63	Horizontal
2325.340	32.00	40.13	-6.95	25.05	33.18	54.00	74.00	-28.95	-40.82	Horizontal
2390.000	29.80	34.83	-6.78	23.02	28.05	54.00	74.00	-3.98	-45.95	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11b Channel High 2462MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	30.23	35.53	-6.54	23.69	28.99	54.00	74.00	-30.31	-45.01	Vertical
2490.240	31.77	37.46	-6.52	25.25	30.94	54.00	74.00	-28.75	-43.06	Vertical
2500.000	29.64	34.75	-6.50	23.14	28.25	54.00	74.00	-30.86	-45.75	Vertical
2483.500	30.00	35.41	-6.54	23.46	28.87	54.00	74.00	-30.54	-45.13	Horizontal
2491.200	30.20	35.85	-6.51	23.69	29.34	54.00	74.00	-30.31	-44.66	Horizontal
2500.000	31.50	35.90	-6.50	25.00	29.40	54.00	74.00	-29.00	-44.60	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11g Channel Low 2412MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	29.00	34.22	-6.99	22.01	27.23	54.00	74.00	-31.99	-46.77	Vertical
2356.140	30.73	38.71	-6.87	23.86	31.84	54.00	74.00	-30.14	-42.16	Vertical
2390.000	30.41	35.18	-6.78	23.63	28.40	54.00	74.00	-30.37	-45.60	Vertical
2310.000	30.20	35.20	-6.99	23.21	28.21	54.00	74.00	-30.79	-45.79	Horizontal
2354.600	33.44	38.20	-6.88	26.56	31.32	54.00	74.00	-27.44	-42.68	Horizontal
2390.000	28.45	34.74	-6.78	21.67	27.96	54.00	74.00	-32.33	-46.04	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11g Channel High 2462MHz</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	31.24	36.79	-6.54	24.70	30.25	54.00	74.00	-29.30	-43.75	Vertical
2488.320	34.52	39.67	-6.52	28.00	33.15	54.00	74.00	-26.00	-40.85	Vertical
2500.000	28.88	34.70	-6.50	22.38	28.20	54.00	74.00	-31.62	-45.80	Vertical
2483.500	30.25	35.67	-6.54	23.71	29.13	54.00	74.00	-30.29	-44.87	Horizontal
2488.960	32.55	37.77	-6.52	26.03	31.25	54.00	74.00	-27.97	-42.75	Horizontal
2500.000	29.65	34.91	-6.50	23.15	28.41	54.00	74.00	-30.85	-45.59	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Low 2412MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	29.86	34.25	-6.99	22.87	27.26	54.00	74.00	-31.13	-46.74	Vertical
2382.460	37.20	42.88	-6.81	30.39	36.07	54.00	74.00	-23.61	-37.93	Vertical
2390.000	37.53	42.31	-6.78	30.75	35.53	54.00	74.00	-23.25	-38.47	Vertical
2310.000	29.86	34.97	-6.99	22.87	27.98	54.00	74.00	-31.13	-46.02	Horizontal
2371.960	35.43	40.22	-6.82	28.61	33.40	54.00	74.00	-25.39	-40.60	Horizontal
2390.000	36.44	41.96	-6.78	29.66	35.18	54.00	74.00	-24.34	-38.82	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>March 30, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel High 2462MHz (20MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	38.58	43.96	-6.54	32.04	37.42	54.00	74.00	-21.96	-36.58	Vertical
2490.240	37.55	42.10	-6.52	31.03	35.58	54.00	74.00	-22.97	-38.42	Vertical
2500.000	35.64	40.28	-6.50	29.14	33.78	54.00	74.00	-24.86	-40.22	Vertical
2483.500	39.45	44.15	-6.54	32.91	37.61	54.00	74.00	-21.09	-36.39	Horizontal
2489.600	37.47	42.87	-6.52	30.95	36.35	54.00	74.00	-23.05	-37.65	Horizontal
2500.000	33.11	38.12	-6.50	26.61	31.62	54.00	74.00	-27.39	-42.38	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	<u>April 9, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Low 2422MHz</u>		
Test Mode:	<u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	29.95	34.31	-7.81	22.14	26.50	54.00	74.00	-31.86	-47.50	Vertical
2376.046	34.53	40.84	-7.62	26.91	33.22	54.00	74.00	-27.09	-40.78	Vertical
2390.000	35.83	41.49	-7.53	28.30	33.96	54.00	74.00	-25.70	-40.04	Vertical
2310.000	30.20	35.03	-7.81	22.39	27.22	54.00	74.00	-31.61	-46.78	Horizontal
2357.787	34.01	39.32	-7.74	26.27	31.58	54.00	74.00	-27.73	-42.42	Horizontal
2390.000	38.67	43.57	-7.53	31.14	36.04	54.00	74.00	-22.86	-37.96	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	<u>April 9, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel High 2452MHz</u>	Test Engineer:	<u>Pei</u>
	<u>(40MHz)</u>		

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	35.93	41.15	-7.37	28.56	33.78	54.00	74.00	-25.44	-40.22	Vertical
2489.216	35.03	41.80	-7.39	27.64	34.41	54.00	74.00	-26.36	-39.59	Vertical
2500.000	31.28	36.97	-7.40	23.88	29.57	54.00	74.00	-30.12	-44.43	Vertical
2483.500	38.72	42.71	-7.37	31.35	35.34	54.00	74.00	-22.65	-38.66	Horizontal
2493.421	34.02	42.45	-7.39	26.63	35.06	54.00	74.00	-27.37	-38.94	Horizontal
2500.000	32.21	37.12	-7.40	24.81	29.72	54.00	74.00	-29.19	-44.28	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #399	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/07/18
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

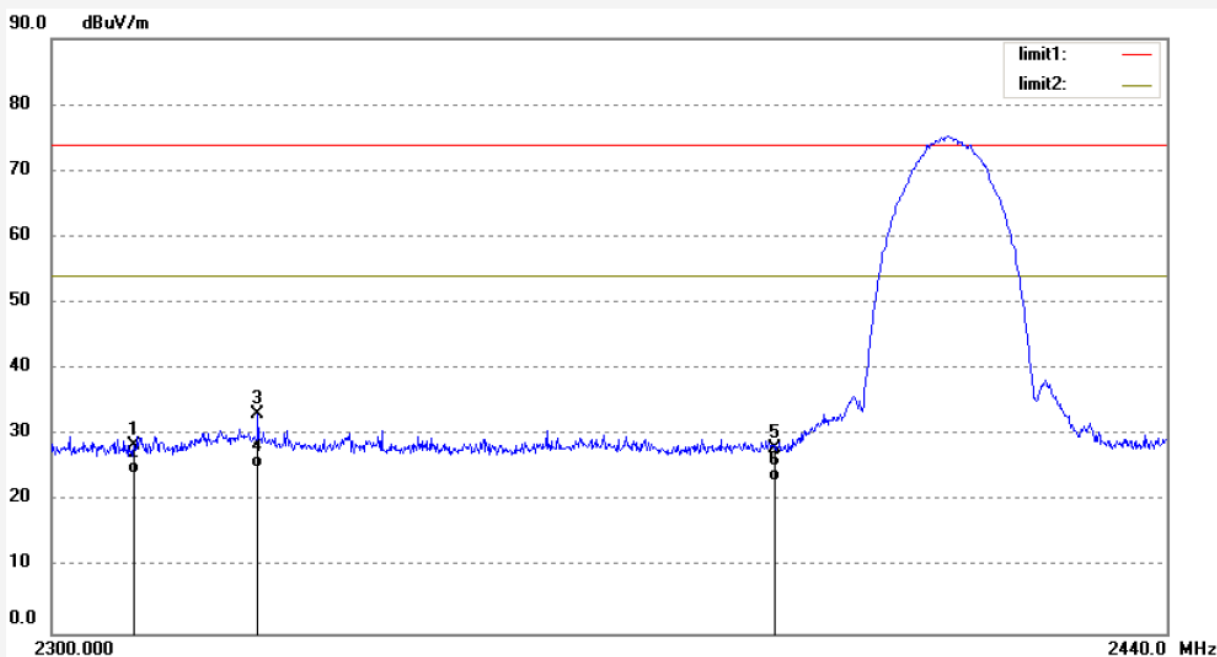

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	35.36	-6.99	28.37	74.00	-45.63	peak			
2	2310.000	31.25	-6.99	24.26	54.00	-29.74	AVG			
3	2325.340	40.13	-6.95	33.18	74.00	-40.82	peak			
4	2325.340	32.00	-6.95	25.05	54.00	-28.95	AVG			
5	2390.000	34.83	-6.78	28.05	74.00	-45.95	peak			
6	2390.000	29.80	-6.78	23.02	54.00	-30.98	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #398	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/06/13
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

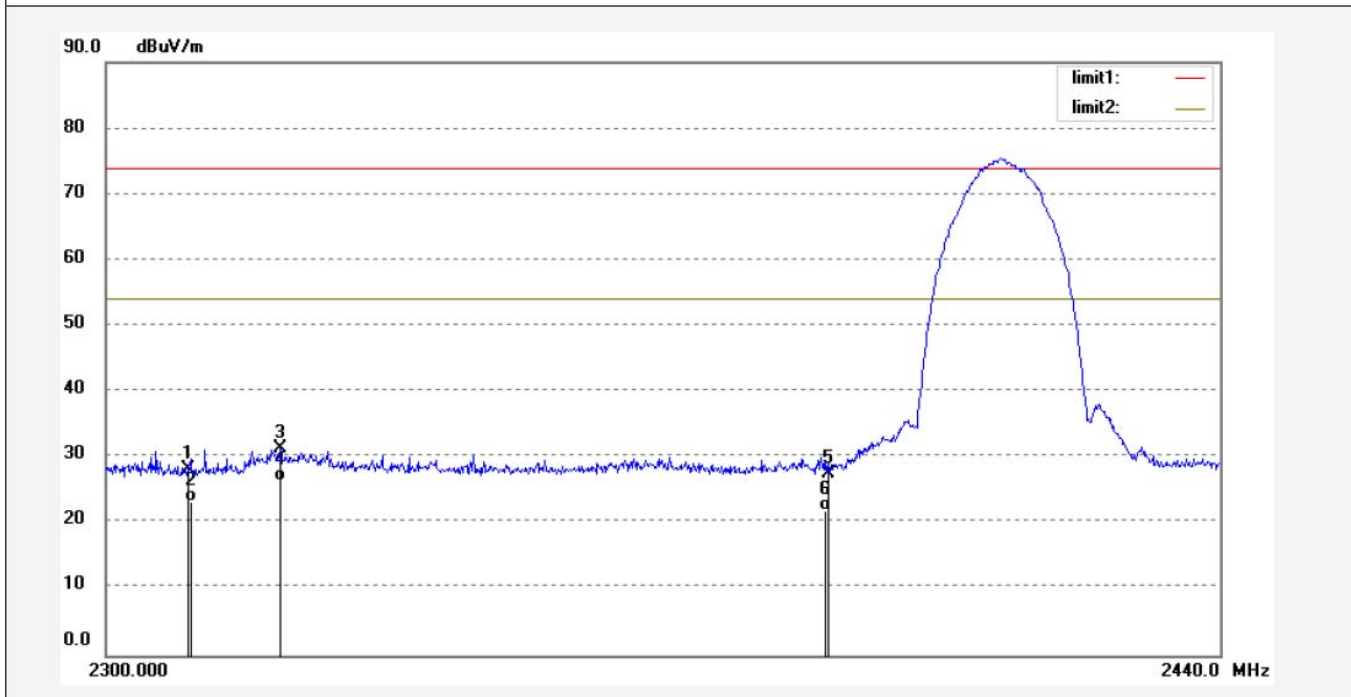

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	35.24	-6.99	28.25	74.00	-45.75	peak			
2	2310.000	30.20	-6.99	23.21	54.00	-30.79	AVG			
3	2321.420	38.34	-6.95	31.39	74.00	-42.61	peak			
4	2321.420	33.40	-6.95	26.45	54.00	-27.55	AVG			
5	2390.000	34.40	-6.78	27.62	74.00	-46.38	peak			
6	2390.000	28.64	-6.78	21.86	54.00	-32.14	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #400	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/09/46
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

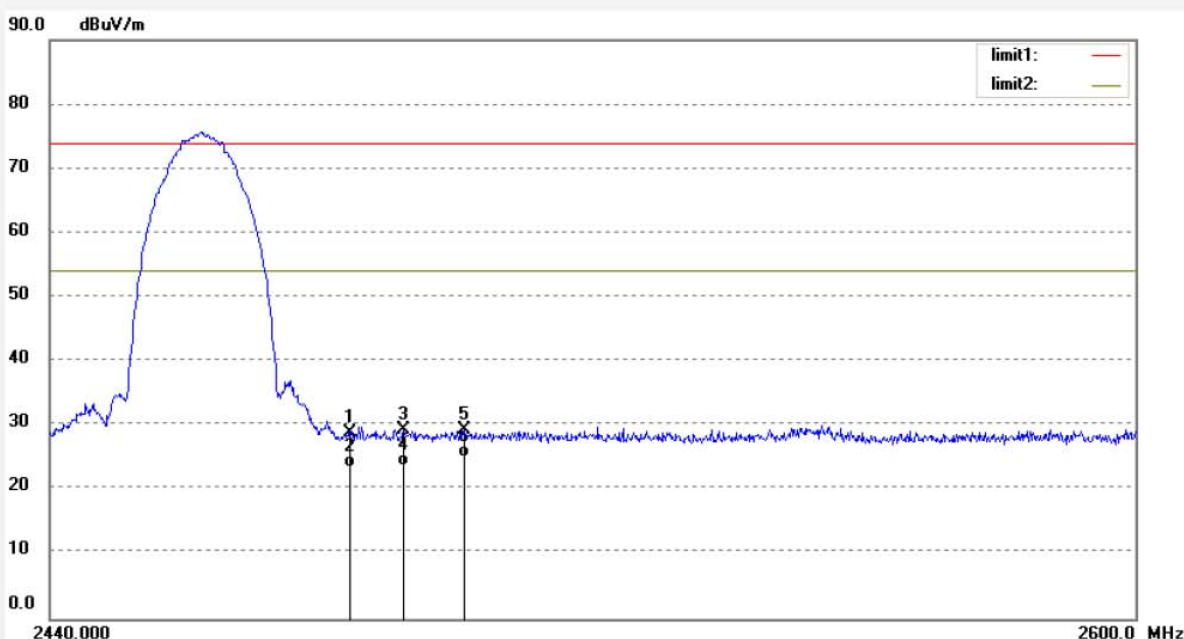

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	35.41	-6.54	28.87	74.00	-45.13	peak			
2	2483.500	30.00	-6.54	23.46	54.00	-30.54	AVG			
3	2491.200	35.85	-6.51	29.34	74.00	-44.66	peak			
4	2491.200	30.20	-6.51	23.69	54.00	-30.31	AVG			
5	2500.000	35.90	-6.50	29.40	74.00	-44.60	peak			
6	2500.000	31.50	-6.50	25.00	54.00	-29.00	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #401	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/10/57
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

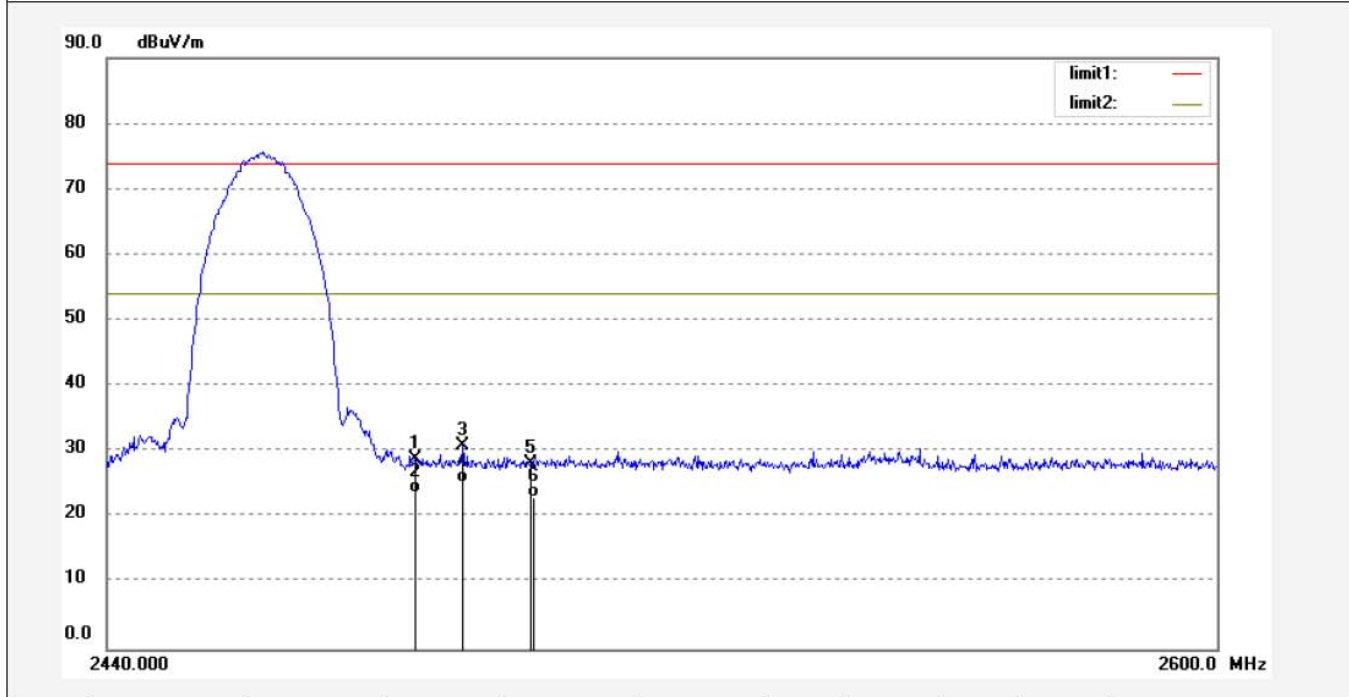

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	35.53	-6.54	28.99	74.00	-45.01	peak			
2	2483.500	30.23	-6.54	23.69	54.00	-30.31	AVG			
3	2490.240	37.46	-6.52	30.94	74.00	-43.06	peak			
4	2490.240	31.77	-6.52	25.25	54.00	-28.75	AVG			
5	2500.000	34.75	-6.50	28.25	74.00	-45.75	peak			
6	2500.000	29.64	-6.50	23.14	54.00	-30.86	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #404	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/15/32
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

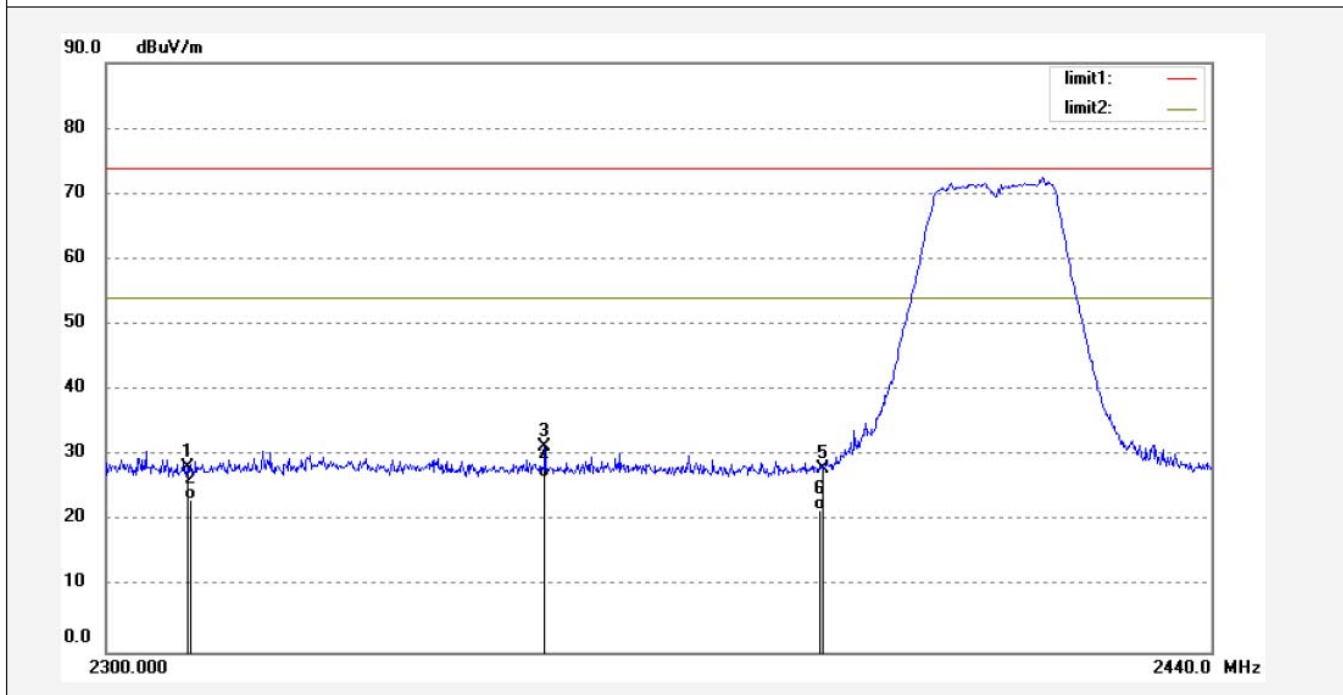

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	35.20	-6.99	28.21	74.00	-45.79	peak			
2	2310.000	30.20	-6.99	23.21	54.00	-30.79	AVG			
3	2354.600	38.20	-6.88	31.32	74.00	-42.68	peak			
4	2354.600	33.44	-6.88	26.56	54.00	-27.44	AVG			
5	2390.000	34.74	-6.78	27.96	74.00	-46.04	peak			
6	2390.000	28.45	-6.78	21.67	54.00	-32.33	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #405	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/16/31
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

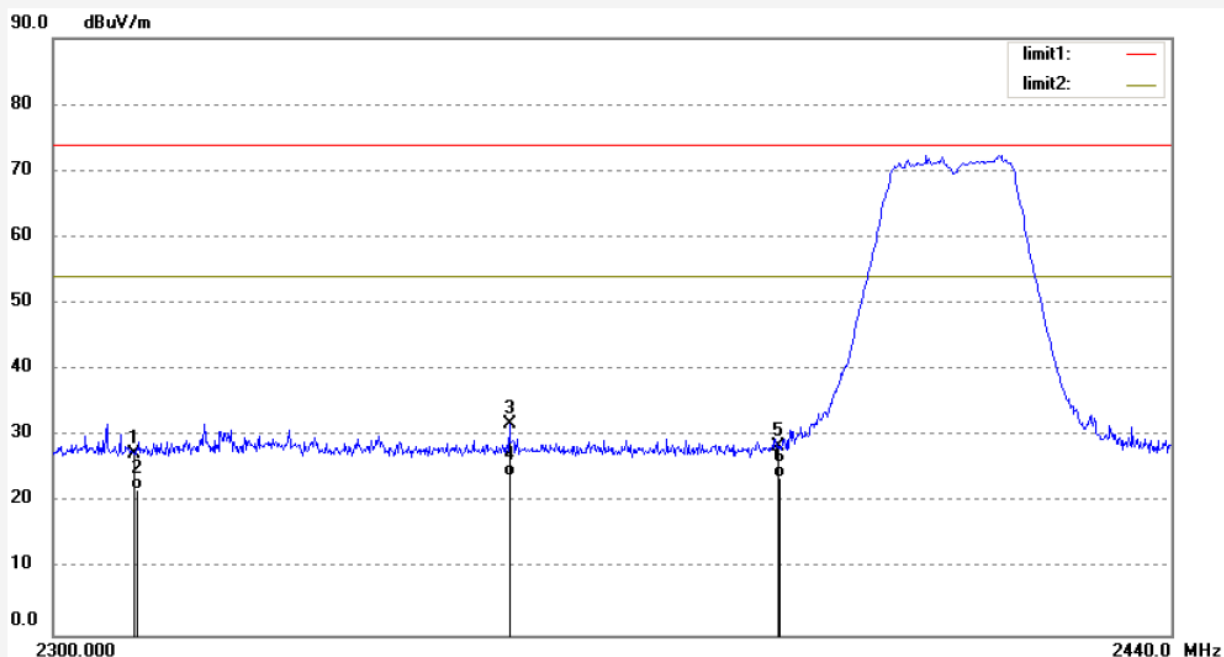

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.22	-6.99	27.23	74.00	-46.77	peak			
2	2310.000	29.00	-6.99	22.01	54.00	-31.99	AVG			
3	2356.140	38.71	-6.87	31.84	74.00	-42.16	peak			
4	2356.140	30.73	-6.87	23.86	54.00	-30.14	AVG			
5	2390.000	35.18	-6.78	28.40	74.00	-45.60	peak			
6	2390.000	30.41	-6.78	23.63	54.00	-30.37	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #403	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/14/04
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

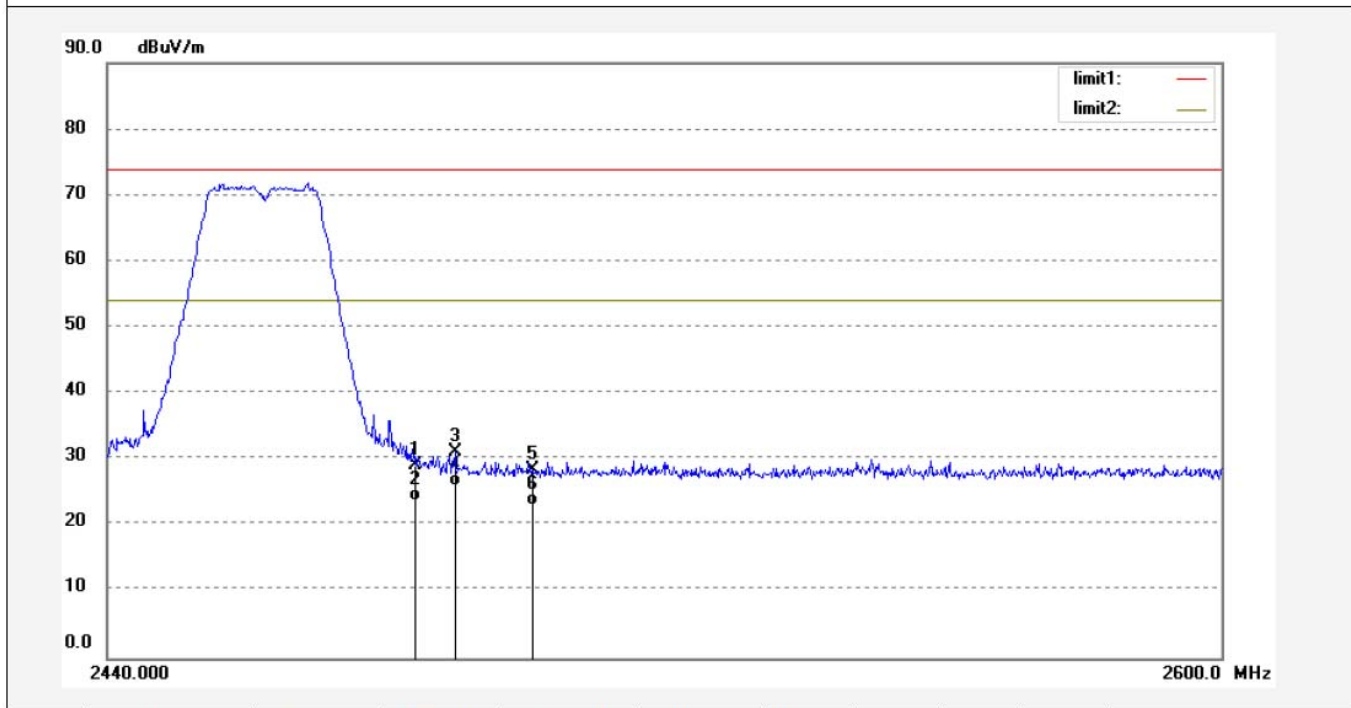

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	35.67	-6.54	29.13	74.00	-44.87	peak			
2	2483.500	30.25	-6.54	23.71	54.00	-30.29	AVG			
3	2488.960	37.77	-6.52	31.25	74.00	-42.75	peak			
4	2488.960	32.55	-6.52	26.03	54.00	-27.97	AVG			
5	2500.000	34.91	-6.50	28.41	74.00	-45.59	peak			
6	2500.000	29.65	-6.50	23.15	54.00	-30.85	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #402	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/13/02
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

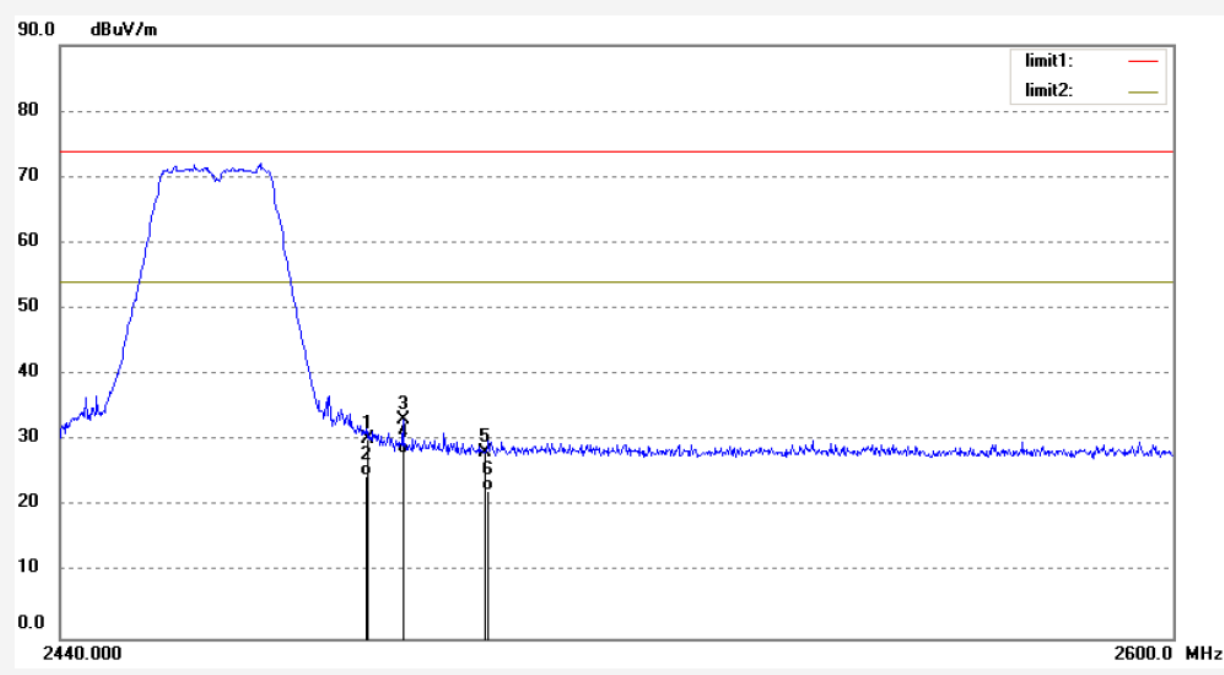

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	36.79	-6.54	30.25	74.00	-43.75	peak			
2	2483.500	31.24	-6.54	24.70	54.00	-29.30	AVG			
3	2488.320	39.67	-6.52	33.15	74.00	-40.85	peak			
4	2488.320	34.52	-6.52	28.00	54.00	-26.00	AVG			
5	2500.000	34.70	-6.50	28.20	74.00	-45.80	peak			
6	2500.000	28.88	-6.50	22.38	54.00	-31.62	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #407	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/18/56
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

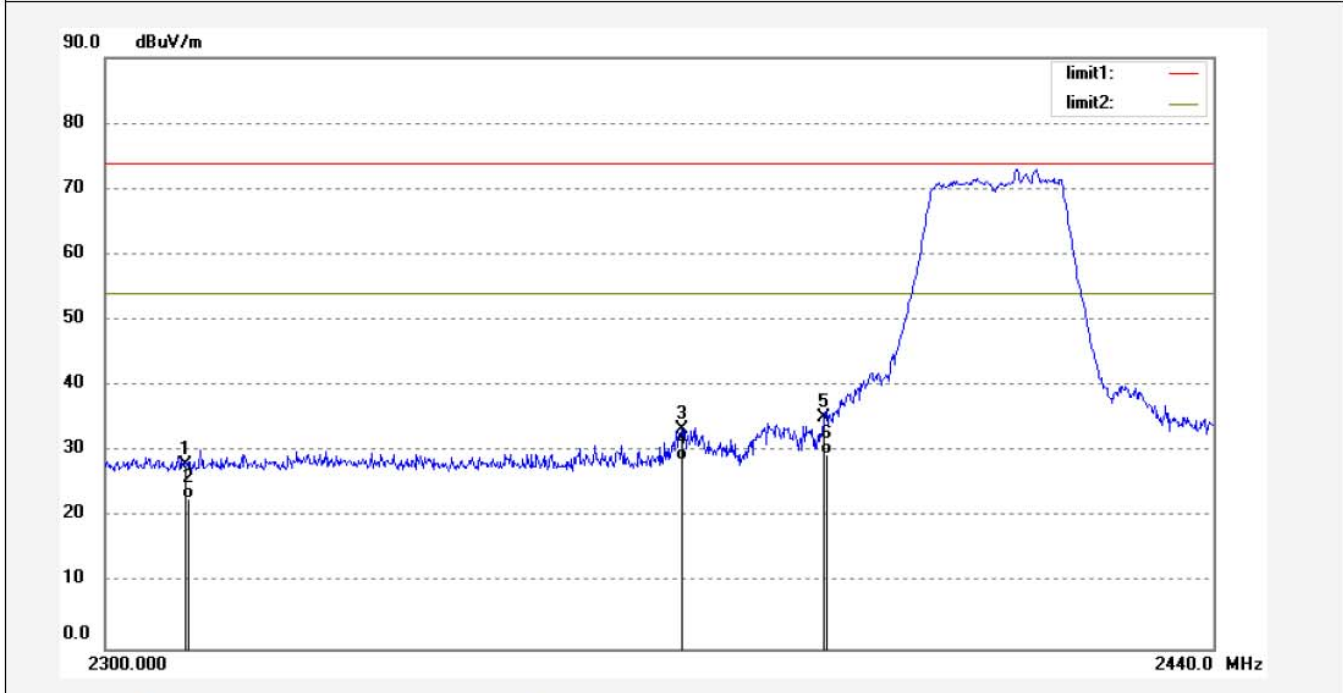

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.97	-6.99	27.98	74.00	-46.02	peak			
2	2310.000	29.86	-6.99	22.87	54.00	-31.13	AVG			
3	2371.960	40.22	-6.82	33.40	74.00	-40.60	peak			
4	2371.960	35.43	-6.82	28.61	54.00	-25.39	AVG			
5	2390.000	41.96	-6.78	35.18	74.00	-38.82	peak			
6	2390.000	36.44	-6.78	29.66	54.00	-24.34	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #406	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/17/50
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

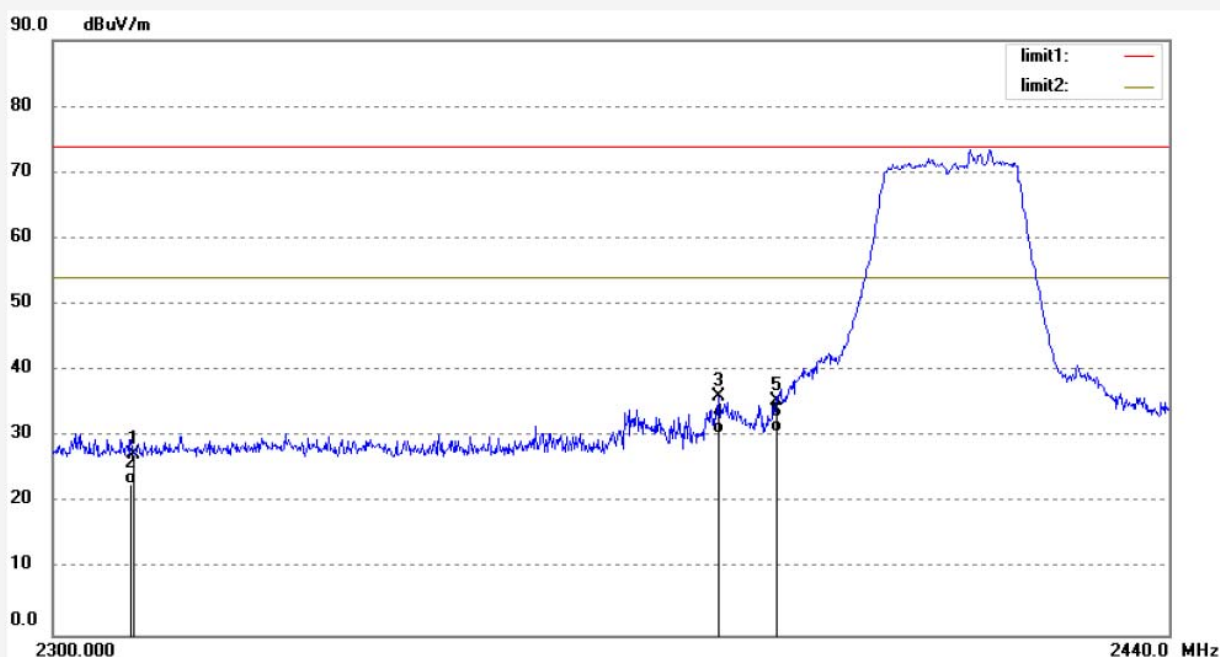

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.25	-6.99	27.26	74.00	-46.74	peak			
2	2310.000	29.86	-6.99	22.87	54.00	-31.13	AVG			
3	2382.460	42.88	-6.81	36.07	74.00	-37.93	peak			
4	2382.460	37.20	-6.81	30.39	54.00	-23.61	AVG			
5	2390.000	42.31	-6.78	35.53	74.00	-38.47	peak			
6	2390.000	37.53	-6.78	30.75	54.00	-23.25	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #408	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/20/25
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

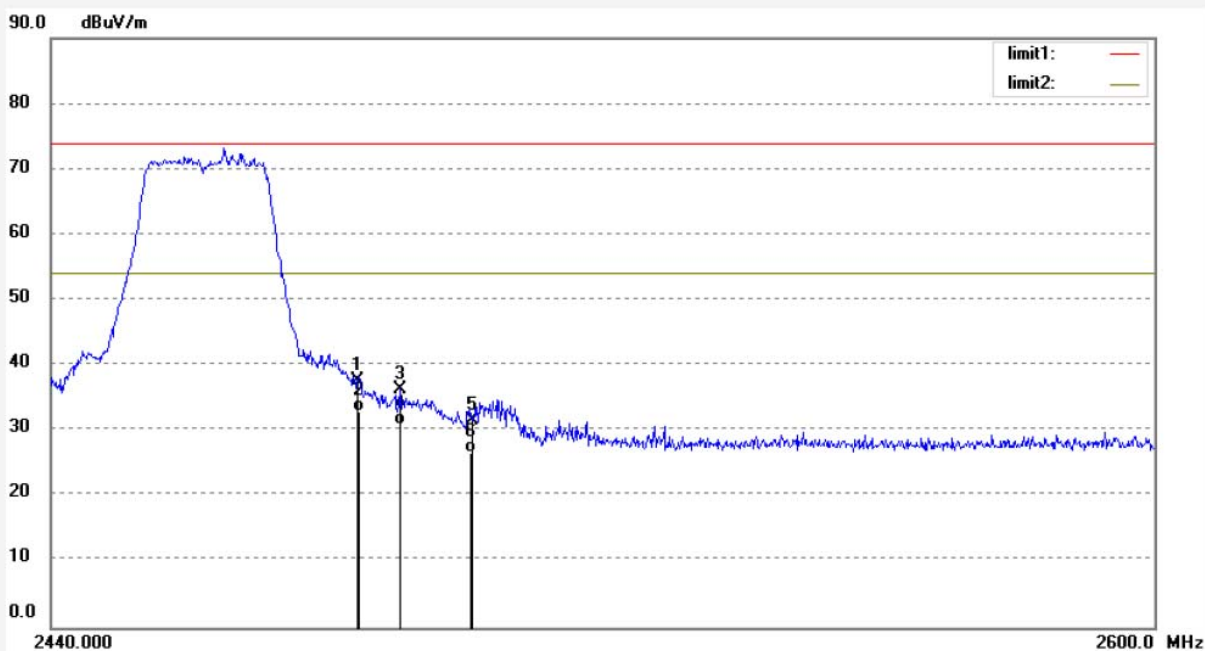

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.15	-6.54	37.61	74.00	-36.39	peak			
2	2483.500	39.45	-6.54	32.91	54.00	-21.09	AVG			
3	2489.600	42.87	-6.52	36.35	74.00	-37.65	peak			
4	2489.600	37.47	-6.52	30.95	54.00	-23.05	AVG			
5	2500.000	38.12	-6.50	31.62	74.00	-42.38	peak			
6	2500.000	33.11	-6.50	26.61	54.00	-27.39	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #409	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/30/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/22/32
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

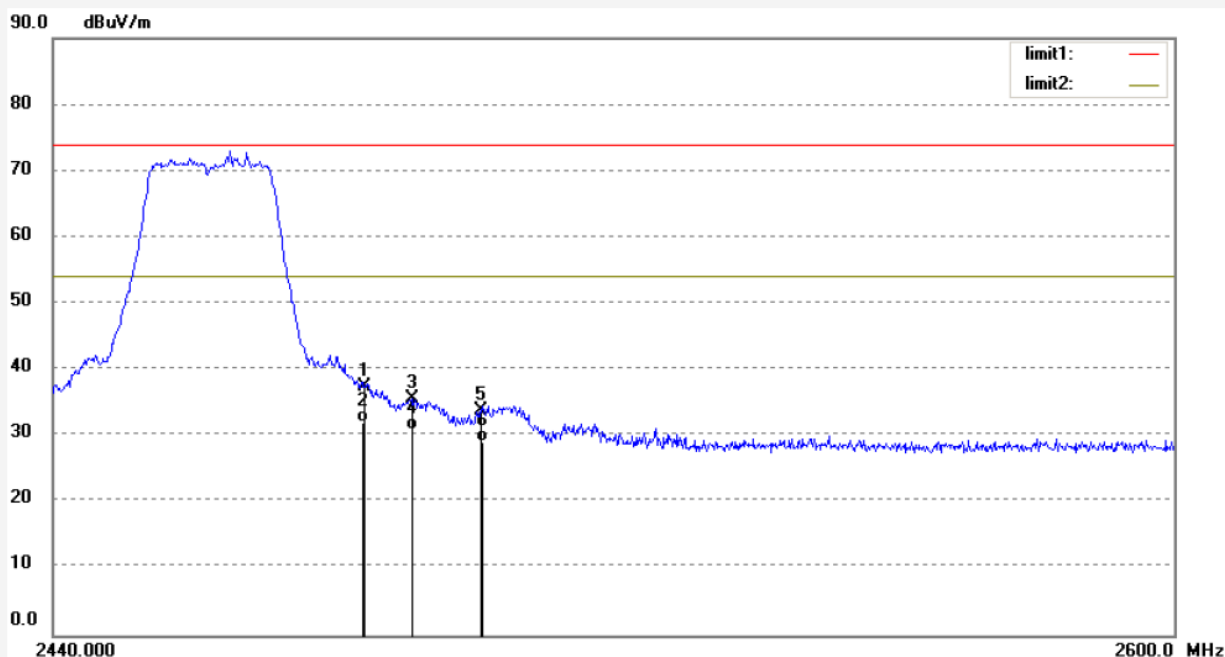

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.96	-6.54	37.42	74.00	-36.58	peak			
2	2483.500	38.58	-6.54	32.04	54.00	-21.96	AVG			
3	2490.240	42.10	-6.52	35.58	74.00	-38.42	peak			
4	2490.240	37.55	-6.52	31.03	54.00	-22.97	AVG			
5	2500.000	40.28	-6.50	33.78	74.00	-40.22	peak			
6	2500.000	35.64	-6.50	29.14	54.00	-24.86	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #4032	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-9
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 22:51:07
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 3 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

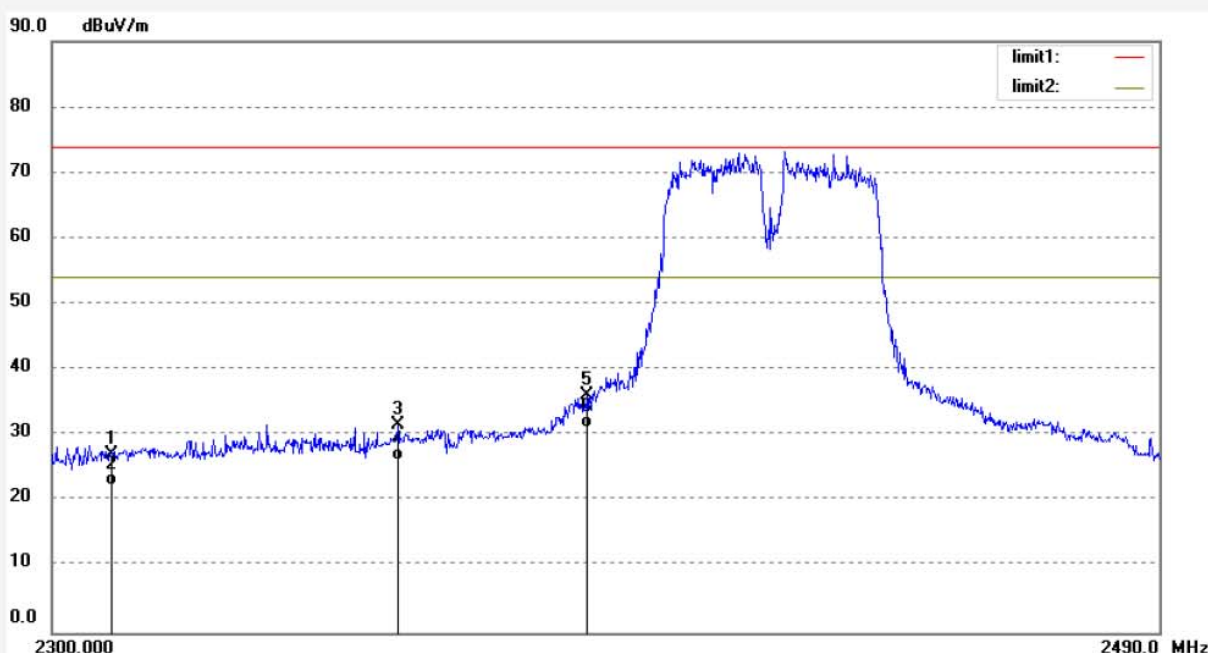

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	35.03	-7.81	27.22	74.00	-46.78	peak			
2	2310.000	30.20	-7.81	22.39	54.00	-31.61	AVG			
3	2357.787	39.32	-7.74	31.58	74.00	-42.42	peak			
4	2357.787	34.01	-7.74	26.27	54.00	-27.73	AVG			
5	2390.000	43.57	-7.53	36.04	74.00	-37.96	peak			
6	2390.000	38.67	-7.53	31.14	54.00	-22.86	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #4033	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-9
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 22:54:58
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 3 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

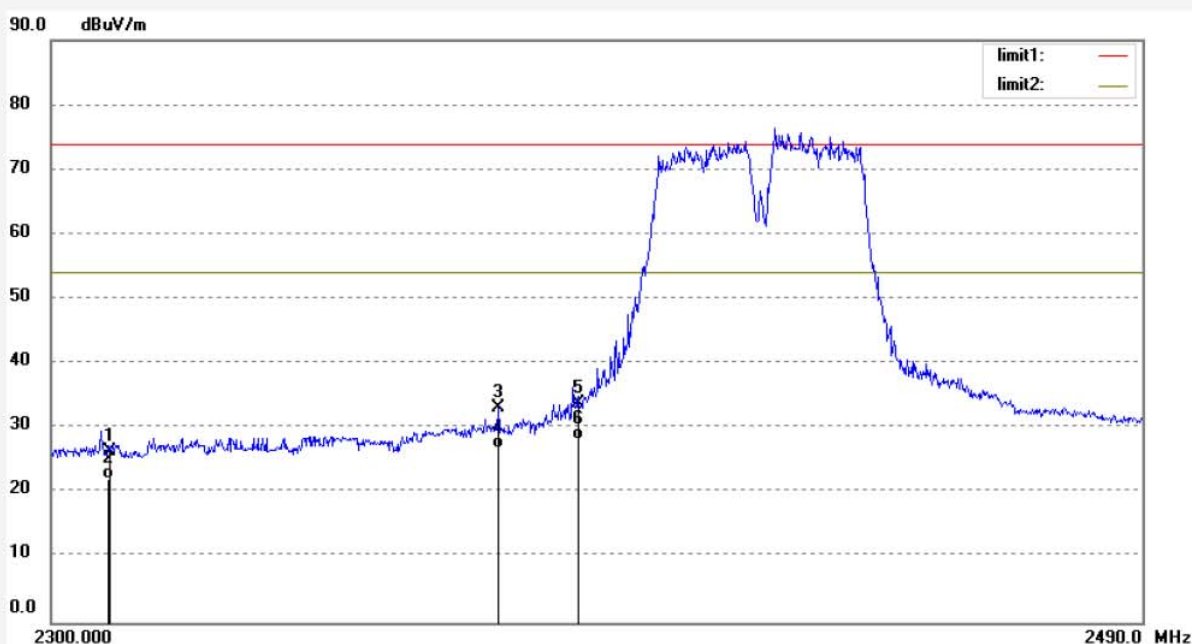

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	34.31	-7.81	26.50	74.00	-47.50	peak			
2	2310.000	29.95	-7.81	22.14	54.00	-31.86	AVG			
3	2376.046	40.84	-7.62	33.22	74.00	-40.78	peak			
4	2376.046	34.53	-7.62	26.91	54.00	-27.09	AVG			
5	2390.000	41.49	-7.53	33.96	74.00	-40.04	peak			
6	2390.000	35.83	-7.53	28.30	54.00	-25.70	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #4035	Polarization: Horizontal
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-9
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 23:02:17
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 9 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

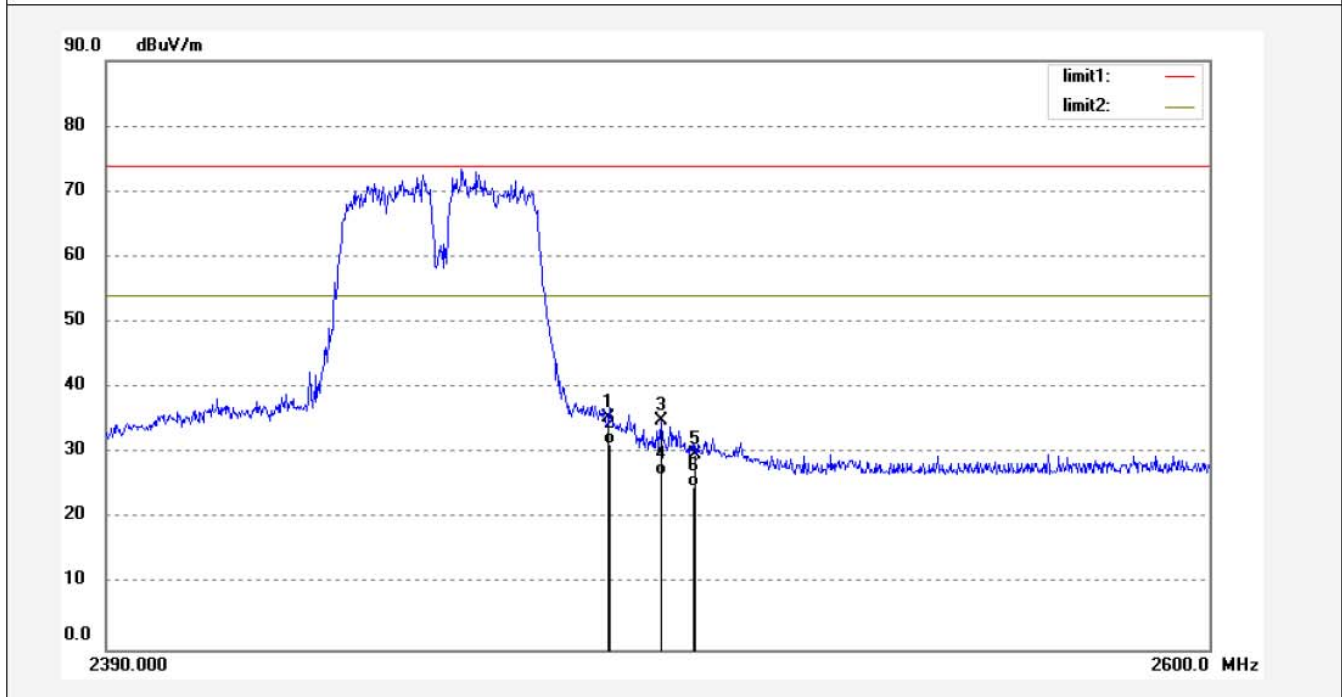

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	42.71	-7.37	35.34	74.00	-38.66	peak			
2	2483.500	38.72	-7.37	31.35	54.00	-22.65	AVG			
3	2493.421	42.45	-7.39	35.06	74.00	-38.94	peak			
4	2493.421	34.02	-7.39	26.63	54.00	-27.37	AVG			
5	2500.000	37.12	-7.40	29.72	74.00	-44.28	peak			
6	2500.000	32.21	-7.40	24.81	54.00	-29.19	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #4034	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-9
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 22:58:27
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 9 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

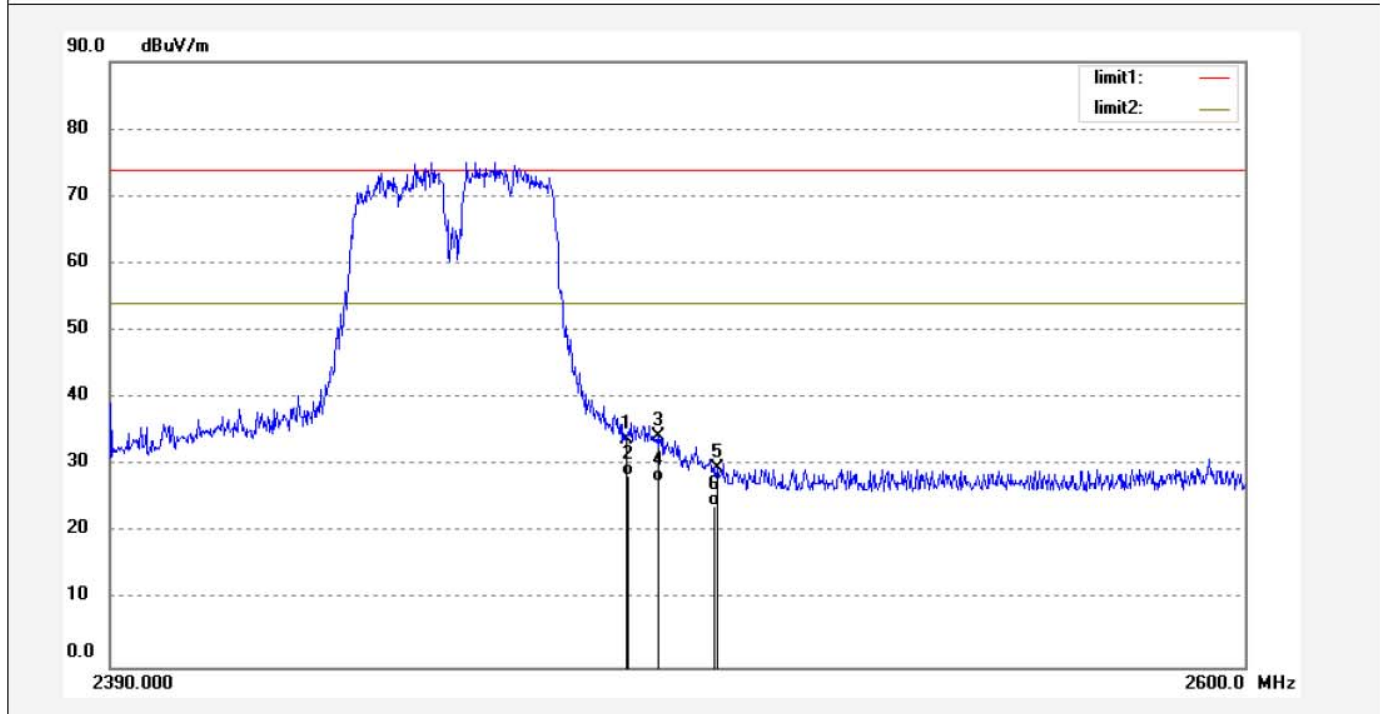


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	41.15	-7.37	33.78	74.00	-40.22	peak			
2	2483.500	35.93	-7.37	28.56	54.00	-25.44	AVG			
3	2489.216	41.80	-7.39	34.41	74.00	-39.59	peak			
4	2489.216	35.03	-7.39	27.64	54.00	-26.36	AVG			
5	2500.000	36.97	-7.40	29.57	74.00	-44.43	peak			
6	2500.000	31.28	-7.40	23.88	54.00	-30.12	AVG			

9. RADIATED SPURIOUS EMISSION TEST

9.1. Block Diagram of Test Setup


9.1.1. Block diagram of connection between the EUT and peripherals

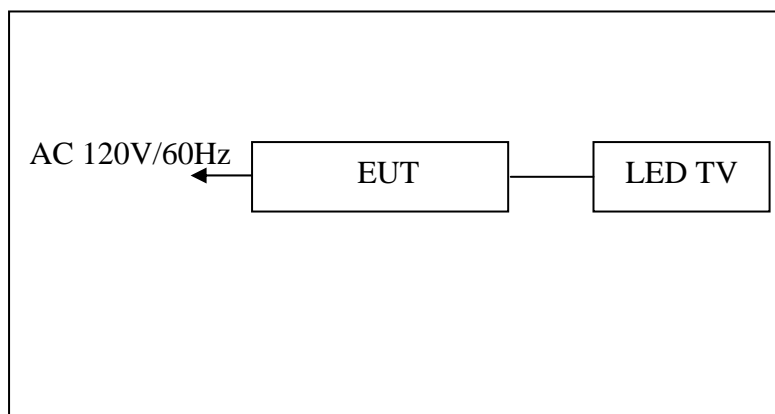

Setup: Transmitting mode

(EUT: HDMI WI-FI Smart TV Stick)

9.1.2. Semi-Anechoic Chamber Test Setup Diagram

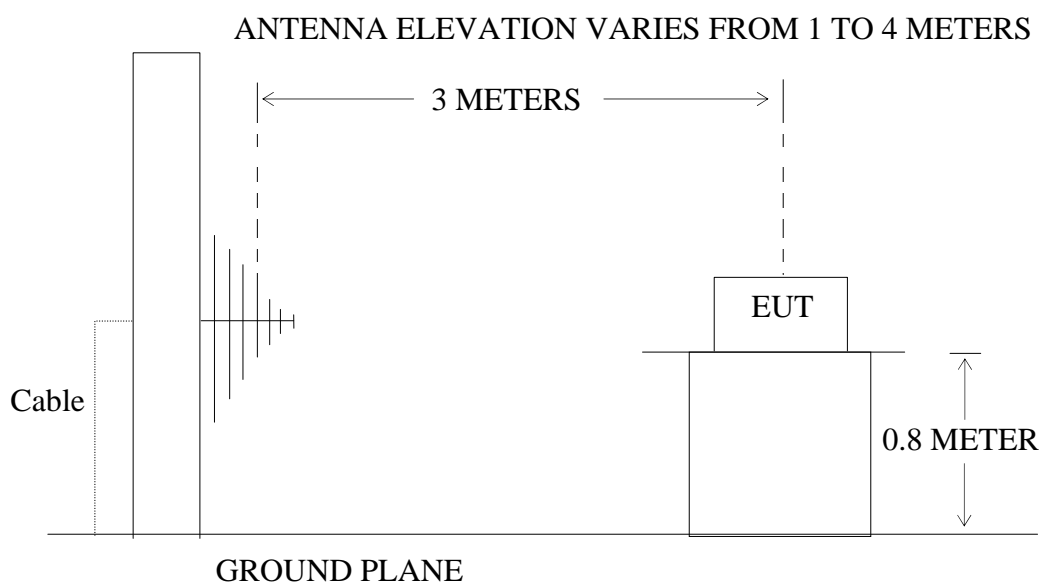

(EUT: HDMI WI-FI Smart TV Stick)

9.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.1. HDMI WI-FI Smart TV Stick (EUT)

Model Number : ST-W
 Serial Number : N/A
 Manufacturer : NEWMI TECH.(HK)CO., LTD.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT and simulator as shown as Section 9.1.

9.5.2. Turn on the power of all equipment.

9.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

9.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 150Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

9.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1199	49.23	-14.10	35.13	46.00	-10.87	Vertical
721.7259	44.08	-9.28	34.80	46.00	-11.20	
866.0879	43.31	-6.69	36.62	46.00	-9.38	
432.5457	53.19	-15.10	38.09	46.00	-7.91	Horizontal
721.7259	46.75	-9.28	37.47	46.00	-8.53	
866.0878	45.47	-6.69	38.78	46.00	-7.22	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11b Channel Middle 2437MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
71.0802	43.50	-22.31	21.19	40.00	-18.81	Vertical
432.5457	47.20	-14.15	33.05	46.00	-12.95	
866.0879	44.18	-6.69	37.49	46.00	-8.51	
370.7022	43.59	-15.85	27.74	46.00	-18.26	Horizontal
866.0878	44.30	-6.69	37.61	46.00	-8.39	
962.1622	42.06	-5.23	36.83	54.00	-17.17	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
428.0193	47.15	-14.22	32.93	46.00	-13.07	Vertical
866.0879	43.40	-6.69	36.71	46.00	-9.29	
962.1623	41.71	-5.23	36.48	54.00	-17.52	
370.7022	46.36	-15.85	30.51	46.00	-15.49	Horizontal
734.4913	47.99	-8.98	39.01	46.00	-6.99	
866.0878	45.38	-6.69	38.69	46.00	-7.31	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
428.0192	48.00	-14.22	33.78	46.00	-12.22	Vertical
866.0878	44.17	-6.69	37.48	46.00	-8.52	
962.1622	41.43	-5.23	36.20	54.00	-17.80	
374.6225	43.89	-15.82	28.07	46.00	-17.93	Horizontal
866.0878	44.98	-6.69	38.29	46.00	-7.71	
962.1622	41.22	-5.23	35.99	54.00	-18.01	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11g Channel Middle 2437MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
428.0192	46.89	-14.22	32.67	46.00	-13.33	Vertical
866.0878	44.47	-6.69	37.78	46.00	-8.22	
962.1622	41.25	-5.23	36.02	54.00	-17.98	
372.0045	44.46	-15.84	28.62	46.00	-17.38	Horizontal
866.0879	44.41	-6.69	37.72	46.00	-8.28	
962.1623	40.89	-5.23	35.66	54.00	-18.34	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**