

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)		Factor(dB) Corr.	Result (dBμV/m)		Limit (dBμV/m)	Margin (dB)	Polarization
	QP			QP				
-	-	-	-	-	-	-	-	X
-	-	-	-	-	-	-	-	Y
-	-	-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)		Factor Corr. (dB)	Result (dBμV/m)		Limit (dBμV/m)	Margin (dB)	Polarization
	QP			QP				
428.0192	46.92		-14.22	32.70		46.00	-13.30	Vertical
866.0878	43.79		-6.69	37.10		46.00	-8.90	
962.1622	40.08		-5.23	34.85		54.00	-19.15	
396.2414	44.57		-15.67	28.90		46.00	-17.10	Horizontal
866.0878	45.02		-6.69	38.33		46.00	-7.67	
962.1622	41.52		-5.23	36.29		54.00	-17.71	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Low 2412MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.89	-14.15	34.74	46.00	-11.26	Vertical
866.0879	43.81	-6.69	37.12	46.00	-8.88	
962.1623	41.77	-5.23	36.54	54.00	-17.46	
385.2805	46.24	-15.77	30.47	46.00	-15.53	Horizontal
824.5968	47.46	-7.39	40.07	46.00	-5.93	
866.0879	45.07	-6.69	38.38	46.00	-7.62	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Middle 2437MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.10	-14.10	35.00	46.00	-11.00	Vertical
866.0878	44.10	-6.69	37.41	46.00	-8.59	
962.1622	41.77	-5.23	36.54	54.00	-17.46	
674.6225	43.97	-15.82	28.15	46.00	-17.85	Horizontal
813.1115	49.49	-7.55	41.64	46.00	-4.36	
866.0879	44.42	-6.69	37.73	46.00	-8.27	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel High 2462MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.86	-14.15	34.71	46.00	-11.29	Vertical
866.0879	44.66	-6.69	37.97	46.00	-8.03	
962.1623	41.11	-5.23	35.88	54.00	-18.12	
370.7022	43.85	-15.85	28.00	46.00	-18.00	Horizontal
866.0878	45.27	-6.69	38.58	46.00	-7.42	
962.1622	41.02	-5.23	35.79	54.00	-18.21	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel Low 2422MHz</u> <u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.47	-14.15	34.32	46.00	-11.68	Vertical
866.0878	43.68	-6.69	36.99	46.00	-9.01	
962.1622	41.77	-5.23	36.54	54.00	-17.46	
364.2595	43.58	-15.88	27.70	46.00	-18.30	Horizontal
866.0879	44.94	-6.69	38.25	46.00	-7.75	
962.1623	40.97	-5.23	35.74	54.00	-18.26	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Middle 2437MHz</u>		
Test Mode:	<u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.20	-14.10	35.10	46.00	-10.90	Vertical
866.0878	44.60	-6.69	37.91	46.00	-8.09	
962.1622	41.24	-5.23	36.01	54.00	-17.99	
368.1116	46.85	-15.86	30.99	46.00	-15.01	Horizontal
866.0878	44.89	-6.69	38.20	46.00	-7.80	
962.1622	40.38	-5.23	35.15	54.00	-18.85	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>March 25 & April 11, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>HDMI WI-FI Smart TV Stick</u>	Humidity:	<u>50%</u>
Model No.:	<u>ST-W</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel High 2452MHz</u> <u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.39	-14.10	35.29	46.00	-10.71	Vertical
866.0878	43.95	-6.69	37.26	46.00	-8.74	
962.1622	41.30	-5.23	36.07	54.00	-17.93	
365.5391	46.17	-15.88	30.29	46.00	-15.71	Horizontal
866.0879	44.79	-6.69	38.10	46.00	-7.90	
962.1623	40.95	-5.23	35.72	54.00	-18.28	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**
- 2. *: Denotes restricted band of operation.**
- 3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #297	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 8/44/00
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

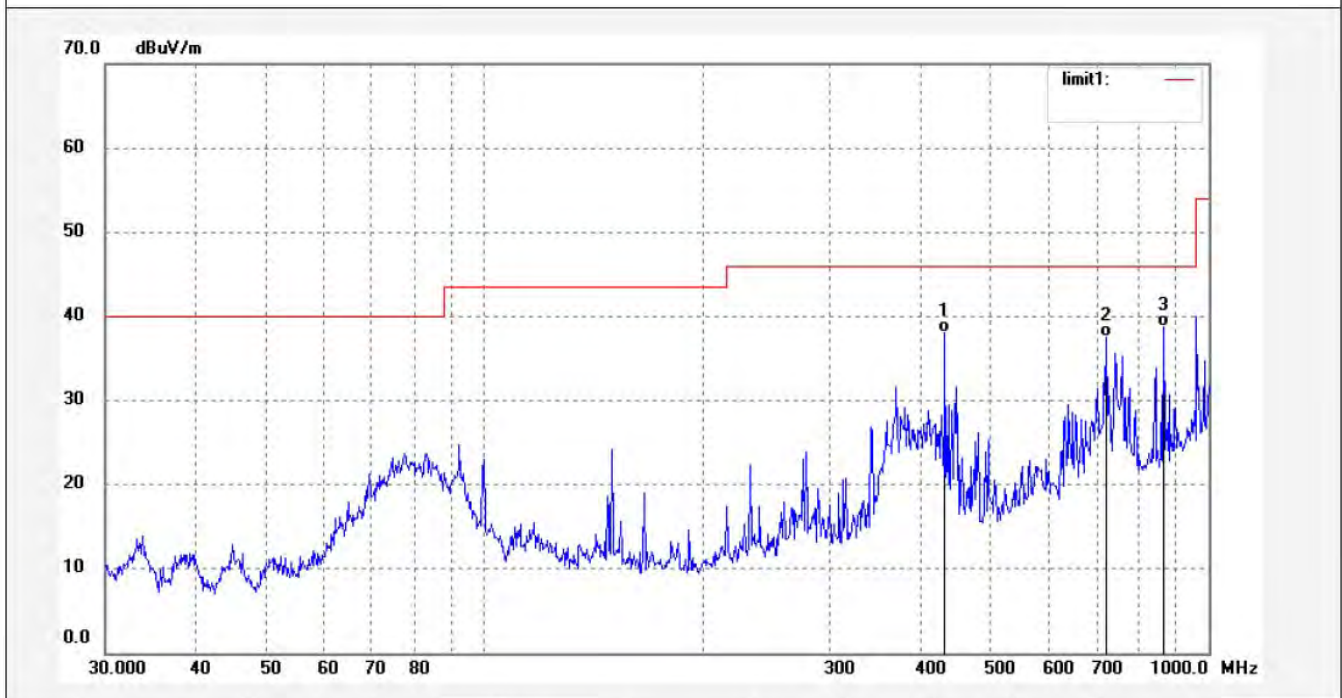

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	432.5457	53.19	-15.10	38.09	46.00	-7.91	QP			
2	721.7259	46.75	-9.28	37.47	46.00	-8.53	QP			
3	866.0878	45.47	-6.69	38.78	46.00	-7.22	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #298	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 8/48/14
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

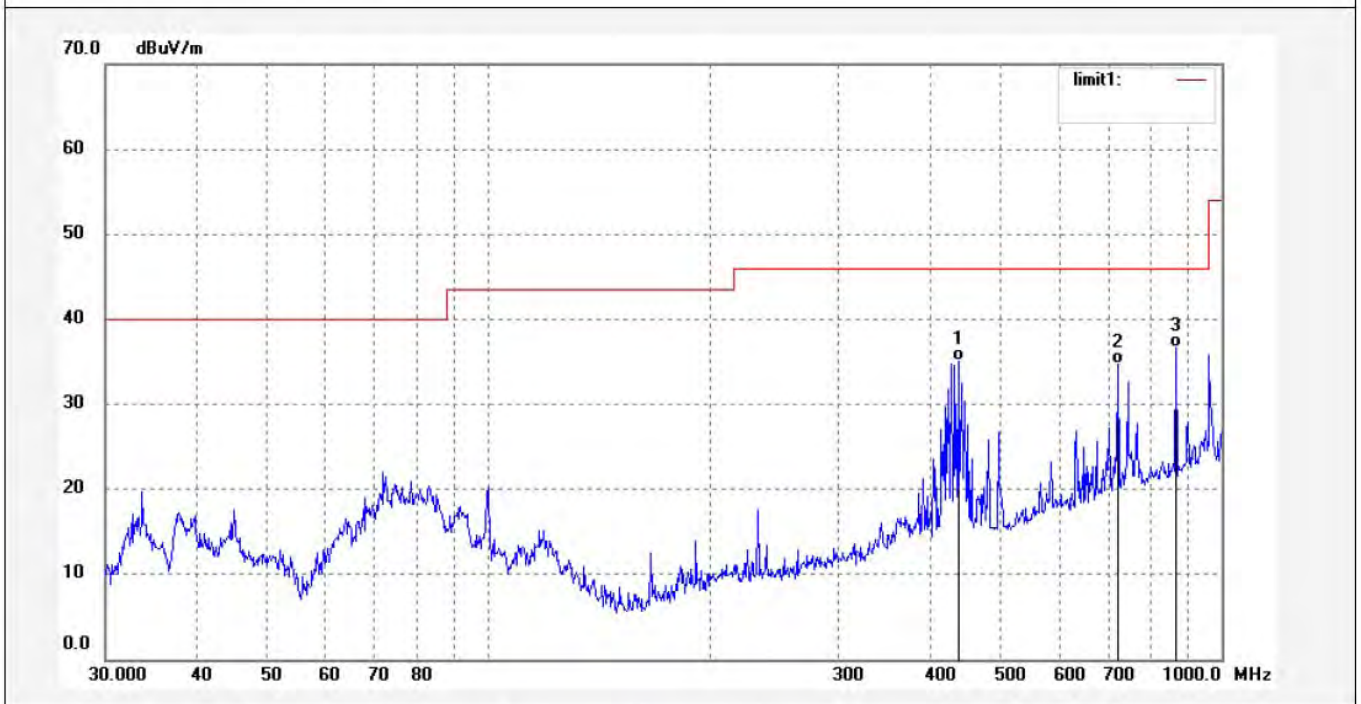

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	437.1199	49.23	-14.10	35.13	46.00	-10.87	QP			
2	721.7259	44.08	-9.28	34.80	46.00	-11.20	QP			
3	866.0879	43.31	-6.69	36.62	46.00	-9.38	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4060

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:17:27

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

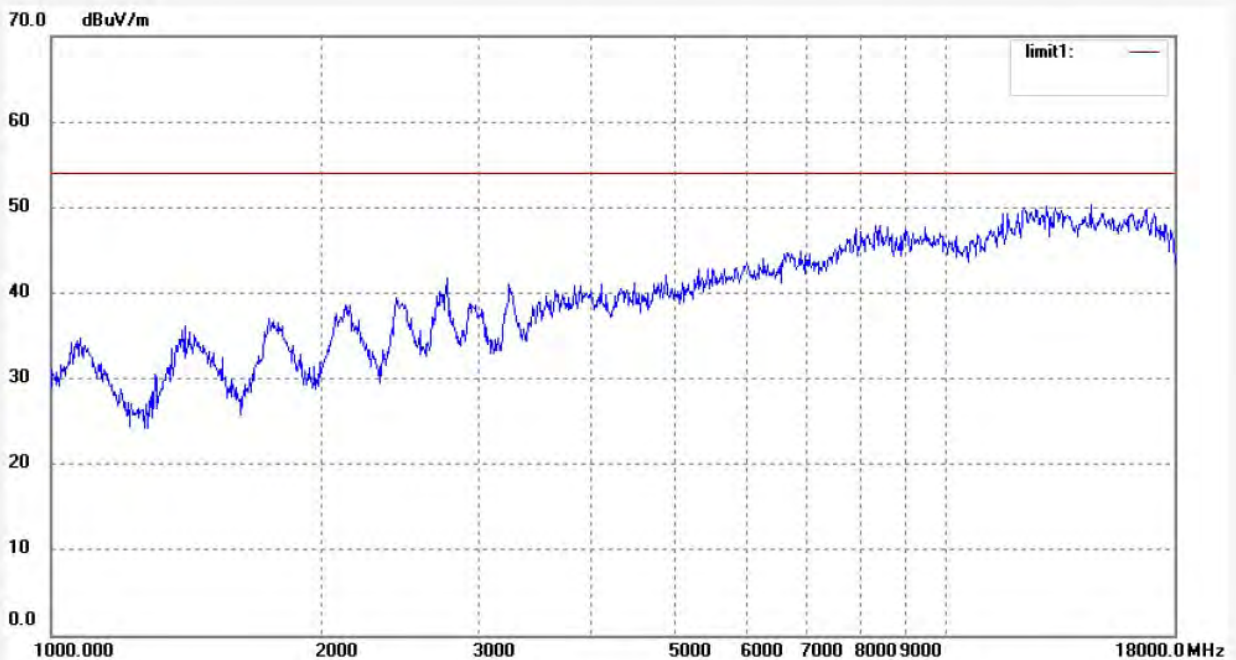

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4061	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:20:49
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

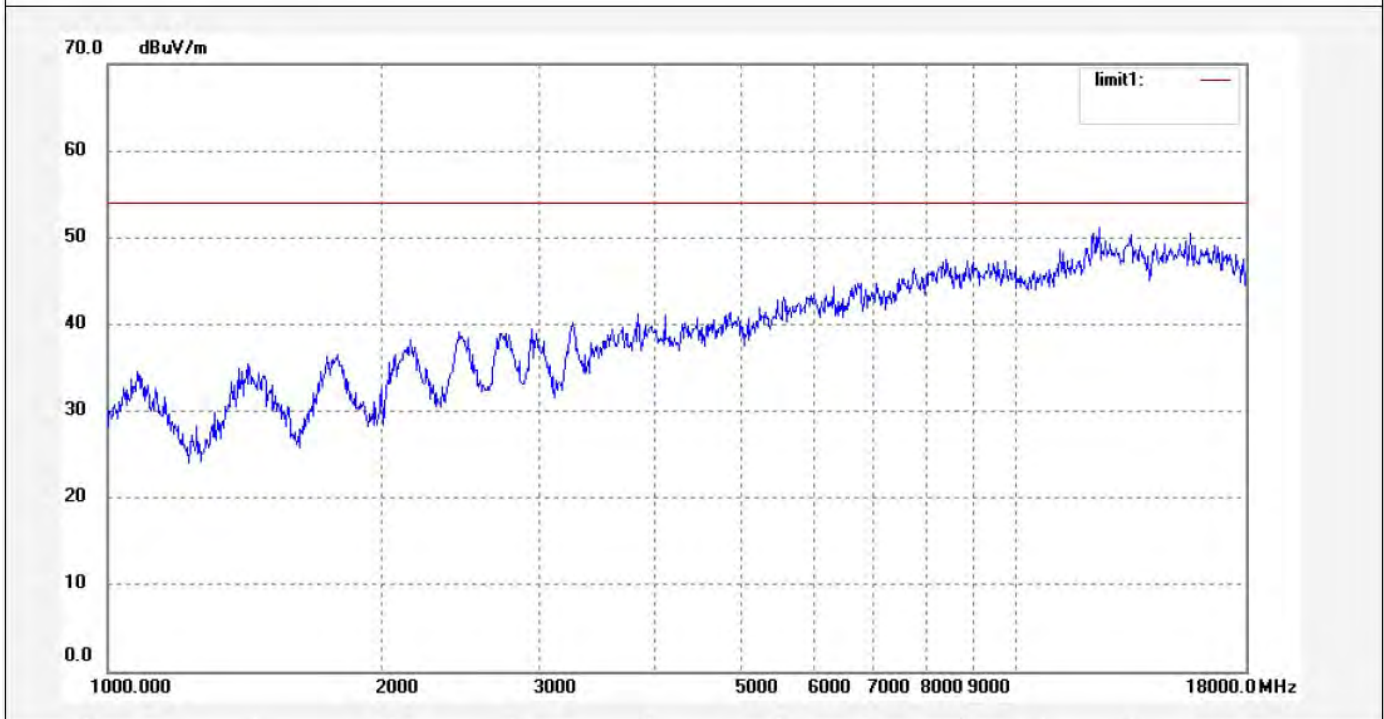

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #345	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/33/26
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

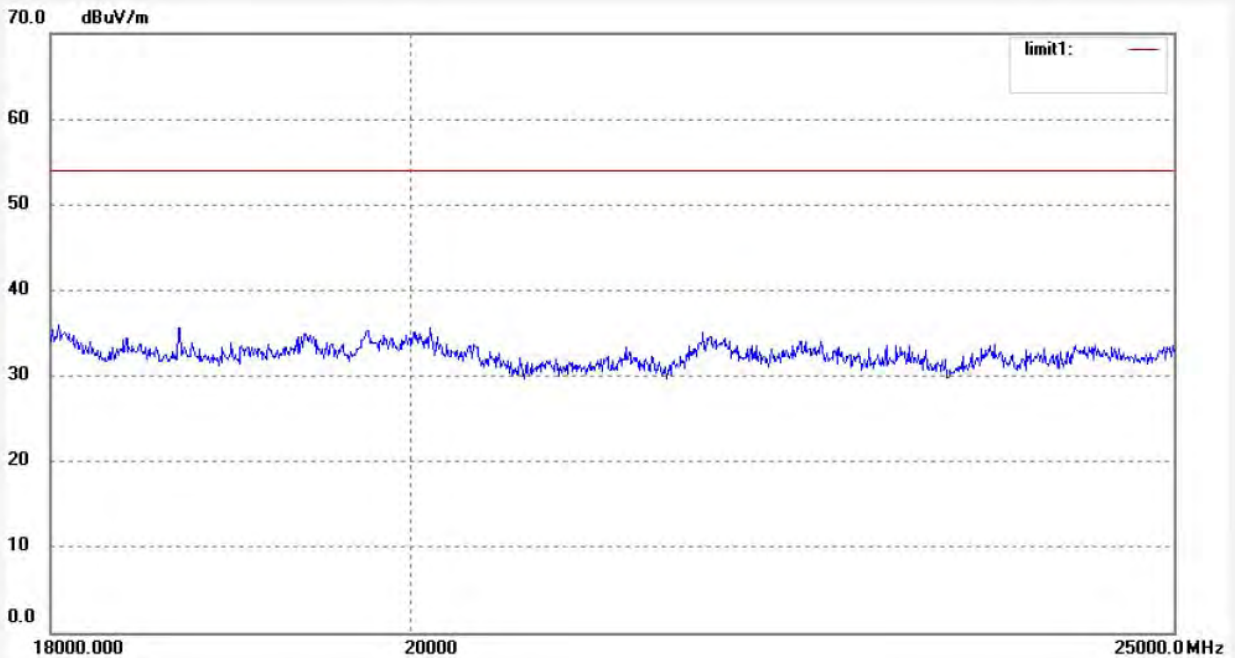

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #346	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/35/51
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

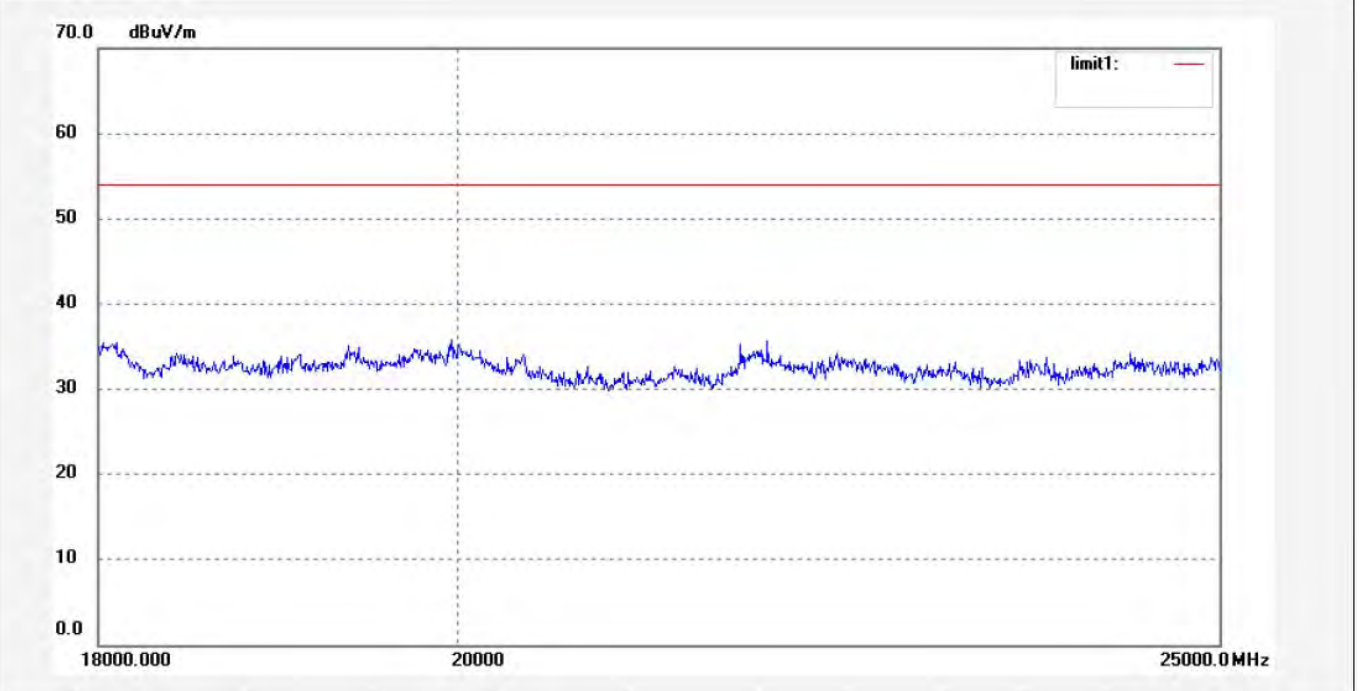

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #300

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/55/05

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

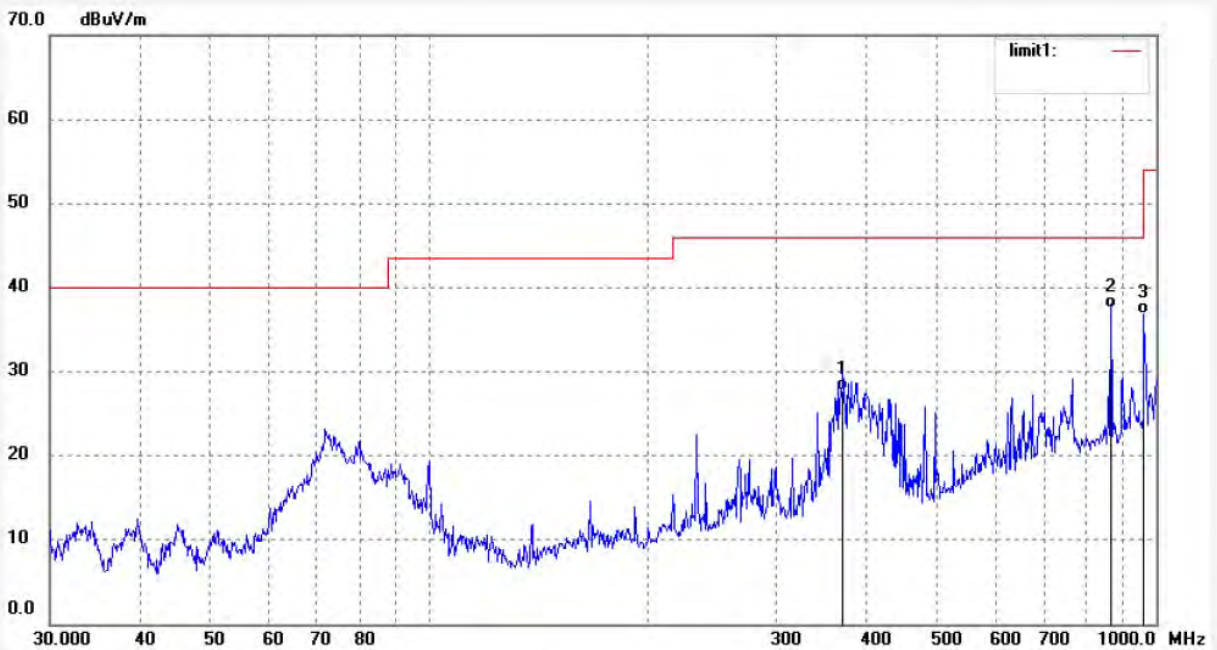

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	370.7022	43.59	-15.85	27.74	46.00	-18.26	QP			
2	866.0878	44.30	-6.69	37.61	46.00	-8.39	QP			
3	962.1622	42.06	-5.23	36.83	54.00	-17.17	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #299

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/52/07

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

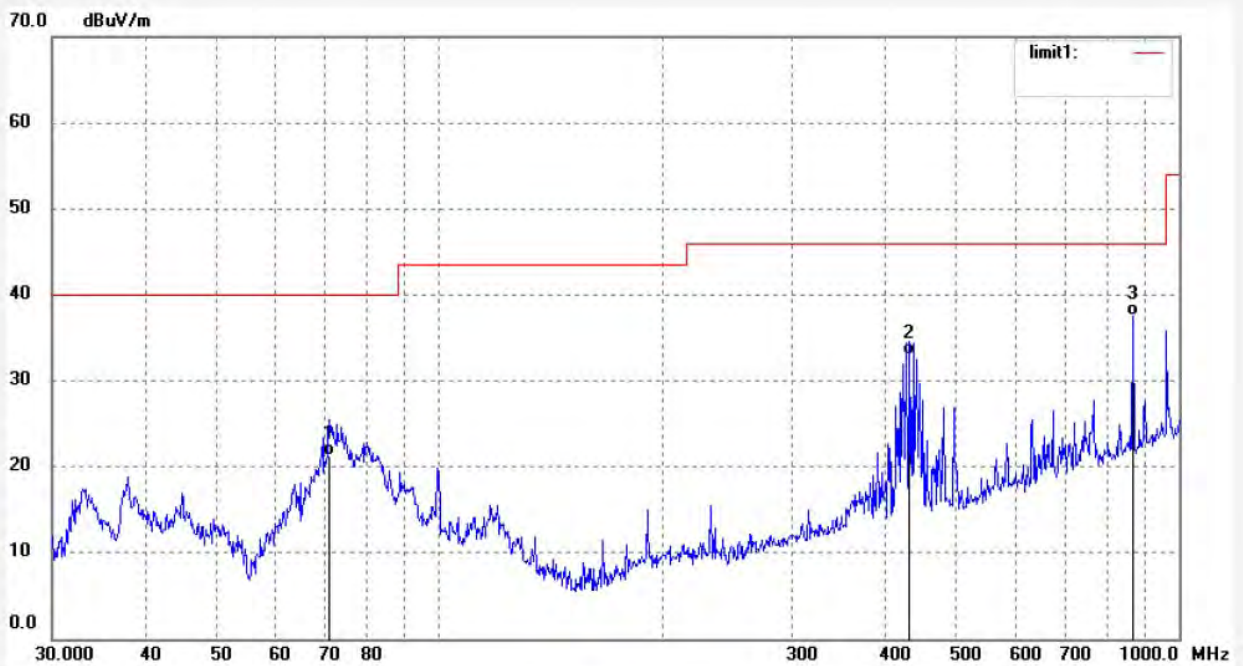

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	71.0802	43.50	-22.31	21.19	40.00	-18.81	QP			
2	432.5457	47.20	-14.15	33.05	46.00	-12.95	QP			
3	866.0879	44.18	-6.69	37.49	46.00	-8.51	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4063	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:28:30
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

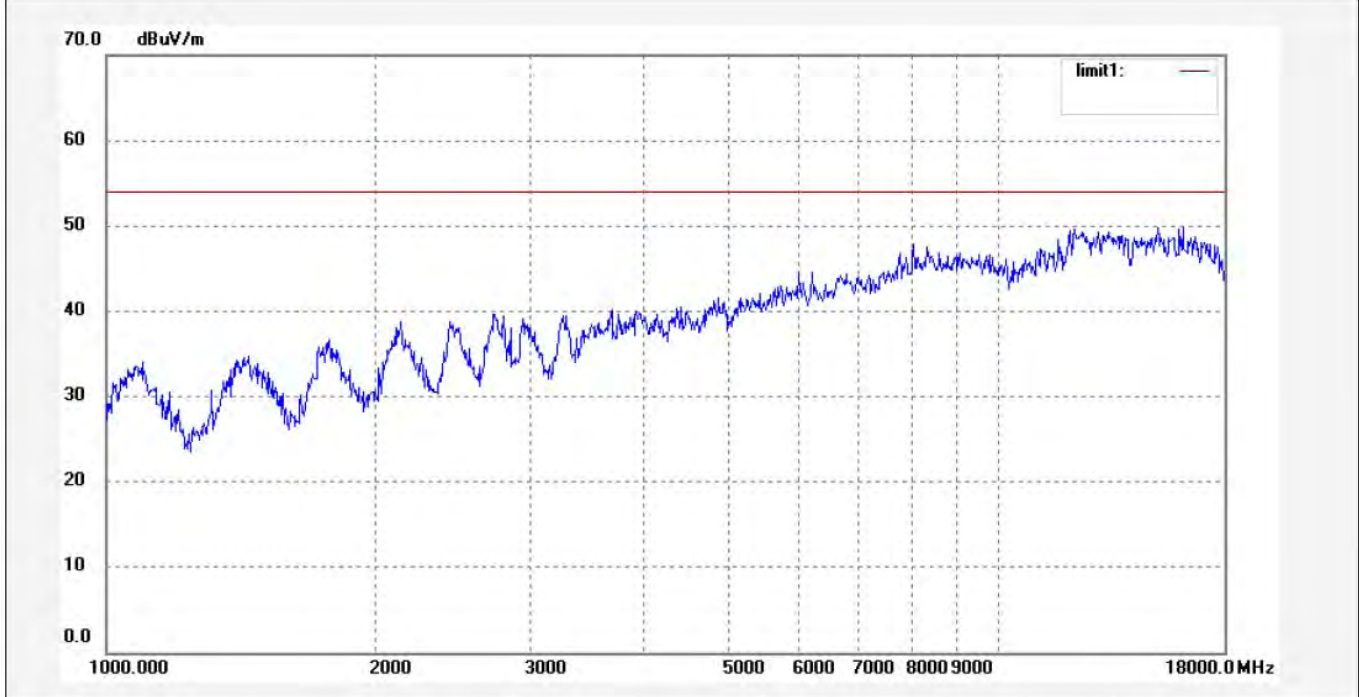

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4062	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:23:08
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

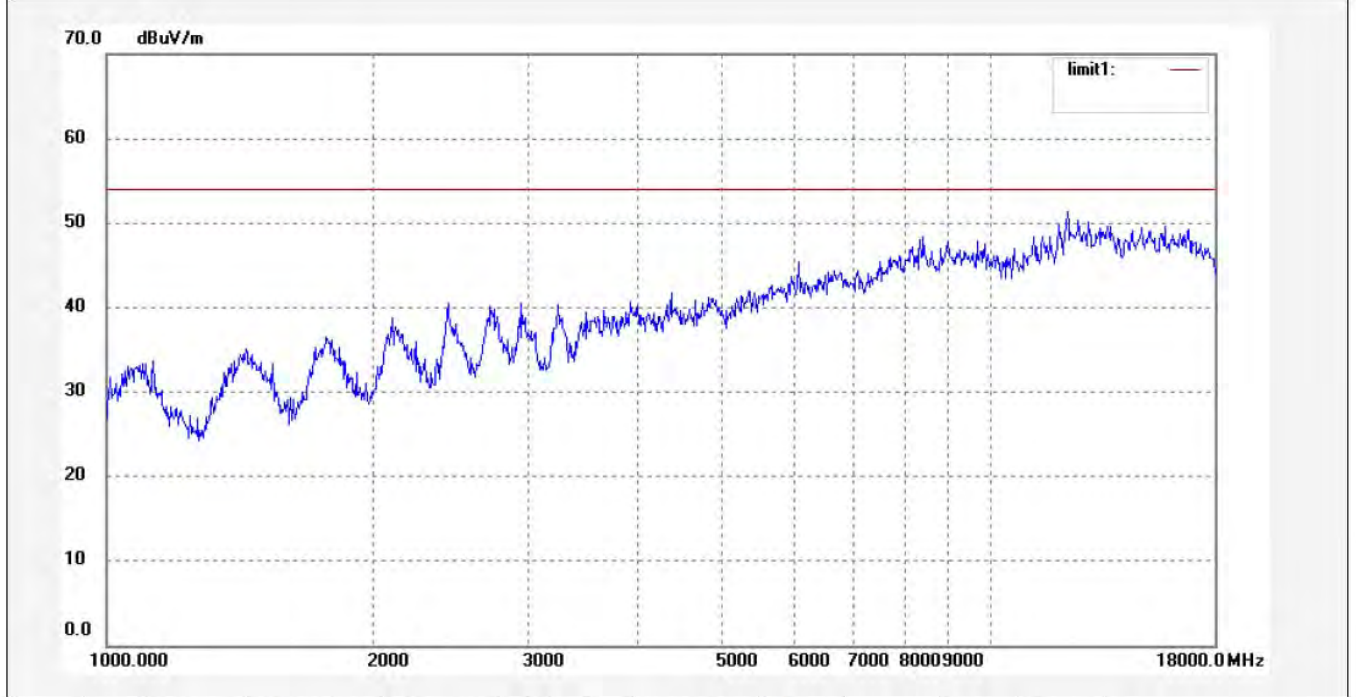

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #348	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/42/27
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

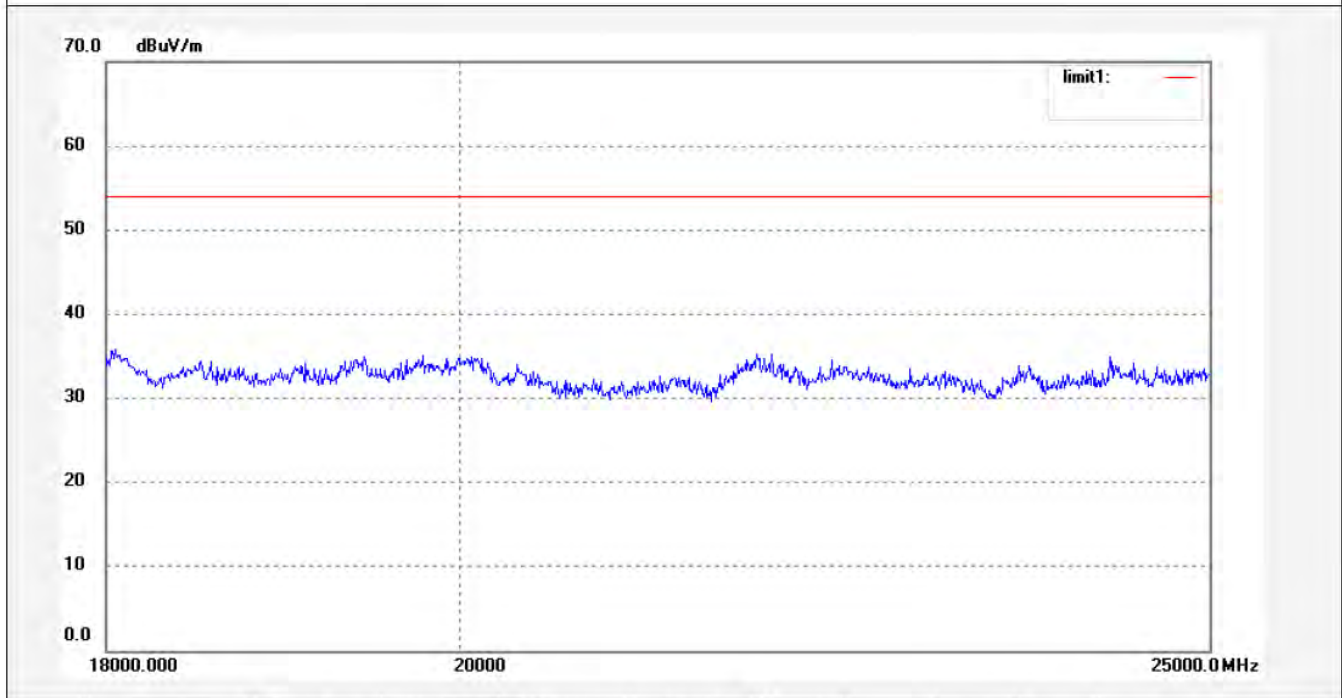

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #347	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/38/06
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

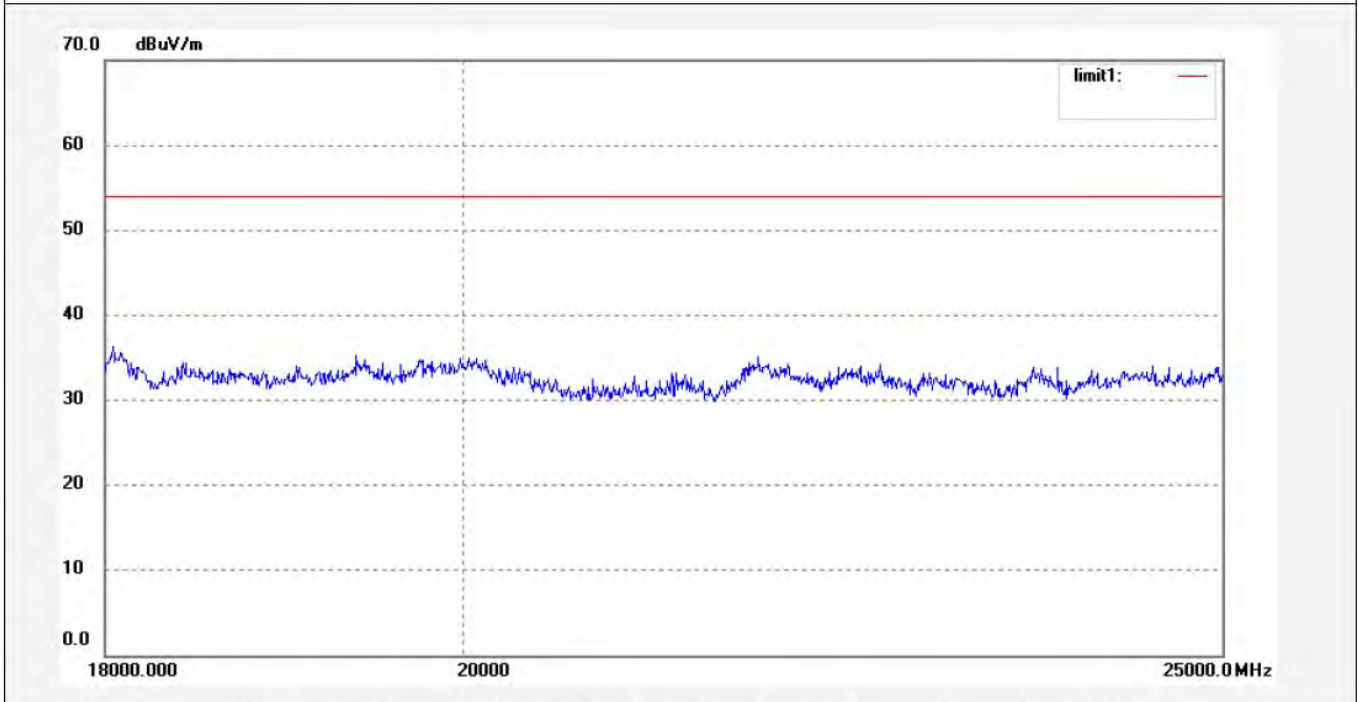

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #301	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 8/59/41
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

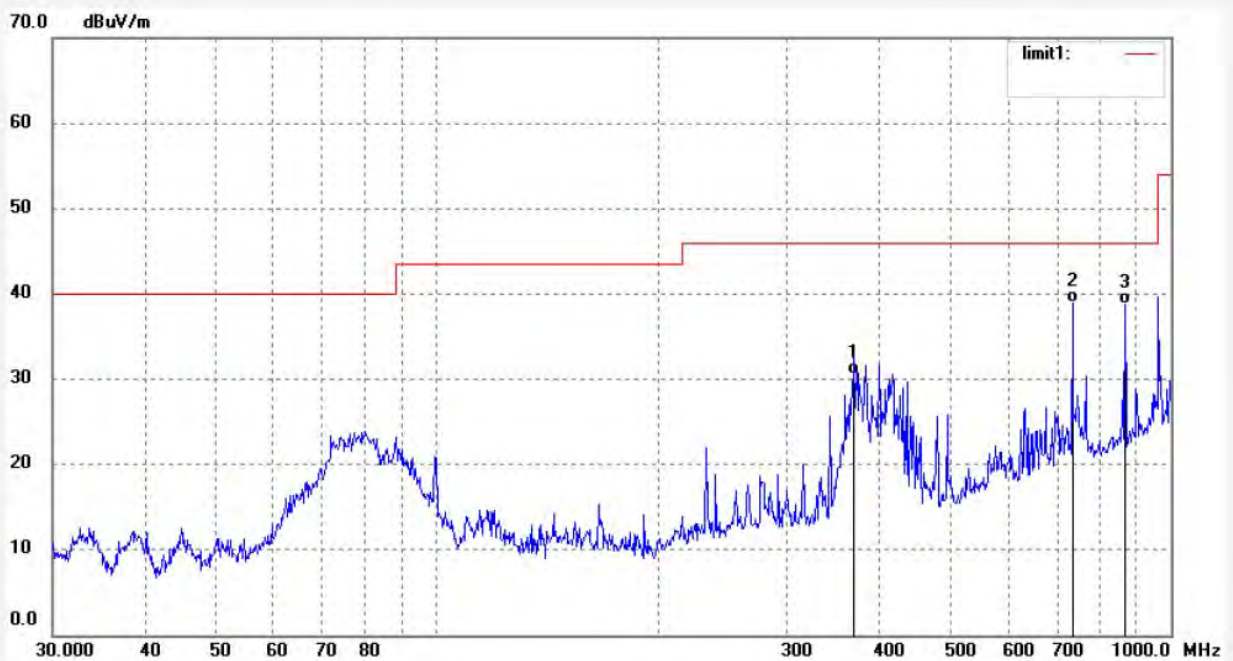

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	370.7022	46.36	-15.85	30.51	46.00	-15.49	QP			
2	734.4913	47.99	-8.98	39.01	46.00	-6.99	QP			
3	866.0878	45.38	-6.69	38.69	46.00	-7.31	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #302	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/02/41
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

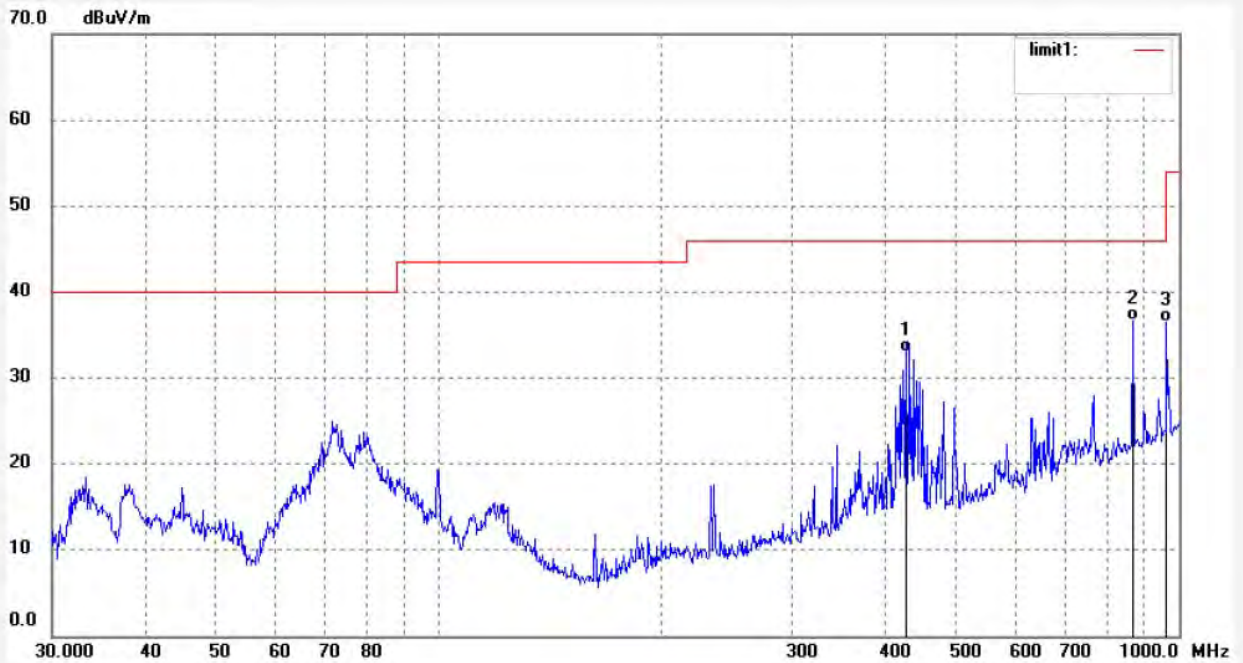

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0193	47.15	-14.22	32.93	46.00	-13.07	QP			
2	866.0879	43.40	-6.69	36.71	46.00	-9.29	QP			
3	962.1623	41.71	-5.23	36.48	54.00	-17.52	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4064	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:32:50
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

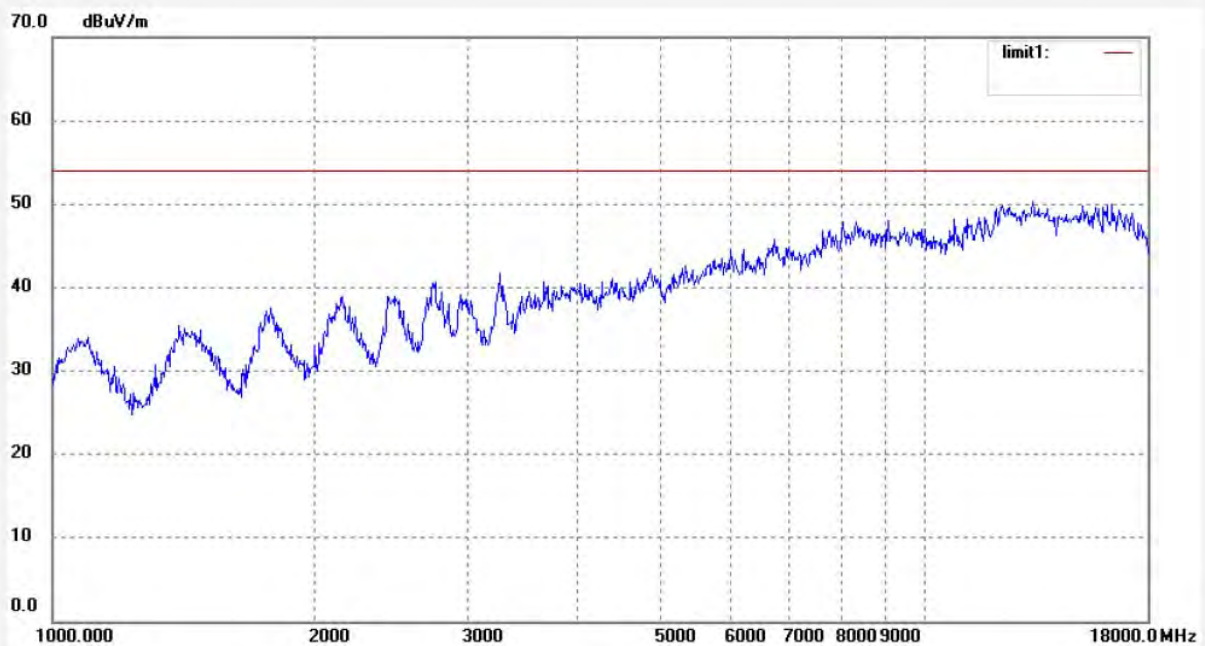

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4065	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:35:15
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

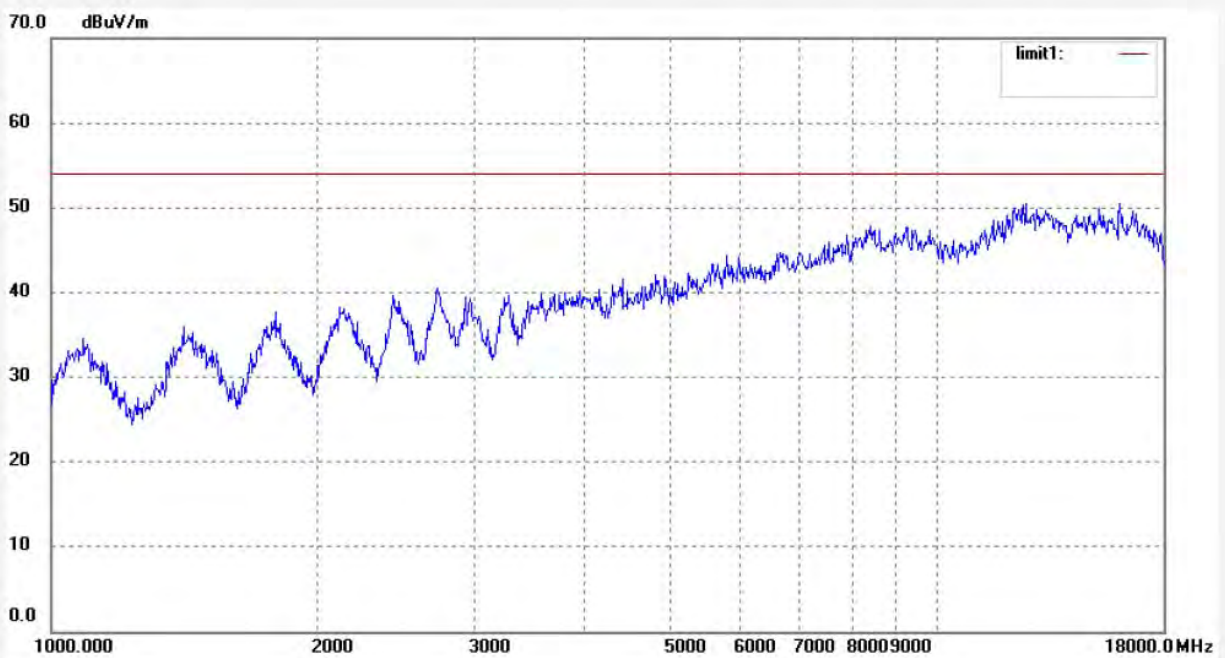

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #349	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/45/50
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

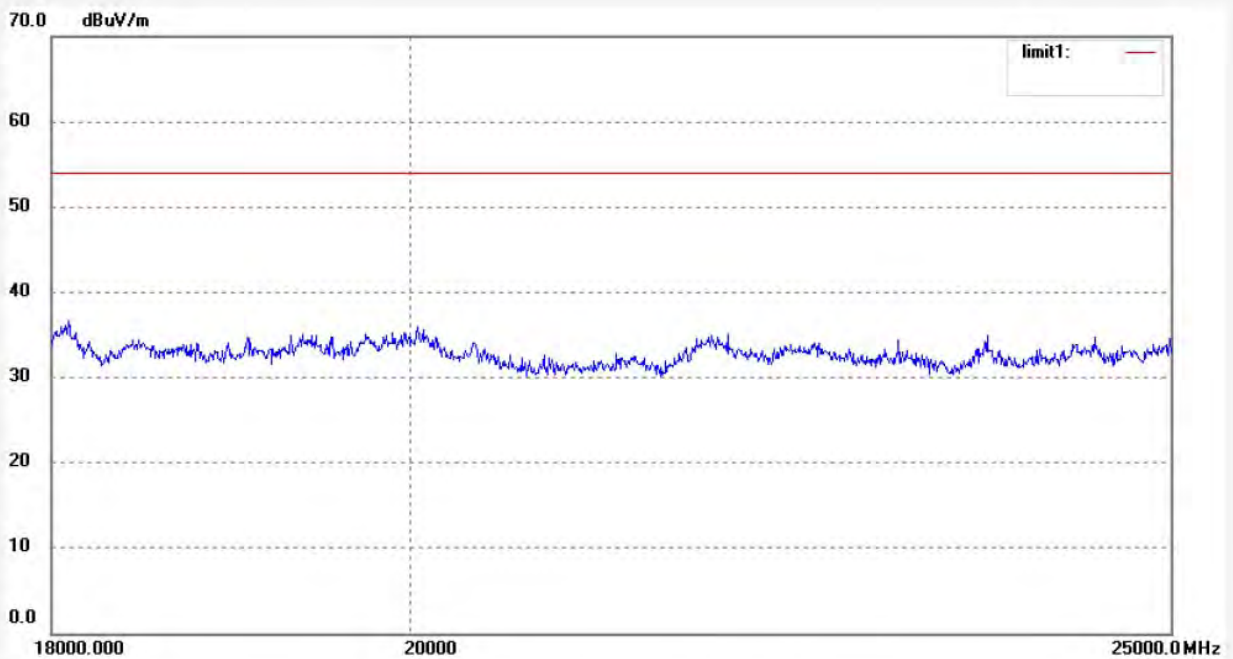

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #350	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/48/09
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

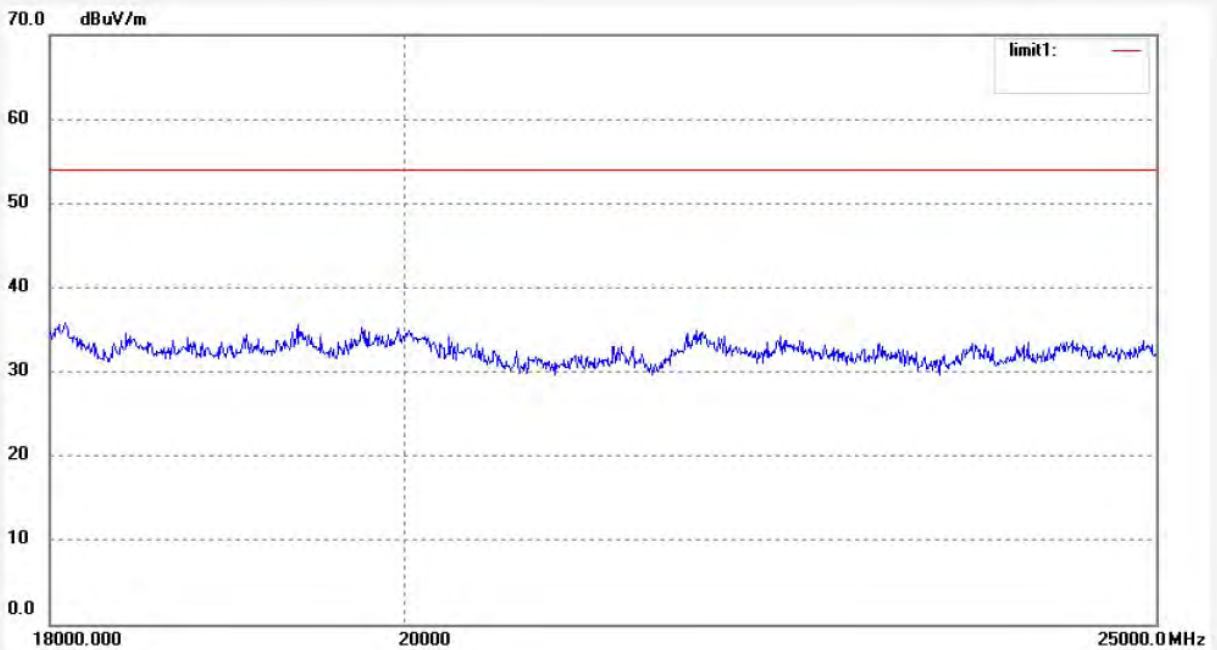

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #304	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/12/22
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

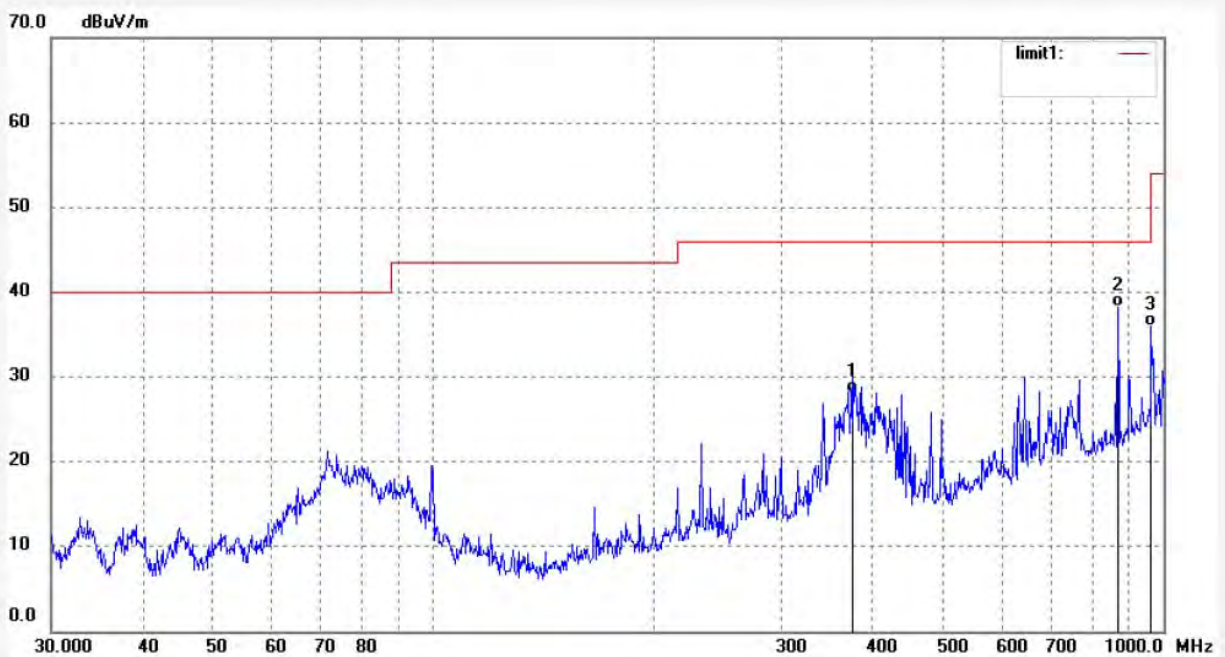

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	374.6225	43.89	-15.82	28.07	46.00	-17.93	QP			
2	866.0878	44.98	-6.69	38.29	46.00	-7.71	QP			
3	962.1622	41.22	-5.23	35.99	54.00	-18.01	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #303	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/05/17
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

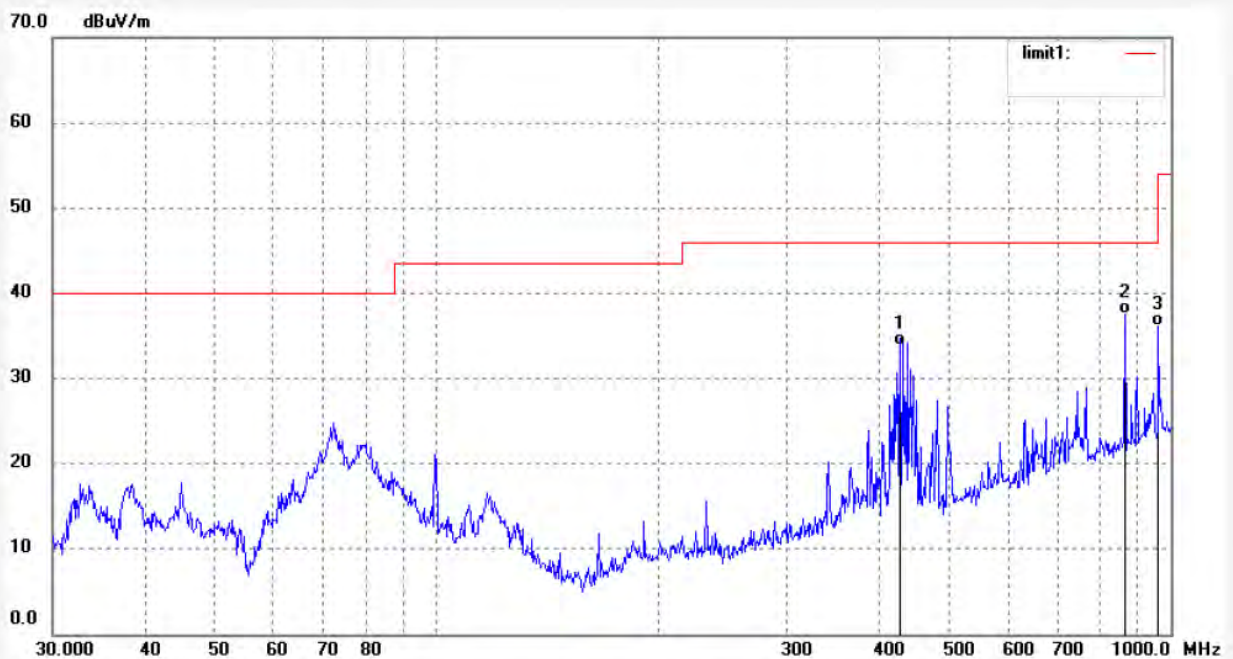

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	48.00	-14.22	33.78	46.00	-12.22	QP			
2	866.0878	44.17	-6.69	37.48	46.00	-8.52	QP			
3	962.1622	41.43	-5.23	36.20	54.00	-17.80	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4067	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:43:24
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

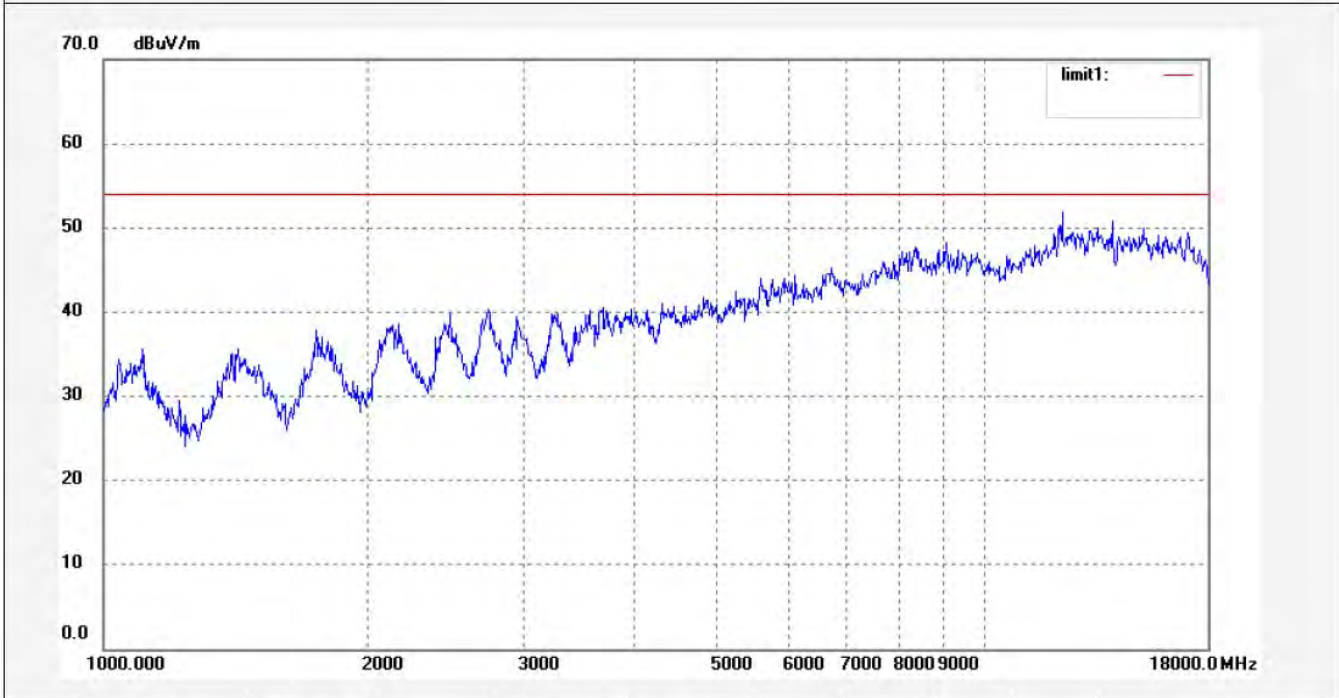

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4066

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:39:53

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

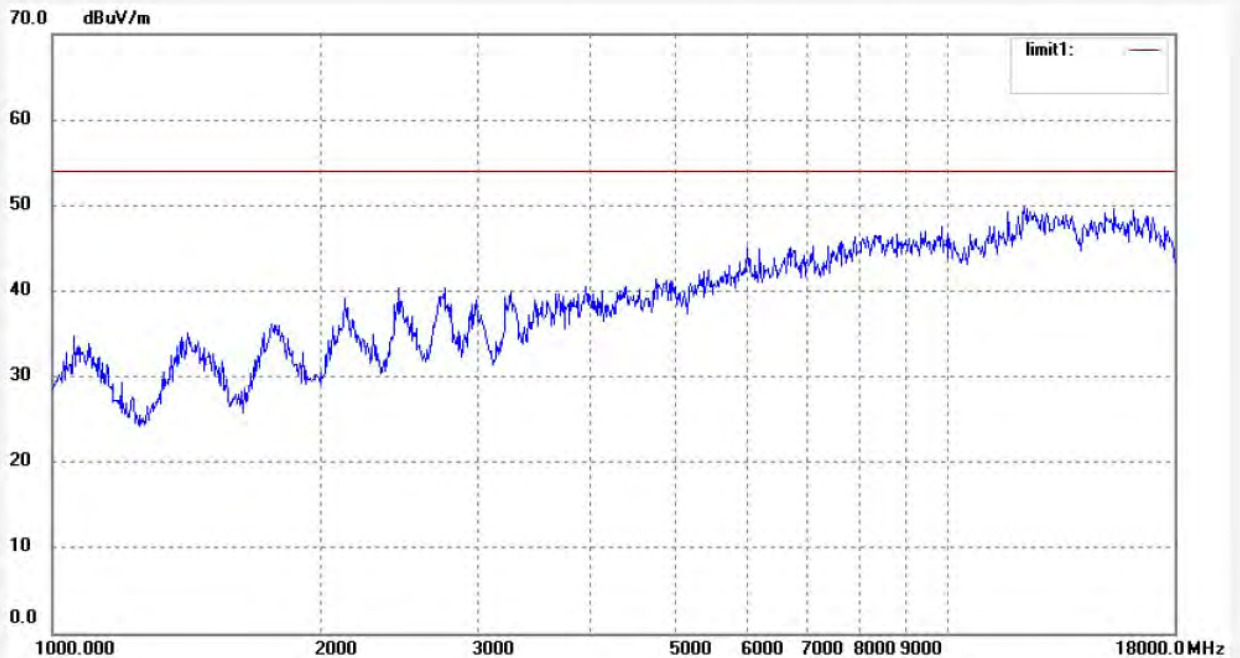

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #352	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/55/51
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

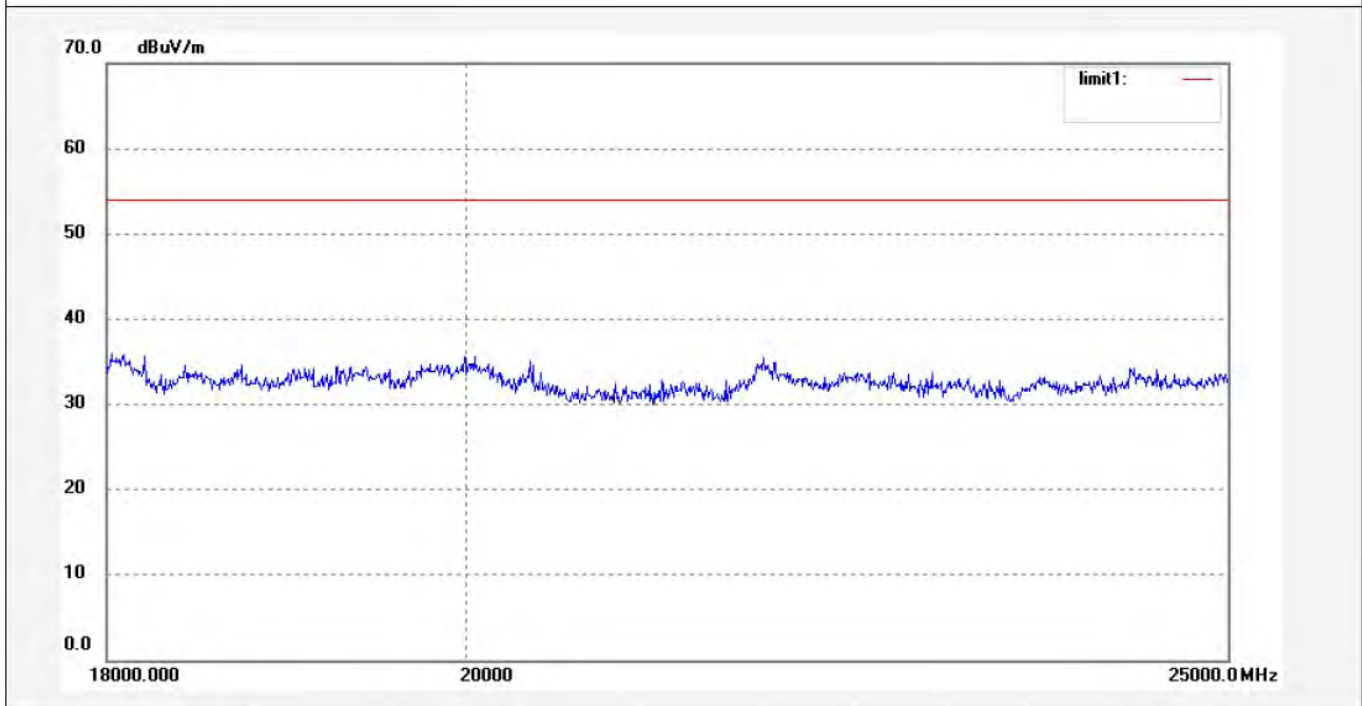

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #351	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/51/28
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

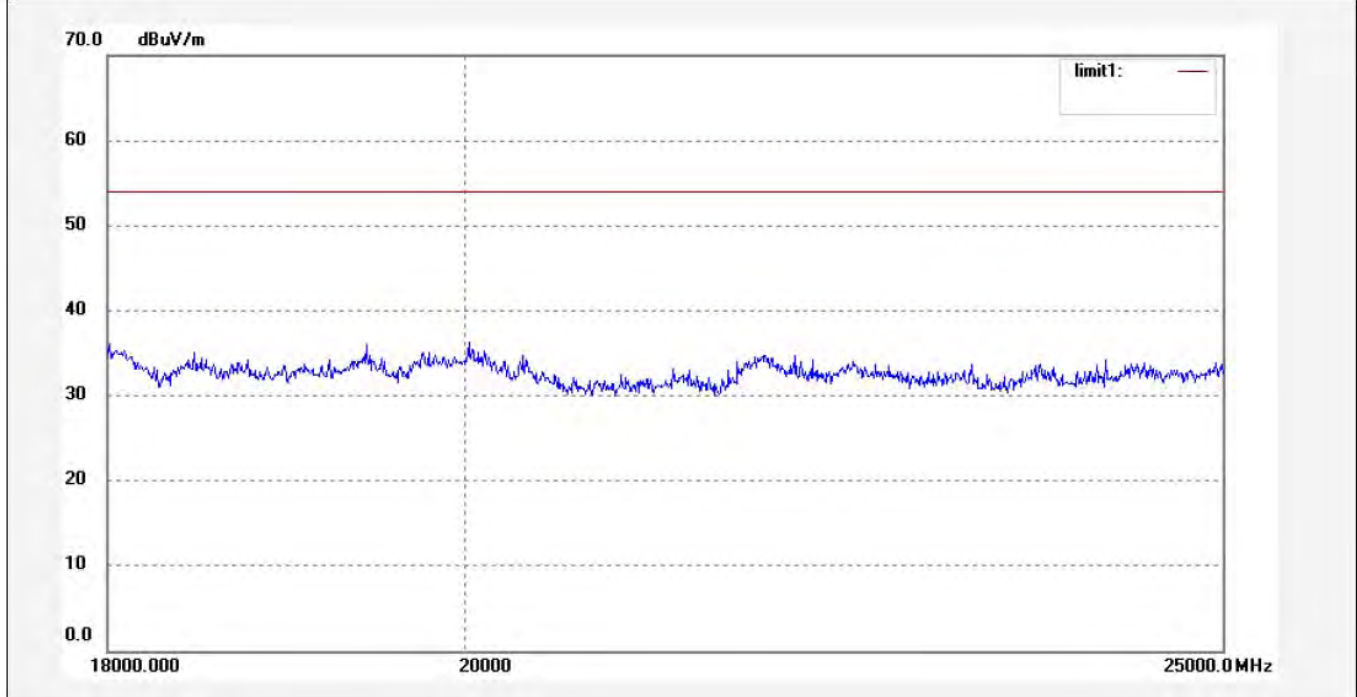

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #305	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/15/03
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	372.0045	44.46	-15.84	28.62	46.00	-17.38	QP			
2	866.0879	44.41	-6.69	37.72	46.00	-8.28	QP			
3	962.1623	40.89	-5.23	35.66	54.00	-18.34	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #306	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/18/46
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

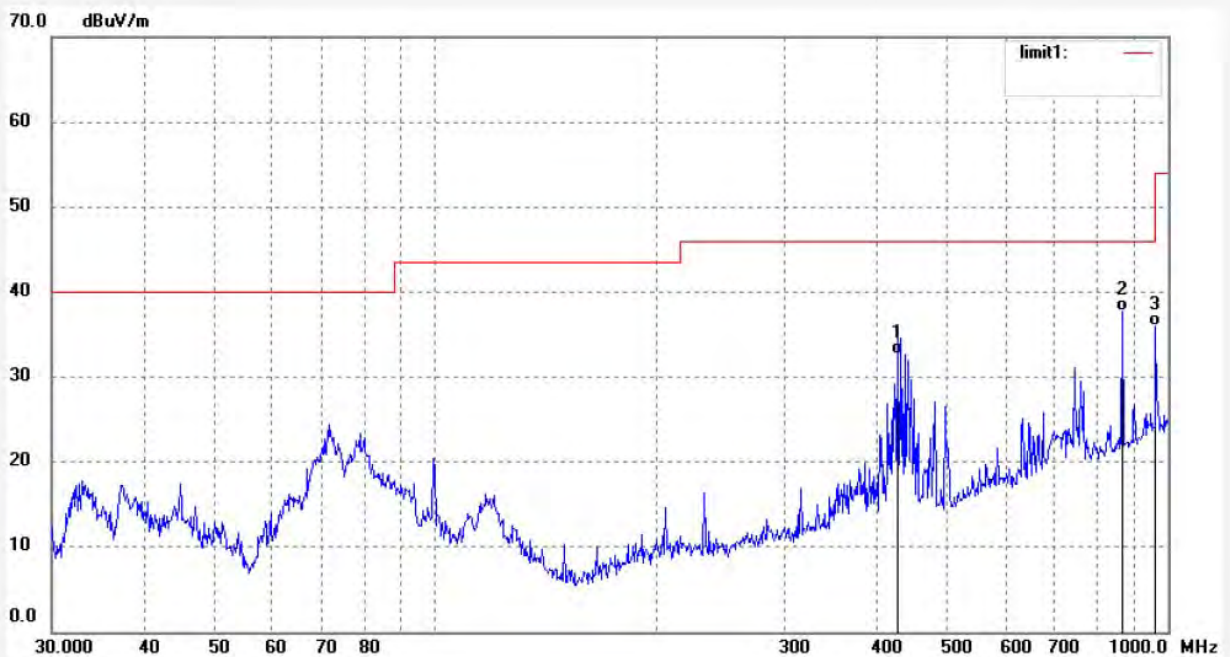

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	46.89	-14.22	32.67	46.00	-13.33	QP			
2	866.0878	44.47	-6.69	37.78	46.00	-8.22	QP			
3	962.1622	41.25	-5.23	36.02	54.00	-17.98	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4068	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:47:45
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

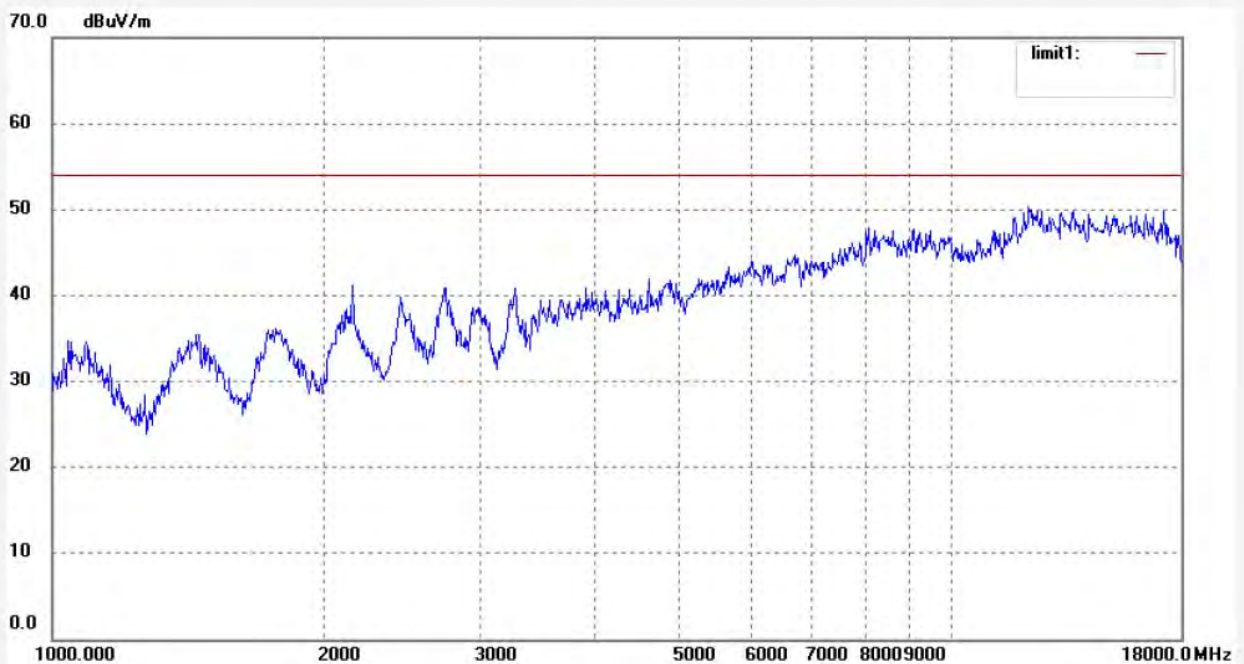

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4069	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:50:08
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

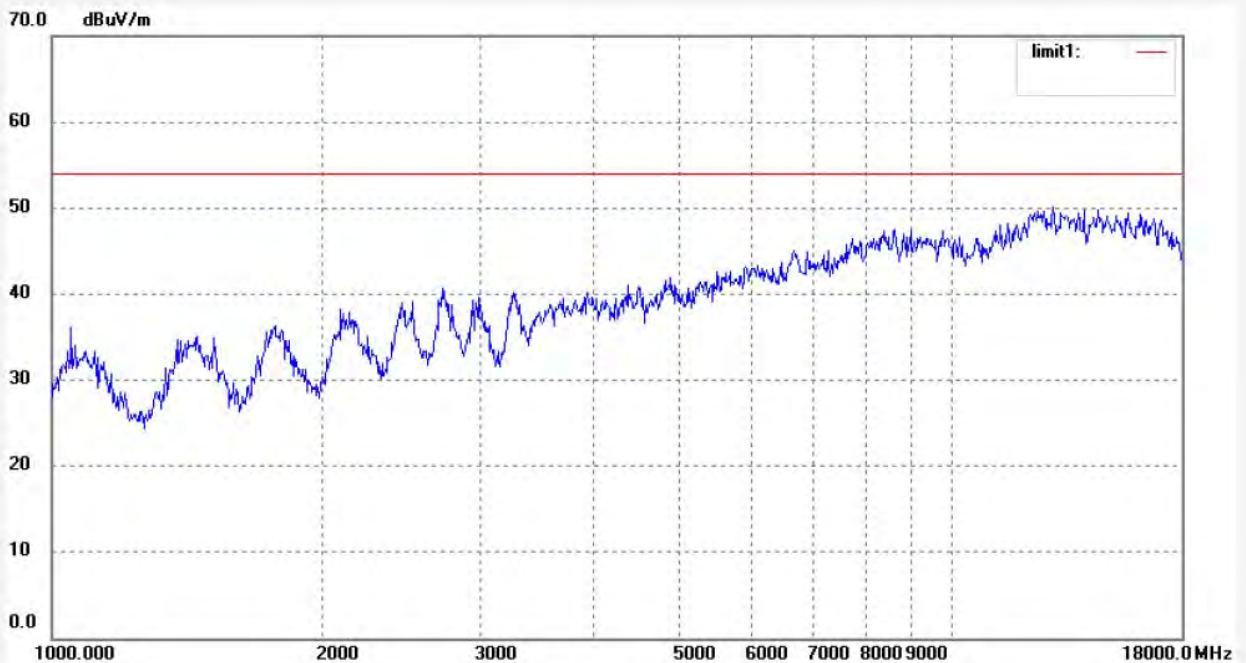

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #353	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10/58/10
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

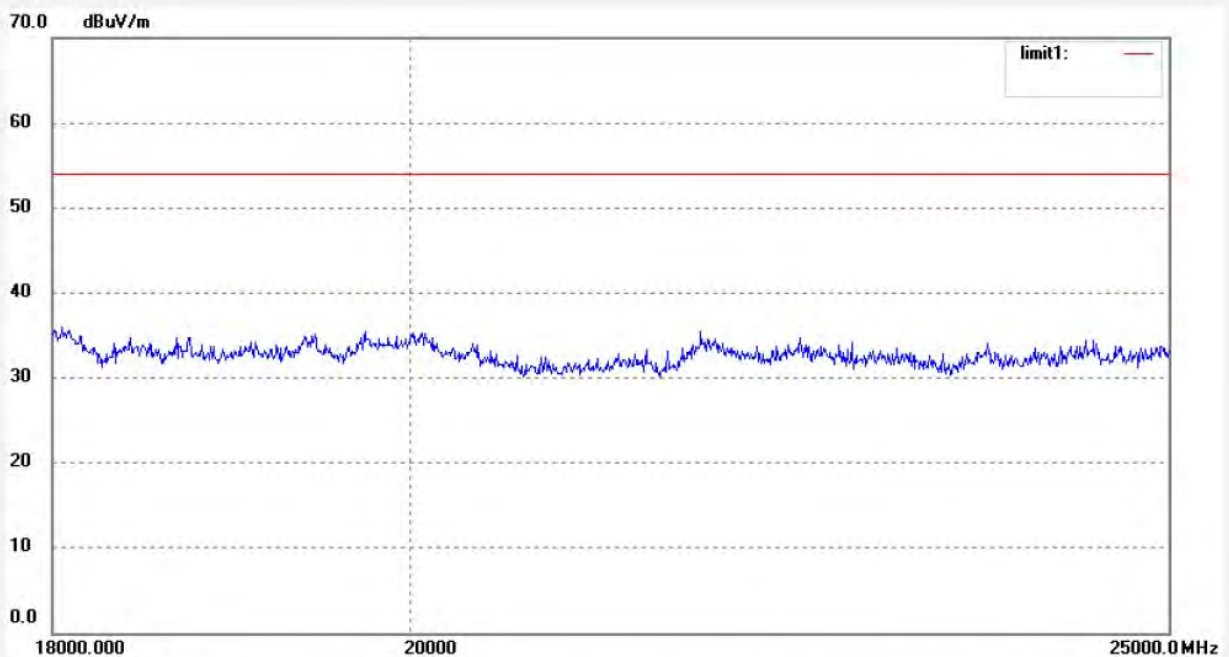

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #354	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/02/36
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

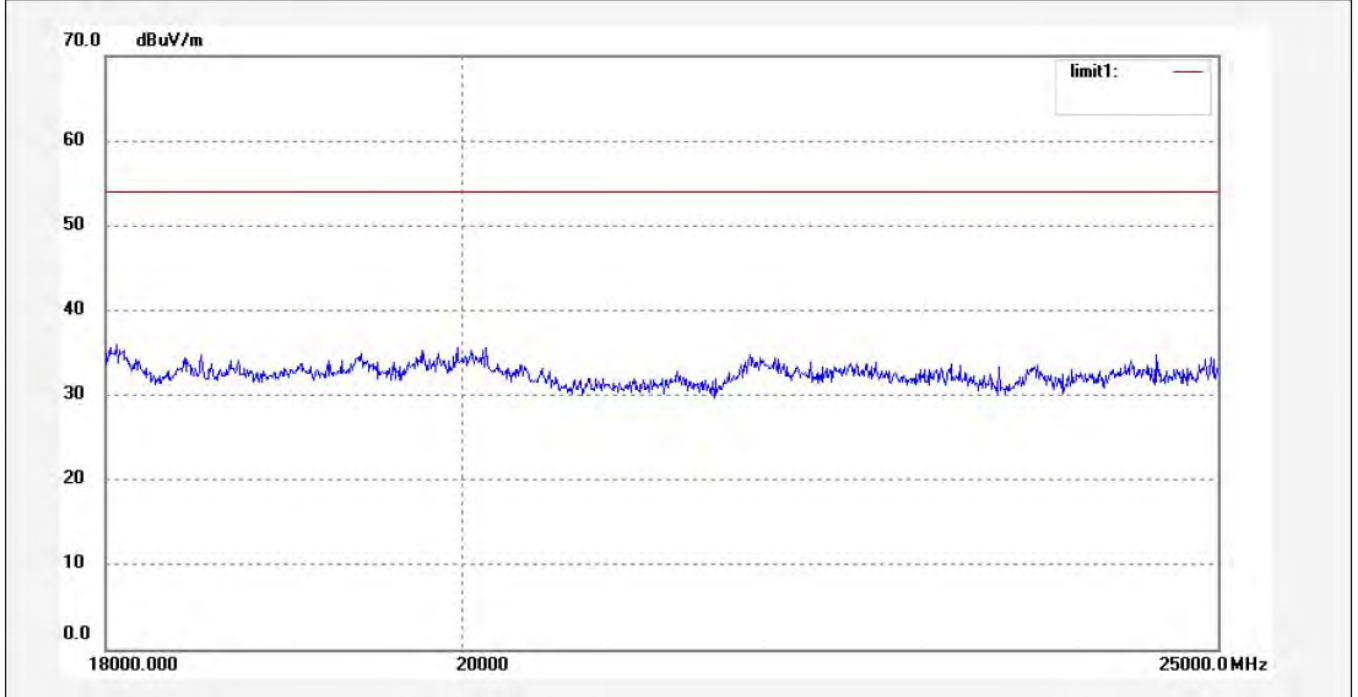

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #308	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/26/16
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

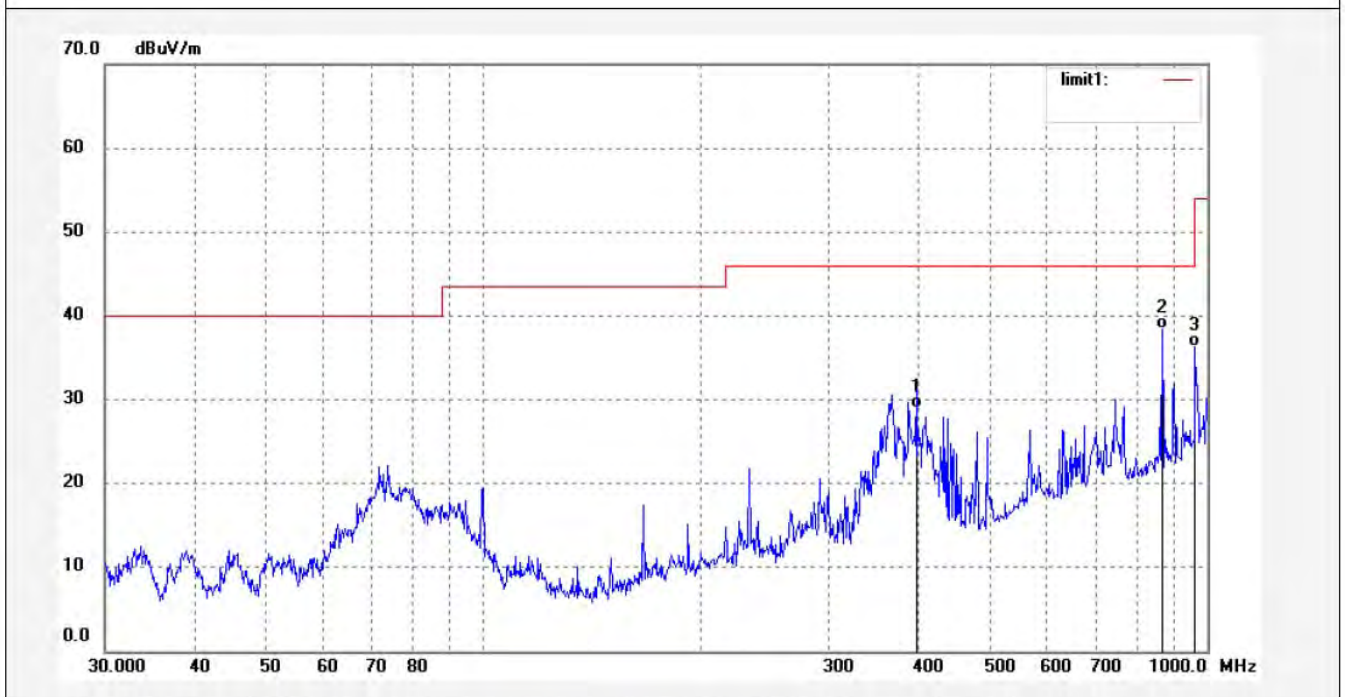

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	44.57	-15.67	28.90	46.00	-17.10	QP			
2	866.0878	45.02	-6.69	38.33	46.00	-7.67	QP			
3	962.1622	41.52	-5.23	36.29	54.00	-17.71	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #307	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/23/24
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

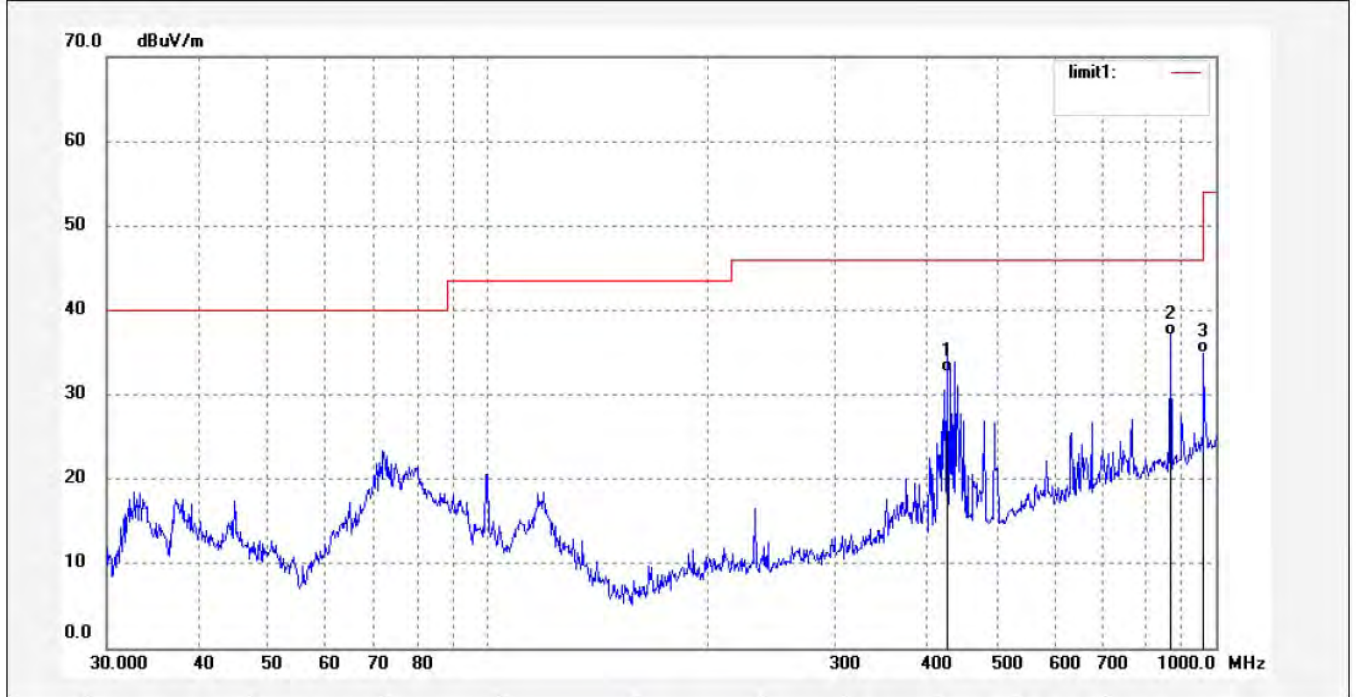

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	46.92	-14.22	32.70	46.00	-13.30	QP			
2	866.0878	43.79	-6.69	37.10	46.00	-8.90	QP			
3	962.1622	40.08	-5.23	34.85	54.00	-19.15	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4071	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:56:03
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

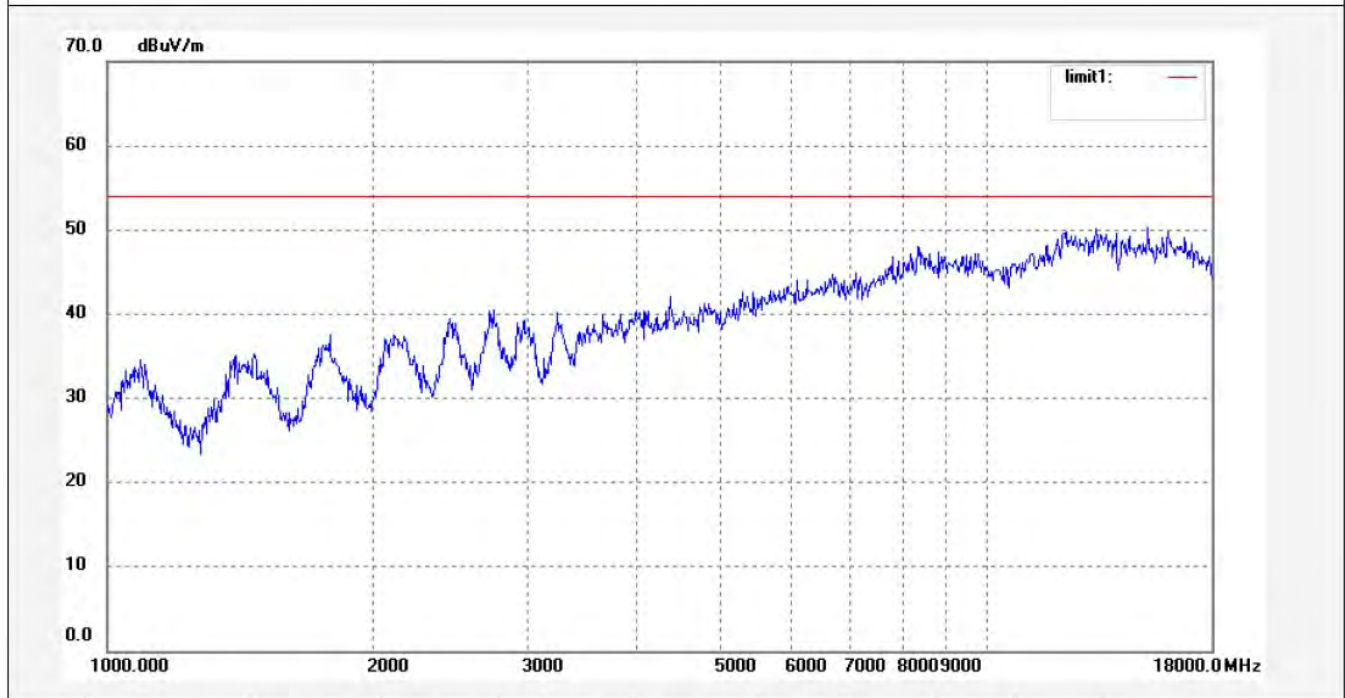

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4070	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 15:53:41
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

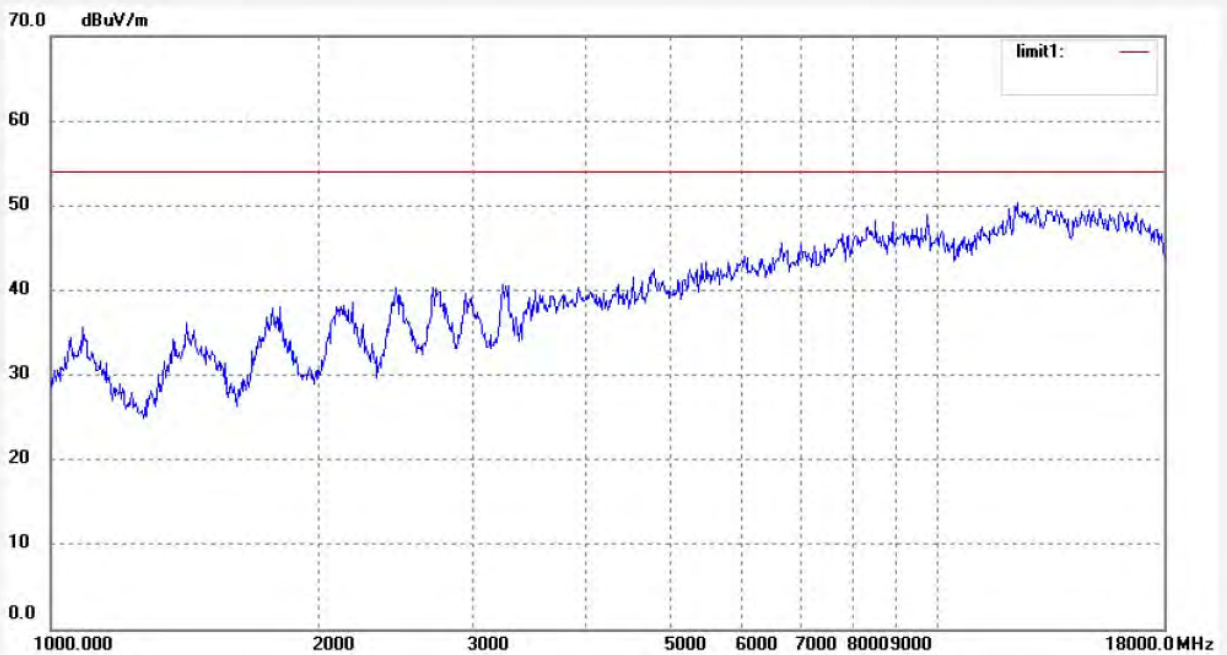

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #356	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/09/40
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

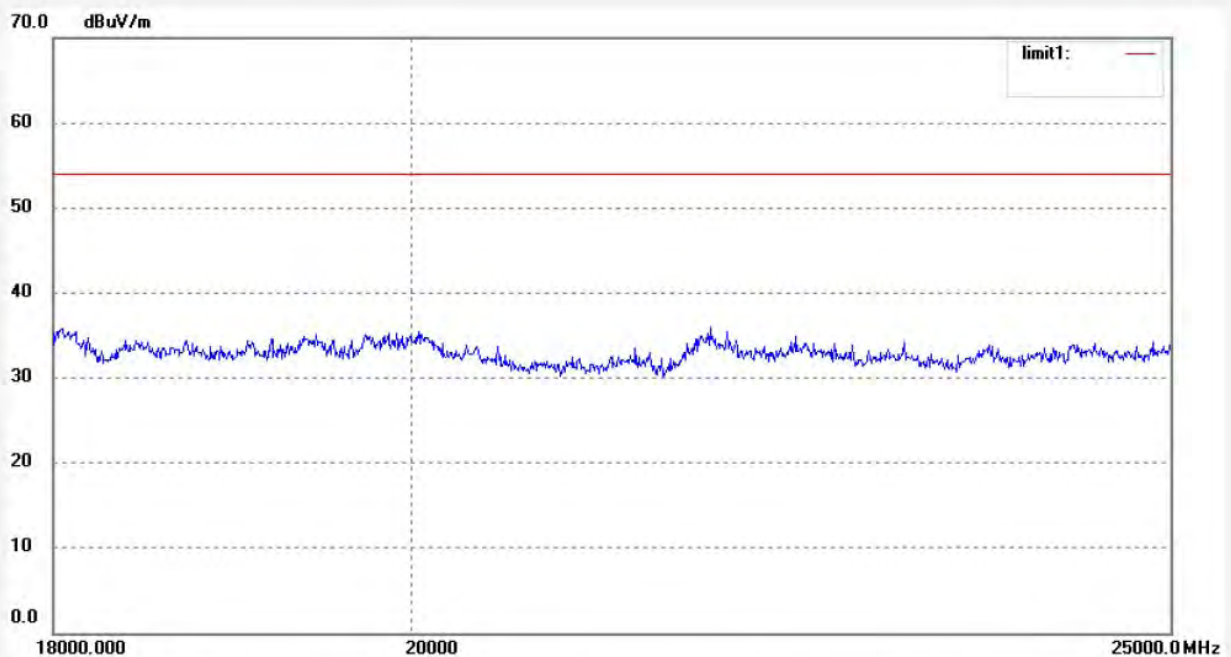

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #355	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/05/03
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

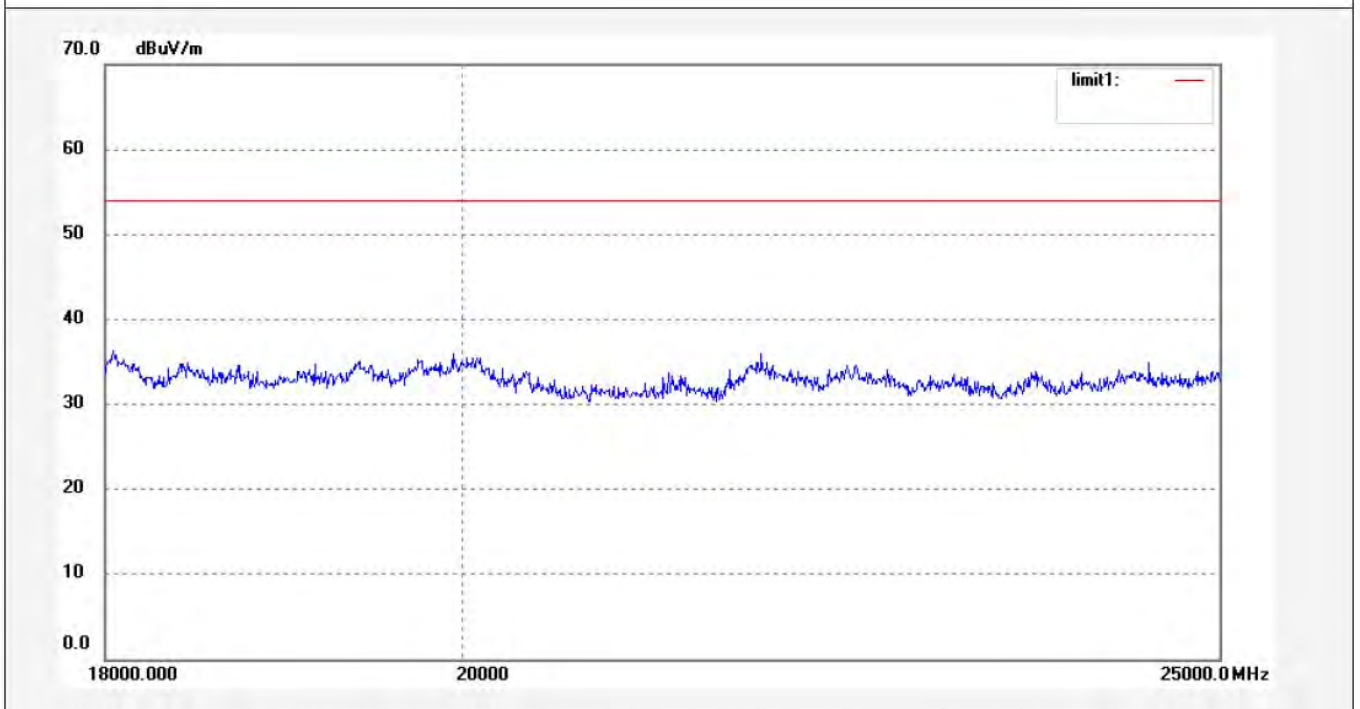

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #309	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/30/55
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

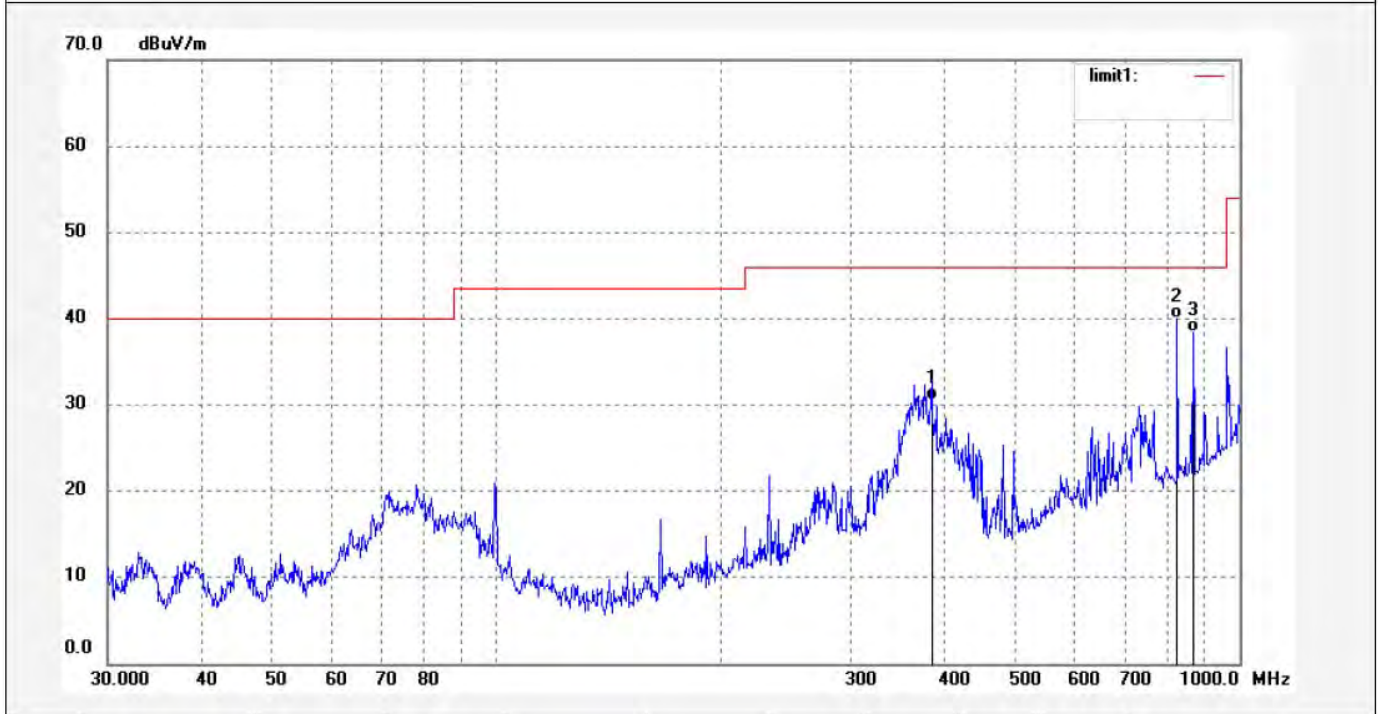

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	385.2805	46.24	-15.77	30.47	46.00	-15.53	QP			
2	824.5968	47.46	-7.39	40.07	46.00	-5.93	QP			
3	866.0879	45.07	-6.69	38.38	46.00	-7.62	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #310	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/33/41
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

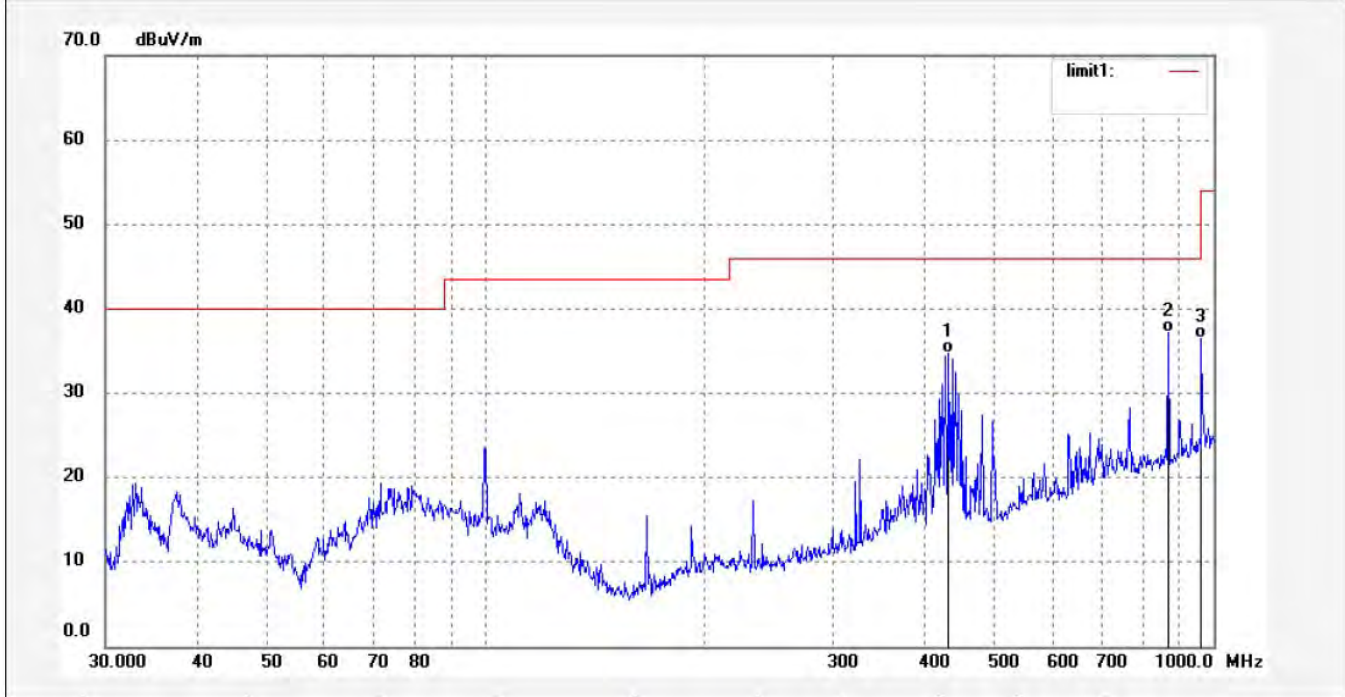

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	432.5457	48.89	-14.15	34.74	46.00	-11.26	QP			
2	866.0879	43.81	-6.69	37.12	46.00	-8.88	QP			
3	962.1623	41.77	-5.23	36.54	54.00	-17.46	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4072	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 16:01:49
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

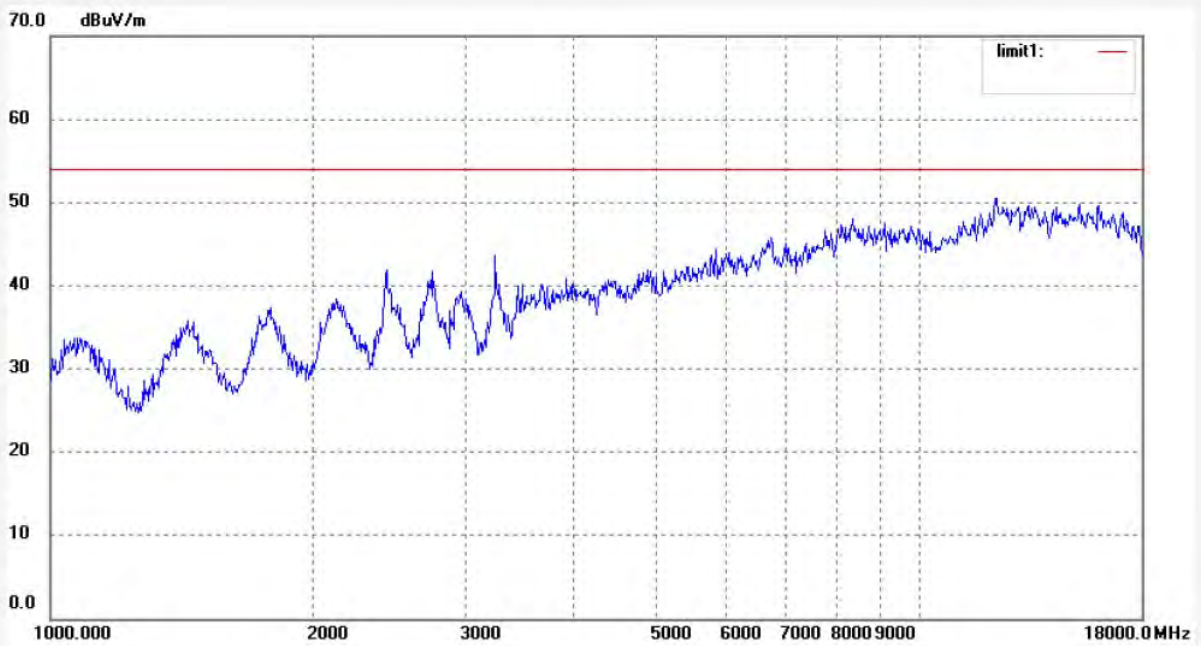

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4073	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013-4-11
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 16:05:21
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature:
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

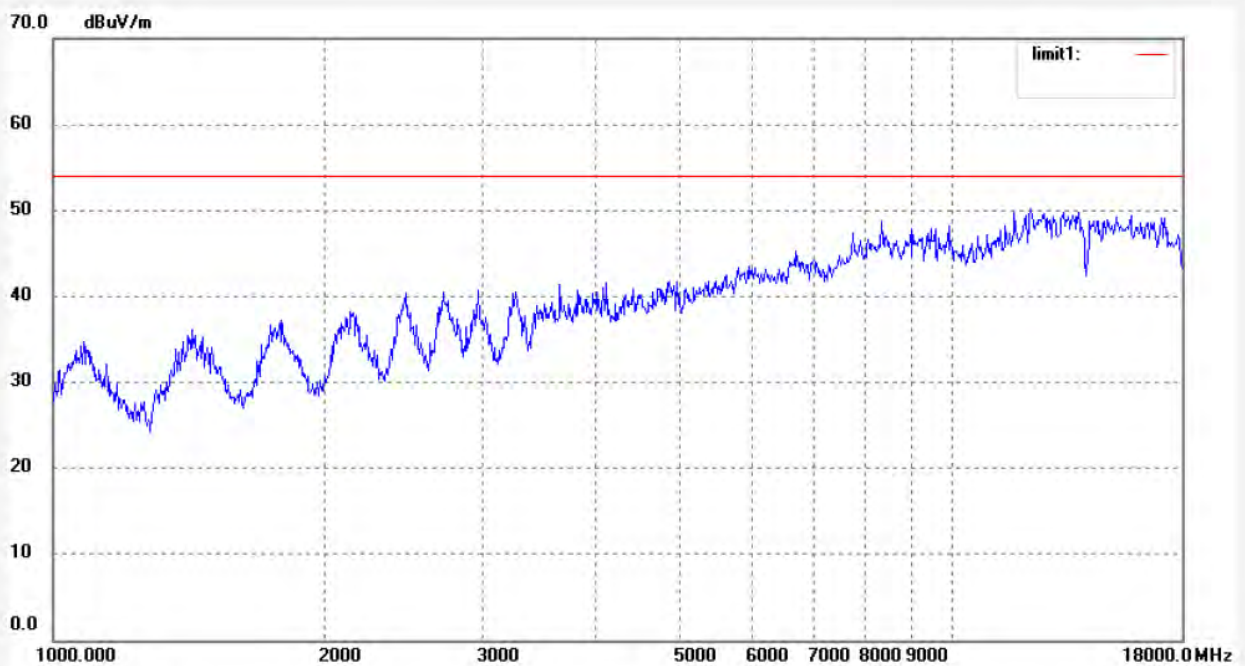

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #357	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/12/57
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

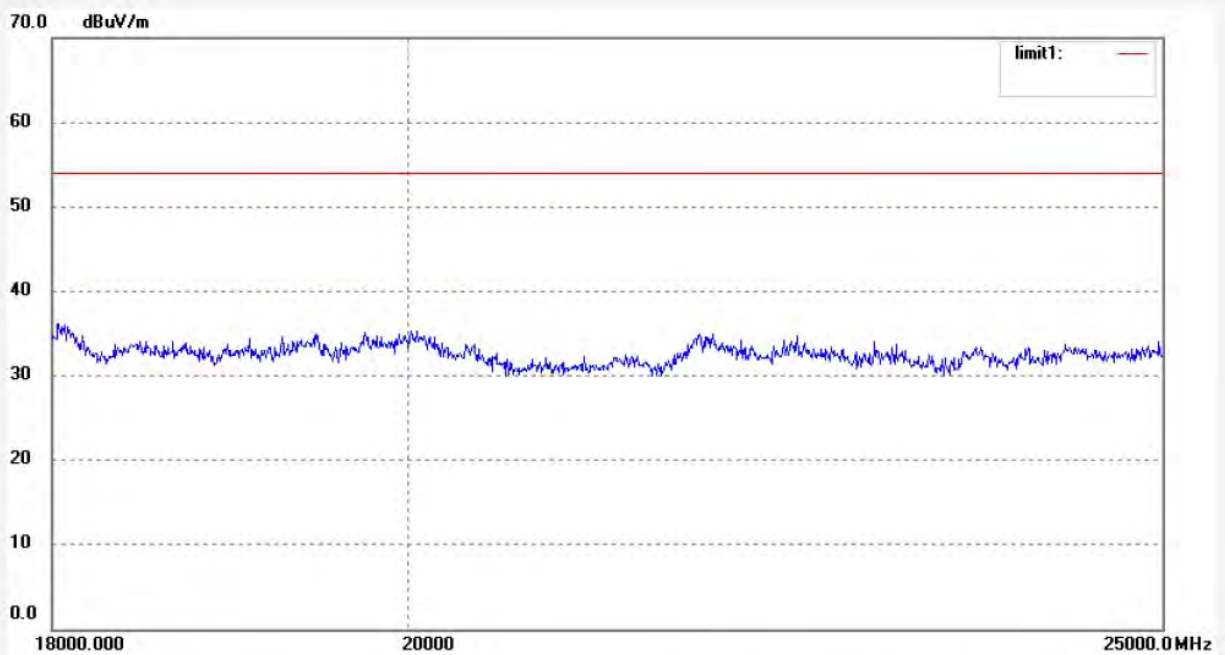

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #358	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/15/19
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

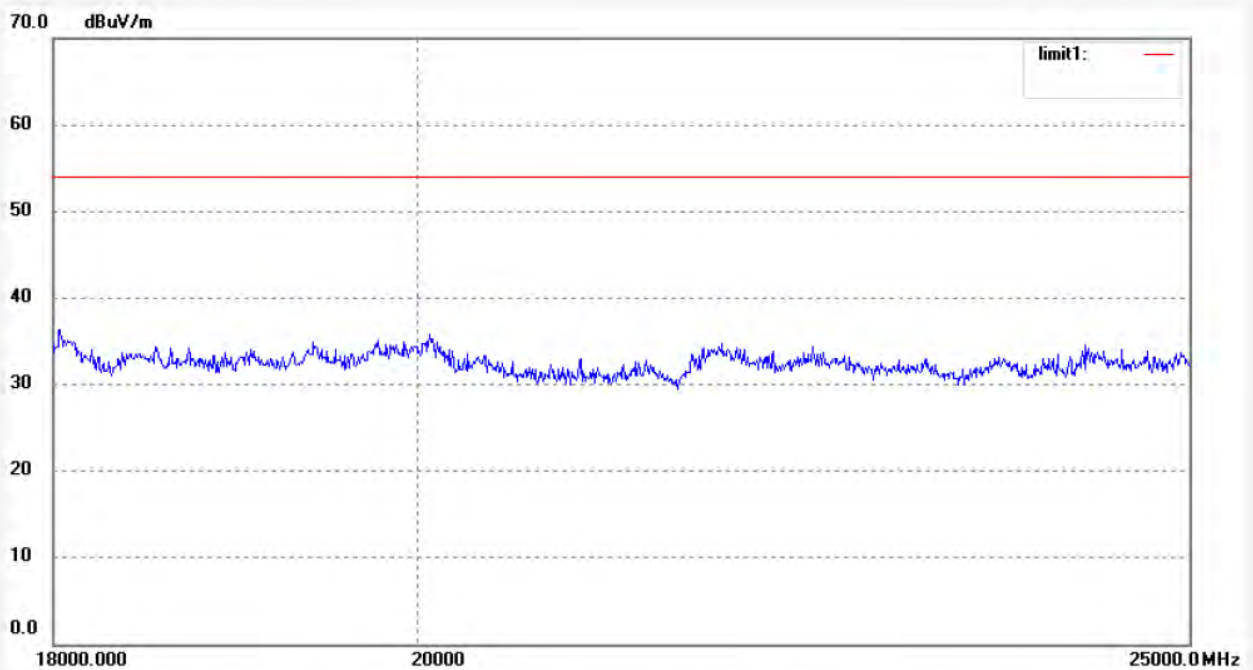

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #312	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/39/10
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 6 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

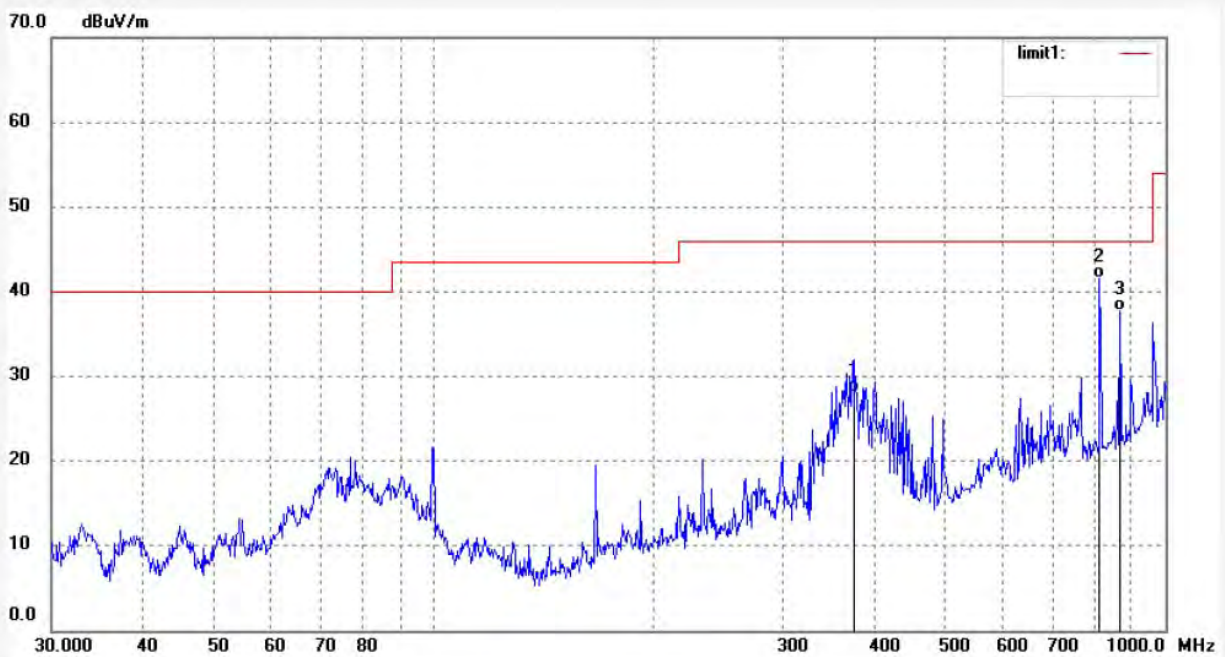

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	374.6225	43.97	-15.82	28.15	46.00	-17.85	QP			
2	813.1115	49.19	-7.55	41.64	46.00	-4.36	QP			
3	866.0879	44.42	-6.69	37.73	46.00	-8.27	QP			