


Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Wireless charging(QI)	2
Wireless charging(QI+Apple Watch)	2
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	3
Wireless charging(QI)	3
Wireless charging(QI+Apple Watch)	3
APPENDIX A.3: TEST RESULTS OF RADIATED SPURIOUS EMISSION.....	4
Wireless charging(QI)	4
Wireless charging(QI+Apple Watch)	18
APPENDIX A.4: TEST RESULTS OF CONDUCTED EMISSION	29

Appendix A.1: Test Results of 20dB Bandwidth

Wireless charging(QI)

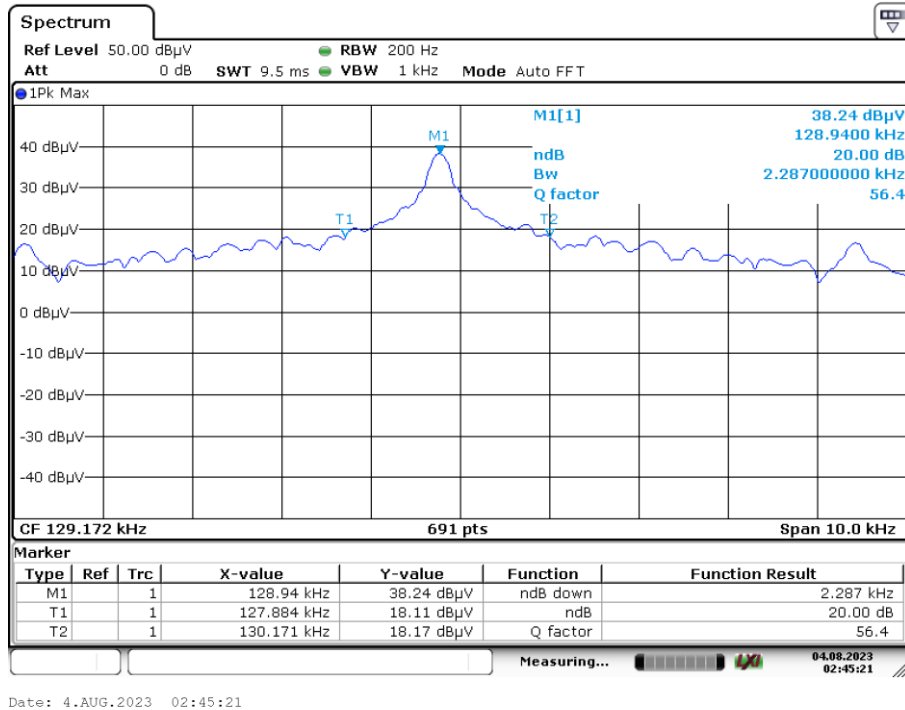


Wireless charging(QI+Apple Watch)

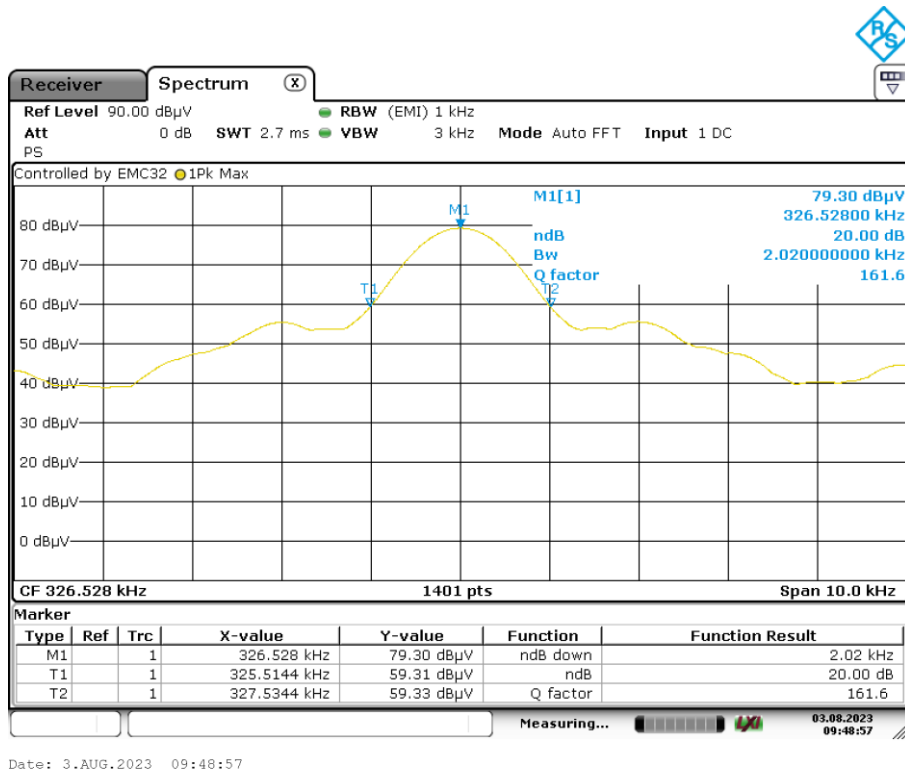


Appendix A.2: Test Results of 99% Bandwidth

Wireless charging(QI)

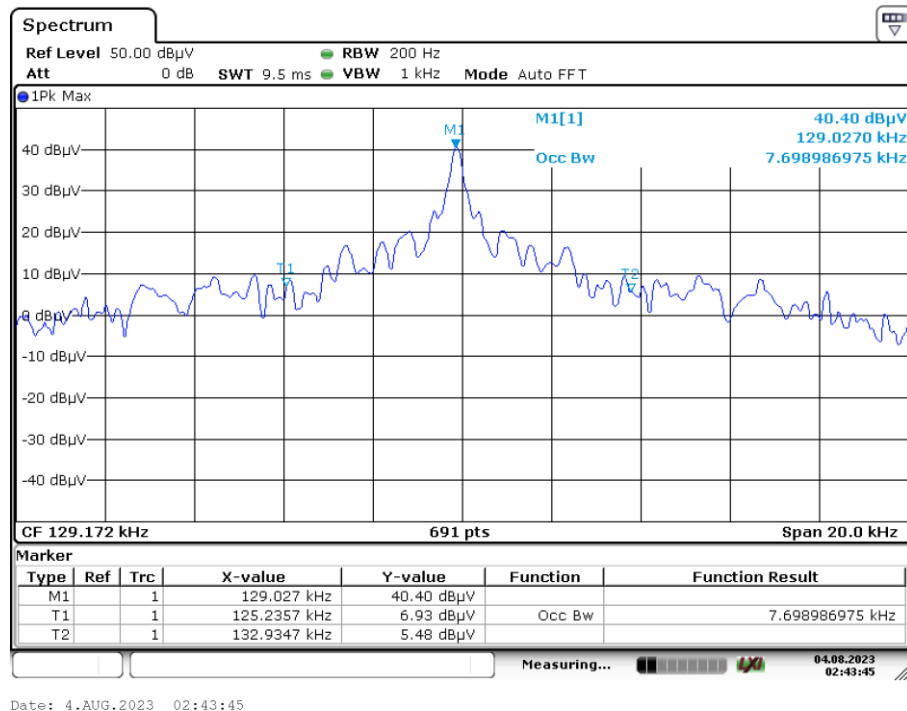

Wireless charging(QI+Apple Watch)

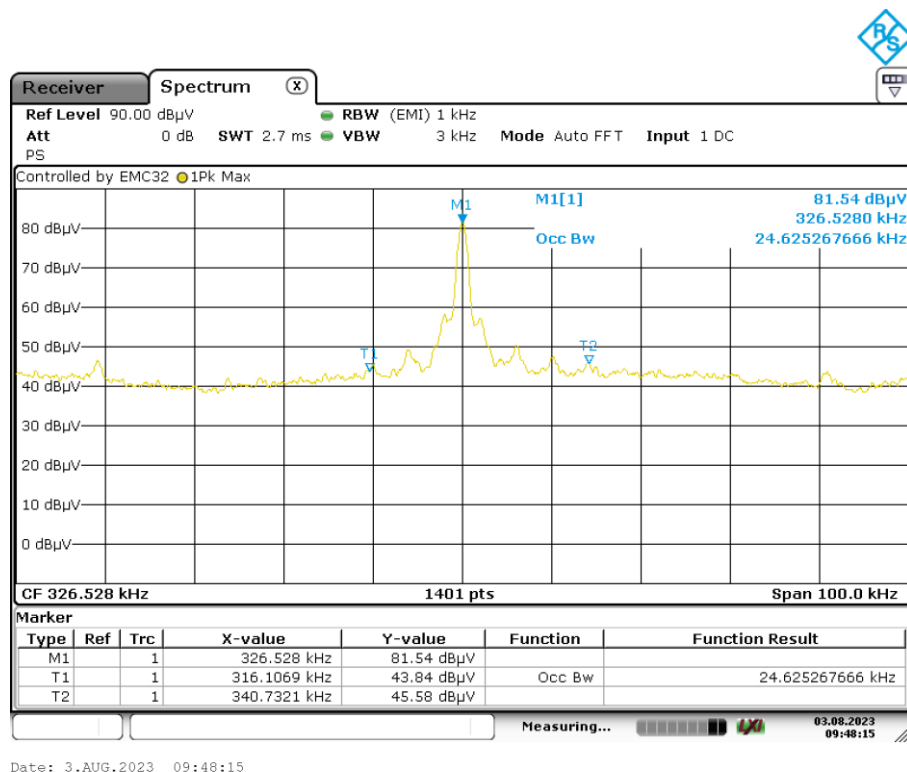

Appendix A.3: Test Results of Radiated Spurious Emission


Note: The highest waveform in the figure is Fundamental.

Wireless charging(QI)

9KHz – 30MHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging (5W)
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

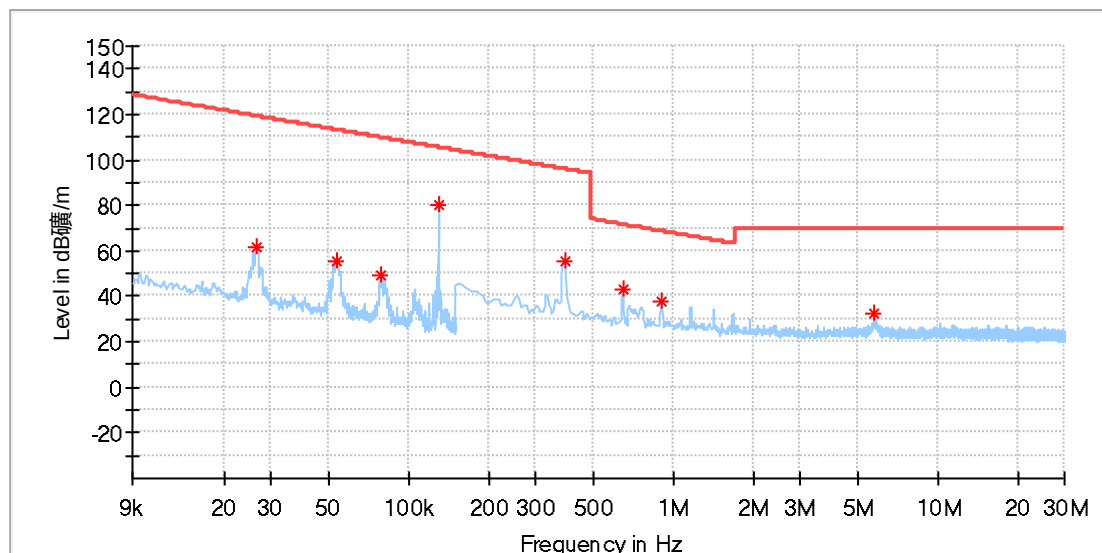

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.026424	61.85	119.15	57.30	100.0	X	67.0	20.1
0.052911	55.44	113.12	57.69	100.0	X	67.0	20.1
0.078291	49.59	109.72	60.13	100.0	X	54.0	20.1
0.128951	79.85	105.39	25.54	100.0	X	84.0	20.1
0.387044	55.69	95.85	40.16	100.0	X	84.0	20.1
0.646037	43.25	71.41	28.16	100.0	X	93.0	20.1
0.900640	37.62	68.53	30.91	100.0	X	84.0	20.1
5.729316	32.45	69.50	37.05	100.0	X	213.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging (5W)
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

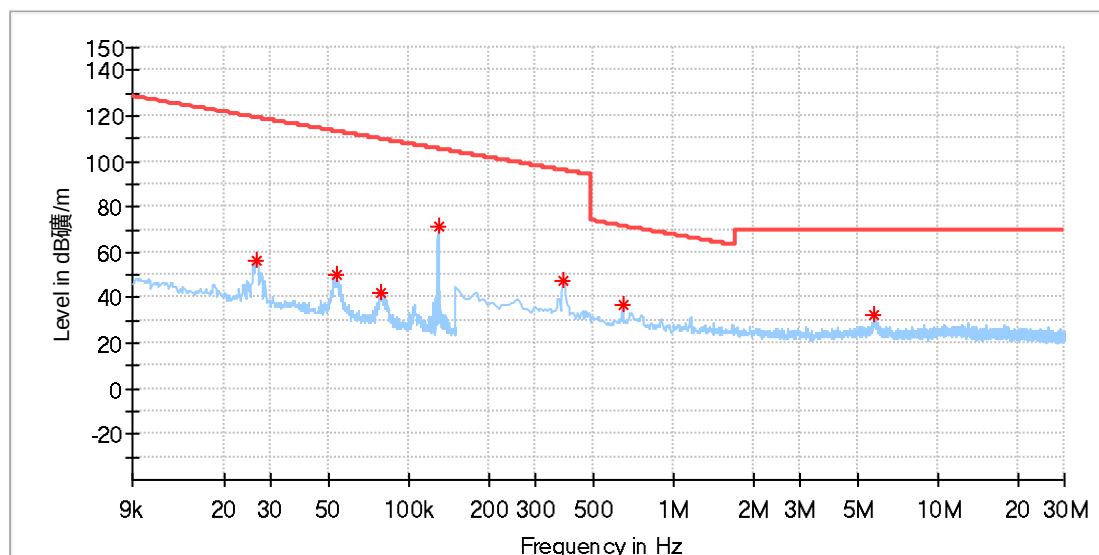

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.026424	56.64	119.15	62.51	100.0	Y	9.0	20.1
0.053415	50.10	113.04	62.94	100.0	Y	5.0	20.1
0.078493	42.01	109.70	67.69	100.0	Y	356.0	20.1
0.128850	71.74	105.40	33.65	100.0	Y	344.0	20.1
0.382655	47.36	95.95	48.59	100.0	Y	173.0	20.1
0.641647	36.89	71.47	34.57	100.0	Y	356.0	20.1
5.755655	32.70	69.50	36.80	100.0	Y	356.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging (5W)
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

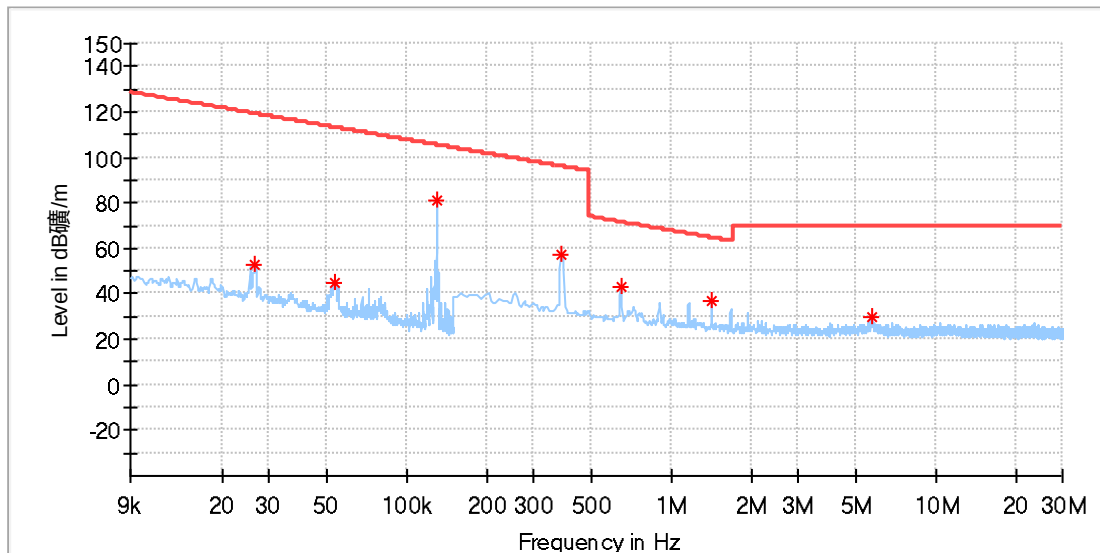

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.026625	52.57	119.08	66.52	100.0	Z	63.0	20.1
0.053516	44.99	113.02	68.04	100.0	Z	51.0	20.1
0.128951	80.98	105.39	24.41	100.0	Z	54.0	20.1
0.382655	56.84	95.95	39.10	100.0	Z	92.0	20.1
0.641647	42.92	71.47	28.54	100.0	Z	107.0	20.1
1.418625	36.50	64.59	28.09	100.0	Z	97.0	20.1
5.685419	29.95	69.50	39.55	100.0	Z	92.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging (10W)
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

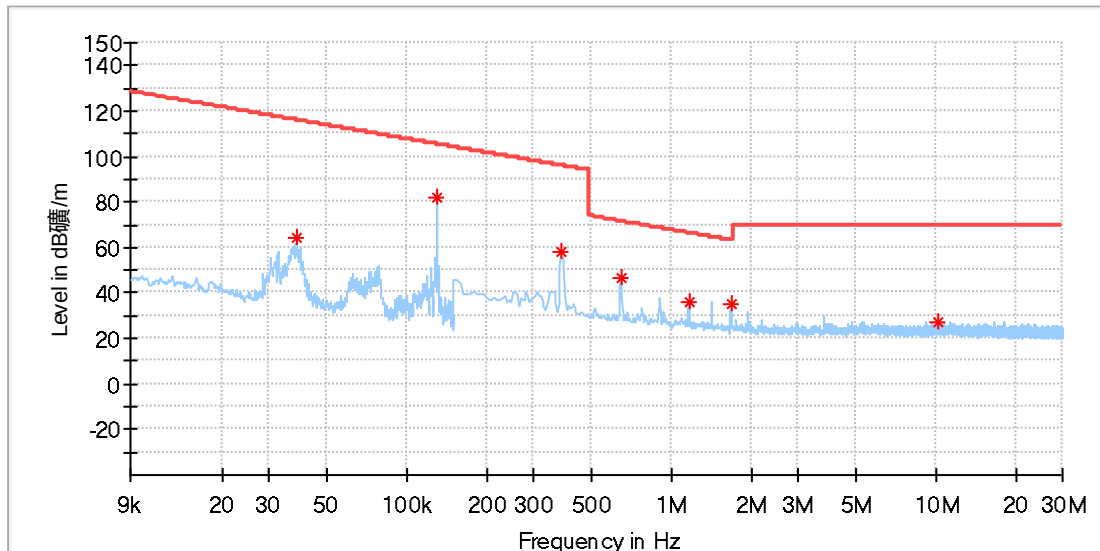

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.038308	64.15	115.93	51.78	100.0	X	59.0	20.1
0.129152	82.25	105.38	23.13	100.0	X	94.0	20.1
0.382655	58.37	95.95	37.58	100.0	X	96.0	20.1
0.641647	46.42	71.47	25.04	100.0	X	109.0	20.1
1.159632	36.38	66.34	29.96	100.0	X	105.0	20.1
1.677618	34.82	63.14	28.32	100.0	X	105.0	20.2
10.110243	27.35	69.50	42.15	100.0	X	1.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging (10W)
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

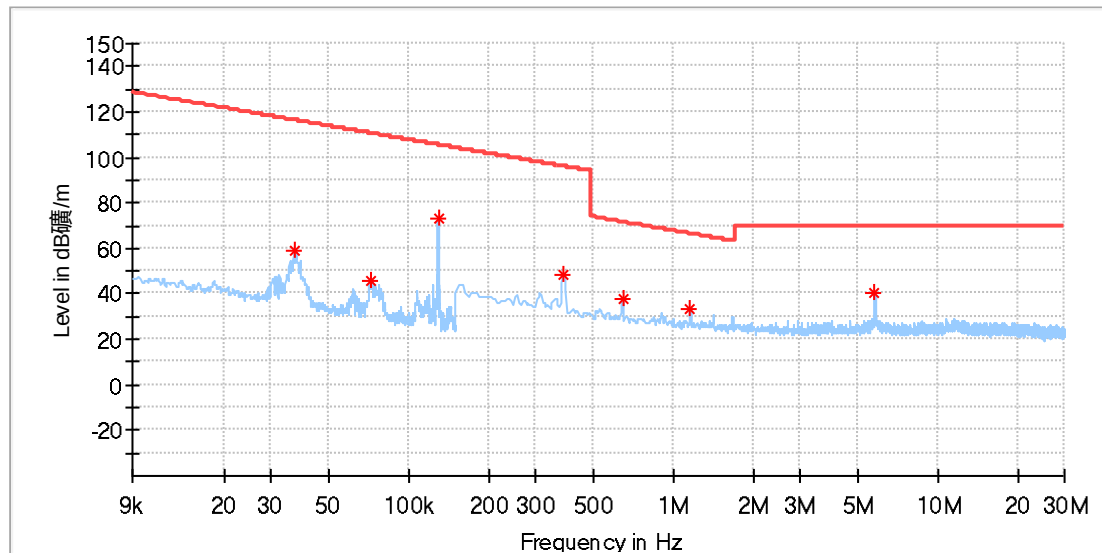

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036797	58.84	116.28	57.44	100.0	Y	17.0	20.1
0.072249	45.32	110.42	65.10	100.0	Y	355.0	20.1
0.128749	72.82	105.40	32.58	100.0	Y	355.0	20.1
0.382655	48.49	95.95	47.46	100.0	Y	168.0	20.1
0.641647	37.71	71.47	33.76	100.0	Y	328.0	20.1
1.155243	33.59	66.37	32.78	100.0	Y	347.0	20.1
5.760044	40.01	69.50	29.49	100.0	Y	95.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging (10W)
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

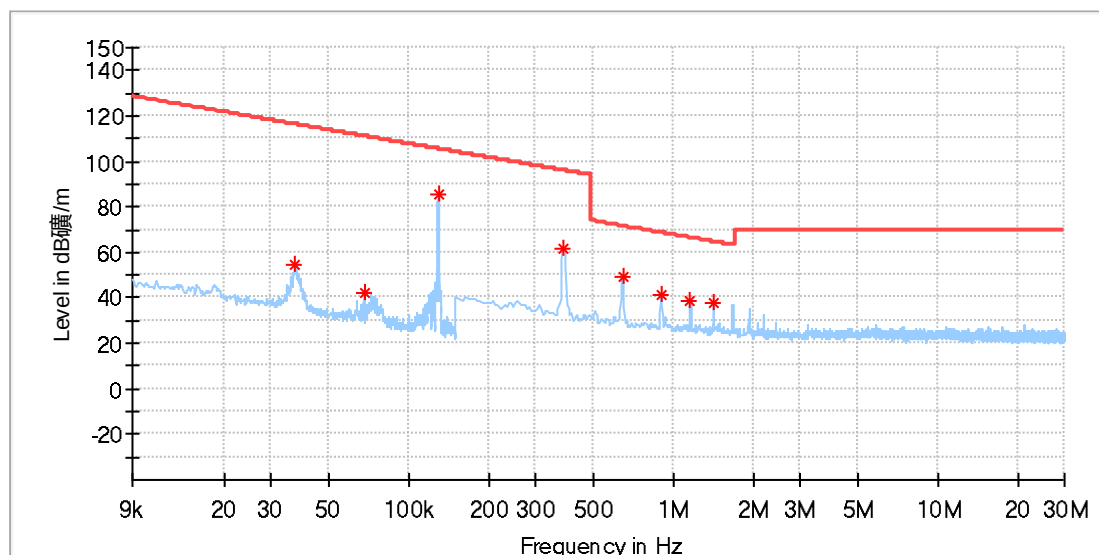

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	54.32	116.20	61.88	100.0	Z	63.0	20.1
0.067616	41.97	110.99	69.02	100.0	Z	20.0	20.1
0.128850	85.10	105.40	20.29	100.0	Z	81.0	20.1
0.382655	61.59	95.95	34.36	100.0	Z	79.0	20.1
0.641647	49.18	71.47	22.29	100.0	Z	61.0	20.1
0.900640	40.93	68.53	27.60	100.0	Z	87.0	20.1
1.155243	38.36	66.37	28.01	100.0	Z	87.0	20.1
1.414235	38.05	64.62	26.56	100.0	Z	113.0	20.1


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

9kHz - 90kHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

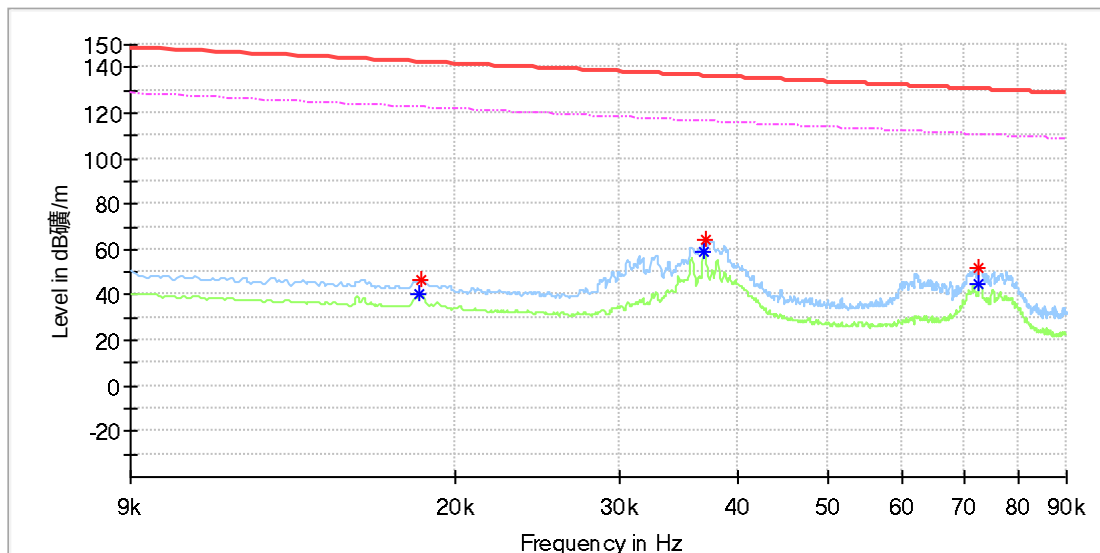


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	---	40.81	122.33	81.52	100.0	X	357.0	20.0
0.018373	46.68	---	142.31	95.62	100.0	X	357.0	20.0
0.036945	---	59.38	116.24	56.86	100.0	X	82.0	20.0
0.037003	64.01	---	136.23	72.22	100.0	X	60.0	20.0
0.072585	51.64	---	130.38	78.74	100.0	X	75.0	20.0
0.072585	---	44.88	110.38	65.50	100.0	X	75.0	20.0

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

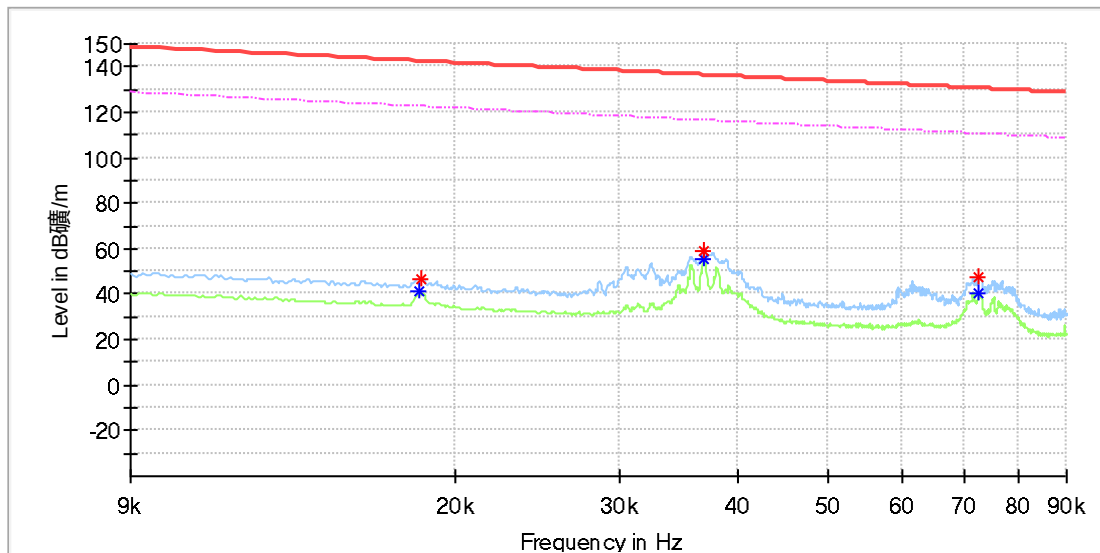


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	---	40.91	122.33	81.43	100.0	Y	11.0	20.0
0.018373	46.86	---	142.31	95.44	100.0	Y	11.0	20.0
0.036887	58.74	---	136.25	77.51	100.0	Y	26.0	20.0
0.036887	---	55.30	116.25	60.95	100.0	Y	26.0	20.0
0.072585	47.61	---	130.38	82.77	100.0	Y	26.0	20.0
0.072585	---	40.55	110.38	69.83	100.0	Y	26.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

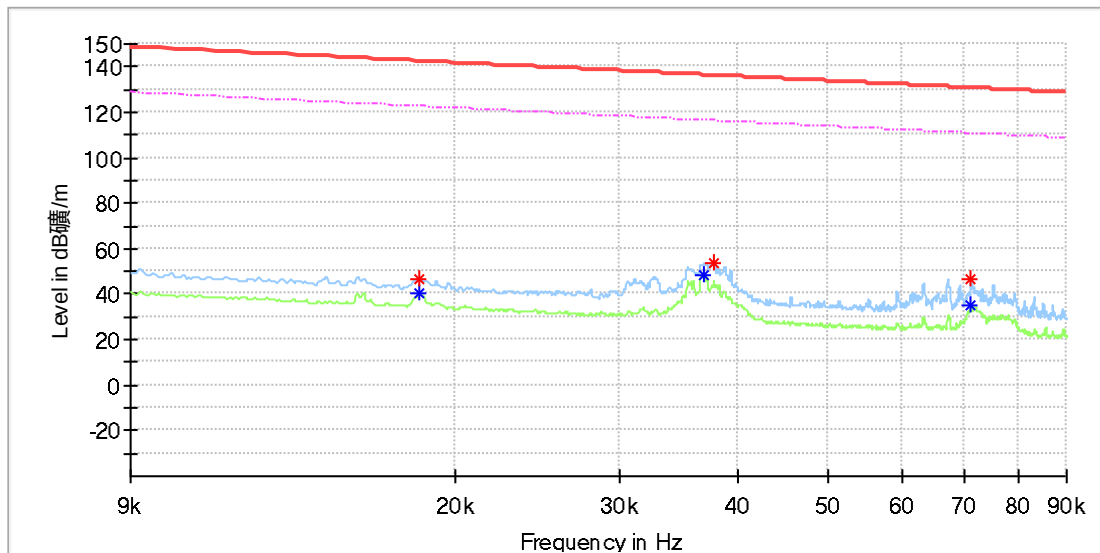


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	46.77	---	142.33	95.56	100.0	Z	226.0	20.0
0.018315	---	40.79	122.33	81.54	100.0	Z	226.0	20.0
0.036887	---	48.56	116.25	67.70	100.0	Z	72.0	20.0
0.037871	53.98	---	136.03	82.05	100.0	Z	56.0	20.0
0.071139	46.55	---	130.55	84.00	100.0	Z	64.0	20.0
0.071196	---	35.44	110.55	75.11	100.0	Z	64.0	20.0

110KHz - 490KHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

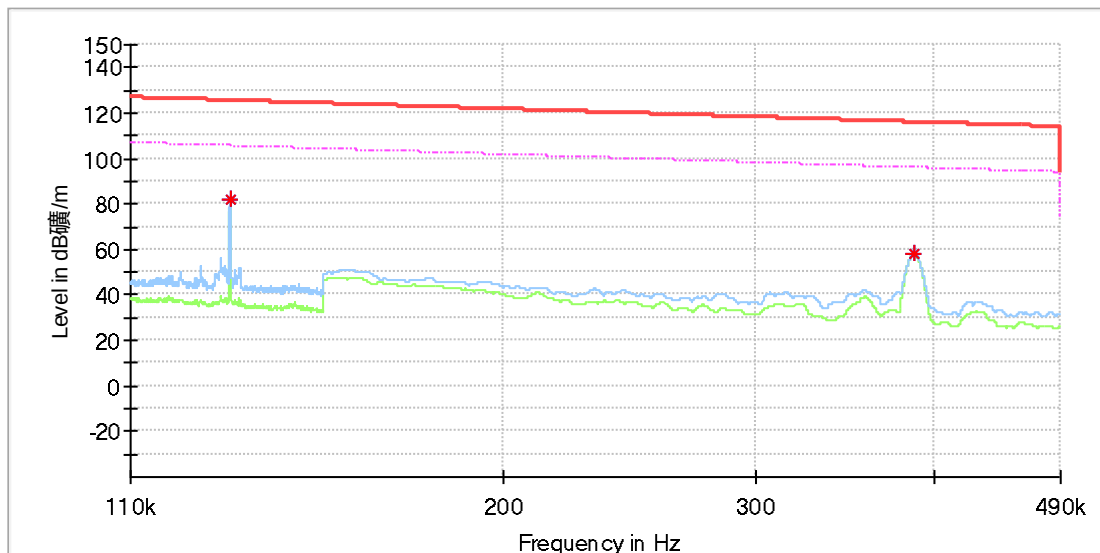


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.129086	82.13	---	125.38	43.25	100.0	X	77.0	20.0
0.129114	---	81.94	105.38	23.43	100.0	X	93.0	20.0
0.387250	58.07	---	115.84	57.77	100.0	X	83.0	20.0
0.387250	---	57.75	95.84	38.09	100.0	X	83.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

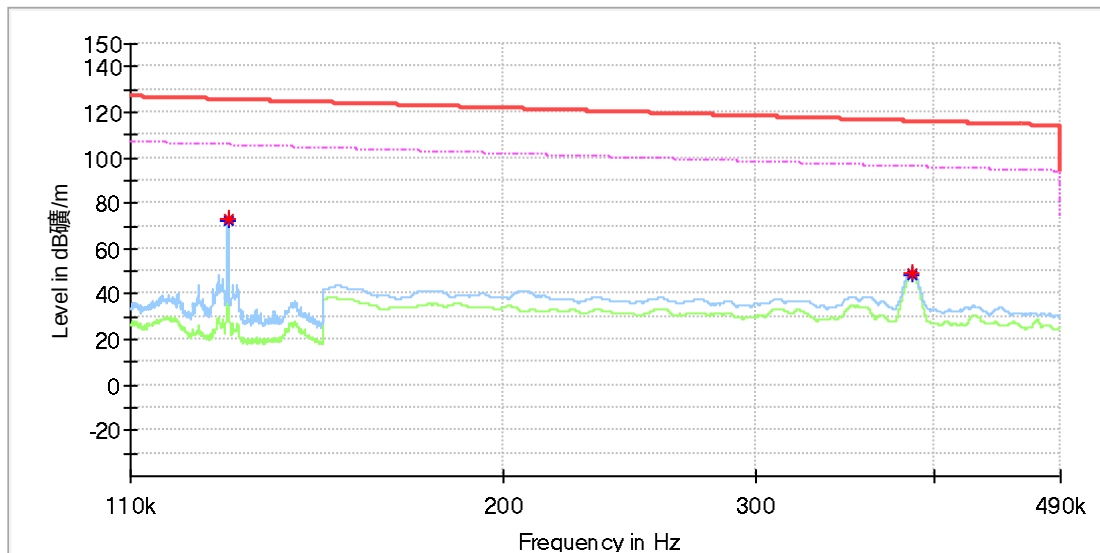


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128600	72.87	---	125.41	52.55	100.0	Y	351.0	20.0
0.128600	---	72.64	105.41	32.78	100.0	Y	351.0	20.0
0.385550	49.27	---	115.88	66.61	100.0	Y	0.0	20.0
0.385700	---	48.01	95.88	47.87	100.0	Y	0.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

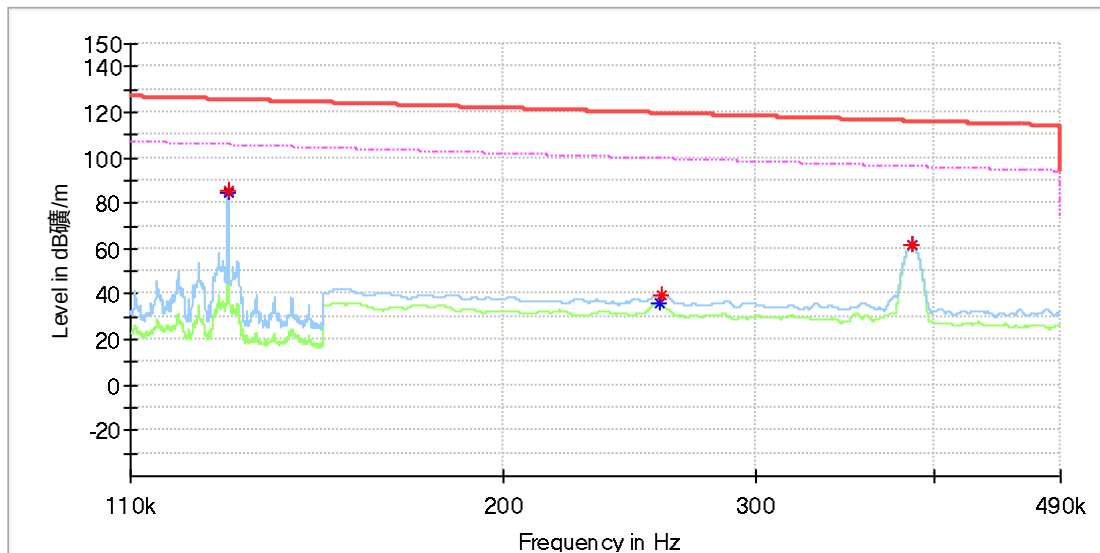


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128657	85.15	---	125.41	40.26	100.0	Z	77.0	20.0
0.128657	---	85.00	105.41	20.41	100.0	Z	77.0	20.0
0.257100	---	35.86	99.40	63.54	100.0	Z	239.0	20.0
0.258350	39.87	---	119.36	79.49	100.0	Z	239.0	20.0
0.385900	61.56	---	115.87	54.31	100.0	Z	105.0	20.0
0.385900	---	61.36	95.87	34.51	100.0	Z	105.0	20.0

30MHz - 1GHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

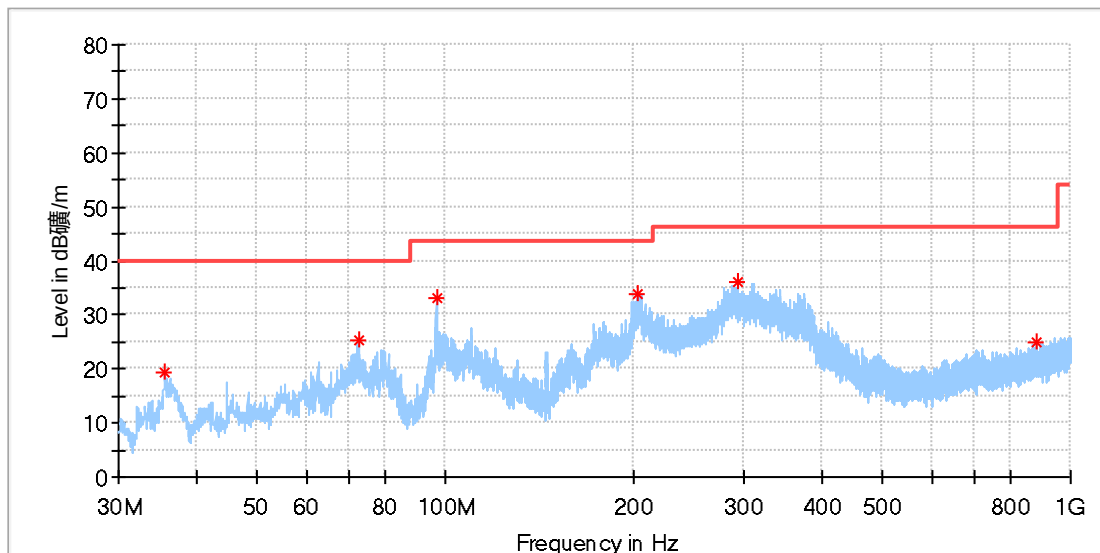

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.558846	19.33	40.00	20.67	100.0	H	281.0	-22.0
72.493462	25.19	40.00	14.81	100.0	H	313.0	-22.9
96.706154	33.06	43.50	10.44	100.0	H	8.0	-19.8
203.592692	33.98	43.50	9.52	100.0	H	110.0	-19.3
292.795385	35.93	46.00	10.07	100.0	H	265.0	-16.8
879.085769	24.76	46.00	21.24	100.0	H	37.0	-5.6

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

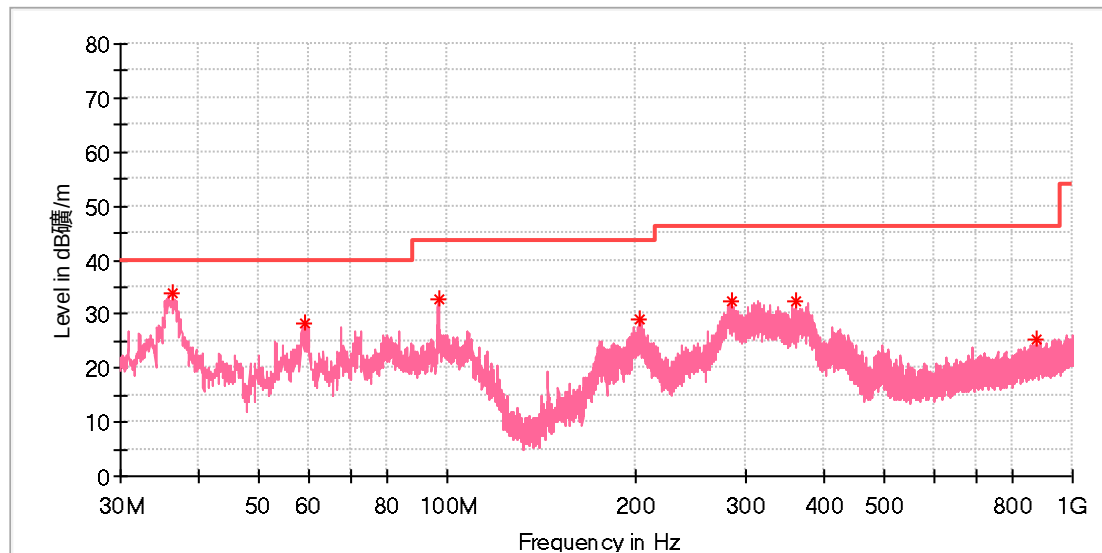

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.379615	34.01	40.00	5.99	100.0	V	203.0	-21.7
59.361154	28.31	40.00	11.69	100.0	V	60.0	-19.2
96.668846	32.67	43.50	10.83	100.0	V	100.0	-19.8
203.182308	29.04	43.50	14.46	100.0	V	53.0	-19.3
284.401154	32.47	46.00	13.53	100.0	V	29.0	-17.0
360.471539	32.42	46.00	13.58	100.0	V	14.0	-14.9
873.377692	25.15	46.00	20.85	100.0	V	194.0	-5.6

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Wireless charging(QI+Apple Watch)

9KHz – 30MHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

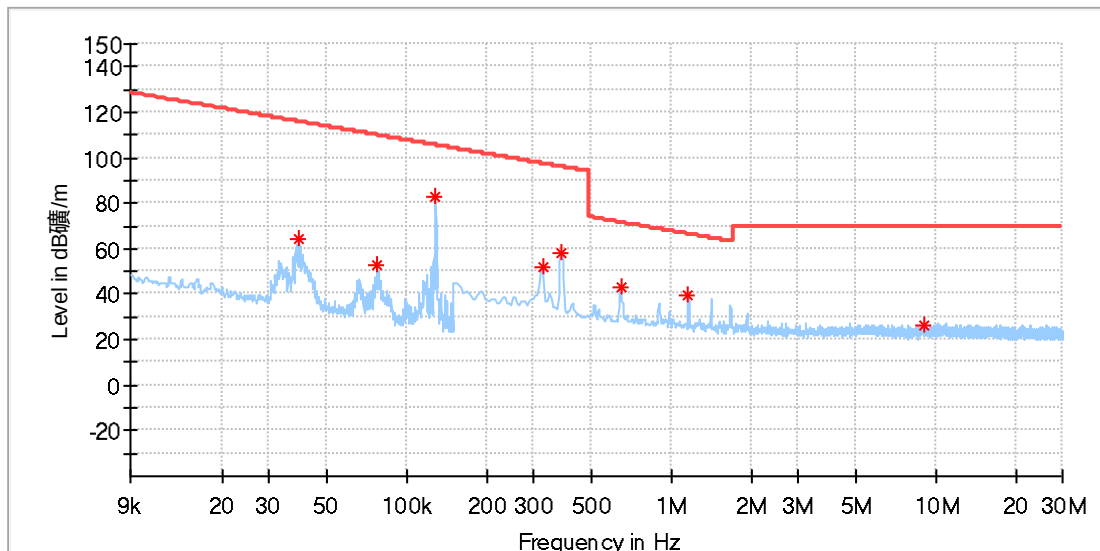

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.039114	63.99	115.75	51.75	100.0	X	25.0	20.1
0.077284	53.19	109.83	56.65	100.0	X	30.0	20.1
0.128548	82.62	105.42	22.79	100.0	X	64.0	20.1
0.325588	51.84	97.35	45.51	100.0	X	122.0	20.1
0.382655	57.68	95.95	38.26	100.0	X	93.0	20.1
0.641647	43.22	71.47	28.25	100.0	X	49.0	20.1
1.155243	39.32	66.37	27.05	100.0	X	79.0	20.1
8.925022	26.66	69.50	42.84	100.0	X	255.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

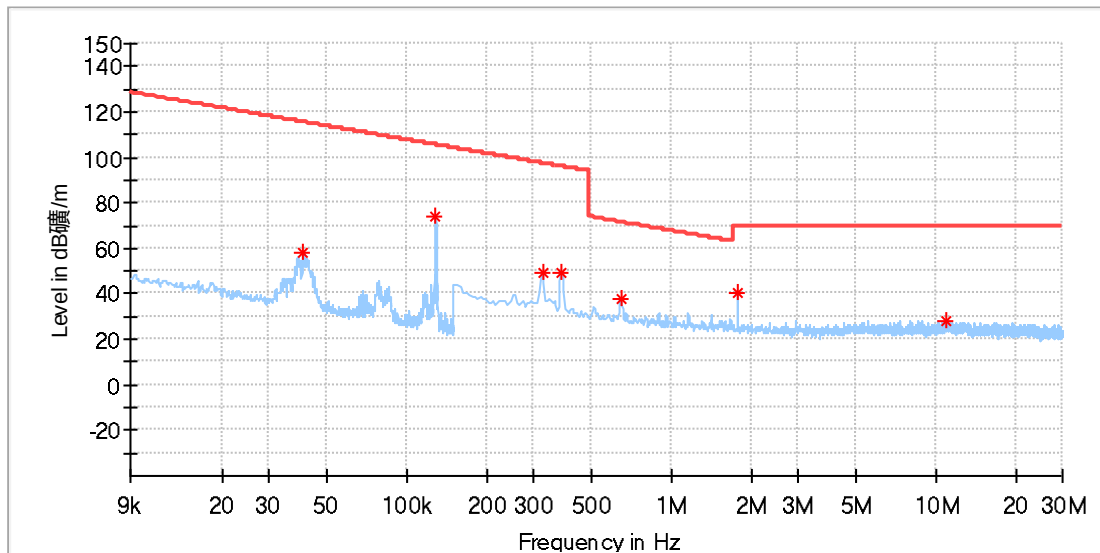

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.040423	58.12	115.46	57.34	100.0	Y	78.0	20.1
0.128649	73.63	105.41	31.78	100.0	Y	351.0	20.1
0.325588	49.18	97.35	48.17	100.0	Y	182.0	20.1
0.382655	49.06	95.95	46.89	100.0	Y	354.0	20.1
0.641647	37.75	71.47	33.72	100.0	Y	0.0	20.1
1.774191	40.23	69.50	29.28	100.0	Y	354.0	20.2
10.996963	27.87	69.50	41.63	100.0	Y	351.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

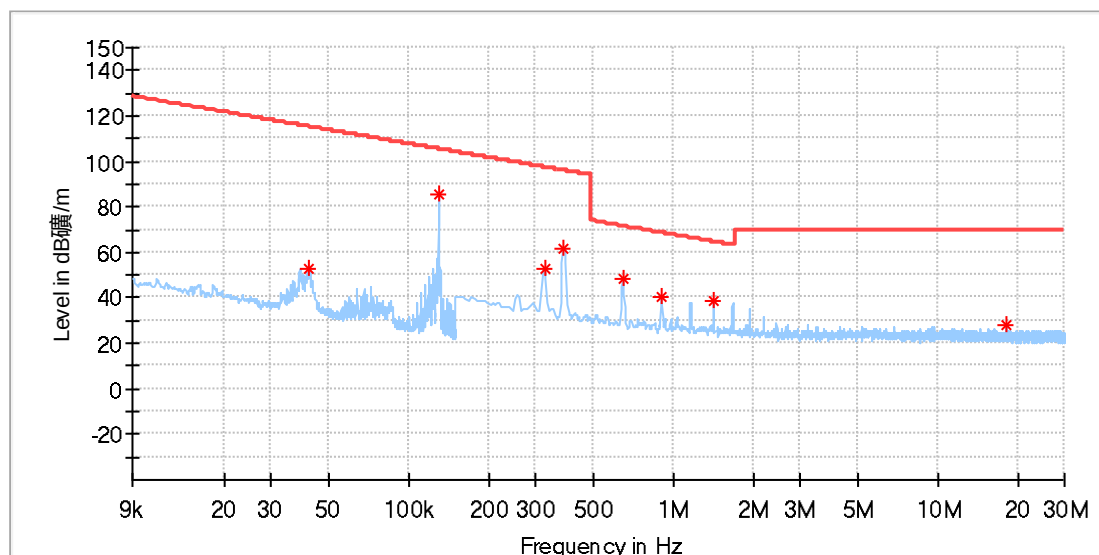

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.042034	53.11	115.12	62.01	100.0	Z	0.0	20.1
0.128951	85.42	105.39	19.96	100.0	Z	77.0	20.1
0.325588	52.74	97.35	44.61	100.0	Z	120.0	20.1
0.382655	61.56	95.95	34.38	100.0	Z	73.0	20.1
0.641647	48.59	71.47	22.87	100.0	Z	102.0	20.1
0.900640	39.99	68.53	28.54	100.0	Z	102.0	20.1
1.414235	38.52	64.62	26.10	100.0	Z	65.0	20.1
17.972206	27.79	69.50	41.71	100.0	Z	135.0	20.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

9kHz - 90kHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

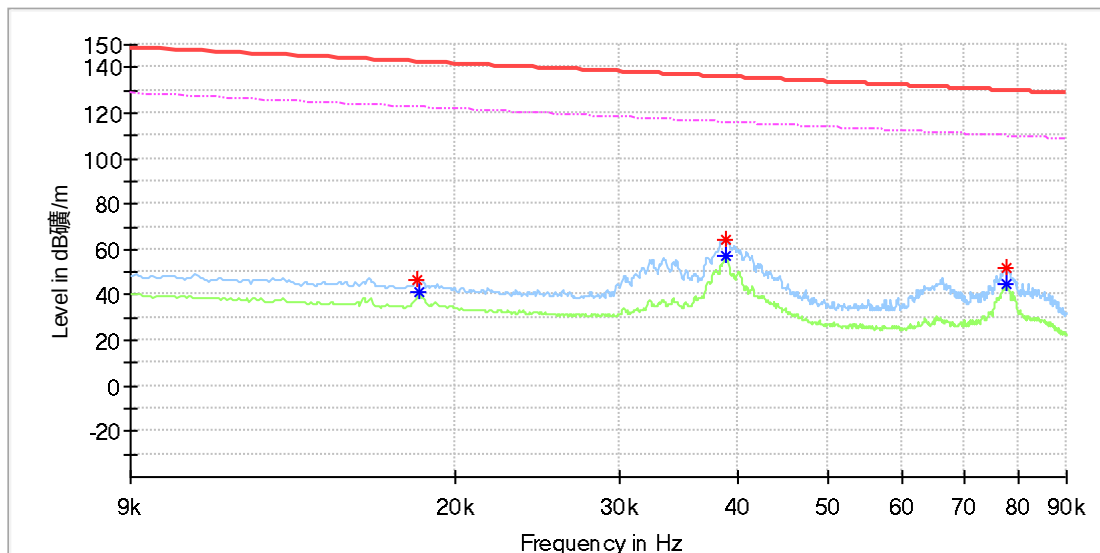


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018199	46.69	---	142.39	95.69	100.0	X	210.0	20.0
0.018315	---	40.94	122.33	81.39	100.0	X	119.0	20.0
0.038854	64.00	---	135.80	71.81	100.0	X	21.0	20.0
0.038854	---	57.53	115.80	58.27	100.0	X	21.0	20.0
0.077561	51.98	---	129.80	77.82	100.0	X	36.0	20.0
0.077561	---	44.52	109.80	65.28	100.0	X	36.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

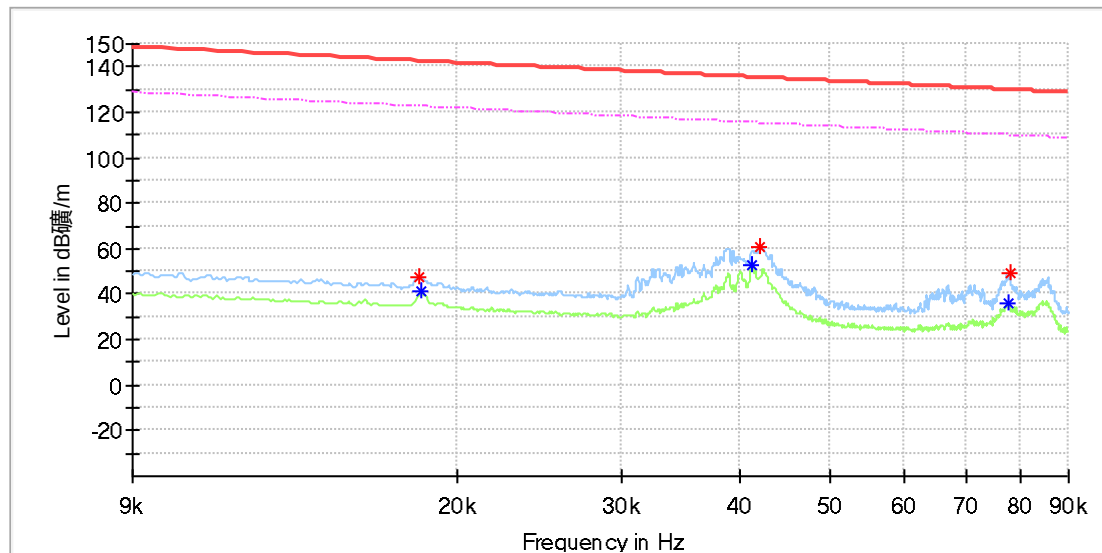


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	47.75	---	142.36	94.61	100.0	Y	280.0	20.0
0.018315	---	41.27	122.33	81.07	100.0	Y	280.0	20.0
0.041342	---	52.52	115.26	62.75	100.0	Y	70.0	20.0
0.042036	60.48	---	135.12	74.64	100.0	Y	79.0	20.0
0.077676	---	36.11	109.79	73.68	100.0	Y	70.0	20.0
0.077966	48.88	---	129.76	80.88	100.0	Y	79.0	20.0

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

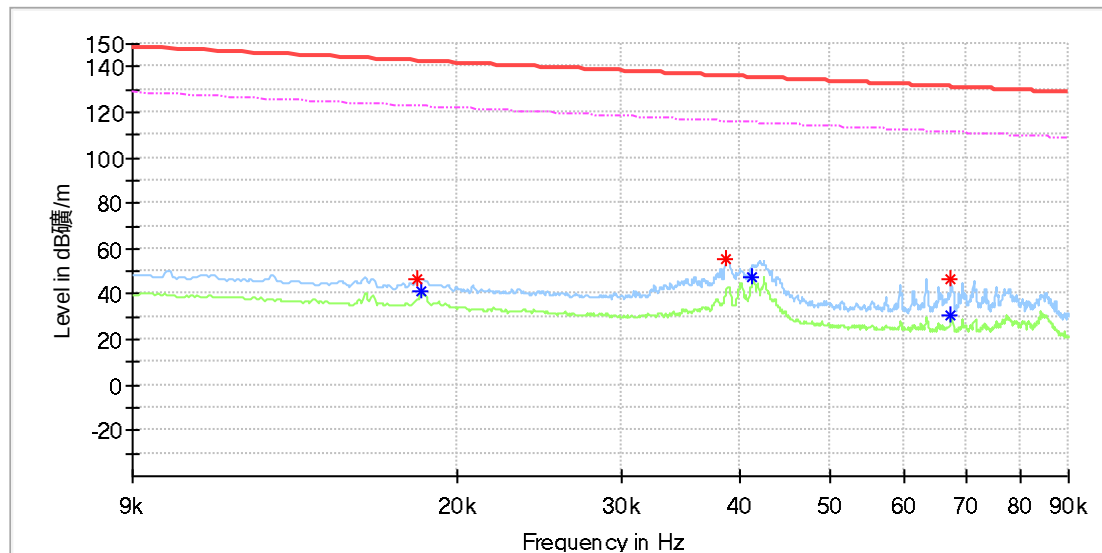


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018141	46.76	---	142.42	95.65	100.0	Z	0.0	20.0
0.018315	---	41.02	122.33	81.31	100.0	Z	0.0	20.0
0.038796	55.30	---	135.82	80.52	100.0	Z	33.0	20.0
0.041342	---	47.86	115.26	67.41	100.0	Z	33.0	20.0
0.067320	47.01	---	131.03	84.02	100.0	Z	5.0	20.0
0.067378	---	30.50	111.02	80.52	100.0	Z	5.0	20.0

110KHz - 490KHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

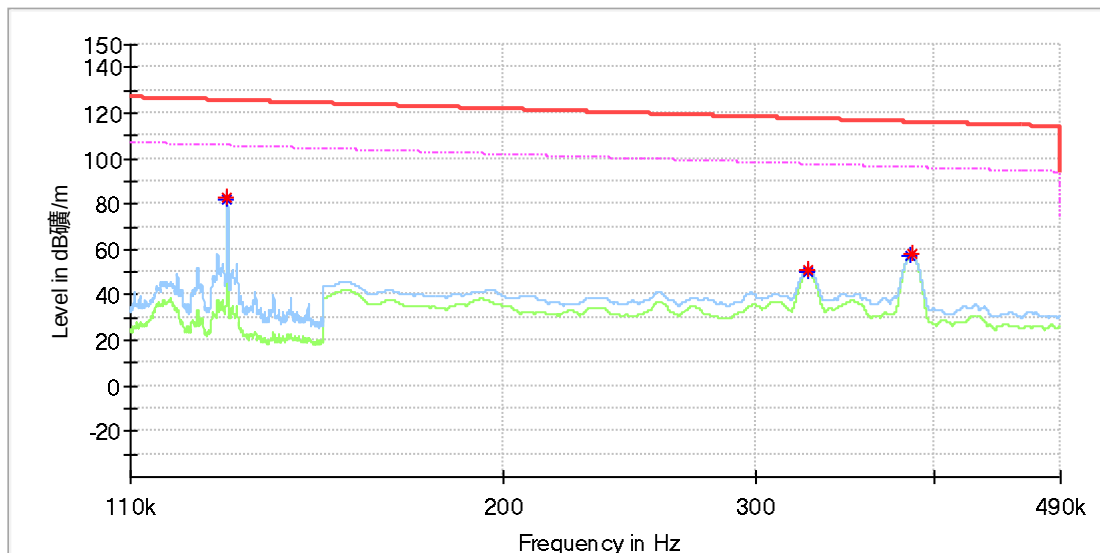


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128486	82.53	---	125.42	42.89	100.0	X	70.0	20.0
0.128486	---	82.38	105.42	23.04	100.0	X	70.0	20.0
0.326500	51.24	---	117.32	66.08	100.0	X	69.0	20.0
0.326500	---	49.88	97.32	47.44	100.0	X	69.0	20.0
0.385450	---	57.56	95.88	38.33	100.0	X	69.0	20.0
0.385500	57.69	---	115.88	58.19	100.0	X	69.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

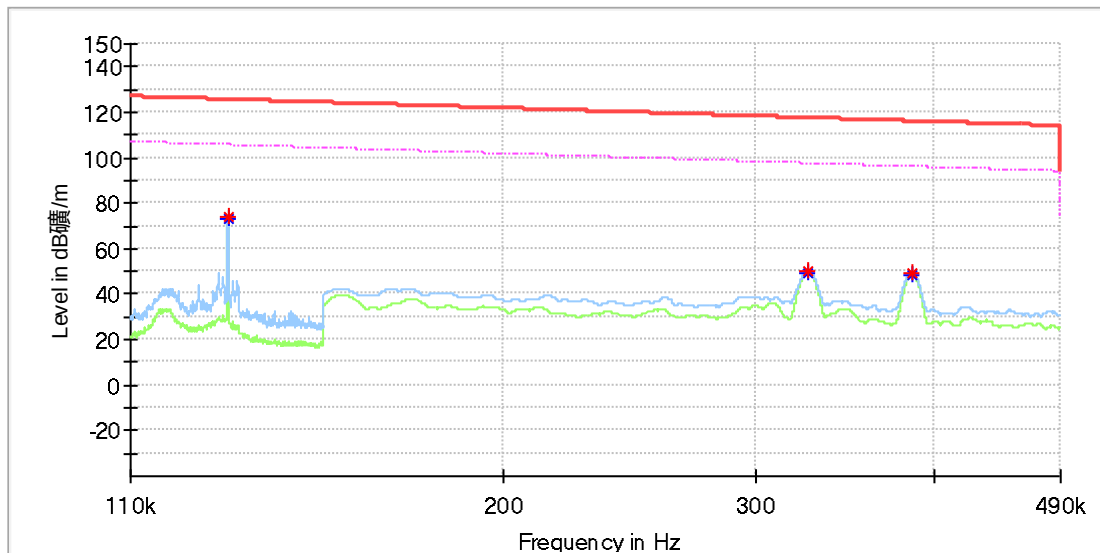


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128629	73.59	---	125.41	51.82	100.0	Y	349.0	20.0
0.128629	---	73.42	105.41	31.99	100.0	Y	349.0	20.0
0.326400	50.10	---	117.33	67.22	100.0	Y	181.0	20.0
0.326500	---	49.53	97.32	47.80	100.0	Y	181.0	20.0
0.385700	49.42	---	115.88	66.46	100.0	Y	358.0	20.0
0.385900	---	48.72	95.87	47.15	100.0	Y	358.0	20.0

EUT Information

EUT Name: 2-in-1 Magnetic Wireless Charging Travel Kit
Model: BE-MQ210W24
Test Mode: Charging
Order No/Sample No: 168435892/A003519719-004
Test Voltage: 120V/60Hz
Remark: Temp 24 Humi:50%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

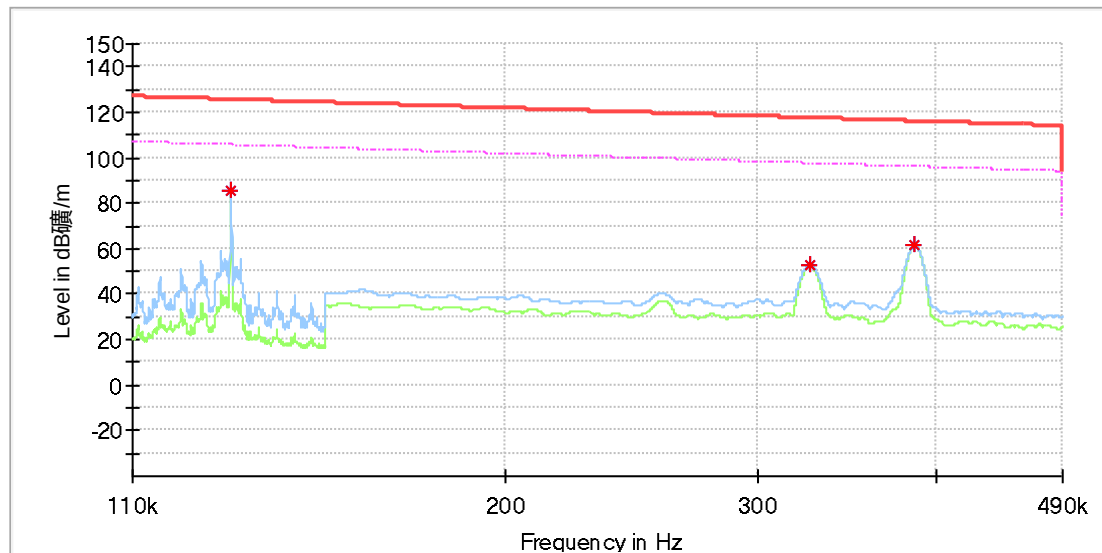


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.128829	85.45	---	125.40	39.95	100.0	Z	77.0	20.0
0.128829	---	85.27	105.40	20.13	100.0	Z	77.0	20.0
0.326600	53.07	---	117.32	64.26	100.0	Z	97.0	20.0
0.326600	---	52.52	97.32	44.81	100.0	Z	97.0	20.0
0.386500	---	61.20	95.86	34.66	100.0	Z	79.0	20.0
0.386550	61.32	---	115.86	54.54	100.0	Z	79.0	20.0

30MHz - 1GHz

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

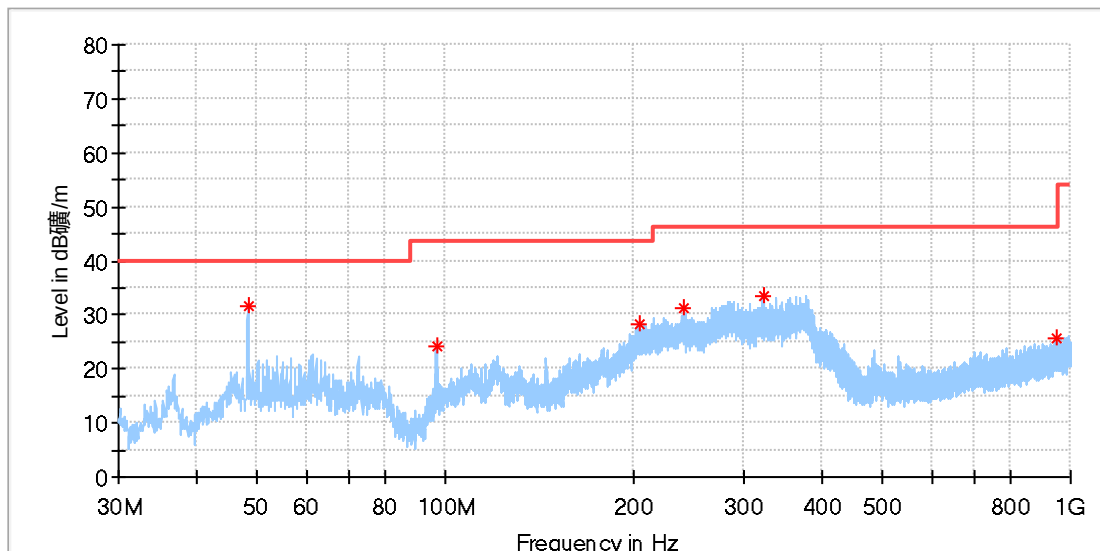

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.318077	31.46	40.00	8.54	100.0	H	339.0	-18.7
96.668846	24.02	43.50	19.48	100.0	H	142.0	-19.8
204.637308	28.17	43.50	15.33	100.0	H	0.0	-19.2
240.601923	31.40	46.00	14.60	100.0	H	0.0	-18.0
322.044615	33.61	46.00	12.39	100.0	H	125.0	-16.0
952.693846	25.67	46.00	20.33	100.0	H	125.0	-4.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

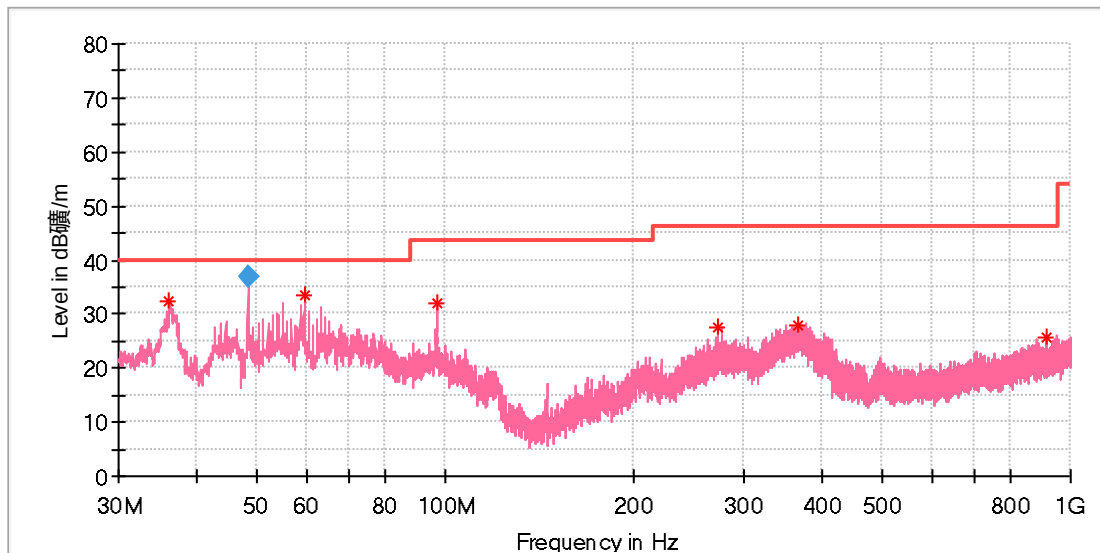

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.193077	32.42	40.00	7.58	100.0	V	0.0	-21.8
59.473077	33.47	40.00	6.53	100.0	V	154.0	-19.2
96.743462	31.87	43.50	11.63	100.0	V	275.0	-19.8
273.581923	27.55	46.00	18.45	100.0	V	336.0	-17.2
366.515385	28.07	46.00	17.93	100.0	V	105.0	-14.8
916.281539	25.81	46.00	20.19	100.0	V	303.0	-5.3


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.356423	36.92	40.00	3.08	100.0	V	223.0	-18.7

Appendix A.4: Test Results of Conducted Emission

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

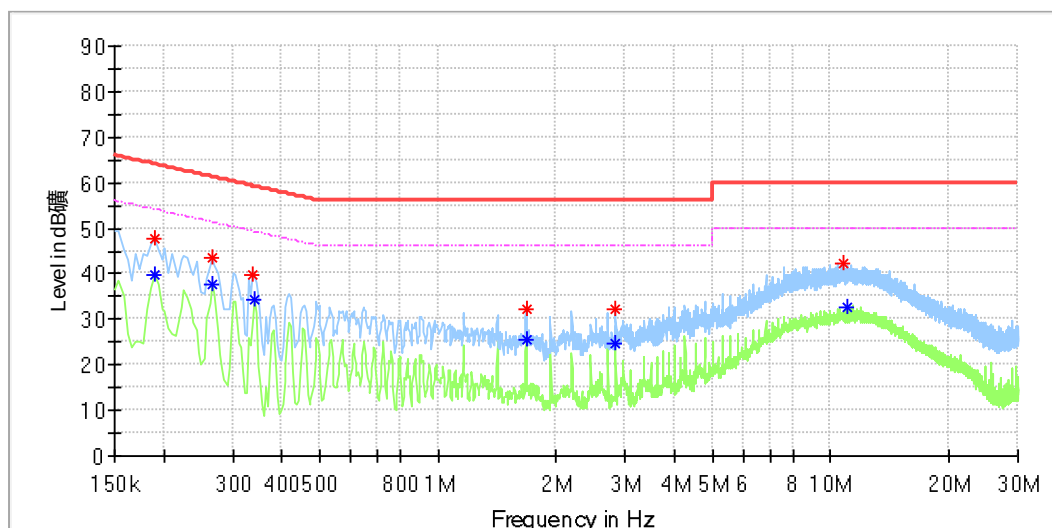

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.190000	---	39.67	54.04	14.37	L1	9.9
0.190000	47.71	---	64.04	16.32	L1	9.9
0.266000	---	37.82	51.24	13.42	L1	9.9
0.266000	43.49	---	61.24	17.75	L1	9.9
0.338000	39.56	---	59.25	19.69	L1	9.9
0.342000	---	34.50	49.16	14.66	L1	9.9
1.678000	---	25.57	46.00	20.43	L1	10.1
1.678000	32.04	---	56.00	23.96	L1	10.1
2.838000	32.26	---	56.00	23.74	L1	10.2
2.838000	---	24.91	46.00	21.09	L1	10.2
10.774000	42.45	---	60.00	17.55	L1	10.3
10.966000	---	32.74	50.00	17.26	L1	10.3

Final Result

[illegible]

EUT Information

EUT Name:	2-in-1 Magnetic Wireless Charging Travel Kit
Model:	BE-MQ210W24
Test Mode:	Charging
Order No/Sample No:	168435892/A003519719-004
Test Voltage:	120V/60Hz
Remark:	Temp 24 Humi:50%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

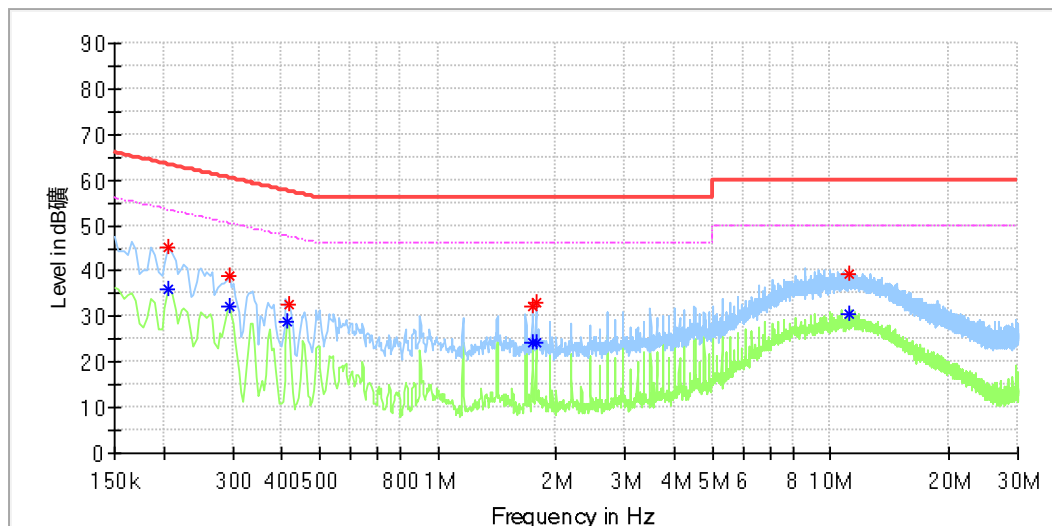

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.206000	---	35.97	53.37	17.40	N	9.8
0.206000	45.19	---	63.37	18.17	N	9.8
0.294000	---	32.16	50.41	18.26	N	9.8
0.294000	39.03	---	60.41	21.38	N	9.8
0.414000	---	28.69	47.57	18.88	N	9.8
0.418000	32.83	---	57.49	24.66	N	9.8
1.738000	---	24.45	46.00	21.55	N	9.8
1.738000	32.13	---	56.00	23.87	N	9.8
1.778000	---	24.44	46.00	21.56	N	9.8
1.778000	33.23	---	56.00	22.77	N	9.8
11.194000	39.35	---	60.00	20.65	N	10.0
11.206000	---	30.71	50.00	19.29	N	10.0

Final Result

[illegible]