

Test Report

FCC ID:A7M-RWC37

Date of issue: June 24, 2020

Report number: MTi19112909-9E1

Sample description: Wireless Charging Stand

Model(s): RWC37, MWC37

Applicant: Shenzhen Reflying Electronic Co., Ltd.

Address: 6 Bldg., Gaoxinjian Industrial Zone, Heping Villag Fuyong Town,
Bao'an District, Shenzhen, Guangdong, China

Date of test: June 02, 2020 – June 19, 2020

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Table of Contents

1	GENERAL INFORMATION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	TEST MODE	4
1.3	EUT TEST SETUP.....	5
1.4	ANCILLARY EQUIPMENT	5
2	SUMMARY OF TEST RESULT	6
2.1	OPERATION CHANNEL LIST	6
2.2	TEST CHANNEL	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY.....	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	TEST RESULTS.....	9
5.1	ANTENNA REQUIREMENT	9
5.1.1	<i>Standard requirement</i>	9
5.1.2	<i>EUT Antenna</i>	9
5.2	CONDUCTED EMISSION	10
5.2.1	<i>Limits</i>	10
5.2.2	<i>Test Procedures</i>	10
5.2.3	<i>Test Setup</i>	10
5.2.4	<i>Test Result</i>	10
5.3	RADIATED EMISSION.....	19
5.3.1	<i>Limits</i>	19
5.3.2	<i>Test Procedures</i>	20
5.3.3	<i>Test Setup</i>	21
5.3.4	<i>Test Result</i>	21
5.4	OCCUPIED BANDWIDTH.....	29
5.4.1	<i>Test method</i>	29
5.4.2	<i>Test result</i>	29
5.4.3	<i>Test method</i>	31
5.4.4	<i>EUT SETUP</i>	31
5.4.5	<i>Test result</i>	31
	PHOTOGRAPHS OF THE TEST SETUP	33
	PHOTOGRAPHS OF THE EUT.....	36

Test Result Certification

Applicant's name: Shenzhen Reflying Electronic Co., Ltd.

Address: 6 Bldg., Gaoxinjian Industrial Zone, Heping Villag Fuyong Town, Bao'an District, Shenzhen, Guangdong, China

Manufacture's name: Shenzhen Reflying Electronic Co., Ltd.

Address: 6 Bldg., Gaoxinjian Industrial Zone, Heping Villag Fuyong Town, Bao'an District, Shenzhen, Guangdong, China

Product name: Wireless Charging Stand

Trademark: Reflying, Mangotek

Model name: RWC37, MWC37

Standards: FCC Part 15C

Test procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Demi Mu

June 19, 2020

Reviewed by:



Leo Su

June 24, 2020

Approved by:



Tom Xue

June 24, 2020

1 GENERAL INFORMATION

1.1 Feature of equipment under test (EUT)

Product name:	Wireless Charging Stand
Model name:	RWC37, MWC37
Model difference:	All the model are the same circuit and RF module, except the brand and model No..
Operation frequency:	115–205 kHz
Modulation type:	Load modulation
Antenna type:	Coil Antenna
Power supply:	DC 15V from adapter AC 120V/60Hz
Battery:	N/A
Adapter information:	N/A
EUT serial number:	MTi19112909-9-S0001

1.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	TX

Note:

1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

2: EUT is tested under full load.

1.3 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary equipment

Equipment	Model	S/N	Manufacturer
Adapter	A653-1503500I	/	ShenZhen Xinspower Technology Co., Ltd
Mobile phone	S9+	/	SAMSUNG
AirPods	/	/	APPLE
Apple Watch	/	/	APPLE

2 Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	FCC PART 15.203	Antenna requirement	Pass
2	FCC PART 15.207	Conducted emission	Pass
3	FCC PART 15.209	Radiated emission	Pass
4	FCC Part 15.215	20dB bandwidth	Pass

2.1 Operation channel list

	Frequency (kHz)		
Channel	AirPods	Mobile phone	Apple watch
Low	115	115	326.5
Middle	130	156	
High	205	205	

2.2 Test channel

	Channel	Frequency (kHz)
AirPods	Middle	130
Mobile phone	Middle	156
Apple watch	/	326.5

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonscent co., ltd	JS1120-3	2.5.77.0418

4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI7	100314	2019/10/09	2020/10/08
MTI-E006	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-872	2019/10/15	2020/10/14
MTI-E014	amplifier	Hewlett-Packard	8447D	3113A06150	2019/10/09	2020/10/08
MTI-E036	Single path vehicle AMN(LISN)	Schwarzbeck	NNBM 8124	01175	2019/10/09	2020/10/08
MTI-E038	Low noise active vertical monopole antenna	Schwarzbeck	VAMP 9243	#565	2019/10/16	2020/10/15
MTI-E039	Biconical antenna	Schwarzbeck	BBA 9106	#164	2019/10/15	2020/10/14
MTI-E041	MXG Vector Signal Generator	Agilent	N5182A	MY49060455	2020/04/16	2021/04/15
MTI-E042	ESG Series Analog signal generator	Agilent	E4421B	GB40051240	2020/05/21	2021/05/20
MTI-E044	Thermometer clock humidity monitor	-	HTC-1	/	2020/04/17	2021/04/16
MTI-E062	Log Periodic Antenna	Schwarzbeck	VUSLP 9111B	#312	2020/04/11	2022/04/10
MTI-E063	Log Periodic Dipole Array Antenna	ETS-LINDGREN	3148B	00224524	2020/04/11	2022/04/10
MTI-E065	Amplifier	EMtrace	RP06A	00117	2020/04/29	2021/04/28
MTI-E071	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2019/10/25	2020/10/24
MTI-E076	EMI Test Receiver	Rohde&schwarz	ESIB26	100273	2020/04/16	2021/04/15
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2020/04/16	2021/04/15
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2020/04/16	2021/04/15
MTI-E093	Artificial mains network	3ctest	LISN J50	ES3911805	2020/04/16	2021/04/15
MTI-E096	Power amplifier	Space-Dtronics	EWLNA0118G-P40	1852001	2020/04/29	2021/04/28
MTI-E097	Current Probe	SOLAR ELECTRONICS CO.	9207-1	220095-1	2020/04/17	2021/04/16
MTI-E098	Loop Sensor	SOLAR ELECTRONICS CO.	7334-1	220095-2	2020/04/21	2021/04/20
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						

5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.



5.2 Conducted emission

5.2.1 Limits

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.5 -5	56	46
5 -30	60	50

Note:

the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item – photographs of the test setup.


5.2.3 Test Setup

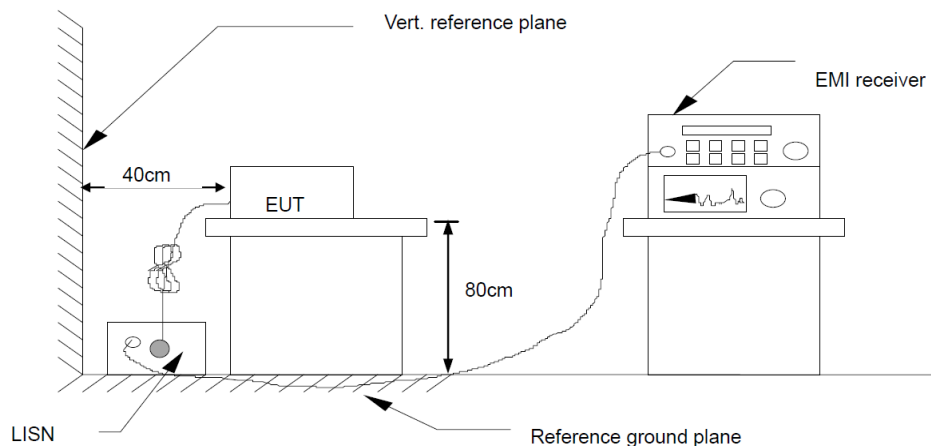

5.2.4 Test Result




EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	L
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

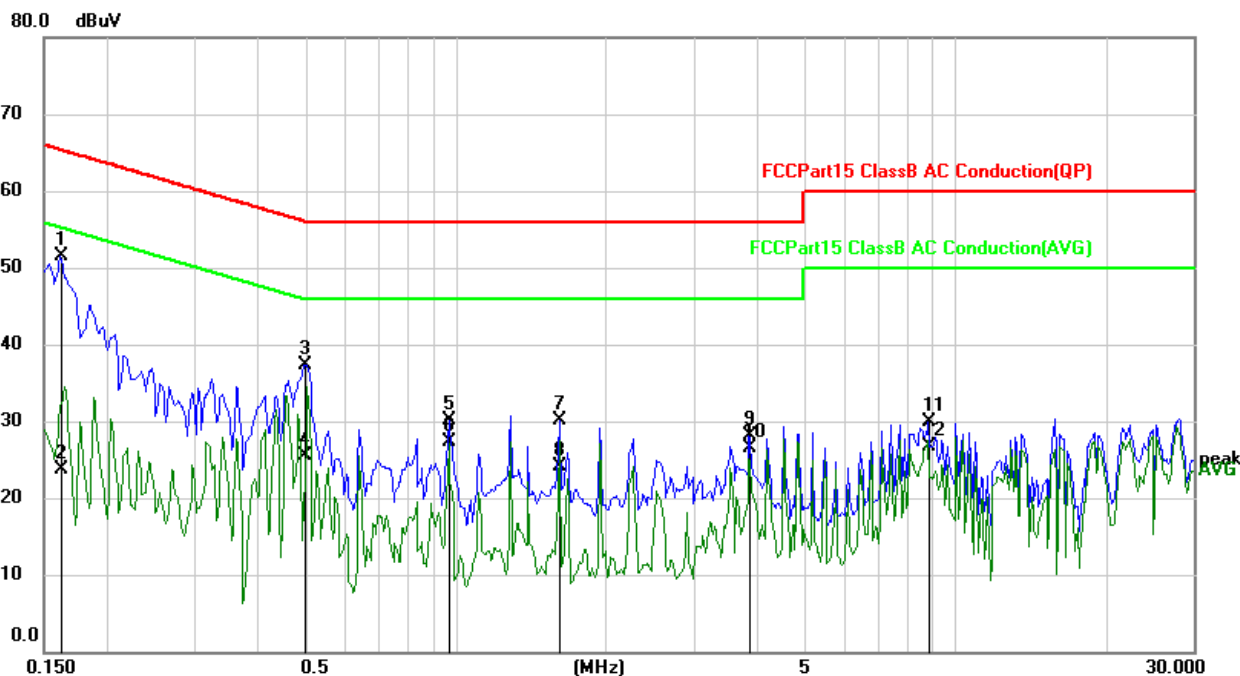

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1617	41.69	9.73	51.42	65.38	-13.96	QP
2		0.1617	14.03	9.73	23.76	55.38	-31.62	AVG
3		0.4977	27.52	9.88	37.40	56.04	-18.64	QP
4		0.4977	15.67	9.88	25.55	46.04	-20.49	AVG
5		0.9703	20.19	9.95	30.14	56.00	-25.86	QP
6		0.9703	17.34	9.95	27.29	46.00	-18.71	AVG
7		1.6148	20.09	9.96	30.05	56.00	-25.95	QP
8		1.6148	14.13	9.96	24.09	46.00	-21.91	AVG
9		3.8789	18.11	10.02	28.13	56.00	-27.87	QP
10		3.8789	16.52	10.02	26.54	46.00	-19.46	AVG
11		8.8359	19.75	10.23	29.98	60.00	-30.02	QP
12		8.8359	16.42	10.23	26.65	50.00	-23.35	AVG



EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	N
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

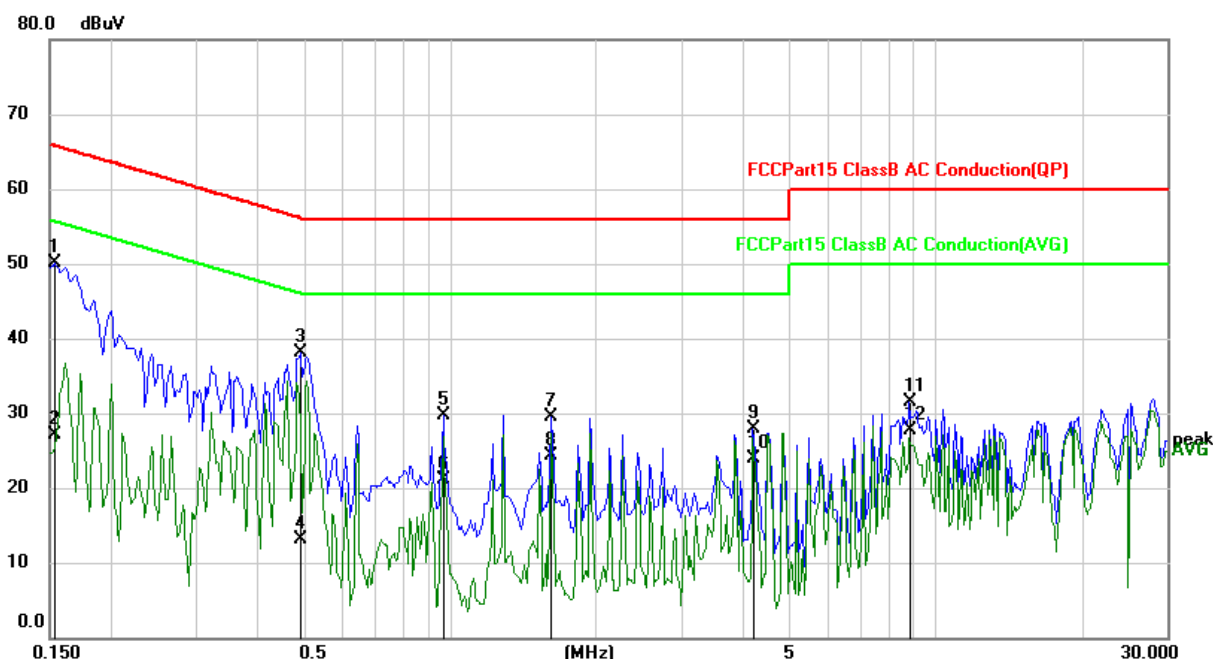


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1539	40.29	9.73	50.02	65.79	-15.77	QP
2		0.1539	17.45	9.73	27.18	55.79	-28.61	AVG
3		0.4938	28.15	9.88	38.03	56.10	-18.07	QP
4		0.4938	3.27	9.88	13.15	46.10	-32.95	AVG
5		0.9703	19.79	9.95	29.74	56.00	-26.26	QP
6		0.9703	11.24	9.95	21.19	46.00	-24.81	AVG
7		1.6187	19.57	9.96	29.53	56.00	-26.47	QP
8		1.6187	14.29	9.96	24.25	46.00	-21.75	AVG
9		4.2031	17.95	10.03	27.98	56.00	-28.02	QP
10		4.2031	13.91	10.03	23.94	46.00	-22.06	AVG
11		8.8633	21.31	10.23	31.54	60.00	-28.46	QP
12		8.8633	17.54	10.23	27.77	50.00	-22.23	AVG

EUT:	Wireless Charging Stand	Model Name:	RWC37
------	-------------------------	-------------	-------




Pressure:	101kPa	Phase:	L
Test voltage:	DC 15V from adapter AC 240V/60Hz	Test mode:	Mode 1

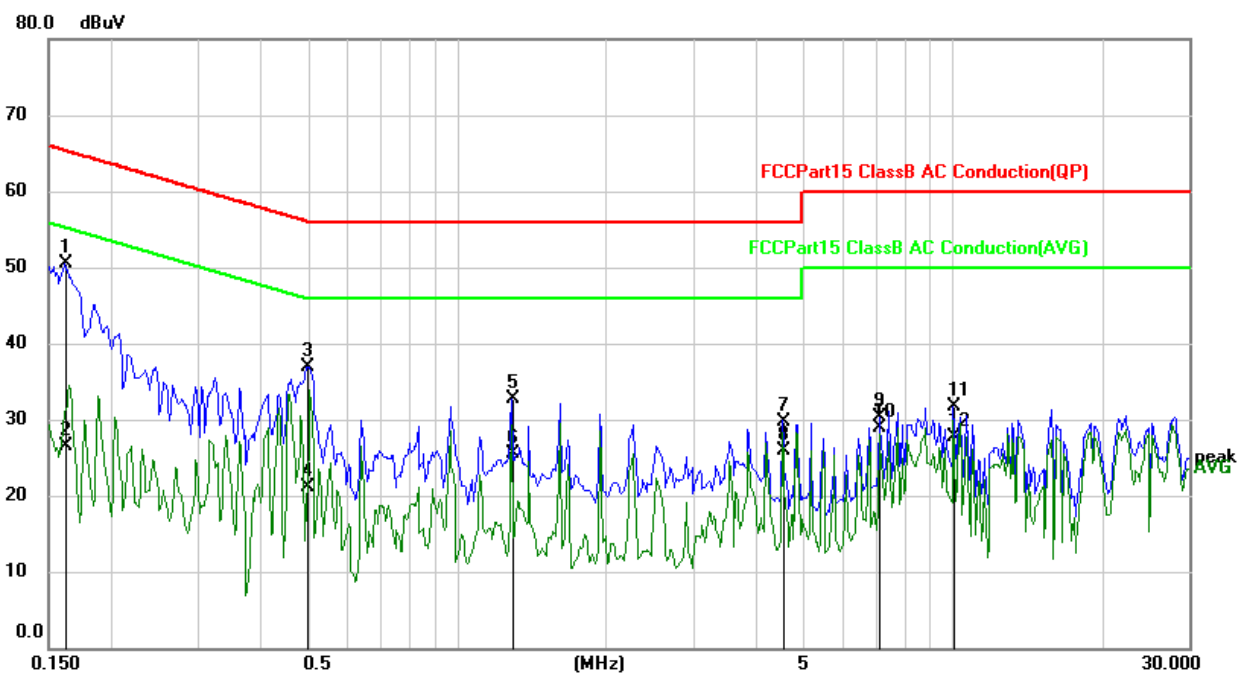

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1617	40.69	9.73	50.42	65.38	-14.96	QP
2		0.1617	16.69	9.73	26.42	55.38	-28.96	AVG
3		0.4975	27.02	9.88	36.90	56.04	-19.14	QP
4		0.4975	11.17	9.88	21.05	46.04	-24.99	AVG
5		1.2944	22.71	9.96	32.67	56.00	-23.33	QP
6		1.2944	15.63	9.96	25.59	46.00	-20.41	AVG
7		4.5273	19.76	10.04	29.80	56.00	-26.20	QP
8		4.5273	15.94	10.04	25.98	46.00	-20.02	AVG
9		7.1131	20.14	10.15	30.29	60.00	-29.71	QP
10		7.1131	18.77	10.15	28.92	50.00	-21.08	AVG
11		10.0195	21.50	10.29	31.79	60.00	-28.21	QP
12		10.0195	17.46	10.29	27.75	50.00	-22.25	AVG




EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	N
Test voltage:	DC 15V from adapter AC 240V/60Hz	Test mode:	Mode 1

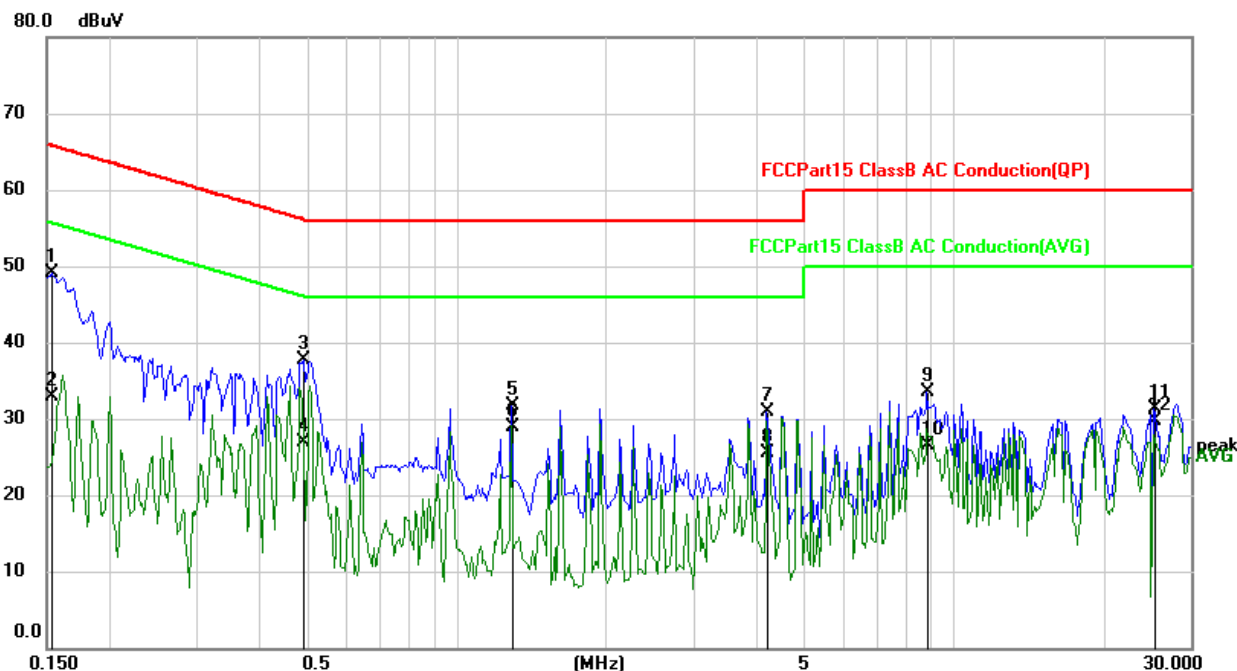

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1539	39.32	9.73	49.05	65.79	-16.74	QP
2		0.1539	23.17	9.73	32.90	55.79	-22.89	AVG
3		0.4939	27.87	9.88	37.75	56.10	-18.35	QP
4		0.4939	17.05	9.88	26.93	46.10	-19.17	AVG
5		1.2944	21.65	9.96	31.61	56.00	-24.39	QP
6		1.2944	18.85	9.96	28.81	46.00	-17.19	AVG
7		4.2031	20.95	10.03	30.98	56.00	-25.02	QP
8		4.2031	15.45	10.03	25.48	46.00	-20.52	AVG
9		8.8632	23.31	10.23	33.54	60.00	-26.46	QP
10		8.8632	16.23	10.23	26.46	50.00	-23.54	AVG
11		25.2148	21.11	10.25	31.36	60.00	-28.64	QP
12		25.2148	19.36	10.25	29.61	50.00	-20.39	AVG

Apple Watch:


EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	L
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

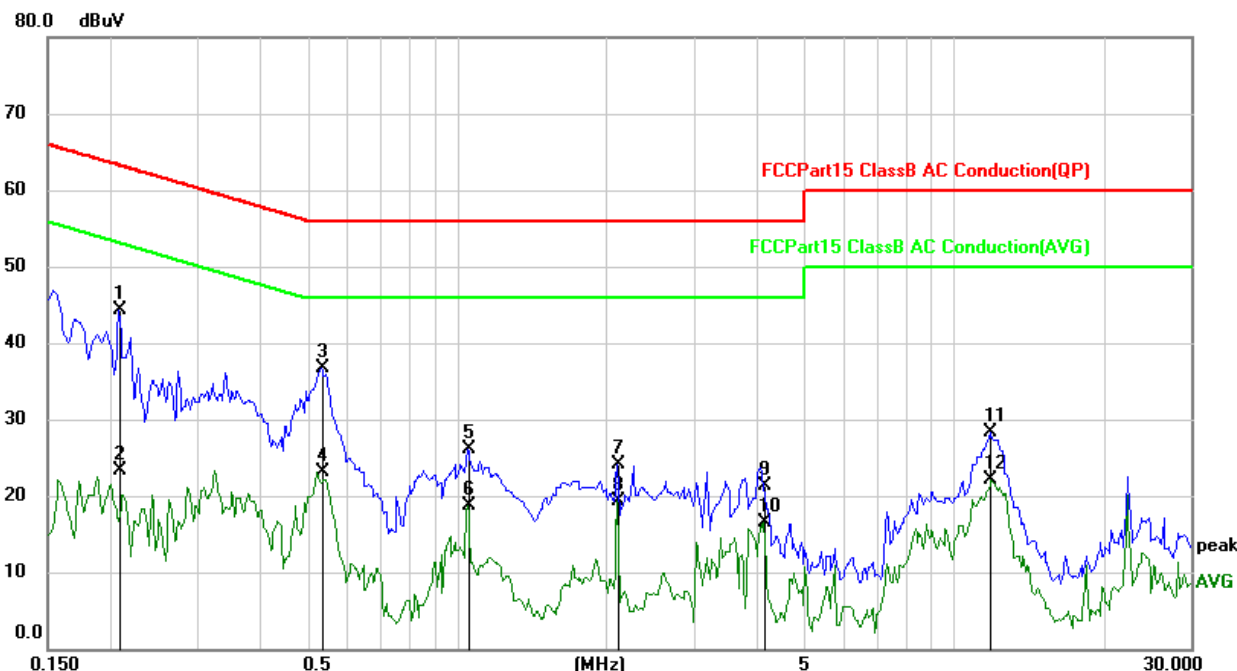

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.2086	34.58	9.73	44.31	63.26	-18.95	QP
2		0.2086	13.59	9.73	23.32	53.26	-29.94	AVG
3		0.5328	26.91	9.88	36.79	56.00	-19.21	QP
4		0.5328	13.21	9.88	23.09	46.00	-22.91	AVG
5		1.0523	16.24	9.95	26.19	56.00	-29.81	QP
6		1.0523	8.81	9.95	18.76	46.00	-27.24	AVG
7		2.0992	14.23	9.97	24.20	56.00	-31.80	QP
8		2.0992	9.34	9.97	19.31	46.00	-26.69	AVG
9		4.1406	11.19	10.03	21.22	56.00	-34.78	QP
10		4.1406	6.38	10.03	16.41	46.00	-29.59	AVG
11		11.8438	17.96	10.25	28.21	60.00	-31.79	QP
12		11.8438	11.81	10.25	22.06	50.00	-27.94	AVG



EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	N
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

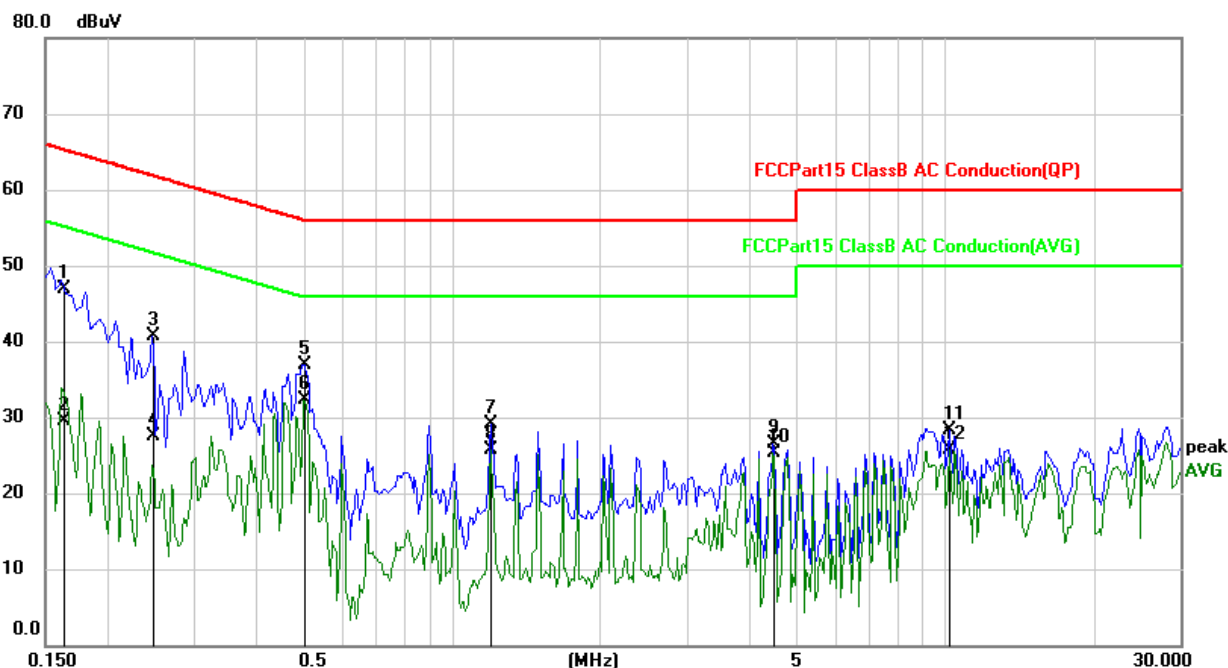


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1641	37.20	9.73	46.93	65.25	-18.32	QP
2		0.1641	19.75	9.73	29.48	55.25	-25.77	AVG
3		0.2477	30.90	9.73	40.63	61.83	-21.20	QP
4		0.2477	17.78	9.73	27.51	51.83	-24.32	AVG
5		0.5016	27.07	9.88	36.95	56.00	-19.05	QP
6	*	0.5016	22.33	9.88	32.21	46.00	-13.79	AVG
7		1.2008	19.14	9.95	29.09	56.00	-26.91	QP
8		1.2008	15.69	9.95	25.64	46.00	-20.36	AVG
9		4.5000	16.39	10.04	26.43	56.00	-29.57	QP
10		4.5000	15.24	10.04	25.28	46.00	-20.72	AVG
11		10.2031	17.97	10.29	28.26	60.00	-31.74	QP
12		10.2031	15.36	10.29	25.65	50.00	-24.35	AVG

EUT:	Wireless Charging Stand	Model Name:	RWC37
------	-------------------------	-------------	-------



Pressure:	101kPa	Phase:	L
Test voltage:	DC 15V from adapter AC 240V/60Hz	Test mode:	Mode 1

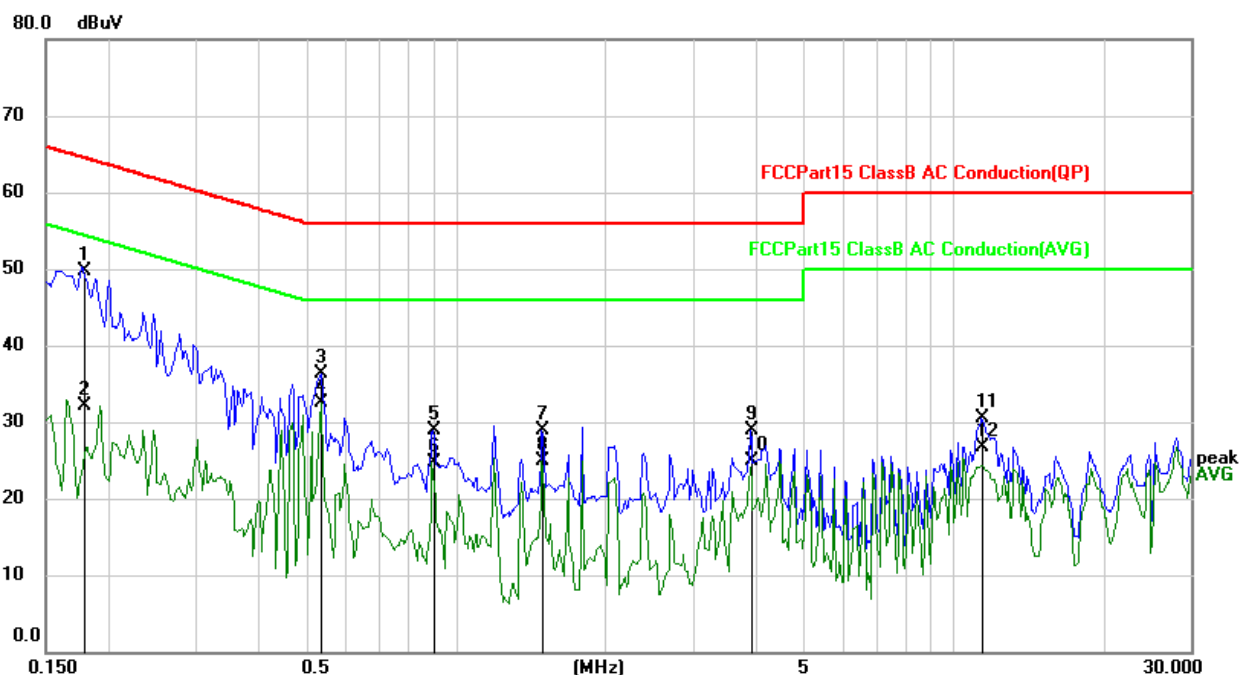


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1787	39.96	9.73	49.69	64.55	-14.86	QP
2		0.1787	22.42	9.73	32.15	54.55	-22.40	AVG
3		0.5367	26.51	9.88	36.39	56.00	-19.61	QP
4	*	0.5367	22.67	9.88	32.55	46.00	-13.45	AVG
5		0.9000	19.01	9.94	28.95	56.00	-27.05	QP
6		0.9000	14.77	9.94	24.71	46.00	-21.29	AVG
7		1.4937	18.99	9.96	28.95	56.00	-27.05	QP
8		1.4937	15.01	9.96	24.97	46.00	-21.03	AVG
9		3.9023	18.92	10.03	28.95	56.00	-27.05	QP
10		3.9023	14.81	10.03	24.84	46.00	-21.16	AVG
11		11.4258	20.18	10.26	30.44	60.00	-29.56	QP
12		11.4258	16.51	10.26	26.77	50.00	-23.23	AVG

EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Phase:	N



Test voltage:	DC 15V from adapter AC 240V/60Hz	Test mode:	Mode 1
---------------	-------------------------------------	------------	--------

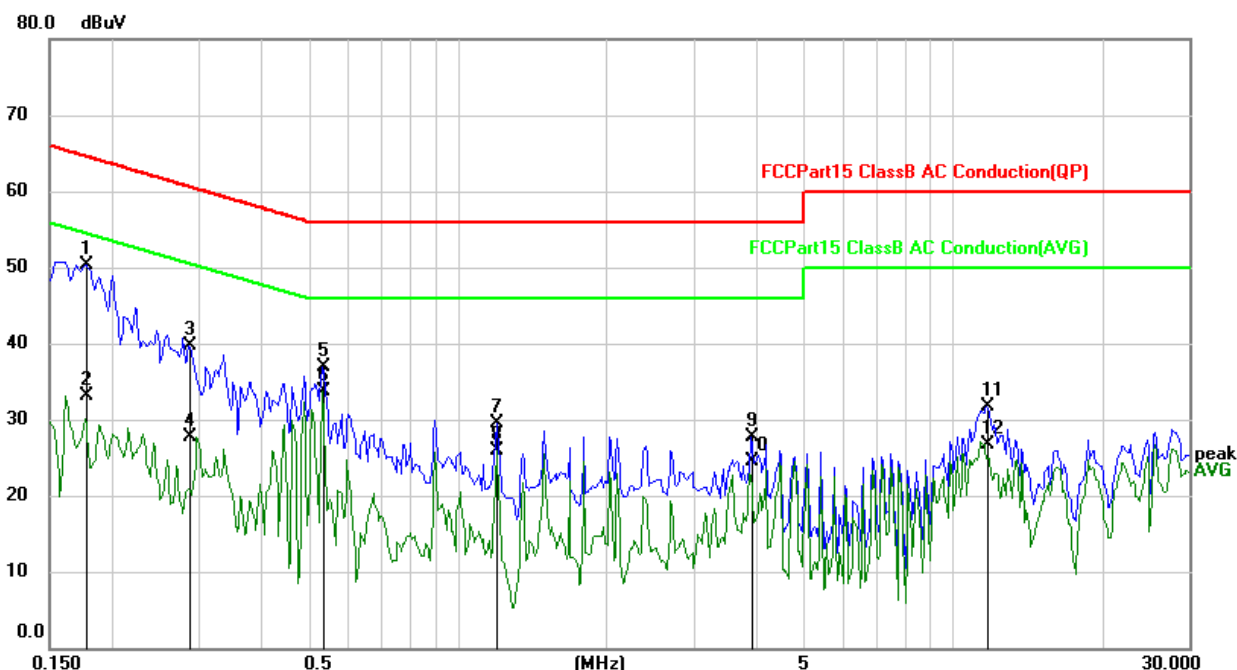

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1773	40.63	9.73	50.36	64.61	-14.25	QP
2		0.1773	23.35	9.73	33.08	54.61	-21.53	AVG
3		0.2867	29.90	9.75	39.65	60.62	-20.97	QP
4		0.2867	17.91	9.75	27.66	50.62	-22.96	AVG
5		0.5328	27.01	9.88	36.89	56.00	-19.11	QP
6	*	0.5328	23.80	9.88	33.68	46.00	-12.32	AVG
7		1.2008	19.57	9.95	29.52	56.00	-26.48	QP
8		1.2008	15.91	9.95	25.86	46.00	-20.14	AVG
9		3.9023	17.71	10.03	27.74	56.00	-28.26	QP
10		3.9023	14.41	10.03	24.44	46.00	-21.56	AVG
11		11.6952	21.38	10.26	31.64	60.00	-28.36	QP
12		11.6952	16.54	10.26	26.80	50.00	-23.20	AVG

5.3 Radiated emission

5.3.1 Limits

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

The limit for radiated test was performed according to FCC PART 15C.

The tighter limit applies at the band edges.

Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP




5.3.2 Test Procedures

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
- h. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

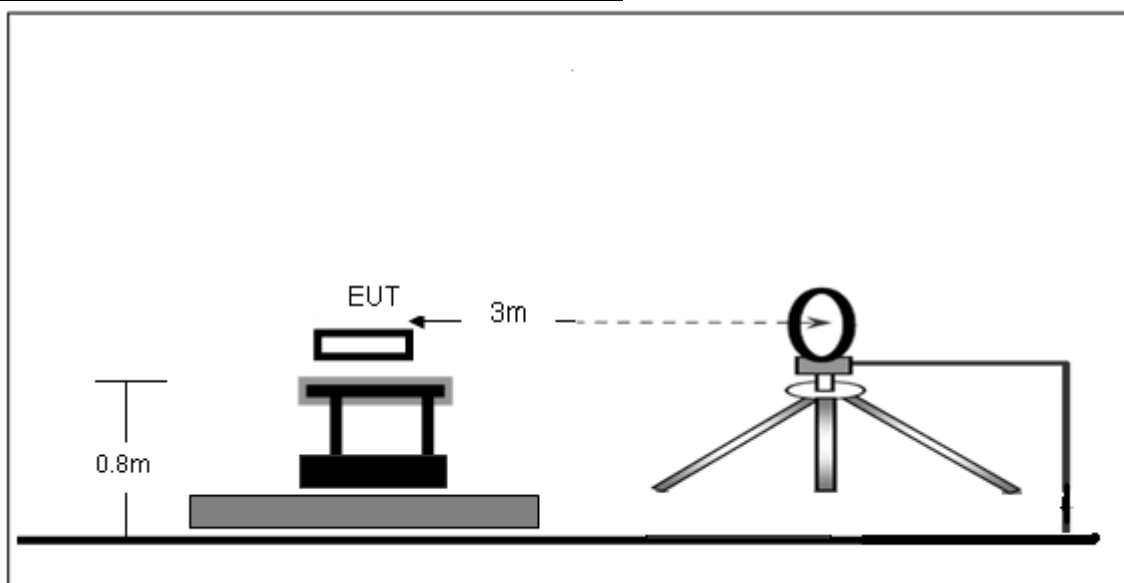

Radiated Emission Test-Up Frequency 30MHz~1GHz

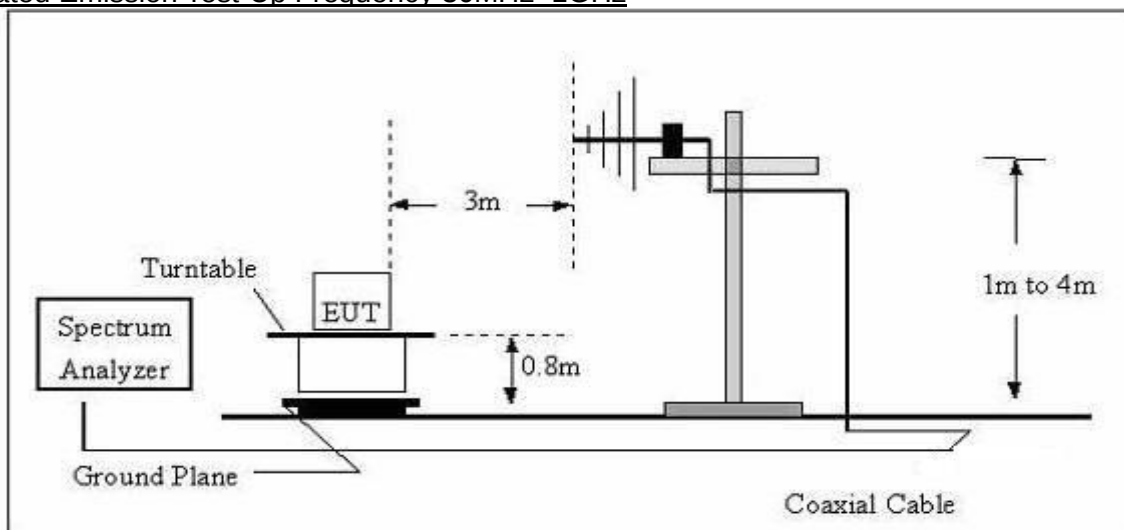


5.3.4 Test Result



Frequency range (9kHz – 30MHz)

EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 15V from adapter AC 120V/60Hz		

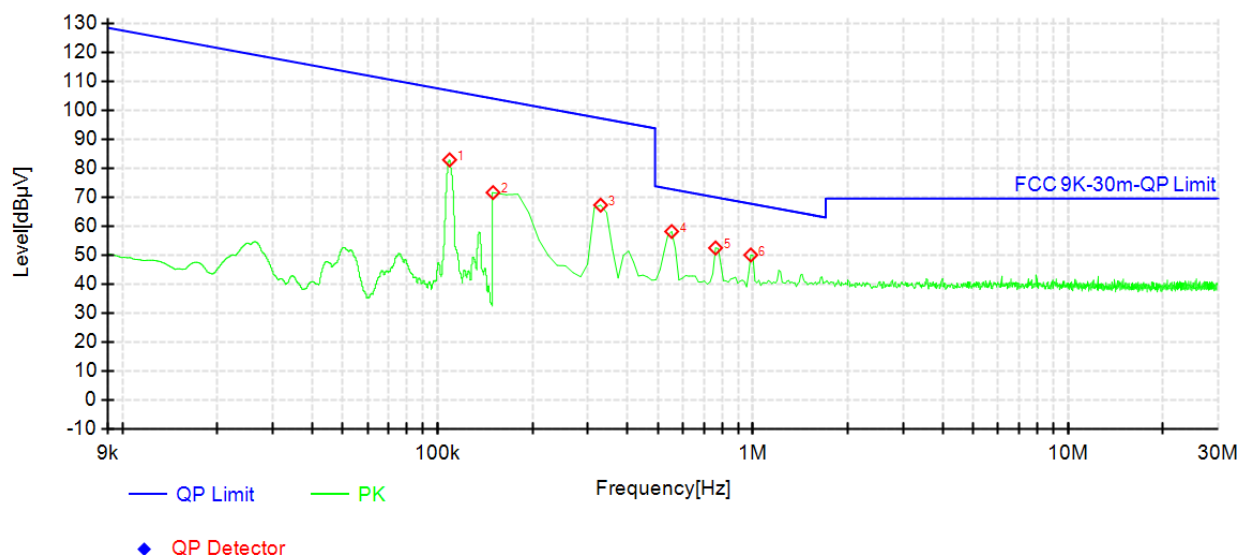


Suspected Data List

NO.	Freq. [MHz]	Factor [dB]	Margin [dB]	Detector	Height [cm]	Angle [°]	Polarity
1	0.1092	20.57	23.93	PK	100	126	Vertical
2	0.1500	20.17	32.47	PK	100	132	Vertical
3	0.3291	20.33	30.01	PK	100	132	Vertical
4	0.5530	20.51	14.60	PK	100	118	Vertical
5	0.7619	20.65	17.52	PK	100	139	Vertical
6	0.9858	20.81	17.72	PK	100	132	Vertical



Apple Watch:


EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 15V from adapter AC 120V/60Hz		

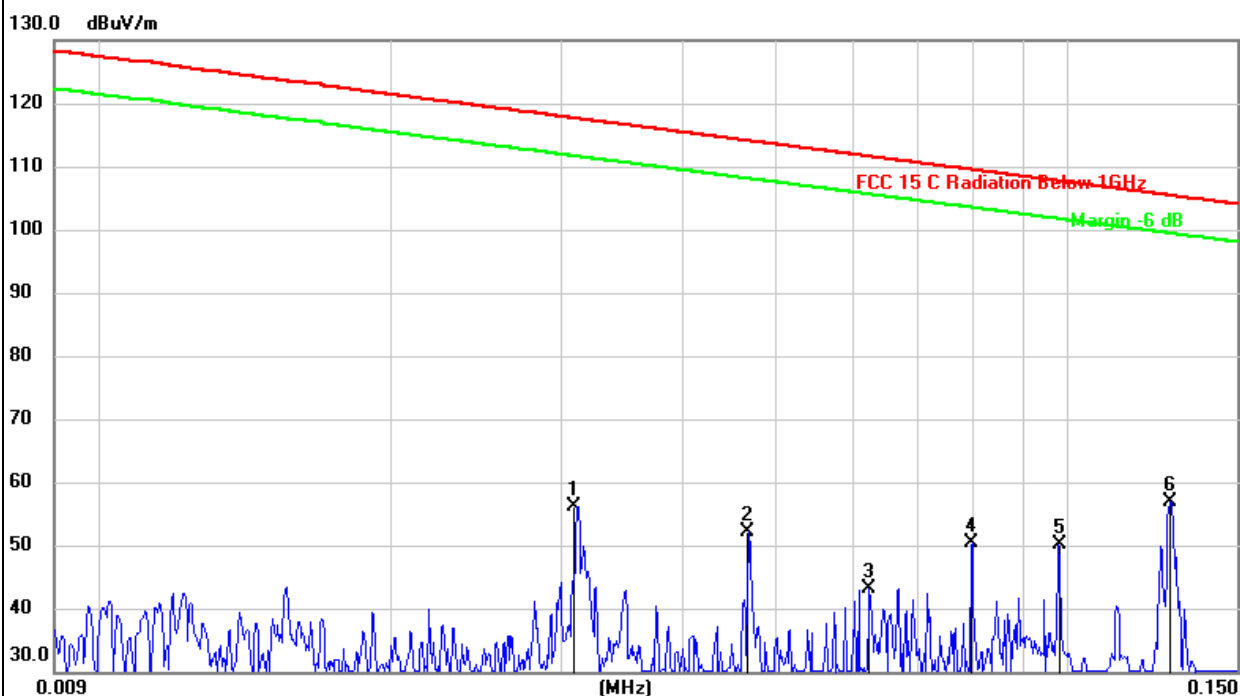

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.0309	35.44	20.61	56.05	117.67	-61.62	peak
2		0.0468	31.44	20.77	52.21	114.09	-61.88	peak
3		0.0625	22.38	20.74	43.12	111.59	-68.47	peak
4		0.0796	29.46	20.80	50.26	109.50	-59.24	peak
5		0.0981	29.23	20.82	50.05	107.69	-57.64	peak
6	*	0.1277	36.57	20.35	56.92	105.41	-48.49	peak



EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 15V from adapter AC 120V/60Hz		

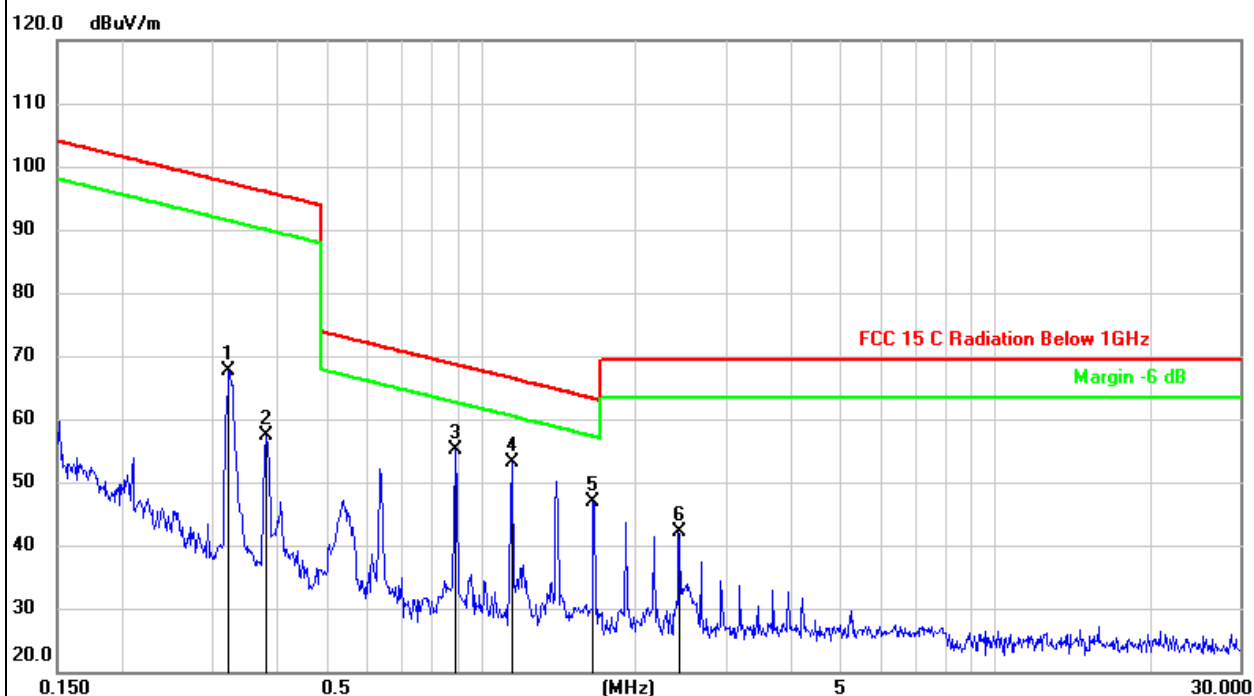


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.3234	47.30	20.42	67.72	97.39	-29.67	peak
2		0.3830	36.82	20.46	57.28	95.93	-38.65	peak
3		0.8941	34.44	20.76	55.20	68.59	-13.39	peak
4	*	1.1532	32.40	20.78	53.18	66.39	-13.21	peak
5		1.6533	26.25	20.68	46.93	63.27	-16.34	peak
6		2.4218	21.48	20.54	42.02	69.50	-27.48	peak



Frequency range (30MHz – 1GHz)

EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

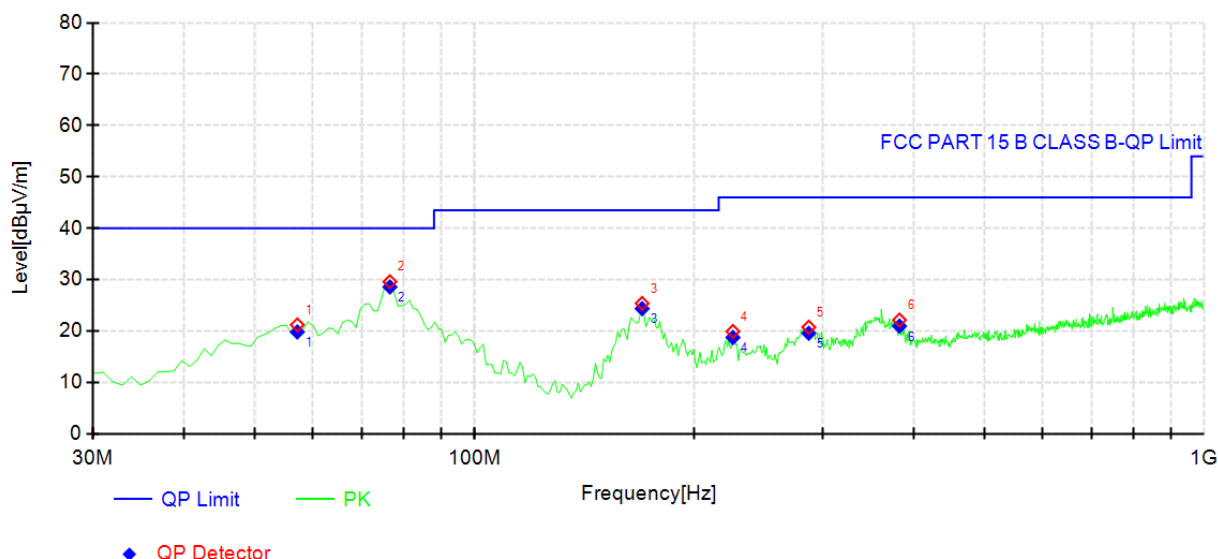


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.1600	-15.08	19.81	40.00	20.19	200	170	Horizontal
2	76.5600	-19.16	28.57	40.00	11.43	200	189	Horizontal
3	169.6800	-17.45	24.35	43.50	19.15	200	195	Horizontal
4	225.9400	-13.79	18.73	46.00	27.27	100	216	Horizontal
5	287.0500	-11.99	19.56	46.00	26.44	100	216	Horizontal
6	382.1100	-9.96	20.95	46.00	25.05	100	172	Horizontal



EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

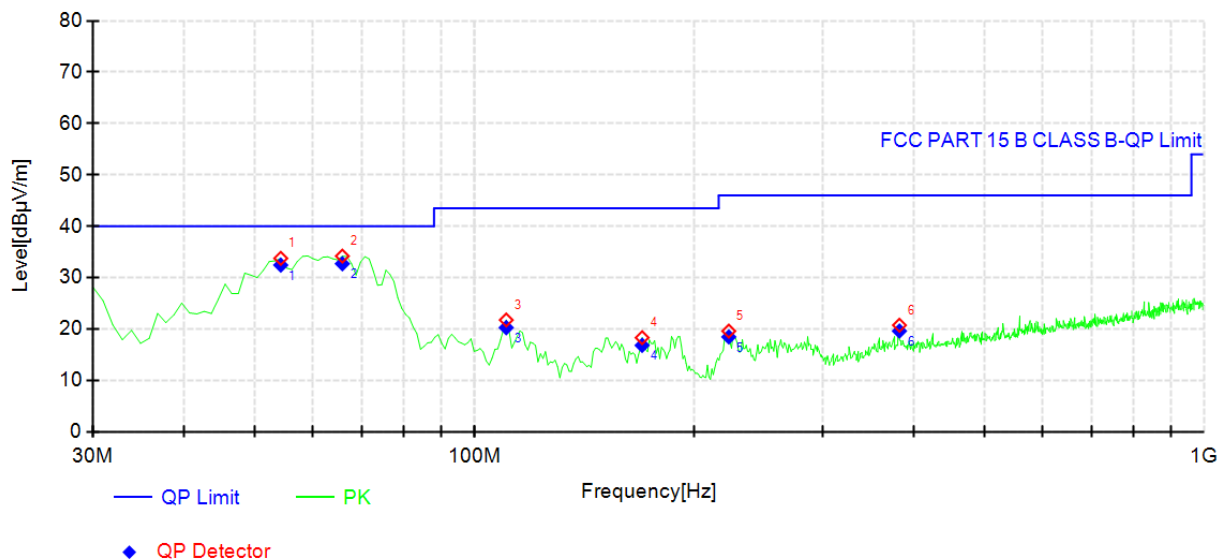


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	54.2500	-14.64	32.44	40.00	7.56	100	133	Vertical
2	65.8900	-16.97	32.70	40.00	7.30	100	1	Vertical
3	110.5100	-15.73	20.26	43.50	23.24	100	1	Vertical
4	169.6800	-17.45	16.82	43.50	26.68	100	126	Vertical
5	223.0300	-13.89	18.46	46.00	27.54	100	360	Vertical
6	382.1100	-9.96	19.60	46.00	26.40	100	359	Vertical

Apple Watch:

EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

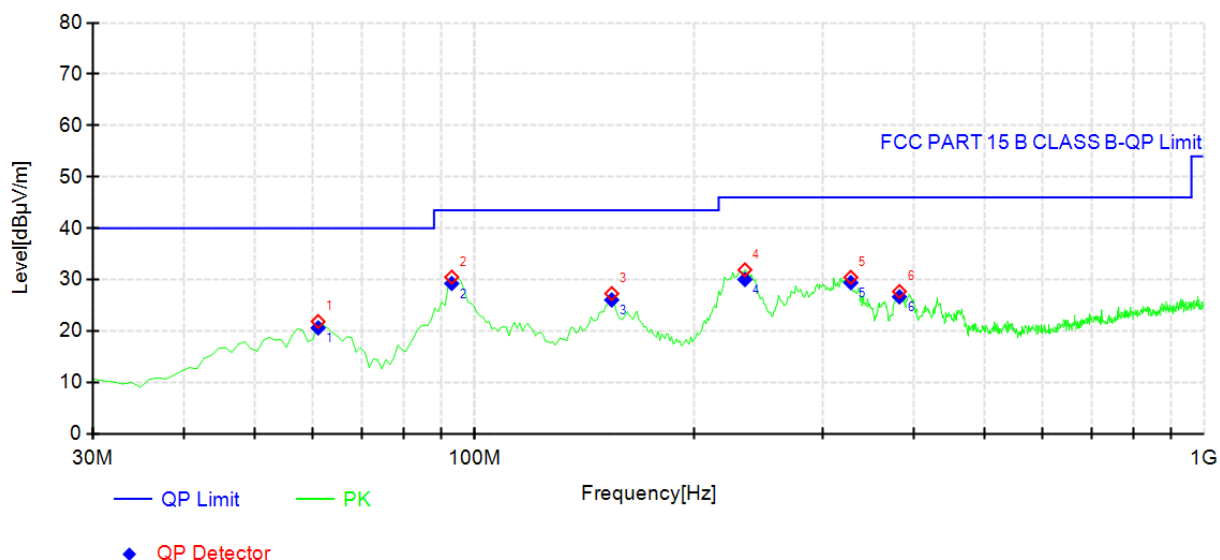


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.0400	-15.76	20.60	40.00	19.40	200	210	Horizontal
2	93.0500	-16.85	29.24	43.50	14.26	200	359	Horizontal
3	154.1600	-18.35	26.04	43.50	17.46	200	210	Horizontal
4	234.6700	-13.49	30.02	46.00	15.98	100	214	Horizontal
5	327.7900	-11.06	29.41	46.00	16.59	100	182	Horizontal
6	382.1100	-9.96	26.65	46.00	19.35	100	16	Horizontal



EUT:	Wireless Charging Stand	Model Name:	RWC37
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	DC 15V from adapter AC 120V/60Hz	Test mode:	Mode 1

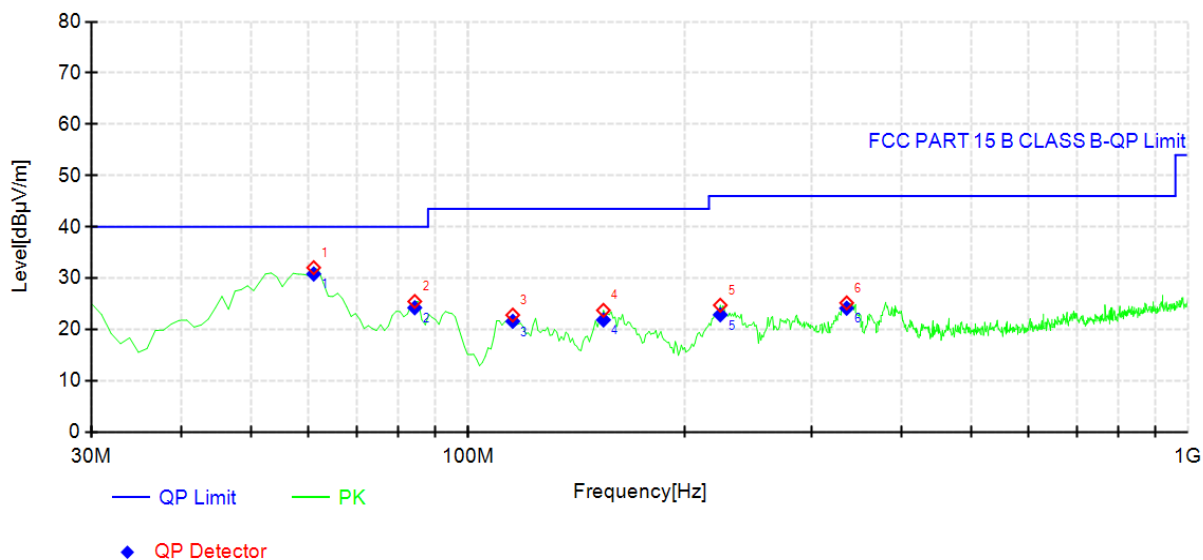

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.0400	-15.76	30.81	40.00	9.19	100	1	Vertical
2	84.3200	-18.74	24.22	40.00	15.78	100	204	Vertical
3	115.3600	-16.50	21.57	43.50	21.93	100	63	Vertical
4	154.1600	-18.35	21.85	43.50	21.65	100	1	Vertical
5	224.0000	-13.85	22.85	46.00	23.15	100	1	Vertical
6	335.5500	-10.90	24.13	46.00	21.87	100	230	Vertical

5.4 Occupied bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.4.2 Test result

/	Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
AirPods	130	8.123	6.986
Mobile phone	156	8.167	7.000

Test plots as below:

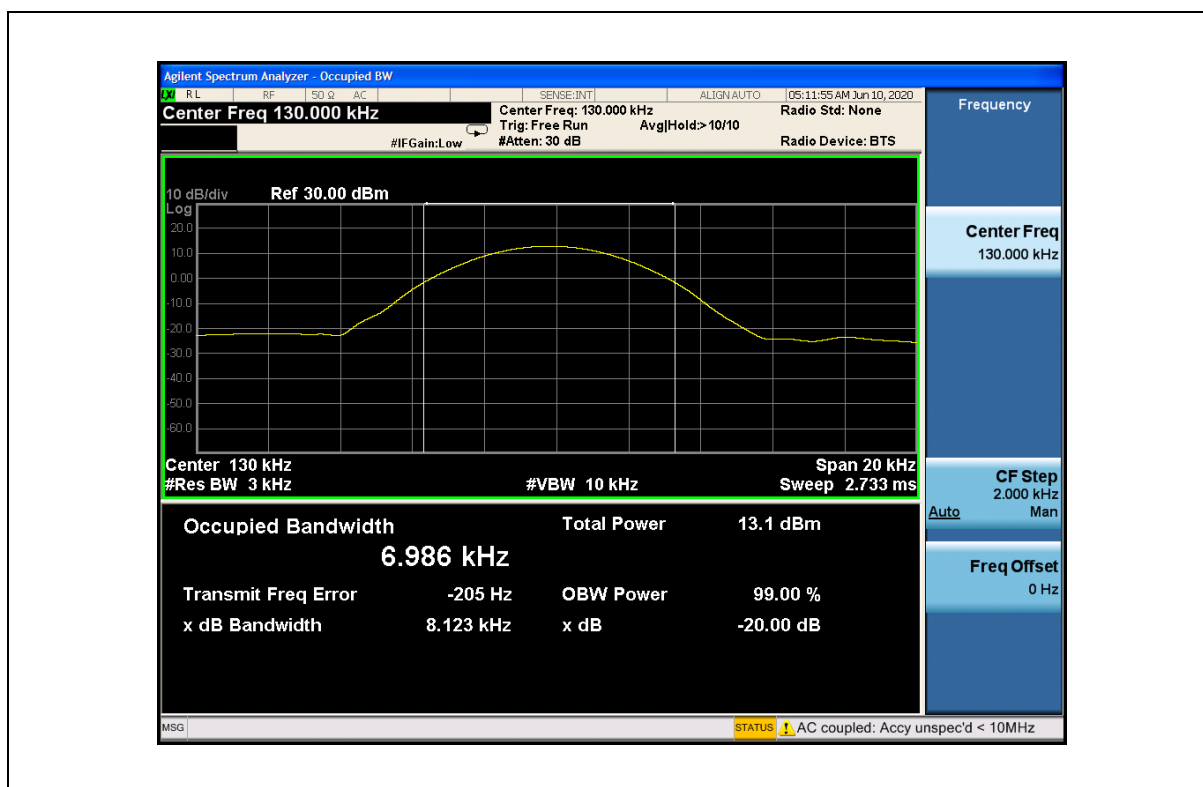

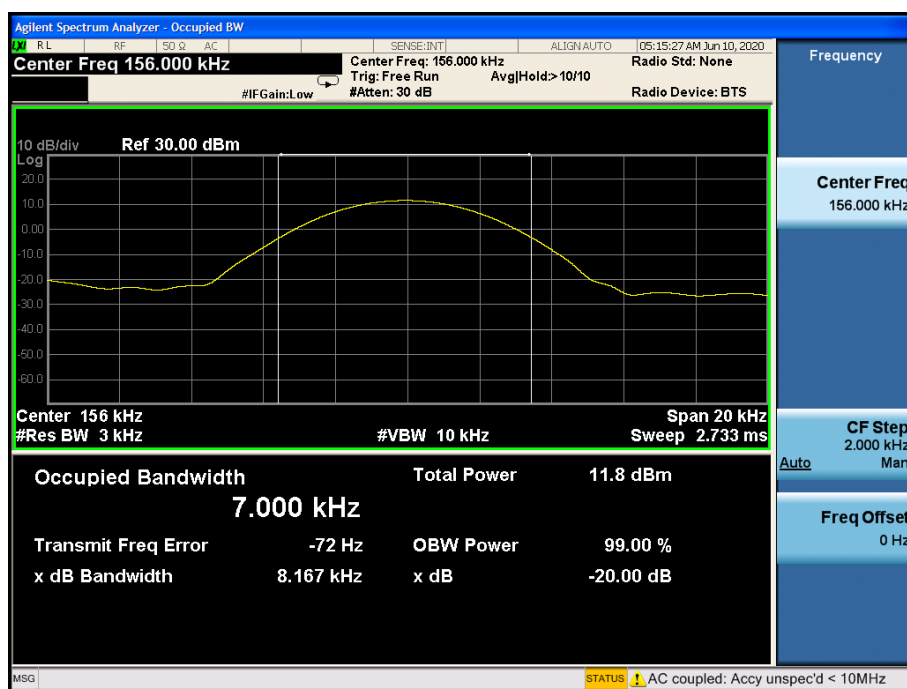



5.4.3 Test method

The transmitter output is connected to the spectrum analyzer.
The RBW is set to 300Hz. The VBW is set to 3 times the RBW.
The sweep time is coupled.
The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

Note that when the EUT was in standby mode the only signal that comes out from the EUT was the intentional charging signal of 326.5kHz. On the other hand, when the EUT was in operational mode there were two signals. One of the intentional charging signal of 326.5kHz and the other one the control signal of 340kHz that controls the communication/charging status between EUT and the client device-the watch.

5.4.4 EUT SETUP

Configuration 1: Charger in standby mode, transmitting low duty cycle CW signal at 326.5kHz test.


Configuration 2: Charger in pairing mode with FSK modulation (-0/+15 kHz) which occurs over a very short period of time as soon as the watch is placed on the charger.

Configuration 3: Charger in charging mode with CW signal and duty cycle varied to control charge level via load modulation from watch.


5.4.5 Test result

Test plots as below:


Configuration 1:

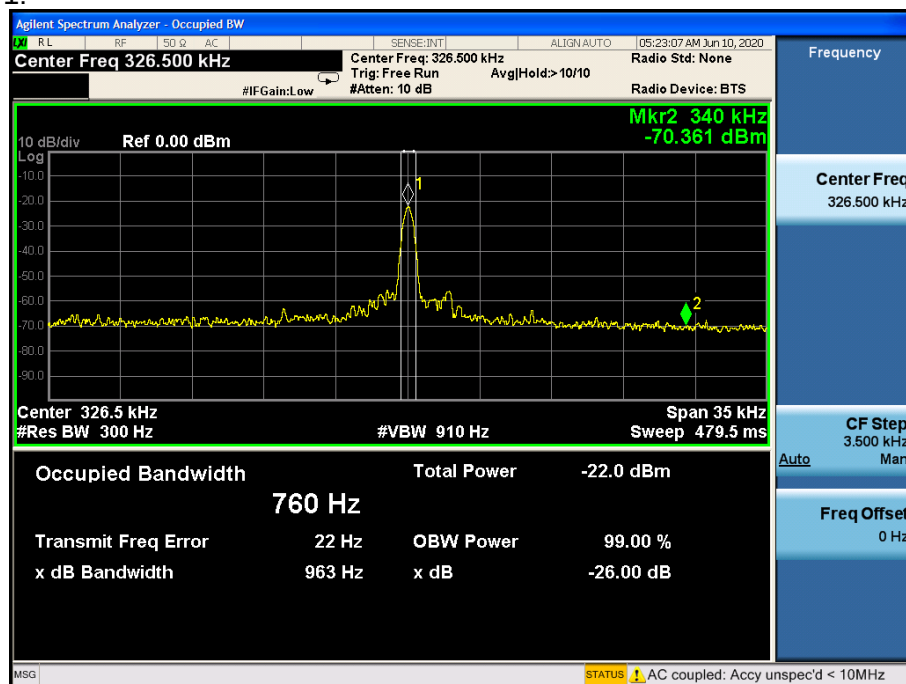

Configuration 2:


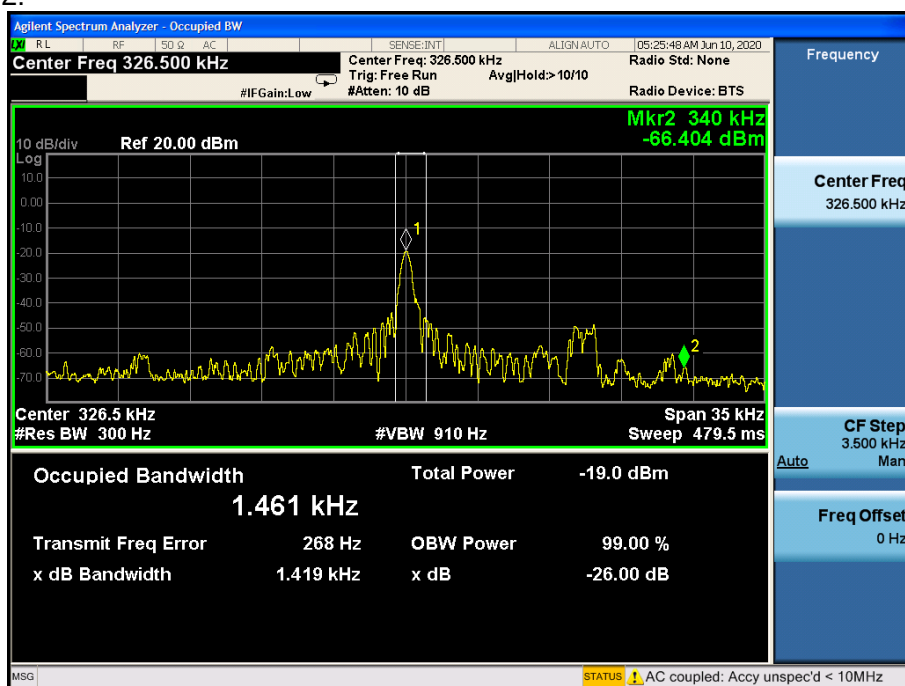



Configuration 3:

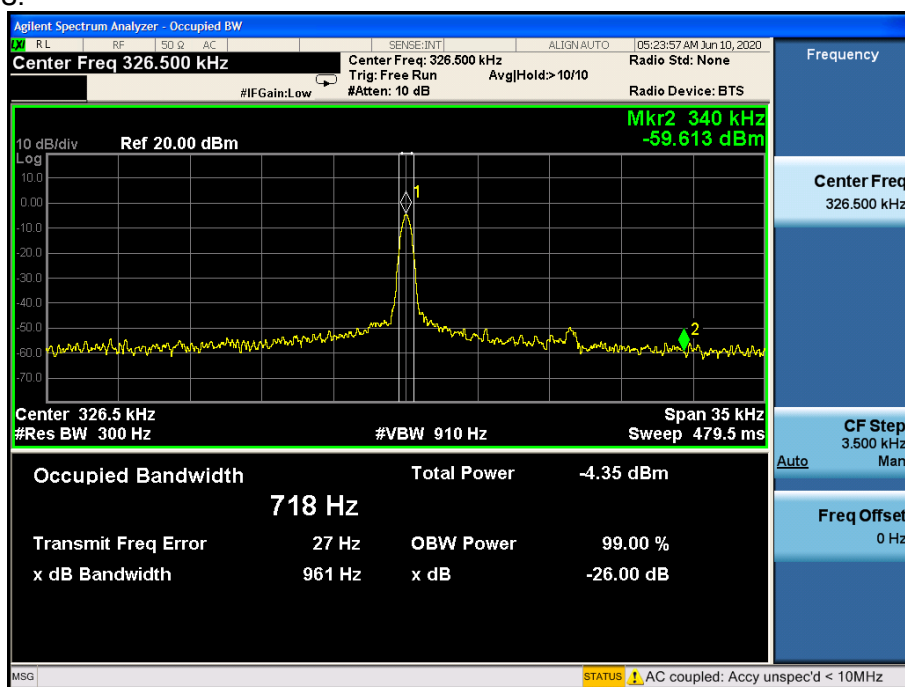

Photographs of the Test Setup

Radiated emission

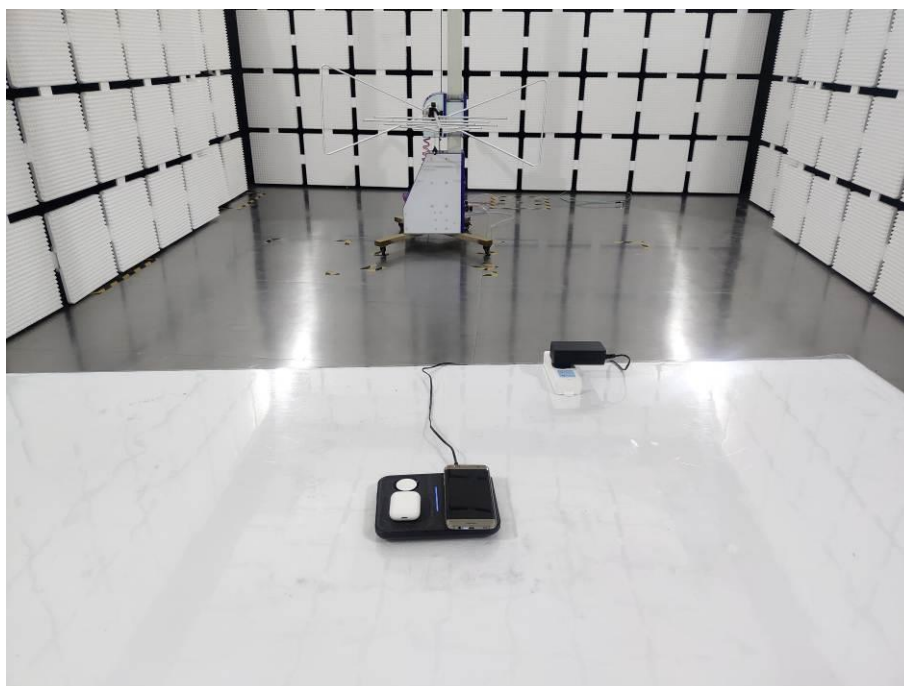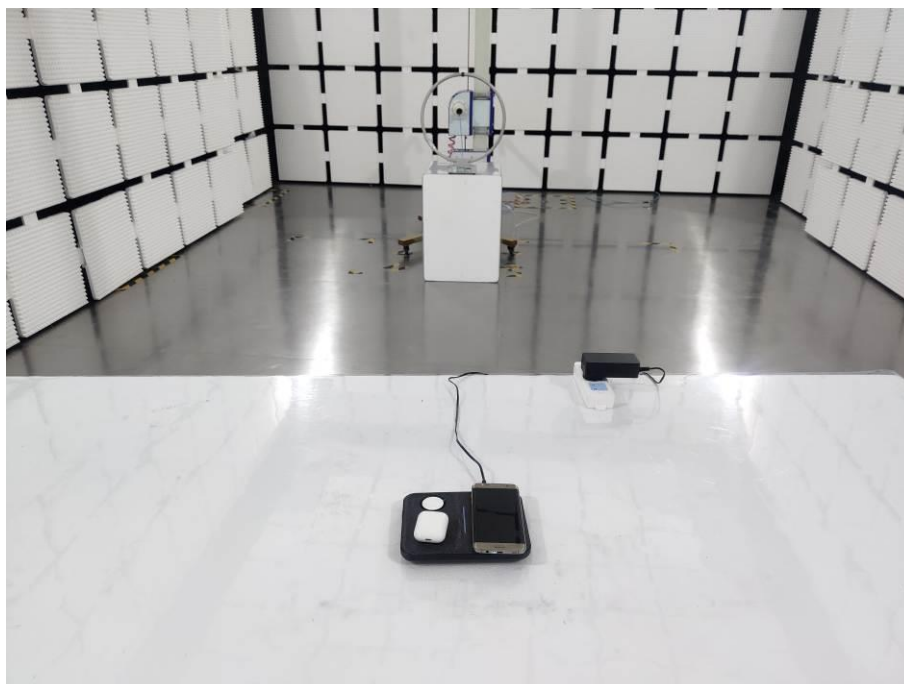

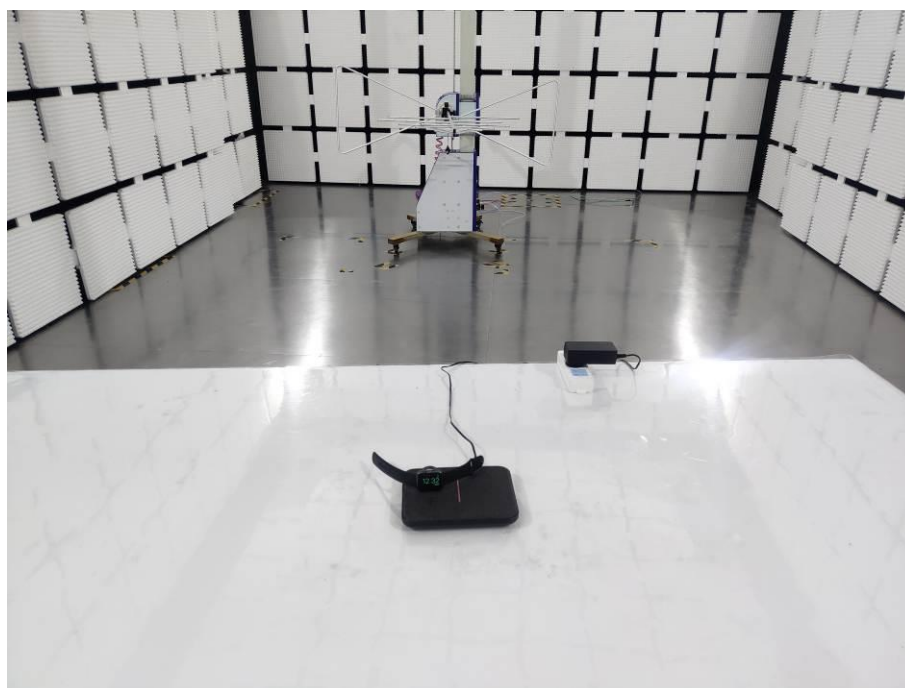

Conducted emission





Photographs of the EUT

See the APPENDIX 1: EUT PHOTOS in the report No.: MTi19112909-9E1-1.

----END OF REPORT----