



Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

info@ComplianceTesting.com

Test Report

Prepared for: Shenzhen SolidRF, LLC

Model: 5 Band Mobile

Description: 5 Band Mobile BDA

FCC ID: A7V-SR25502001

To

FCC Part 20

Date of Issue: March 2, 2015

On the behalf of the applicant:

**Shenzhen SolidRF, LLC
E3 Building, Fenghuang Third Industry
Shenzhen, Guangdong, China 518103**

Attention of:

**Johnny Zhing, Engineering Dept
Ph: (213) 995-7300
E-Mail: ning0508@gmail.com**

**Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1510006**

**Mike Graffeo
Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	January 28, 2015	Mike Graffeo	Original Document
2.0	February 6, 2015	Mike Graffeo	Corrected truncated number on page 14
3.0	February 17, 2015	Mike Graffeo	Added EIRP calculation, gain max is 50dB
4.0	February 27, 2015	Greg Corbin	Corrected the Output Power in the EIRP tables on page 15 and MSCL values in the variable gain tables on pages 95 and 96.

Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	5
Test Result Summary	6
Authorized Frequency Band	7
Maximum Power and Gain	13
Intermodulation	16
Out-of-Band Emissions	22
Conducted Spurious Emissions	56
Noise Limits	79
Uplink Inactivity	90
Variable Gain	94
Occupied Bandwidth	100
Oscillation Detection	131
Radiated Spurious	148
Test Equipment Utilized	151

ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A

Test and Measurement Data

Sub-part

2.1033(c)(14):

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Part 2, Subpart J and the following individual Parts: 20.21 in conjunction with latest version of KDB 935210.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
24.9 – 31.0	33.5 – 63.0	985.5 - 943.0

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

Model: 5 Band Mobile

Description: 5 Band Mobile BDA

Firmware: adctest20150123.hex

Accessories: Power adaptor supplied from customer, model GDP30A-0603000

Serial Number: N/A

Additional Information:

The EUT is a Mobile, bi-directional amplifier for the boosting of cellular phone signals and data communication devices. The following frequency bands and emission types are utilized.

Frequency Band (MHz)					
Uplink	698 - 716	776 - 787	824 - 849	1850 - 1915	1710 – 1755
Downlink	728 - 746	746 - 757	869 - 894	1930 - 1995	2110 - 2155
Modulation Type	LTE		GSM, CDMA, EDGE, HSPA, EVDO, LTE		CDMA, HSPA, LTE, EDGE, EVDO

Emission Designators					
CDMA	HSPA	LTE	EVDO	EDGE	GSM
F9W	F9W	G7D	F9W	G7W	GXW

The modulation types and emission designators listed in the tables represent the modulations that the cell phone providers use for each frequency band. GSM, CDMA, and WCDMA represent all the modulation types (phase and amplitude or a combination thereof) utilized within the industry. EDGE, HSPA, LTE etc. are all protocols or multiplexing techniques using the base modulations.

EUT Operation during Tests


The EUT was in a normal operating condition.

Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
20.21(e)(3)	Authorized Frequency Band	Pass	
20.21(e)(8)(i)(B) 20.21(e)(8)(i)(C) 20.21(e)(8)(i)(D)	Maximum Power and Gain	Pass	
20.21(e)(8)(i)(F)	Intermodulation	Pass	
20.21(e)(8)(i)(E)	Out-of-Band Emissions	Pass	
2.1051 22.917(a) 24.238((a) 27.53(c) 27.53(e) 27.53(f) 27.53(g)	Conducted Spurious Emissions	Pass	
20.21(e)(8)(i)(A)	Noise Limits	Pass	
20.21(e)(8)(i)(I)	Uplink Inactivity	Pass	
20.21(e)(8)(i)(C)(1) 20.21(e)(8)(i)(H) Choose: 20.21(e)(8)(i)(C)(2)(iii) (Mobile)	Variable Gain	Pass	
2.1049	Occupied Bandwidth	Pass	
20.21(e)(8)(ii)(A)	Oscillation Detection	Pass	
2.1053	Radiated Spurious	Pass	
20.21(e)(8)(i)(B)	Spectrum Block Filtering	N/A	This only applies to devices utilizing spectrum block filtering

Authorized Frequency Band**Engineer:** Mike Graffeo**Test Date:** 1/15/15**Test Procedure**


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a CW input signal tuned to the center channel of the operational band. The RF input level was increased to a point just prior to the AGC being in control of the power. The Signal generator was set to sweep across 2X the operational band of the EUT while the spectrum analyzer was set to MAX HOLD. Two markers were placed at the edges of the operational band and a third marker was placed at the highest point within the band no closer than 2.5 MHz from the band edge.

Test Setup




Uplink Test Results

698 - 716 MHz Band

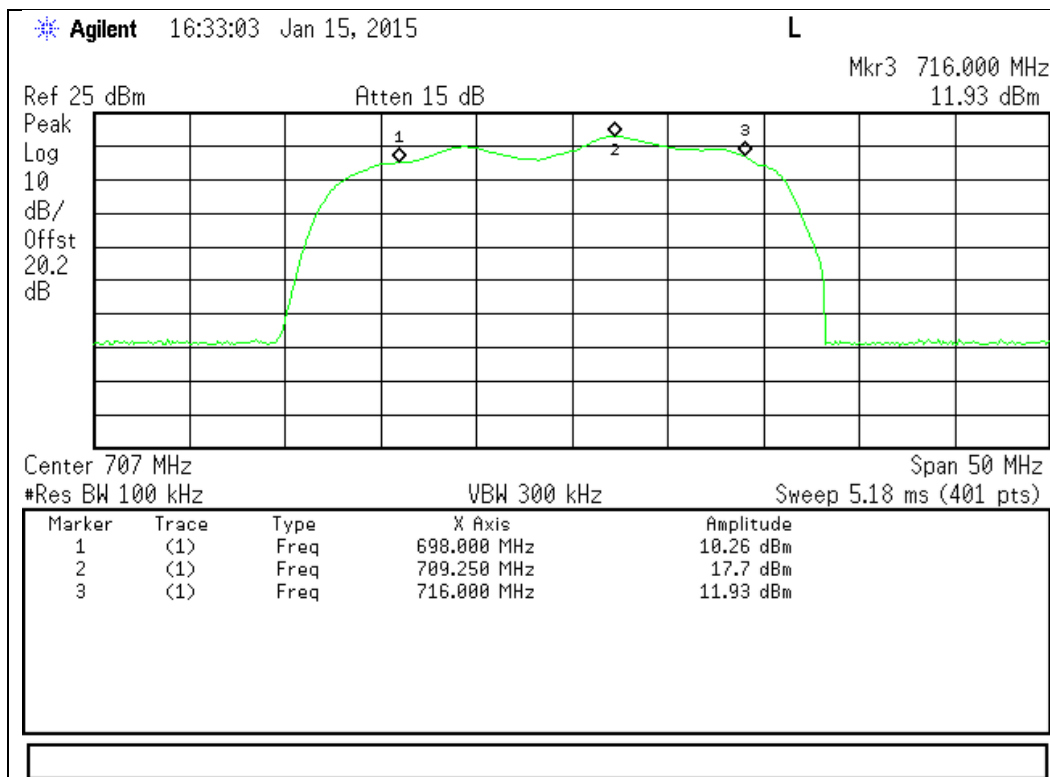


776 - 787 MHz Band

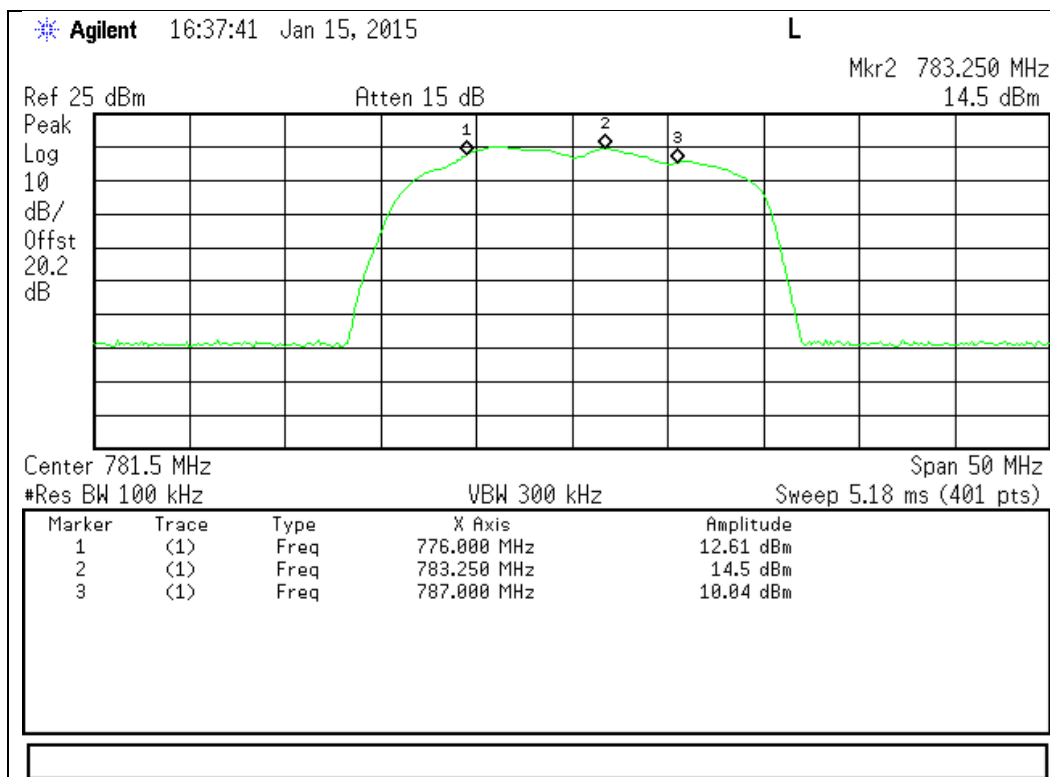




824 - 849 MHz Band

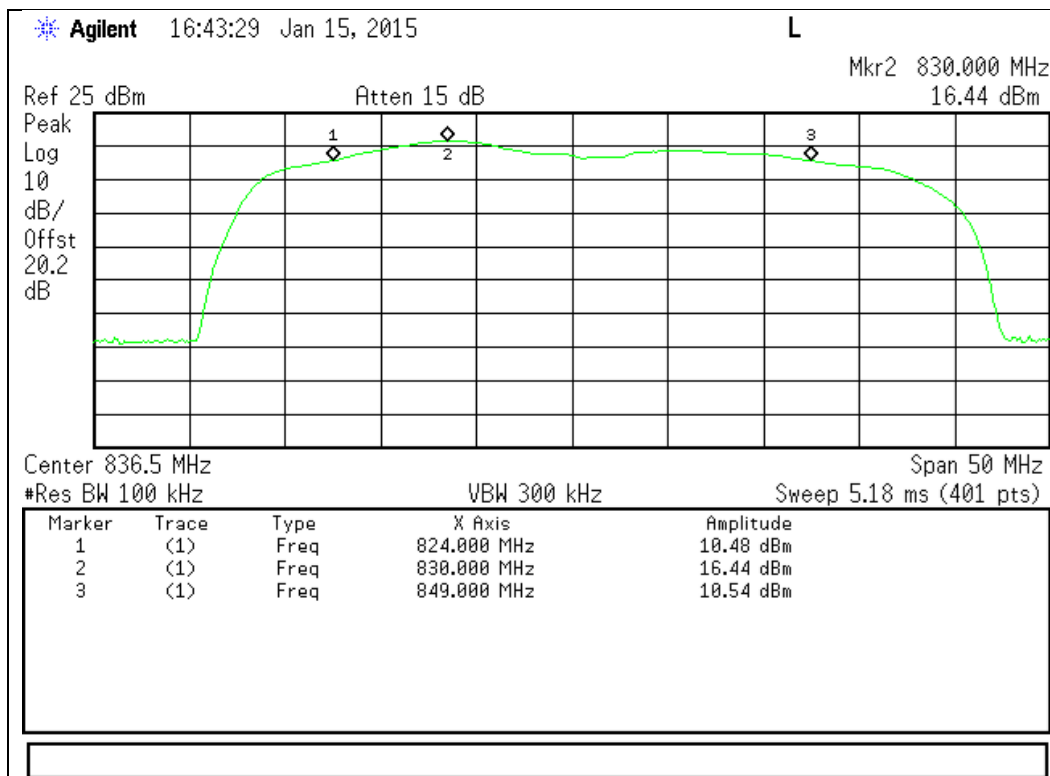


1710 - 1755 MHz Band

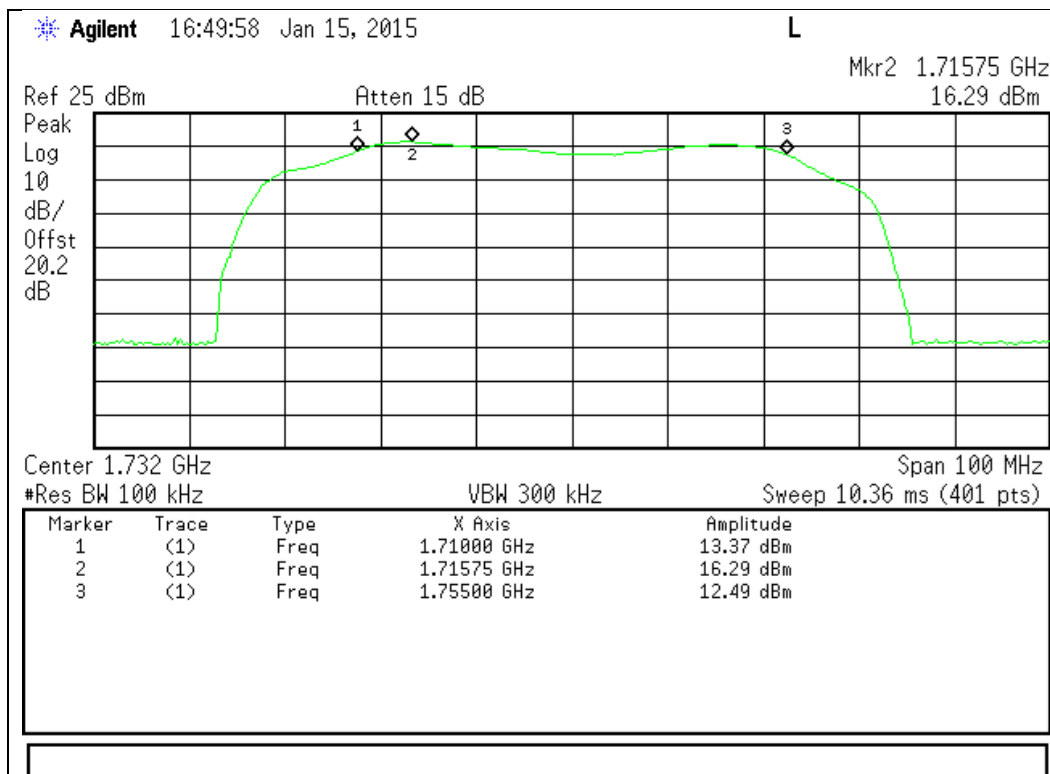




1850 - 1915 MHz Band

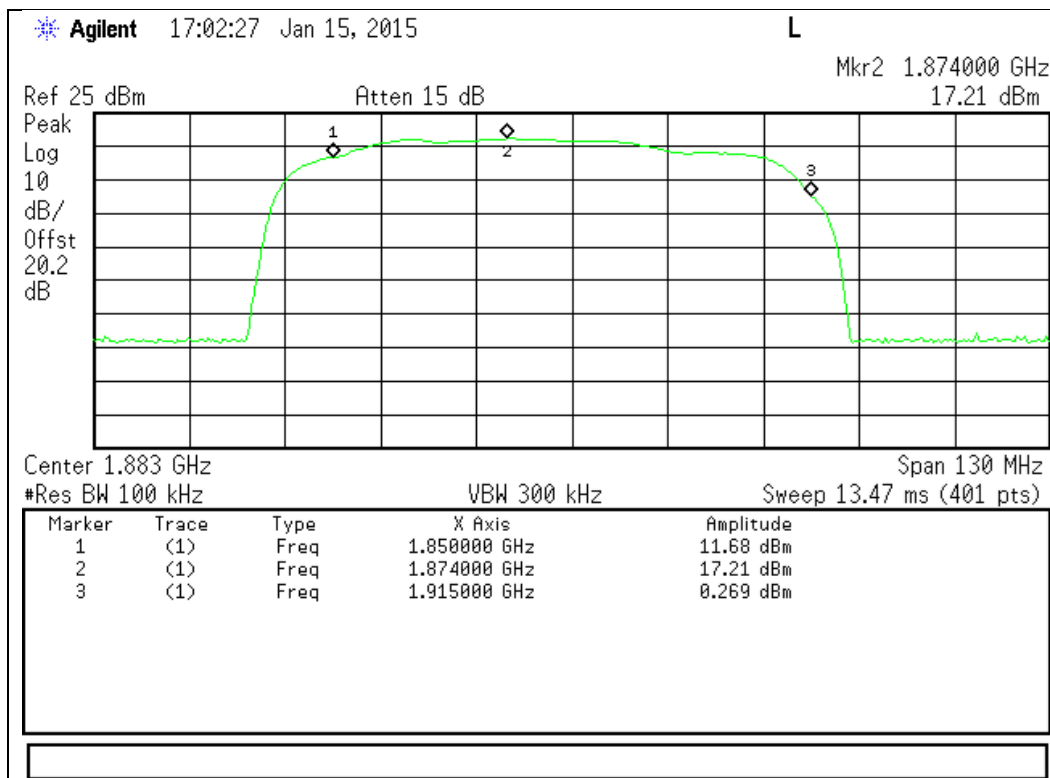


Downlink Test Results

728 - 746 MHz Band

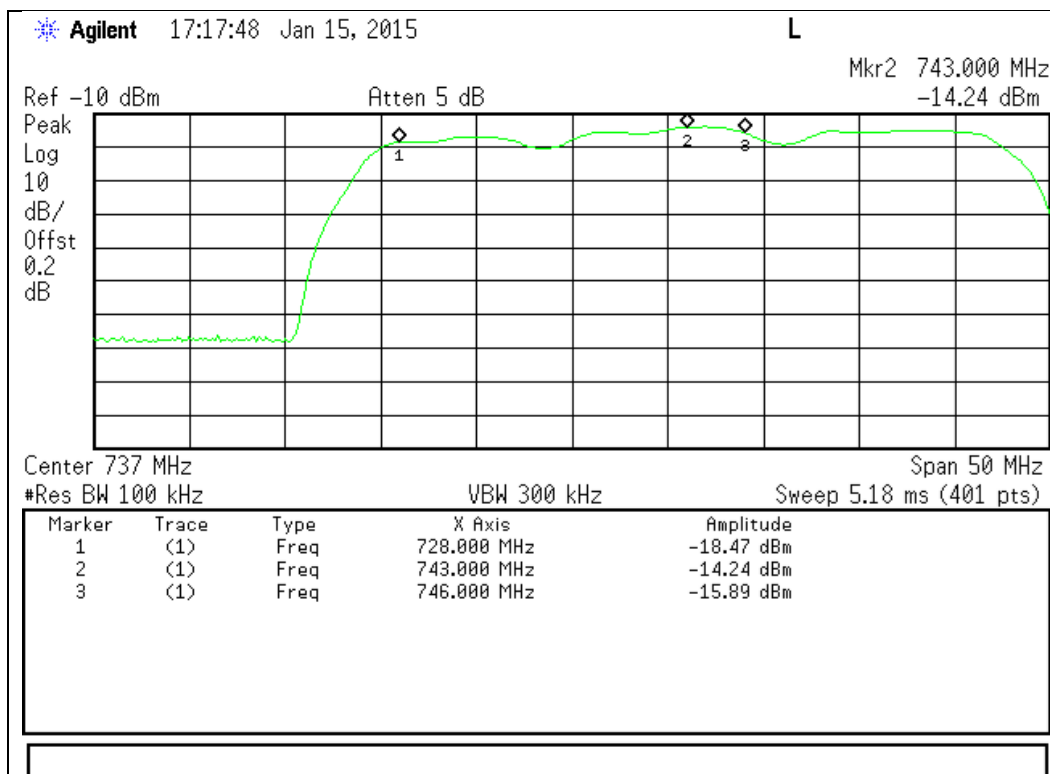




746 - 757 MHz Band

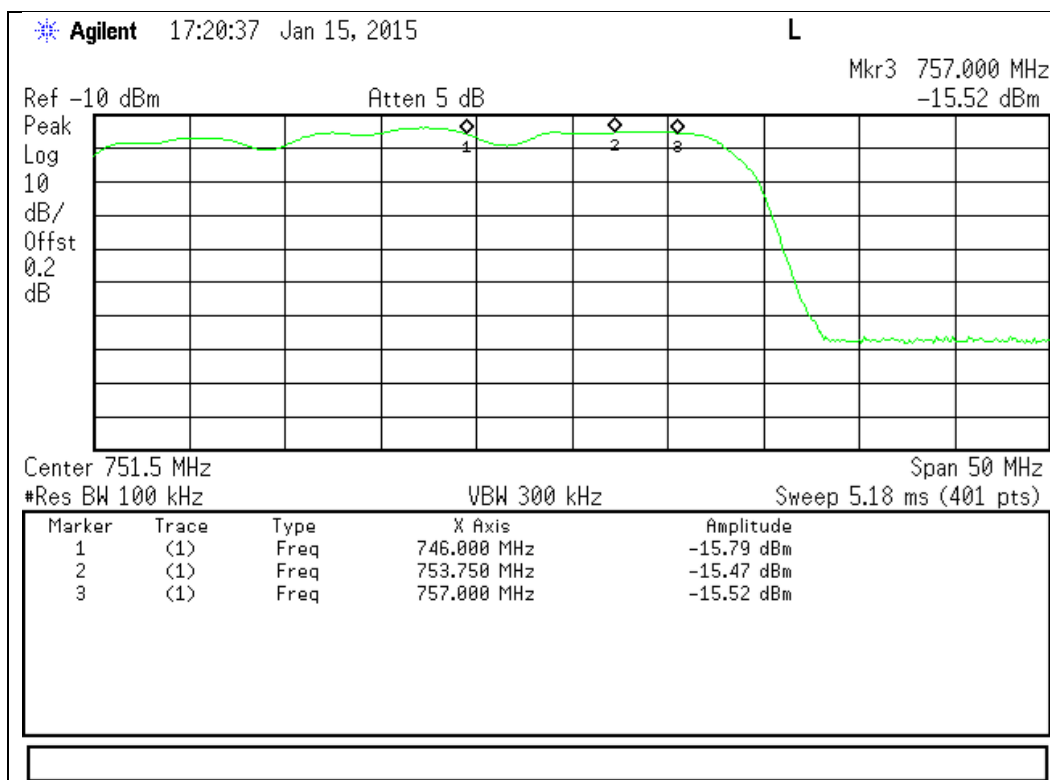


869 - 894 MHz Band

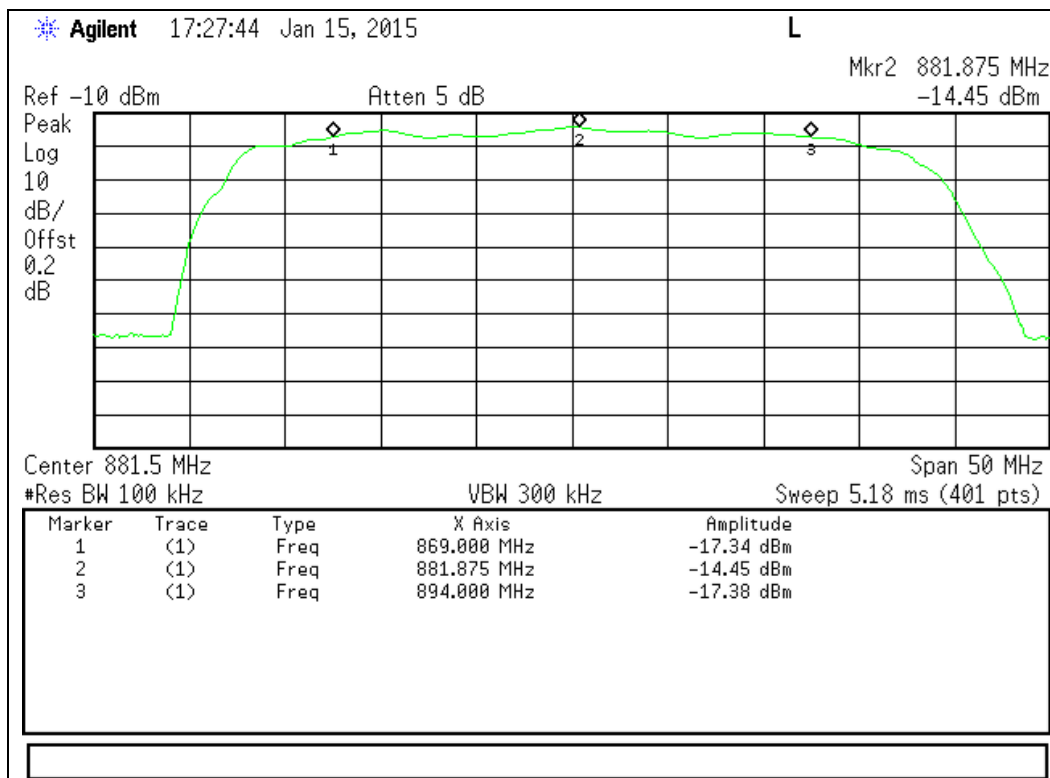




1930 - 1995 MHz Band

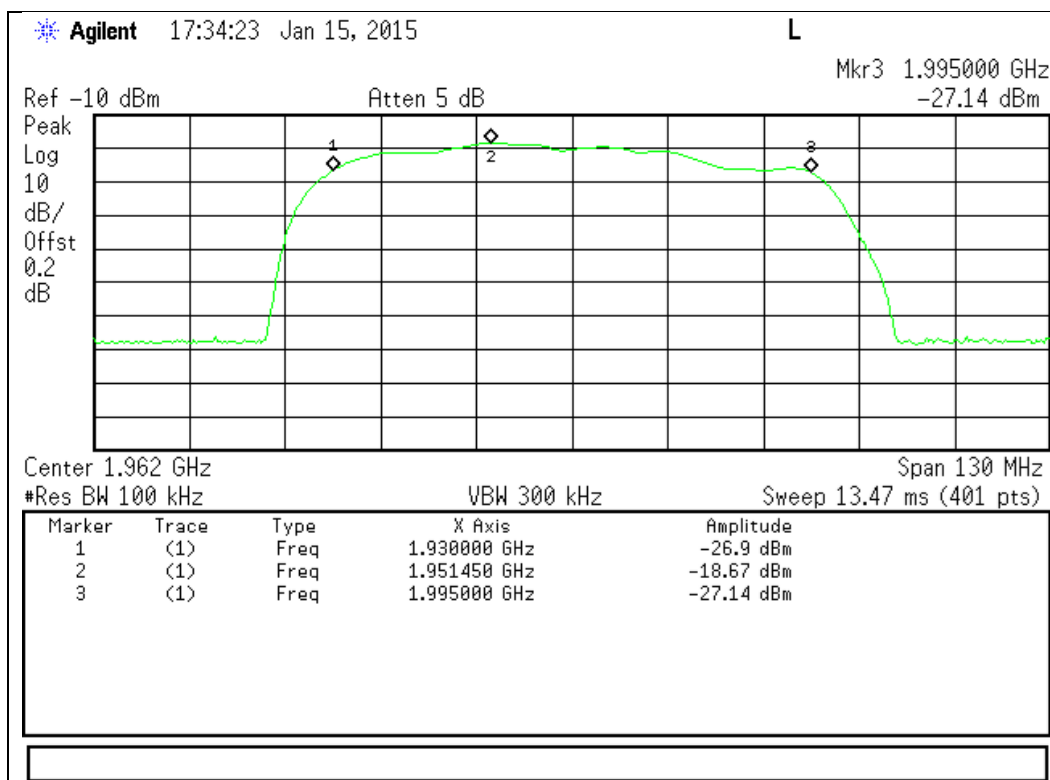

2110 - 2155 MHz Band

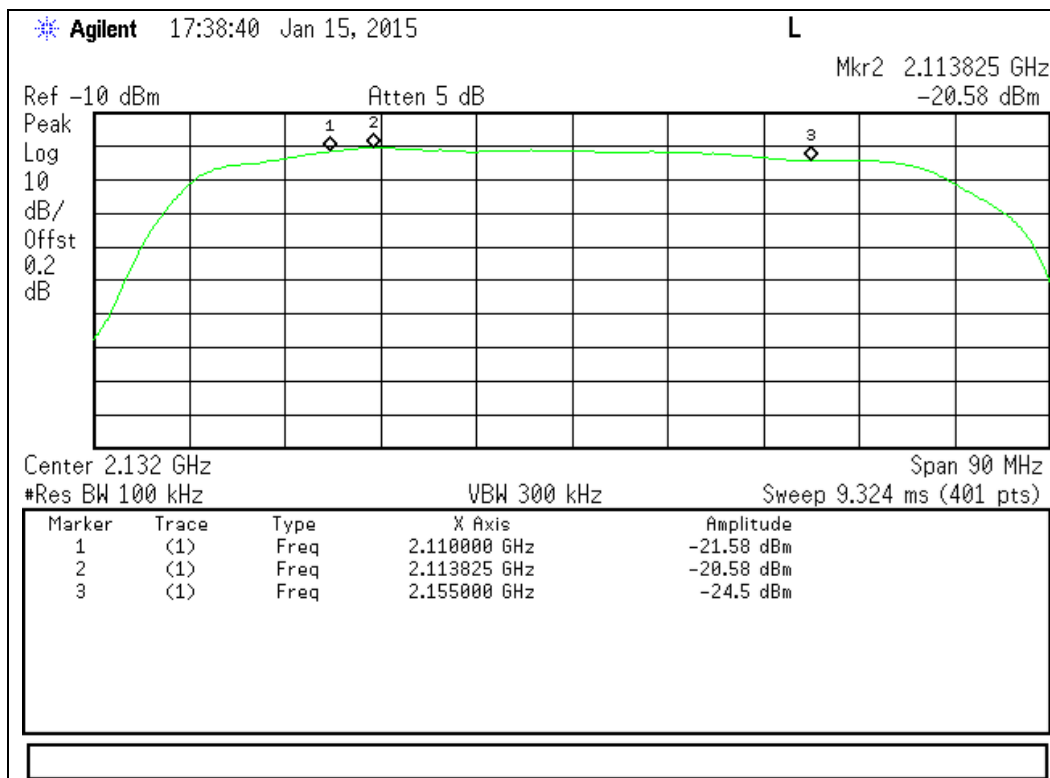

Maximum Power and Gain

Engineer: Mike Graffeo


Test Date: 1/15/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. The spectrum analyzer and signal generator were tuned to the frequency with the highest power level in the band, as determined by the Authorized Frequency Band test. The RF input level was increased to a point just prior to the AGC being in control of the power for both pulsed single time slot GSM modulation and 4.1 MHz AWGN modulation. The maximum power was measured and verified to meet the minimum and maximum levels allowed, with the maximum gain being computed from these values. The uplink and downlink gain under each condition were verified to be within 9 dB of each other.

For Mobile installations the gain is fixed at 50 dB.

Test Setup



Uplink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Lower Limit (dBm)	Upper Limit (dBm)	Result
698 - 716 MHz Pulsed GSM	-21.4	21.23	17	30	Pass
698 - 716 MHz AWGN	-21.5	21.02	17	30	Pass
776 - 787 MHz Pulsed GSM	-15.9	23.02	17	30	Pass
776 - 787 MHz AWGN	-16.5	20.50	17	30	Pass
824 - 849 MHz Pulsed GSM	-22.5	19.60	17	30	Pass
824 - 849 MHz AWGN	-21.6	19.09	17	30	Pass
1710 - 1755 MHz Pulsed GSM	-22.2	19.66	17	30	Pass
1710 - 1755 MHz AWGN	-20.2	19.95	17	30	Pass
1850 - 1915 MHz Pulsed GSM	-24.9	18.72	17	30	Pass
1850 - 1915 MHz AWGN	-24.2	19.30	17	30	Pass

Downlink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Upper Limit (dBm)	Result
728 - 746 MHz Pulsed GSM	-54.5	-12.71	17	Pass
728 - 746 MHz AWGN	-52.1	-10.47	17	Pass
746 - 757 MHz Pulsed GSM	-53.2	-12.63	17	Pass
746 - 757 MHz AWGN	-50.9	-10.10	17	Pass
869 - 894 MHz Pulsed GSM	-46.9	-5.70	17	Pass
869 - 894 MHz AWGN	-44.4	-3.12	17	Pass
1930 - 1995 MHz Pulsed GSM	-60.1	-16.59	17	Pass
1930 - 1995 MHz AWGN	-58.6	-14.87	17	Pass
2110 - 2155 MHz Pulsed GSM	-54.2	-14.58	17	Pass
2110 - 2155 MHz AWGN	-52.7	-12.79	17	Pass

Uplink and Downlink Gain Test Results

Modulation	Uplink Frequency (MHz)	Downlink Frequency (MHz)	Uplink Gain (dB)	Uplink Limit (dB)	Downlink Gain (dB)	Downlink Limit (dB)	Delta (dB)	Limit (dB)	Margin (dB)
Pulsed GSM	709.25	743	42.63	50	41.79	50	0.84	9	-8.16
AWGN	709.25	743	42.52	50	41.63	50	0.89	9	-8.11
Pulsed GSM	783.25	753.75	38.92	50	40.57	50	1.65	9	-7.35
AWGN	783.25	753.75	37.00	50	40.80	50	3.8	9	-5.2
Pulsed GSM	830	881.88	42.10	50	41.20	50	0.9	9	-8.1
AWGN	830	881.88	40.69	50	41.28	50	0.59	9	-8.41
Pulsed GSM	1715.75	2132.82	41.86	50	39.62	50	2.24	9	-6.76
AWGN	1715.75	2132.82	40.15	50	39.91	50	0.24	9	-8.76
Pulsed GSM	1874	1951.45	43.62	50	43.51	50	0.11	9	-8.89
AWGN	1874	1951.45	43.50	50	43.73	50	0.23	9	-8.77

EIRP Uplink Power Calculations

Frequency Band (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
698 - 716	21.2	3	2.5	21.7	30	Pass
776 - 787	23.0	3	2.5	23.5	30	Pass
824 - 849	19.6	3	2.5	20.1	30	Pass
1710 - 1755	20.0	3	4	19.0	30	Pass
1850 - 1915	19.3	3	4	18.3	30	Pass

Frequency Band (MHz)	Conducted Output Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
728 - 746	-10.5	0	1.7	-12.2	17	Pass
746 - 757	-10.1	0	1.7	-11.8	17	Pass
869 - 894	-3.1	0	1.7	-4.8	17	Pass
1930 - 1995	-14.9	0	2.6	-17.5	17	Pass
2110 - 2155	-12.8	0	2.6	-15.4	17	Pass

Intermodulation


Engineer: Mike Graffeo

Test Date: 1/27/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator. Two signal generators were utilized to produce two CW signals 600 kHz apart and centered in the operational band. Attenuator and cable insertion loss correction factors were input to either the signal generator or the spectrum analyzer as required to ensure that accurate measurements were recorded. The input power was set at the maximum allowable power and the RMS intermodulation products were measured to ensure they were less than -19 dBm in a 3 kHz RBW. The uplink and downlink intermodulation products were plotted, with the levels being listed in the summary tables.

Test Setup

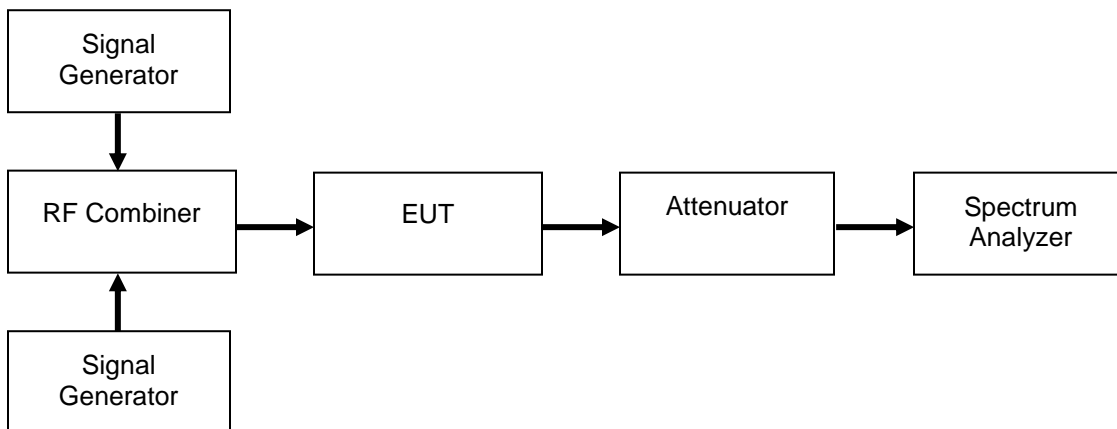

Uplink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
698 - 716 MHz	-22.83	-19	Pass
776 - 787 MHz	-32.36	-19	Pass
824 - 849 MHz	-26.94	-19	Pass
1710 - 1755 MHz	-24.98	-19	Pass
1850 - 1915 MHz	-31.07	-19	Pass


Downlink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
728 - 746 MHz	-67.59	-19	Pass
746 - 757 MHz	-66.64	-19	Pass
869 - 894 MHz	-60.69	-19	Pass
1930 - 1995 MHz	-72.39	-19	Pass
2110 - 2155 MHz	-72.37	-19	Pass




Uplink Test Results

698 - 716 MHz Band

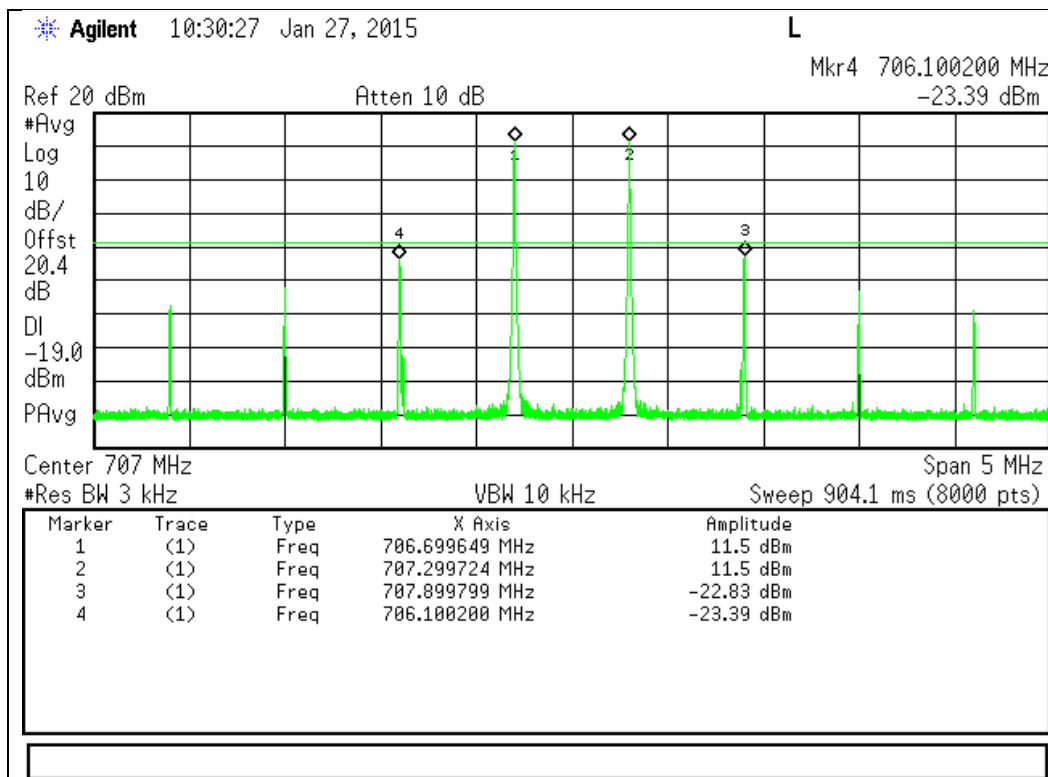


776 - 787 MHz Band

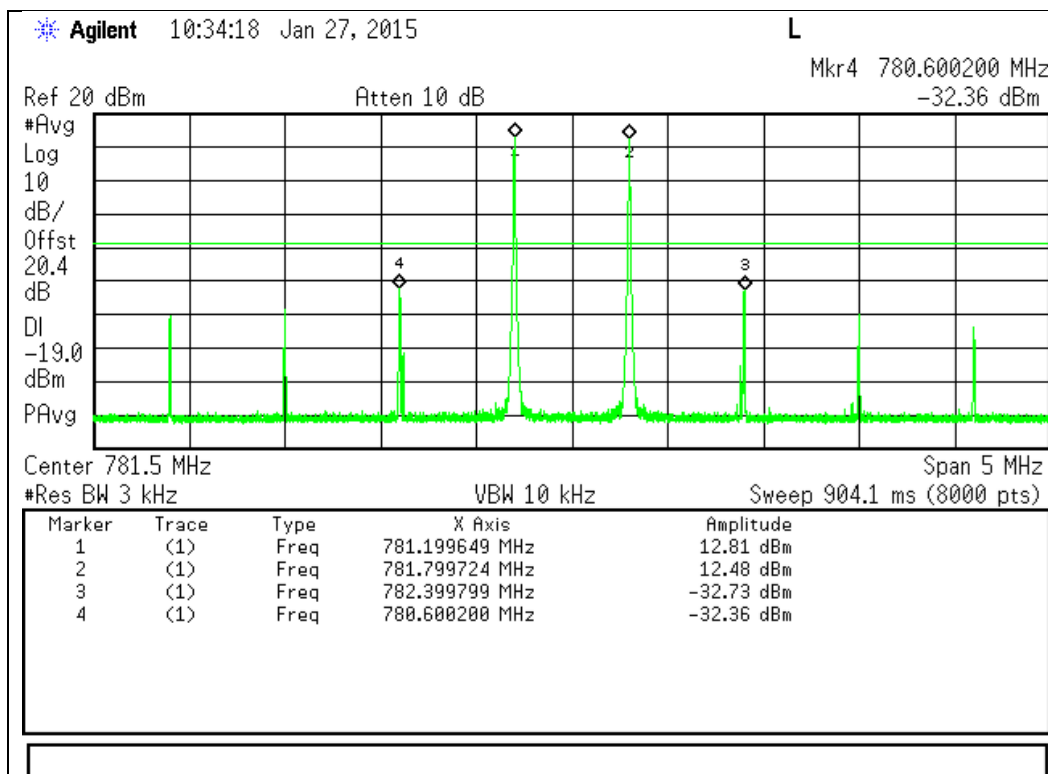




824 - 849 MHz Band

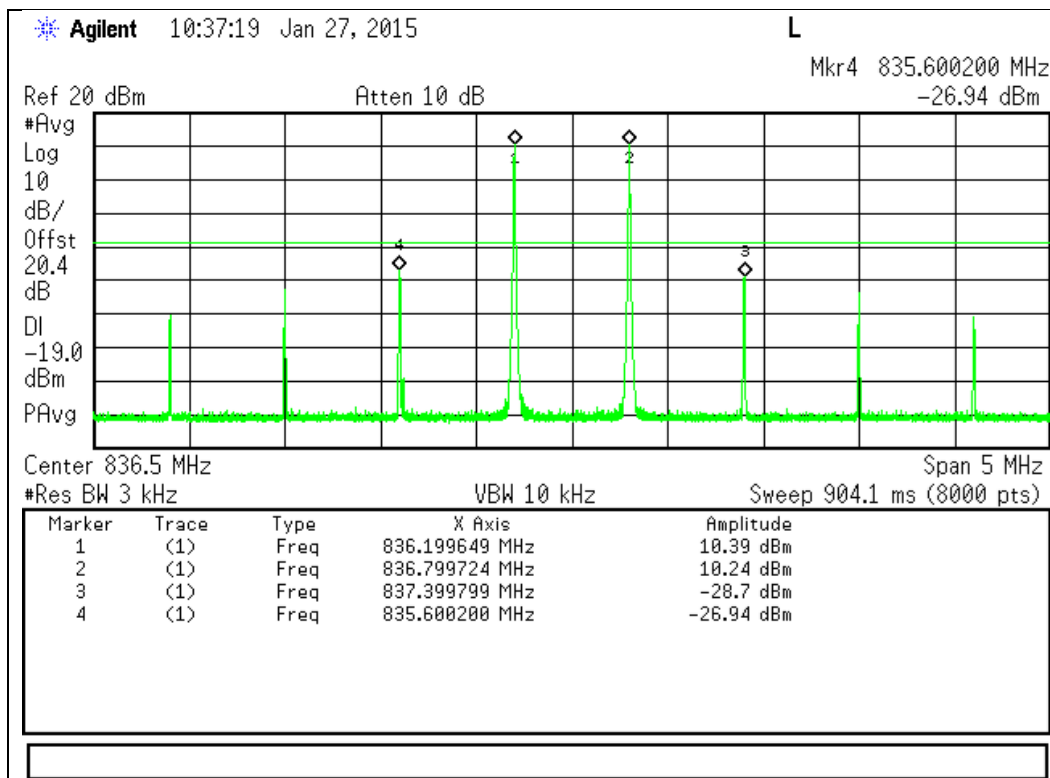


1710 - 1755 MHz Band

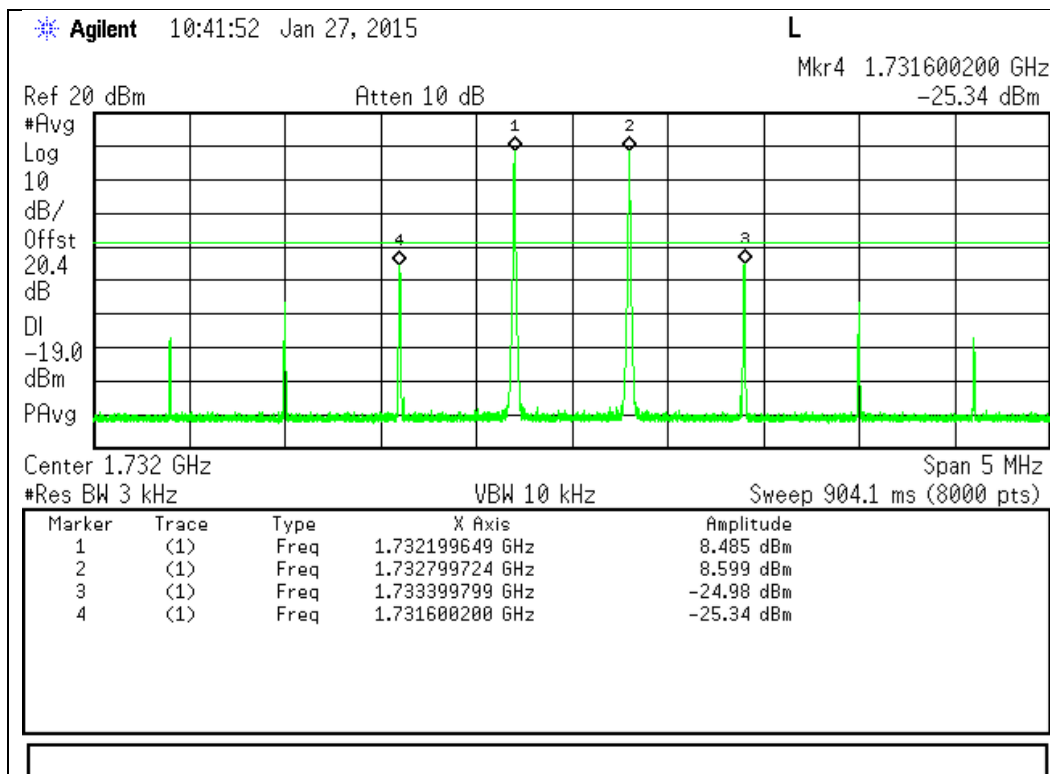




1850 - 1915 MHz Band

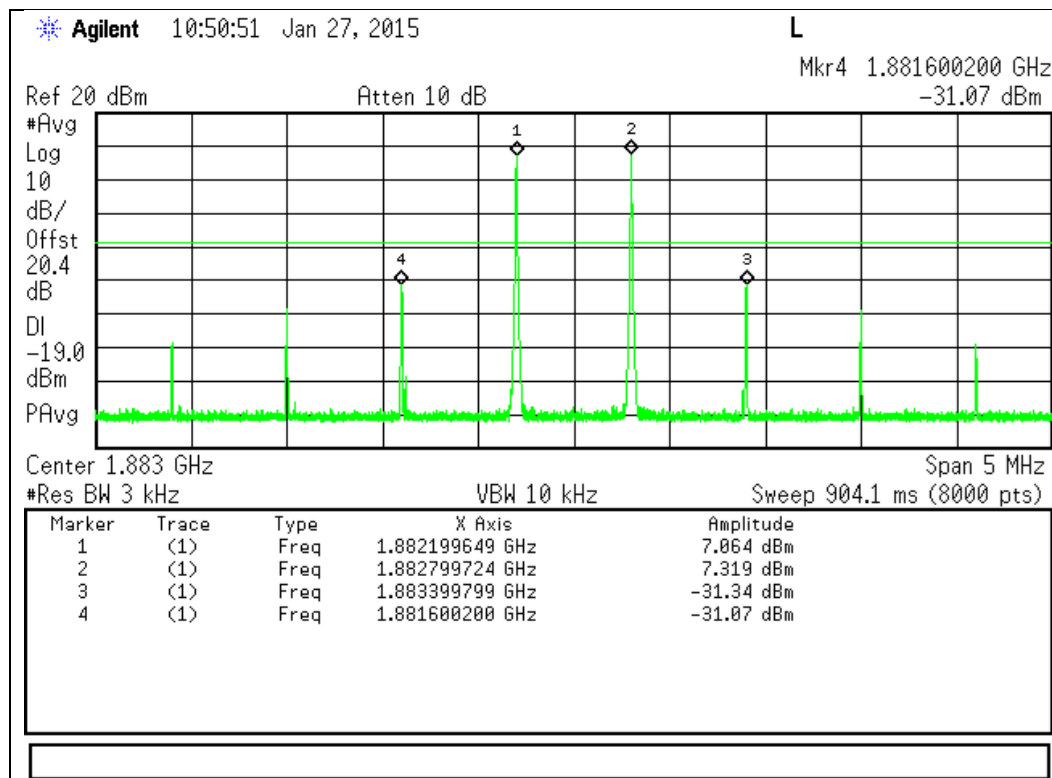


Downlink Test Results

728 - 746 MHz Band

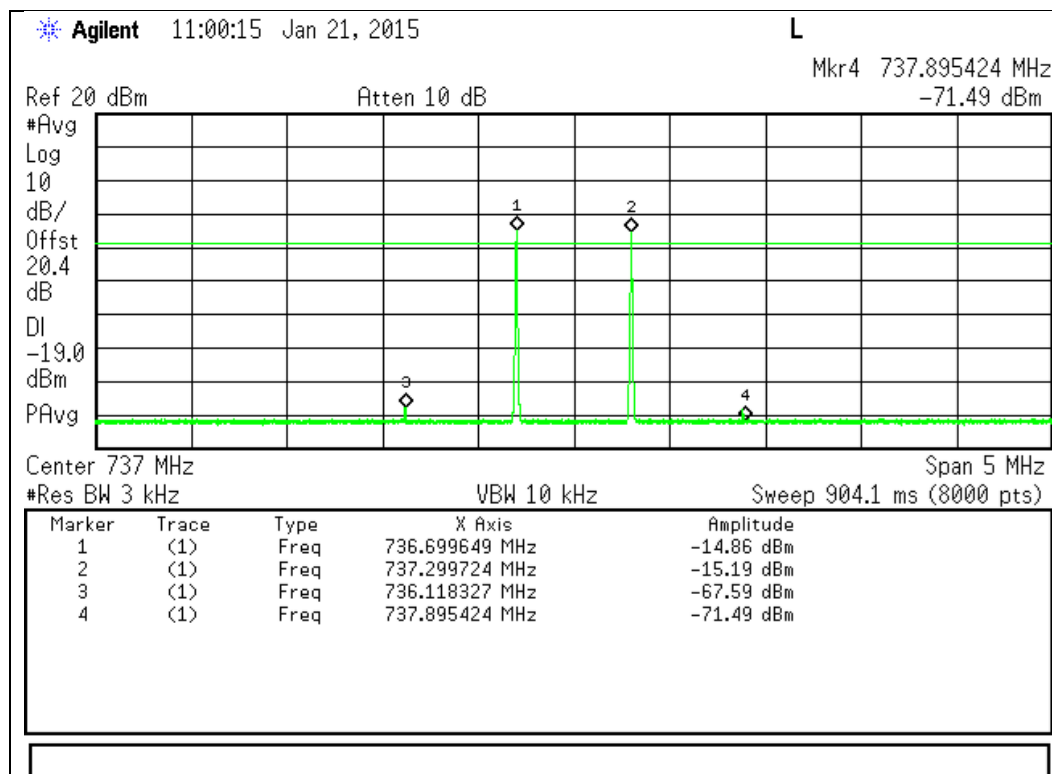




746 - 757 MHz Band

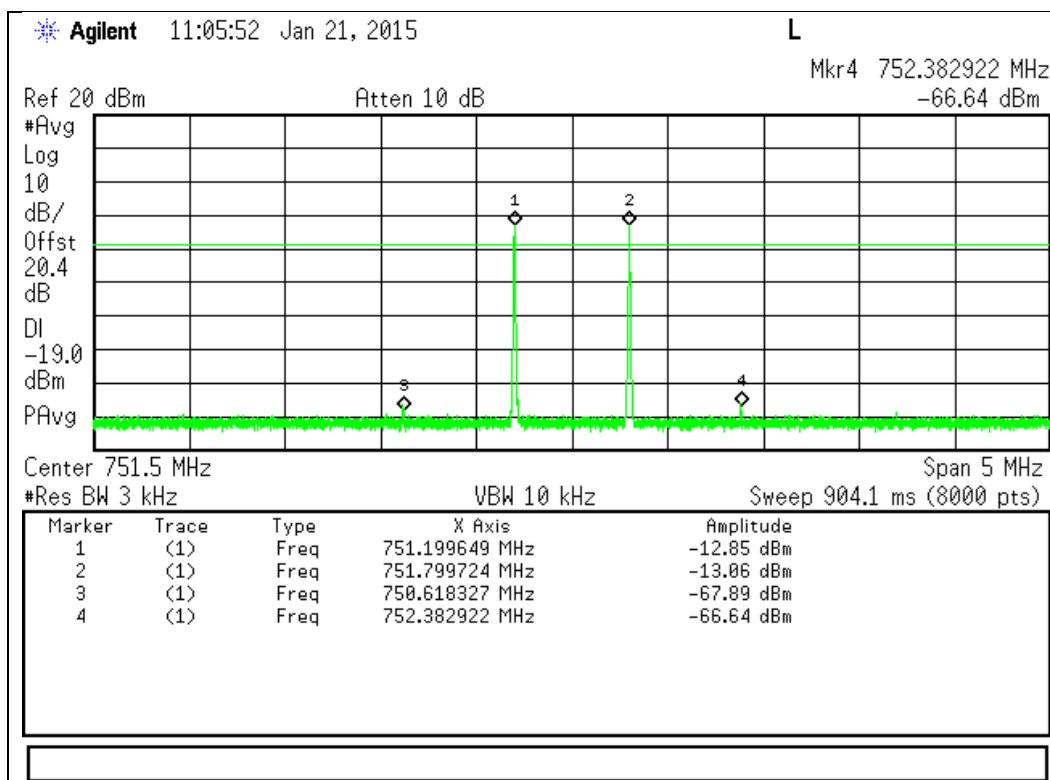


869 - 894 MHz Band

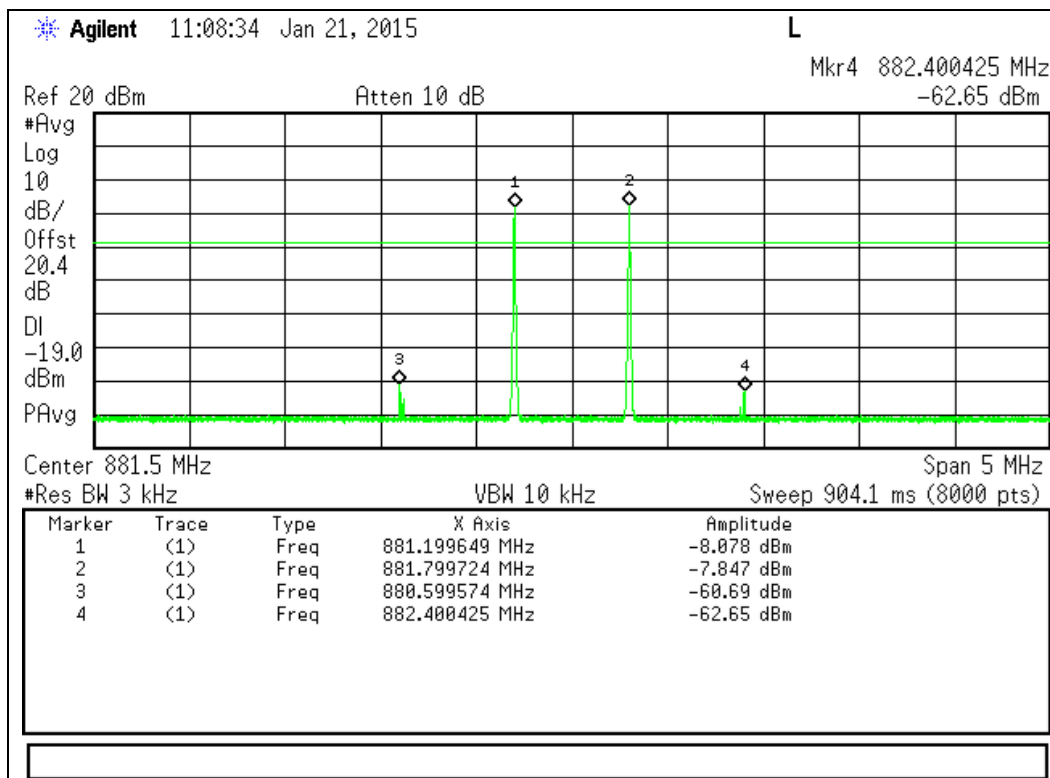




1930 - 1995 MHz Band

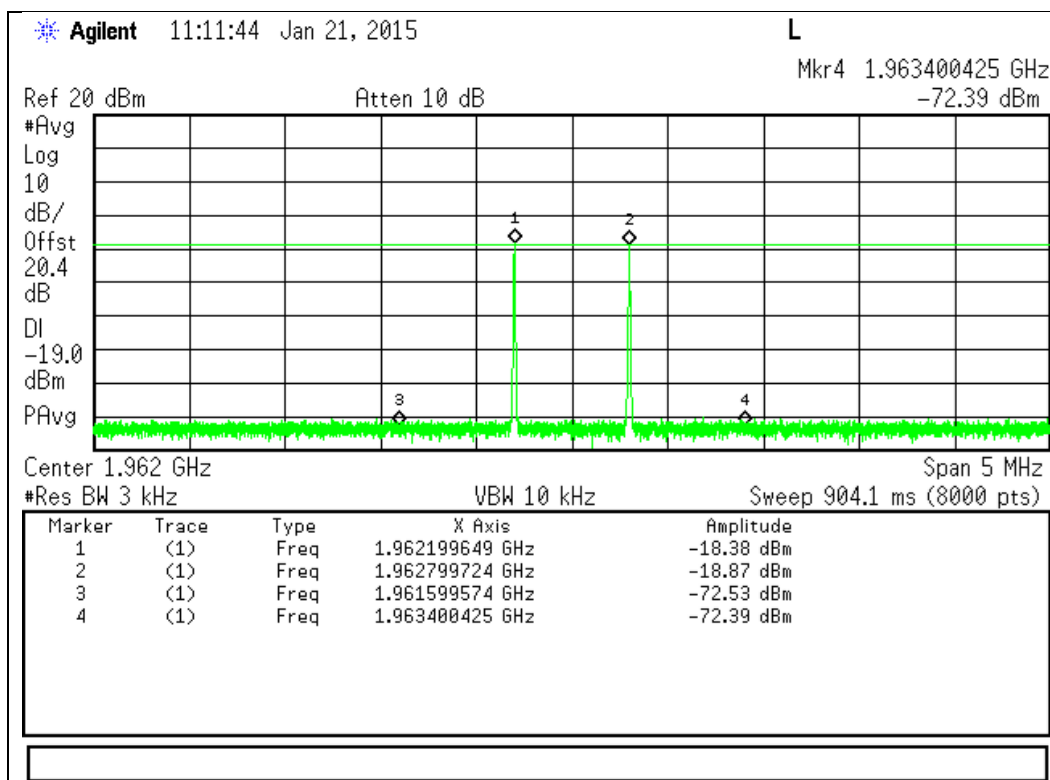

2110 - 2155 MHz Band

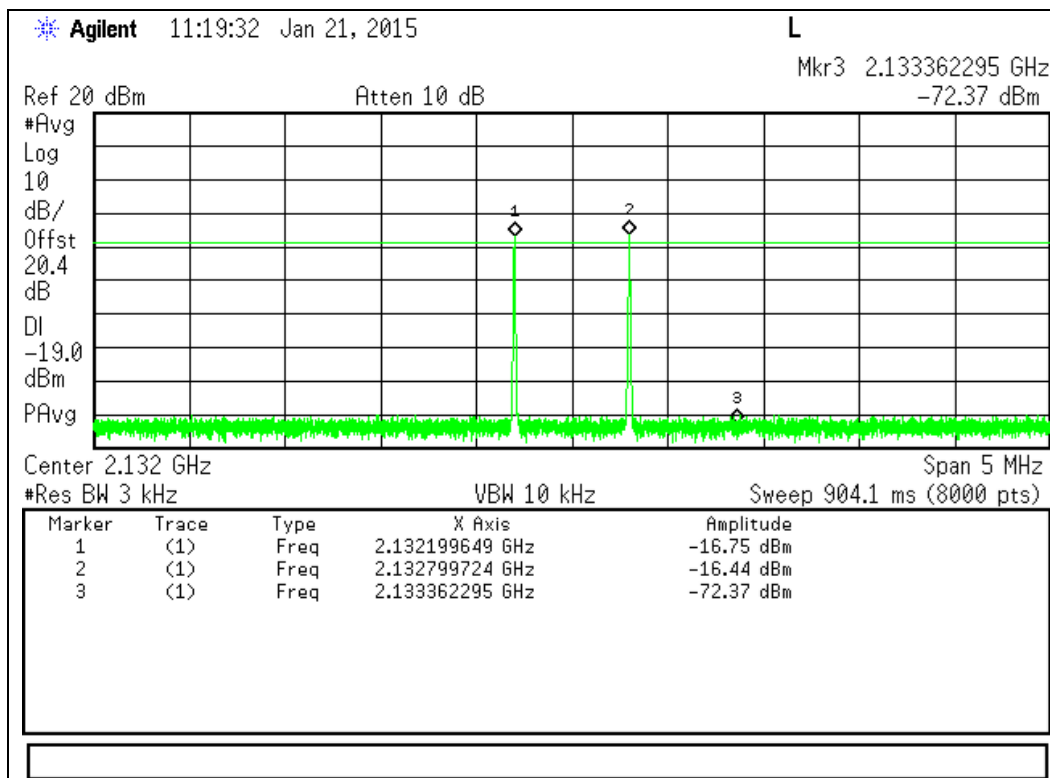

Out-of-Band Emissions

Engineer: Mike Graffeo

Test Date: 1/27/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the lowest allowable upper and lower channel within the EUT operational band for each respective modulation type. The RF input level was increased to a point just prior to the AGC being in control of the power. For each modulation type the Out of Band Emissions were measured to ensure they met the limits.

The following formula was used for calculating the limits:

$$\text{Limit} = P1 - 6 - (43 + 10\log(P2)) = -19\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

Test Setup



GSM Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	Lower	-28.00	-19	Pass
698 - 716	Upper	-28.28	-19	Pass
776 - 787	Lower	-22.35	-19	Pass
776 - 787	Upper	-25.94	-19	Pass
824 - 849	Lower	-38.93	-19	Pass
824 - 849	Upper	-39.55	-19	Pass
1710 - 1755	Lower	-36.40	-19	Pass
1710 - 1755	Upper	-37.88	-19	Pass
1850 - 1915	Lower	-38.89	-19	Pass
1850 - 1915	Upper	-50.75	-19	Pass

CDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	Lower	-38.01	-19	Pass
698 - 716	Upper	-39.29	-19	Pass
776 - 787	Lower	-39.90	-19	Pass
776 - 787	Upper	-37.78	-19	Pass
824 - 849	Lower	-40.58	-19	Pass
824 - 849	Upper	-35.67	-19	Pass
1710 - 1755	Lower	-35.75	-19	Pass
1710 - 1755	Upper	-45.06	-19	Pass
1850 - 1915	Lower	-30.89	-19	Pass
1850 - 1915	Upper	-46.22	-19	Pass

WCDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
698 - 716	Lower	-36.65	-19	Pass
698 - 716	Upper	-39.68	-19	Pass
776 - 787	Lower	-32.28	-19	Pass
776 - 787	Upper	-38.58	-19	Pass
824 - 849	Lower	-38.87	-19	Pass
824 - 849	Upper	-36.96	-19	Pass
1710 - 1755	Lower	-34.27	-19	Pass
1710 - 1755	Upper	-44.00	-19	Pass
1850 - 1915	Lower	-38.38	-19	Pass
1850 - 1915	Upper	-41.89	-19	Pass

GSM Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-53.15	-19	Pass
728 - 746	Upper	-52.82	-19	Pass
746 - 757	Lower	-51.51	-19	Pass
746 - 757	Upper	-52.99	-19	Pass
869 - 894	Lower	-62.06	-19	Pass
869 - 894	Upper	-62.70	-19	Pass
1930 - 1995	Lower	-63.44	-19	Pass
1930 - 1995	Upper	-63.65	-19	Pass
2110 - 2155	Lower	-62.78	-19	Pass
2110 - 2155	Upper	-53.68	-19	Pass

CDMA Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-55.61	-19	Pass
728 - 746	Upper	-56.13	-19	Pass
746 - 757	Lower	-56.55	-19	Pass
746 - 757	Upper	-55.64	-19	Pass
869 - 894	Lower	-39.55	-19	Pass
869 - 894	Upper	-30.26	-19	Pass
1930 - 1995	Lower	-55.26	-19	Pass
1930 - 1995	Upper	-55.29	-19	Pass
2110 - 2155	Lower	-55.18	-19	Pass
2110 - 2155	Upper	-55.09	-19	Pass


WCDMA Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
728 - 746	Lower	-55.60	-19	Pass
728 - 746	Upper	-33.02	-19	Pass
746 - 757	Lower	-56.10	-19	Pass
746 - 757	Upper	-56.17	-19	Pass
869 - 894	Lower	-49.25	-19	Pass
869 - 894	Upper	-48.91	-19	Pass
1930 - 1995	Lower	-48.43	-19	Pass
1930 - 1995	Upper	-48.40	-19	Pass
2110 - 2155	Lower	-49.10	-19	Pass
2110 - 2155	Upper	-48.11	-19	Pass


GSM Uplink Test Plots

698 - 716 MHz Band

Lower Band Edge

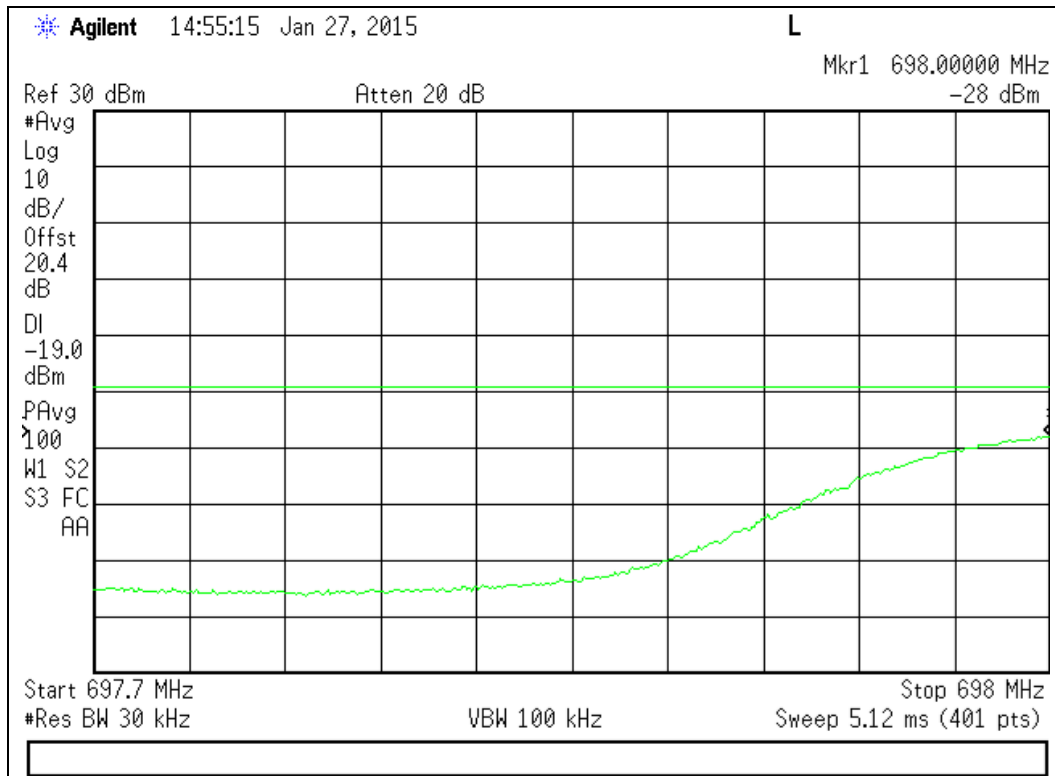


Upper Band Edge

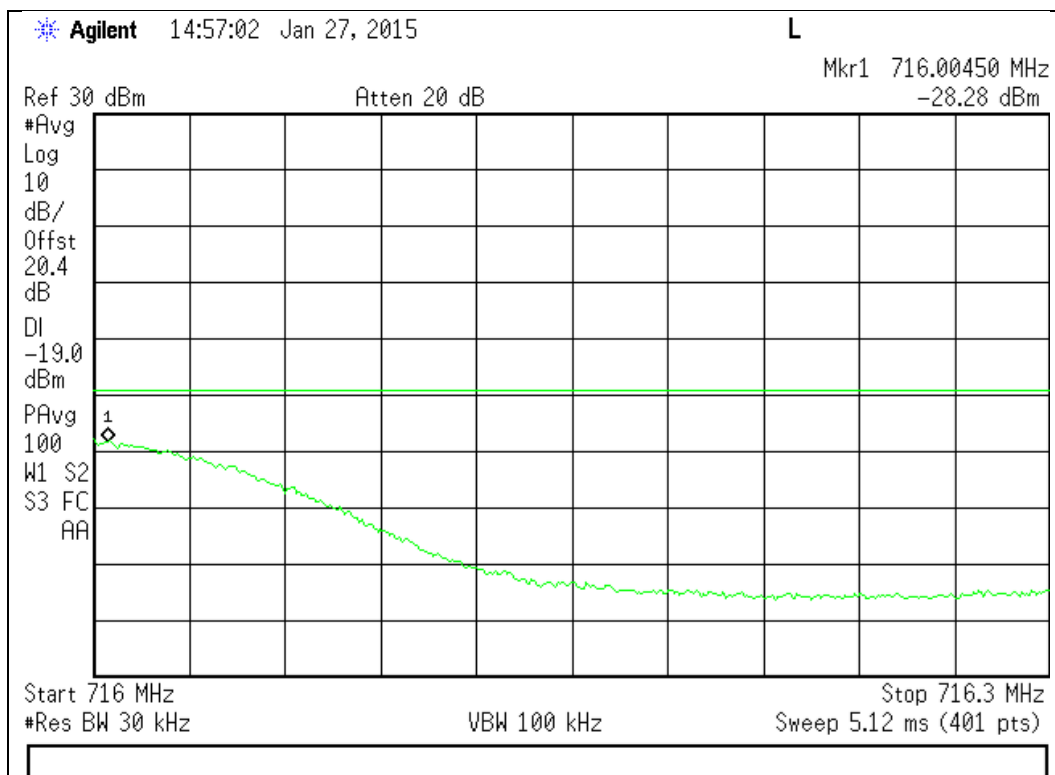




776 - 787 MHz Band

Lower Band Edge

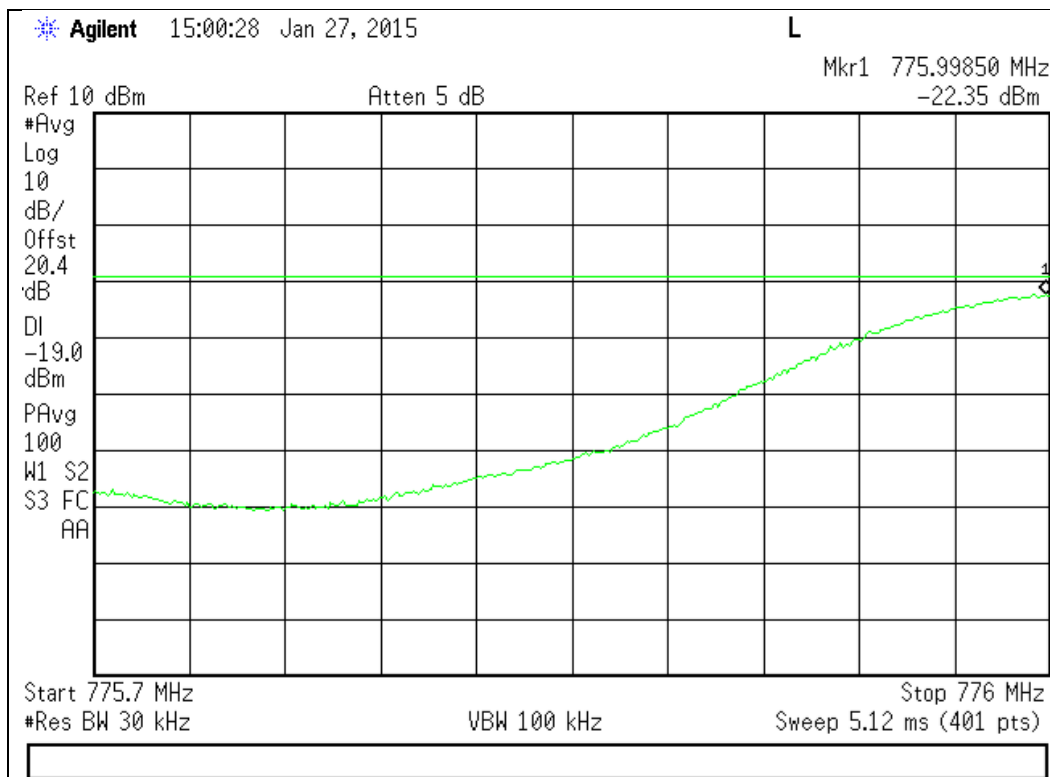


Upper Band Edge

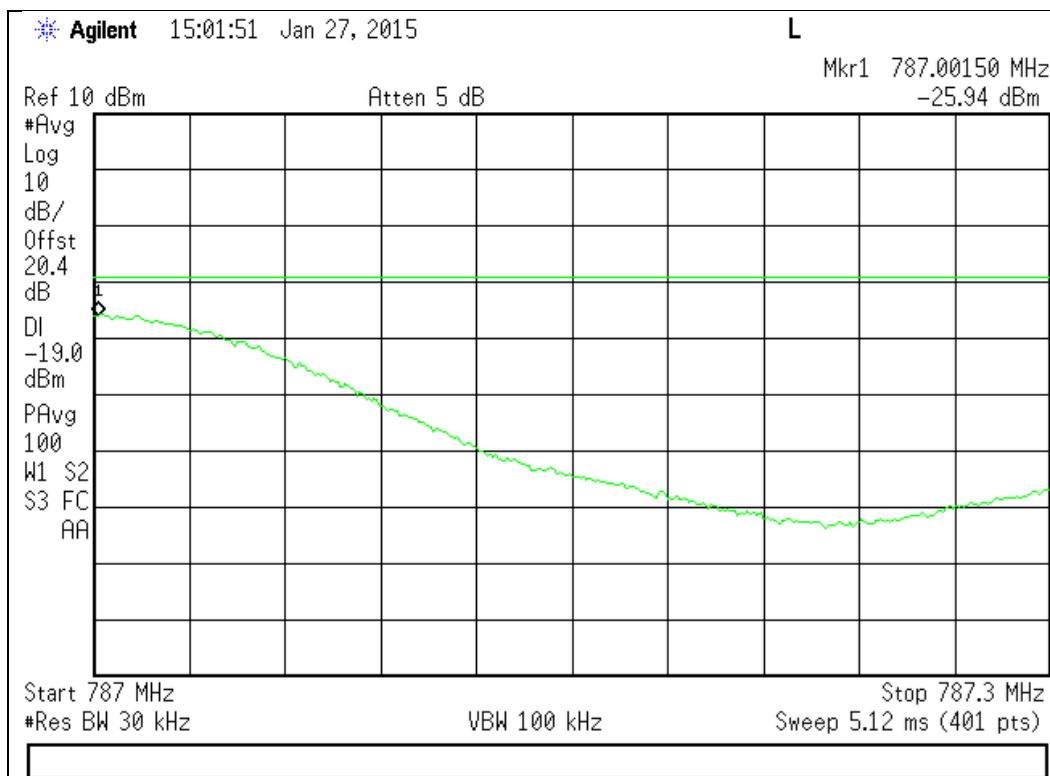




824 - 849 MHz Band

Lower Band Edge

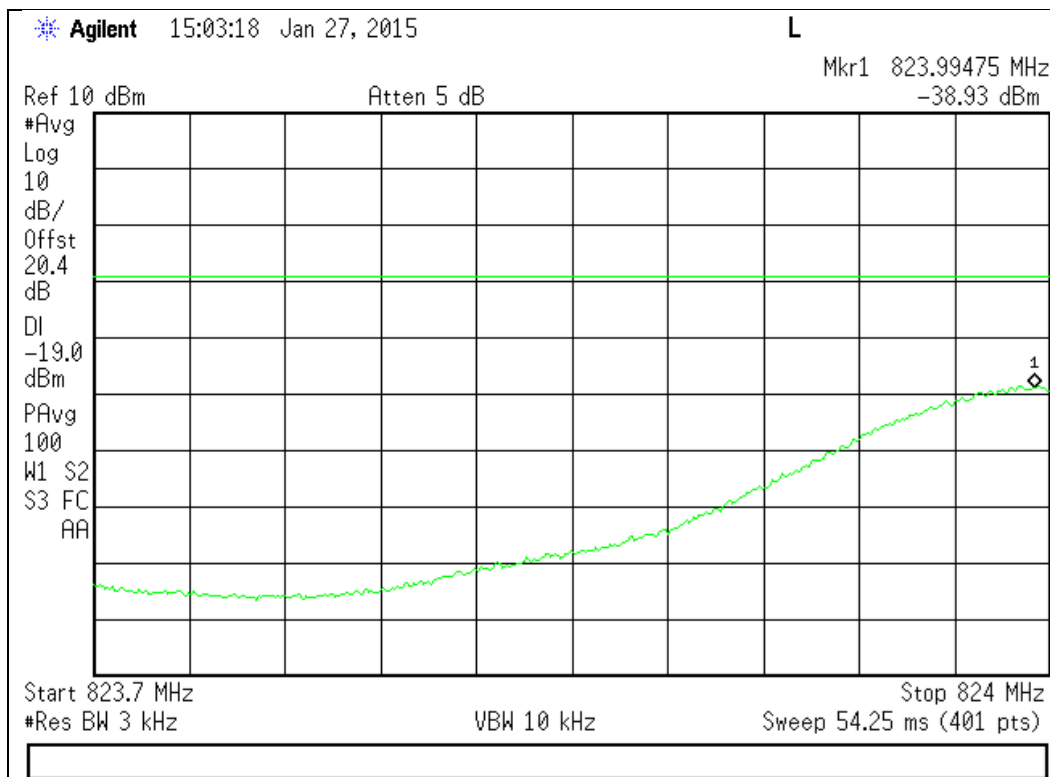


Upper Band Edge

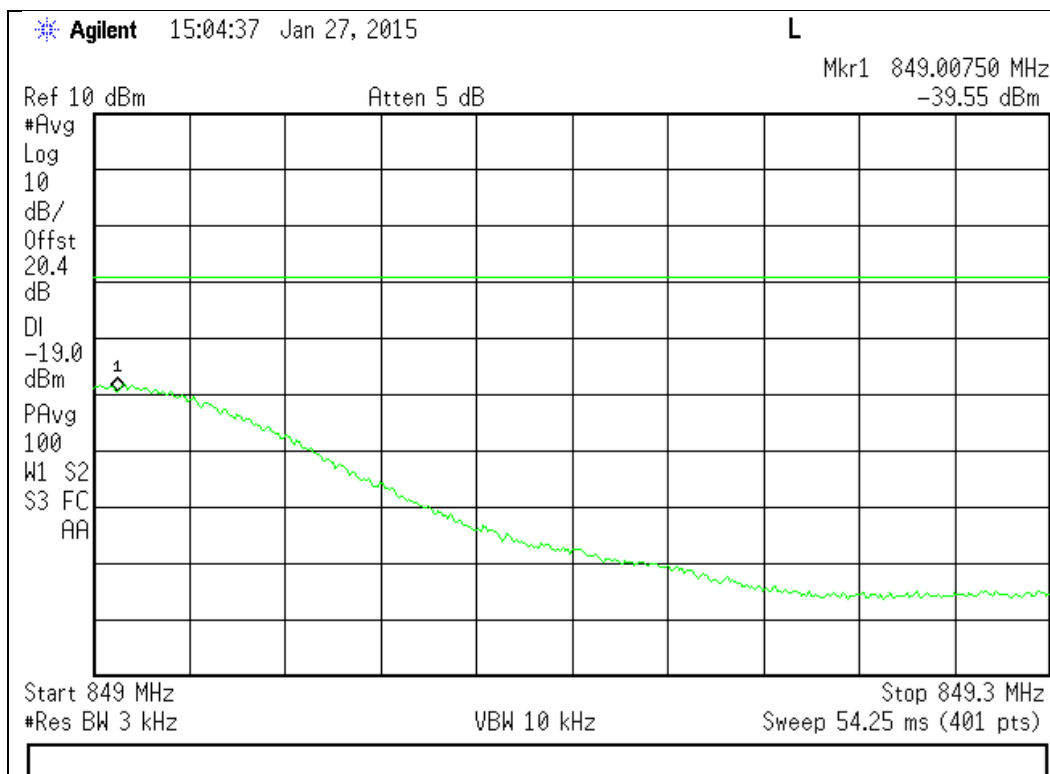




1710 - 1755 MHz Band

Lower Band Edge

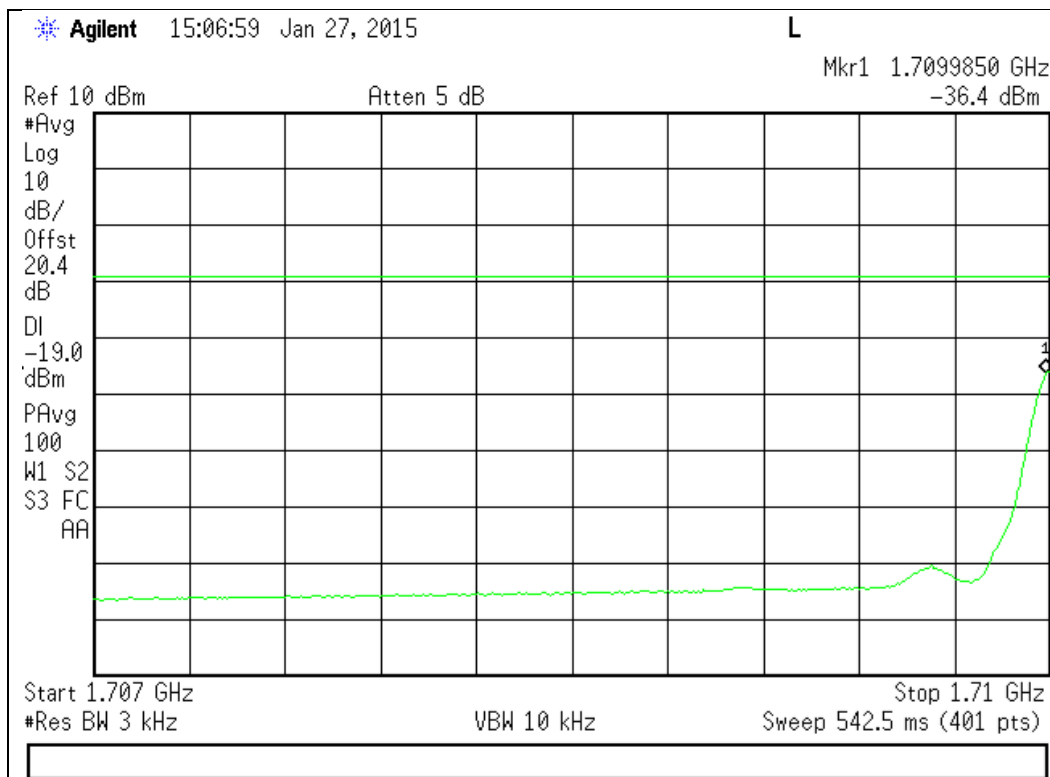


Upper Band Edge

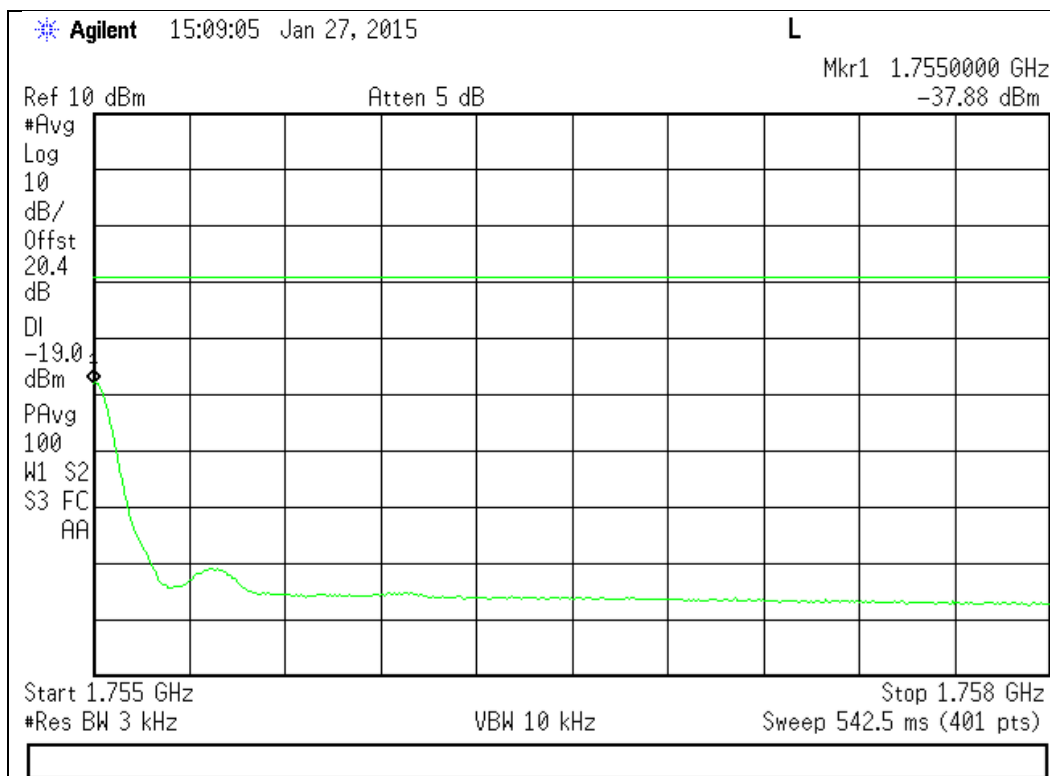


1850 - 1915 MHz Band

Lower Band Edge

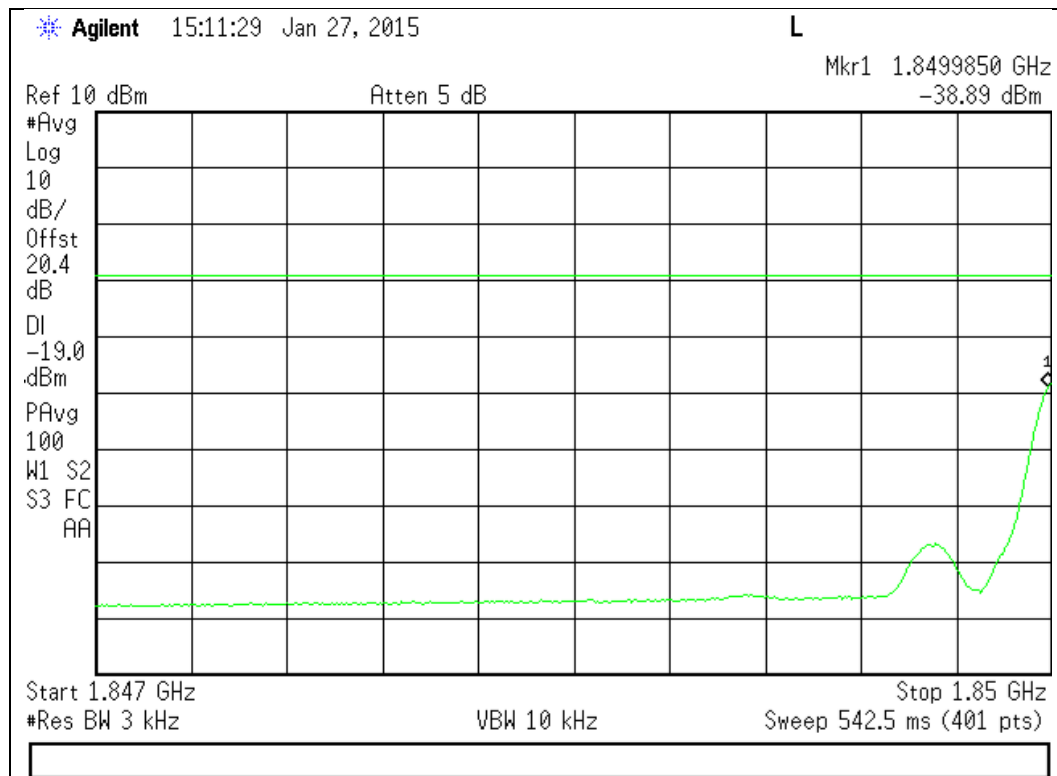


Upper Band Edge

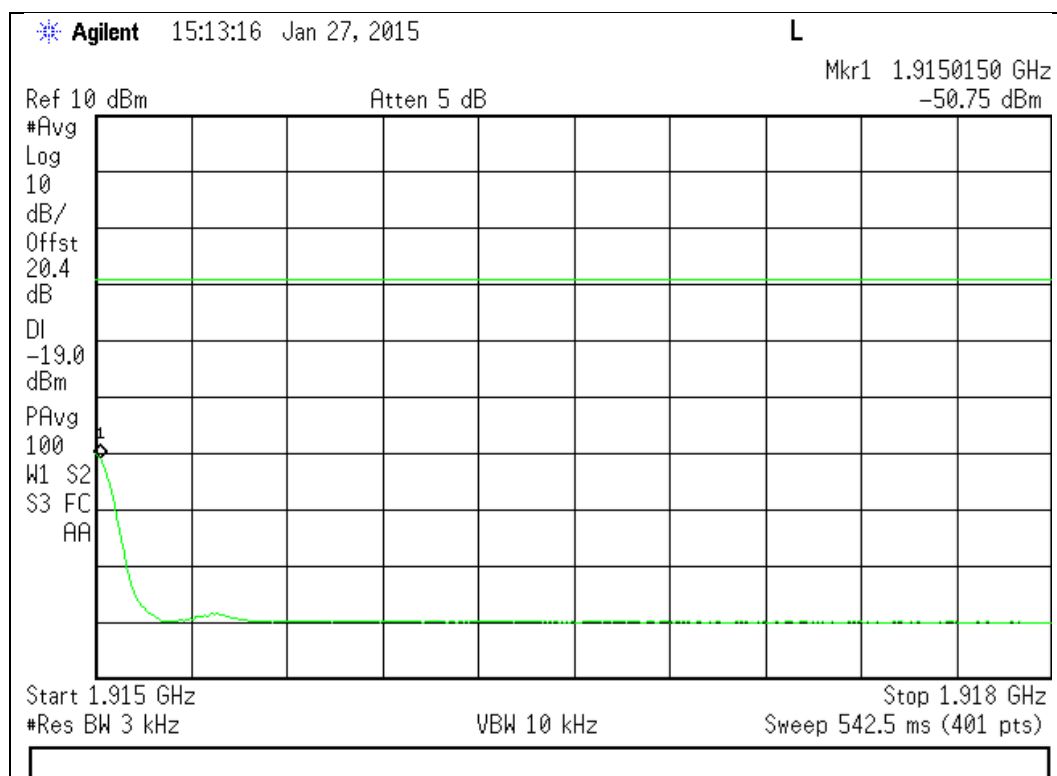


CDMA Uplink Test Plots

698 - 716 MHz Band

Lower Band Edge

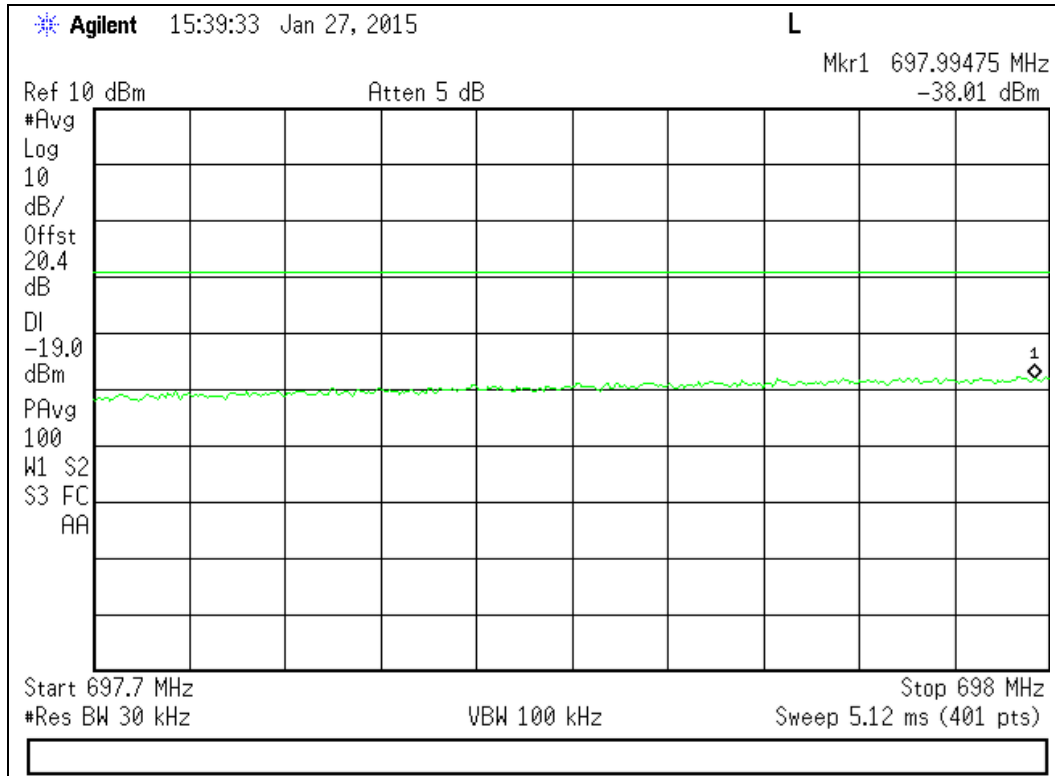


Upper Band Edge

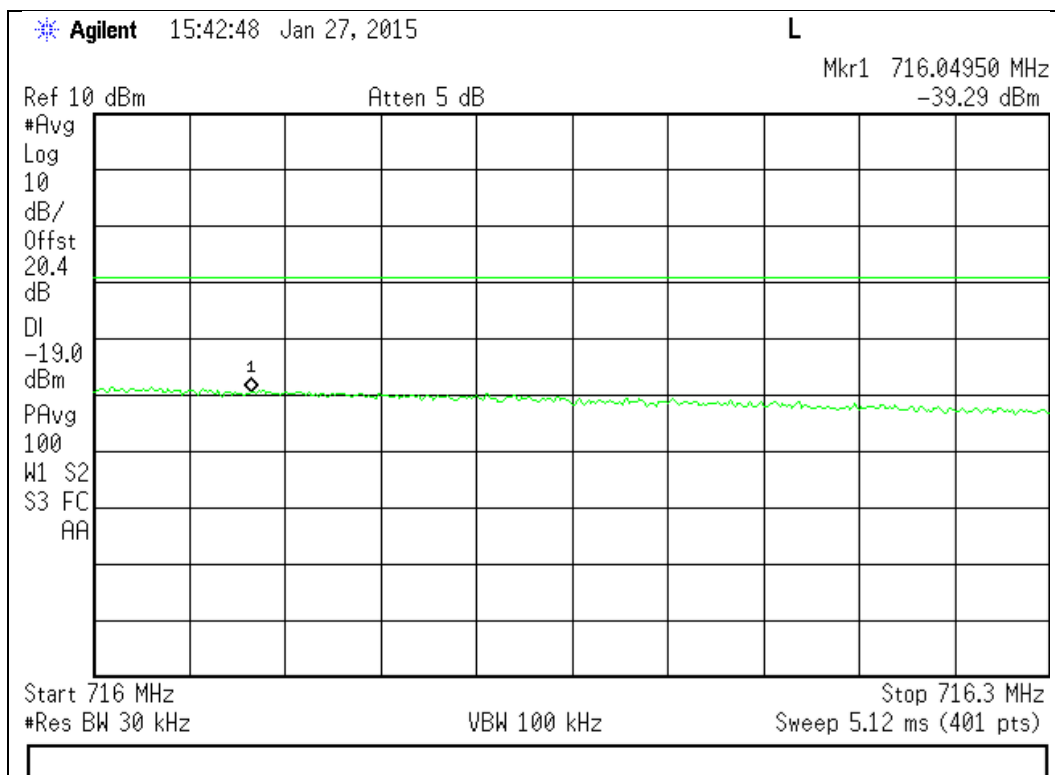




776 - 787 MHz Band

Lower Band Edge

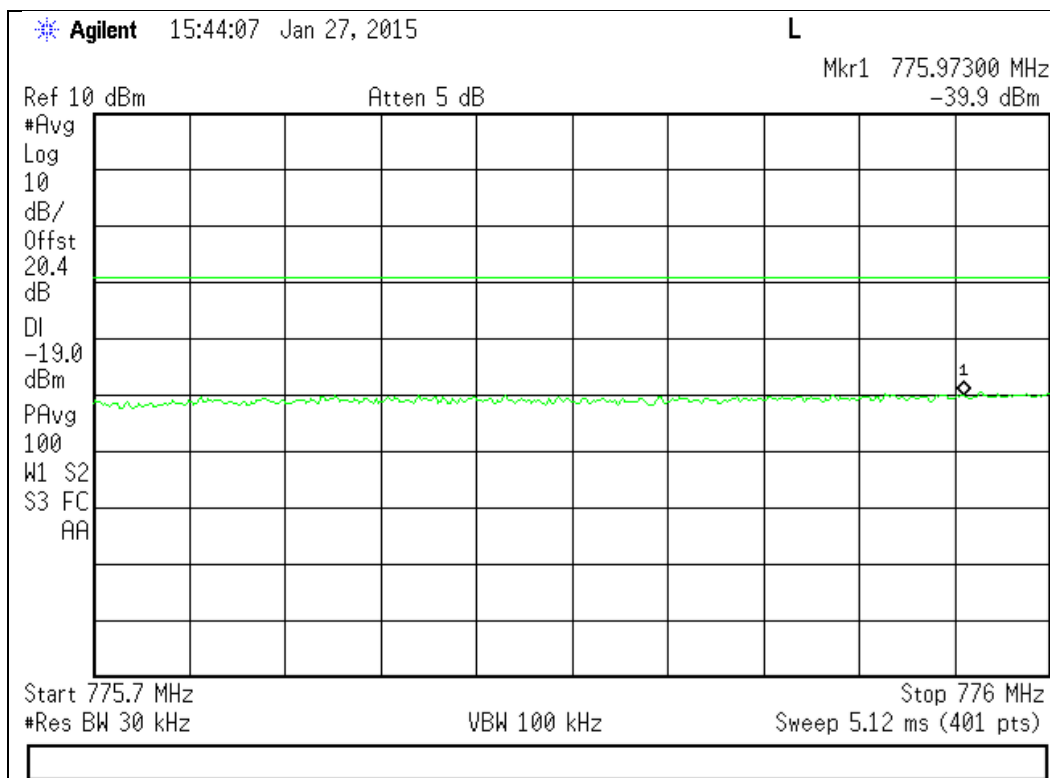


Upper Band Edge

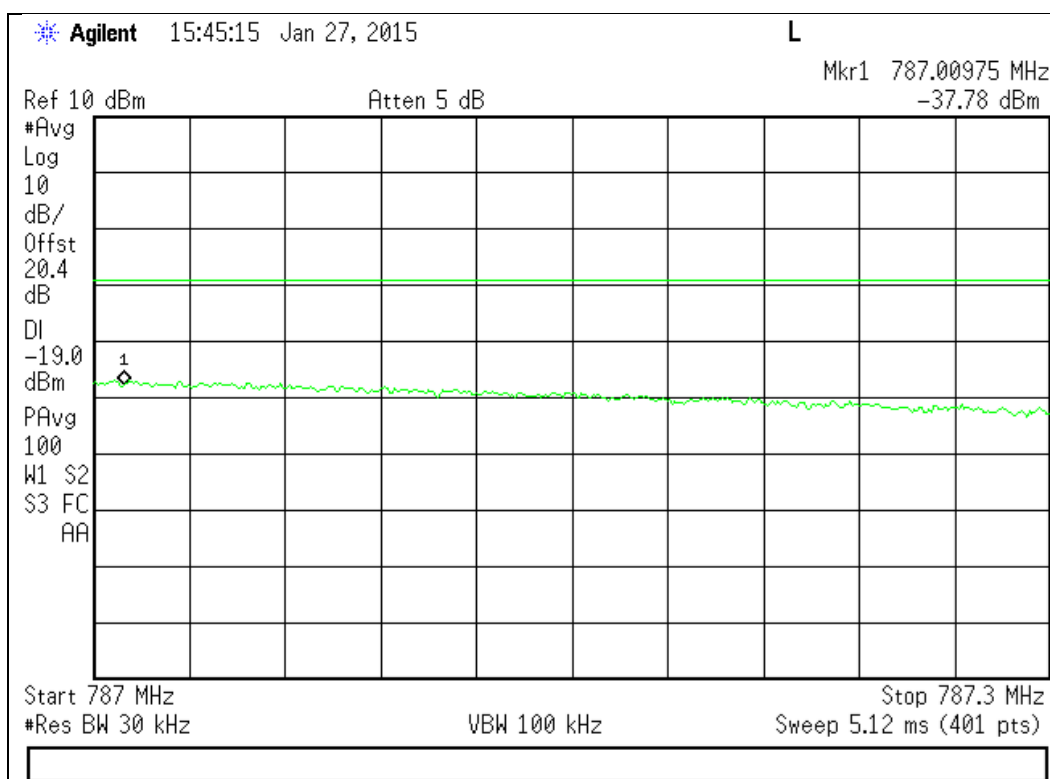


824 - 849 MHz Band

Lower Band Edge

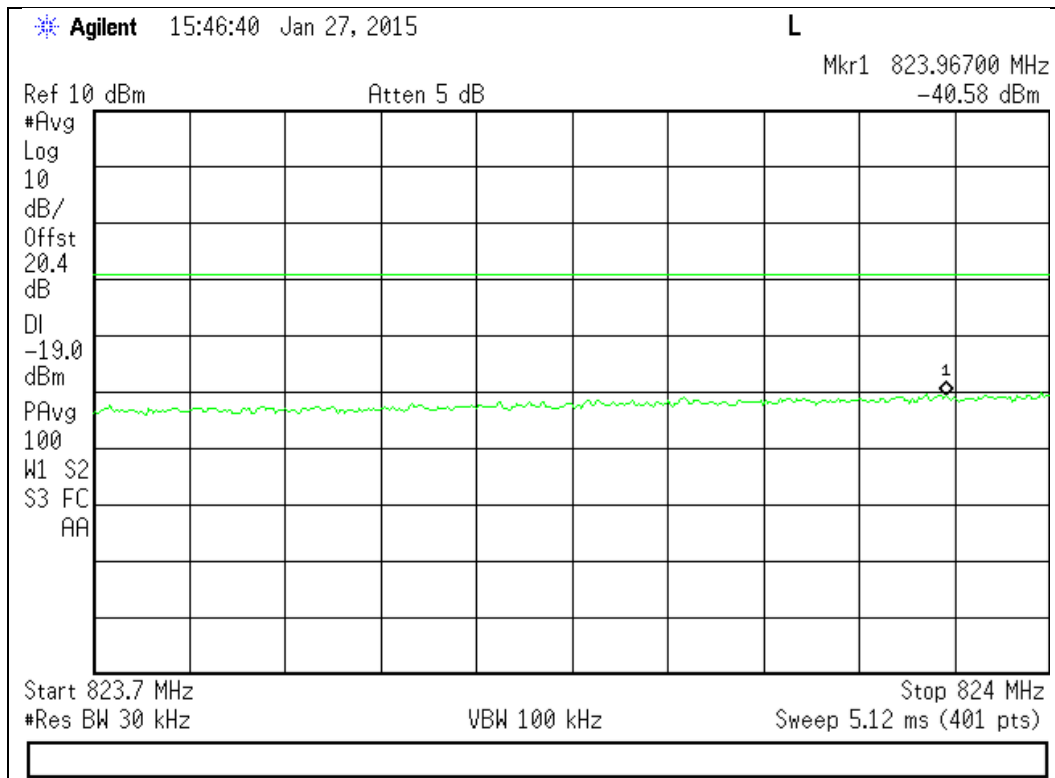


Upper Band Edge

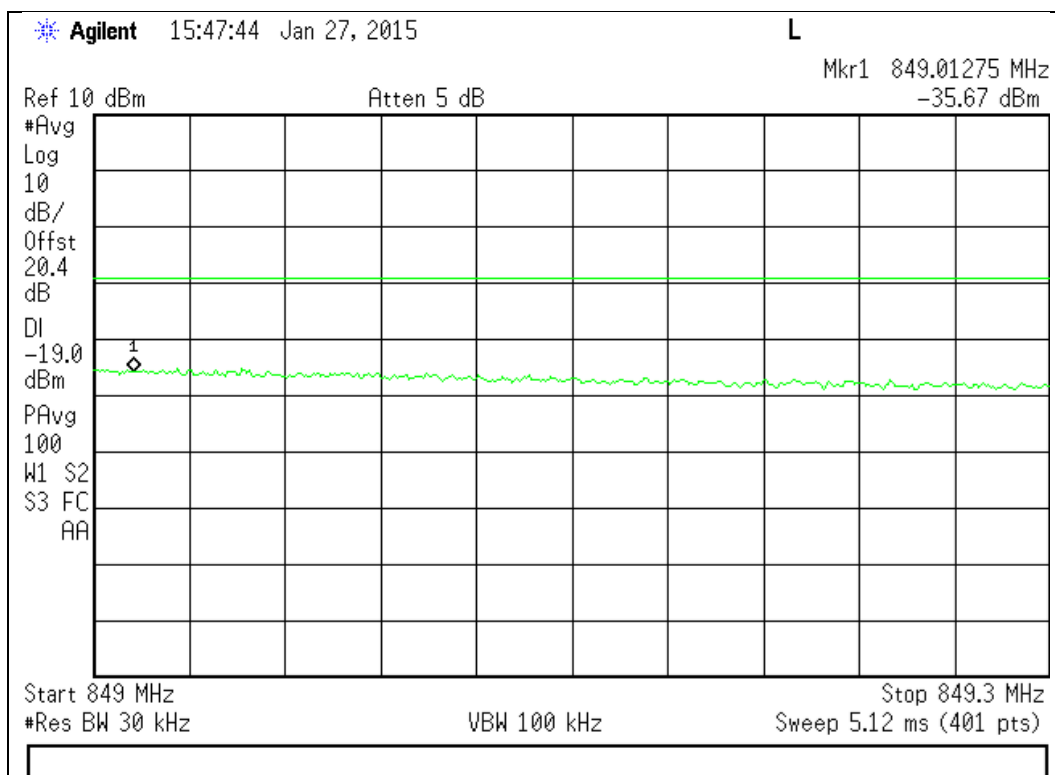


1710 - 1755 MHz Band

Lower Band Edge

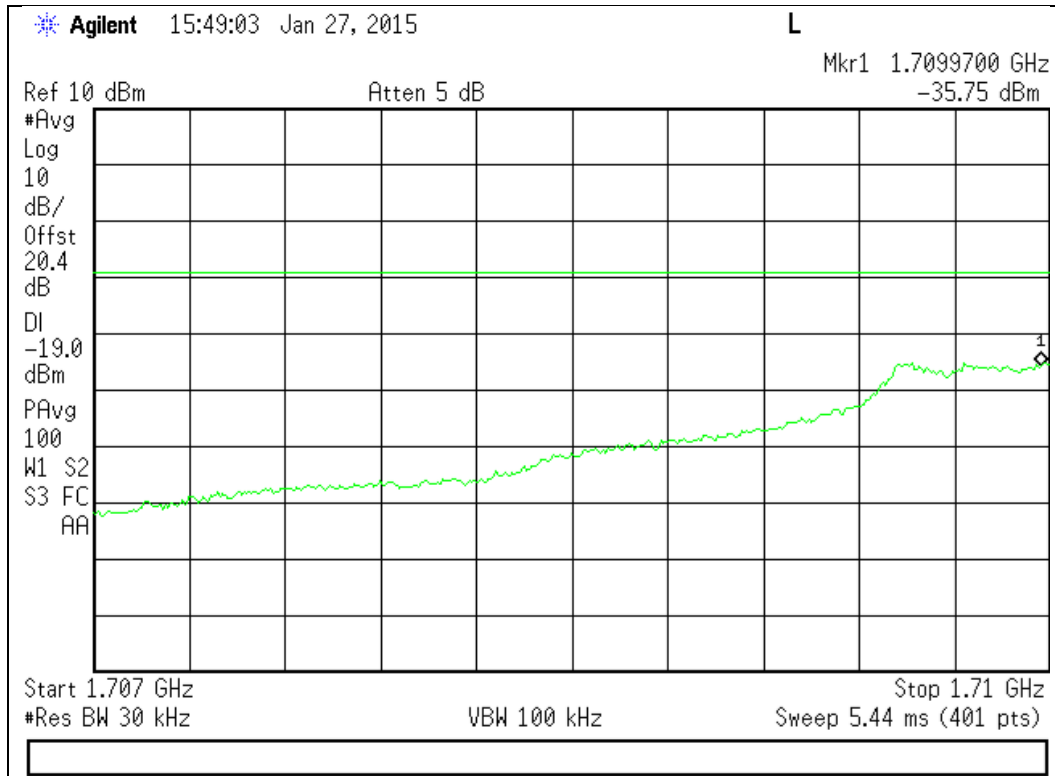


Upper Band Edge

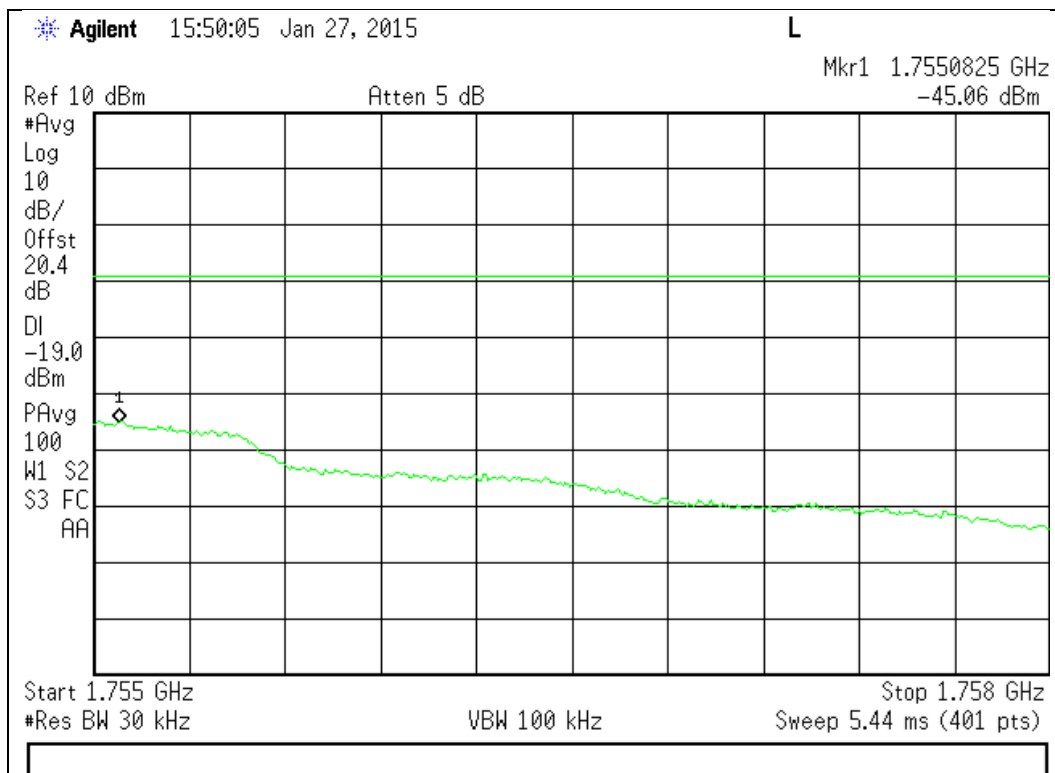


1850 - 1915 MHz Band

Lower Band Edge

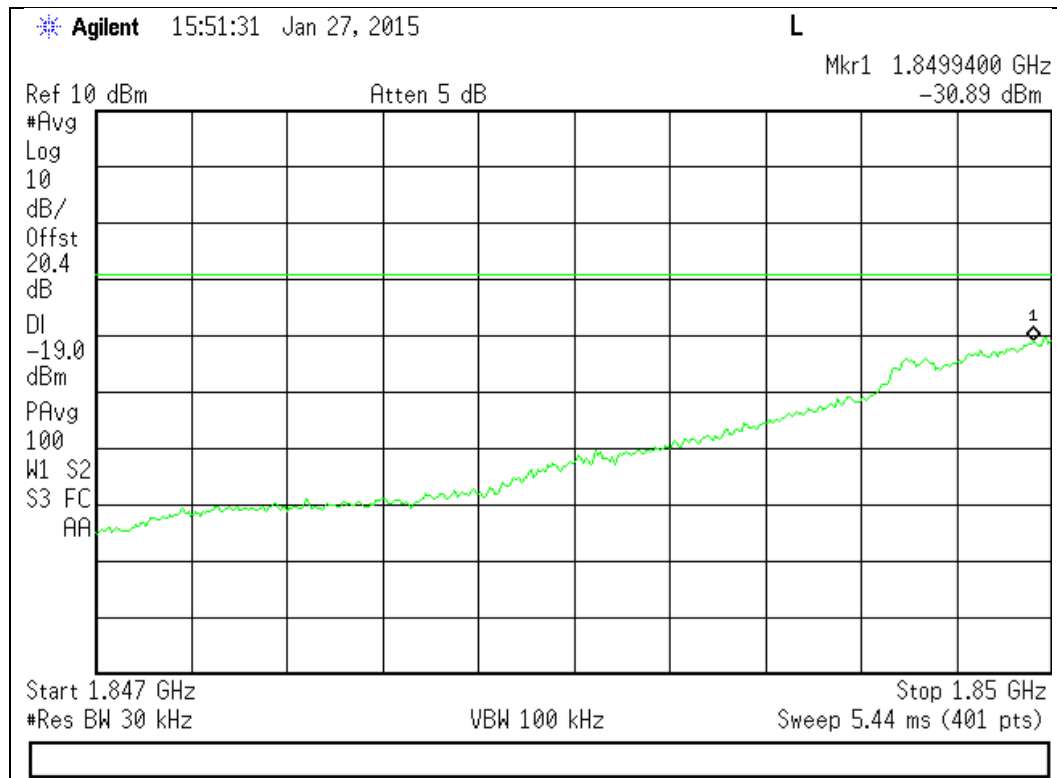


Upper Band Edge

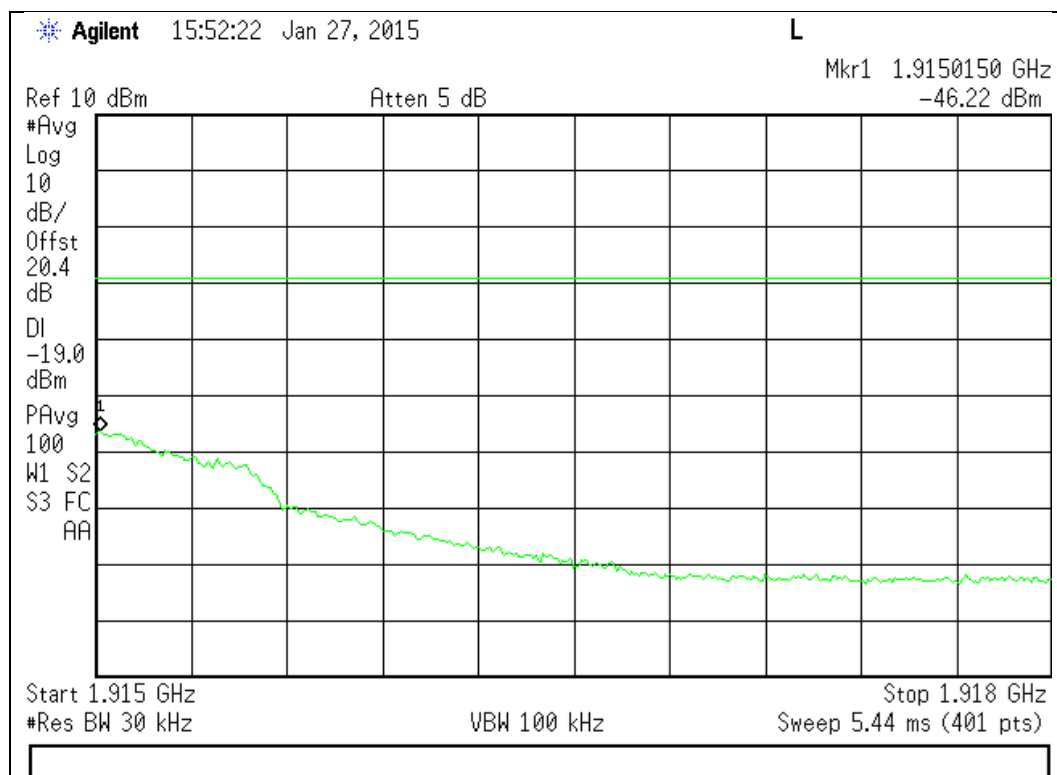




WCDMA Uplink Test Plots
698 - 716 MHz Band
Lower Band Edge

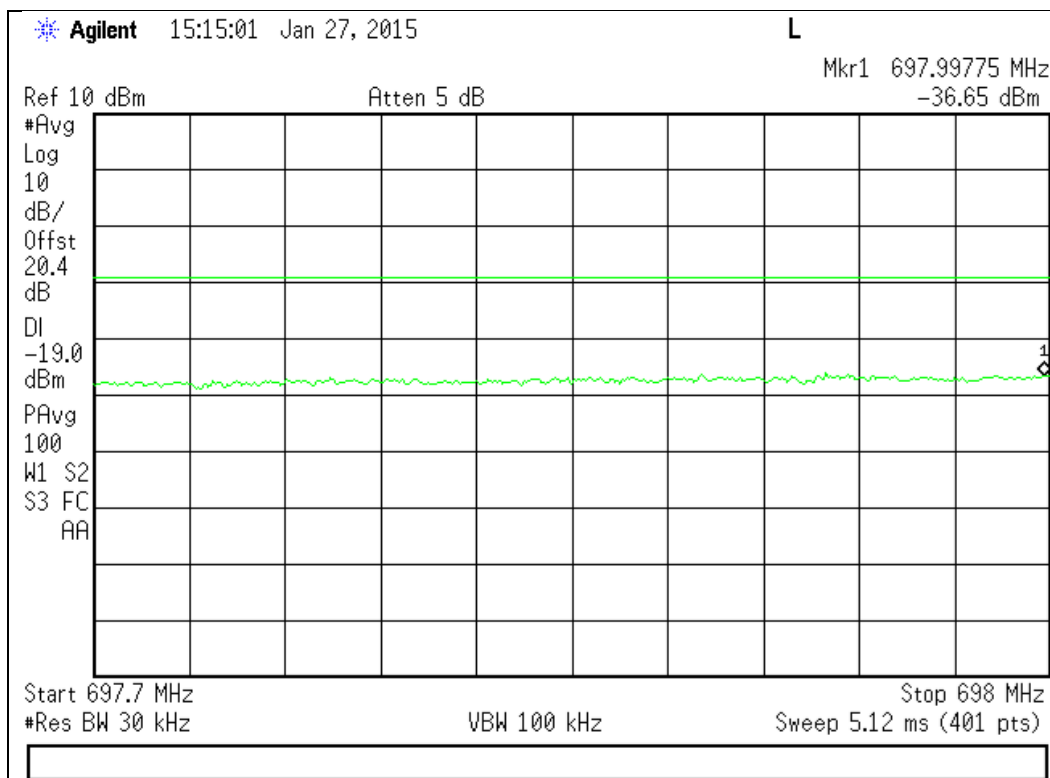


Upper Band Edge

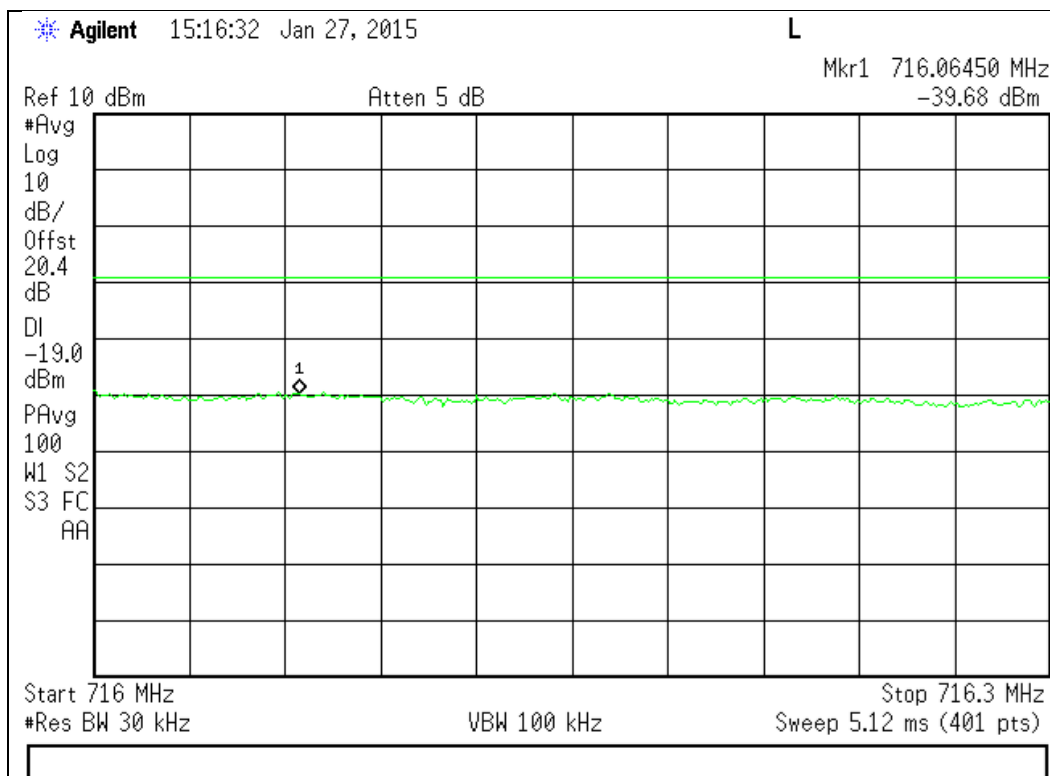


776 - 787 MHz Band

Lower Band Edge

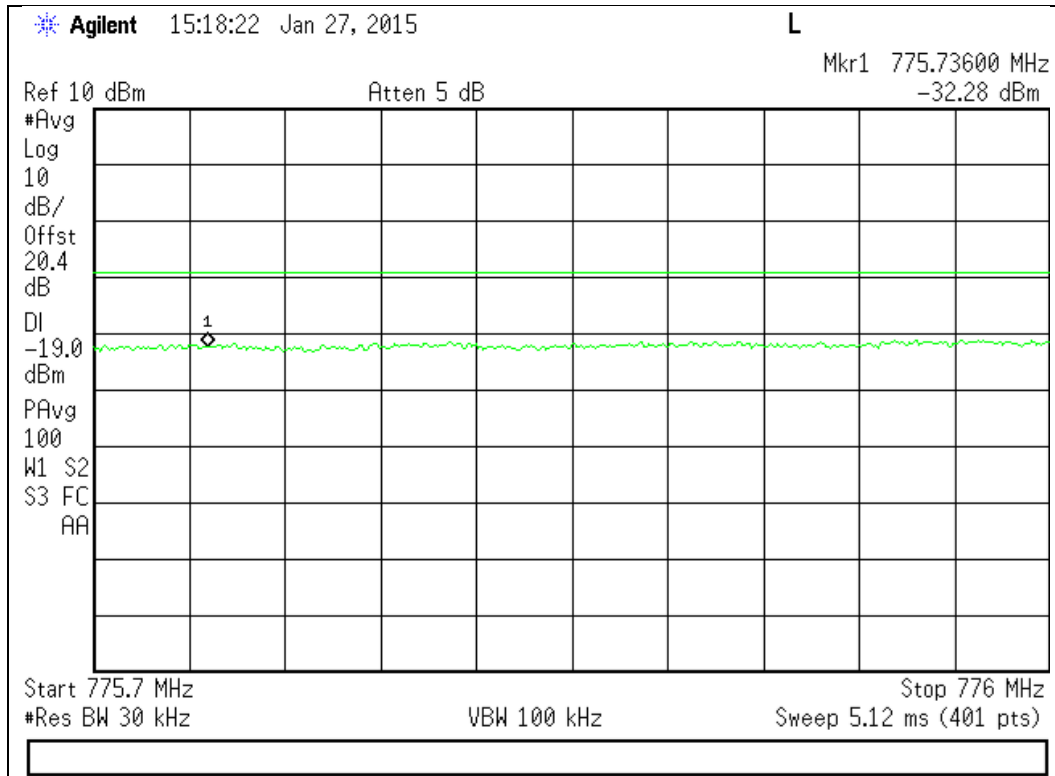


Upper Band Edge

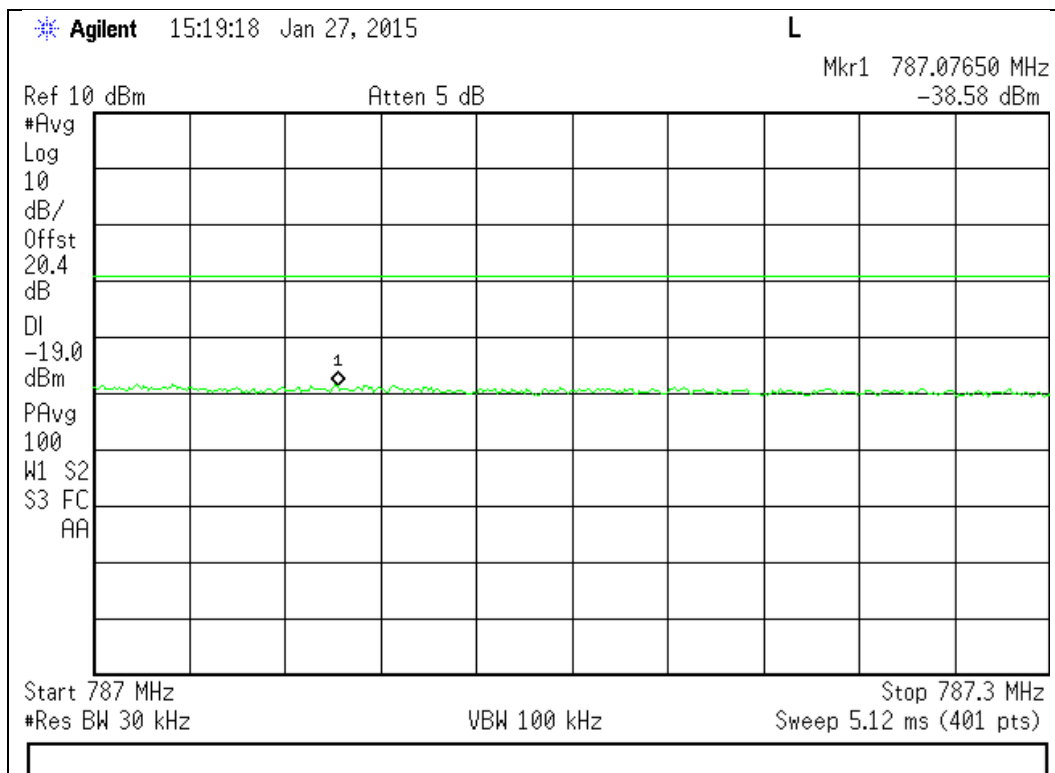


824 - 849 MHz Band

Lower Band Edge

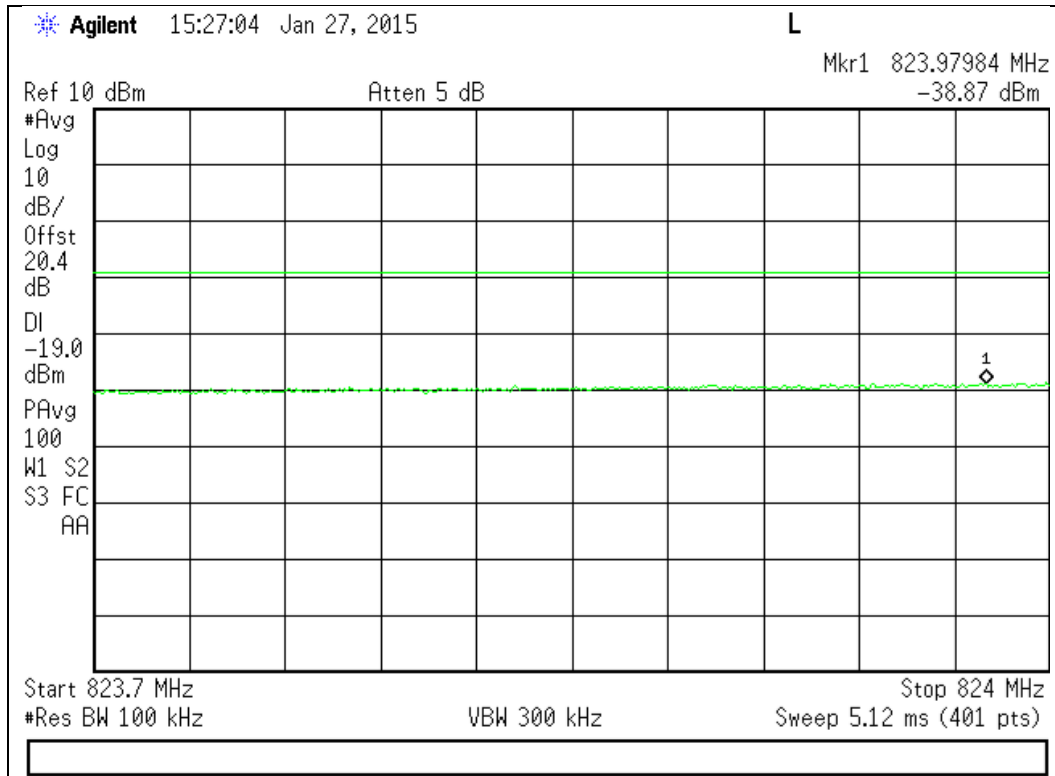


Upper Band Edge

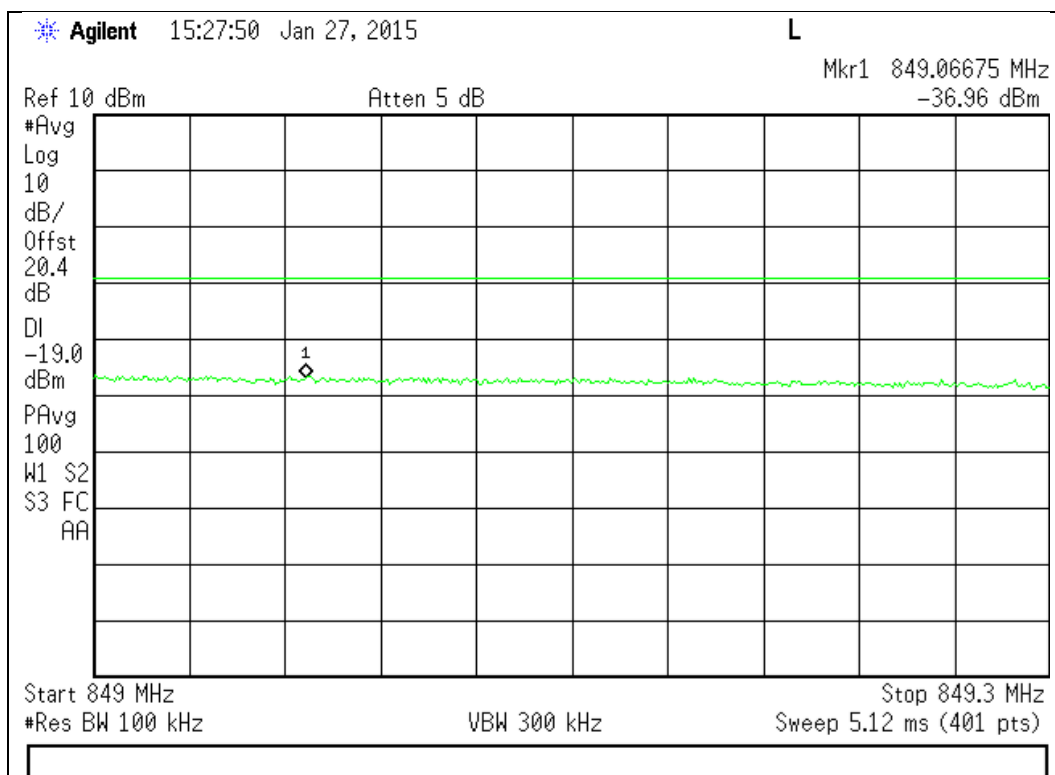


1710 - 1755 MHz Band

Lower Band Edge

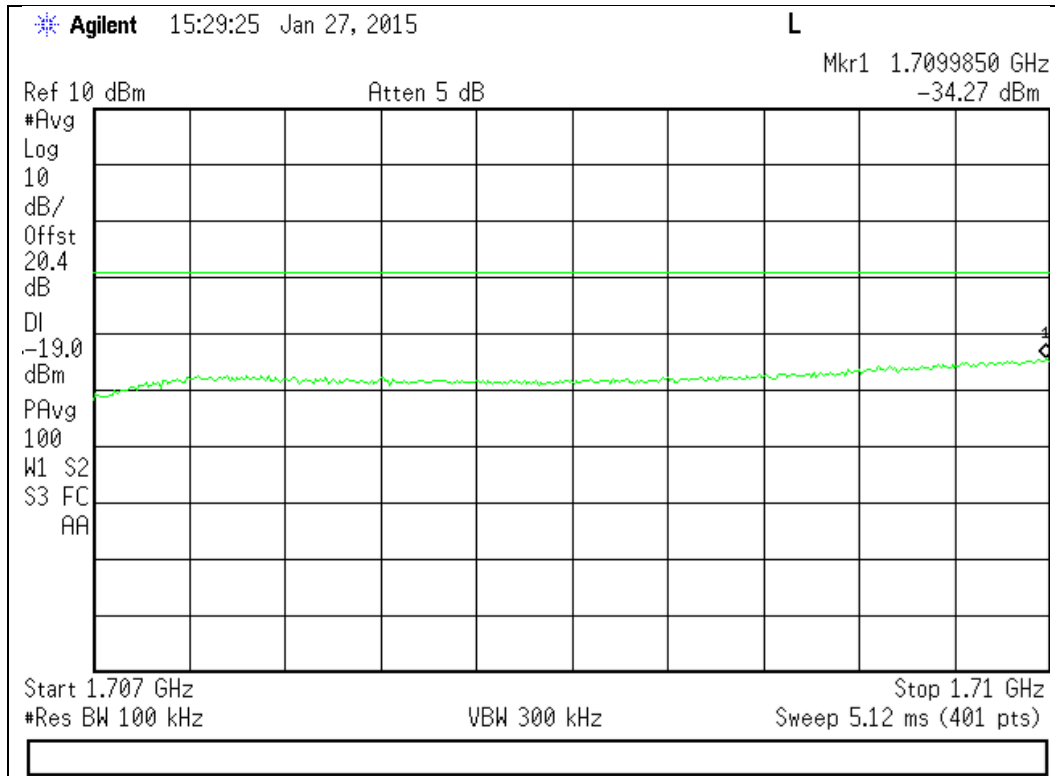


Upper Band Edge

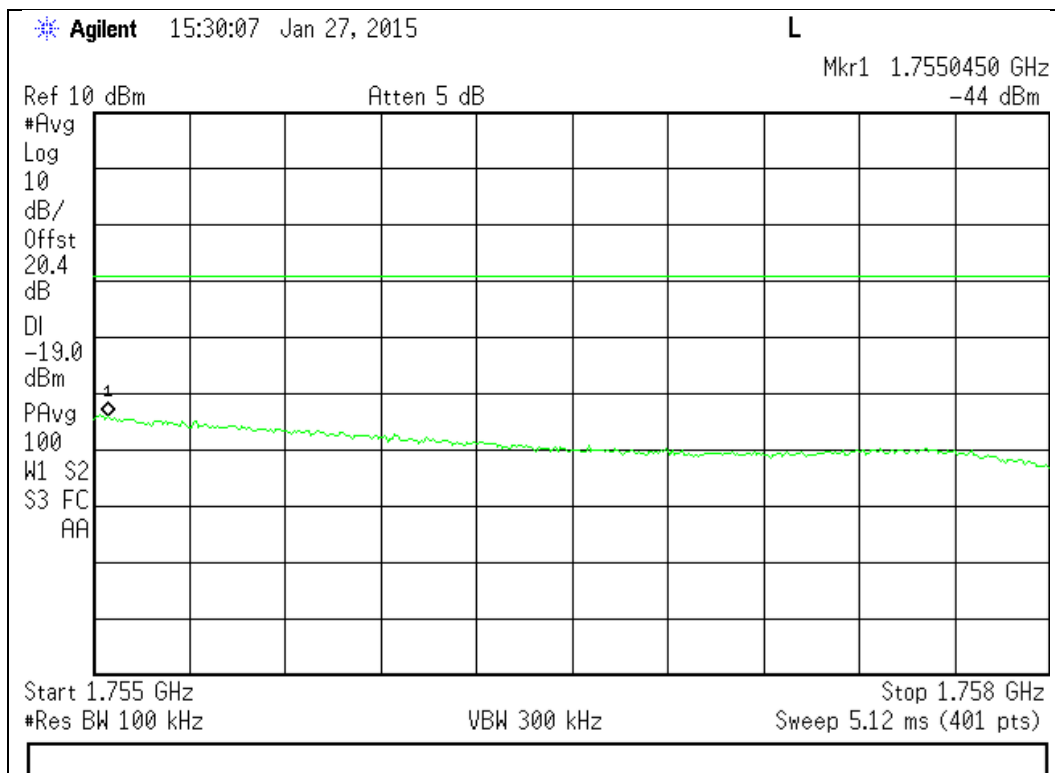


1850 - 1915 MHz Band

Lower Band Edge

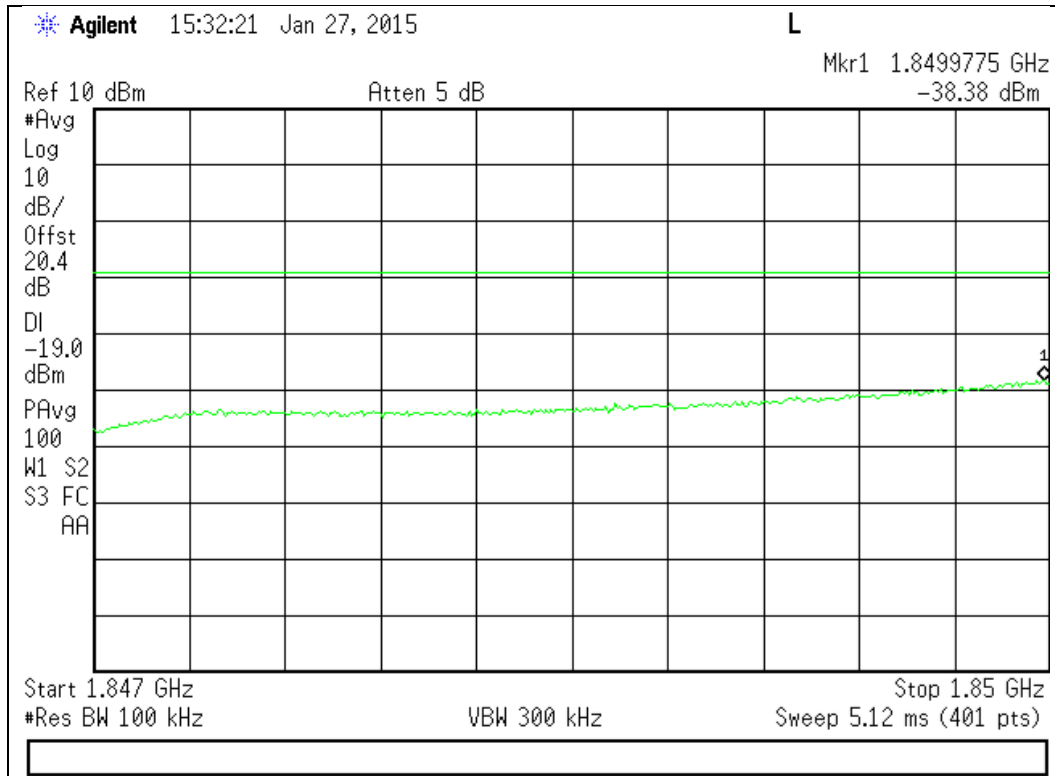


Upper Band Edge

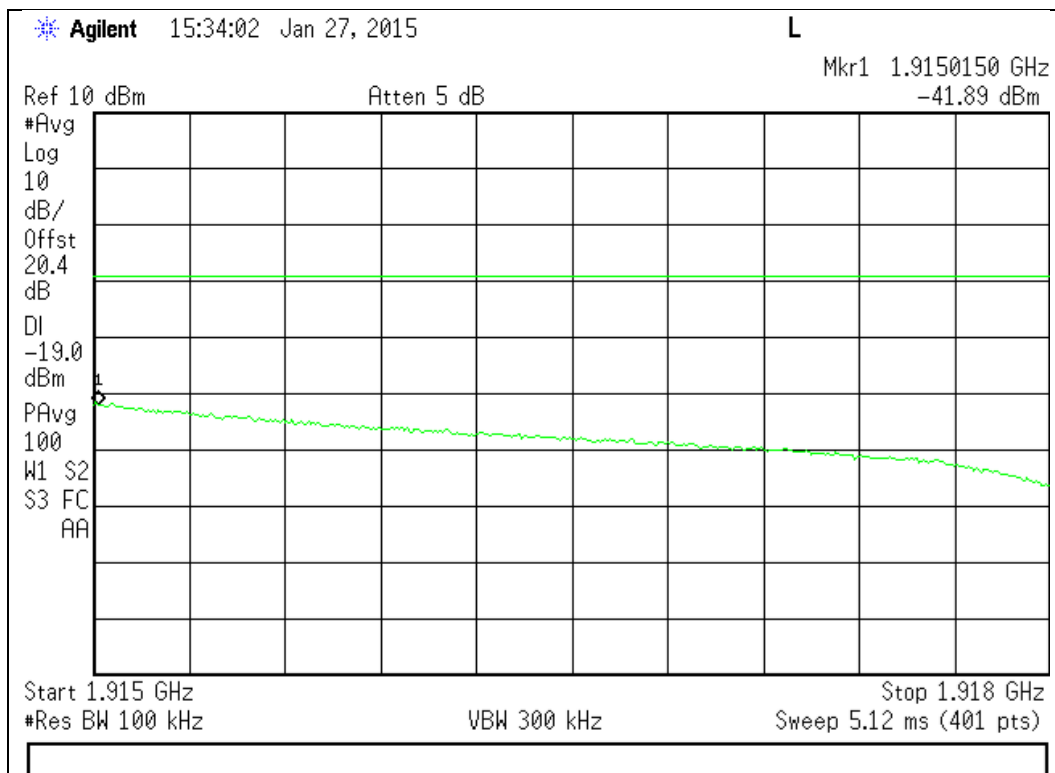




GSM Downlink Test Plots
728 - 746 MHz Band
Lower Band Edge

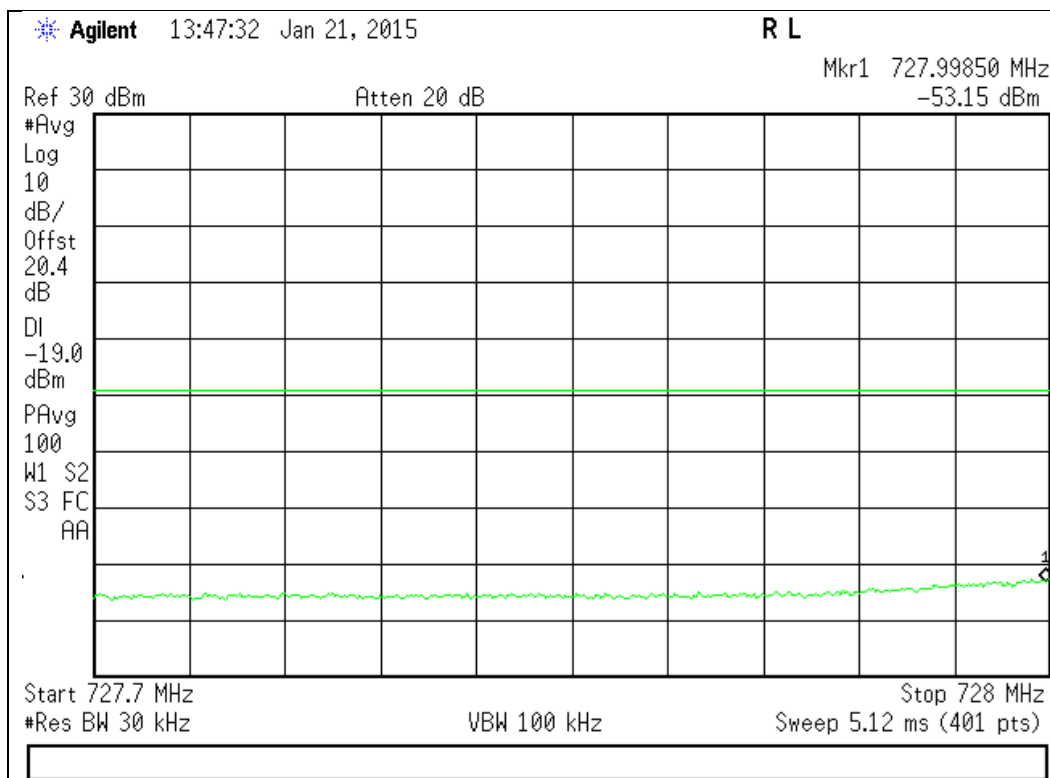


Upper Band Edge

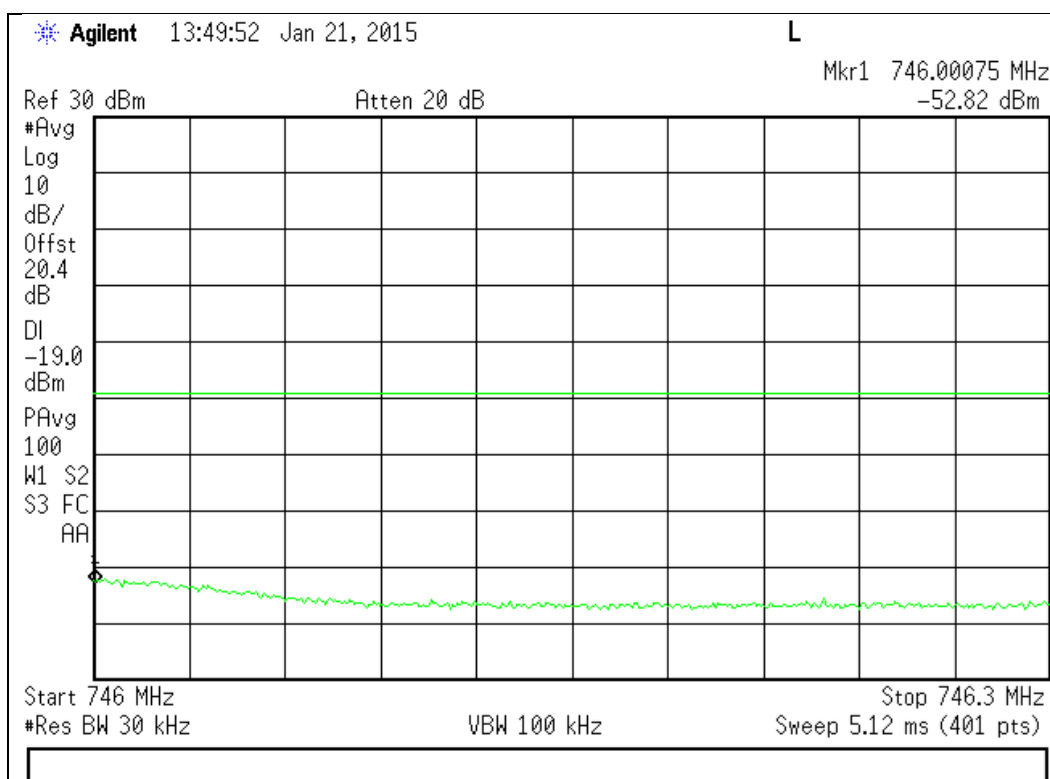




746 - 757 MHz Band

Lower Band Edge

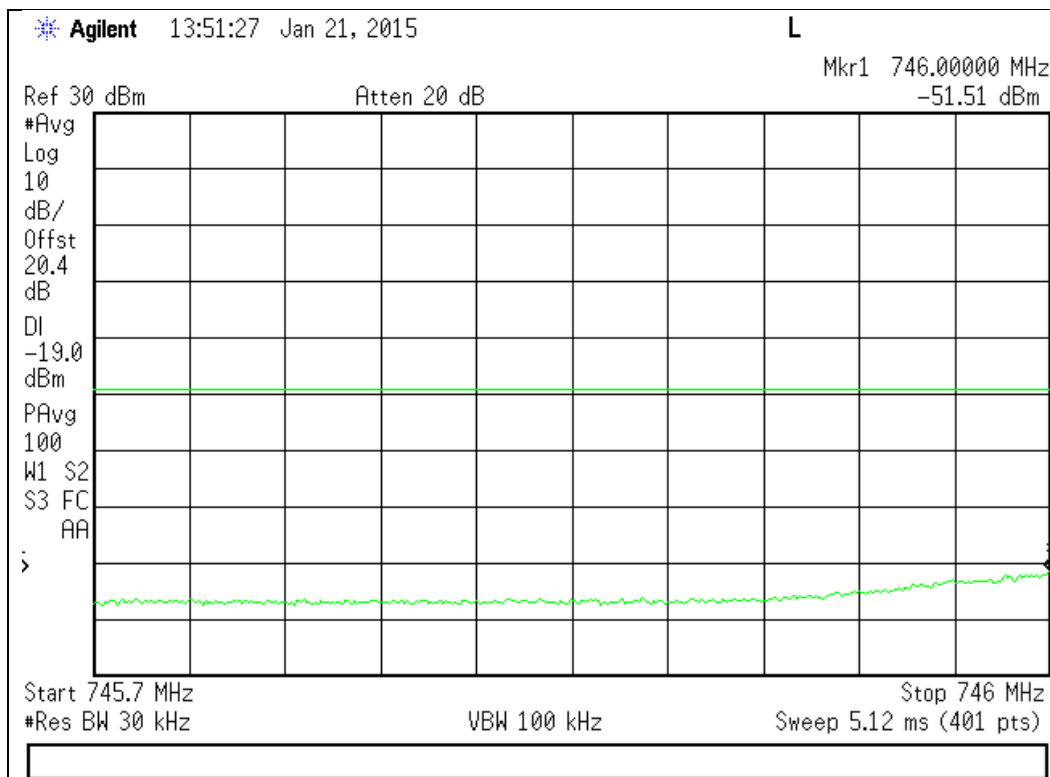


Upper Band Edge

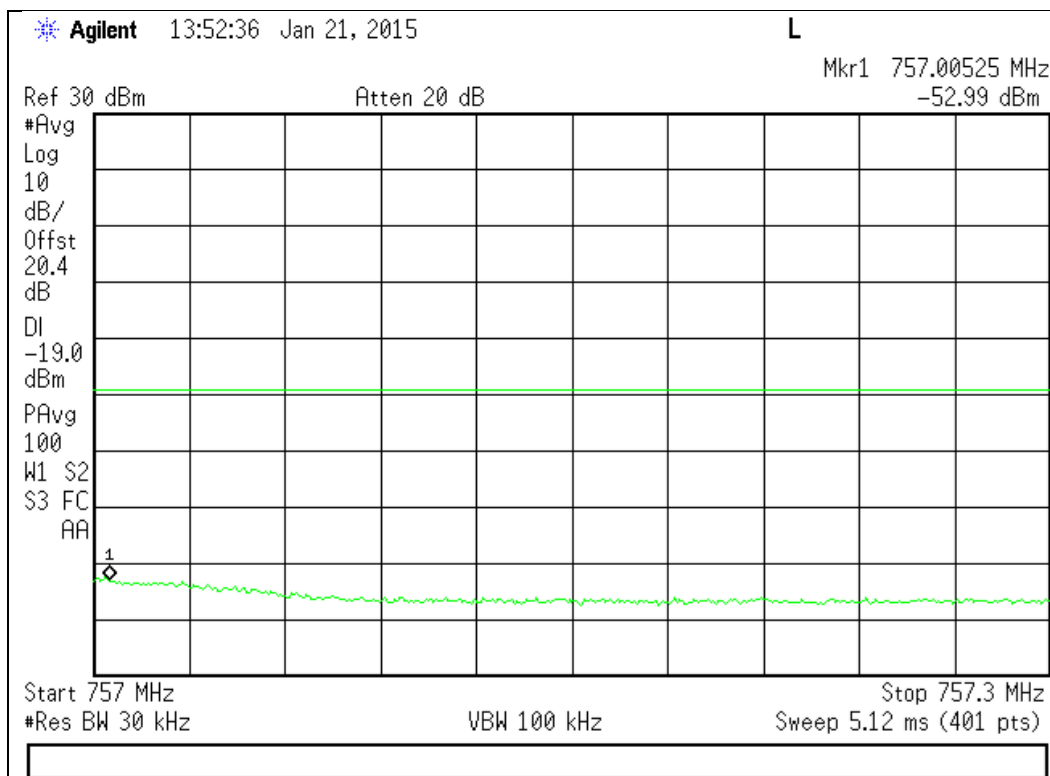




869 - 894 MHz Band

Lower Band Edge

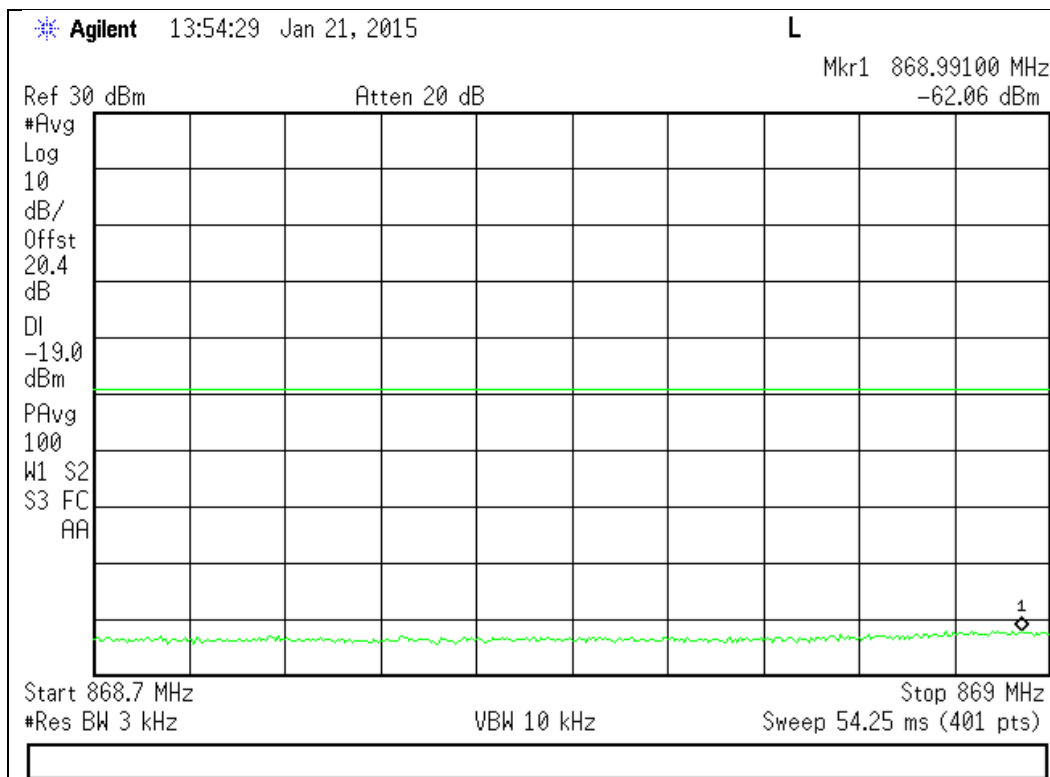


Upper Band Edge

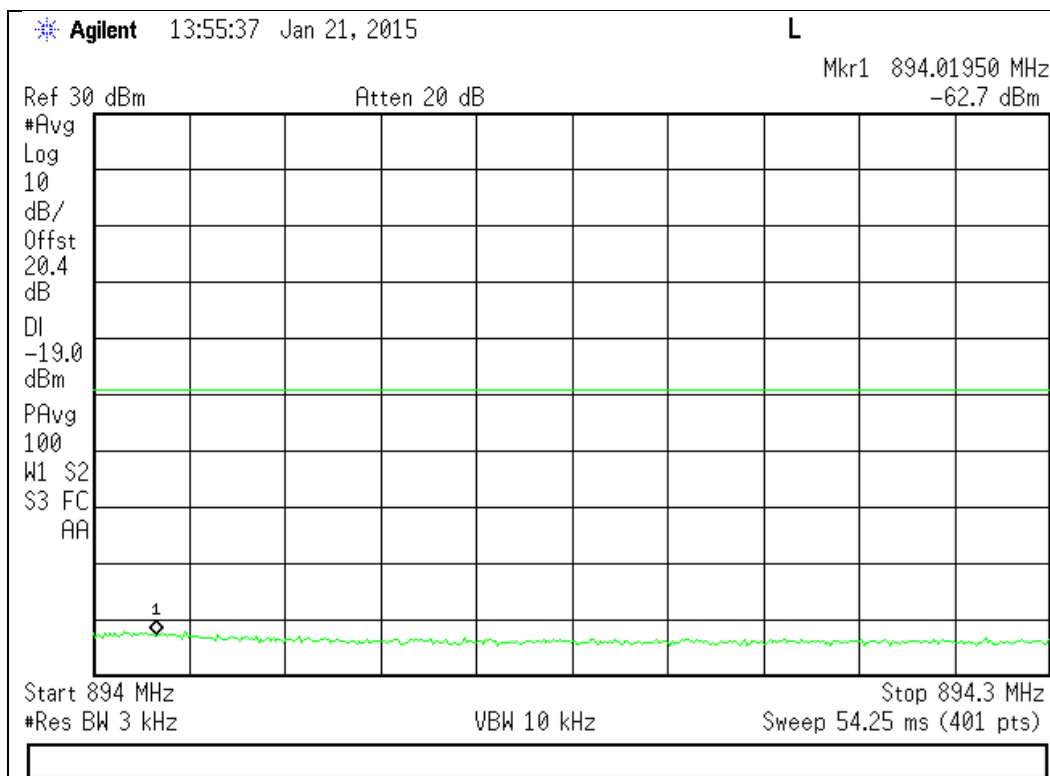


1930 - 1995 MHz Band

Lower Band Edge

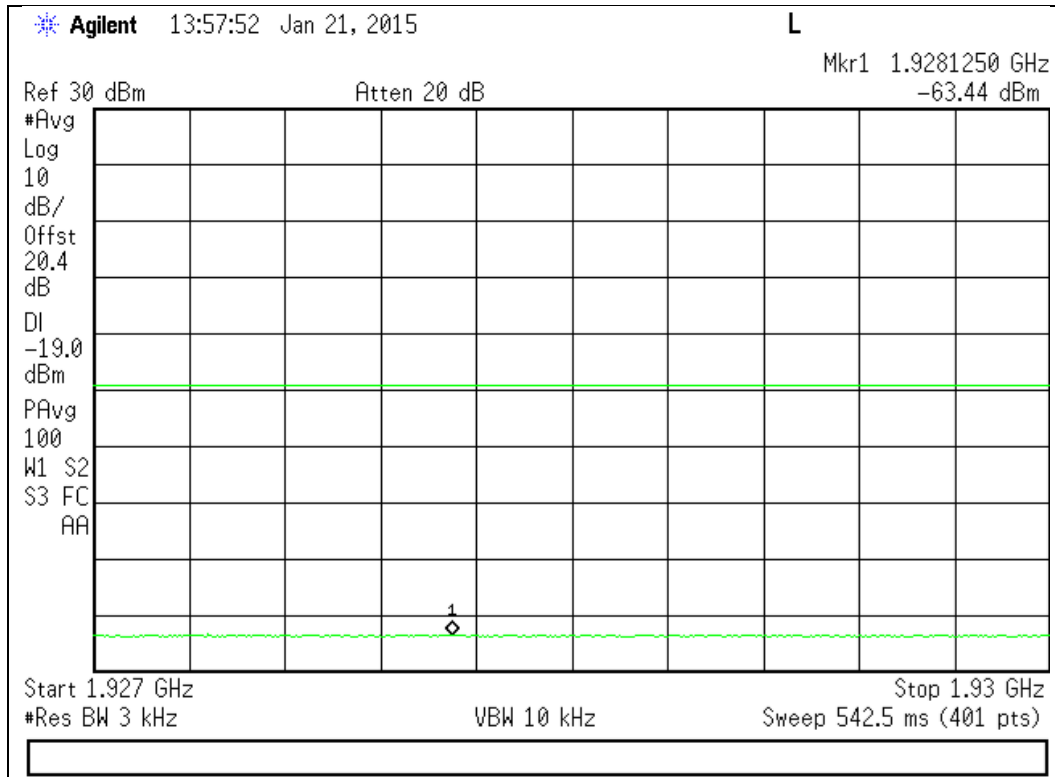


Upper Band Edge

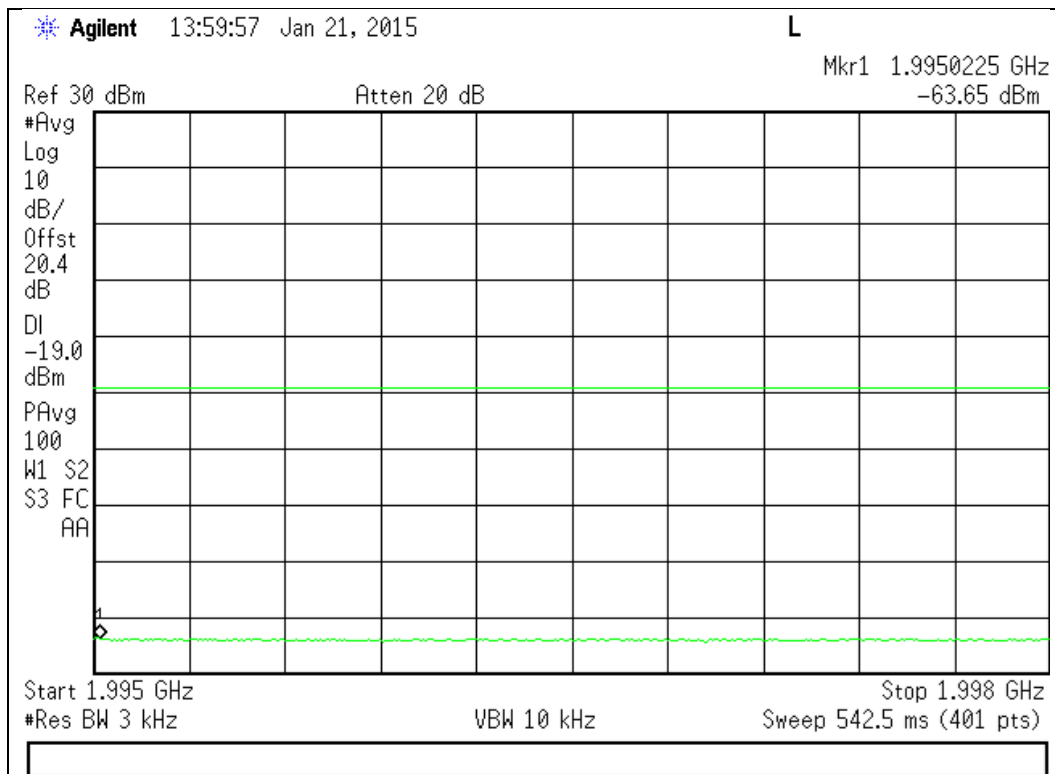




2110 - 2155 MHz Band

Lower Band Edge

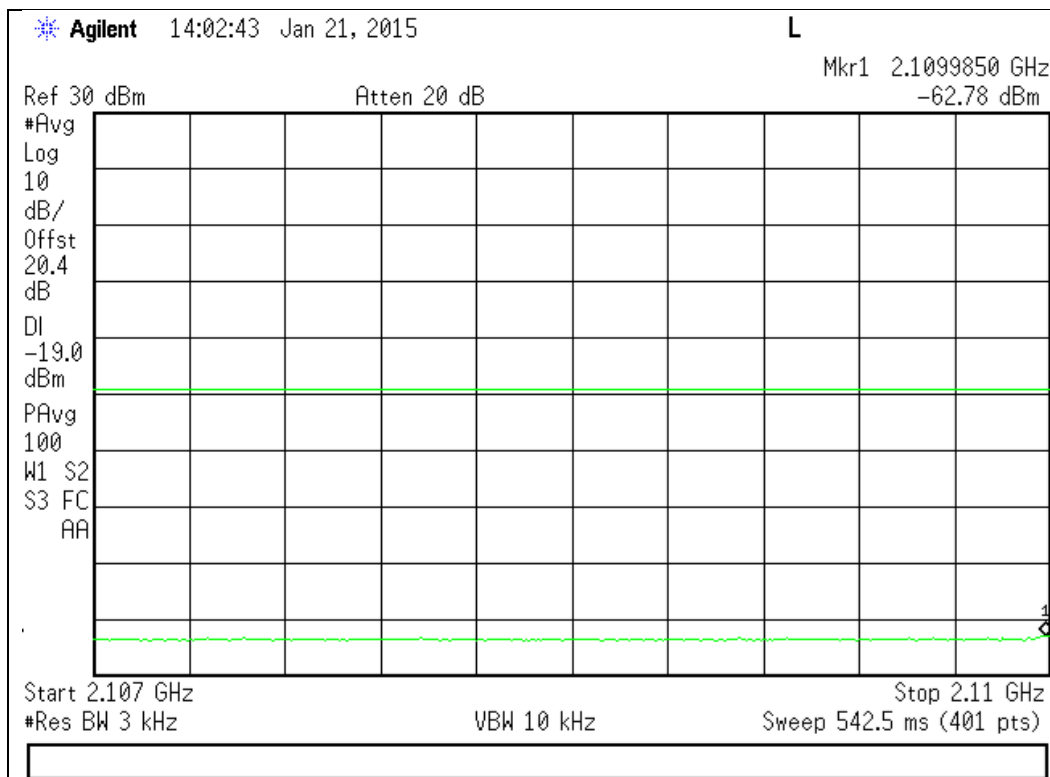


Upper Band Edge

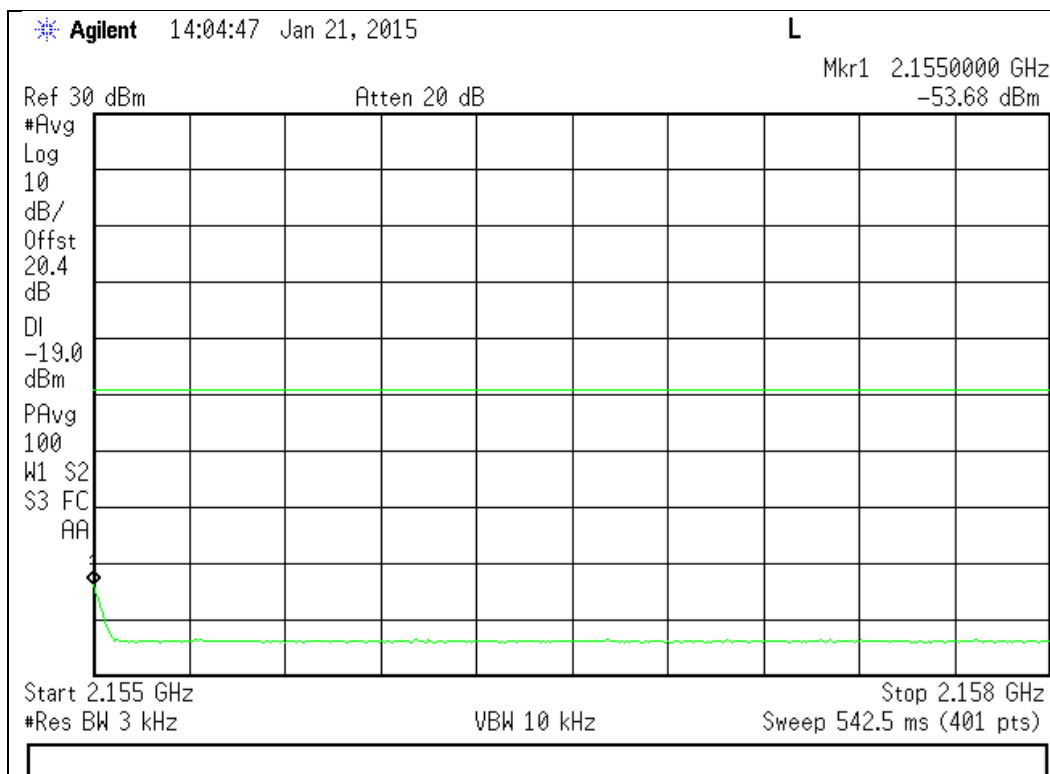


CDMA Downlink Test Plots

728 - 746 MHz Band

Lower Band Edge

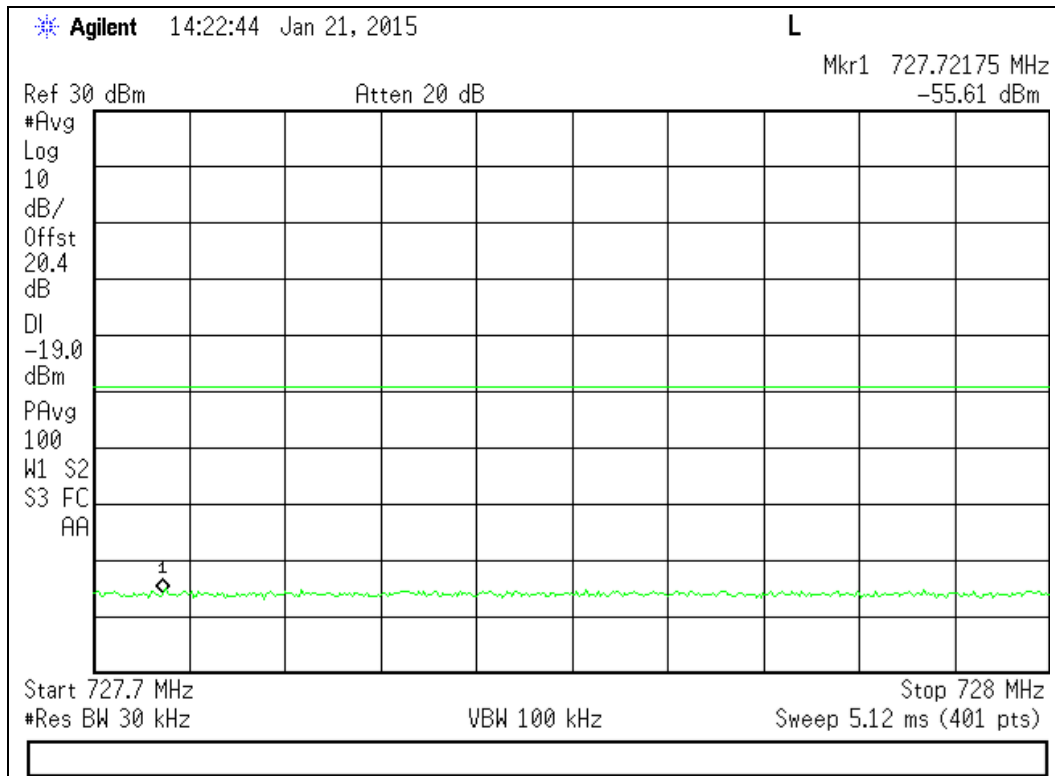


Upper Band Edge

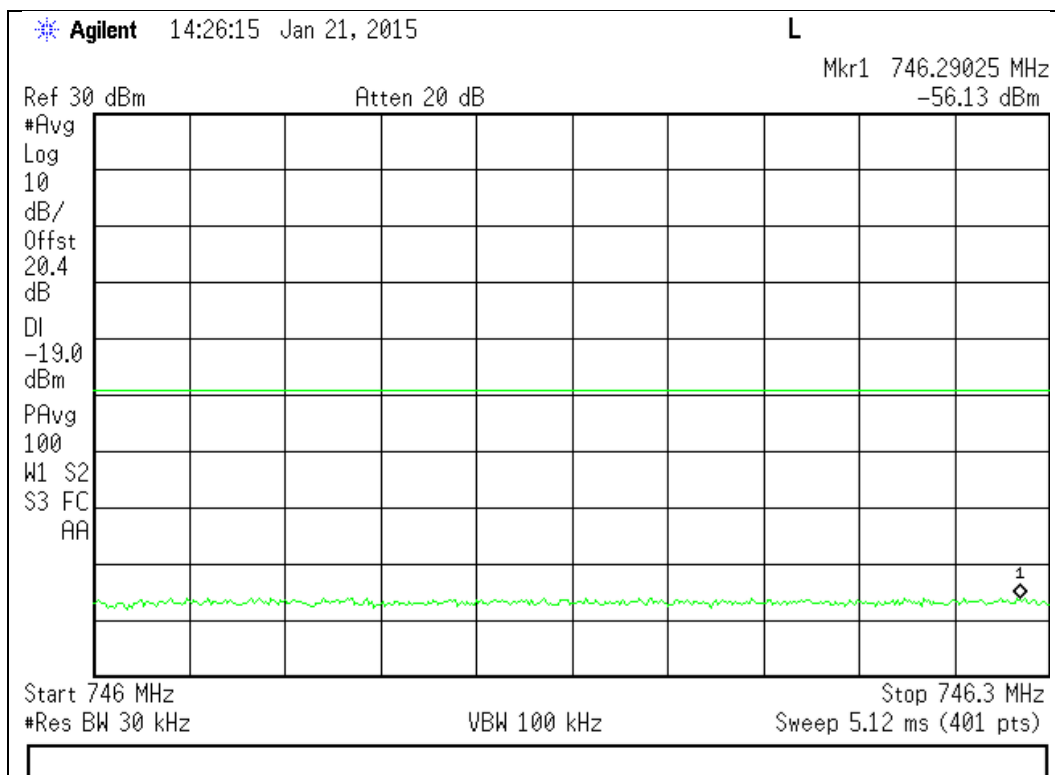




746 - 757 MHz Band

Lower Band Edge

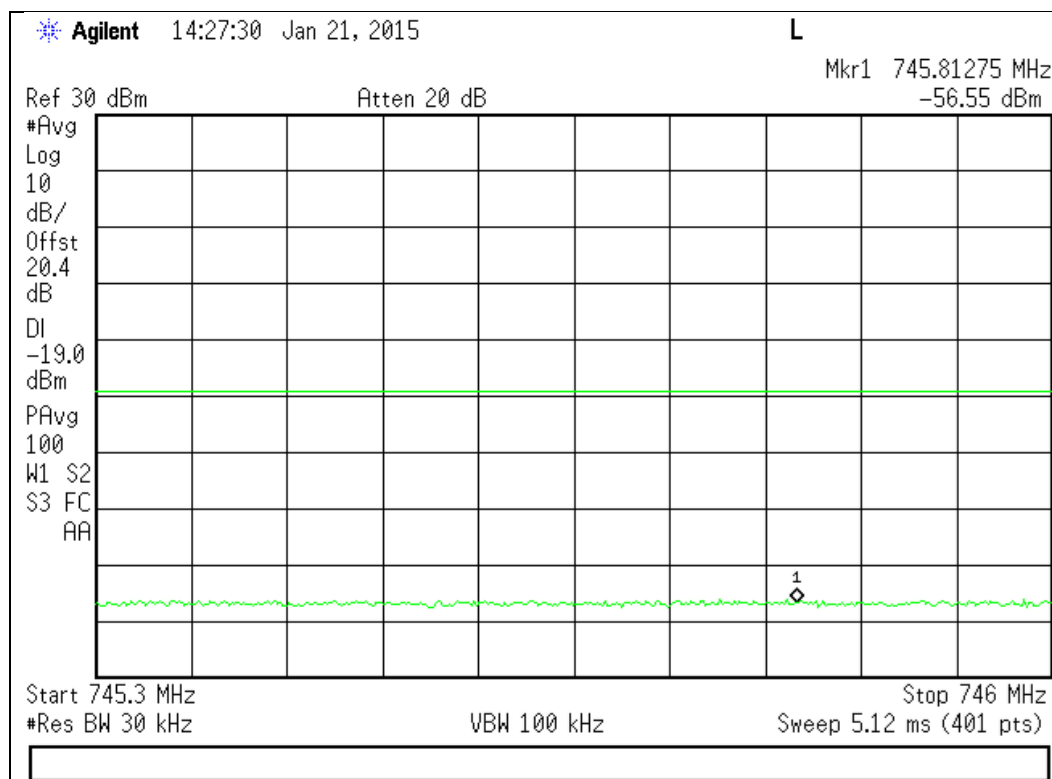


Upper Band Edge

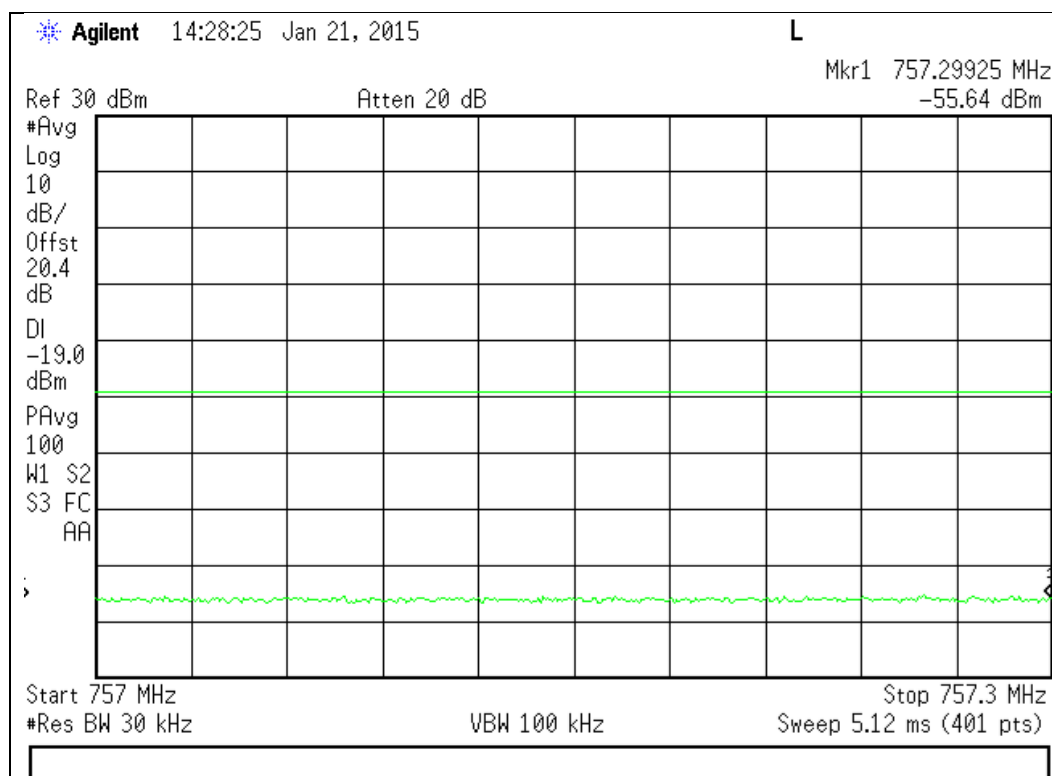


869 - 894 MHz Band

Lower Band Edge

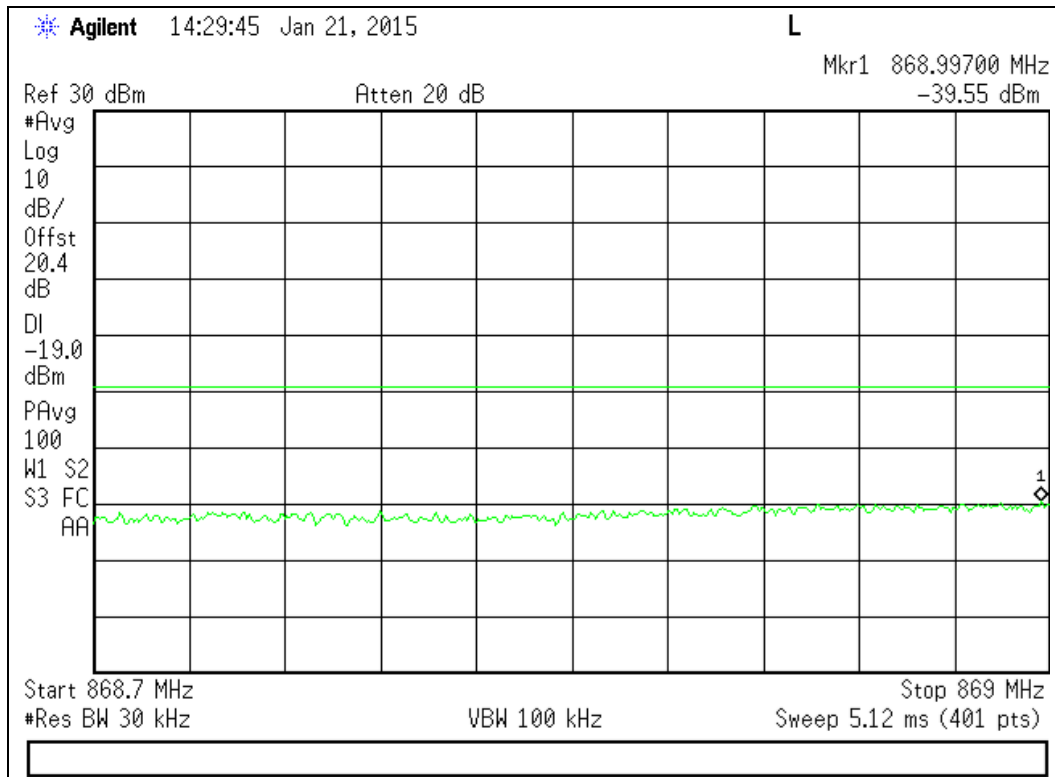


Upper Band Edge

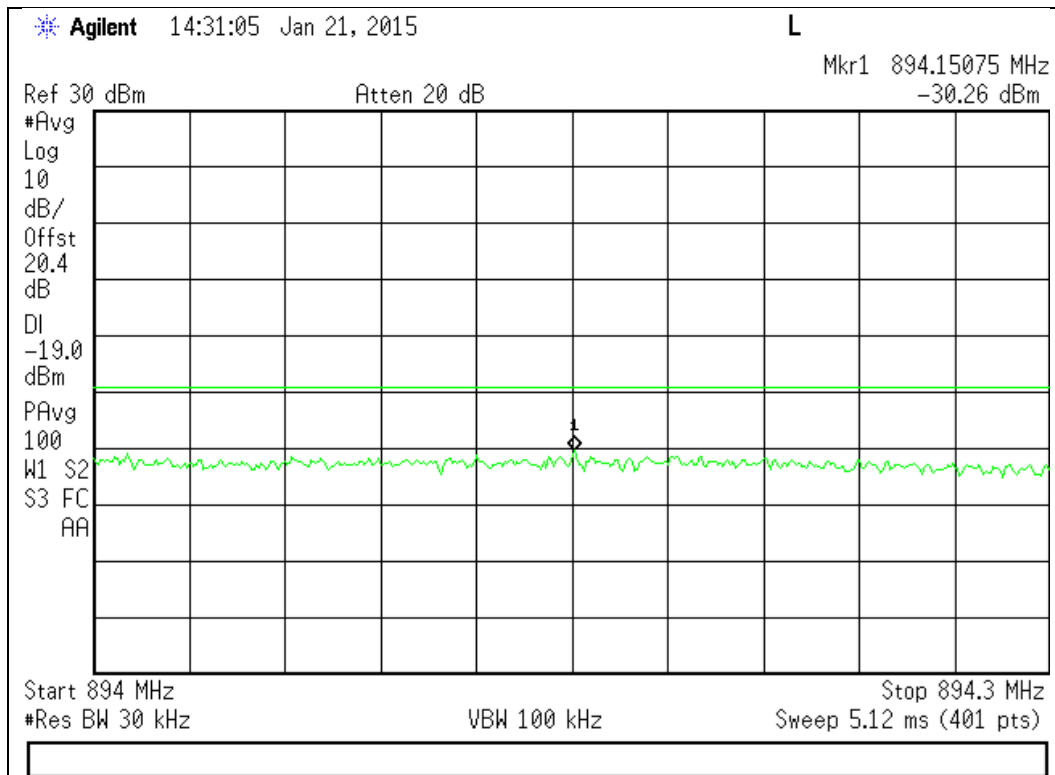




1930 - 1995 MHz Band

Lower Band Edge

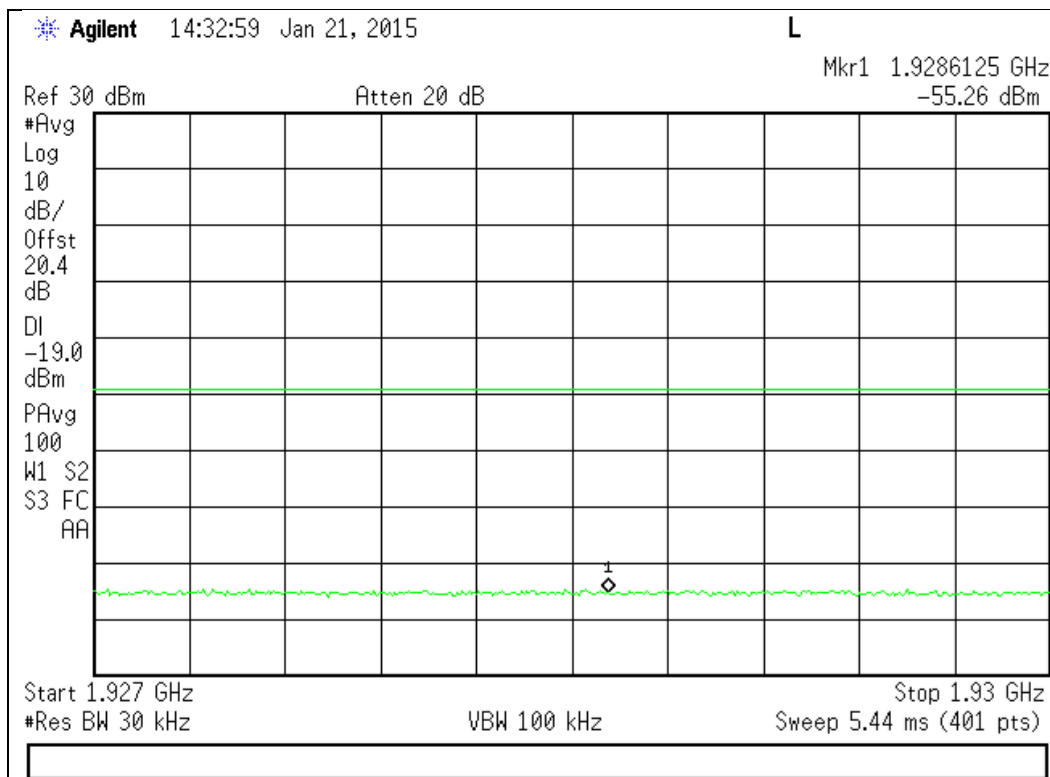


Upper Band Edge

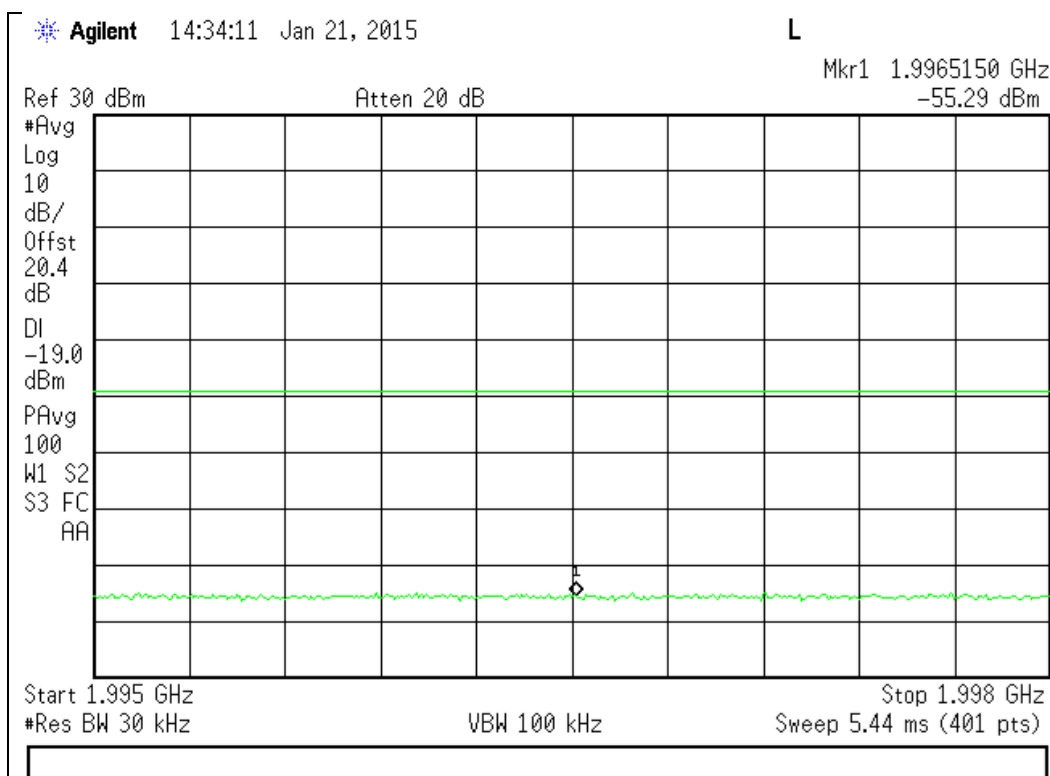




2110 - 2155 MHz Band

Lower Band Edge

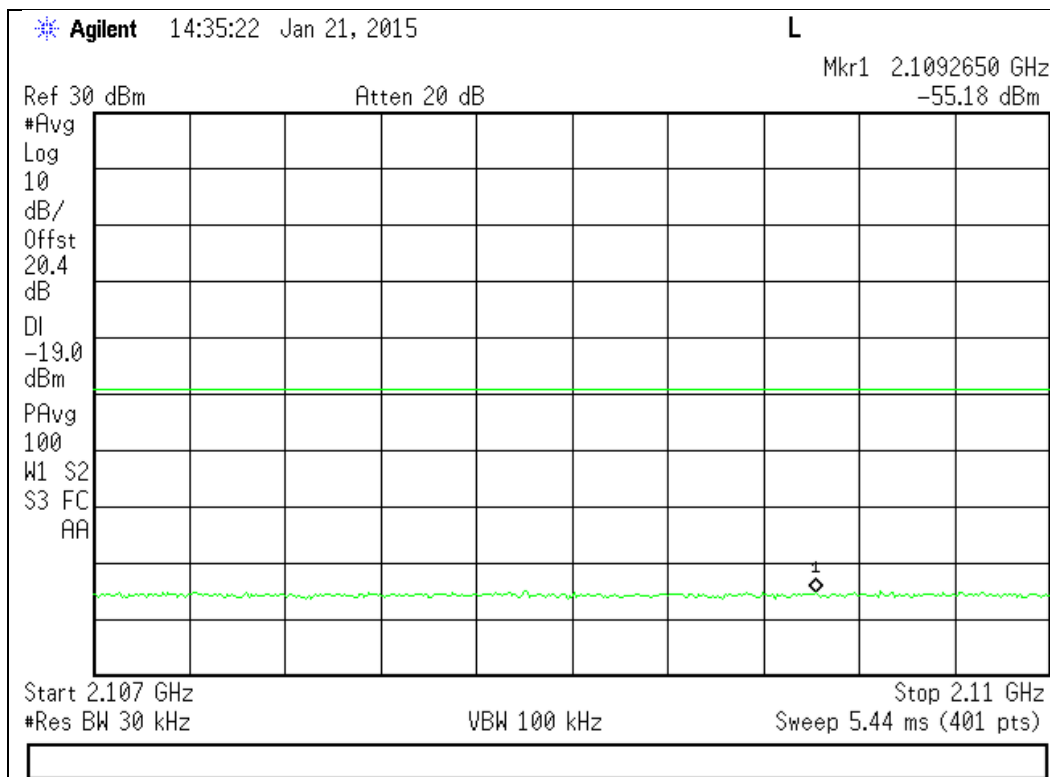


Upper Band Edge

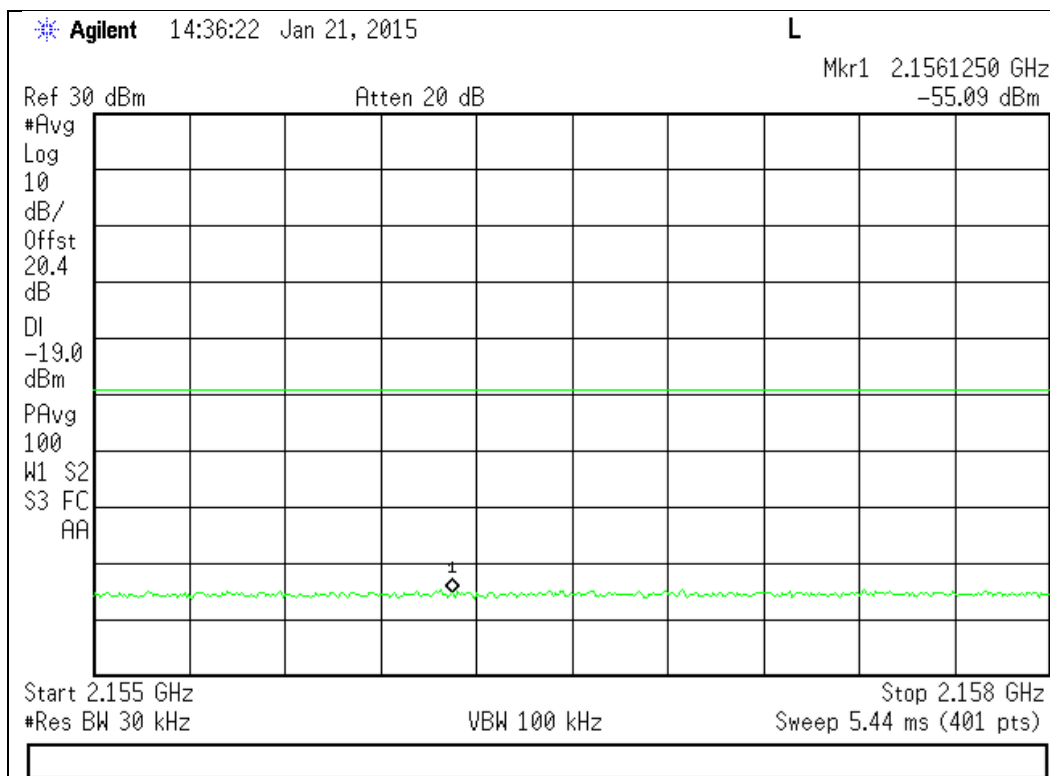




WCDMA Downlink Test Plots
728 - 746 MHz Band
Lower Band Edge

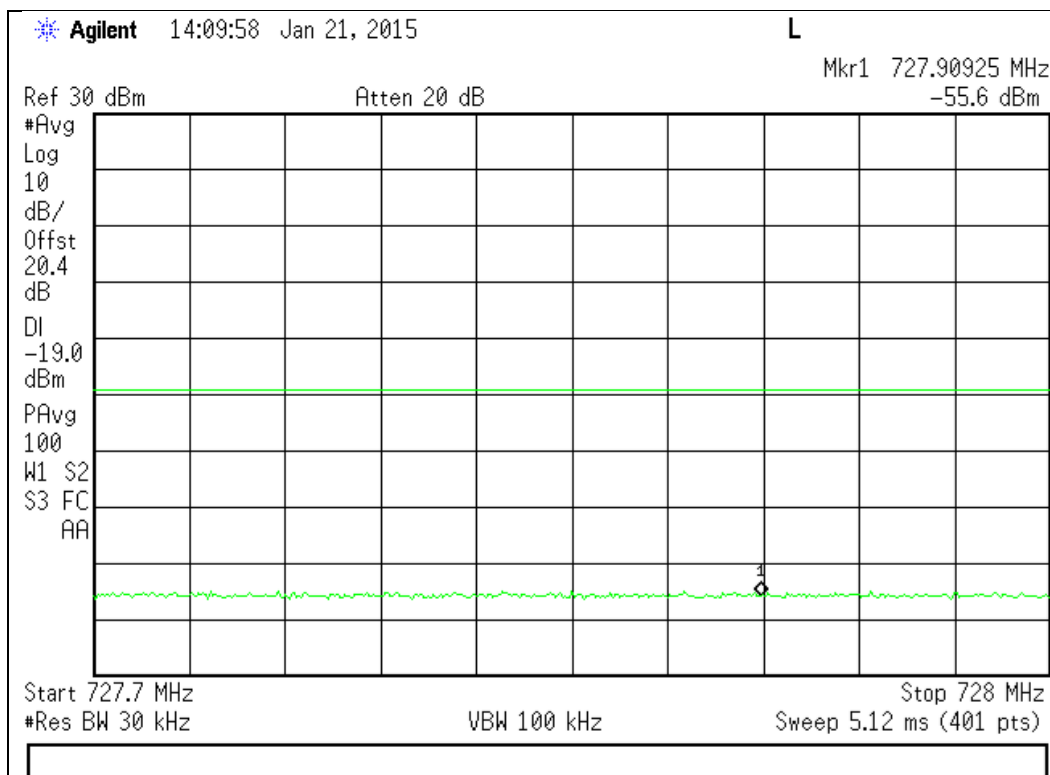


Upper Band Edge

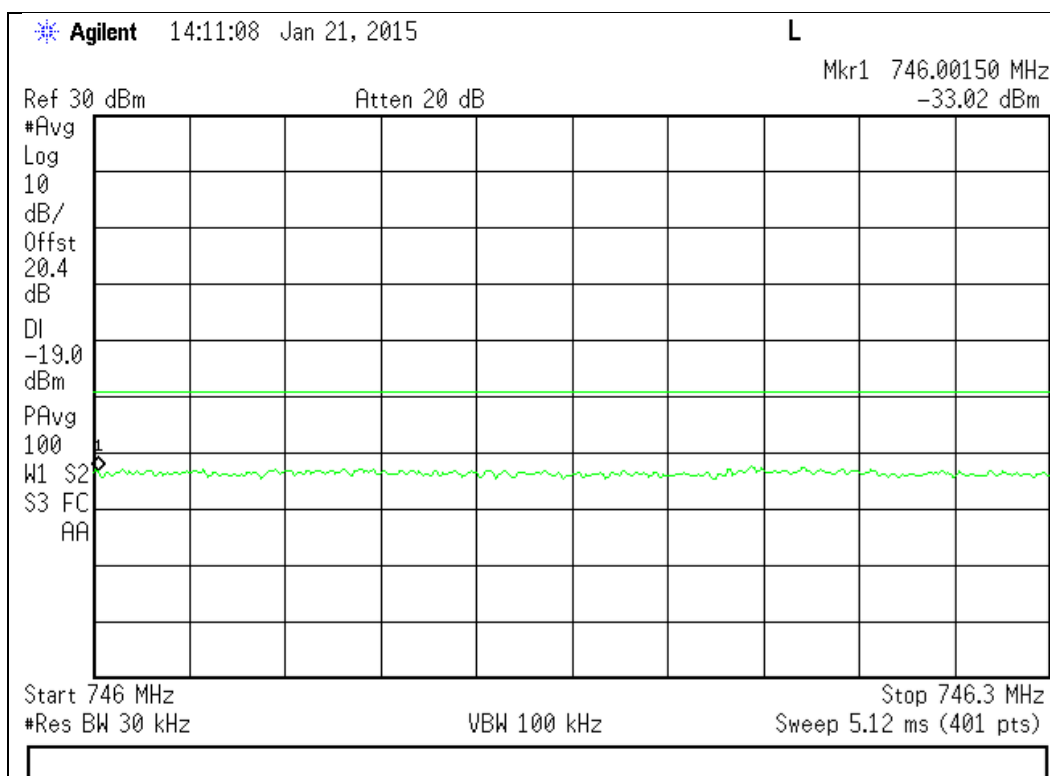




746 - 757 MHz Band

Lower Band Edge

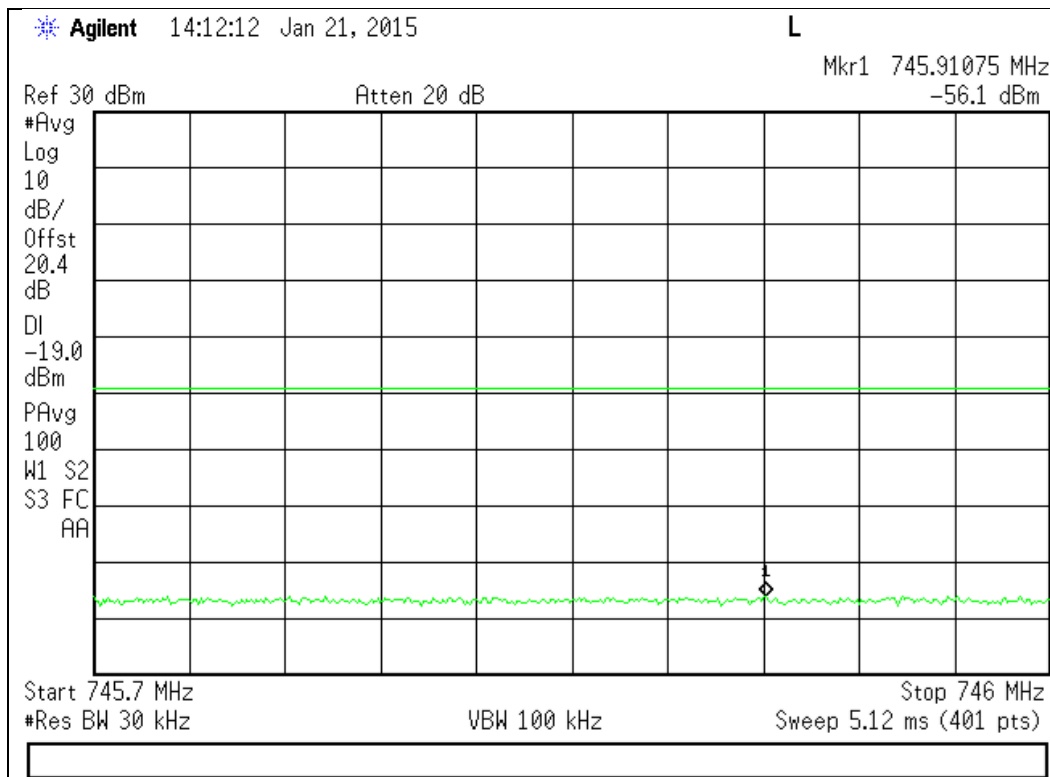


Upper Band Edge

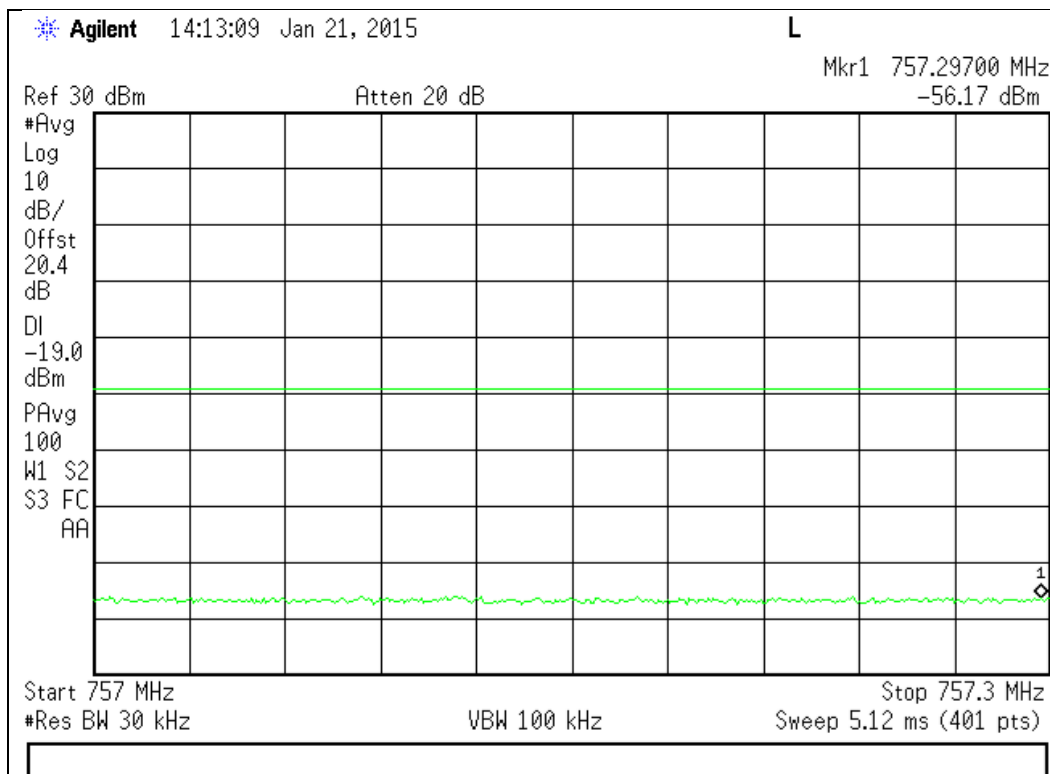




869 - 894 MHz Band

Lower Band Edge

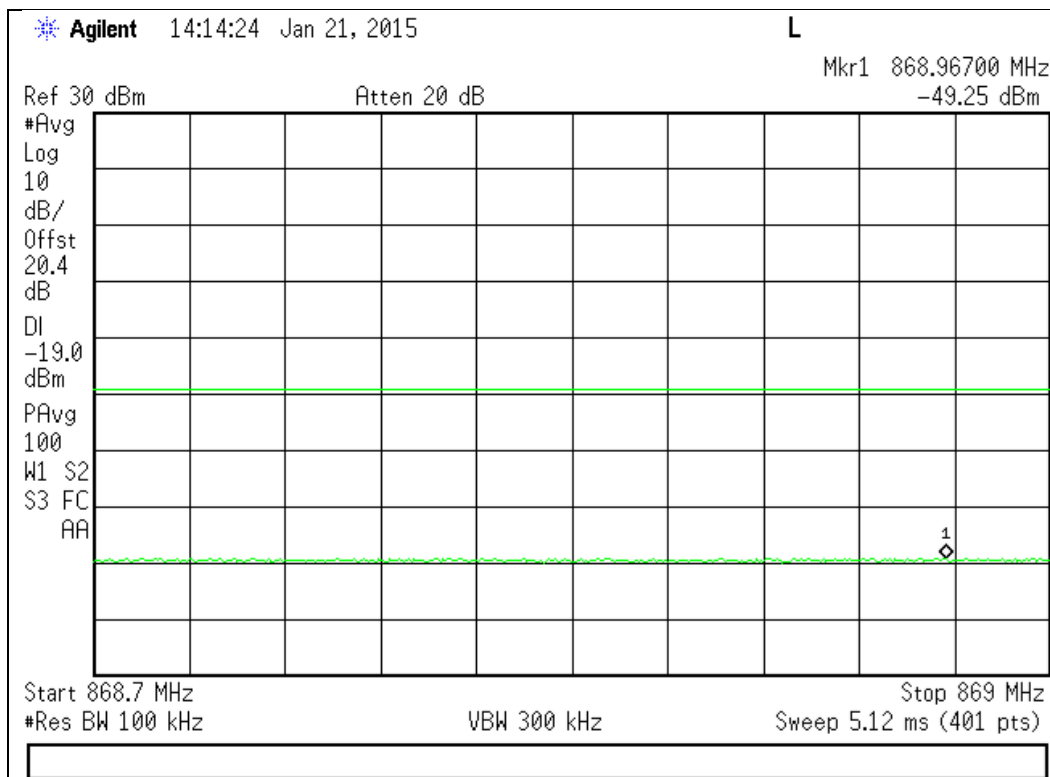


Upper Band Edge

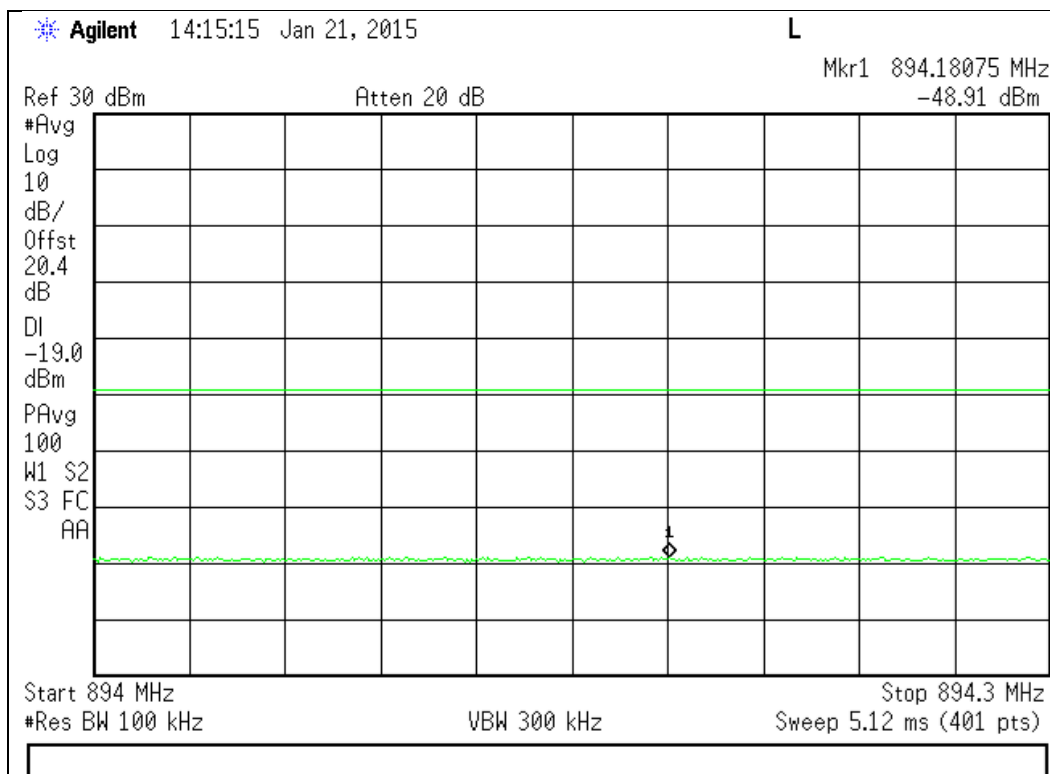




1930 - 1995 MHz Band

Lower Band Edge

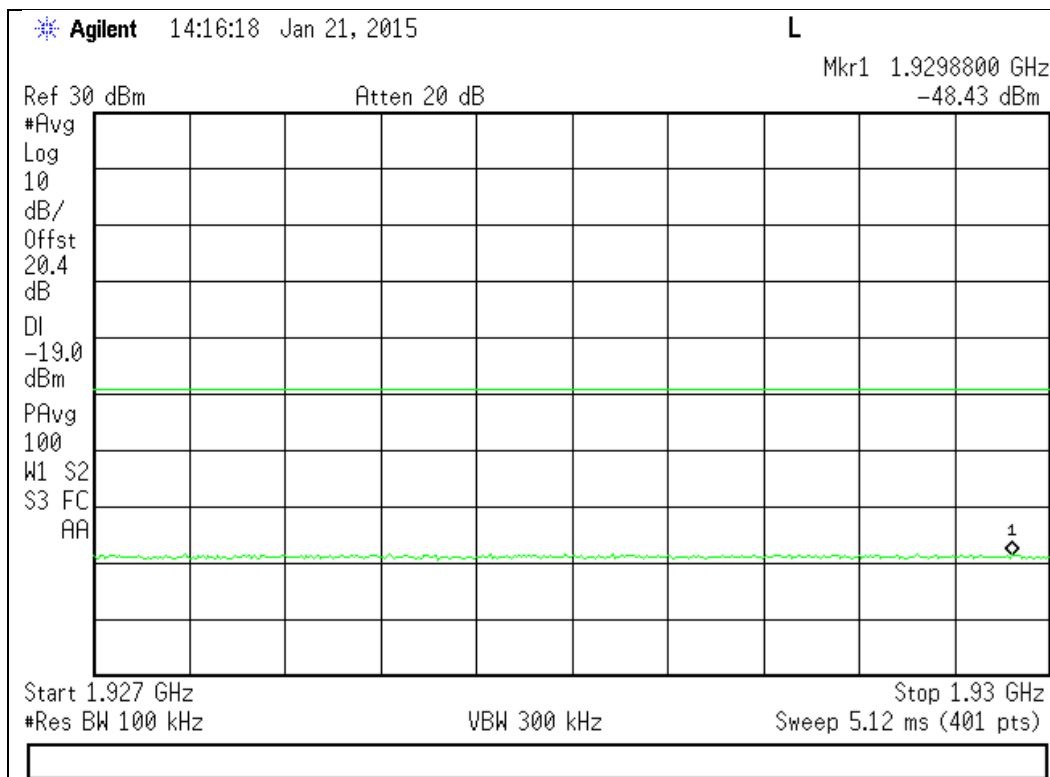


Upper Band Edge

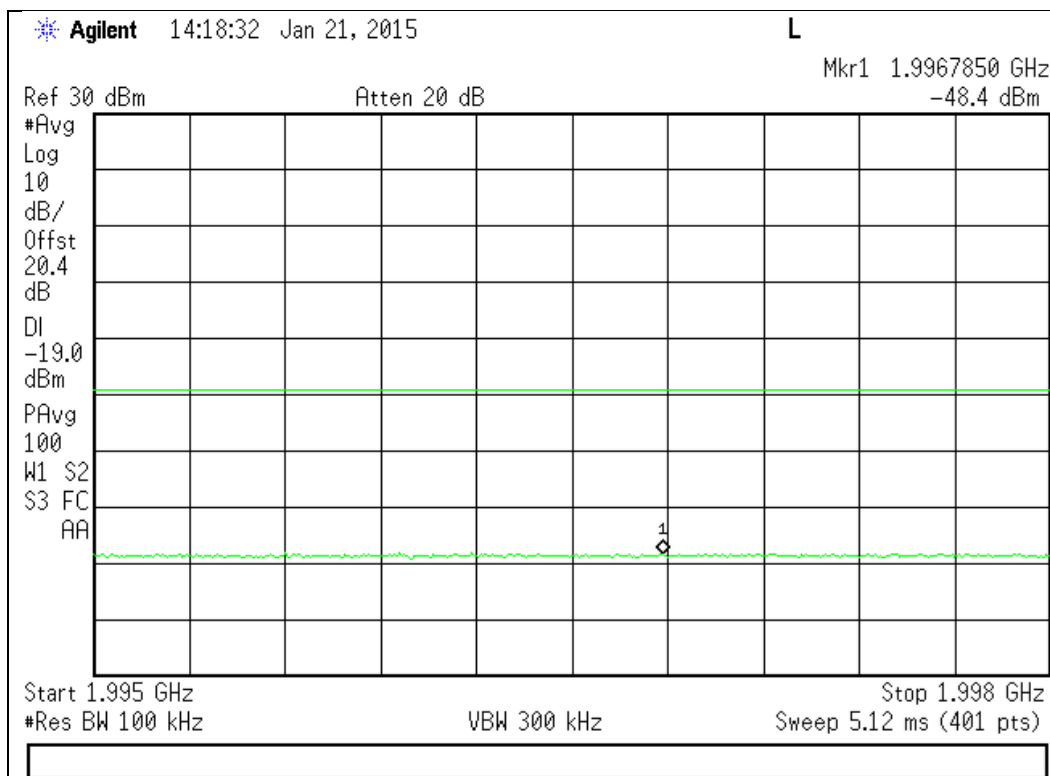




2110 - 2155 MHz Band

Lower Band Edge

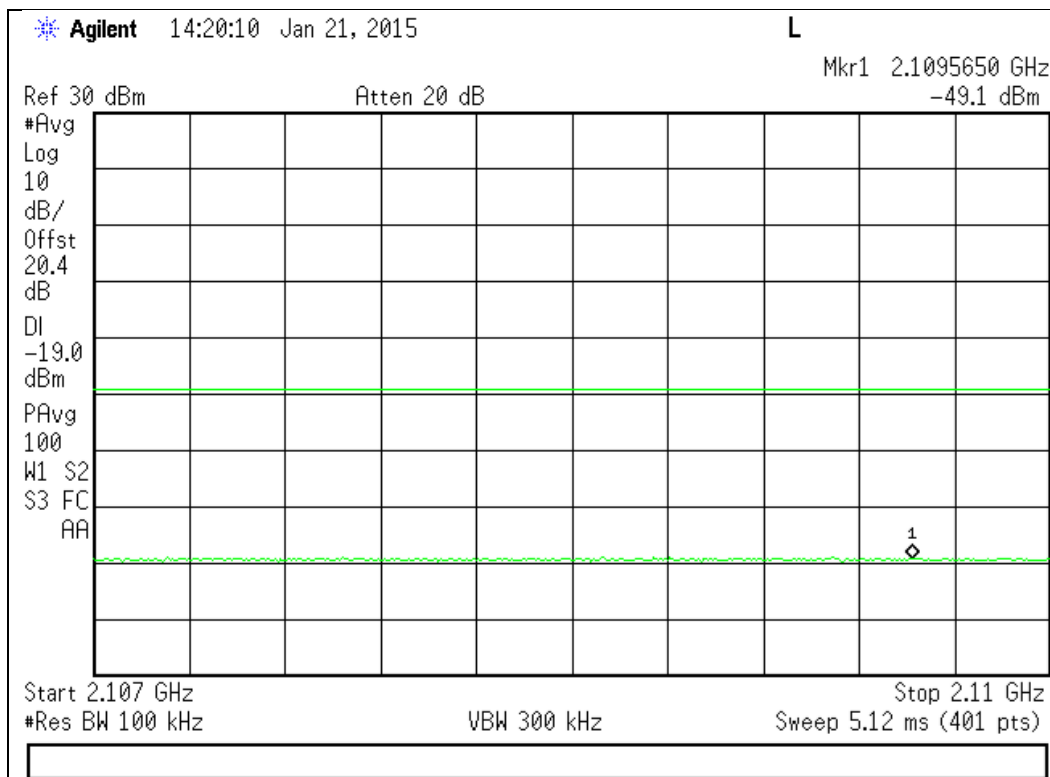

Upper Band Edge

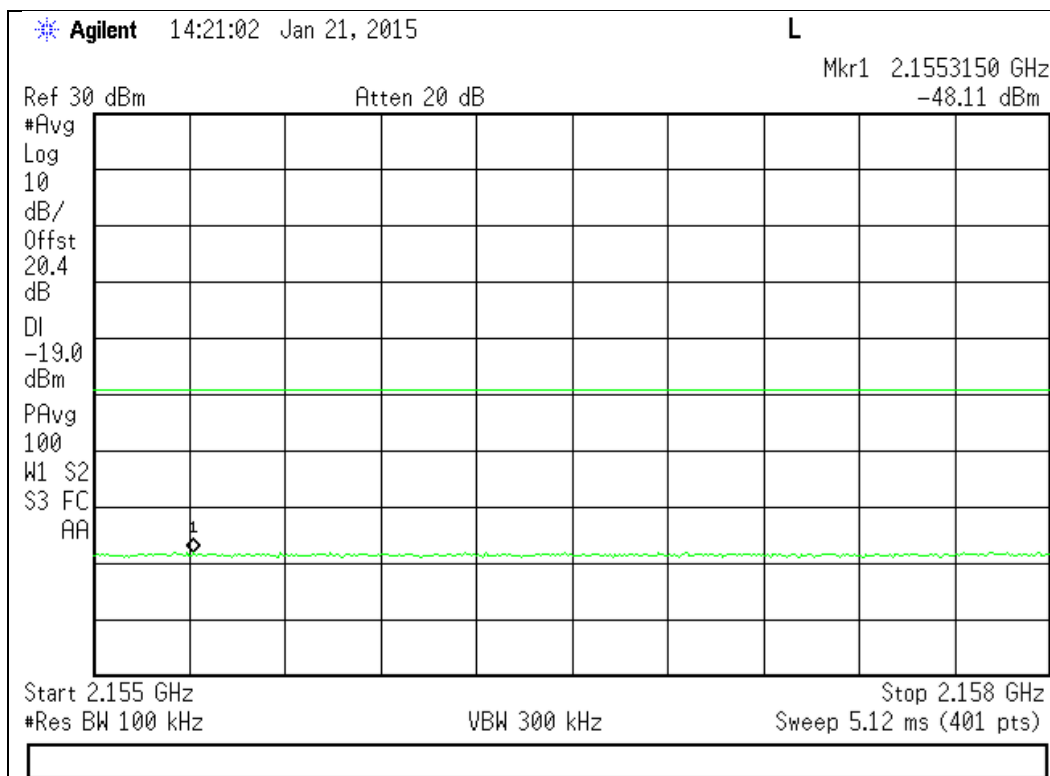

Conducted Spurious Emissions

Engineer: Mike Graffeo

Test Date: 1/27/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator, with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a 4.1 MHz AWGN signal operating at the maximum allowable power. The conducted spurious emissions from 9 kHz to 10 times the highest tunable frequency for each operational band were measured (excluding the band defined by the Out of band emissions test). The emissions were plotted and the highest level was recorded in the summary table.


The following formulas are used for calculating the limits.

Conducted Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13 \text{ dBm}$

P1 = power in dBm

P2 = power in Watts

Test Setup



For the 746 – 758 downlink and 776 – 788 Uplink bands of operation, the following additional spurious emissions requirements apply.

FCC 27.53(c)

For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

The test is performed using a 10 kHz RBW. Since the limit is referenced to a 6.25 kHz BW, the following correction factor is applied to the measured data.

BW correction Factor = $10\log B1/B2$

BW correction Factor = $10\log 6.25 / 10 = -2.0$ dB

Final Value (dBm) = conducted measurement +BW correction factor

776 – 787 MHz Uplink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
763 – 775	774.96	-49.36	-2.0	-51.40	-35	-16.40
793 – 805	793.05	-68.50	-2.0	-70.54	-35	-35.54

746 - 757 MHz Downlink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
763 – 775	765.54	-84.27	-2.0	-86.31	-35	-51.31
793 – 805	804.60	-85.55	-2.0	-87.59	-35	-52.59

FCC 27.53(f)

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Since the limit is referenced to EIRP, the final data is computed using the Conducted Spurious Emission data and adding the BW correction factor plus the final gain/loss data from the antenna kitting information supplied by the manufacturer.

For the Narrowband measurement, the test is performed using a 10 kHz RBW. Since the limit is referenced to a 700 Hz BW, the following correction factor is applied to the measured data.

$$\text{BW correction Factor} = 10\log B1/B2$$

$$\text{BW correction Factor} = 10\log 700 / 10000 = -11.55 \text{ dB}$$

Final Value (dBm) = conducted measurement +BW correction factor + final gain/loss from Antenna Kitting document

The Limit for discreet (narrowband) emissions is -80dBW (-50 dBm) in 700 MHz BW.

The Limit for (wideband Emissions) is -70 dBW (-40 dBm) in a 1 MHz BW.

776 – 787 MHz Uplink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Gain/Loss from Antenna Kitting Information (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
1559 – 1610 (Wideband)	1563.9	-48.95	0	2.00	-46.95	-40	-6.95
1559 – 1610 (Narrowband)	1563.3	-71.14	-11.55	2.00	-80.69	-50	-30.69



746 - 757 MHz Downlink Band

Spurious Frequency Range (MHz)	Measured Frequency (MHz)	Measured Value (dBm)	Bandwidth Correction Factor (dB)	Gain/Loss from Antenna Kitting information (dB)	Final Value (dBm)	Limit (dBm)	Margin (dB)
1559 – 1610 (Wideband)	1566.5	-59.05	0	2.00	-57.05	-40	-17.05
1559 – 1610 (Narrowband)	1592.1	-80.22	-11.55	2.00	-89.77	-50	-39.77





Uplink Test Plots

698 - 716 MHz Band

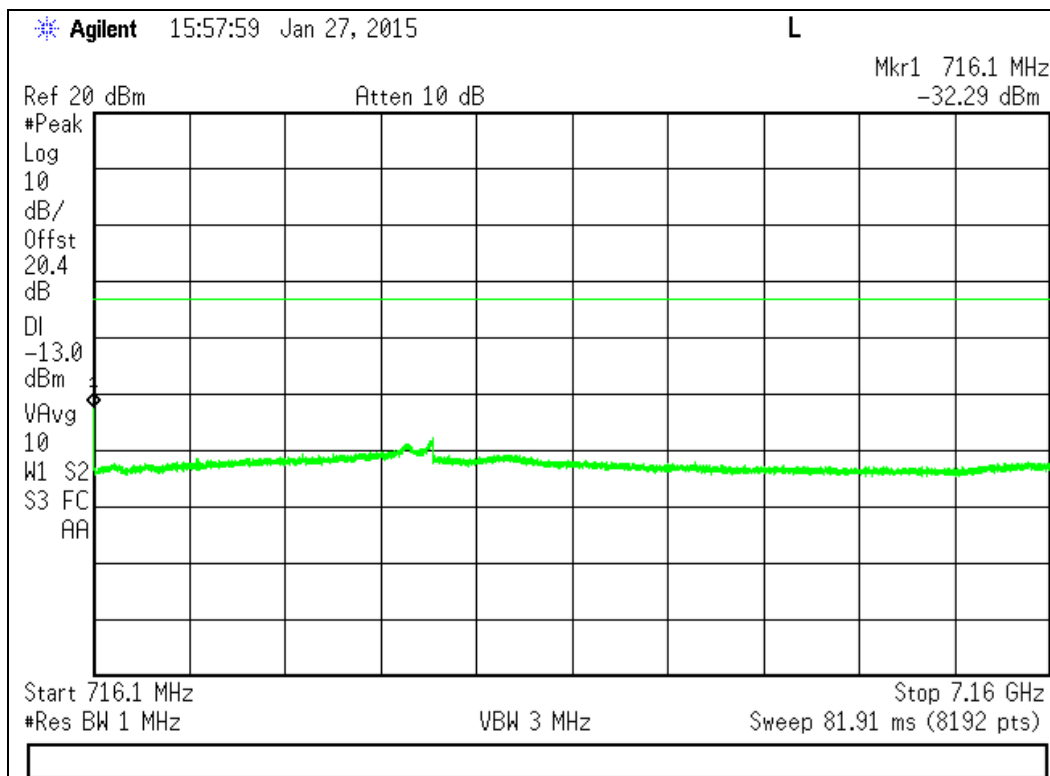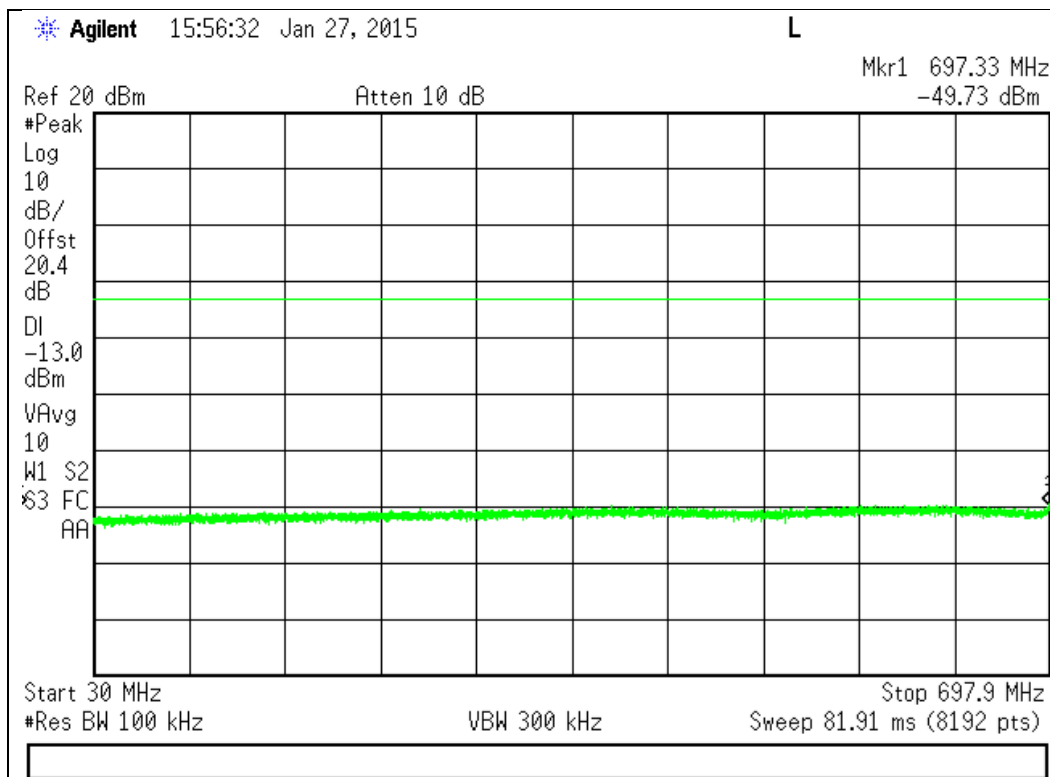





776 - 787 MHz Band

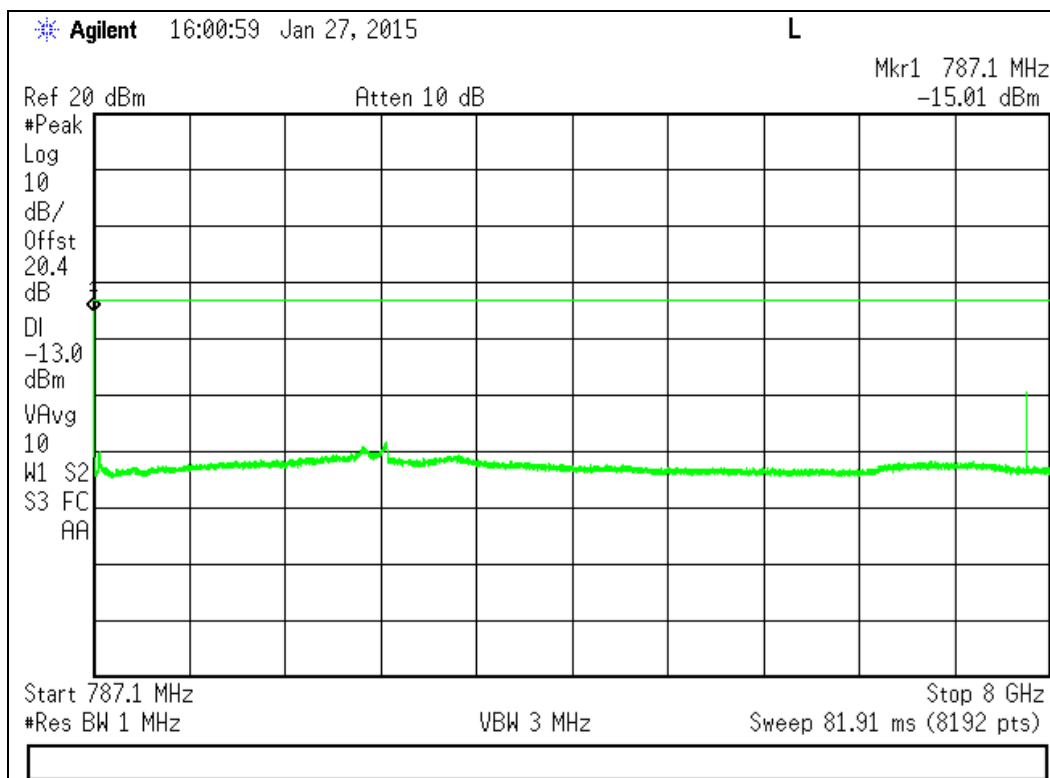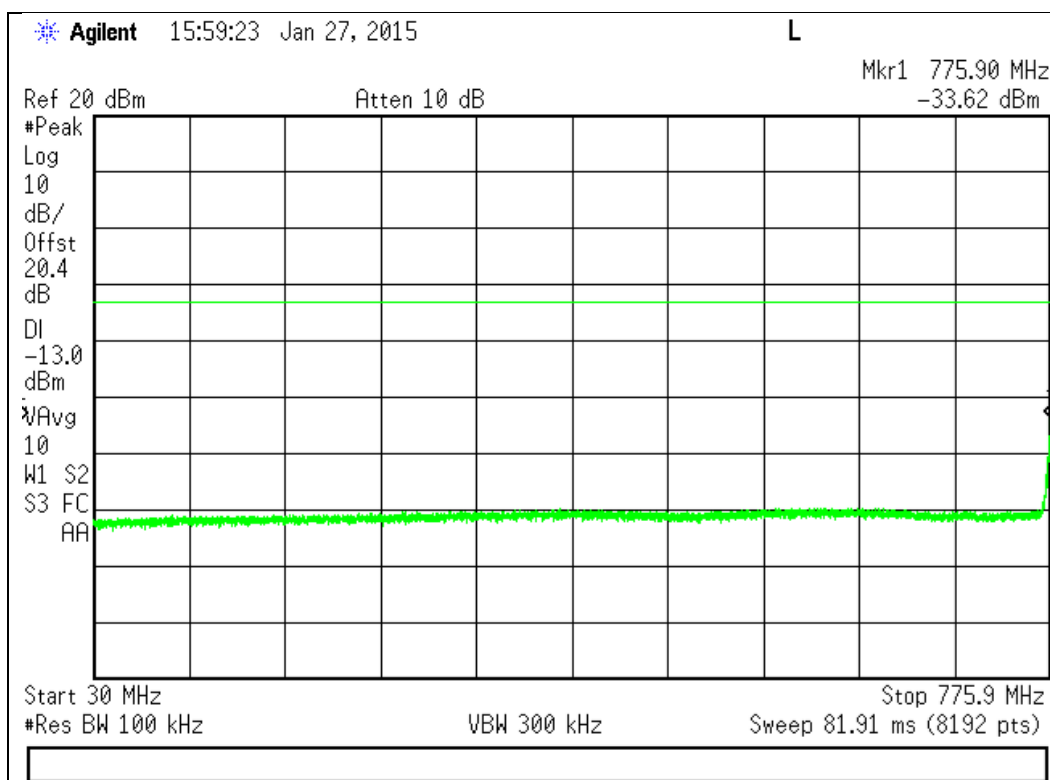





824 - 849 MHz Band

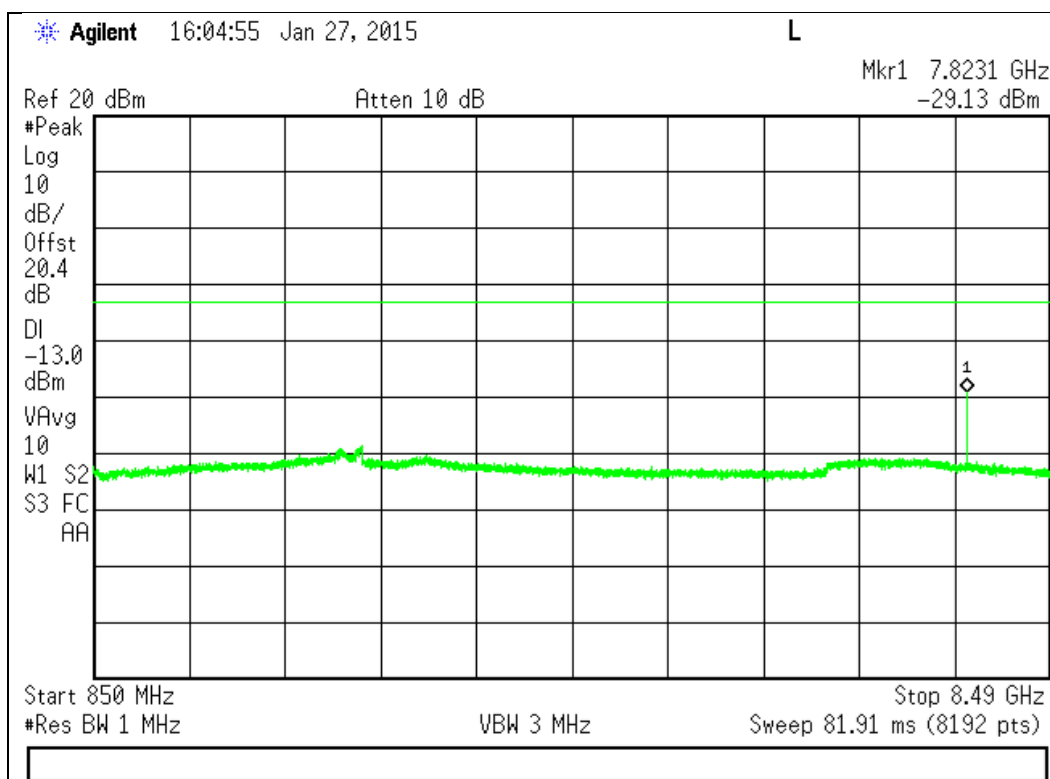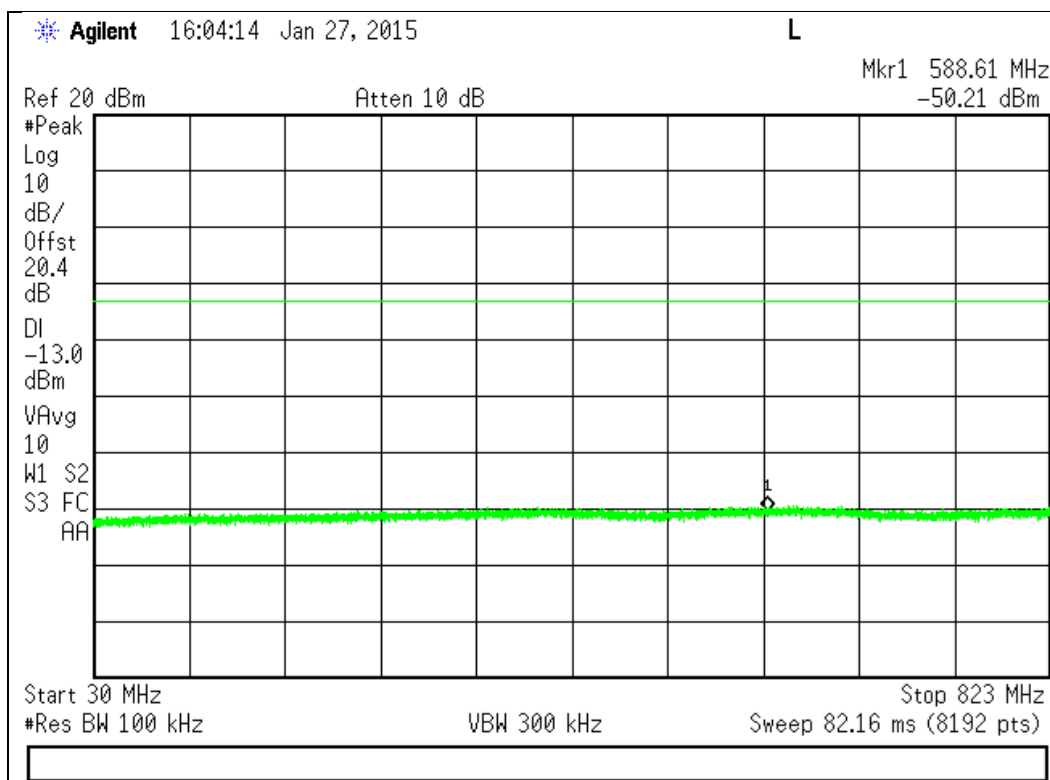





1710 - 1755 MHz Band

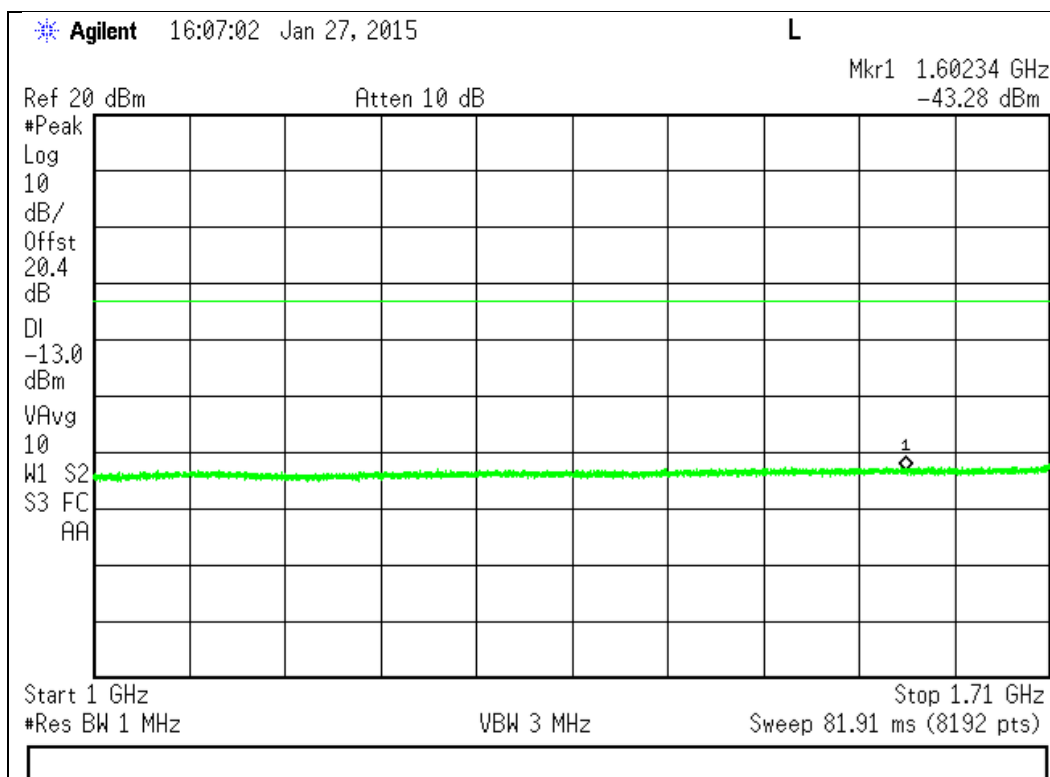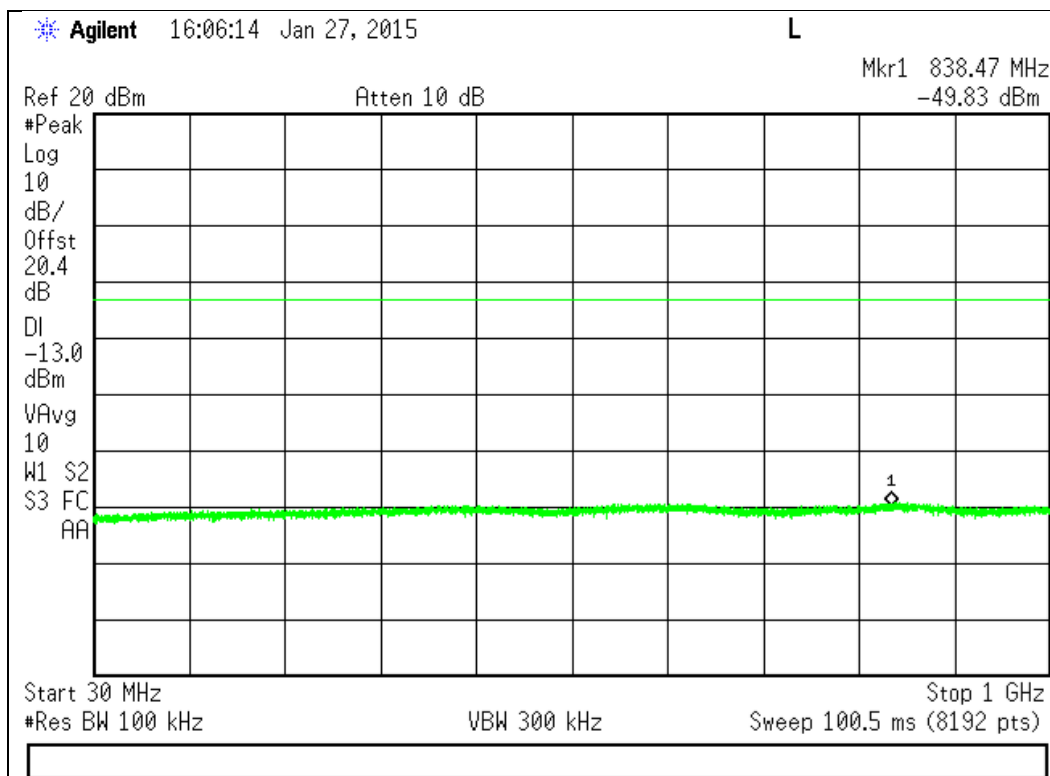




1710 - 1755 MHz Band (cont)

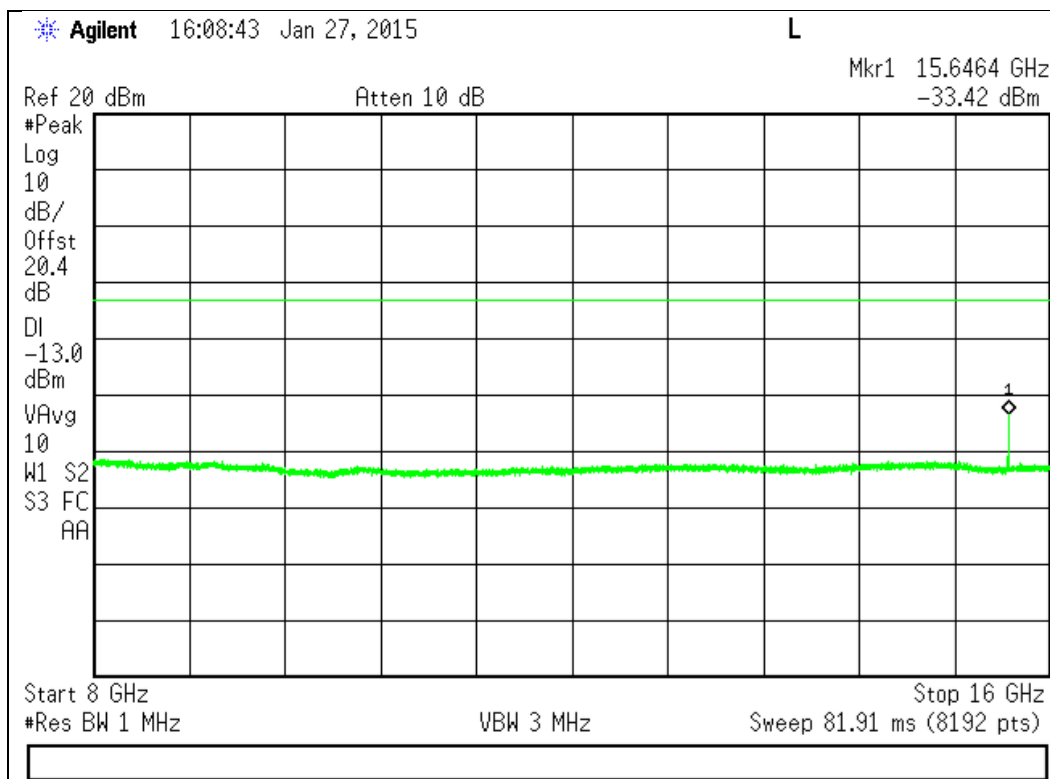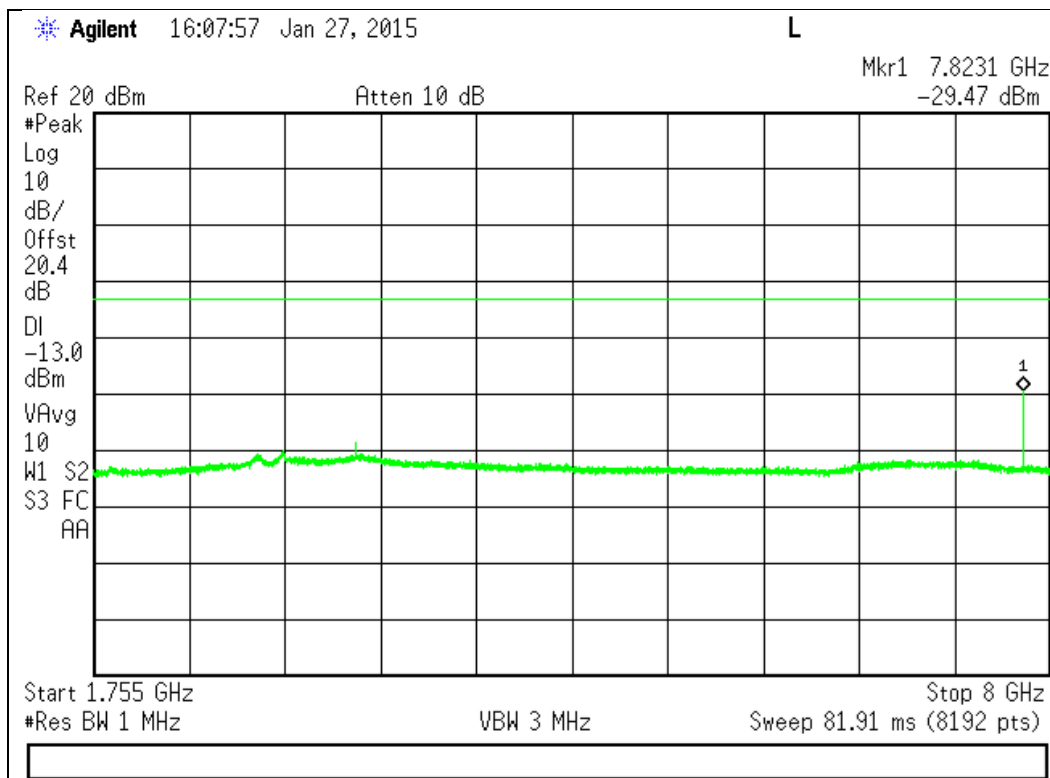




1710 - 1755 MHz Band (cont)


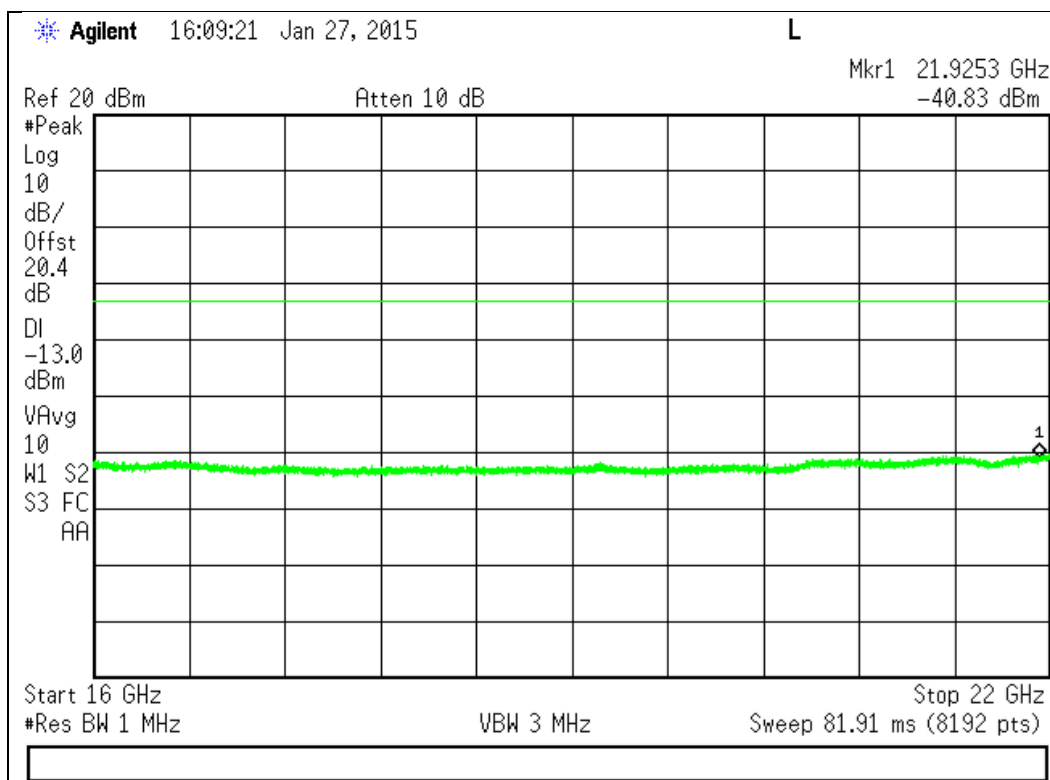


1850 - 1915 MHz Band

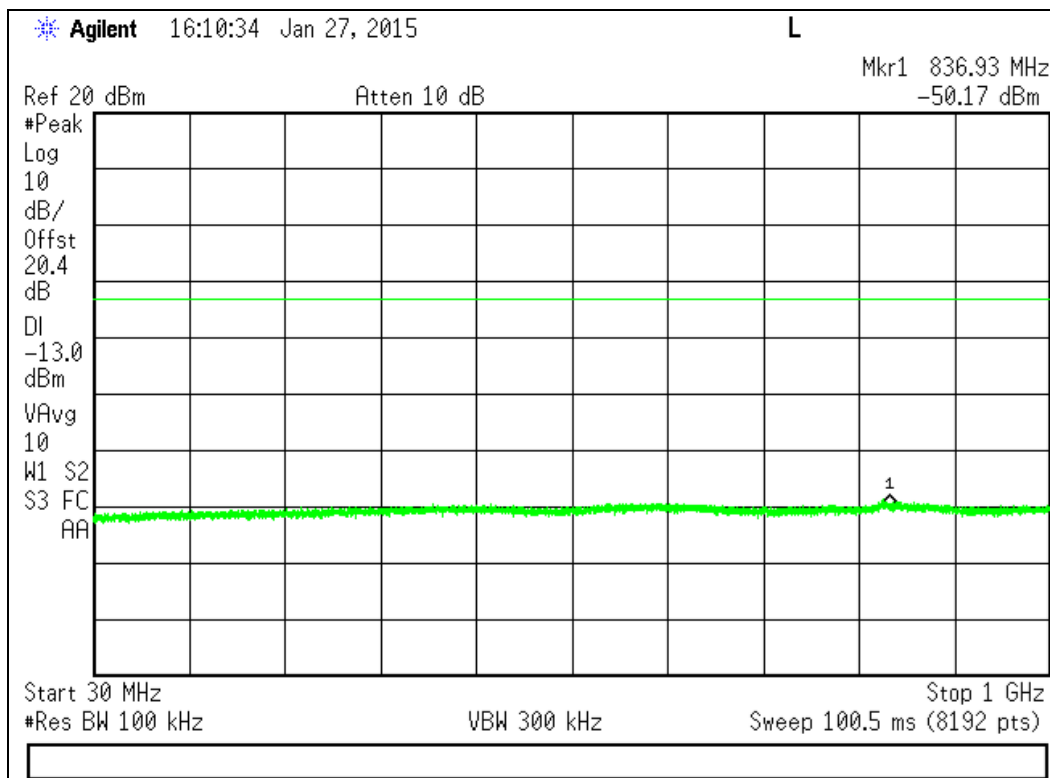





1850 - 1915 MHz Band (cont)

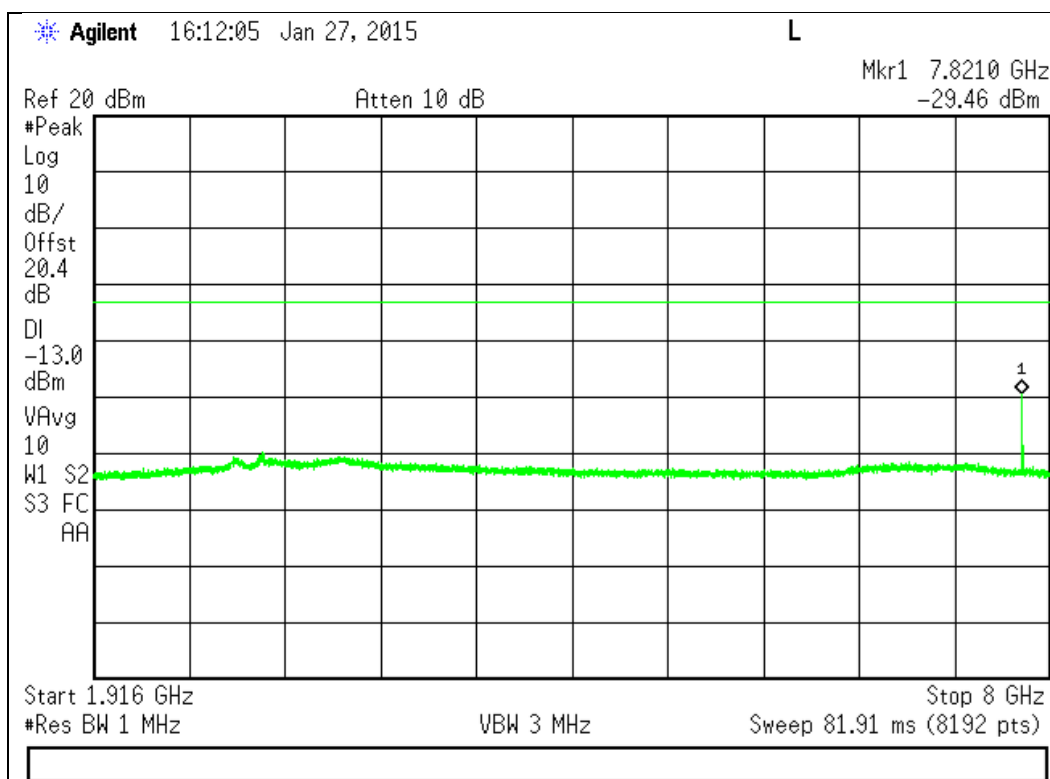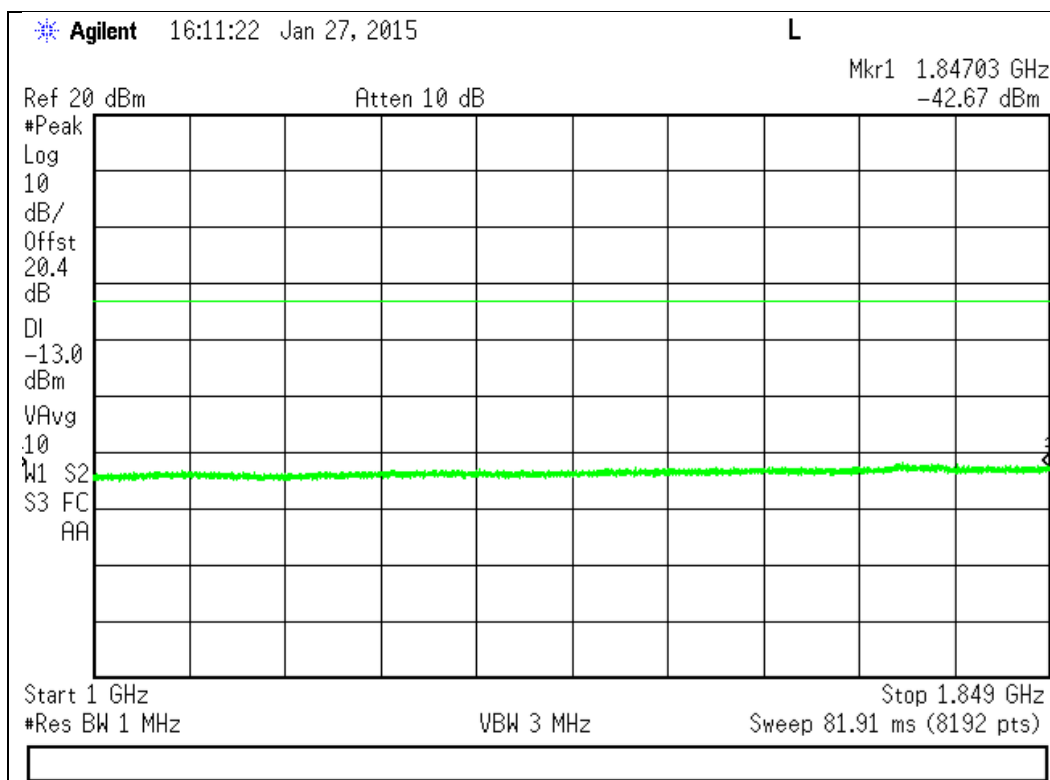





1850 - 1915 MHz Band (cont)

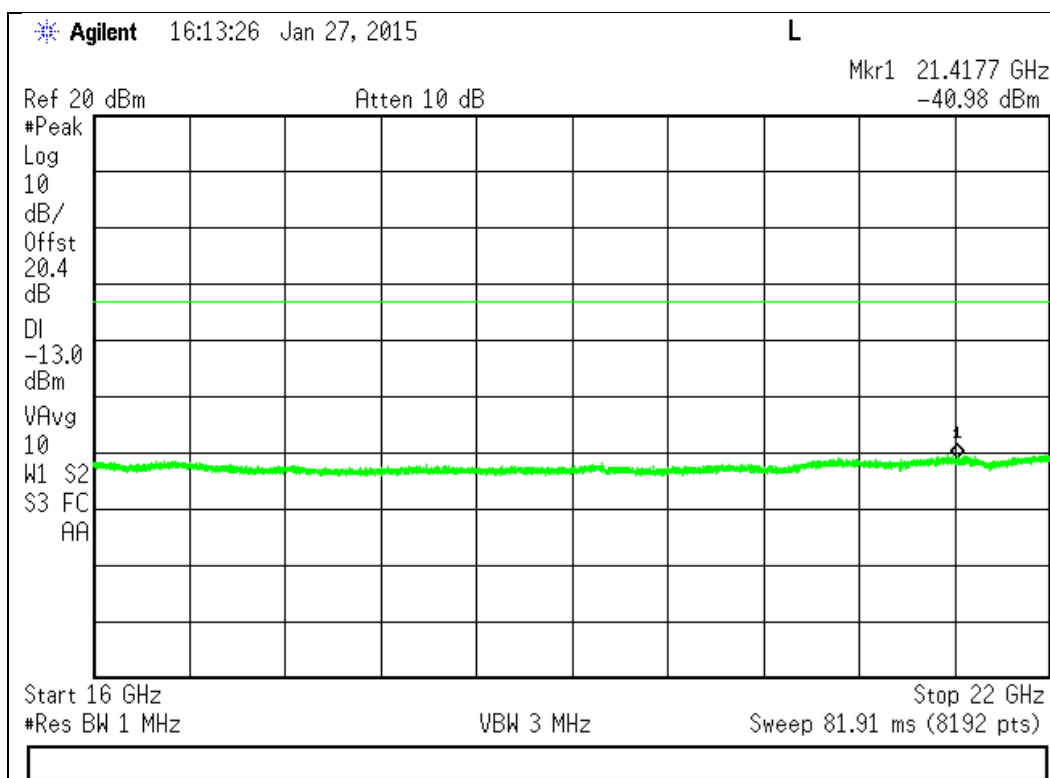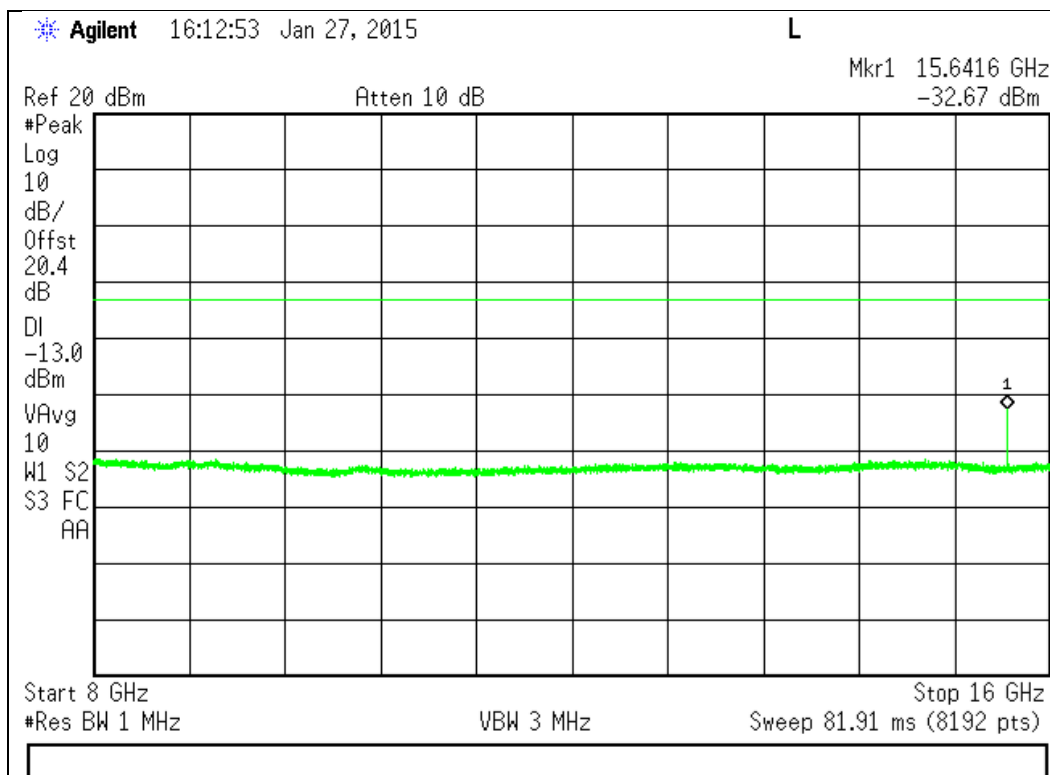





Downlink Test Plots

728 - 746 MHz Band

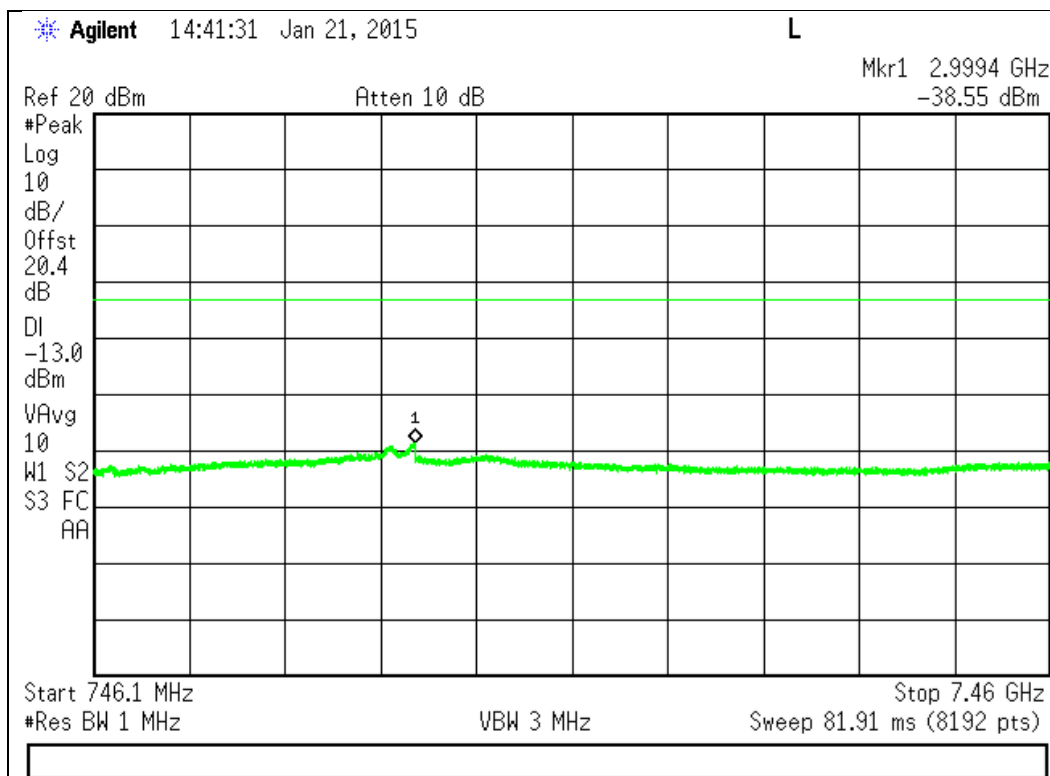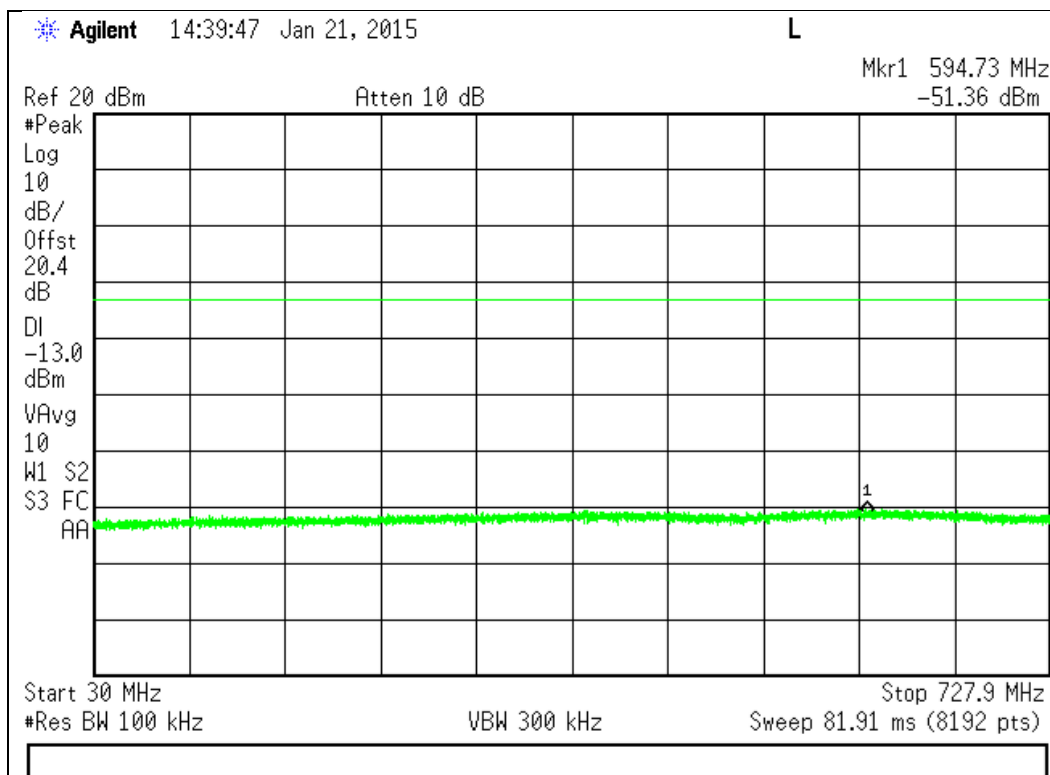





746 - 757 MHz Band

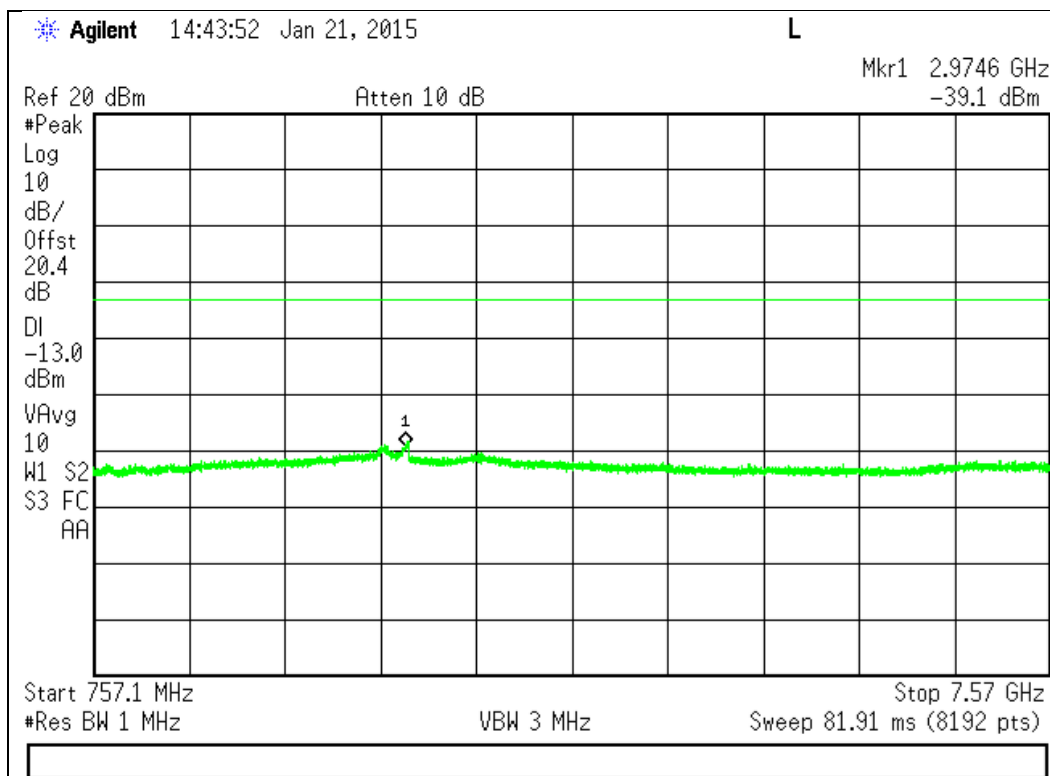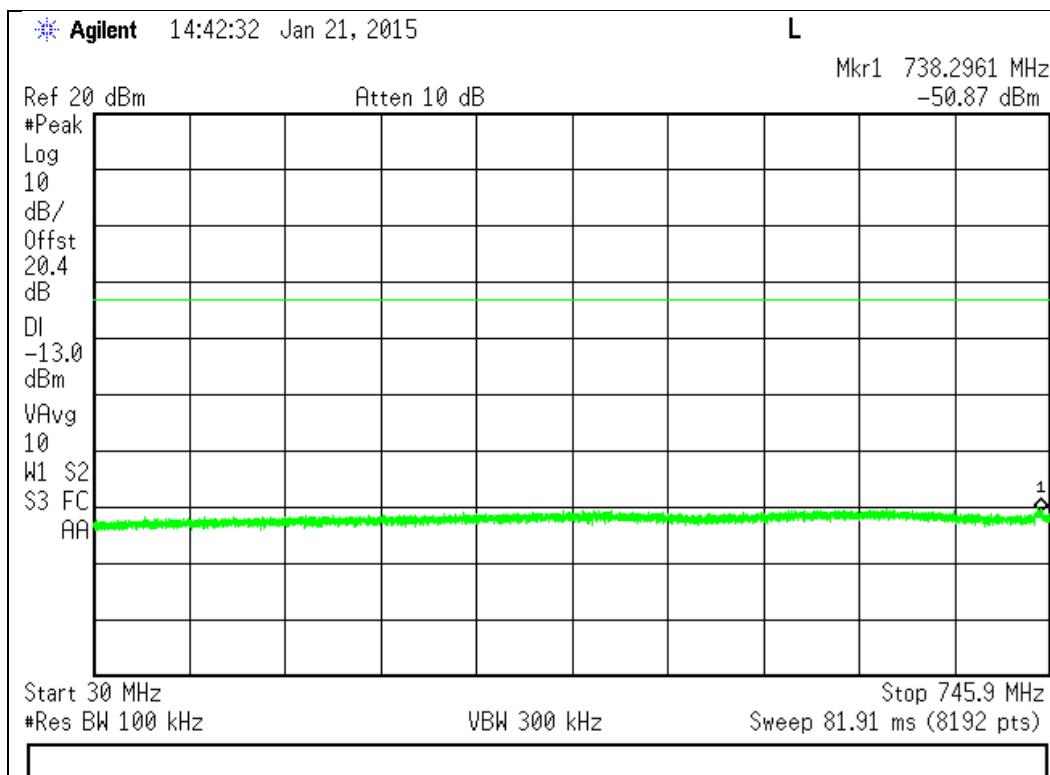





869 - 894 MHz Band

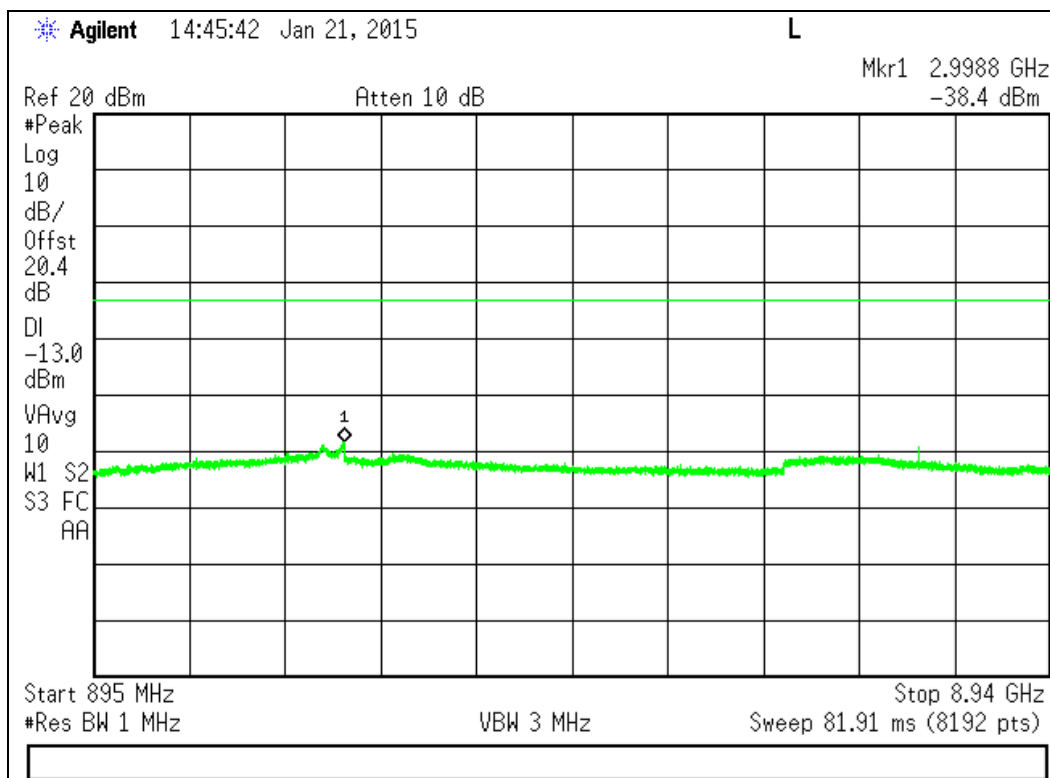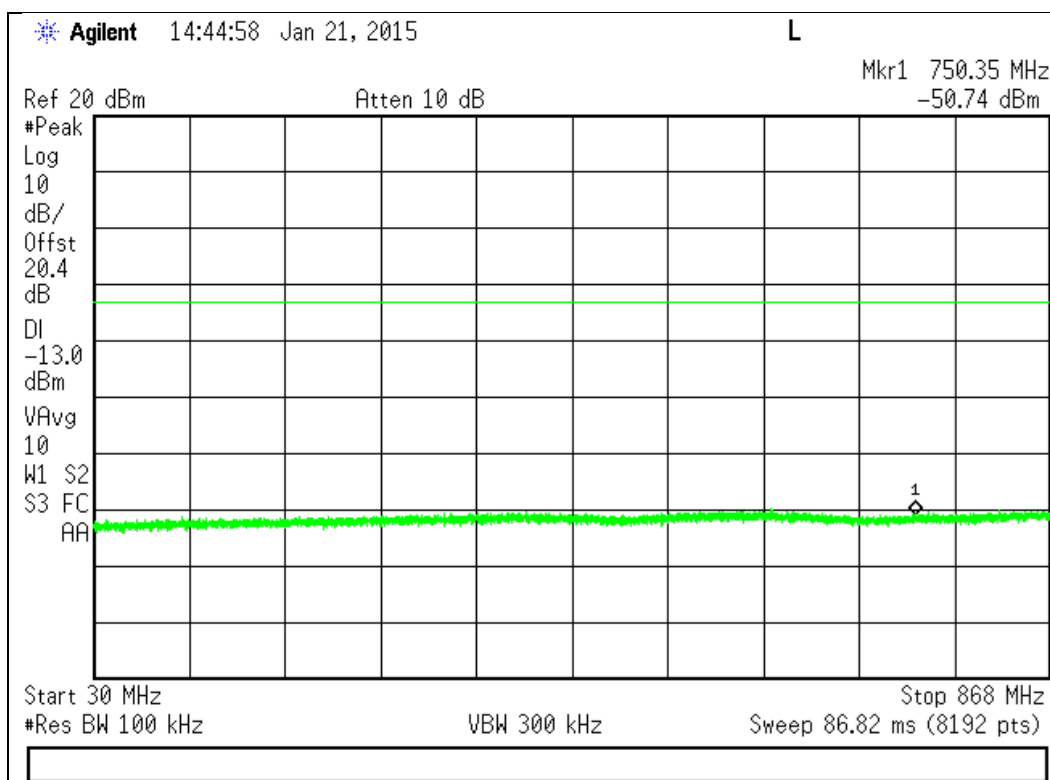





1930 - 1995 MHz Band

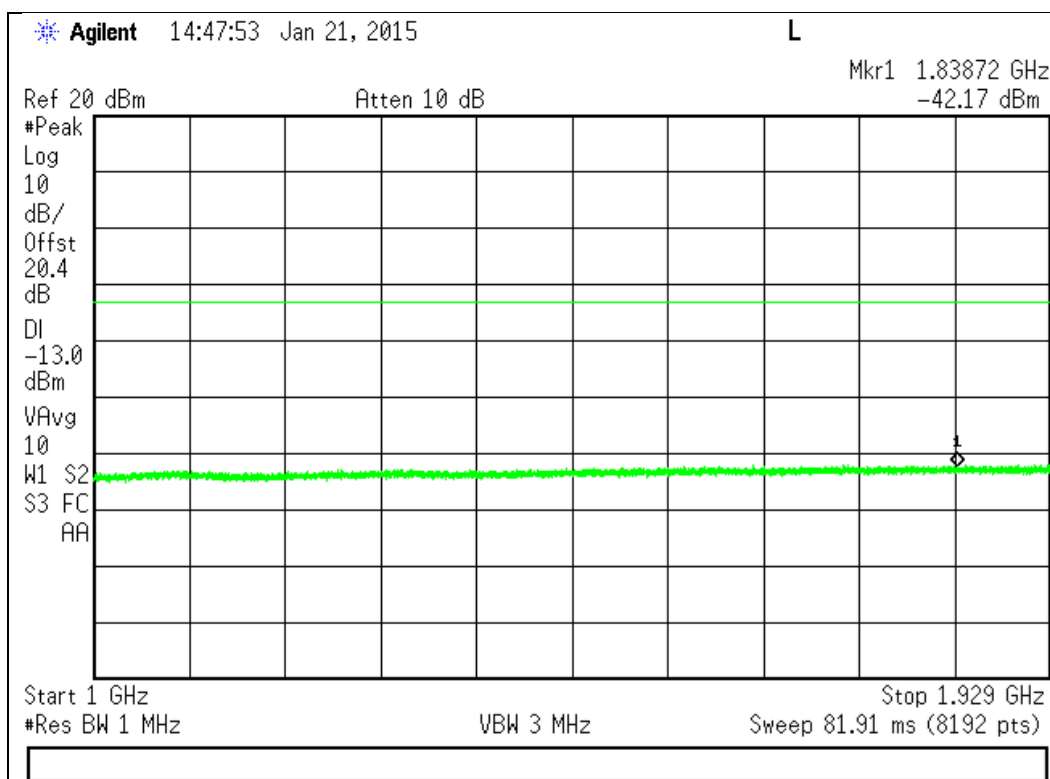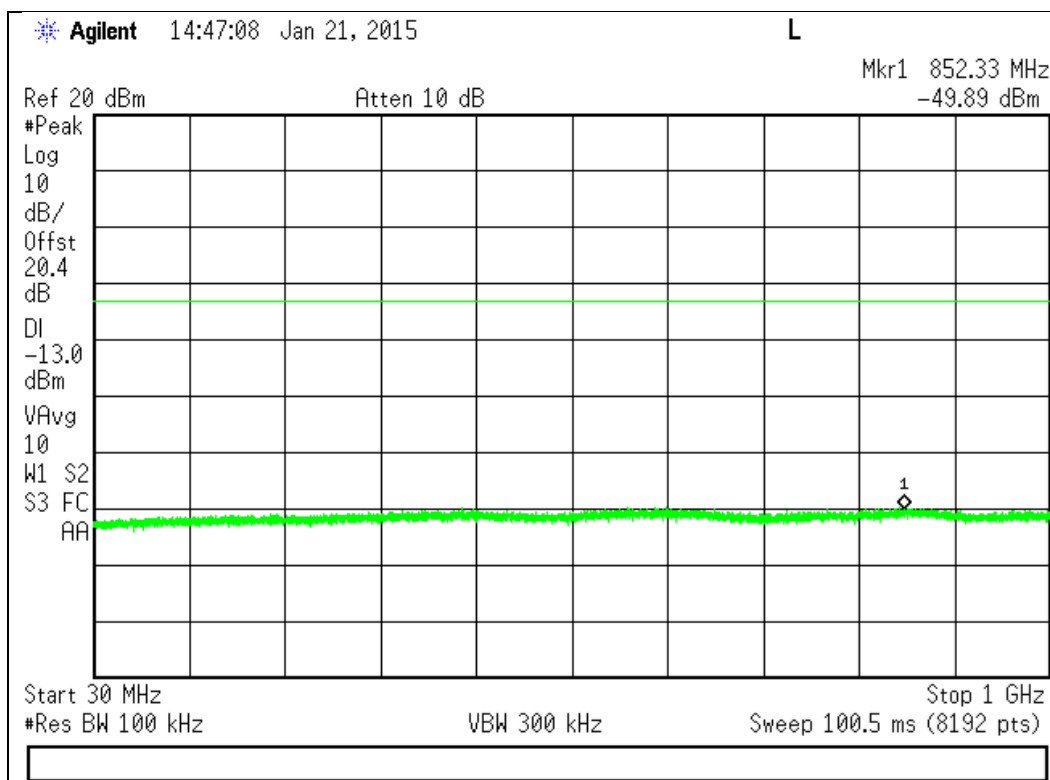




1930 - 1995 MHz Band (cont)

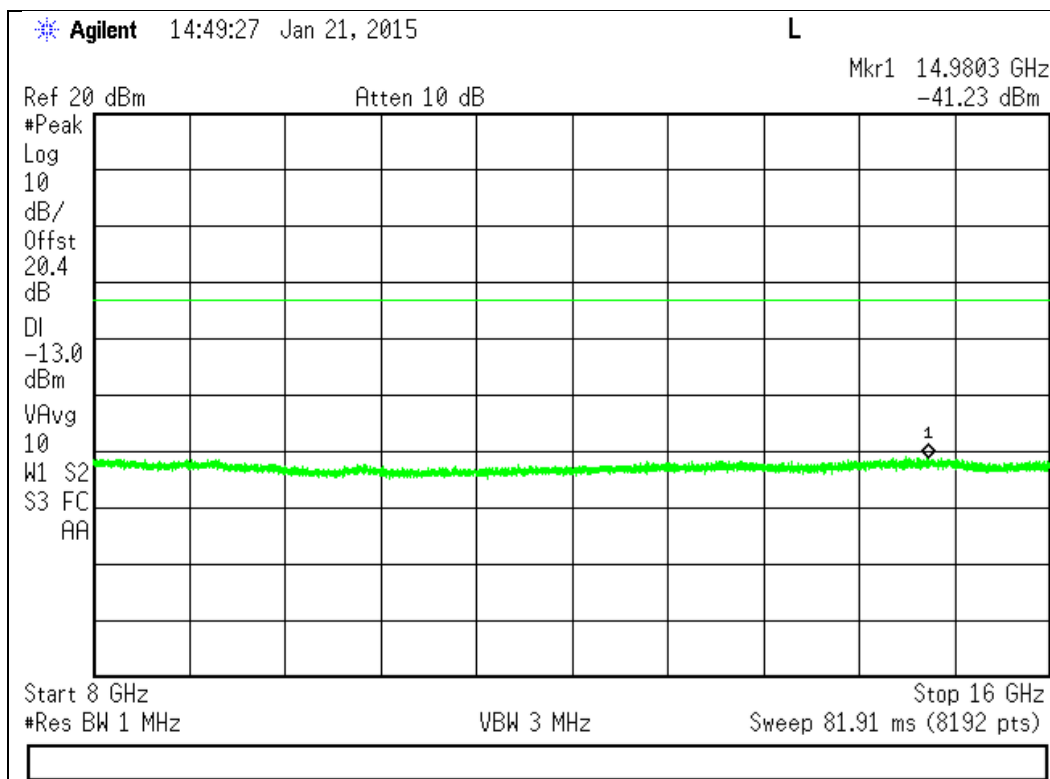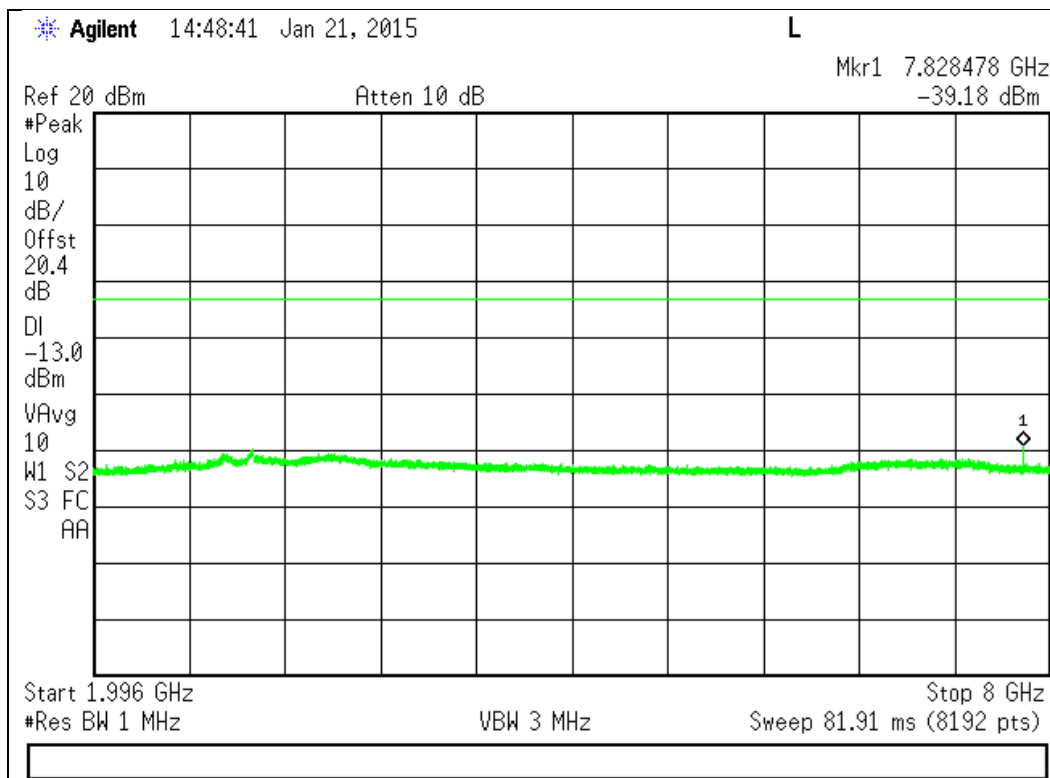




1930 - 1995 MHz Band (cont)


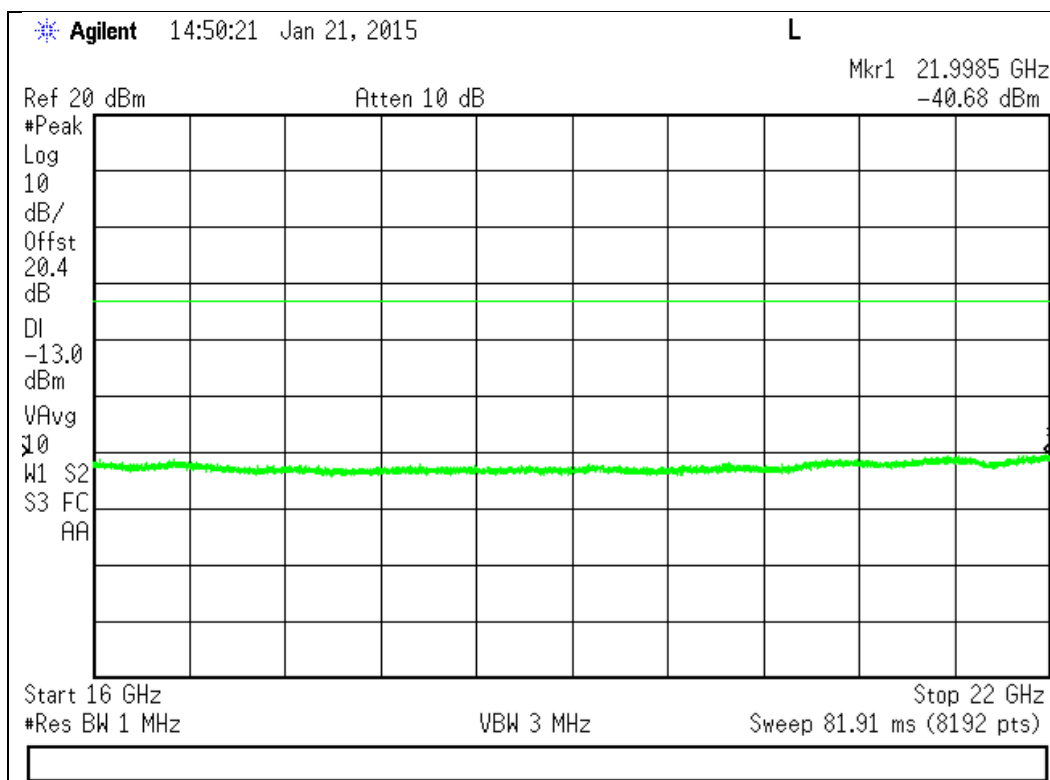


2110 - 2155 MHz Band

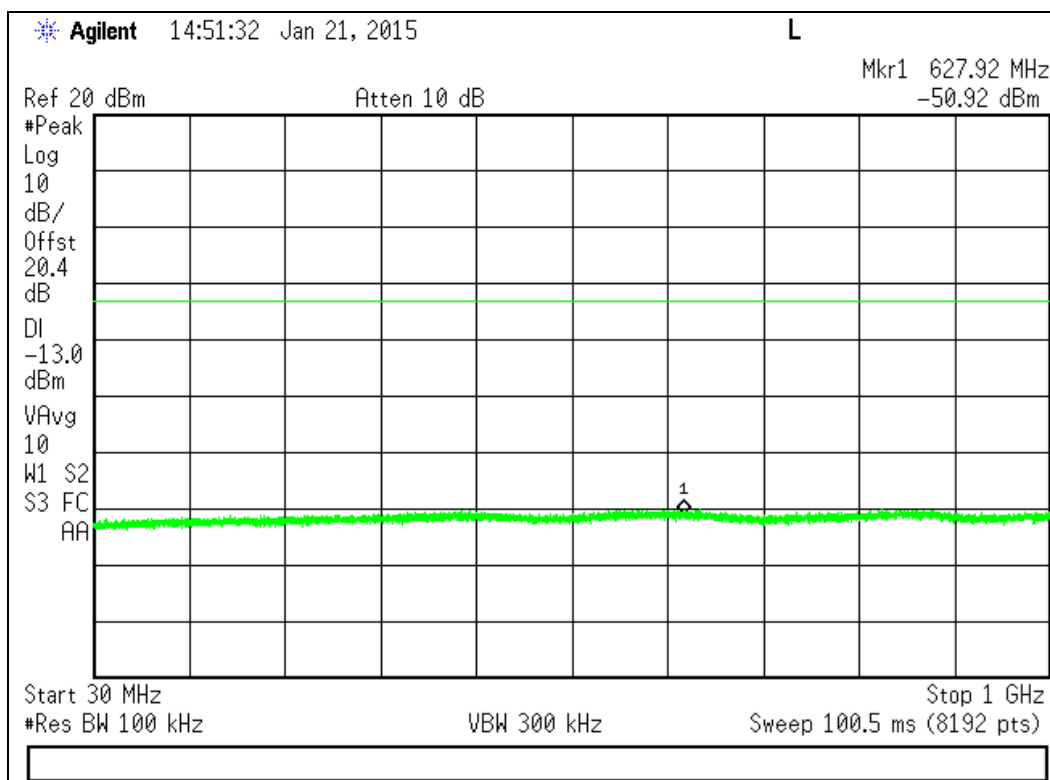





2110 - 2155 MHz Band (cont)

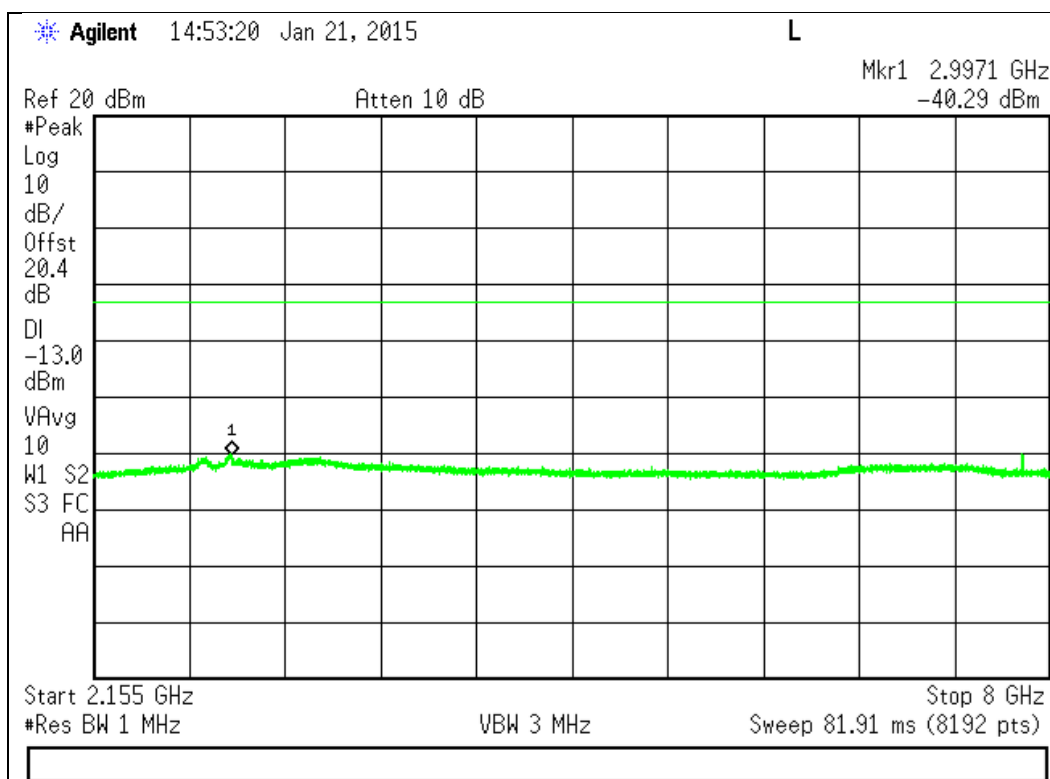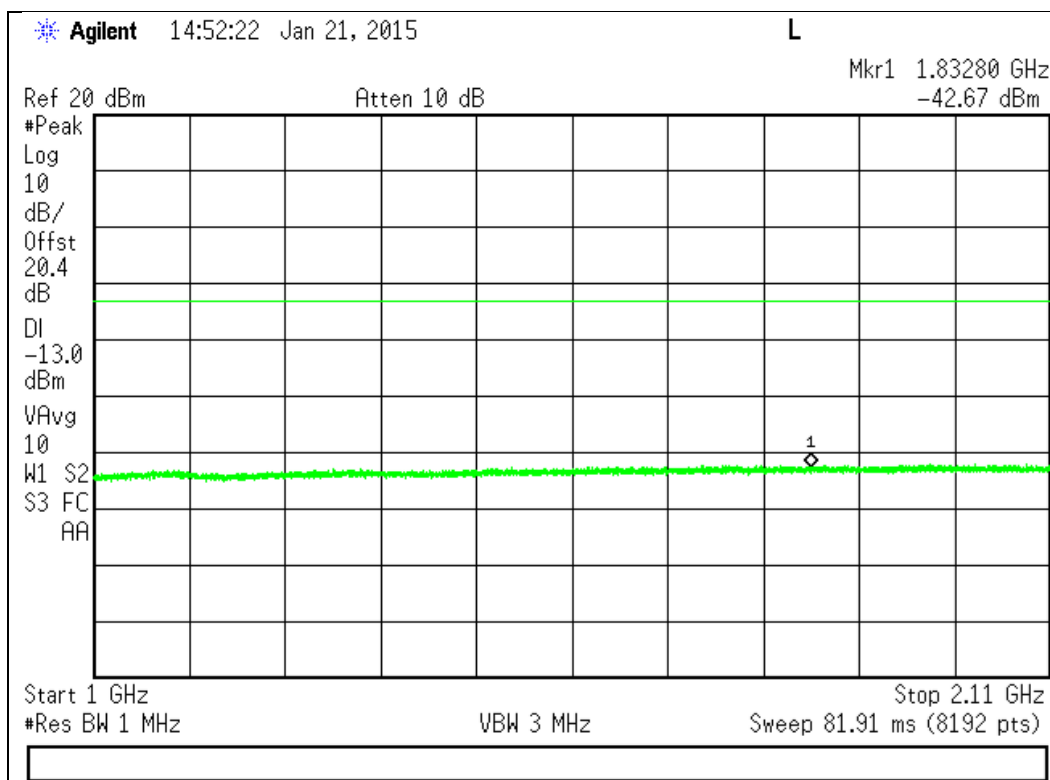




2110 - 2155 MHz Band (cont)

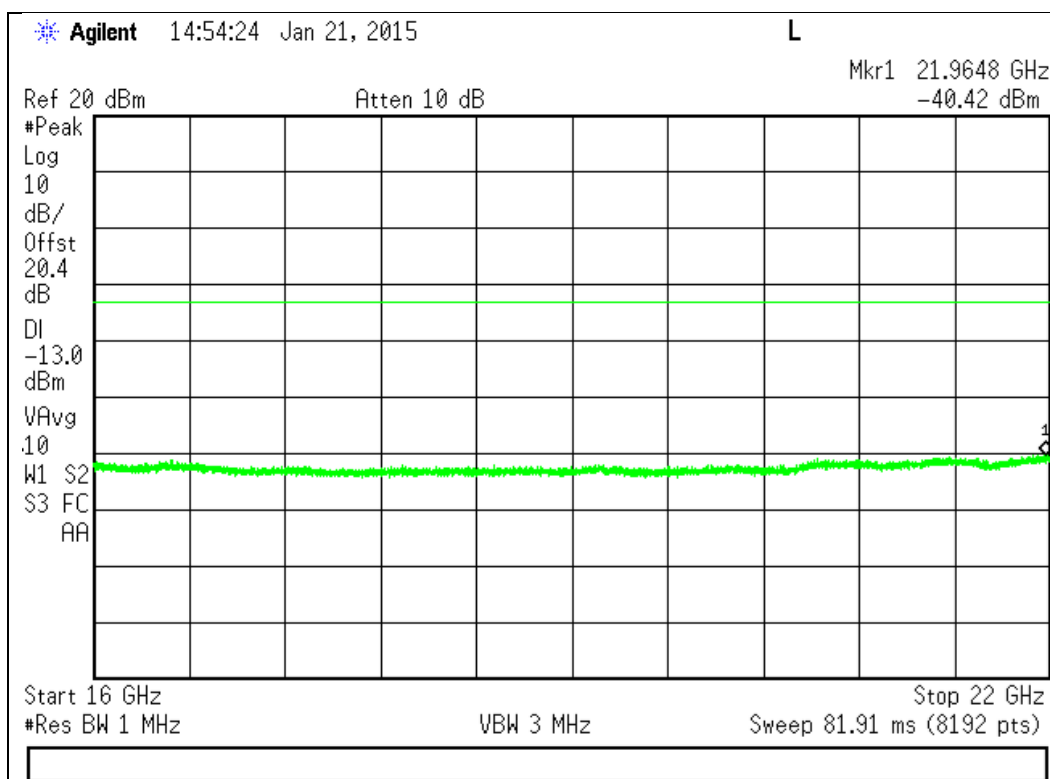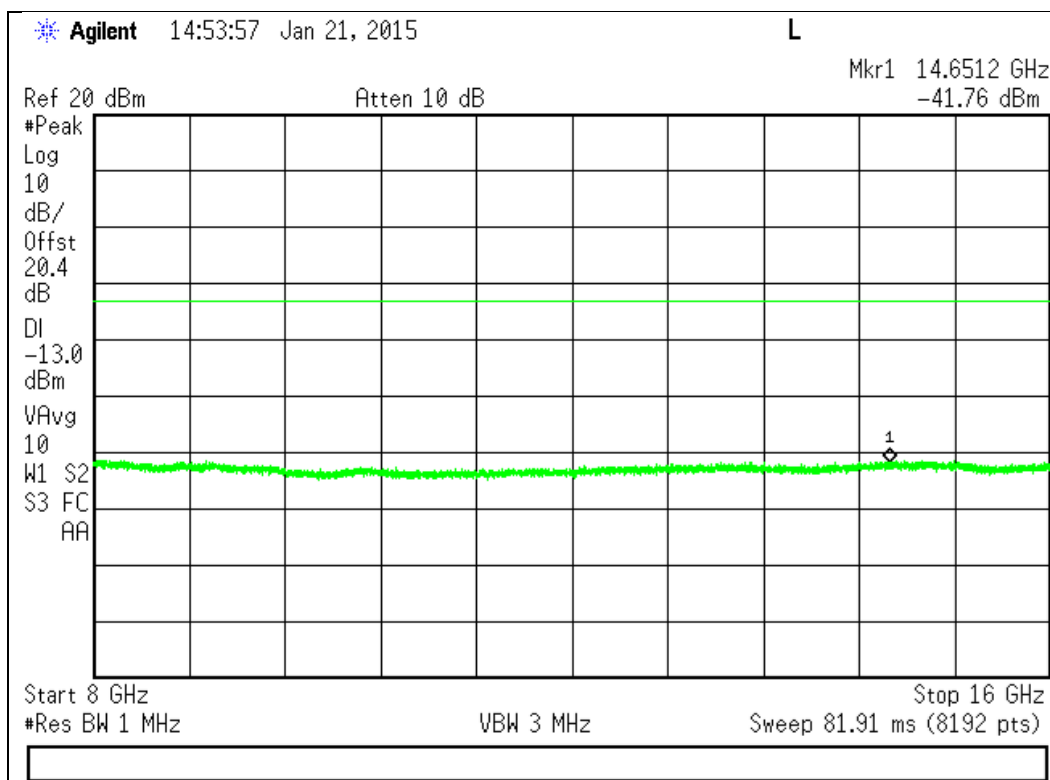




776 – 787 MHz Uplink Test Plots for the

763 - 775 MHz Frequency Range

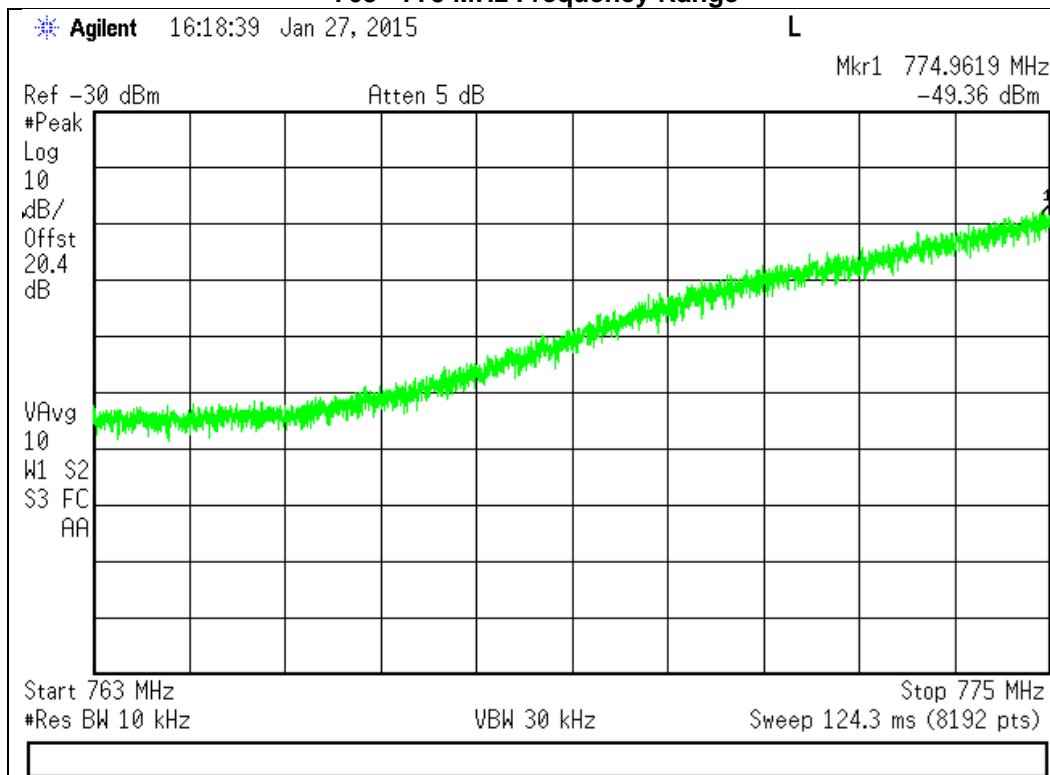


793 - 805 MHz Frequency Range

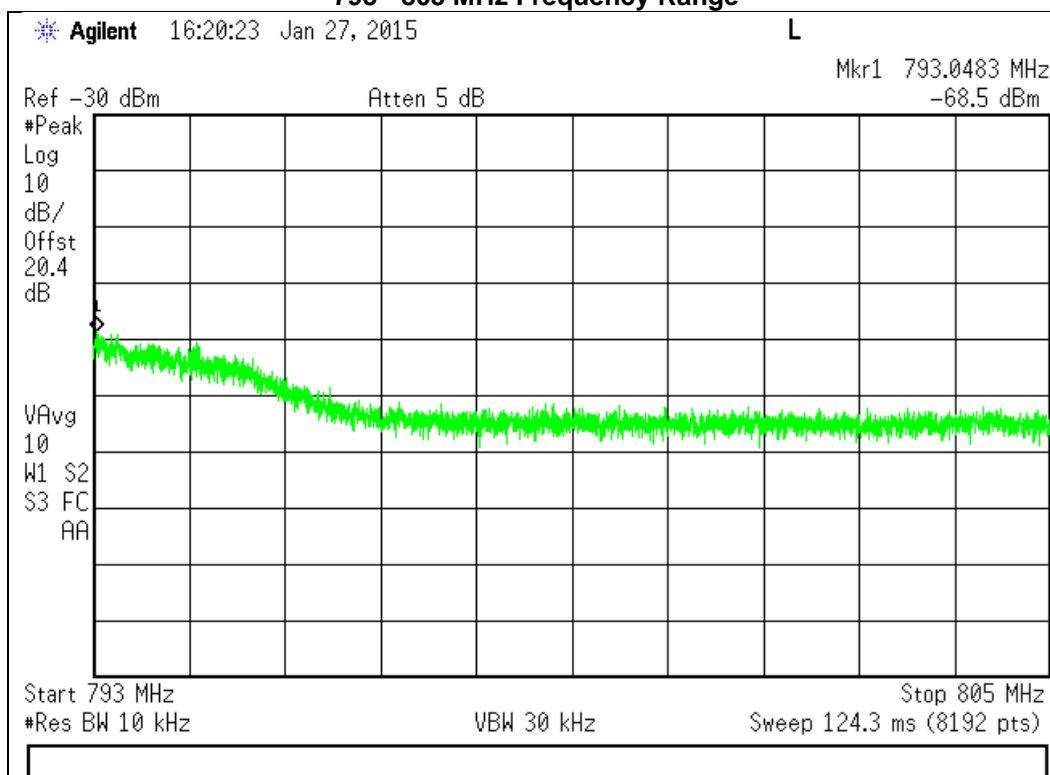




776 – 787 MHz Uplink Test Plots for the

1559 - 1610 MHz Frequency Range (Wideband)

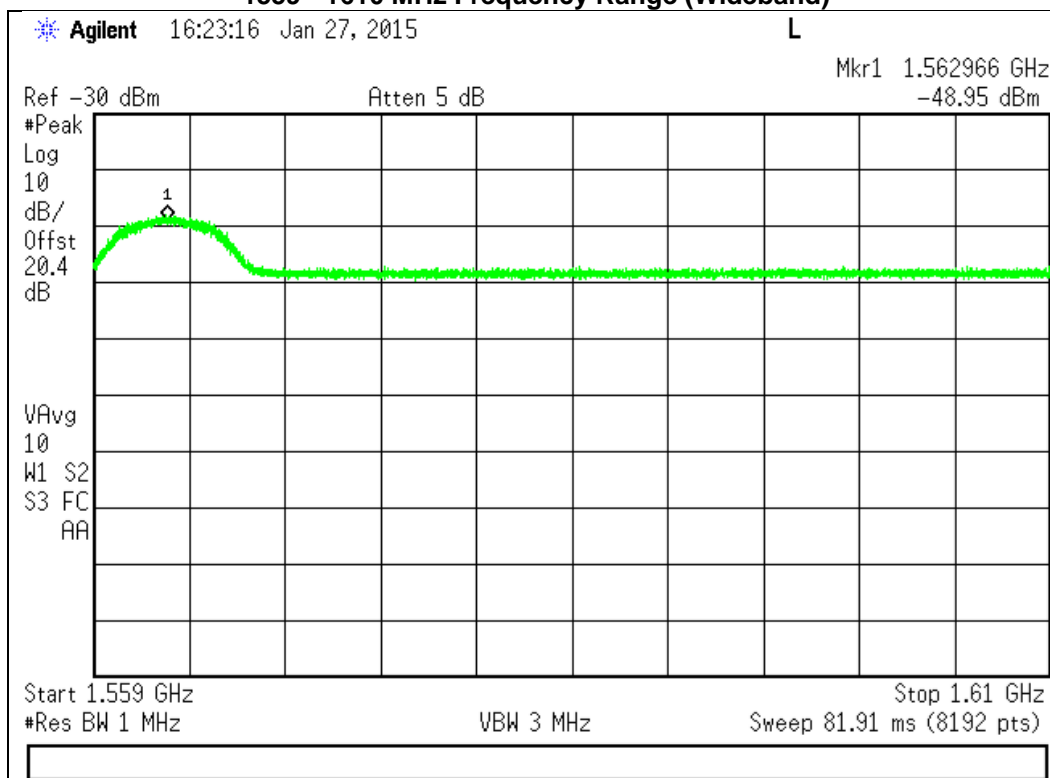


1559 - 1610 MHz Frequency Range (Narrowband)

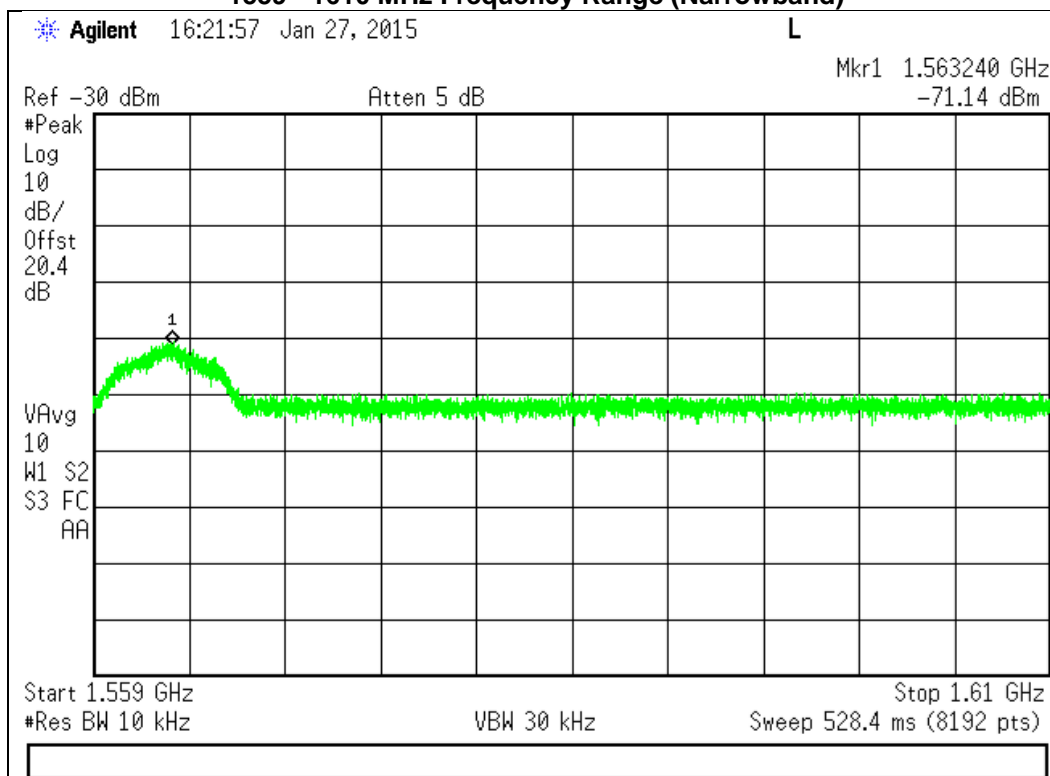




746 – 757 MHz Downlink Test Plots for the

763 - 775 MHz Frequency Range

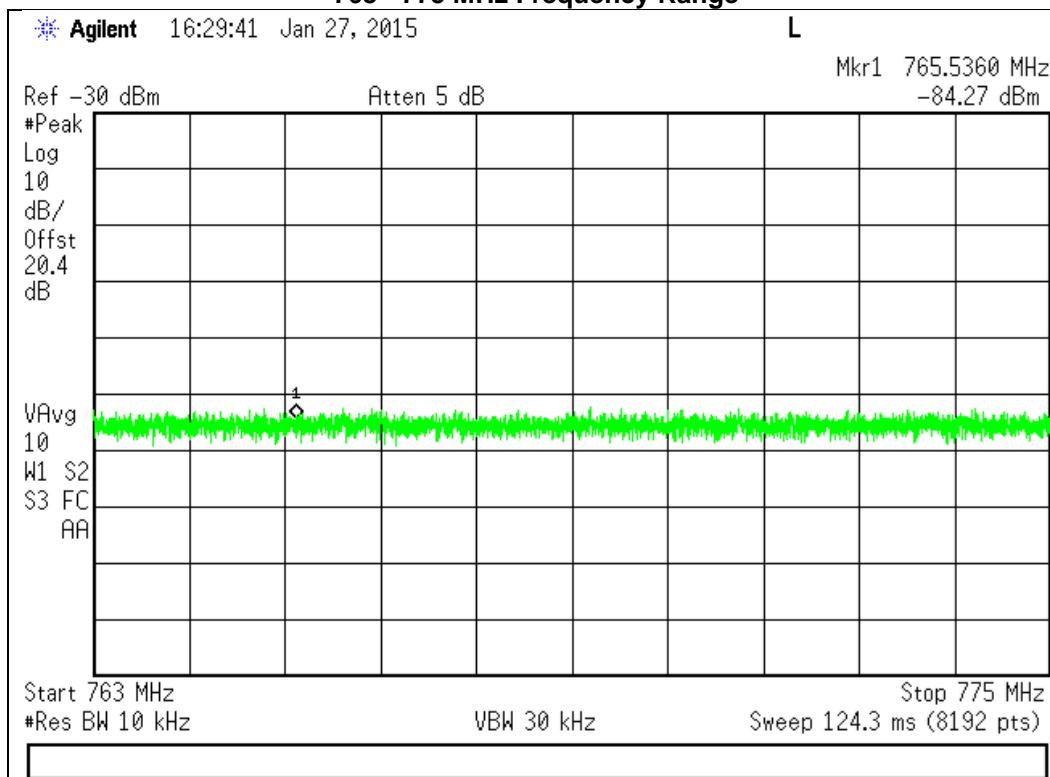


793 - 805 MHz Frequency Range

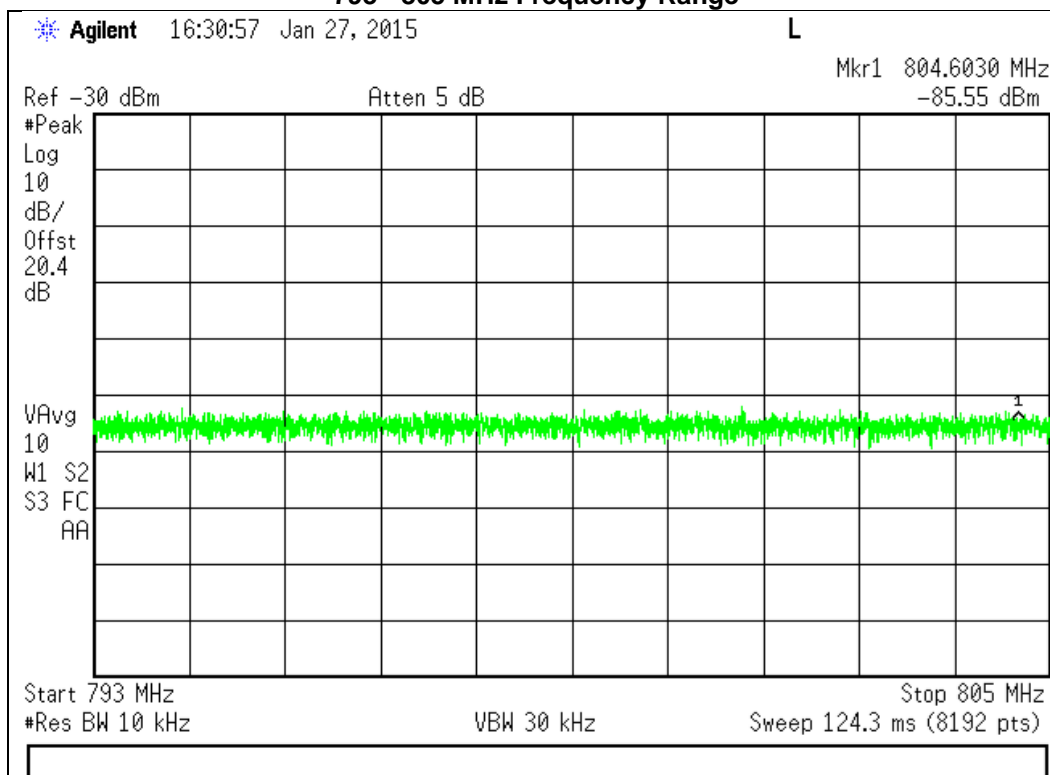




746 – 757 MHz Downlink Test Plots for the

1559 - 1610 MHz Frequency Range (Wideband)

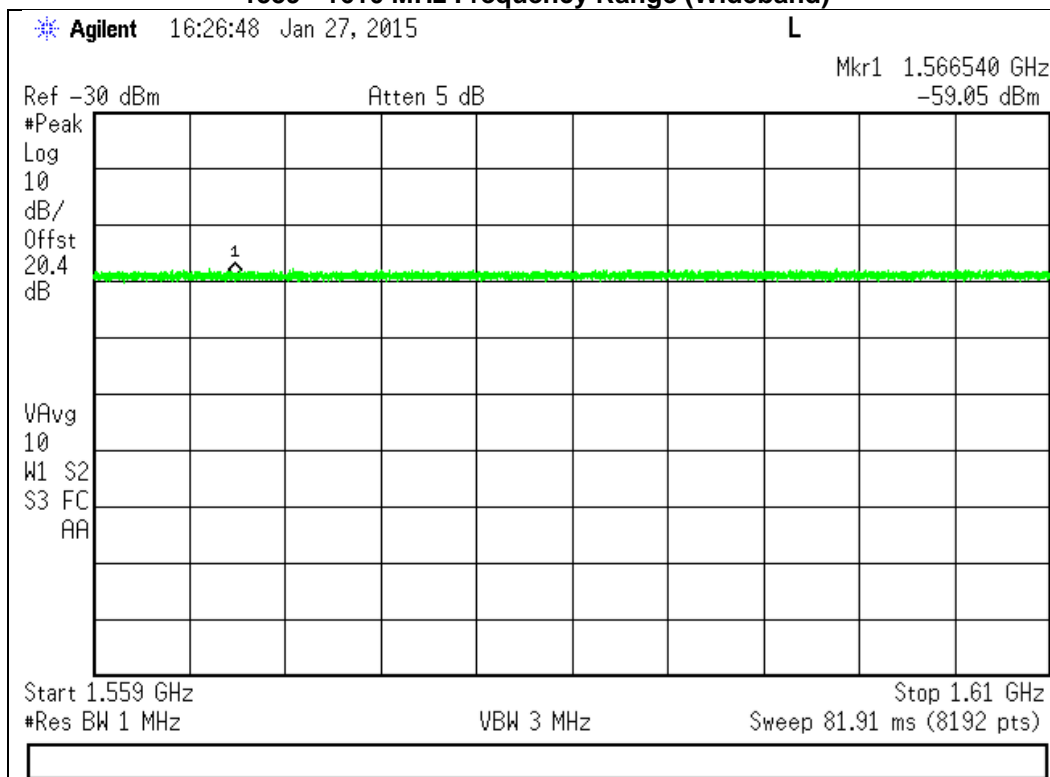

1559 - 1610 MHz Frequency Range (Narrowband)

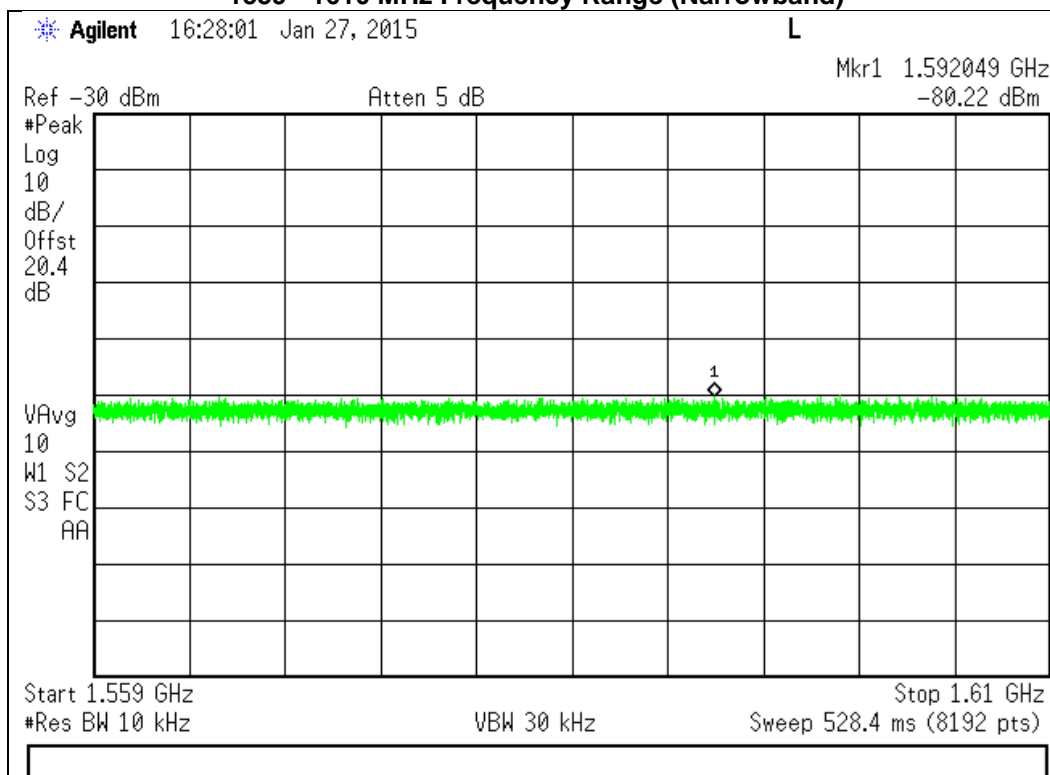

Noise Limits

Engineer: Mike Graffeo

Test Date: 1/15/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as necessary to ensure that accurate readings were obtained. A series of tests were performed: the maximum uplink and downlink noise, the variable noise for the uplink and in the presence of a downlink signal, and the variable uplink noise timing. The detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516c were followed.


For Mobile installations the Noise limit is fixed at -59 dBm.

Test Setup

Maximum Noise Power



Variable Uplink Noise Power and Timing

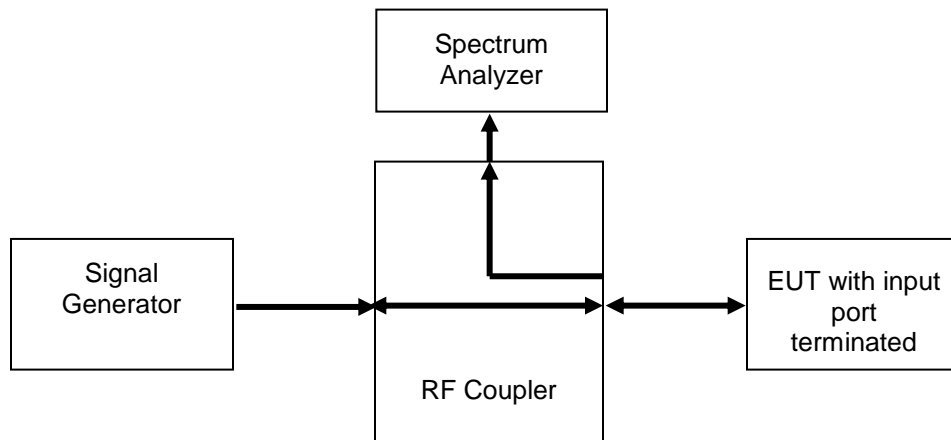

Maximum Uplink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
698 - 716	-63.78	-59.0	-4.8	Pass
776 - 787	-65.51	-59.0	-6.5	Pass
824 - 849	-65.28	-59.0	-6.3	Pass
1710 - 1755	-66.66	-59.0	-7.7	Pass
1850 - 1915	-65.02	-59.0	-6.0	Pass

Maximum Downlink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
728 - 746	-62.67	-59.0	-3.7	Pass
746 - 757	-62.7	-59.0	-3.7	Pass
869 - 894	-62.87	-59.0	-3.9	Pass
1930 - 1995	-64.58	-59.0	-5.6	Pass
2110 - 2155	-67.01	-59.0	-8.0	Pass

Uplink Noise Timing Test Results

Frequency Band (MHz)	Measured Timing (mS)	Limit (mS)	Result
698 - 716	28.01	1000.0	Pass
776 - 787	22.41	1000.0	Pass
824 - 849	22.41	1000.0	Pass
1710 - 1755	50.42	1000.0	Pass
1850 - 1915	8.40	1000.0	Pass

Variable Uplink Noise Limit Test Results
 (Green shade is RSSI dependent region)

698 - 716 MHz (* =Transmit off)

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-34.0	-69.0	-78.0 *	-9.0
-33.0	-70.0	-78.0 *	-8.0
-54.0	-59.0	-63.5	-4.5
-53.0	-59.0	-63.5	-4.5
-52.0	-59.0	-63.5	-4.5
-51.0	-59.0	-63.5	-4.5

776 - 787 MHz (* =Transmit off)

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-35.0	-68.0	-78.0 *	-10.0
-34.0	-69.0	-78.0 *	-9.0
-53.0	-59.0	-64.8	-5.8
-52.0	-59.0	-64.8	-5.8
-51.0	-59.0	-64.8	-5.8
-50.0	-59.0	-64.8	-5.8

824 - 849 MHz (* =Transmit off)

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-52.0	-59.0	-64.5	-5.5
-51.0	-59.0	-64.5	-5.5
-50.0	-59.0	-64.5	-5.5
-49.0	-59.0	-64.5	-5.5
-43.0	-60.0	-64.5	-4.5
-42.0	-61.0	-78.0 *	-17.0

1710 - 1755 MHz (* =Transmit off)


RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-35.0	-68.0	-78.0 *	-10.0
-34.0	-69.0	-78.0 *	-9.0
-54.0	-59.0	-66.2	-7.2
-53.0	-59.0	-66.2	-7.2
-52.0	-59.0	-66.2	-7.2
-51.0	-59.0	-66.2	-7.2

1850 - 1915 MHz (* =Transmit off)


RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-35.0	-68.0	-78.0 *	-10.0
-34.0	-69.0	-78.0 *	-9.0
-65.0	-59.0	-64.2	-5.2
-64.0	-59.0	-64.2	-5.2
-63.0	-59.0	-64.2	-5.2
-62.0	-59.0	-64.2	-5.2

Maximum Uplink Noise Test Plots

698 - 716 MHz Band

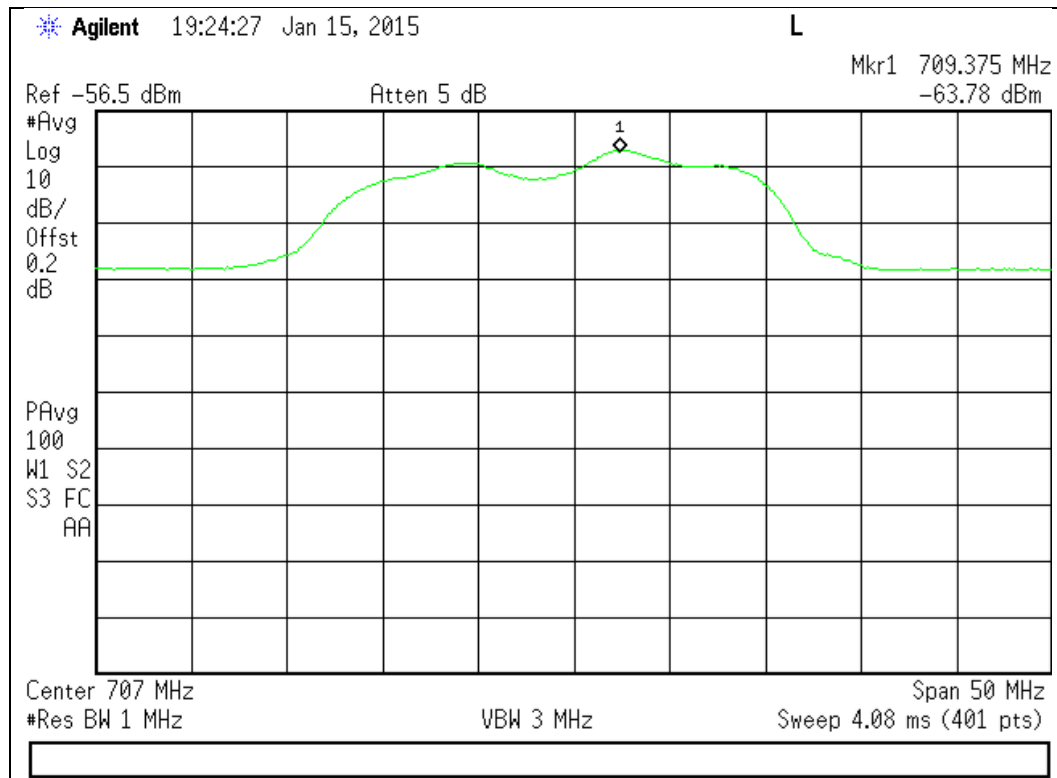


776 - 787 MHz Band

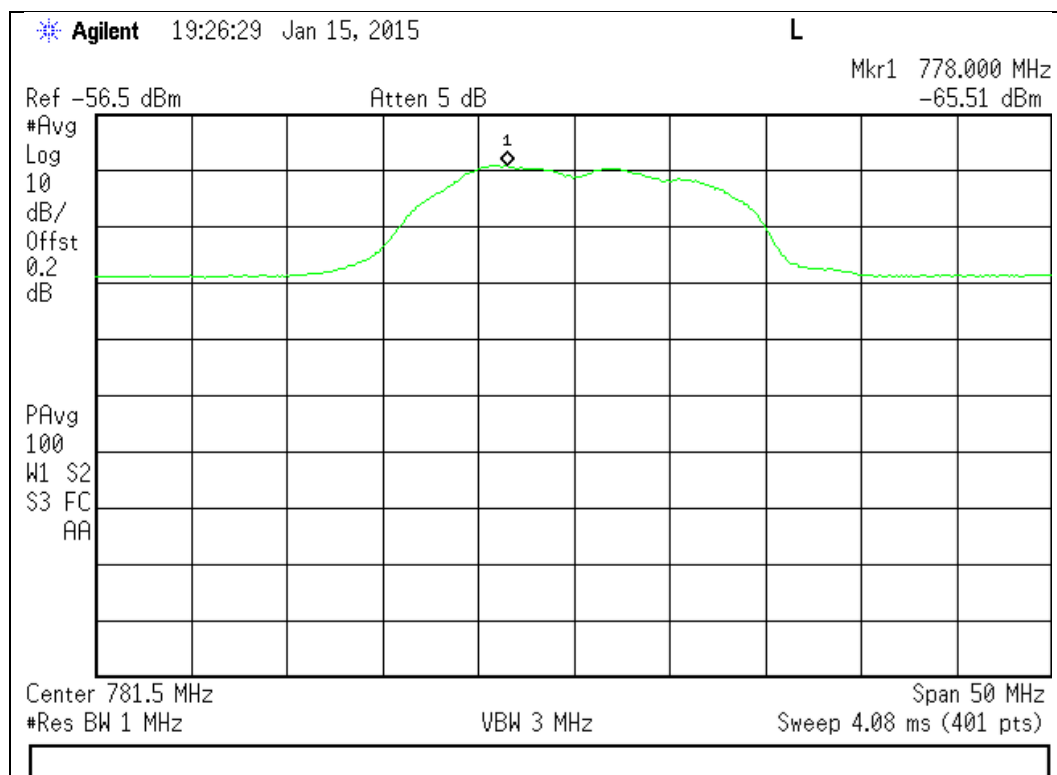




824 - 849 MHz Band

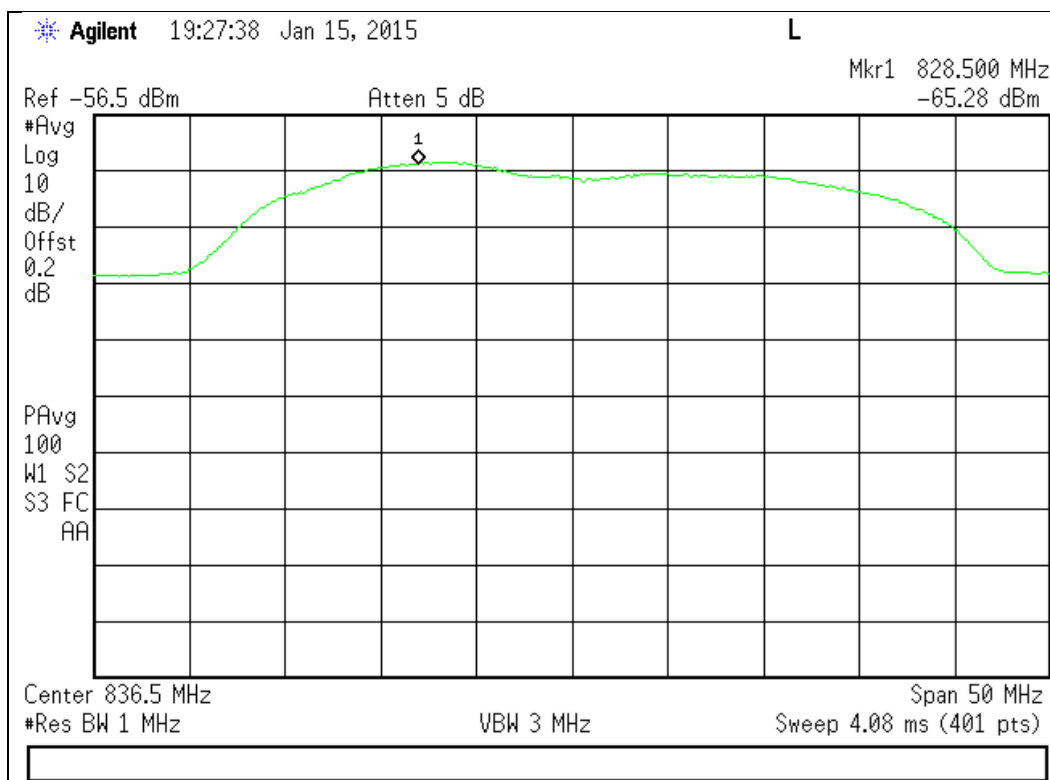


1710 - 1755 MHz Band

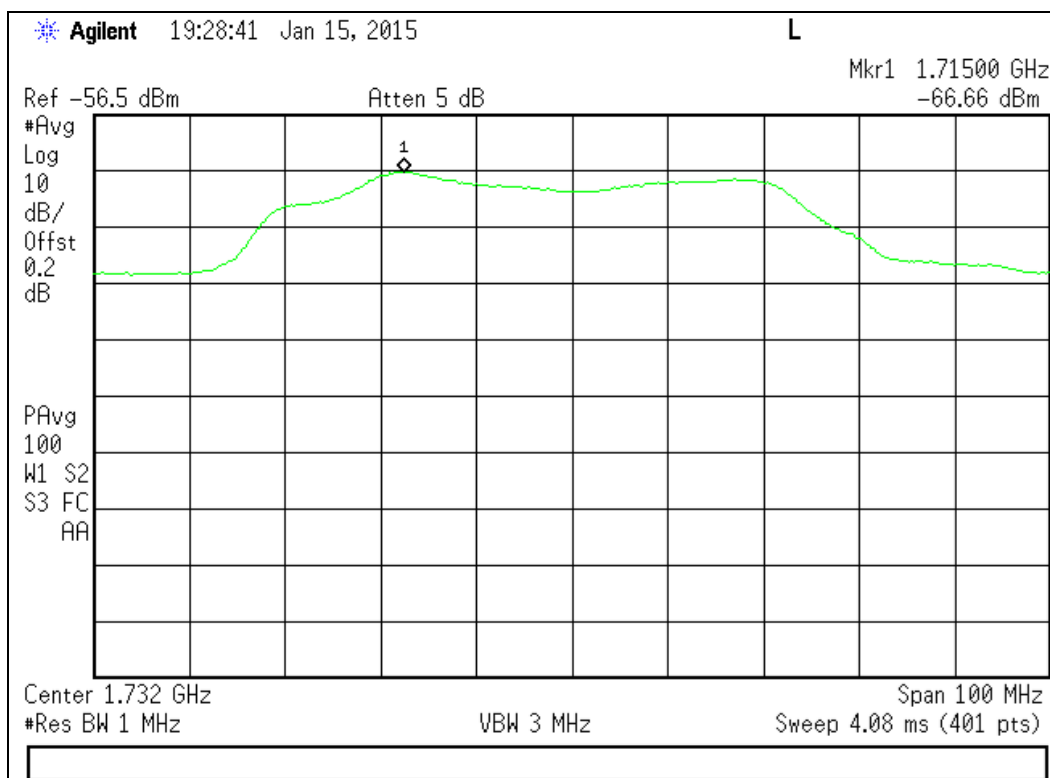




1850 - 1915 MHz Band

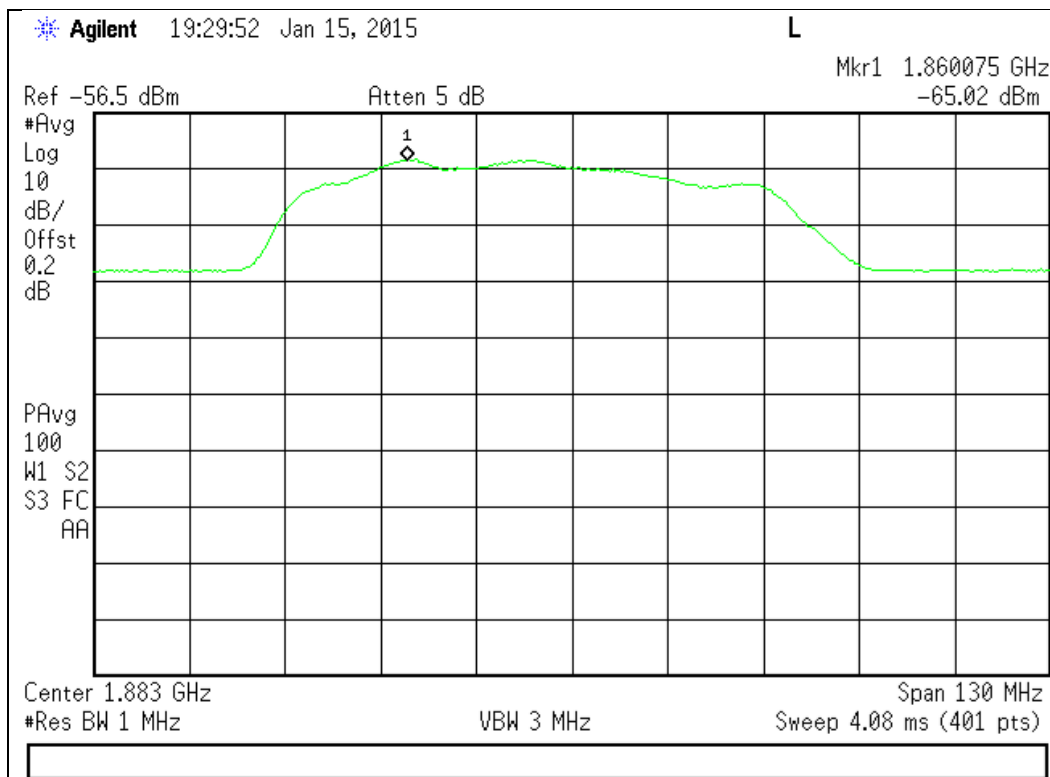


Maximum Downlink Noise Test Plots

728 - 746 MHz Band

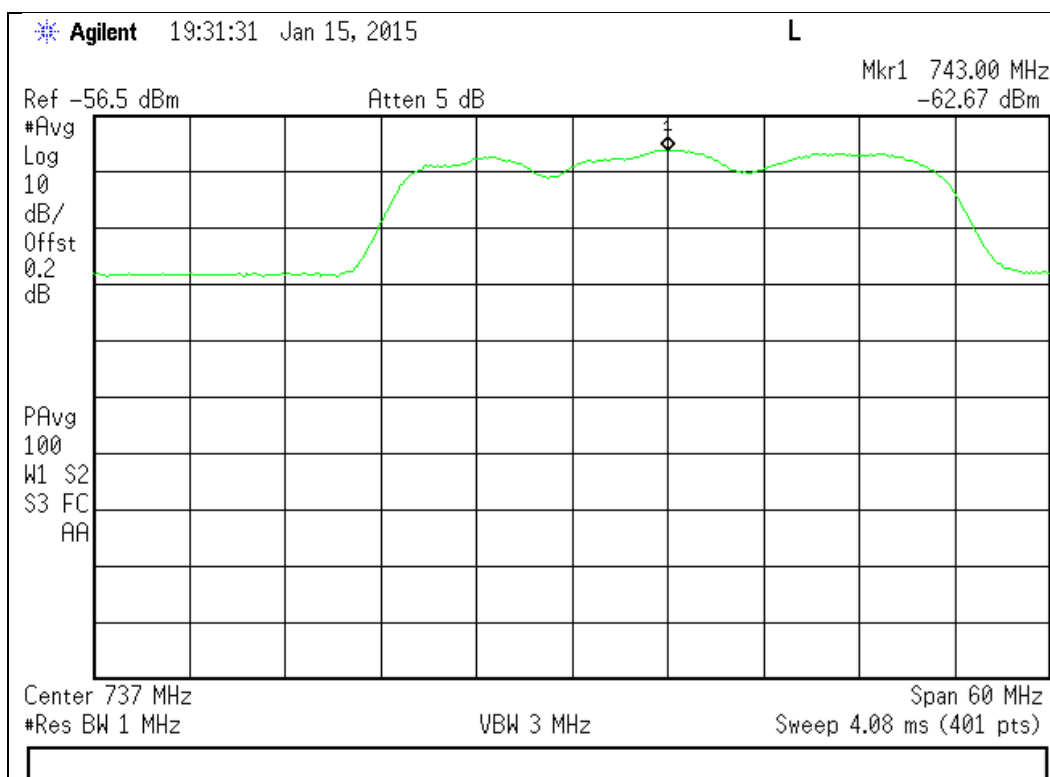




746 - 757 MHz Band

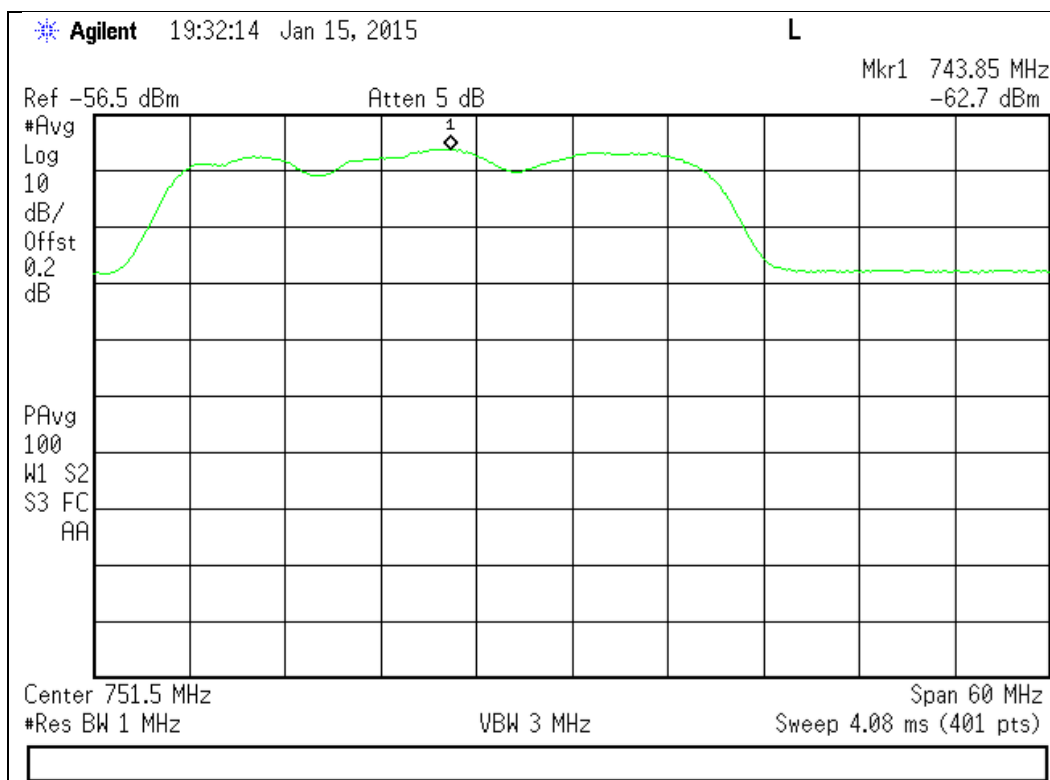


869 - 894 MHz Band

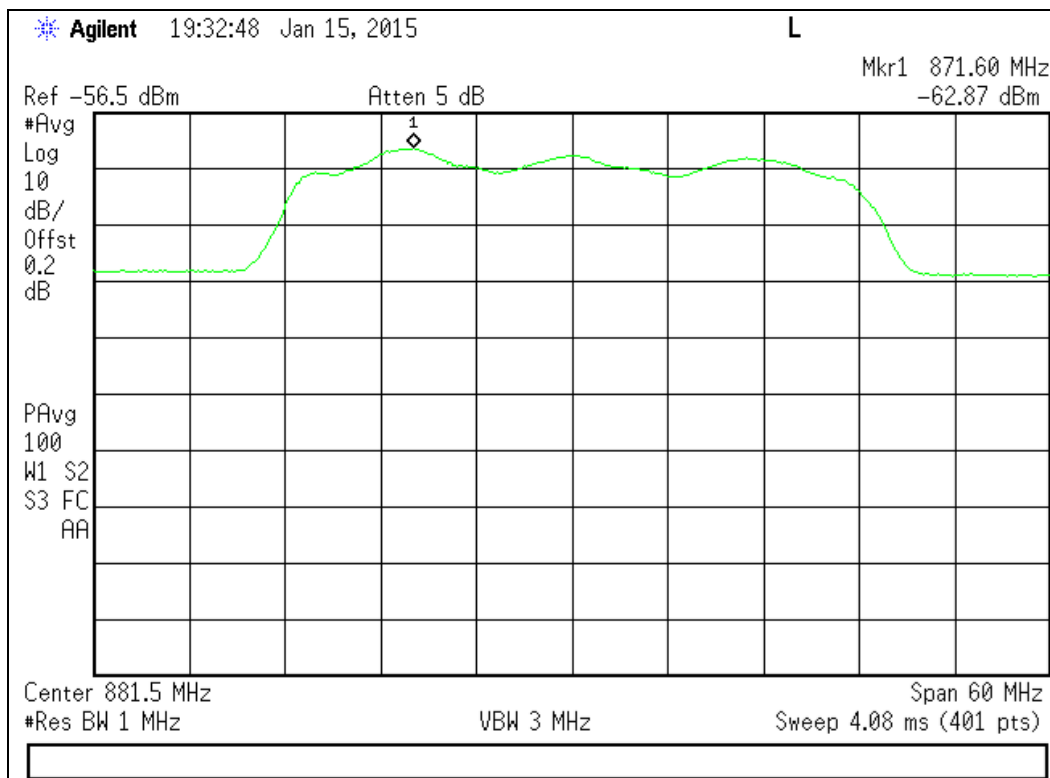




1930 - 1995 MHz Band

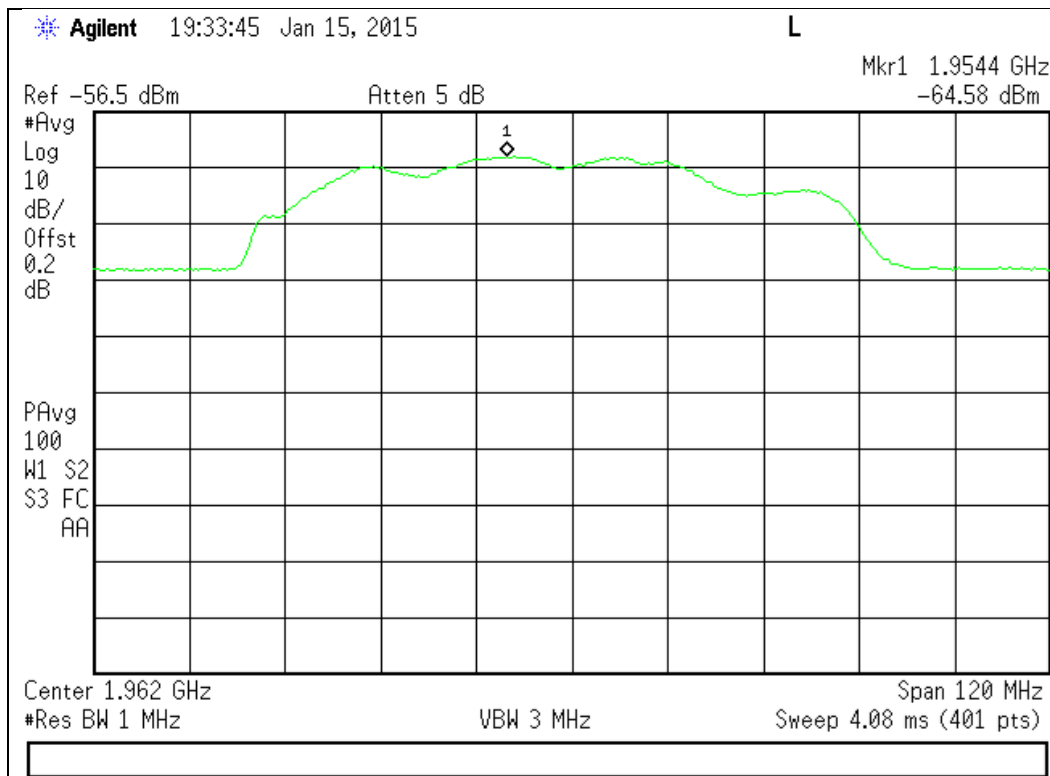


2110 - 2155 MHz Band

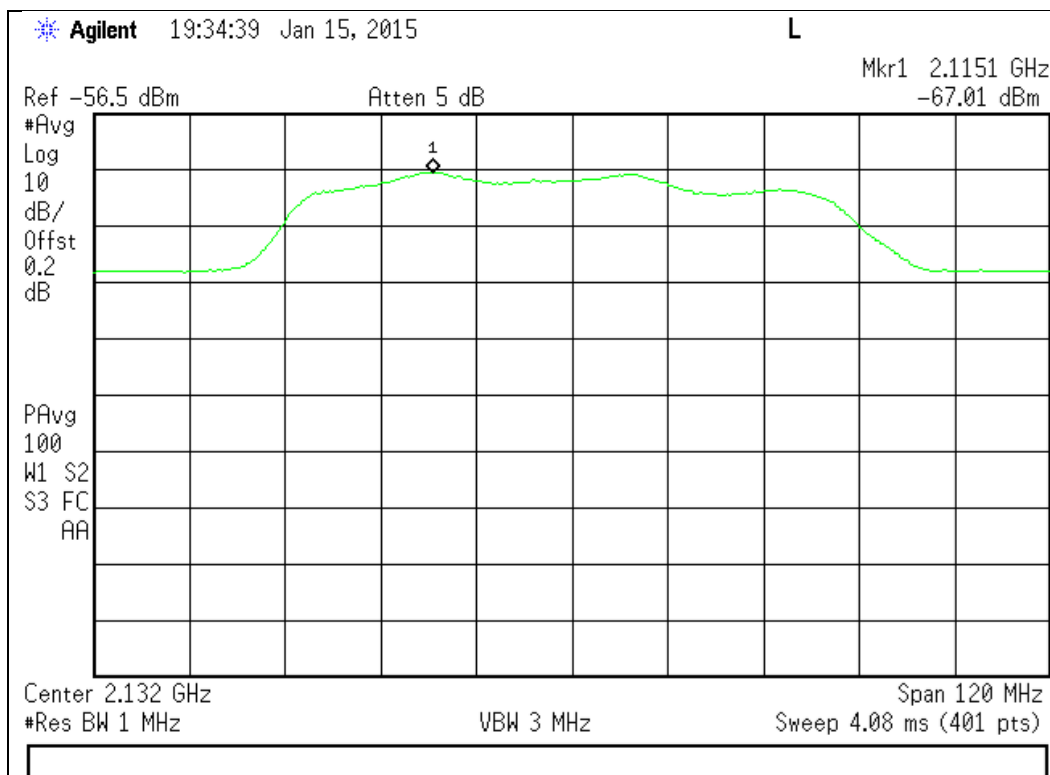


Uplink Noise Timing Test Plots


698 - 716 MHz Band

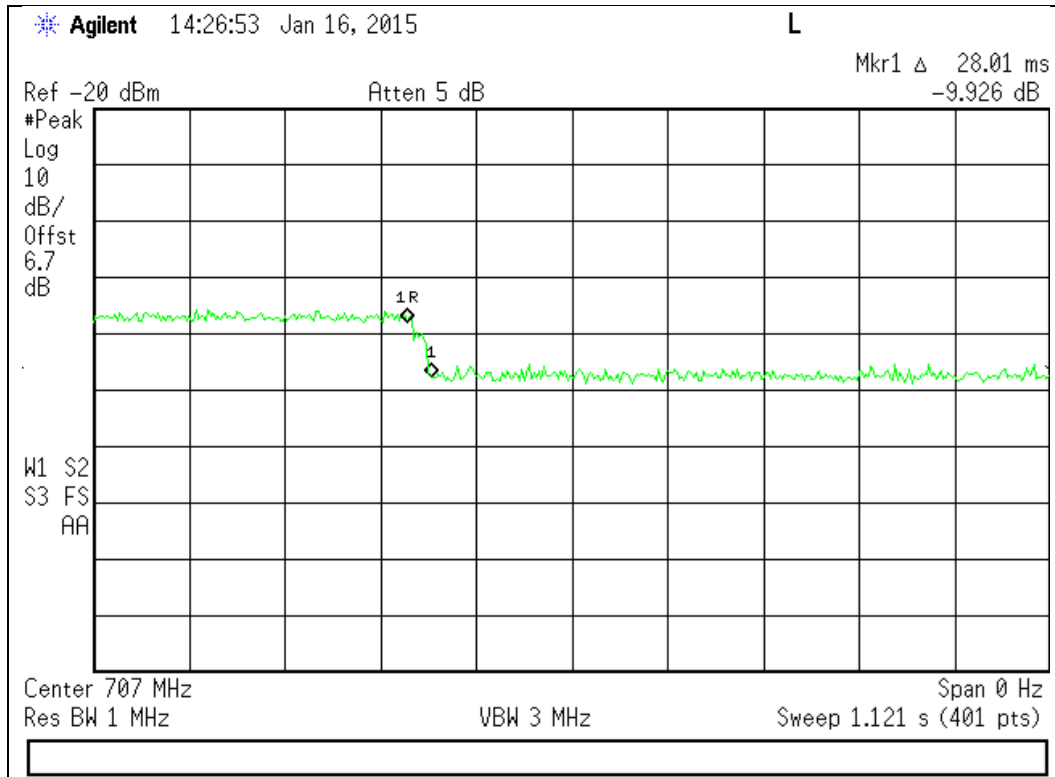


776 - 787 MHz Band

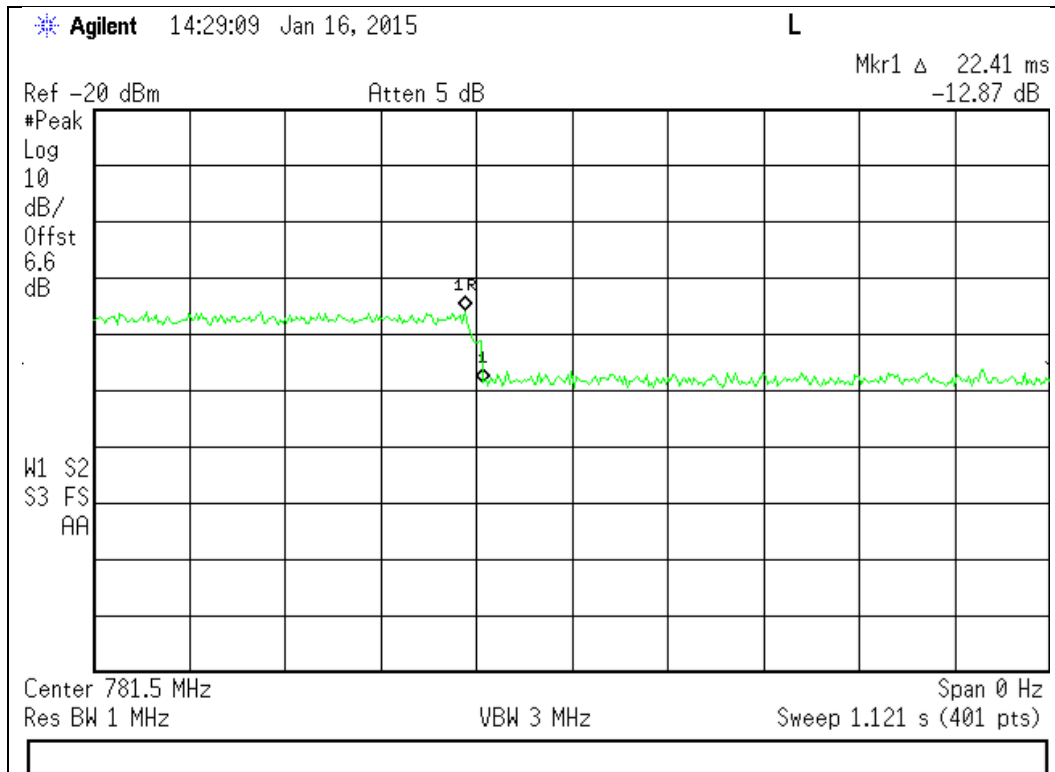

824 - 849 MHz Band

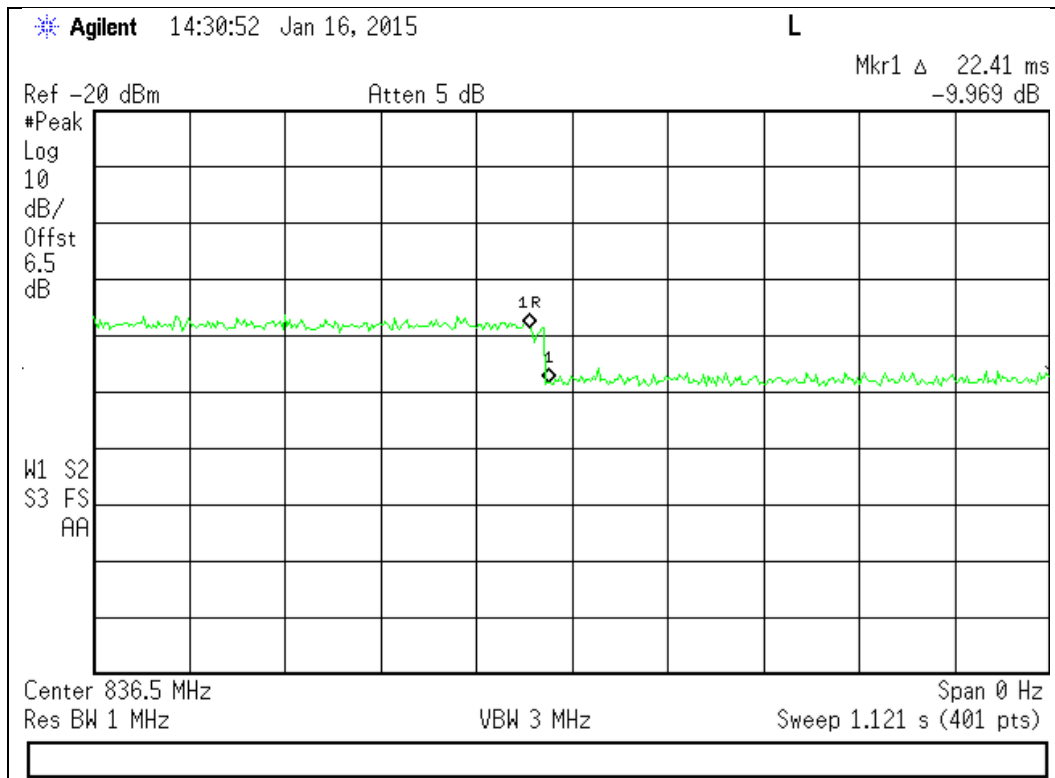


1710 - 1755 MHz Band

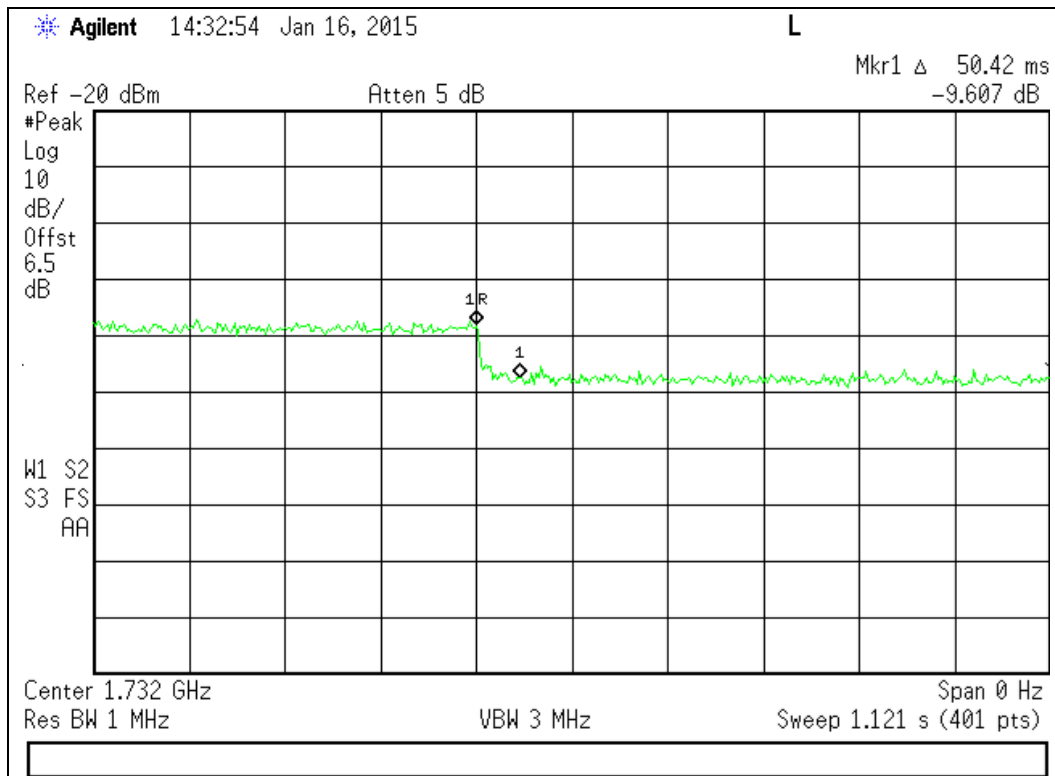



1850 - 1915 MHz Band

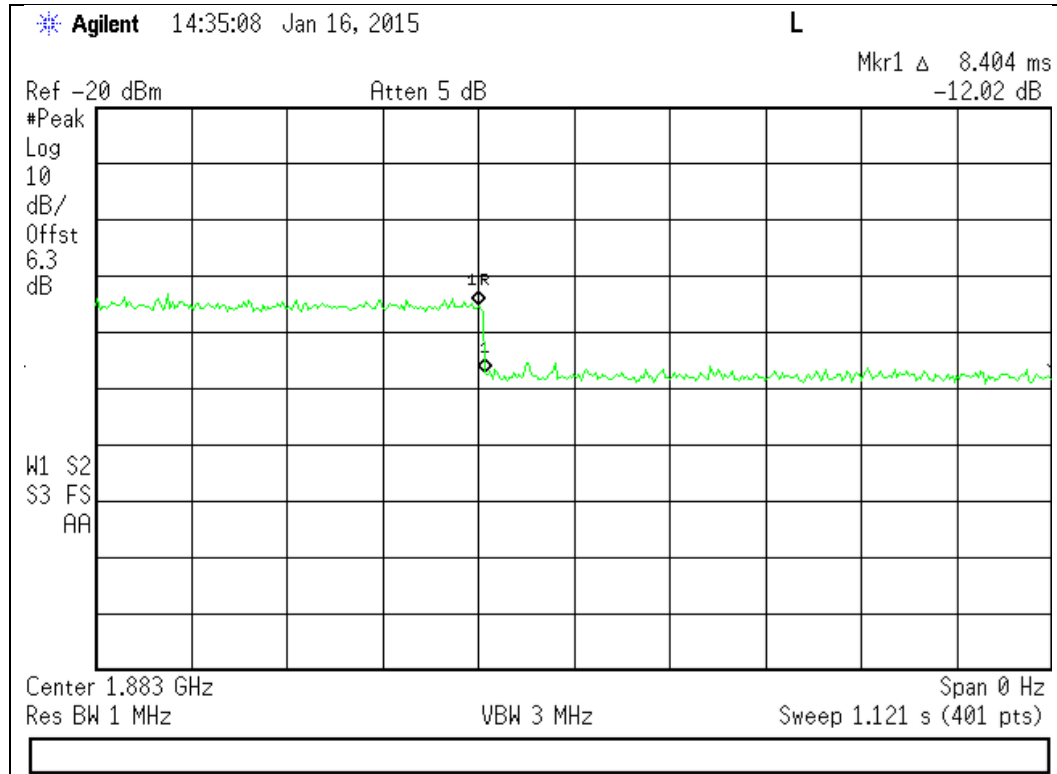

Uplink Inactivity


Engineer: Mike Graffeo

Test Date: 1/16/15

Test Procedure

The EUT was connected directly to a spectrum analyzer set to operate in the center of the EUT operational uplink and downlink bands. The span was set to 0 Hz with a sweep time of 330 seconds and MAX HOLD operation. The EUT was powered on and the time for the uplink to return to an inactive state was measured using the DELTA MARKER method to ensure that it was less than 300 seconds. The noise level after the return to an inactive state was less than -70 dBm/MHz

Test Setup




Uplink Test Results

Frequency Band (MHz)	Measured Time (Seconds)	Limit (Seconds)	Result
698 - 716	263.2	300	Pass
776 - 787	261.5	300	Pass
824 - 849	260.7	300	Pass
1710 - 1755	262.3	300	Pass
1850 - 1915	261.5	300	Pass




Uplink Inactivity Test Results

698 - 716 MHz

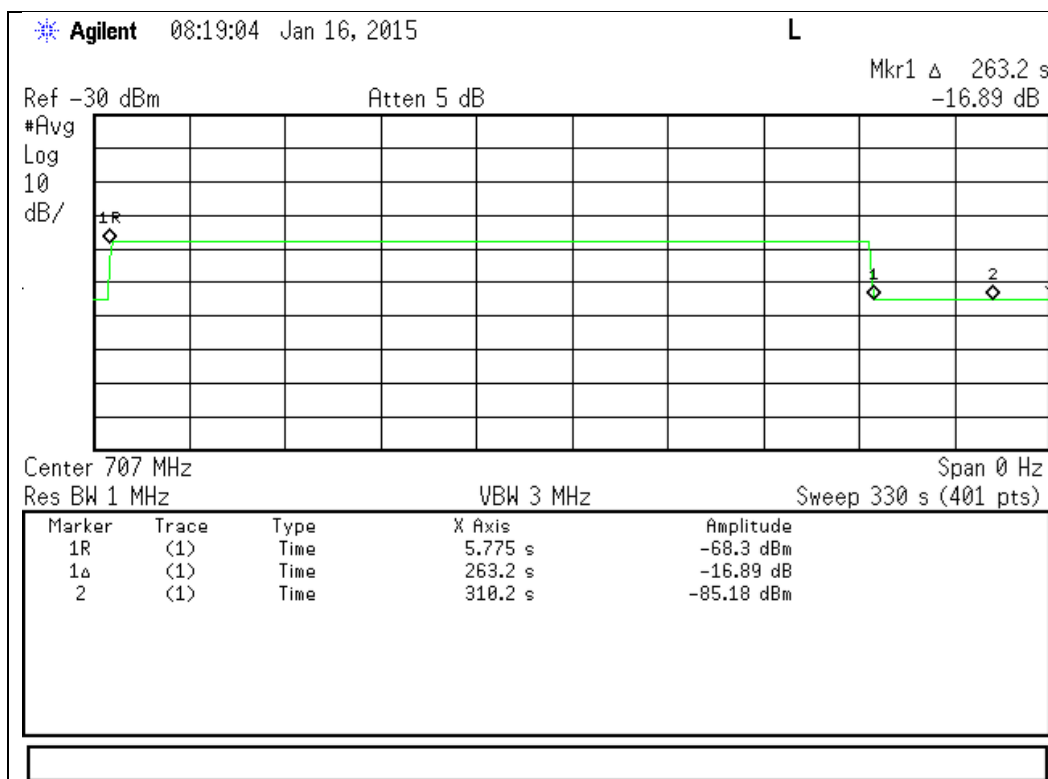


776 - 787 MHz

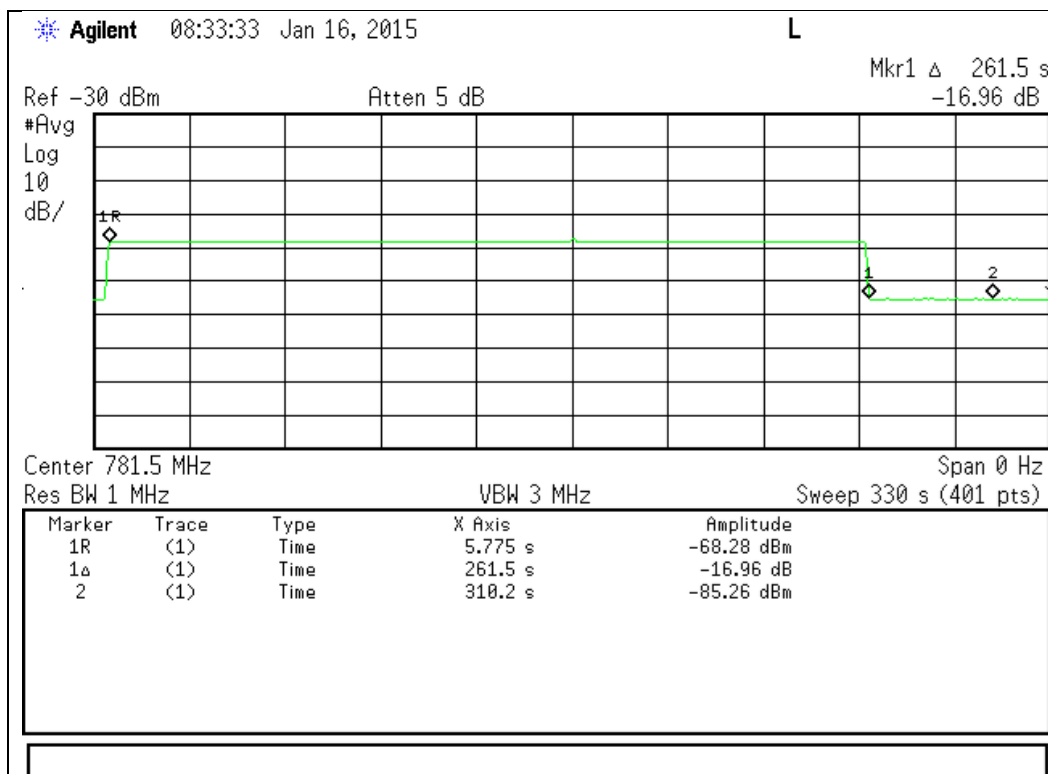





824 - 849 MHz

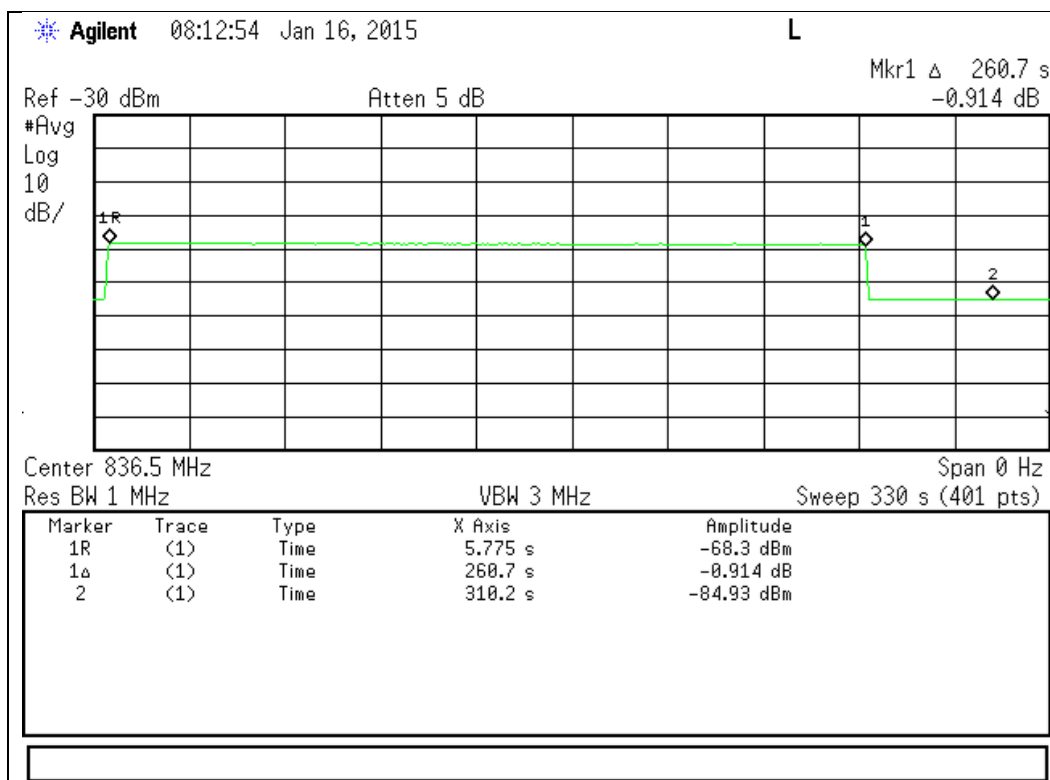

1710 - 1755 MHz

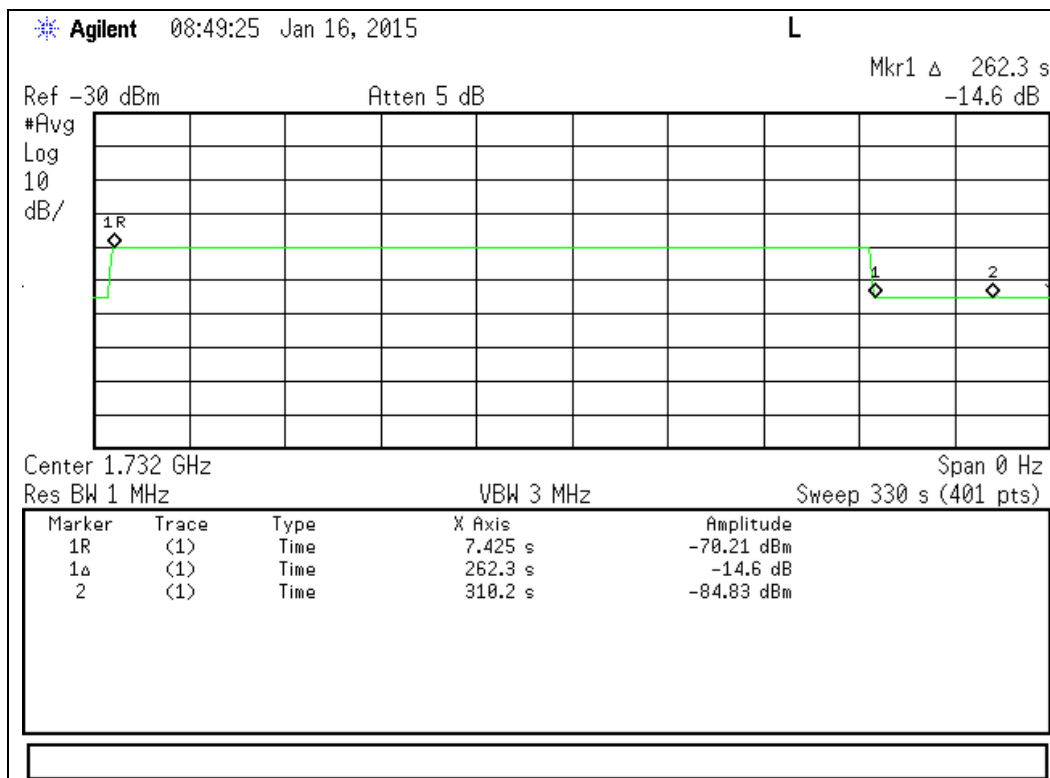

1850 - 1915 MHz

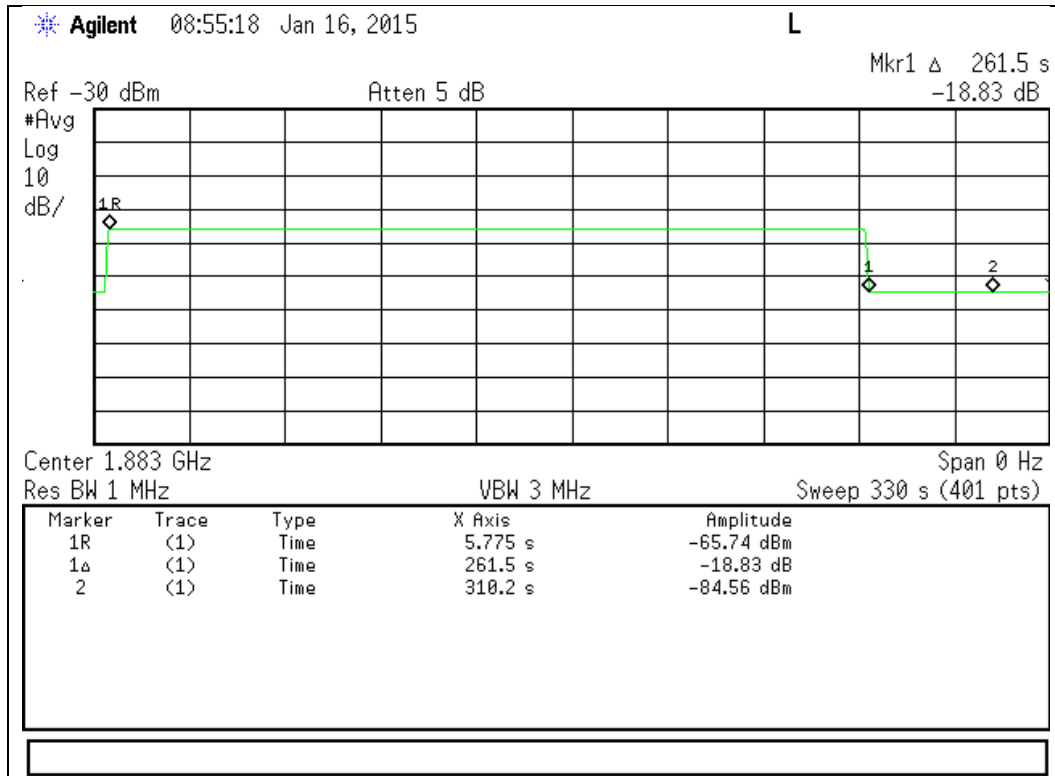

Variable Gain

Engineer: Mike Graffeo

Test Date: 1/16/15

Test Procedure


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings were obtained. The uplink gain in the presence of a downlink signal was measured for each operational uplink band using the detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516.

The following formula is used for calculating the limits:

Variable Gain = -34 dB - RSSI +MSCL

Mobile Booster maximum gain = 50dB

Test Setup

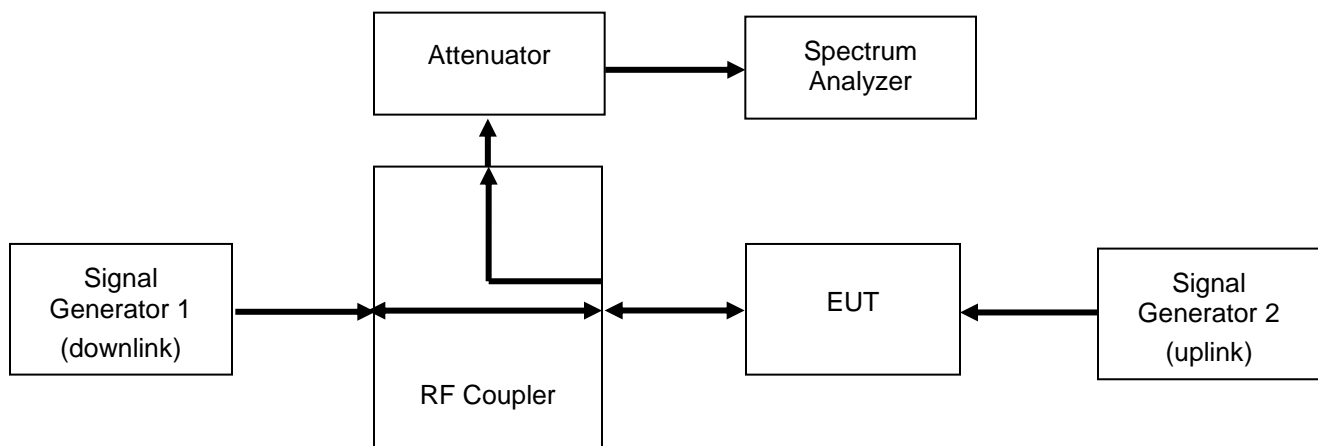

Uplink Test Results (Green shade is RSSI dependent region)

698 - 716 MHz (*transmit off)

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-53.0	31.1	50.0	-28.5	12.7	41.2	-8.8
-52.0	31.1	49.1	-28.5	12.7	41.2	-7.9
-51.0	31.1	48.1	-28.5	12.7	41.2	-6.9
-50.0	31.1	47.1	-28.5	12.7	41.2	-5.9
-49.0	31.1	46.1	-28.5	12.7	41.2	-4.9
-48.0	31.1	45.1	-28.5	12.7	41.2	-3.9

776 - 787 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-54.0	32.0	50.0	-20.5	16.1	36.6	-13.4
-53.0	32.0	50.0	-20.5	16.1	36.6	-13.4
-52.0	32.0	50.0	-20.5	16.1	36.6	-13.4
-51.0	32.0	49.0	-20.5	16.1	36.6	-12.4
-50.0	32.0	48.0	-20.5	16.1	36.6	-11.4
-49.0	32.0	47.0	-20.5	16.1	36.6	-10.4

824 - 849 MHz (* transmit off)

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-50.0	32.5	48.5	-29.5	12.7	42.2	-6.3
-49.0	32.5	47.5	-29.5	12.7	42.2	-5.3
-48.0	32.5	46.5	-29.5	12.7	42.2	-4.3
-47.0	32.5	45.5	-29.5	12.7	42.2	-3.3
-46.0	32.5	44.5	-29.5	12.7	42.2	-2.3
-45.0	32.5	43.5	-29.5	12.7	42.2	-1.3

1710 - 1755 MHz (*transmit off)

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-55.0	39.8	50.0	-29.4	13.7	43.1	-6.9
-54.0	39.8	50.0	-29.4	13.7	43.1	-6.9
-53.0	39.8	50.0	-29.4	13.7	43.1	-6.9
-52.0	39.8	50.0	-29.4	13.7	43.1	-6.9
-44.0	39.8	49.8	-29.4	*-41.0	-11.6	-61.4
-43.0	39.8	48.8	-29.4	*-41.0	-11.6	-60.4

(Green shade is RSSI dependent region)

1850 – 1915 MHz (*transmit off)

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-59.0	40.4	50.0	-30.2	13.9	44.1	-5.9
-58.0	40.4	50.0	-30.2	13.9	44.1	-5.9
-57.0	40.4	50.0	-30.2	13.9	44.1	-5.9
-56.0	40.4	50.0	-30.2	13.9	44.1	-5.9
-43.0	40.4	49.4	-30.2	*-42.0	-11.8	-61.2
-42.0	40.4	48.4	-30.2	*-42.0	-11.8	-60.2

Uplink Gain Timing Test Results


Frequency Band (MHz)	Measured Timing (ms)	Limit (ms)	Result
698 - 716	22.00	1000.0	Pass
776 - 787	11.01	1000.0	Pass
824 - 849	8.25	1000.0	Pass
1710 - 1755	5.50	1000.0	Pass
1850 - 1915	11.00	1000.0	Pass

Uplink Gain Timing Plots

698 - 716 MHz Band

Agilent 14:59:49 Jan 16, 2015


L

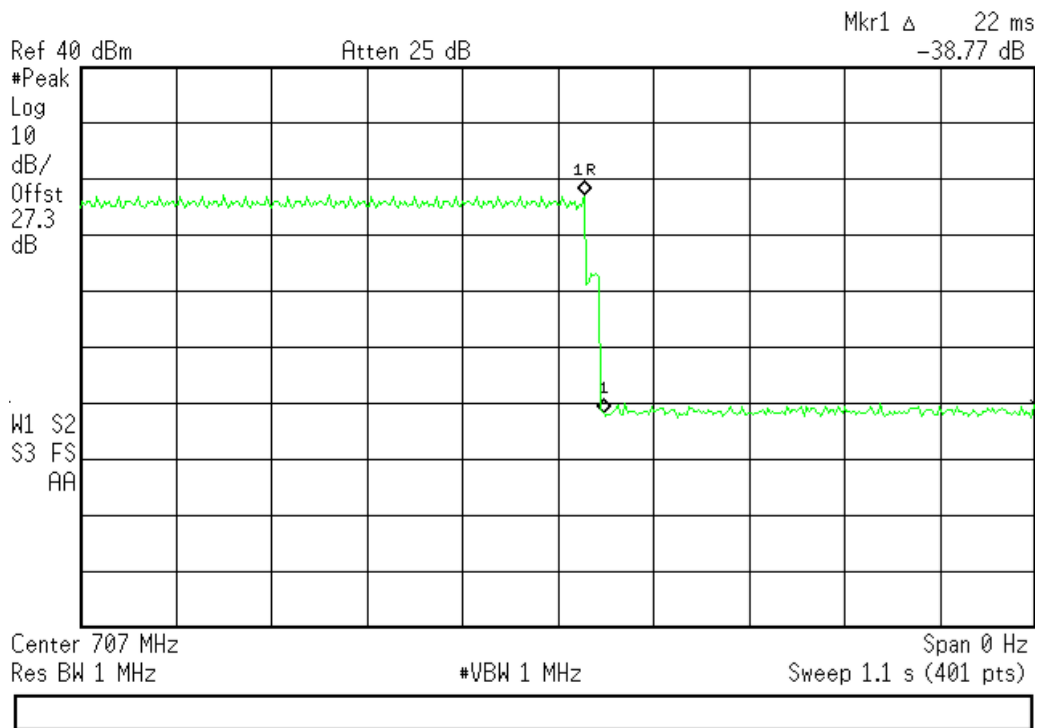

776 - 787 MHz Band

Agilent 15:07:14 Jan 16, 2015

L

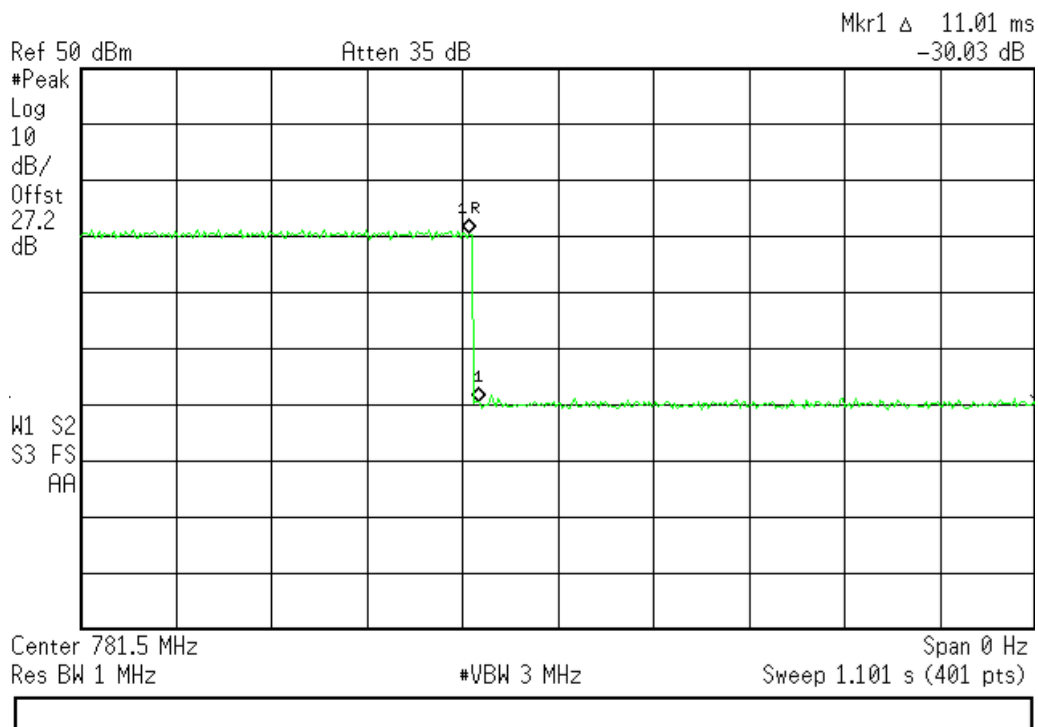




824 - 849 MHz Band

Agilent 15:11:17 Jan 16, 2015


L

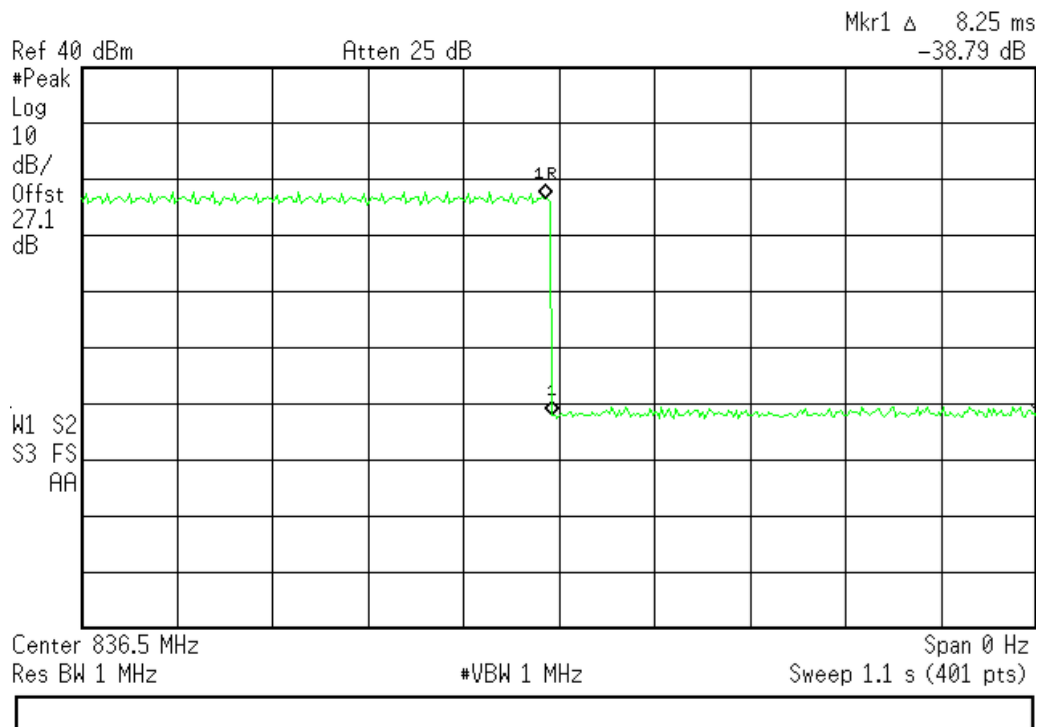

1710 - 1755 MHz Band

Agilent 15:16:27 Jan 16, 2015

L

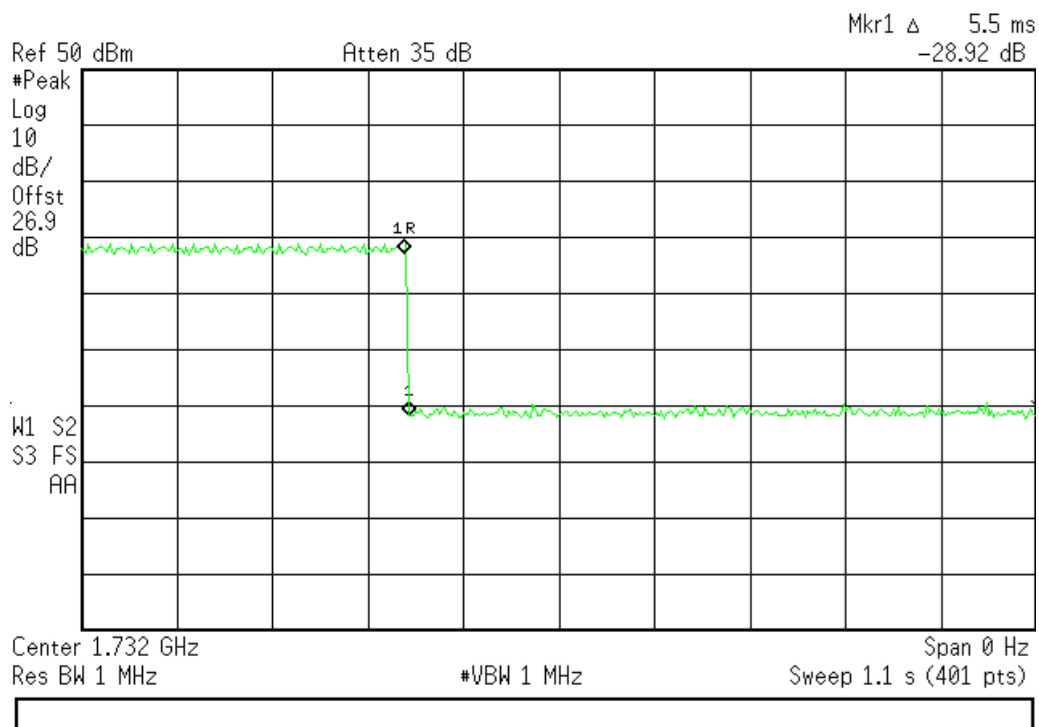

1850 - 1915 MHz Band

Agilent 15:23:45 Jan 16, 2015

L

Mkr1 Δ 11 ms

-25.45 dB

Ref 50 dBm

Atten 35 dB

#Peak
Log
10
dB/
Offst
26.8
dB

W1 S2
S3 FS
AA


Center 1.883 GHz

Res BW 1 MHz

#VBW 1 MHz


Span 0 Hz

Sweep 1.1 s (401 pts)

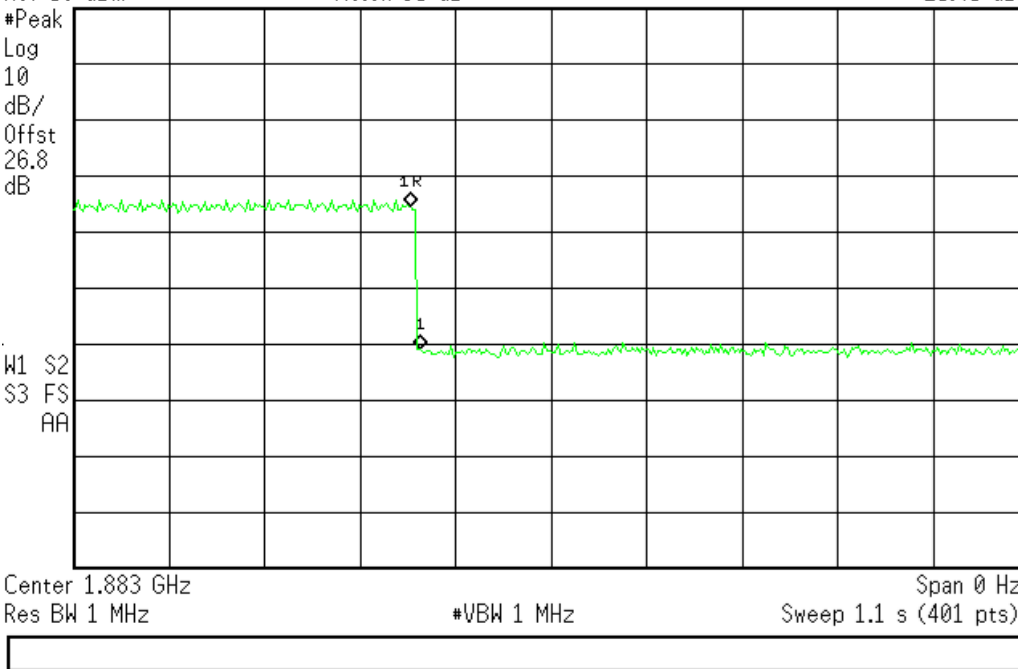

Occupied Bandwidth**Engineer:** Mike Graffeo**Test Date:** 1/20/15**Test Procedure**


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as required to ensure that accurate readings were obtained. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the center channel of each of the EUT operational uplink and downlink bands with the RF level set at a point just prior to the AGC being in control of the power. For each modulation type, the input and output signal was measured and plotted to ensure that the signals were similar.

Test Setup


GSM Uplink Test Plots

698 - 716 MHz Band

Input

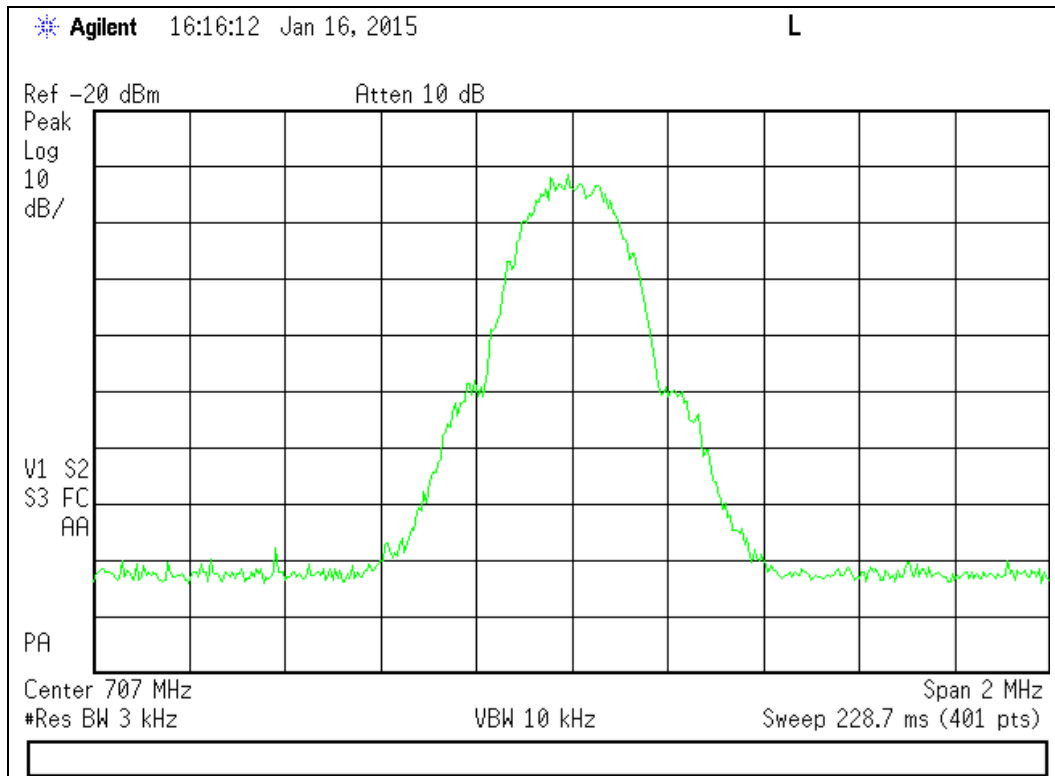


Output

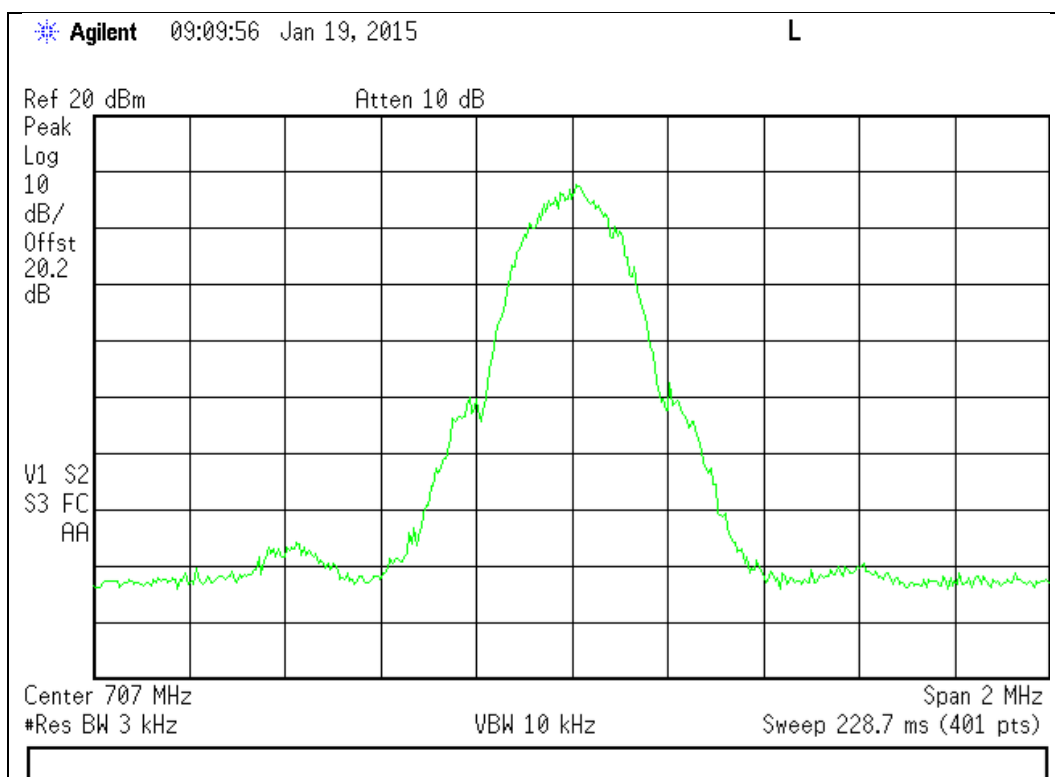




776 - 787 MHz Band

Input

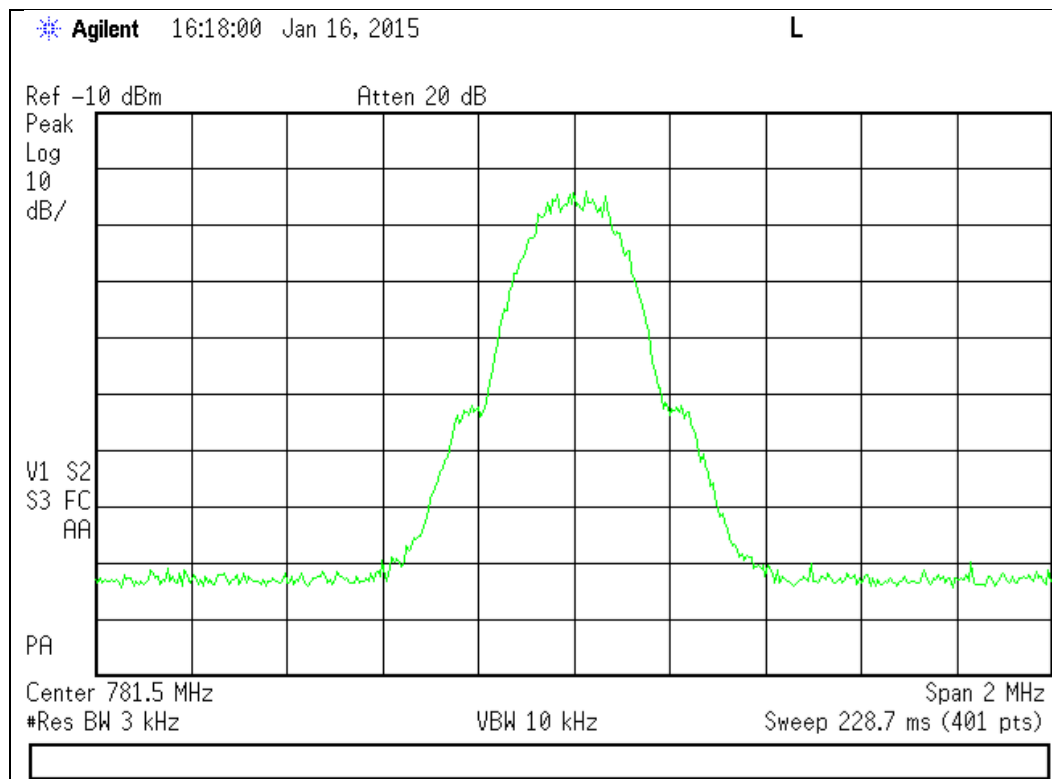


Output

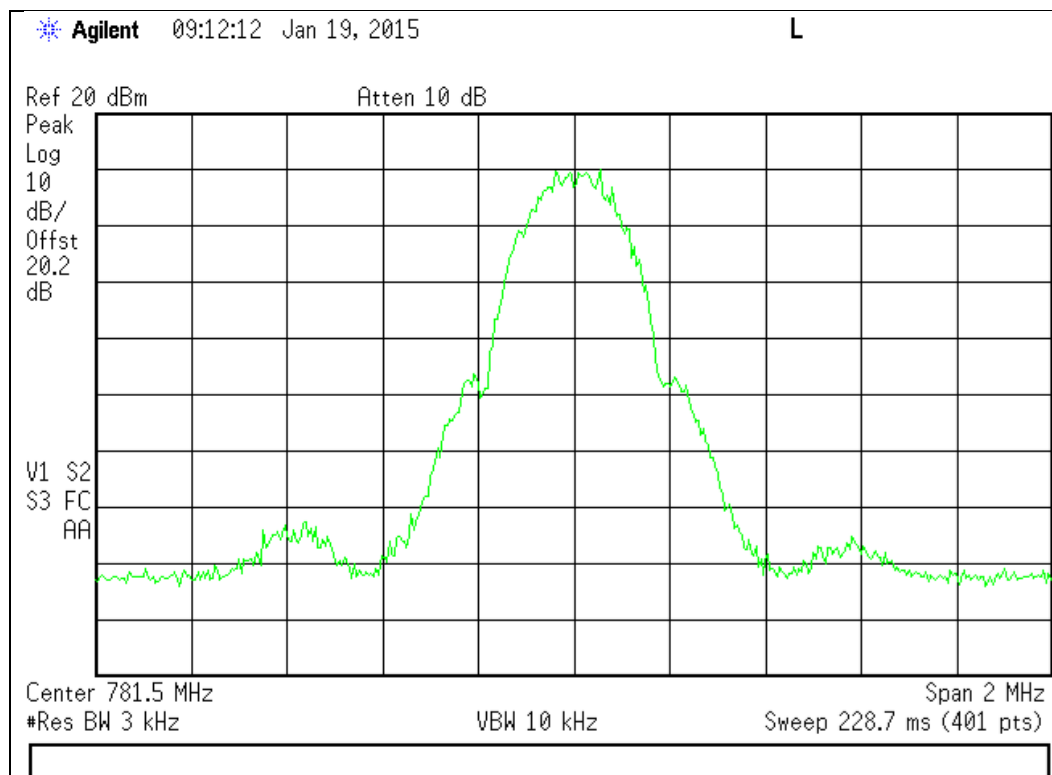




824 - 849 MHz Band

Input

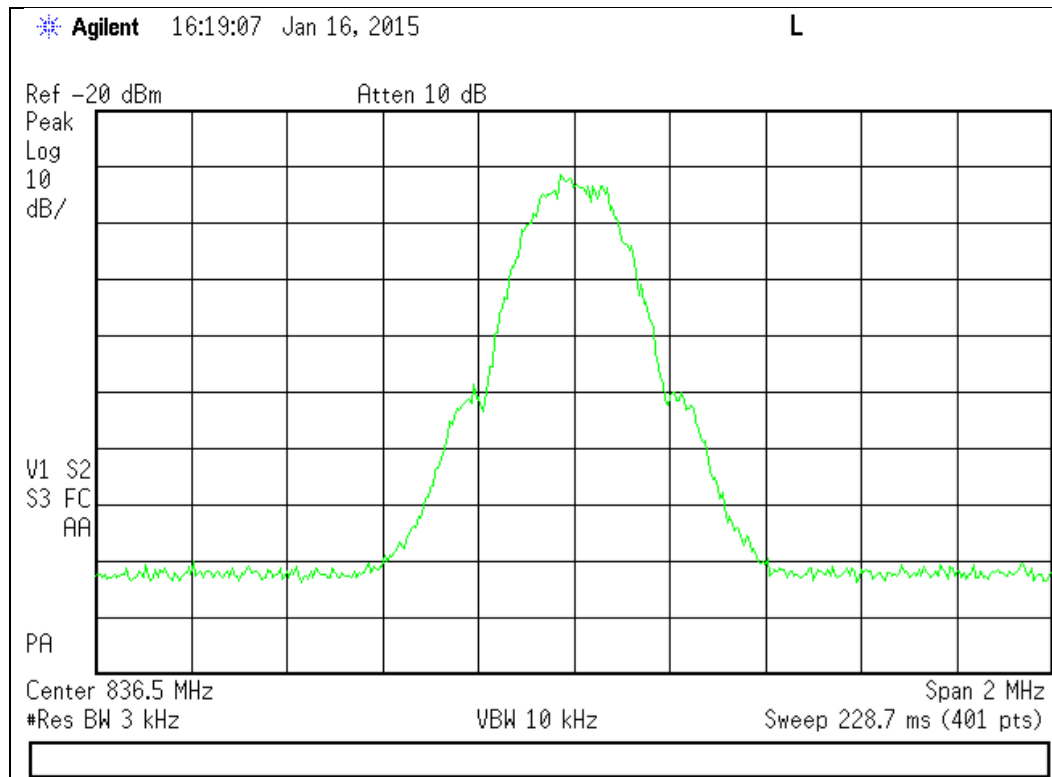


Output

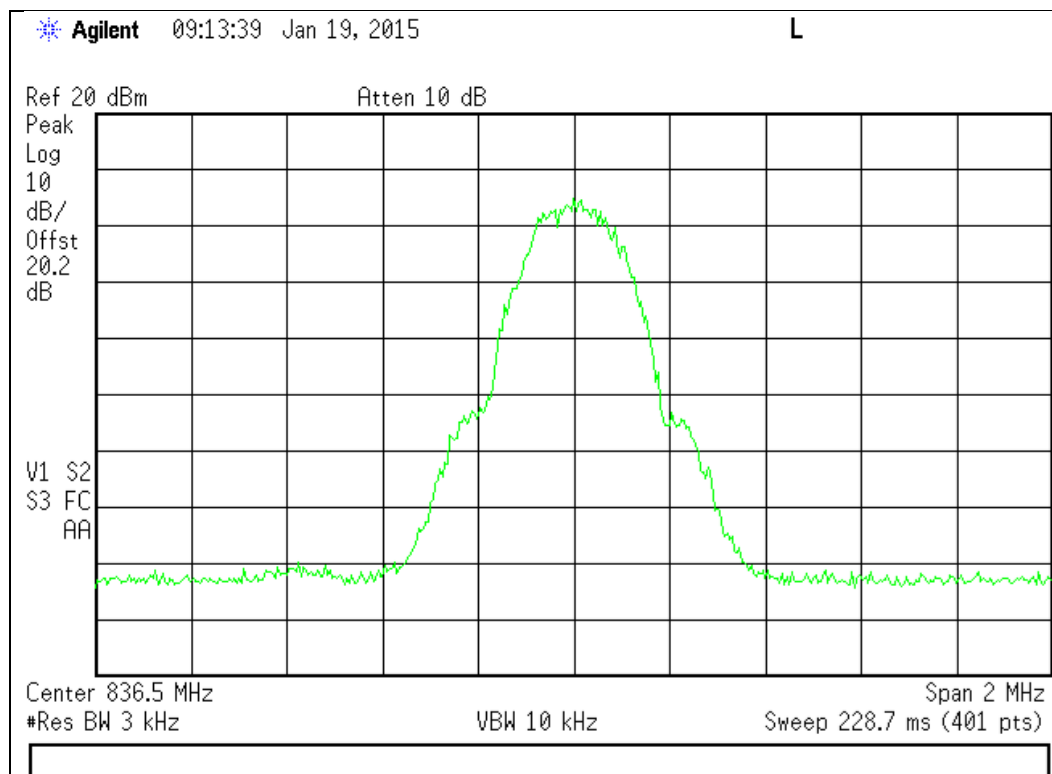




1710 - 1755 MHz Band

Input

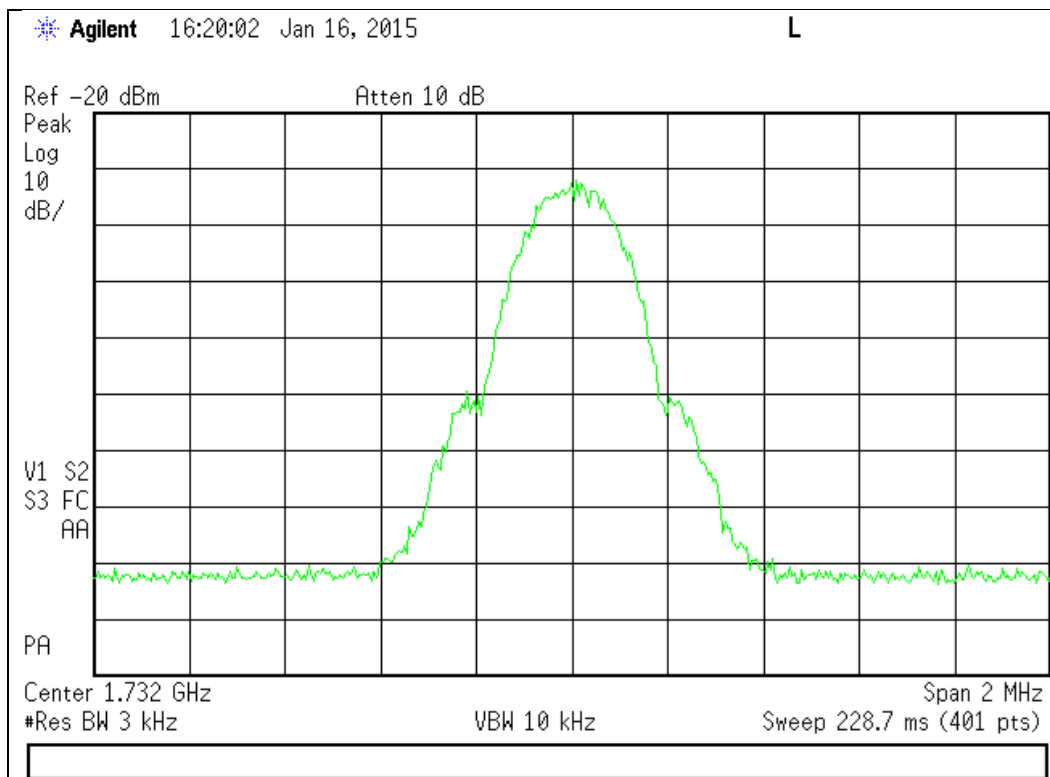


Output

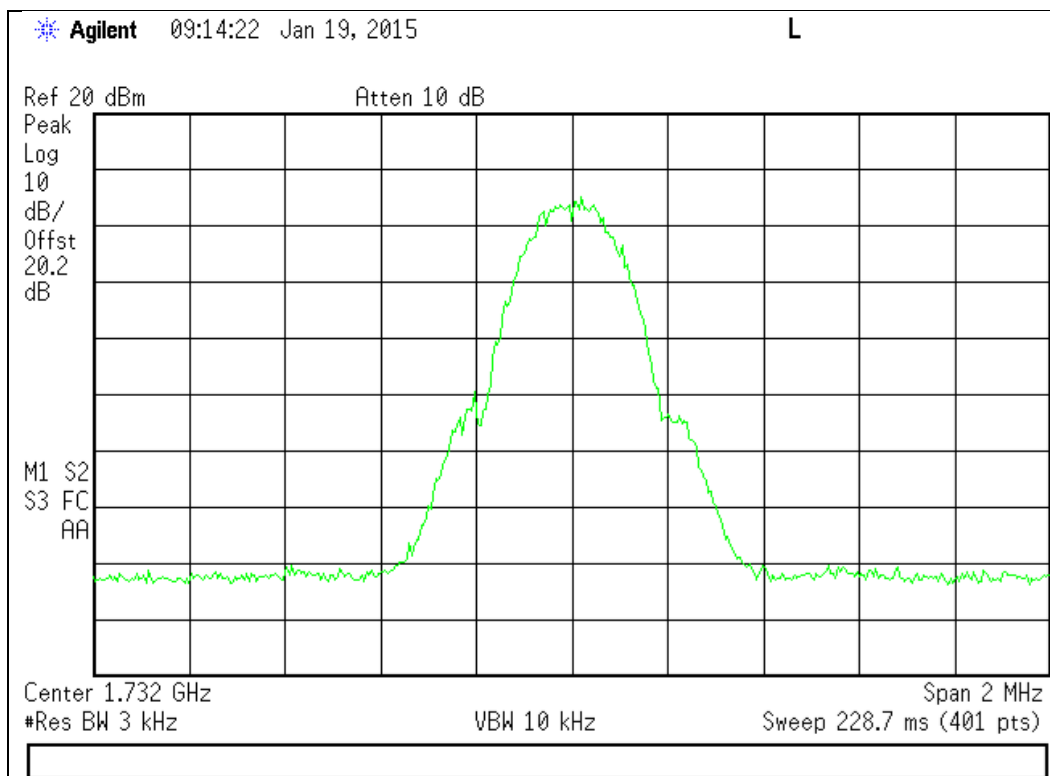




1850 - 1915 MHz Band

Input

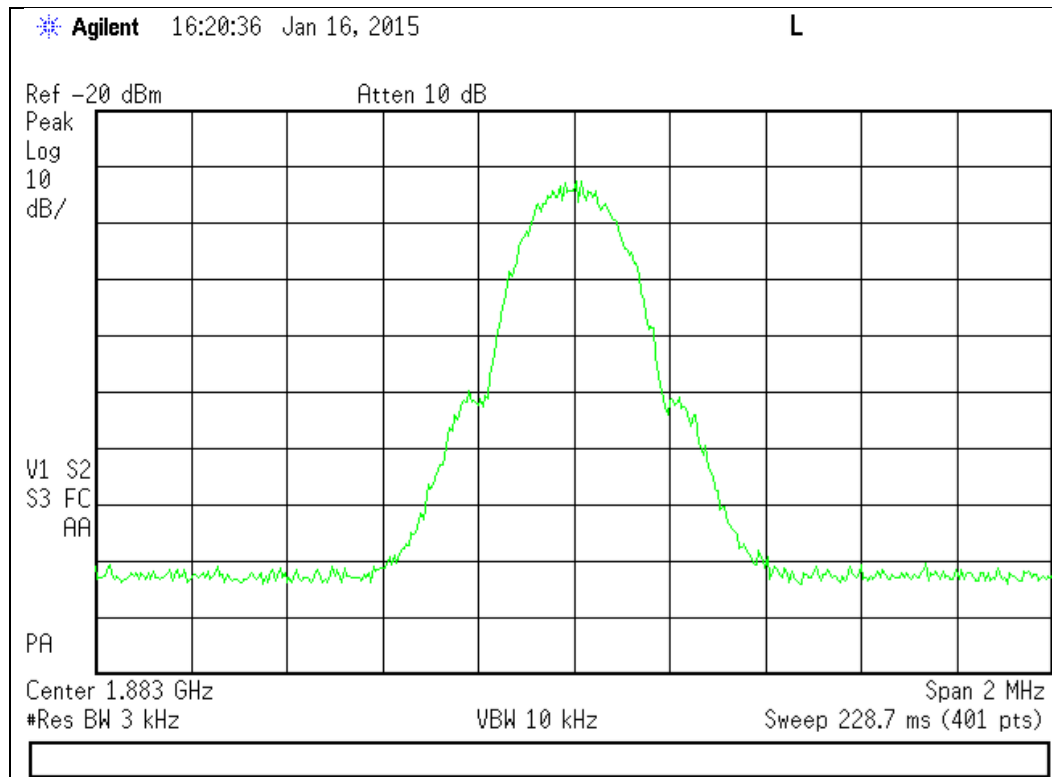


Output

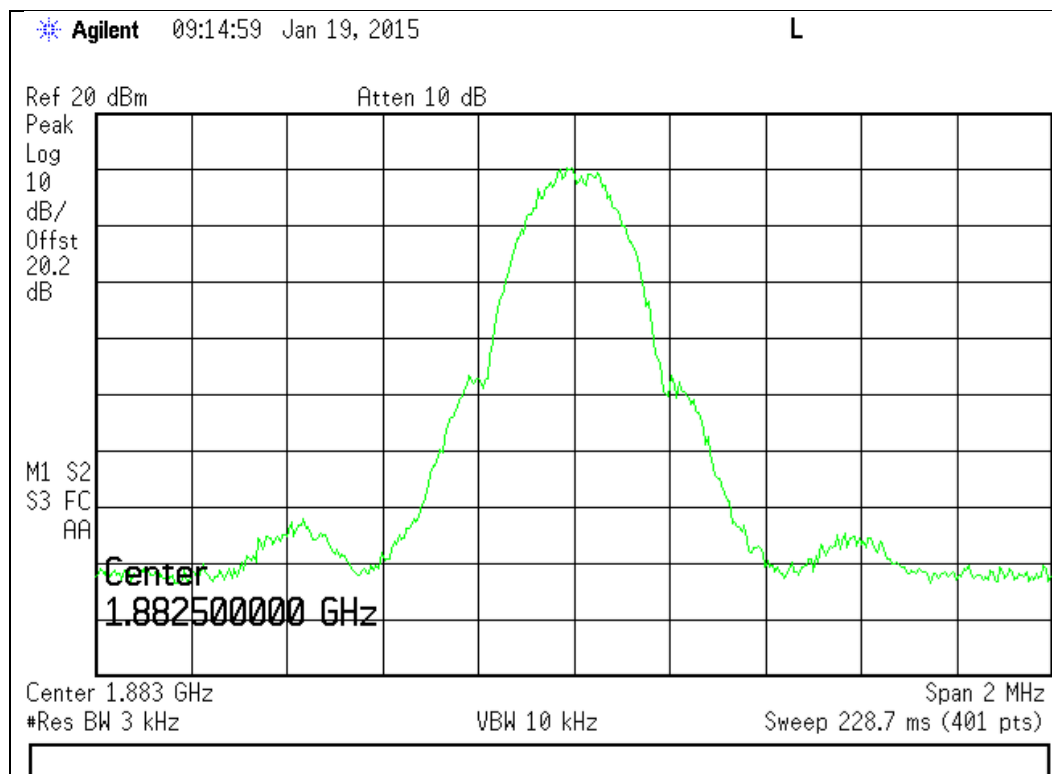


GSM Downlink Test Plots

728 - 746 MHz Band

Input

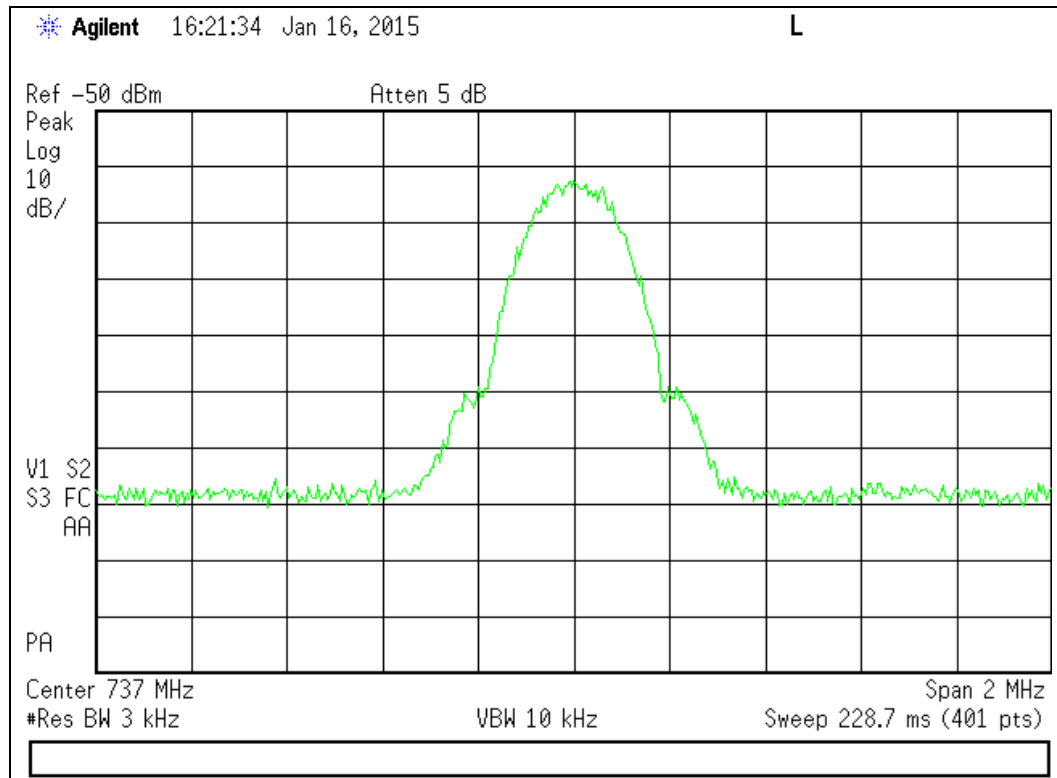


Output

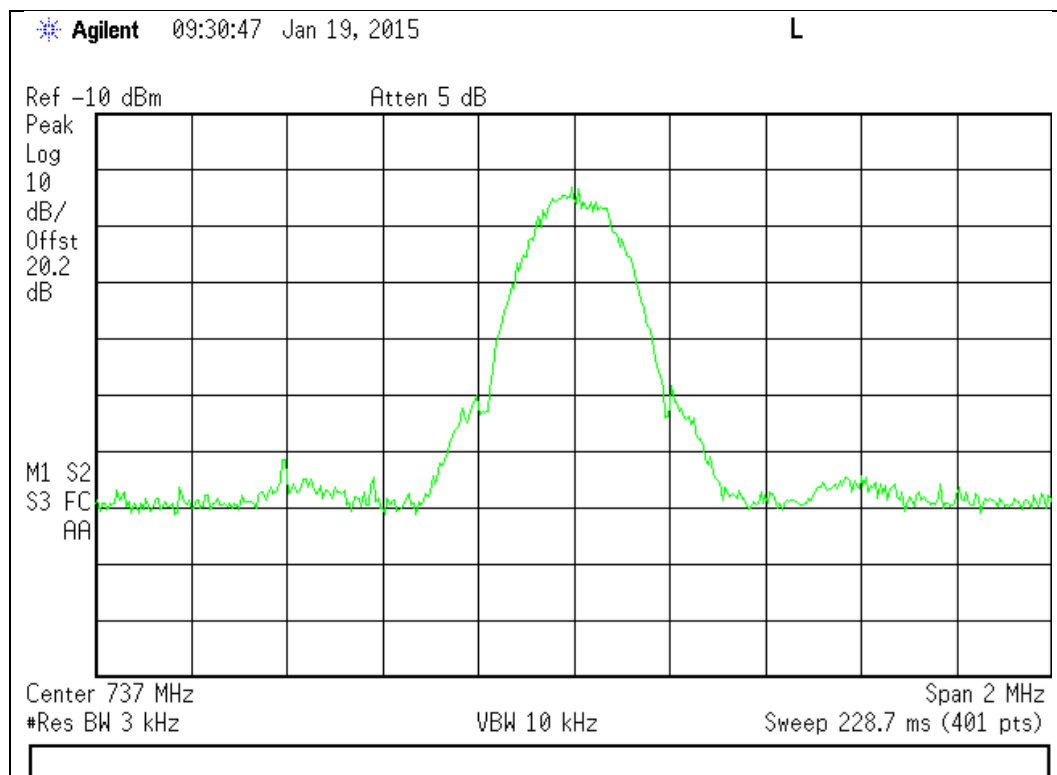




746 - 757 MHz Band

Input

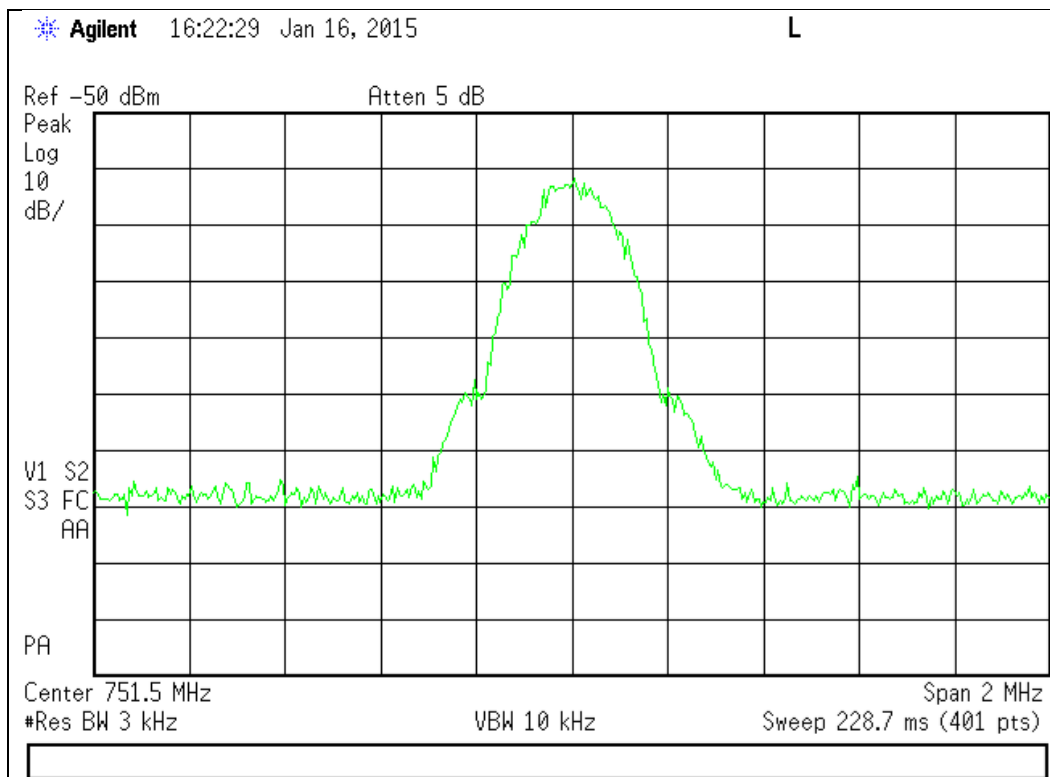


Output

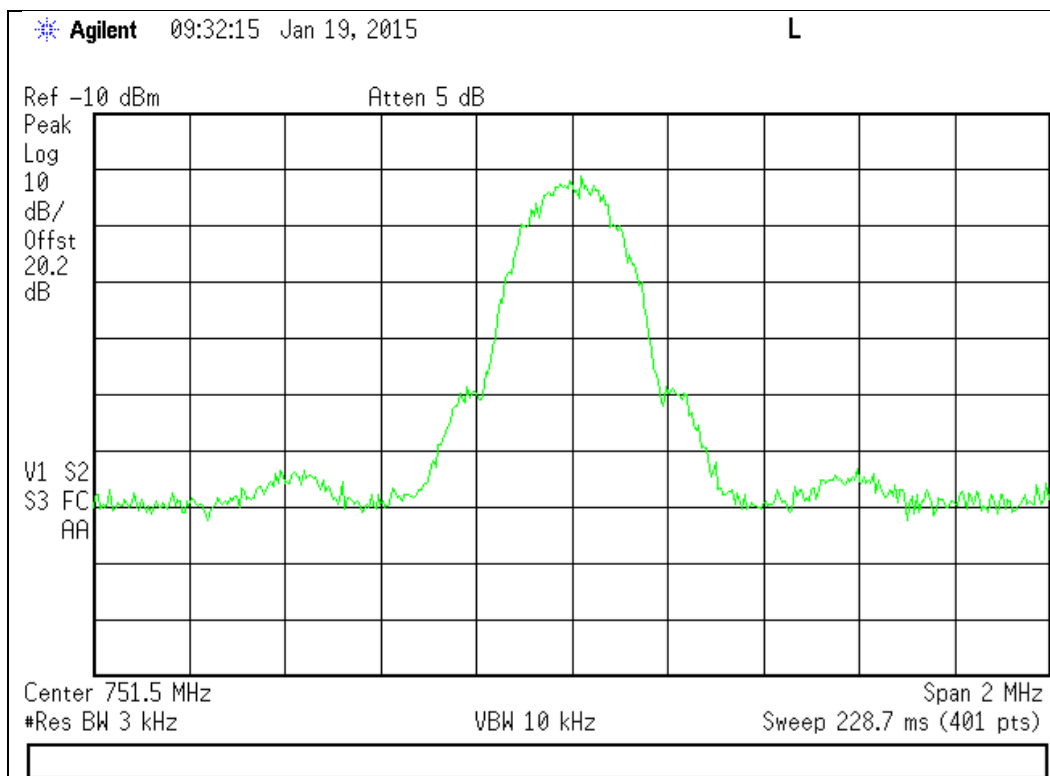




869 - 894 MHz Band

Input

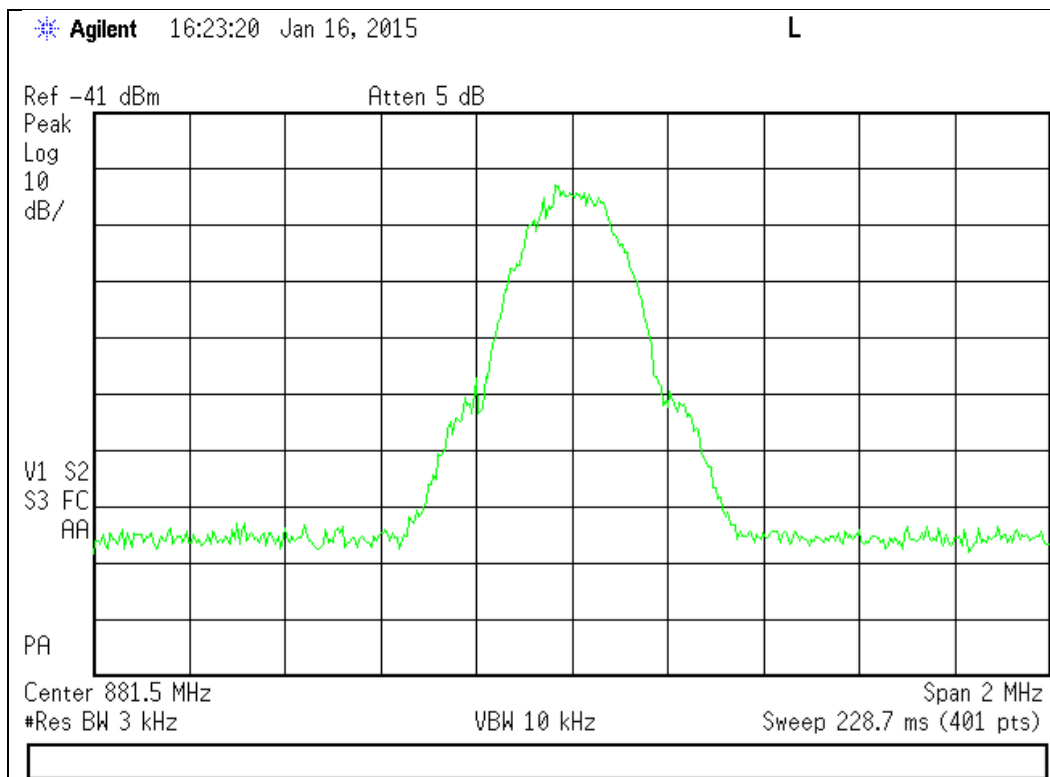


Output

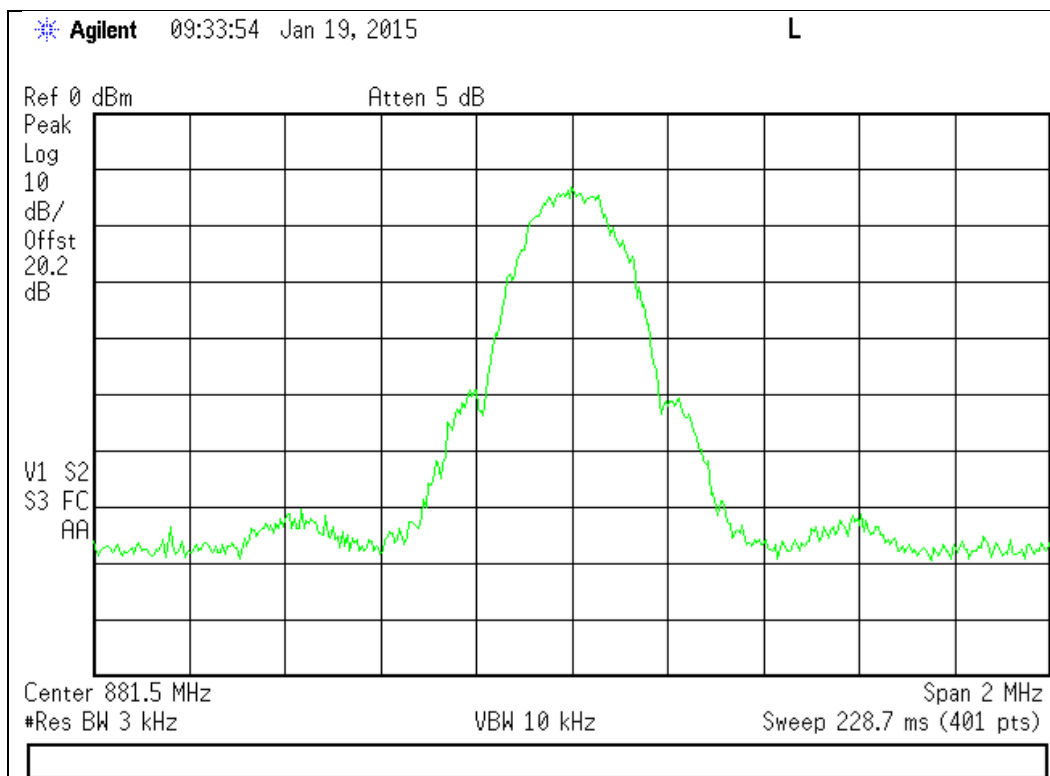




1930 - 1995 MHz Band

Input

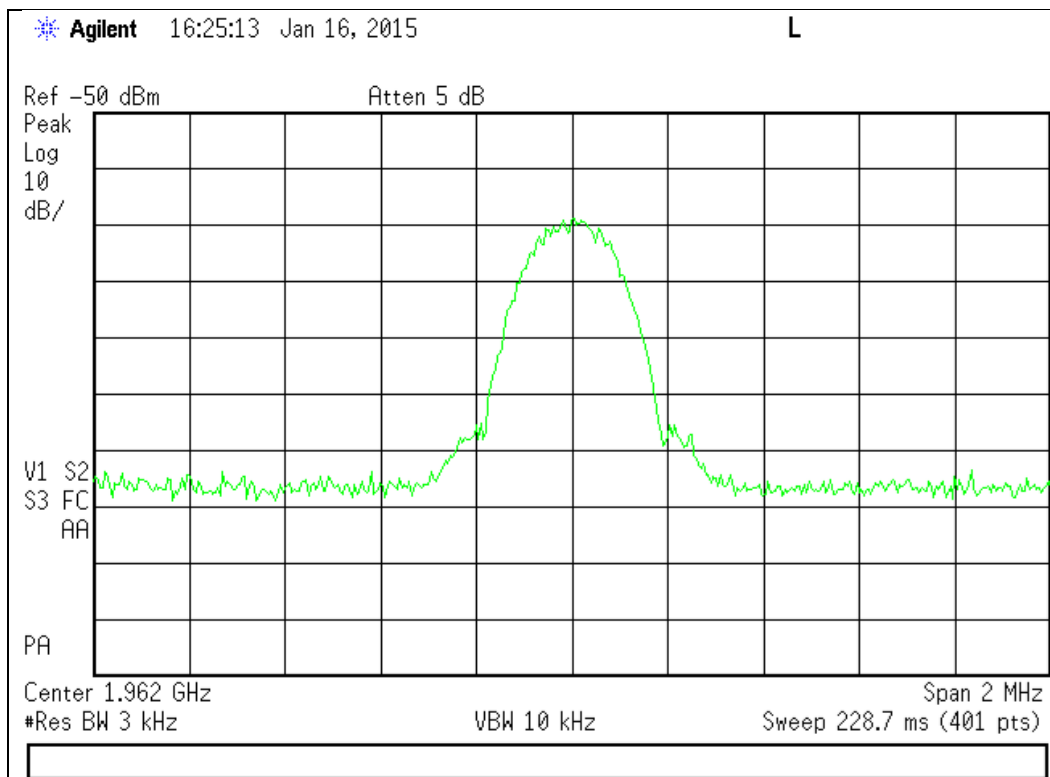


Output

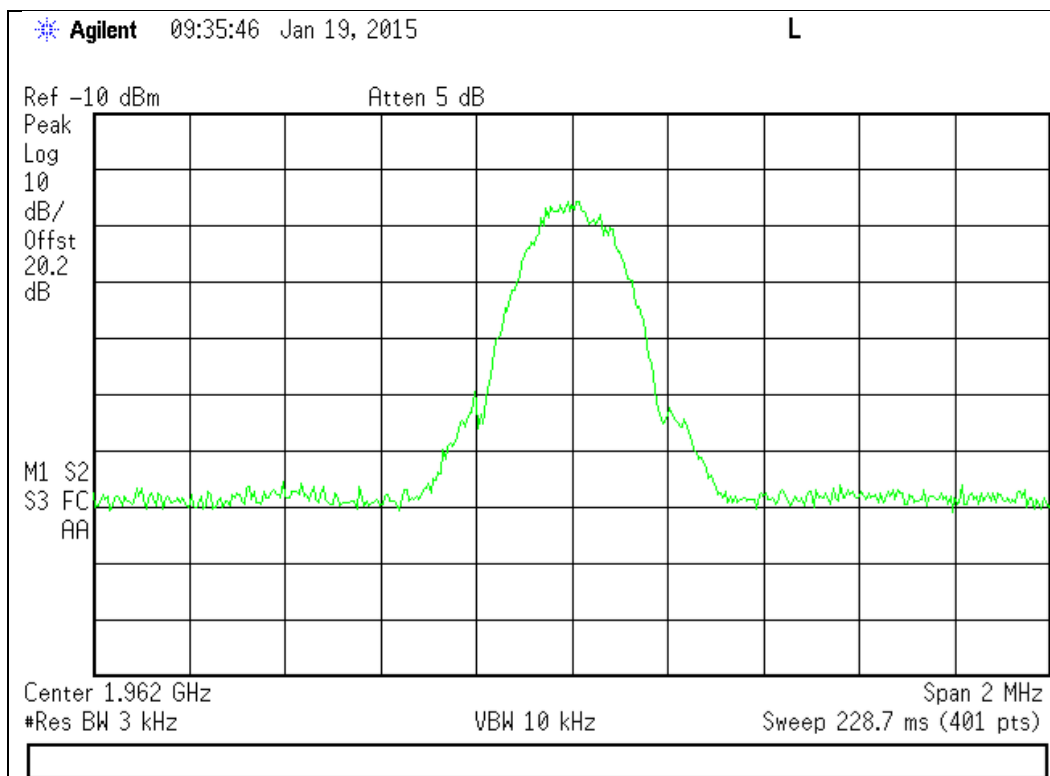




2110 - 2155 MHz Band

Input

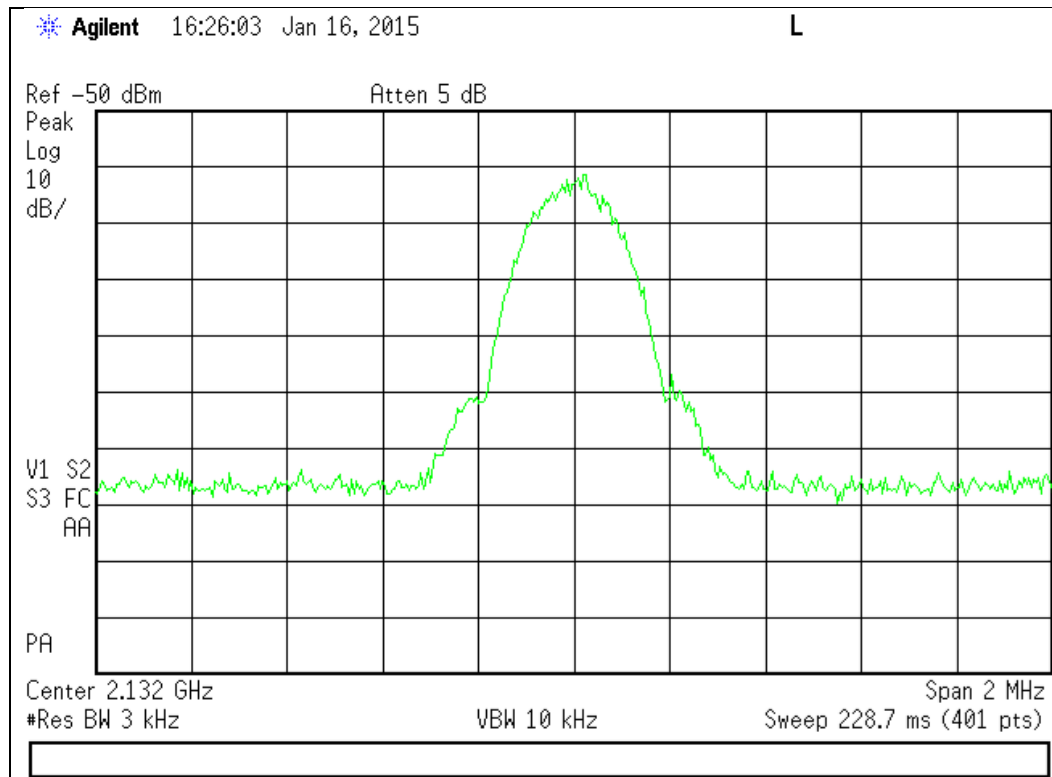


Output

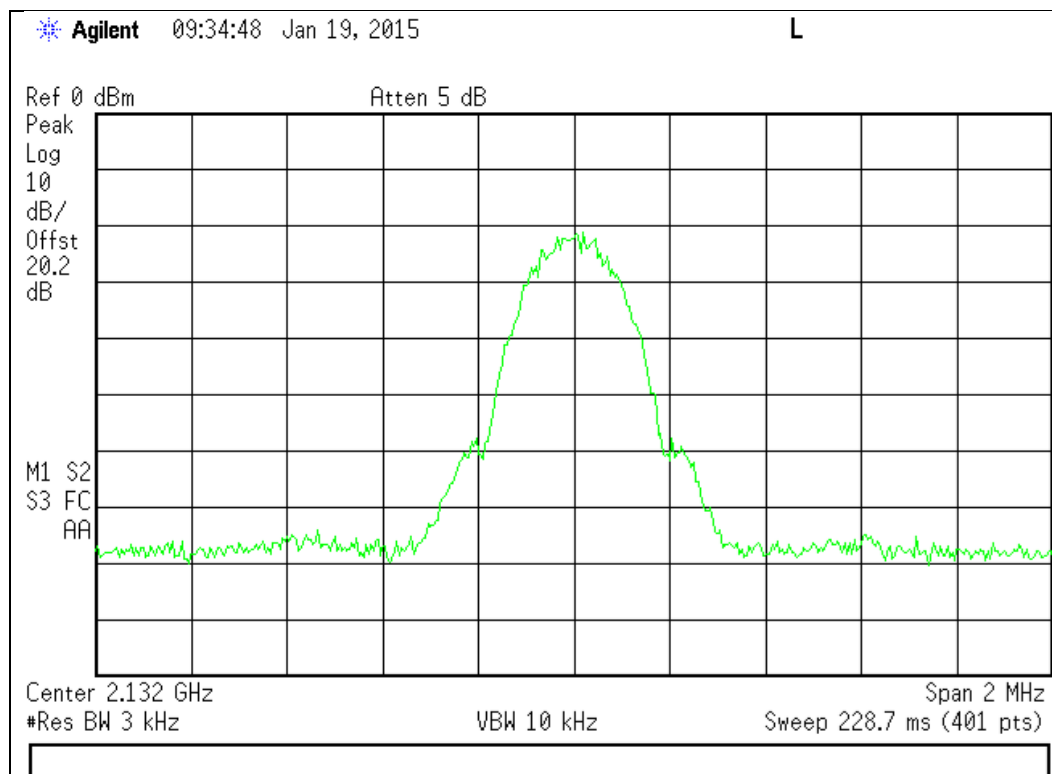


CDMA Uplink Test Plots

698 - 716 MHz Band

Input

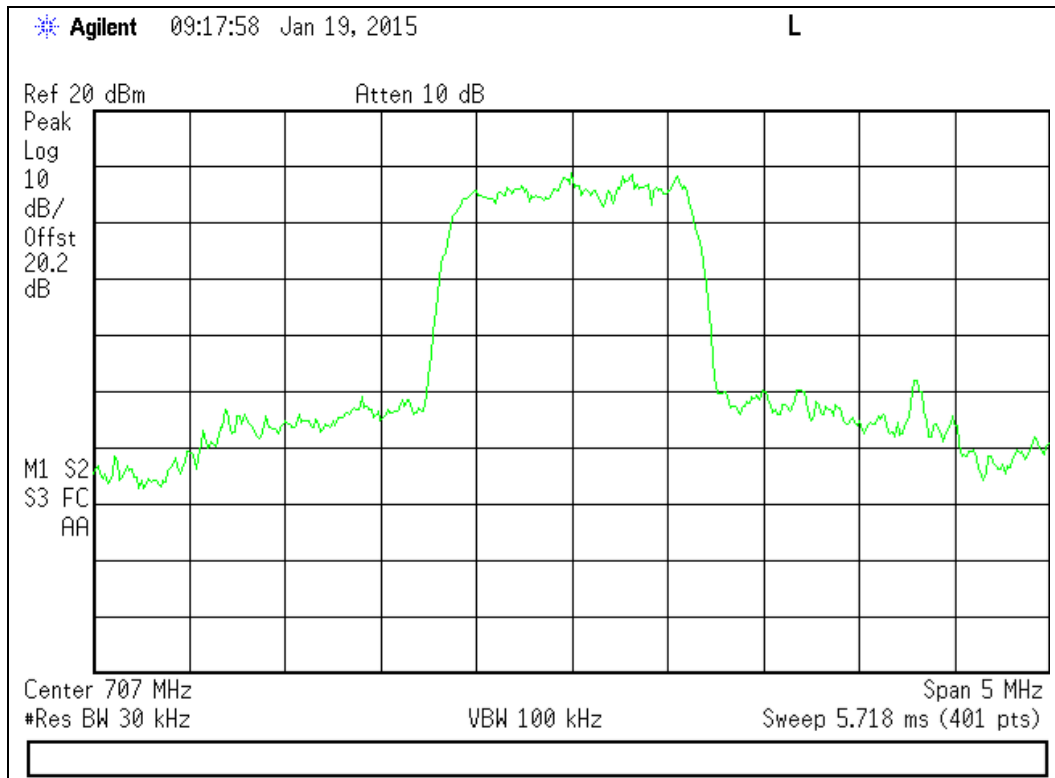


Output

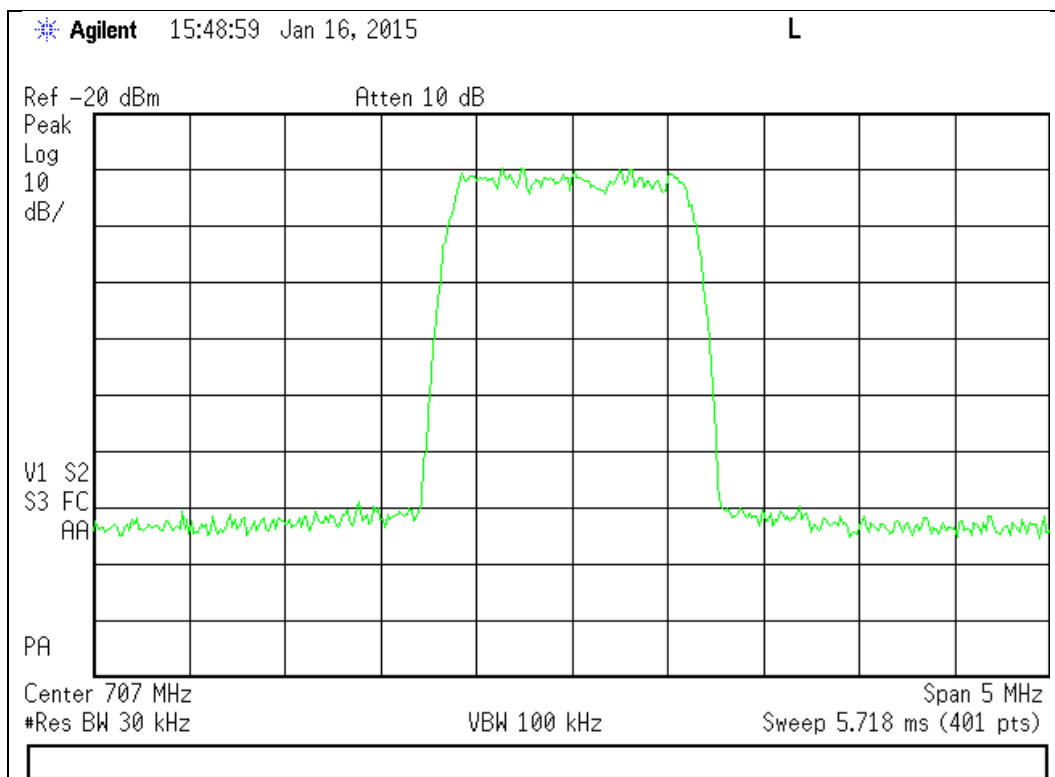




776 - 787 MHz Band

Input

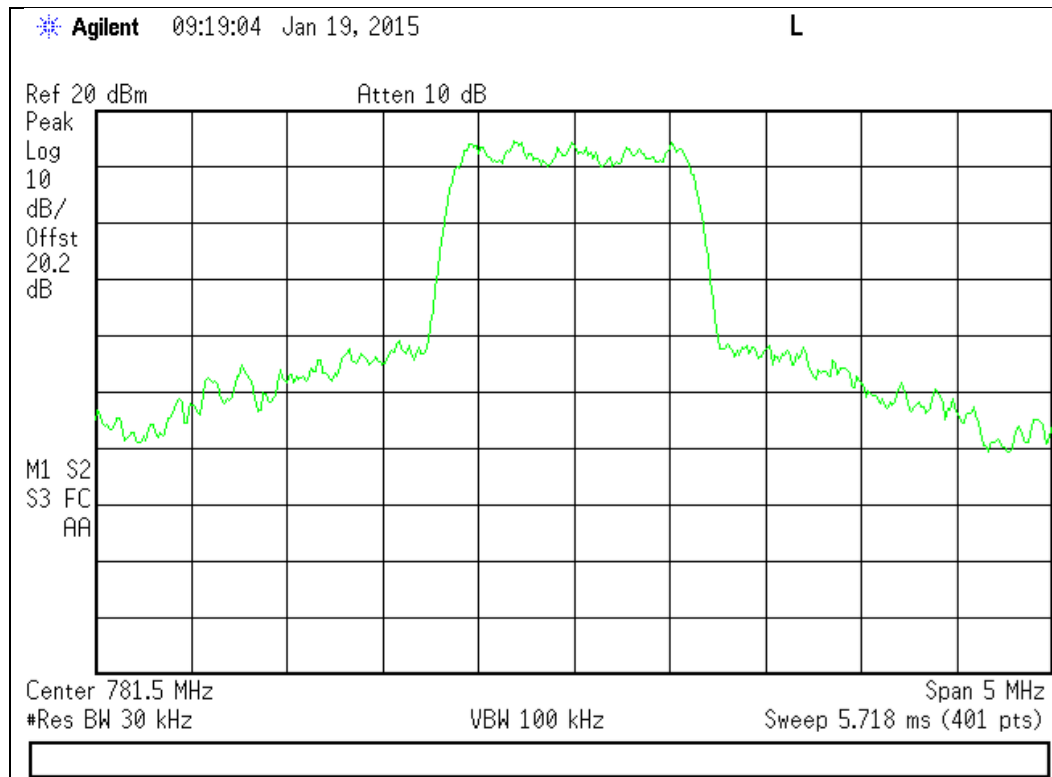


Output

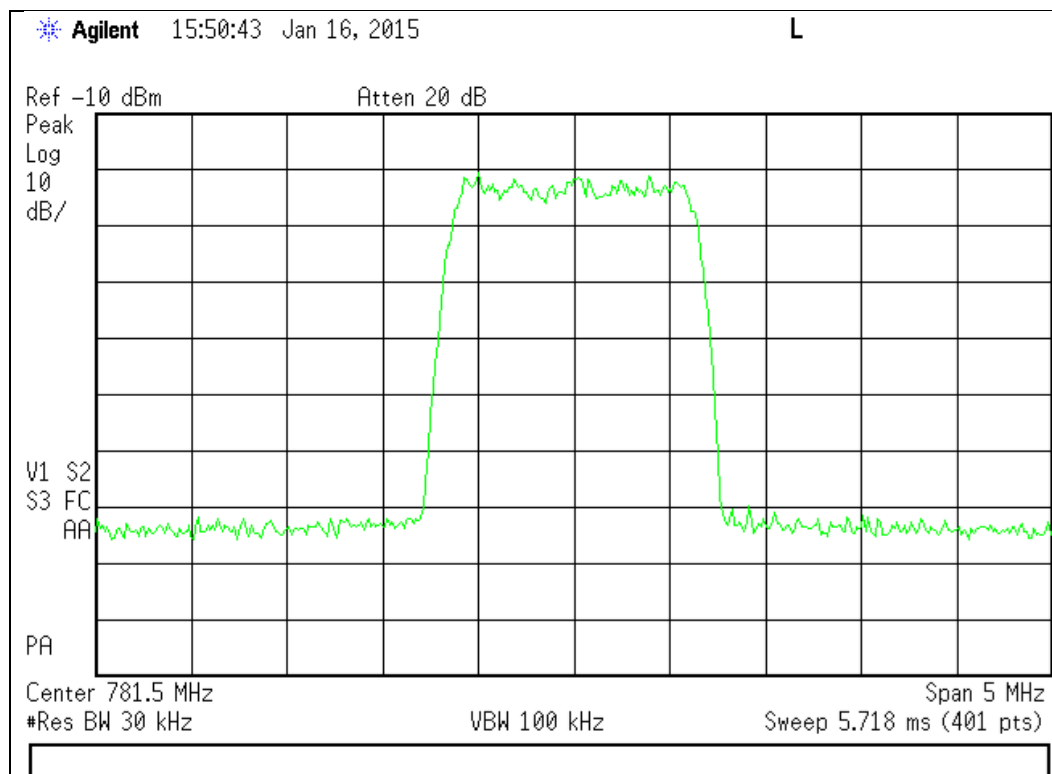


824 - 849 MHz Band

Input

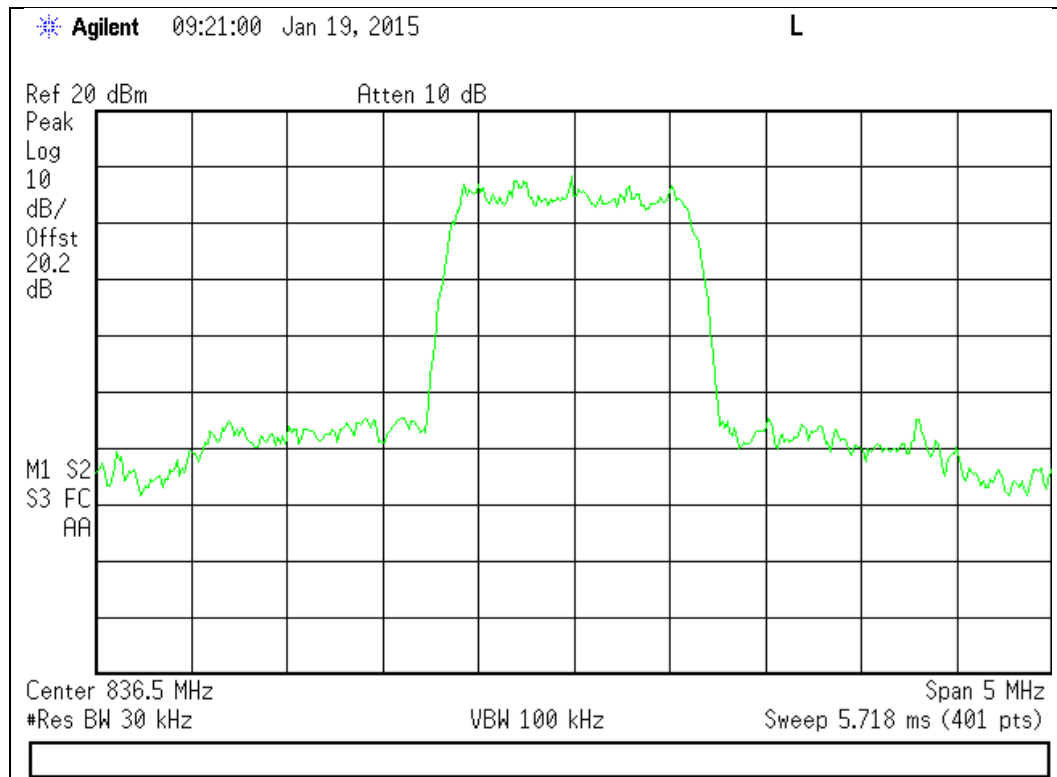


Output

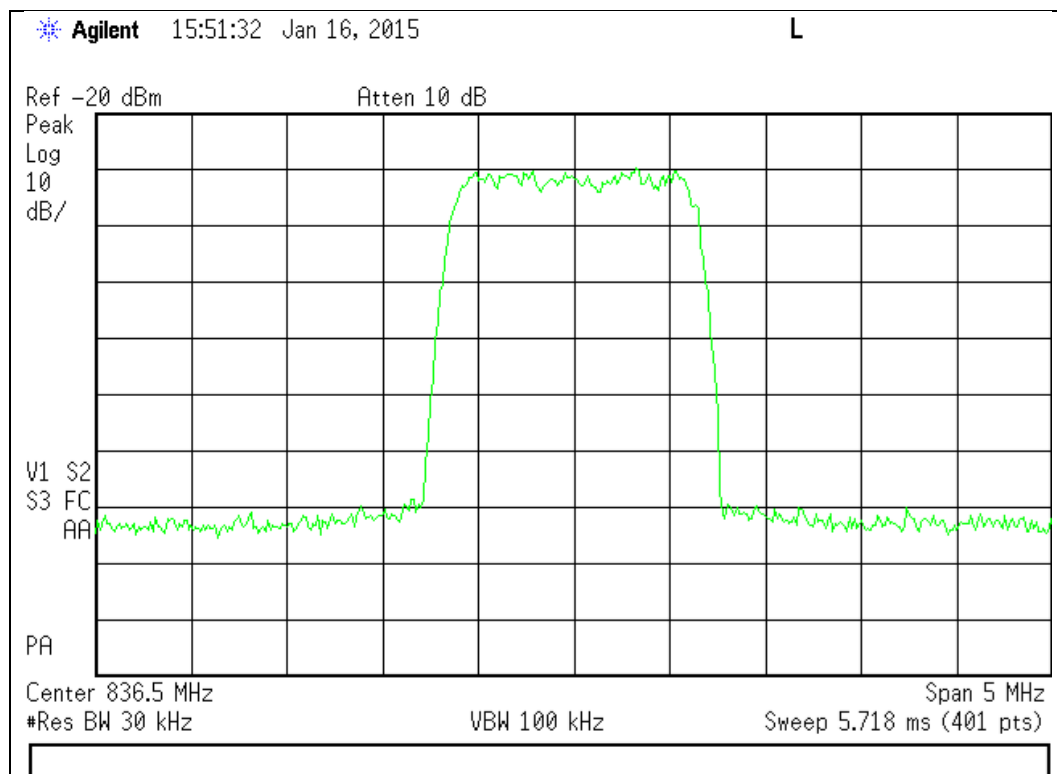




1710 - 1755 MHz Band

Input

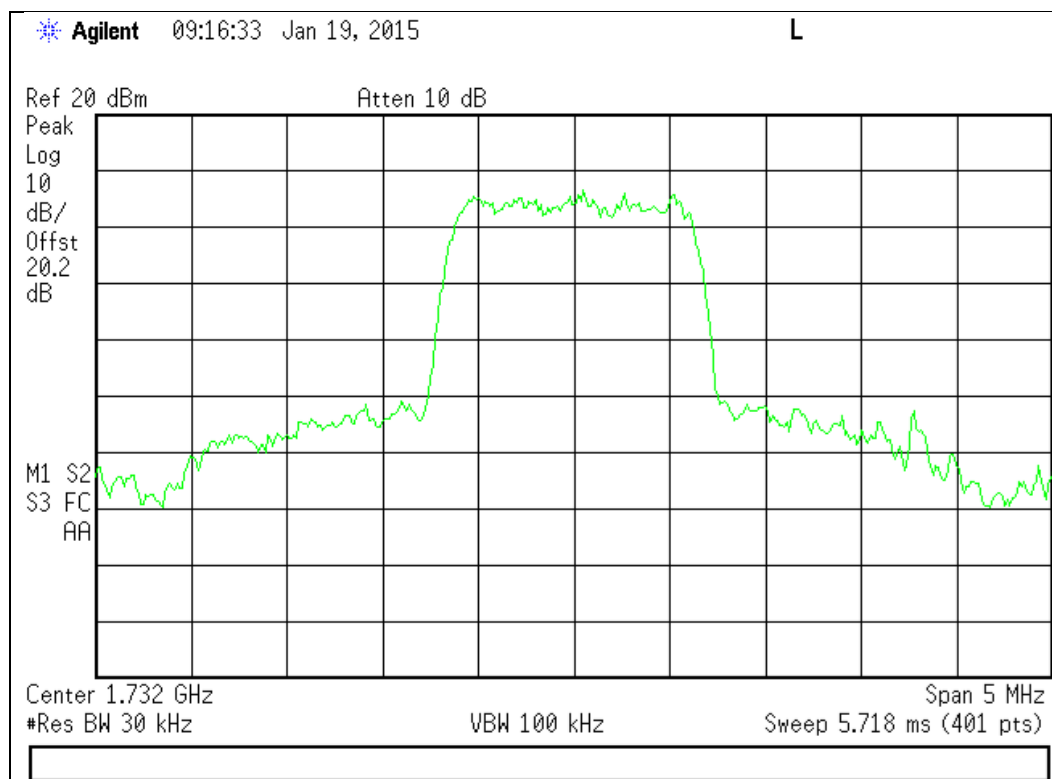


Output

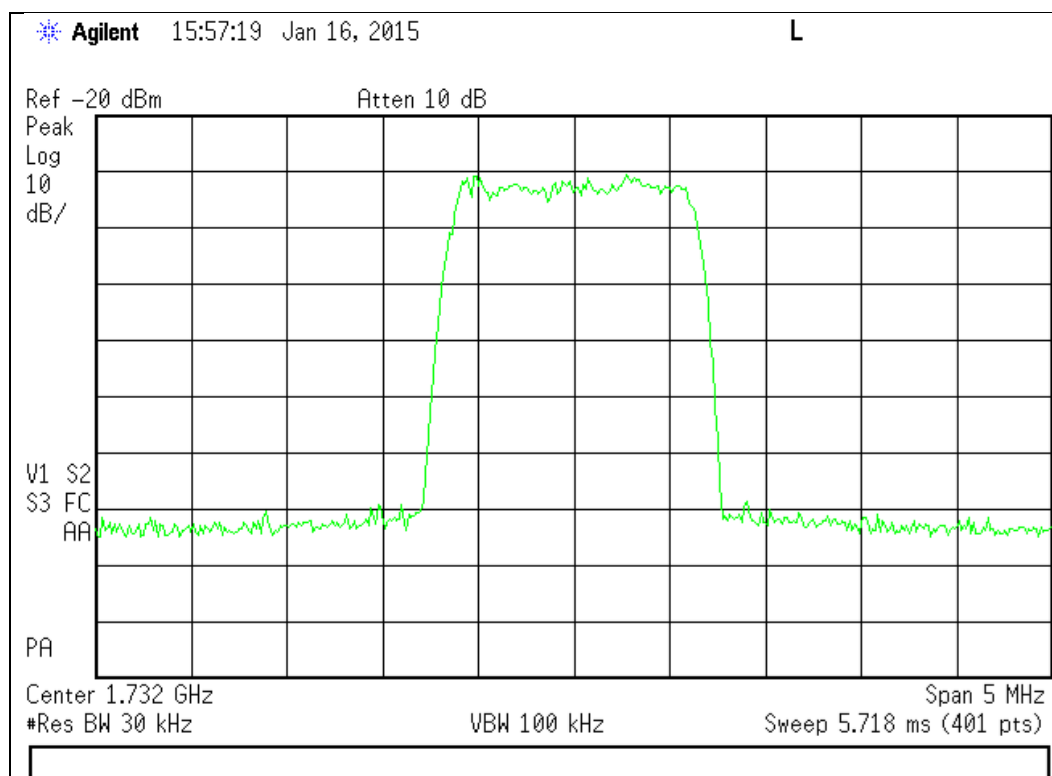




1850 - 1915 MHz Band

Input

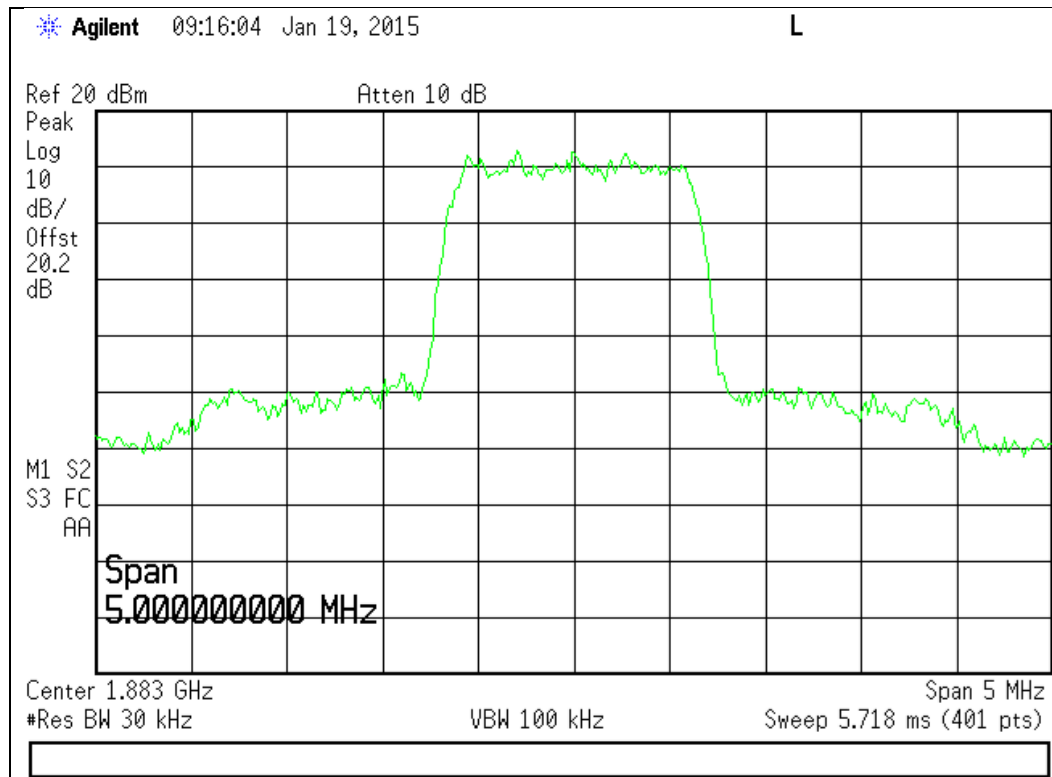


Output

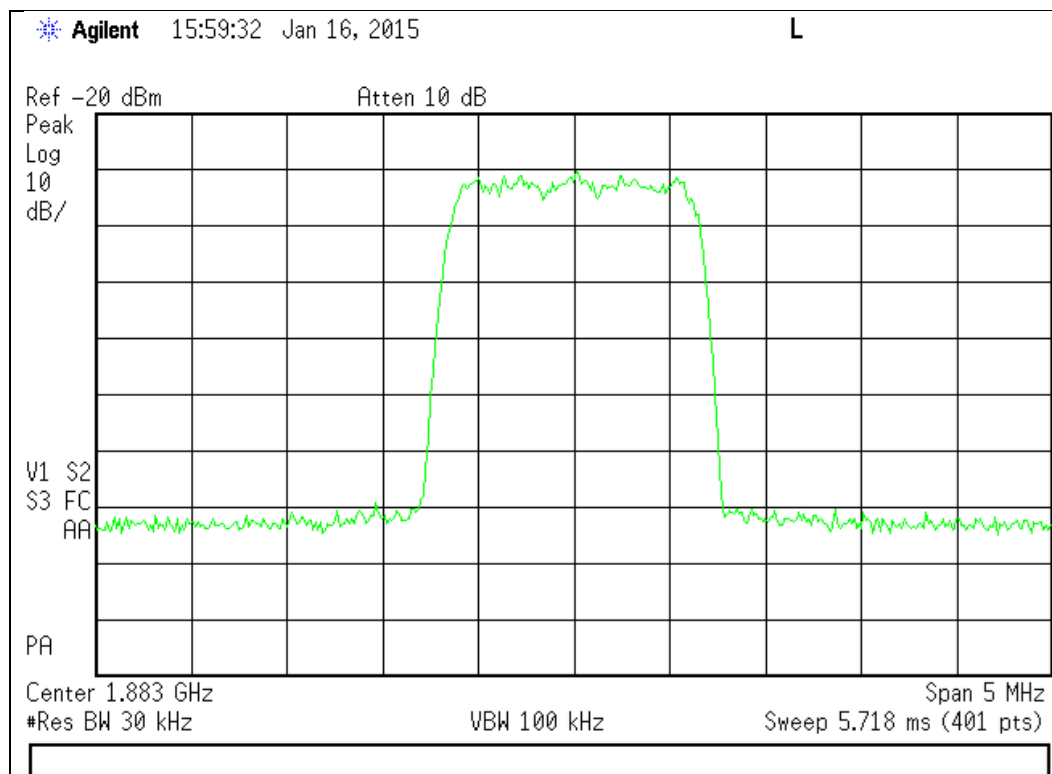


CDMA Downlink Test Plots

728 - 746 MHz Band

Input

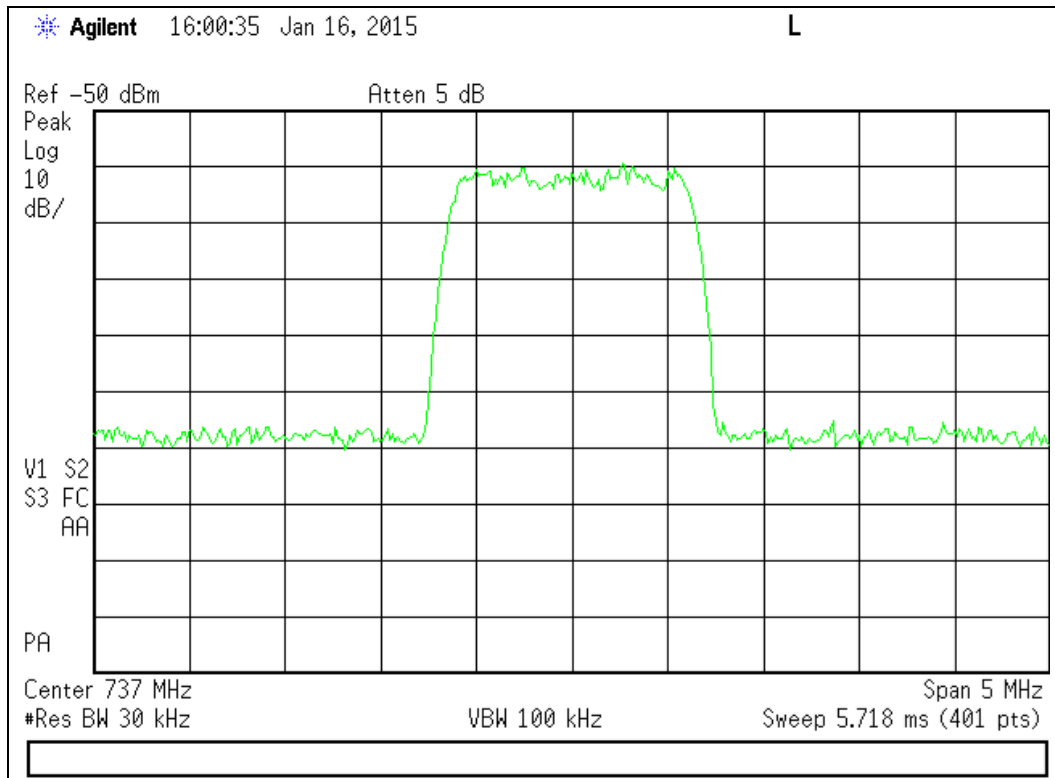


Output

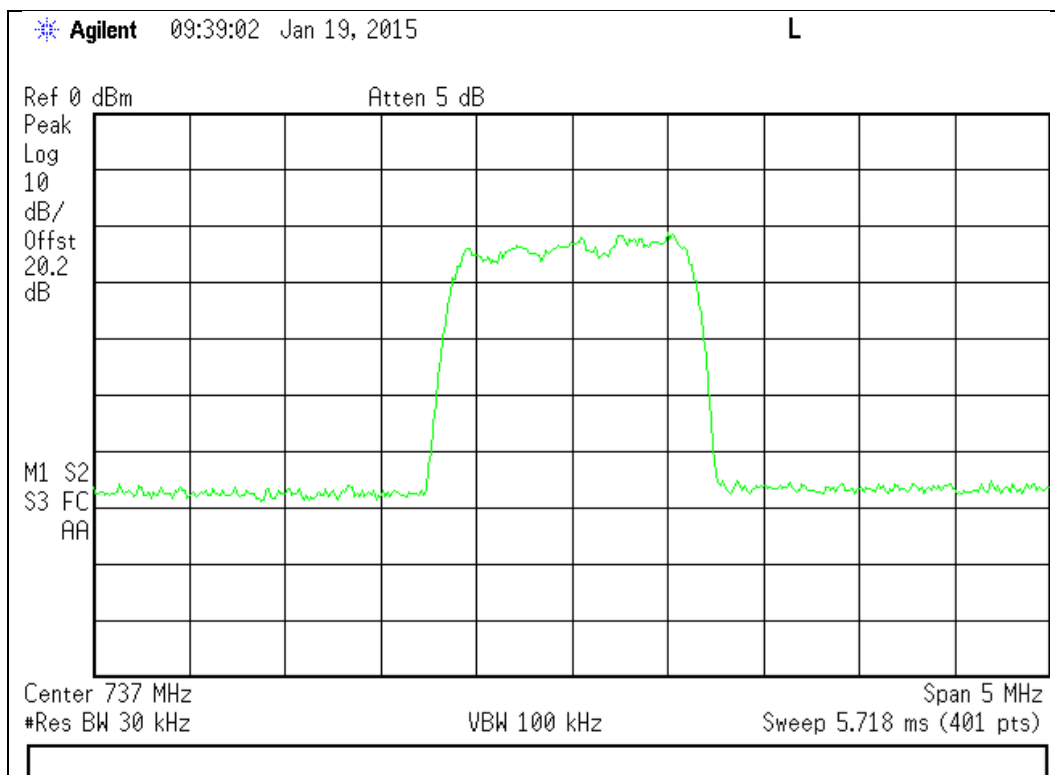


746 - 757 MHz Band

Input

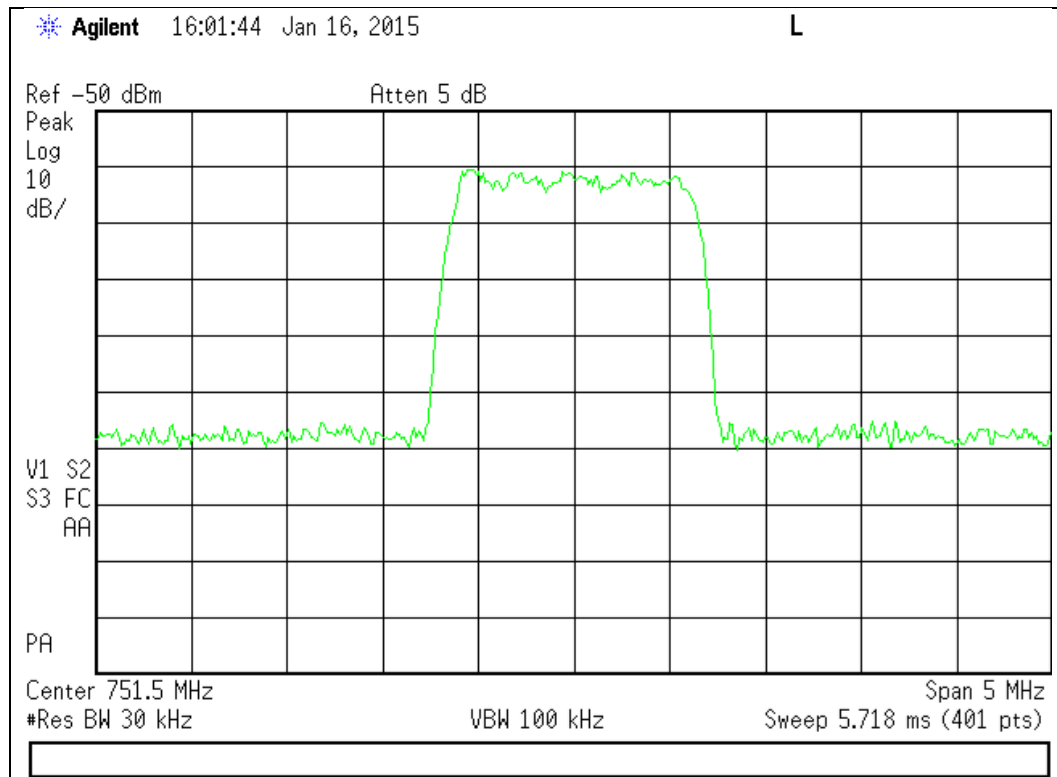


Output

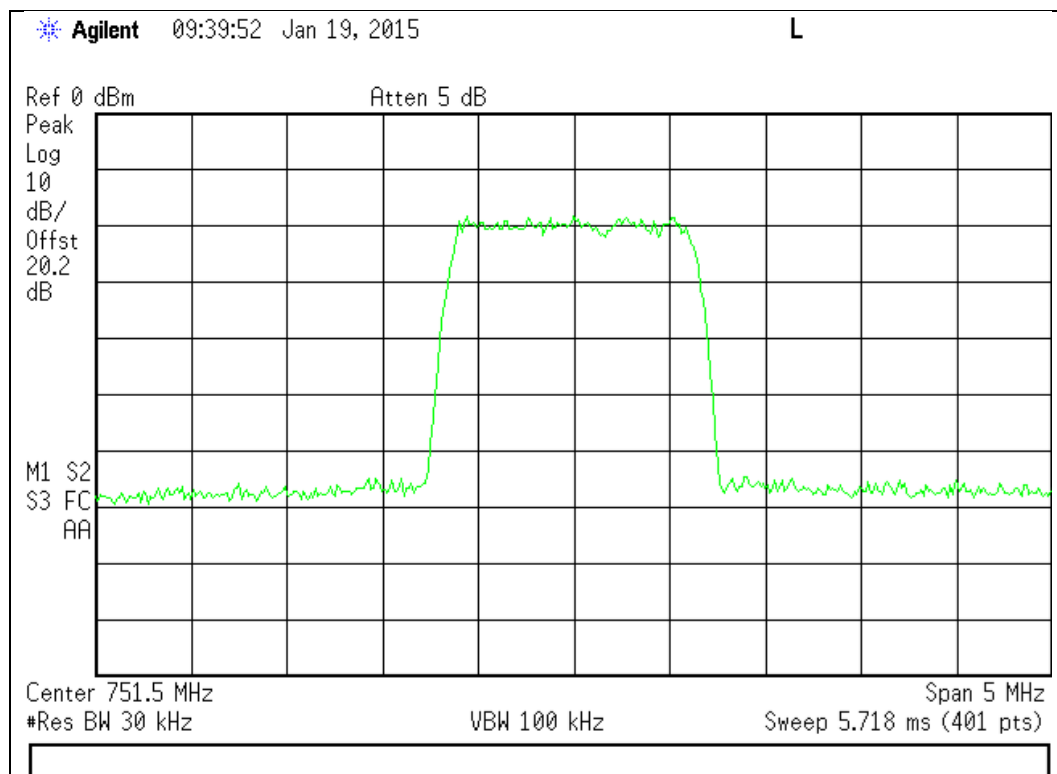




869 - 894 MHz Band

Input

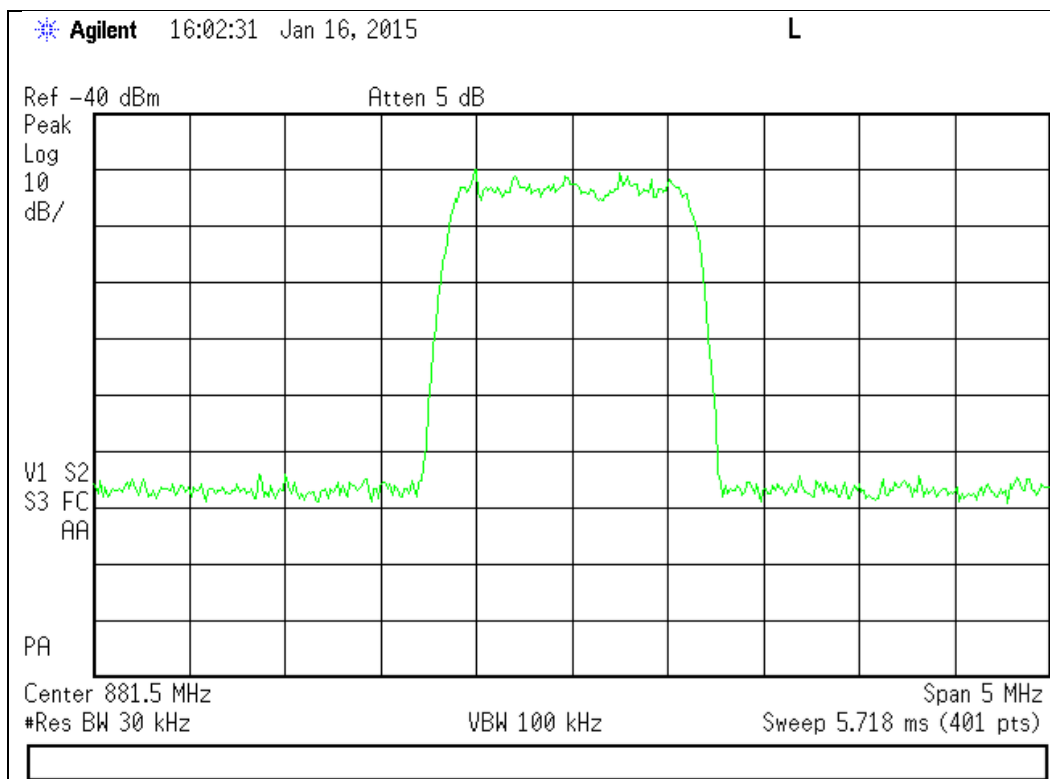


Output

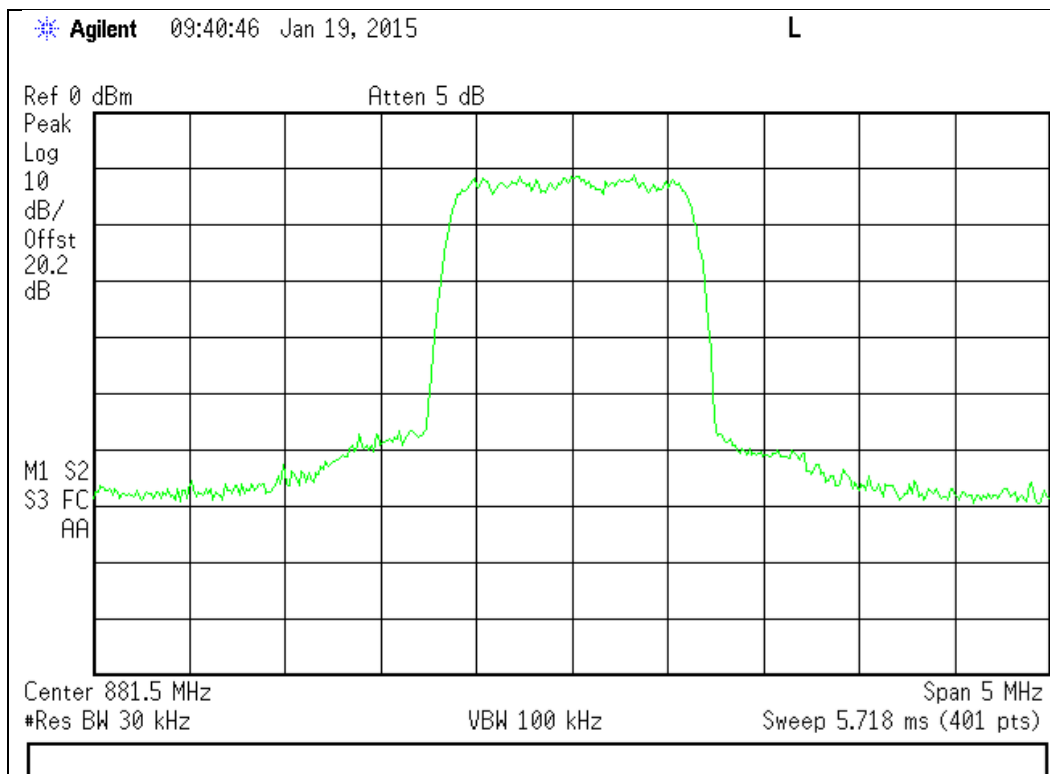


1930 - 1995 MHz Band

Input

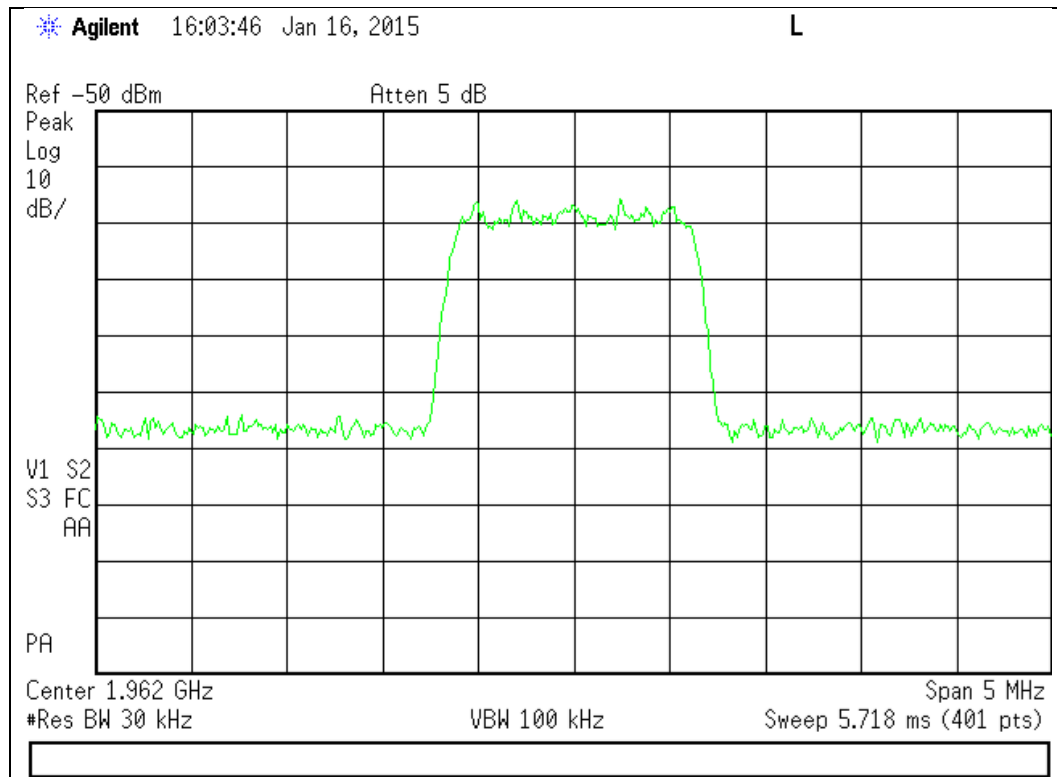


Output

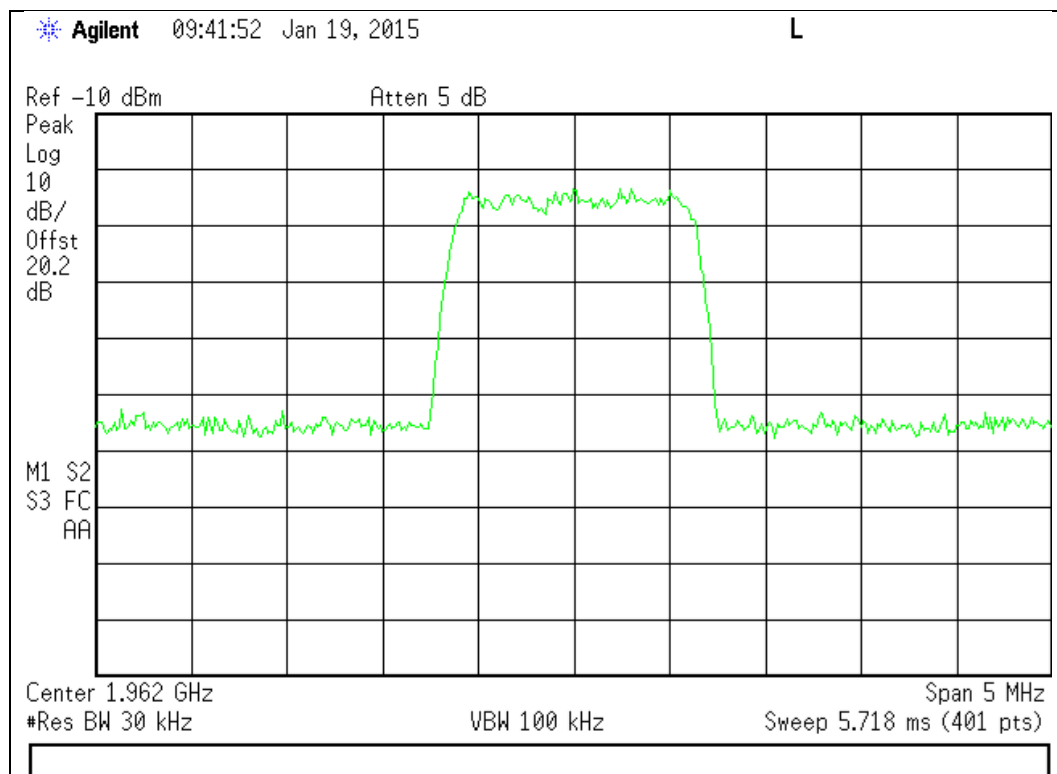


2110 - 2155 MHz Band

Input

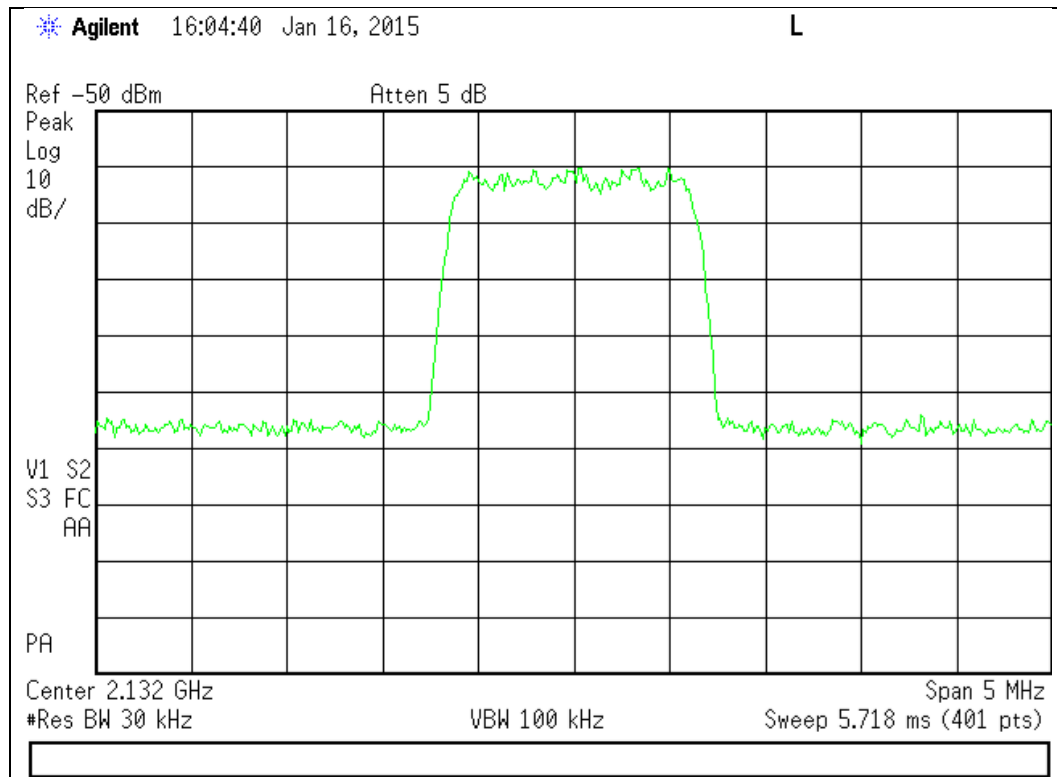

Output

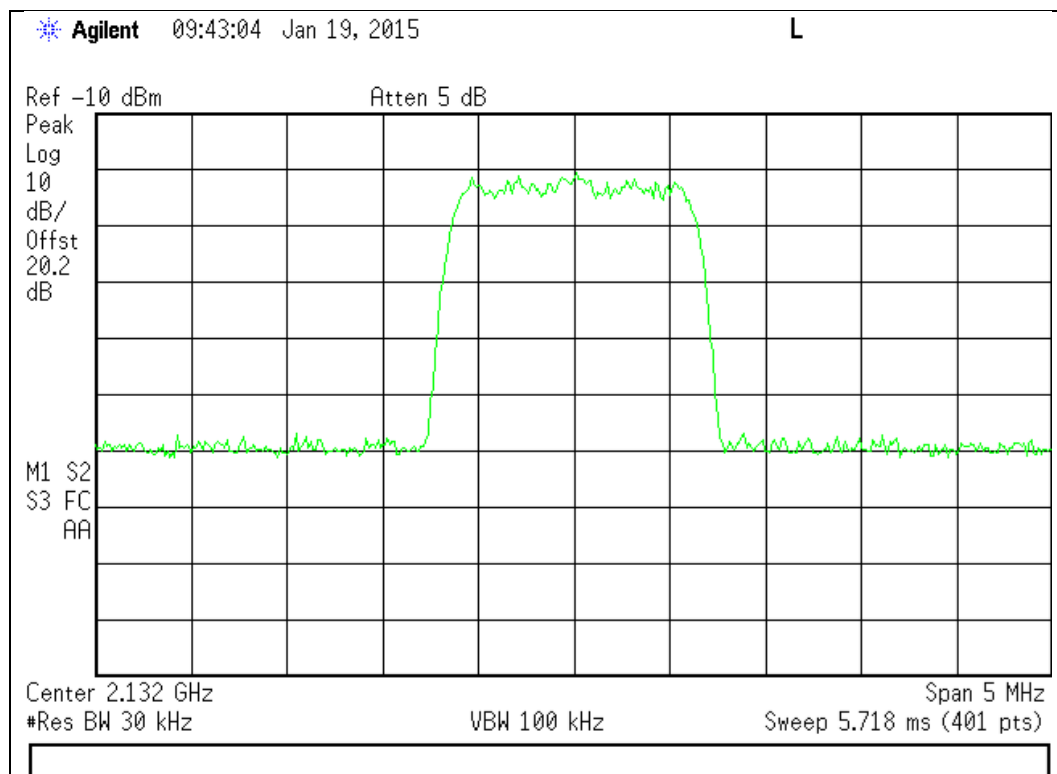





WCDMA Uplink Test Plots

698 - 716 MHz Band

Input

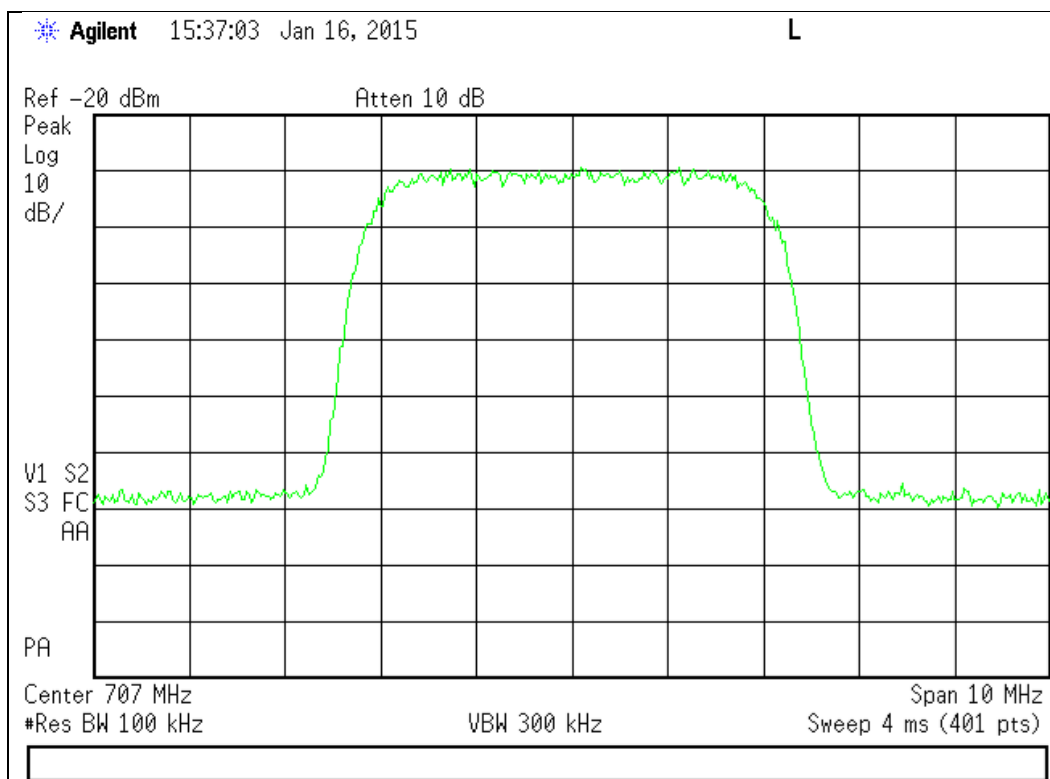


Output

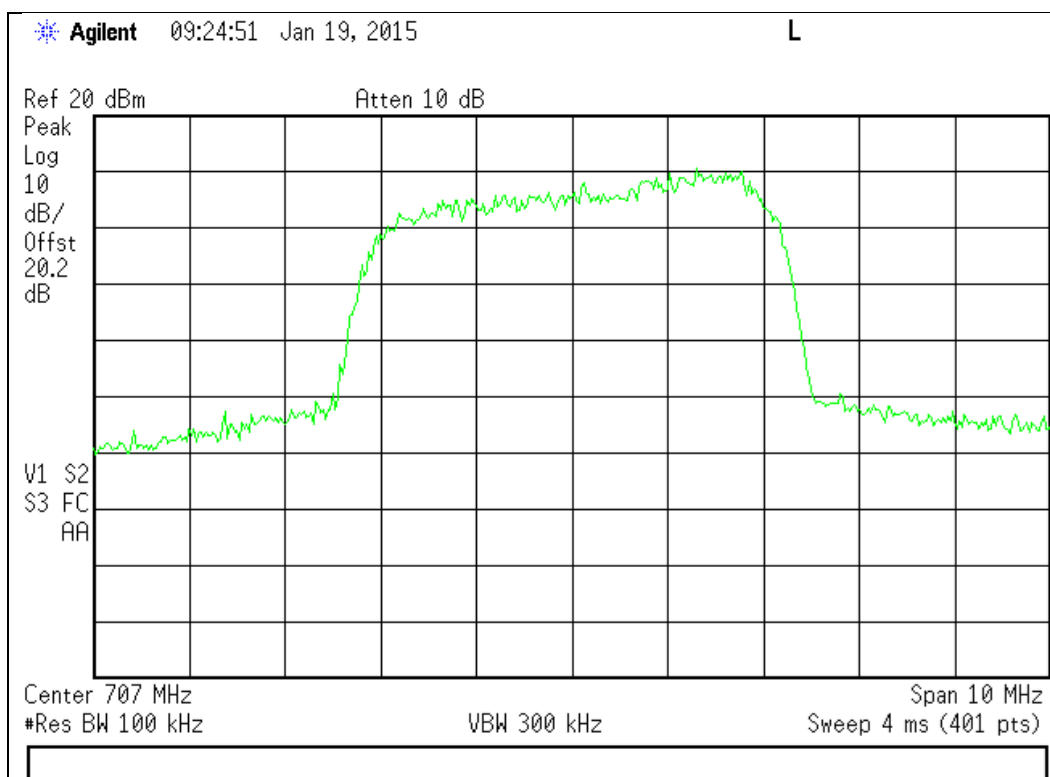




776 - 787 MHz Band

Input

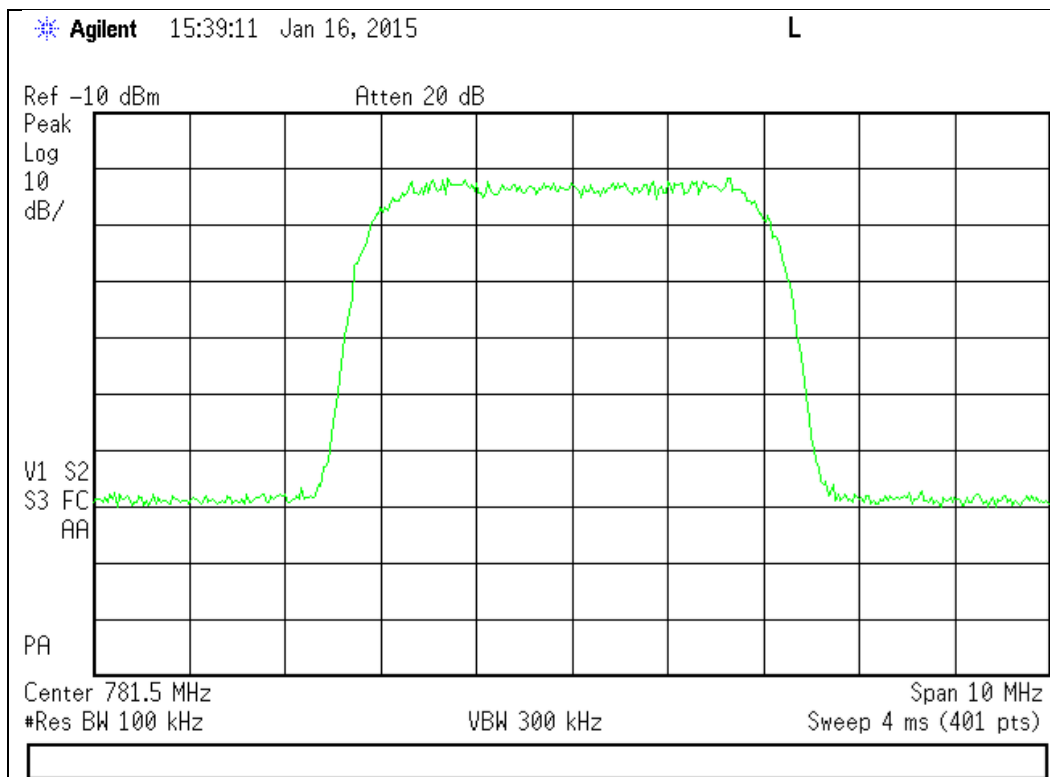


Output

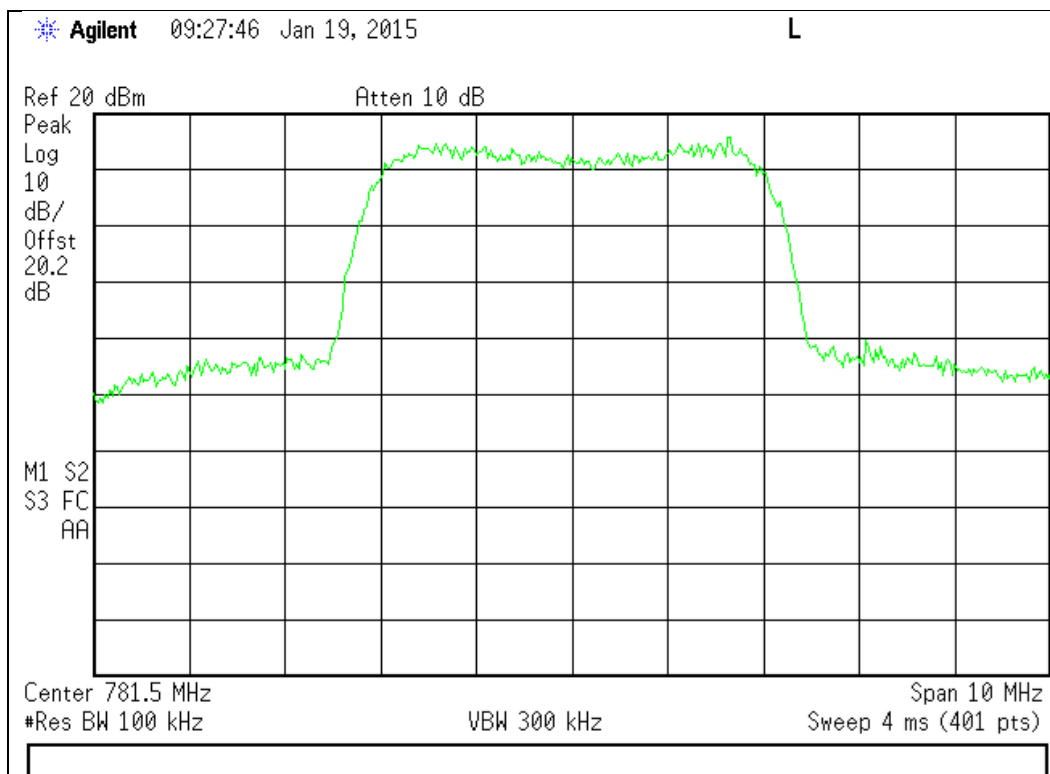


824 - 849 MHz Band

Input

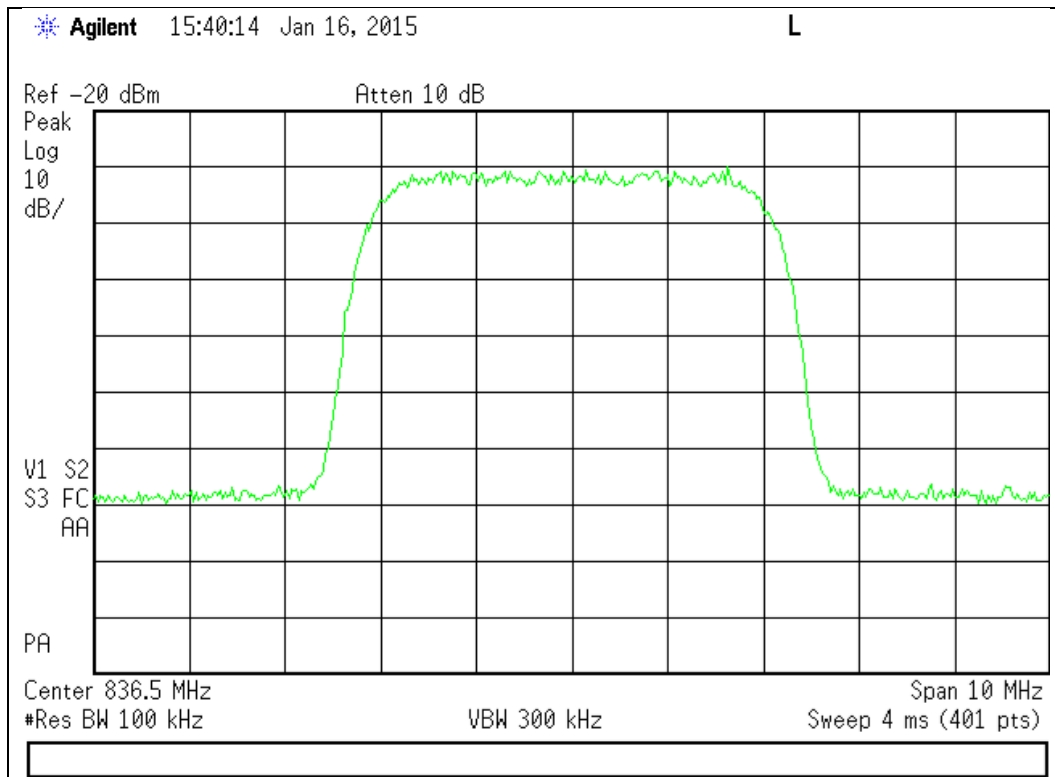


Output

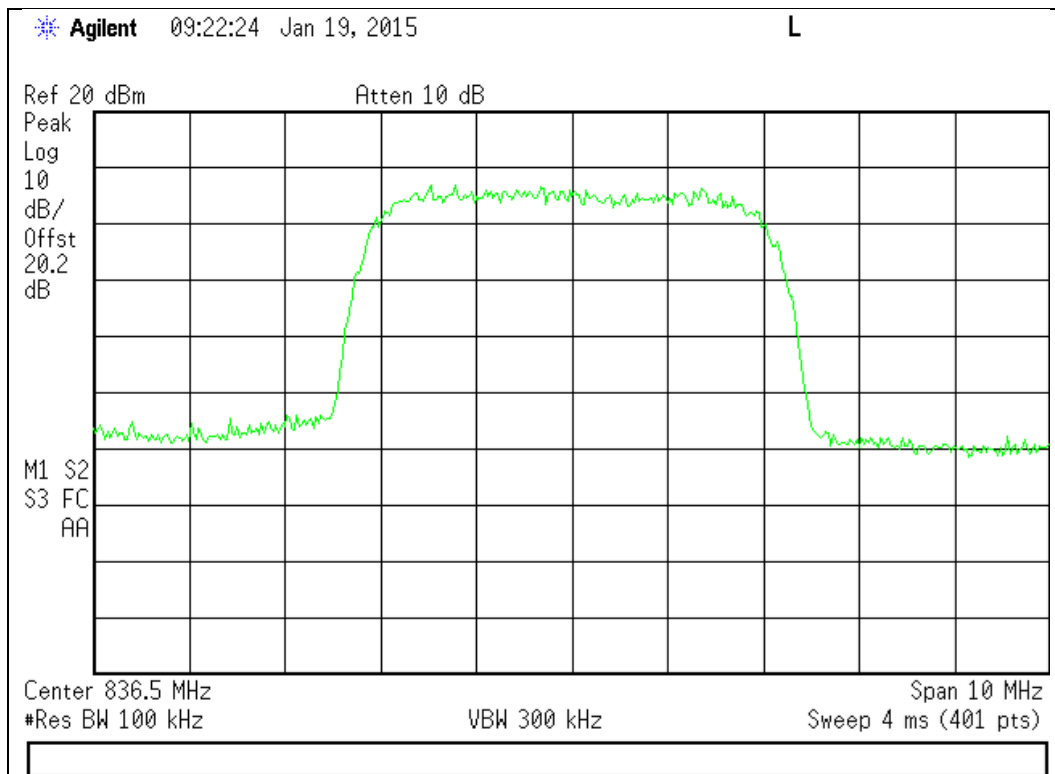




1710 - 1755 MHz Band

Input

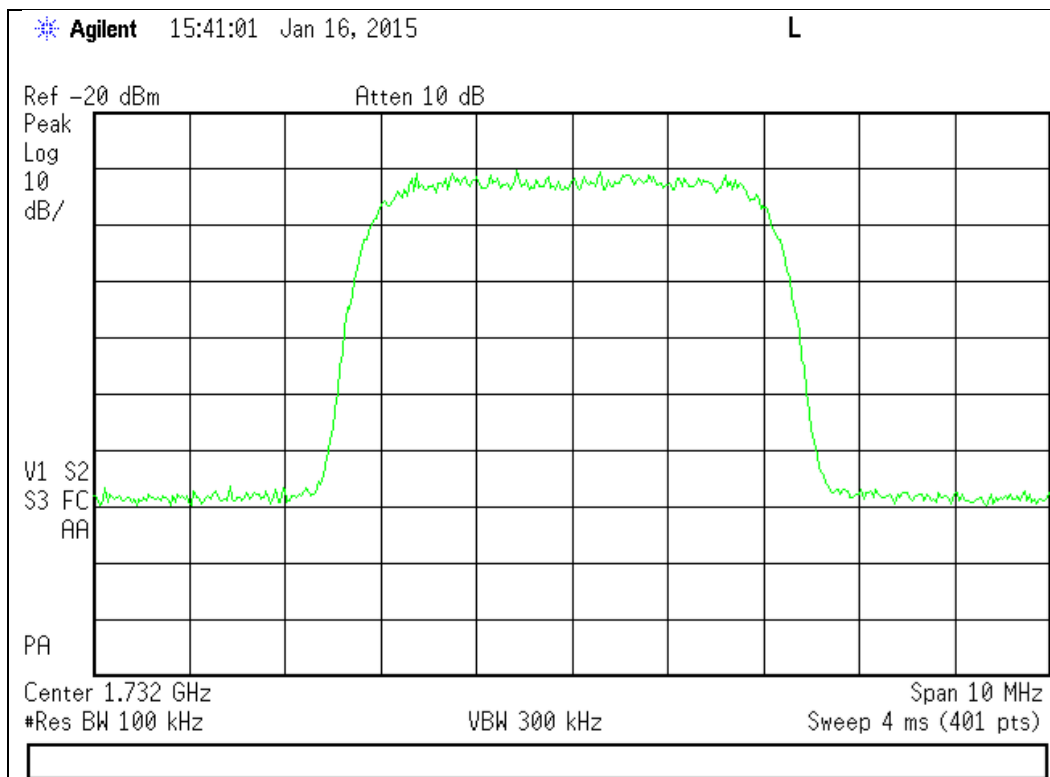


Output

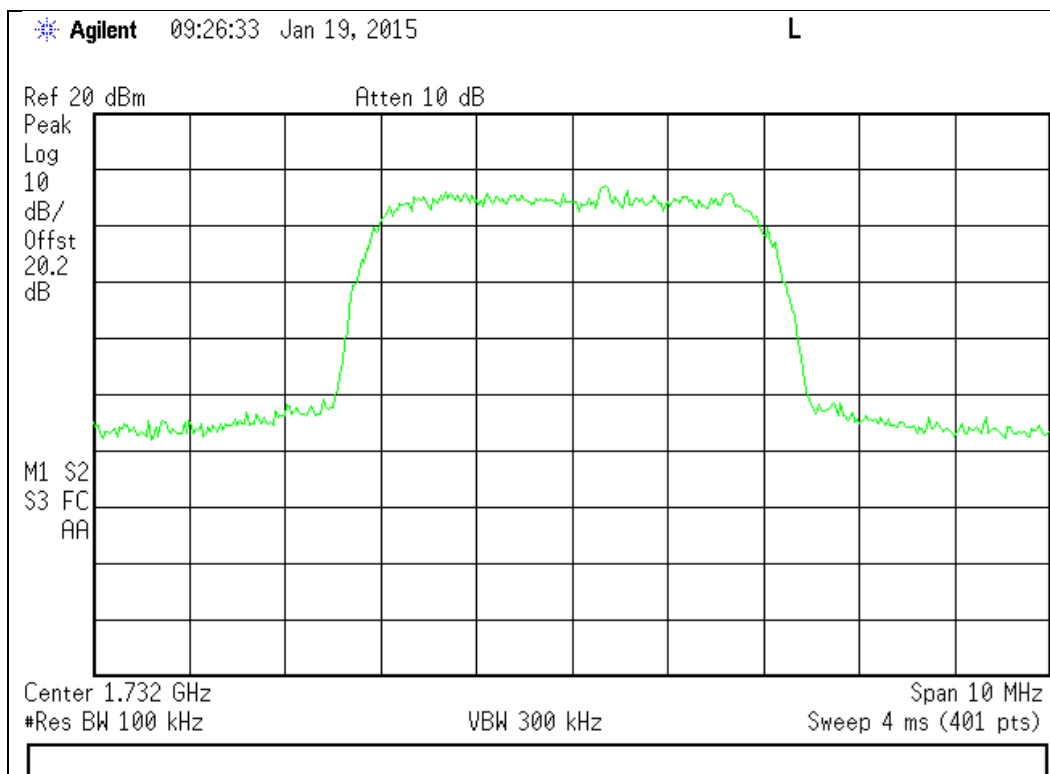




1850 - 1915 MHz Band

Input

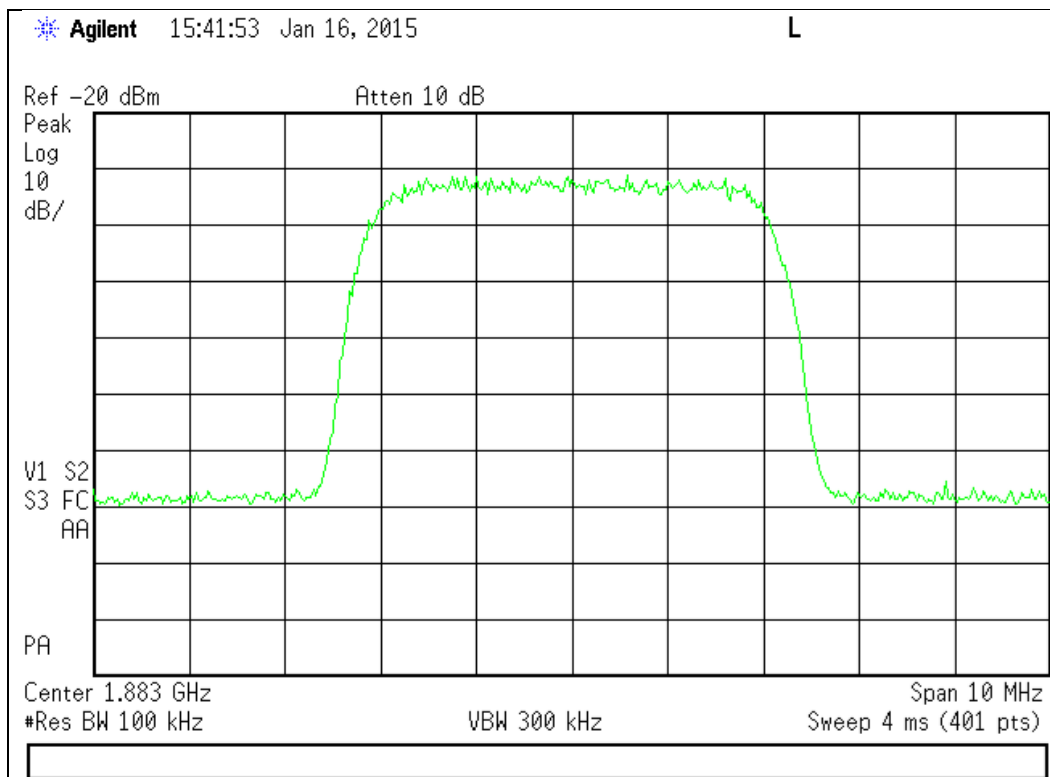


Output

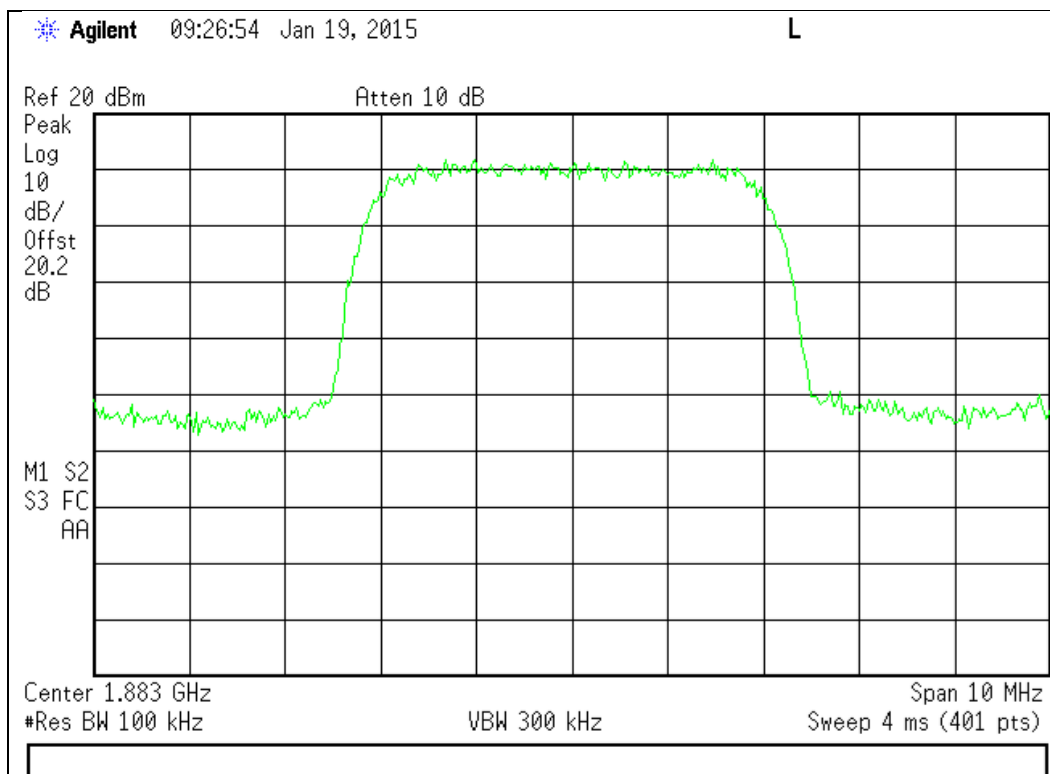


WCDMA Downlink Test Plots

728 - 746 MHz Band

Input

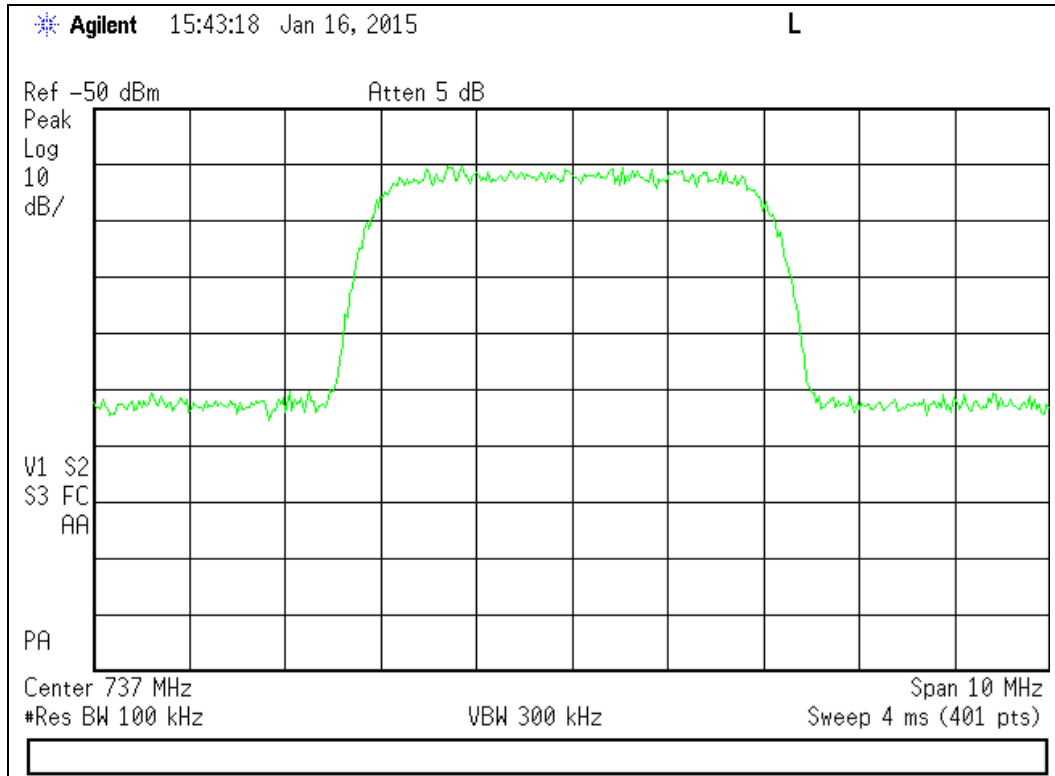


Output

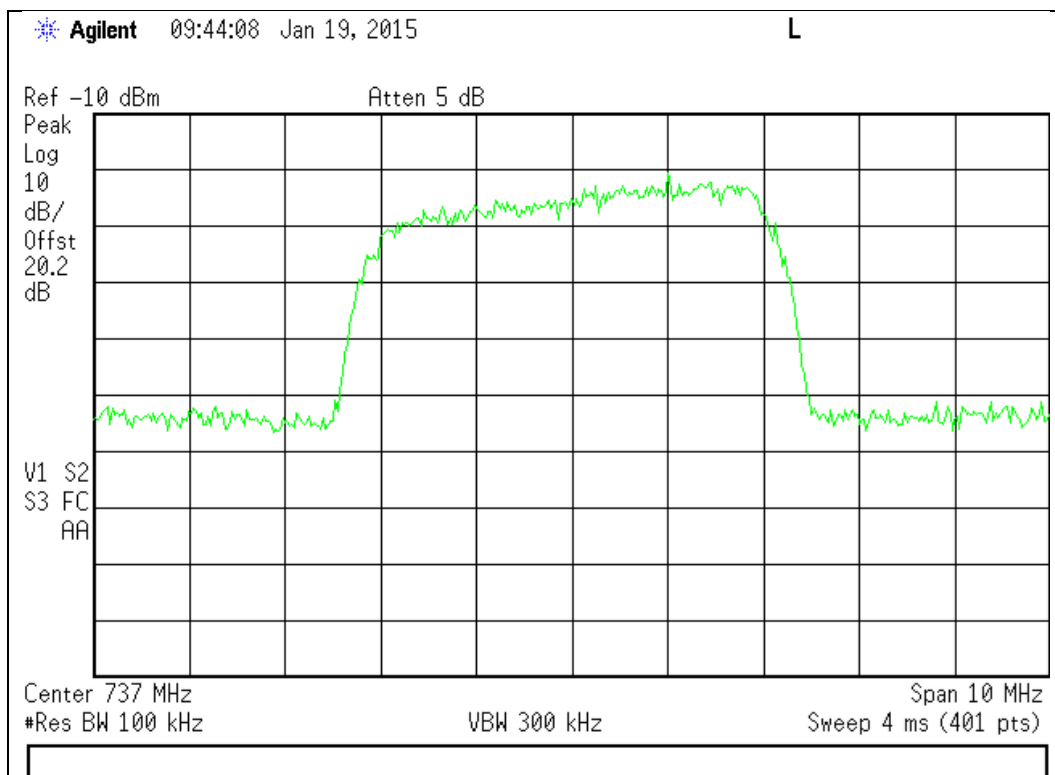




746 - 757 MHz Band

Input

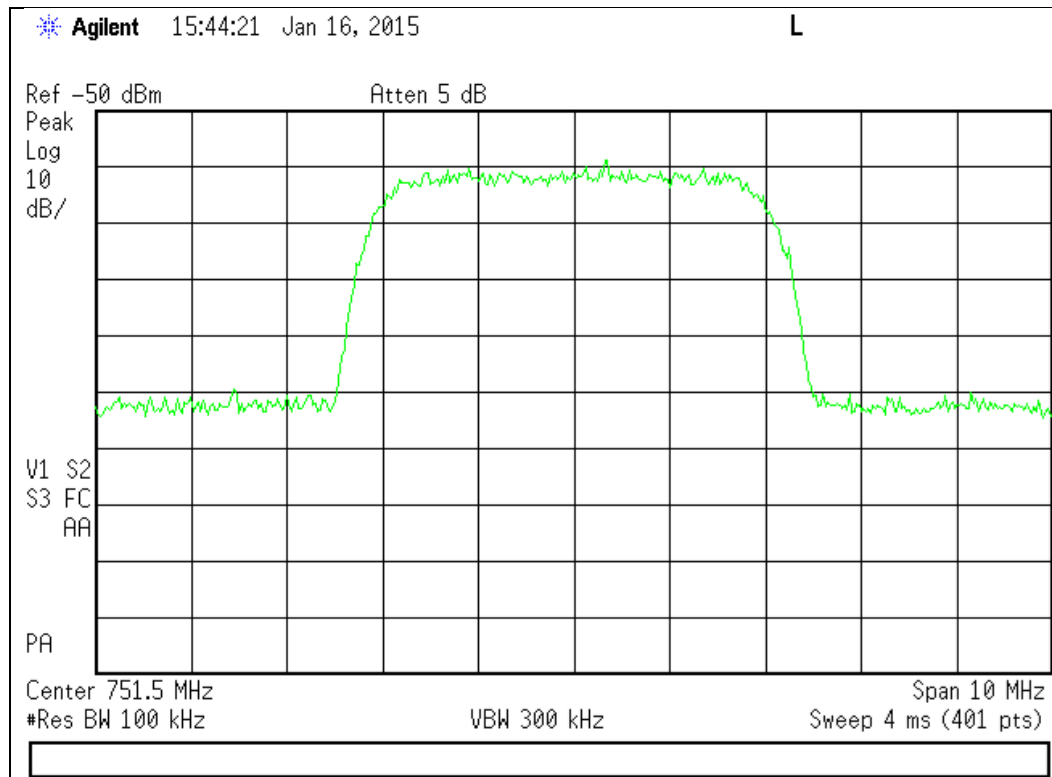


Output

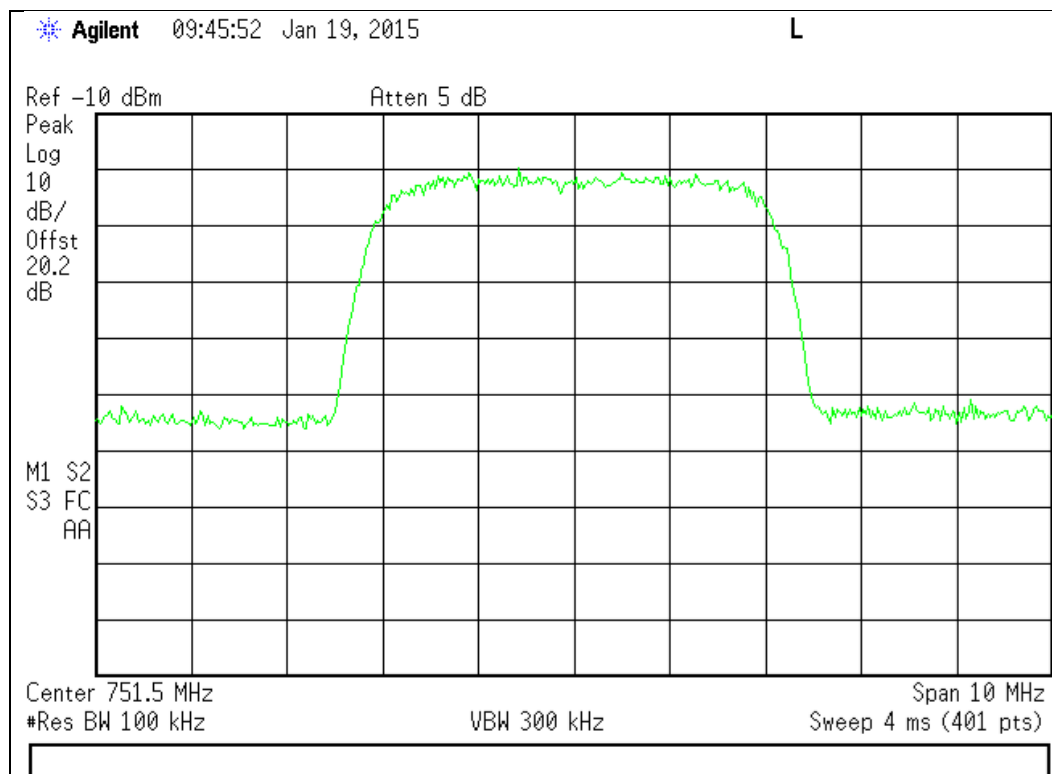




869 - 894 MHz Band

Input

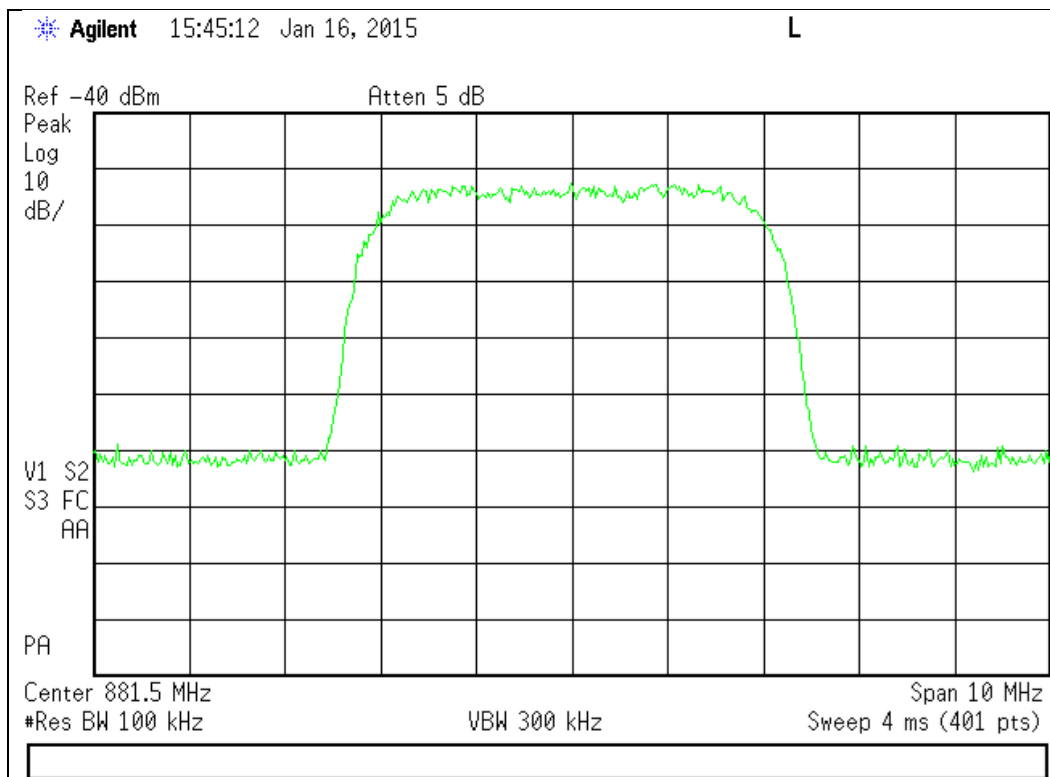


Output

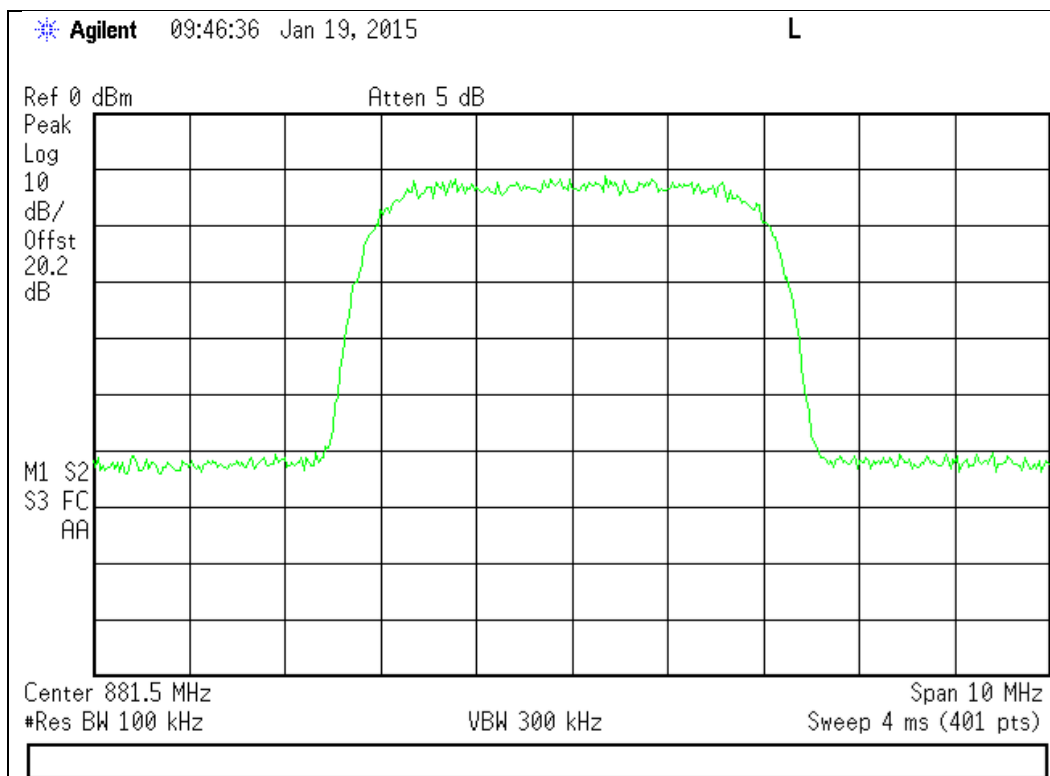


1930 - 1995 MHz Band

Input

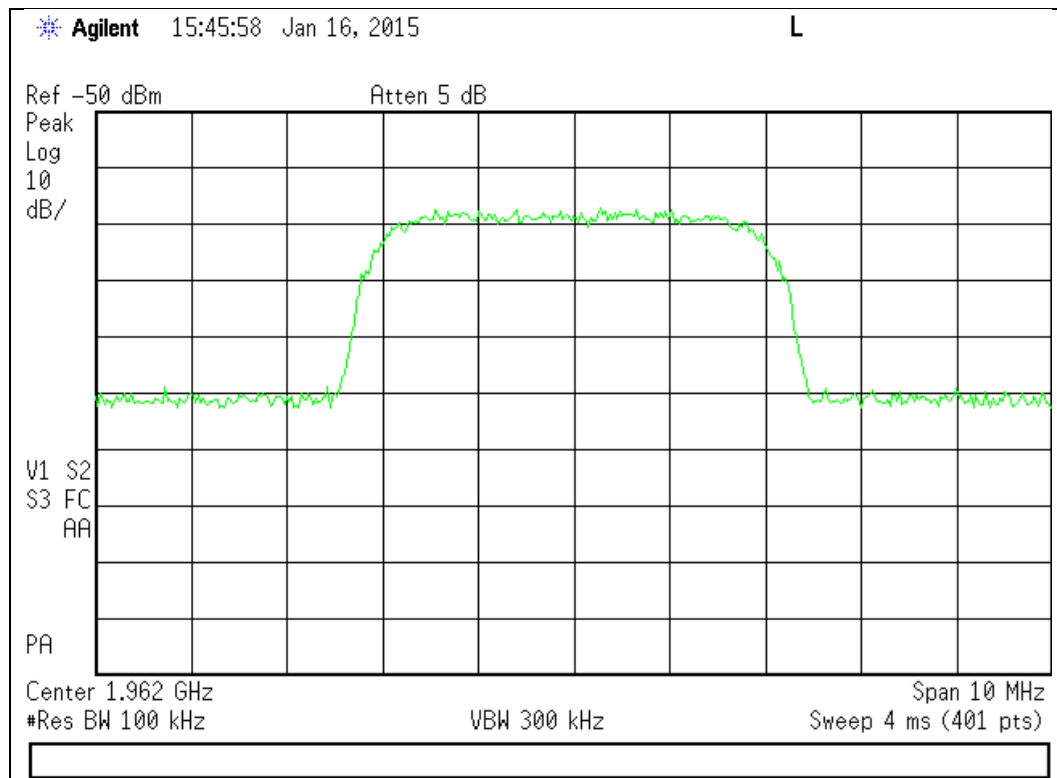


Output

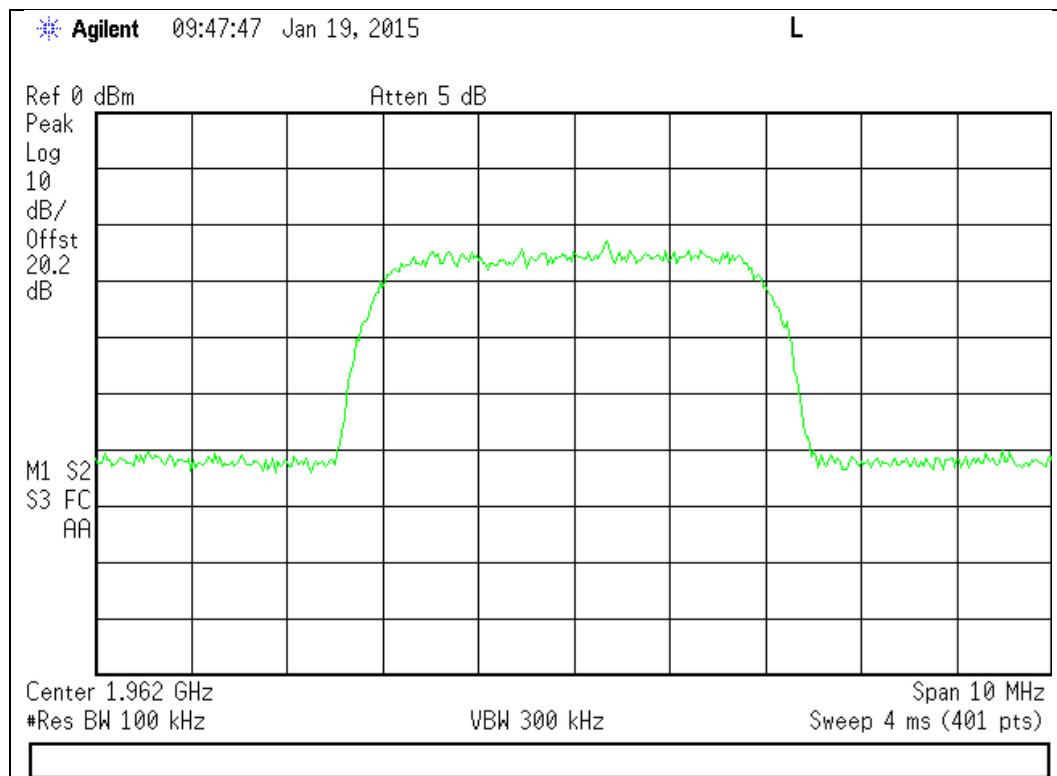




2110 - 2155 MHz Band

Input

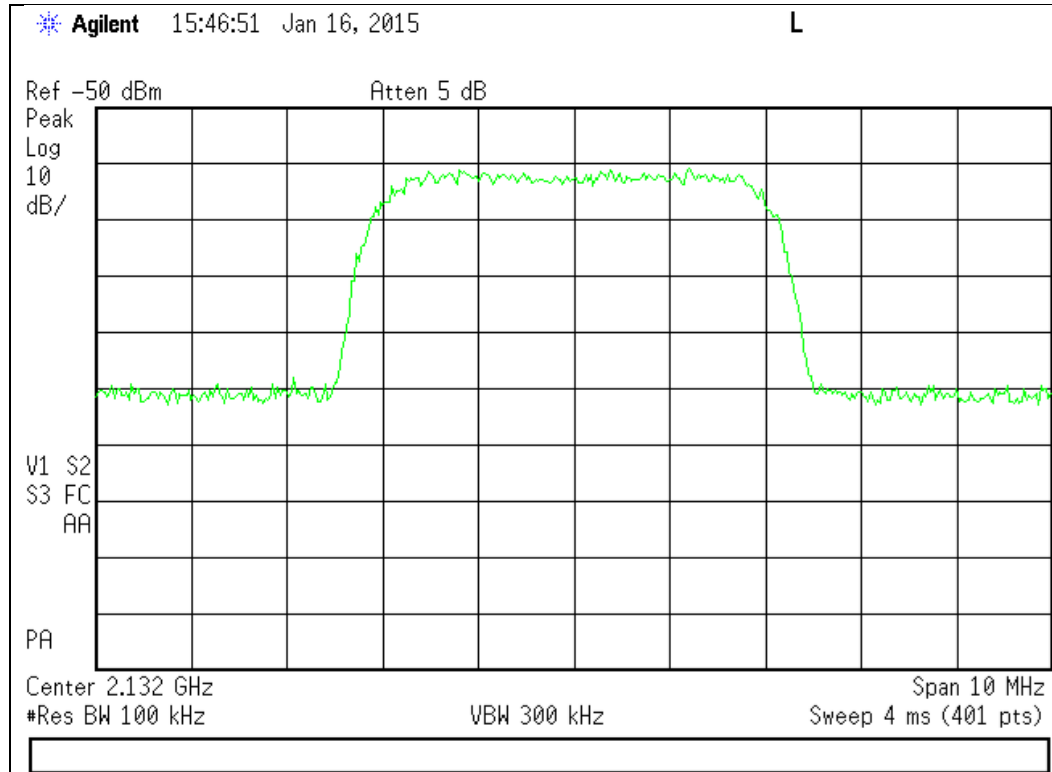

Output

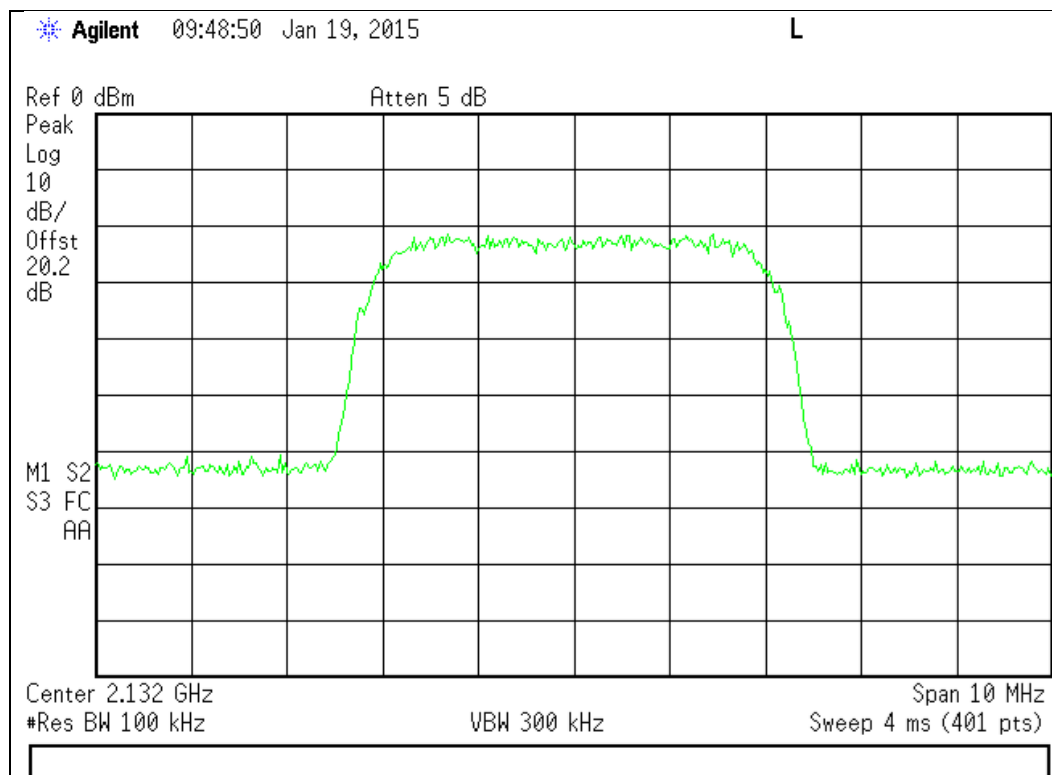

Oscillation Detection


Engineer: Mike Graffeo

Test Date: 1/16/15

Test Procedure

The EUT was connected to a spectrum analyzer set for 0 Hz operation. The EUT uplink and downlink were fed back upon each other through a selectable band pass filter and variable attenuator. The EUT uplink and downlink were tested to ensure that the presence of oscillation was detected and that the EUT output turned off within 300 mS for the Uplink and 1 second for the Downlink and remained off for 1 minute. A EUT with test software was utilized to ensure that the EUT only had a maximum of 5 attempts at restart from oscillation before permanently shutting off.

Test Setup

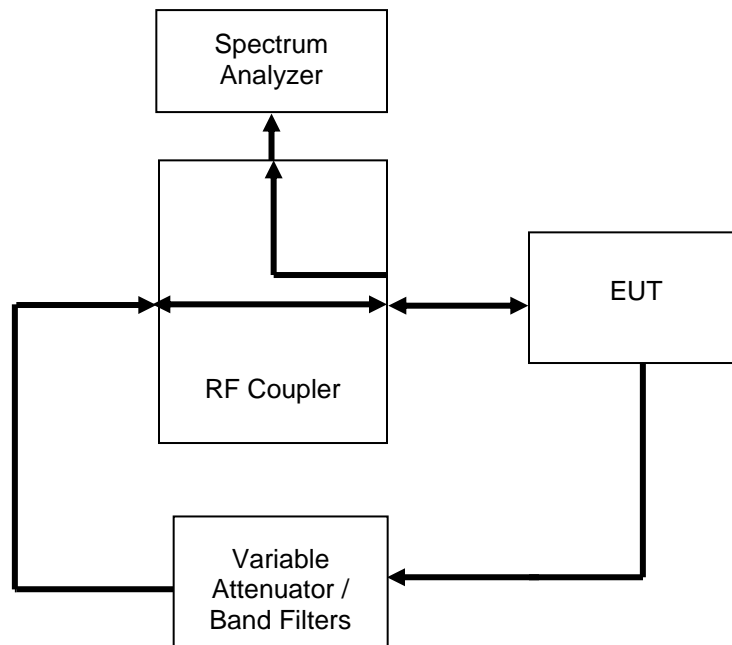

Uplink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
698 - 716	18.0	300	Pass
776 - 787	13.0	300	Pass
824 - 849	17.0	300	Pass
1710 - 1755	16.0	300	Pass
1850 - 1915	12.0	300	Pass

Downlink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
728 - 746	12.0	1000	Pass
746 - 757	16.5	1000	Pass
869 - 894	11.0	1000	Pass
1930 - 1995	16.5	1000	Pass
2110 - 2155	16.5	1000	Pass

Uplink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
698 - 716	65.4	≥60	Pass
776 - 787	66.4	≥60	Pass
824 - 849	65.4	≥60	Pass
1710 - 1755	65.6	≥60	Pass
1850 - 1915	65.6	≥60	Pass

Downlink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
728 - 746	65.4	≥60	Pass
746 - 757	65.4	≥60	Pass
869 - 894	65.6	≥60	Pass
1930 - 1995	65.4	≥60	Pass
2110 - 2155	65.4	≥60	Pass

Uplink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
698 - 716	4	≤5	Pass
776 - 787	4	≤5	Pass
824 - 849	4	≤5	Pass
1710 - 1755	4	≤5	Pass
1850 - 1915	4	≤5	Pass

Downlink Restart Count Test Results


Frequency Band (MHz)	Restarts	Limit	Result
728 - 746	4	≤5	Pass
746 - 757	4	≤5	Pass
869 - 894	4	≤5	Pass
1930 - 1995	4	≤5	Pass
2110 - 2155	4	≤5	Pass

Uplink Detection Time Test Results

698 - 716 MHz Band

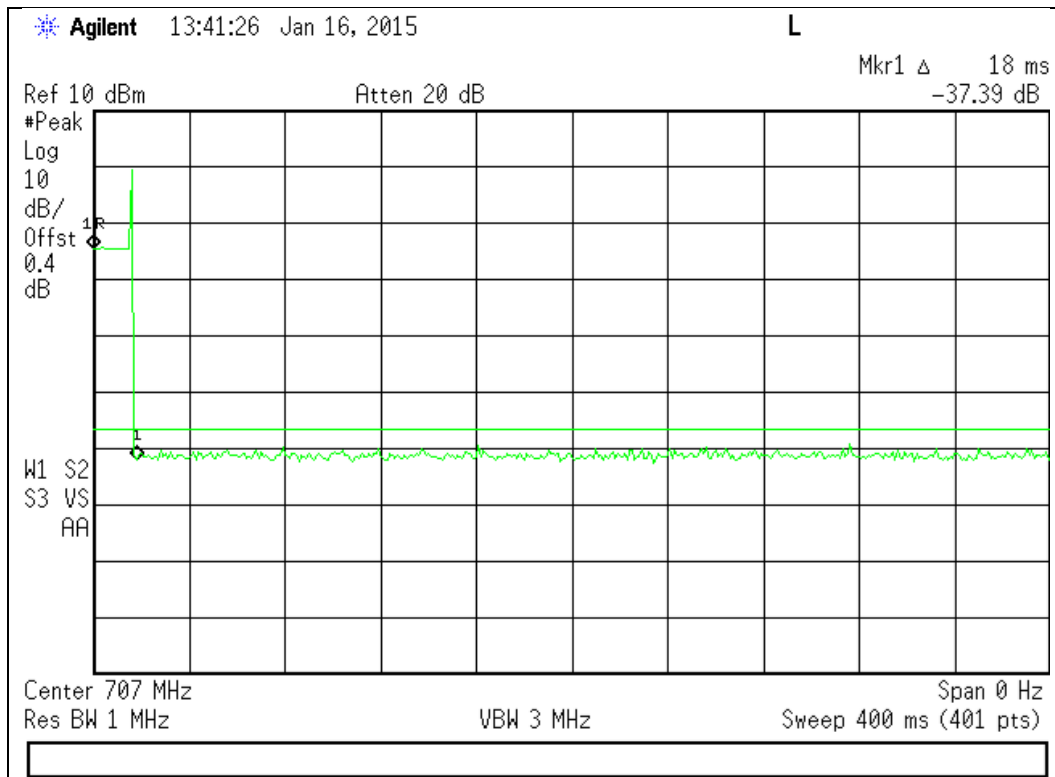


776 - 787 MHz Band

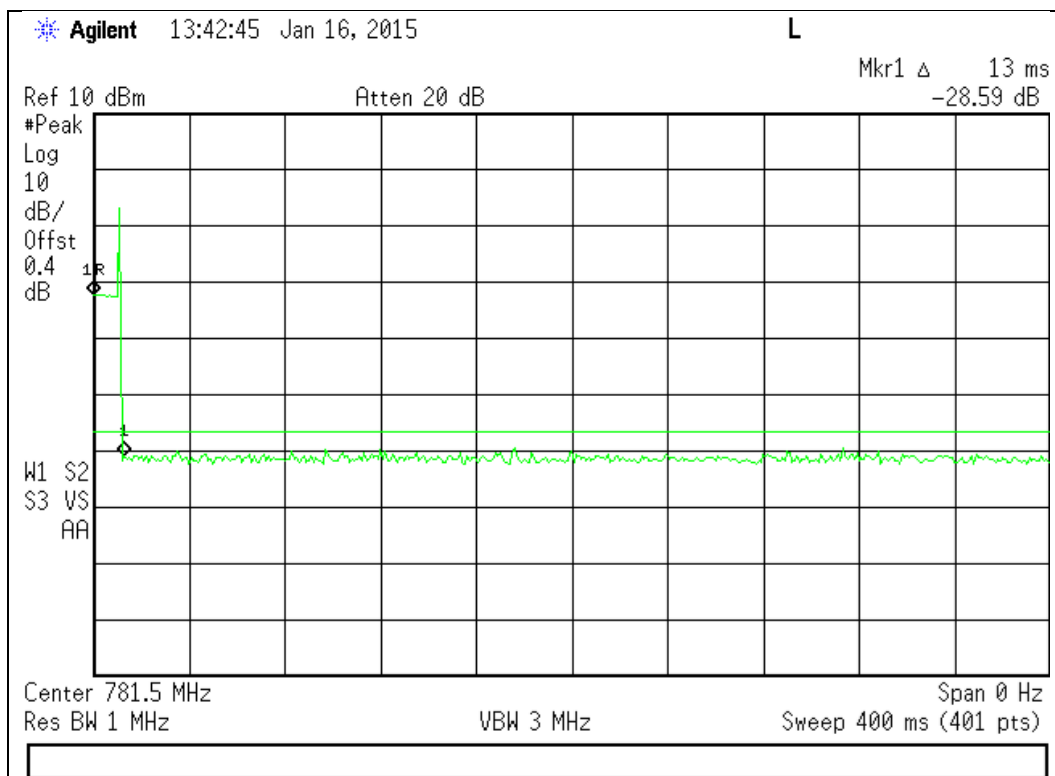




824 - 849 MHz Band

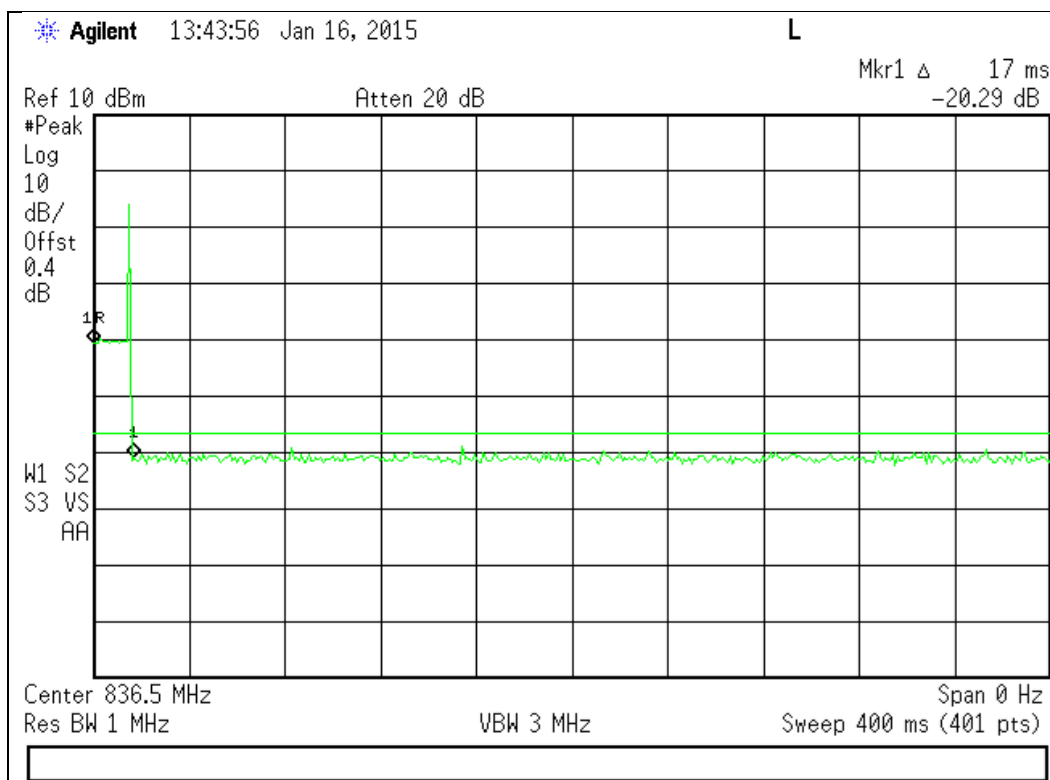


1710 - 1755 MHz Band

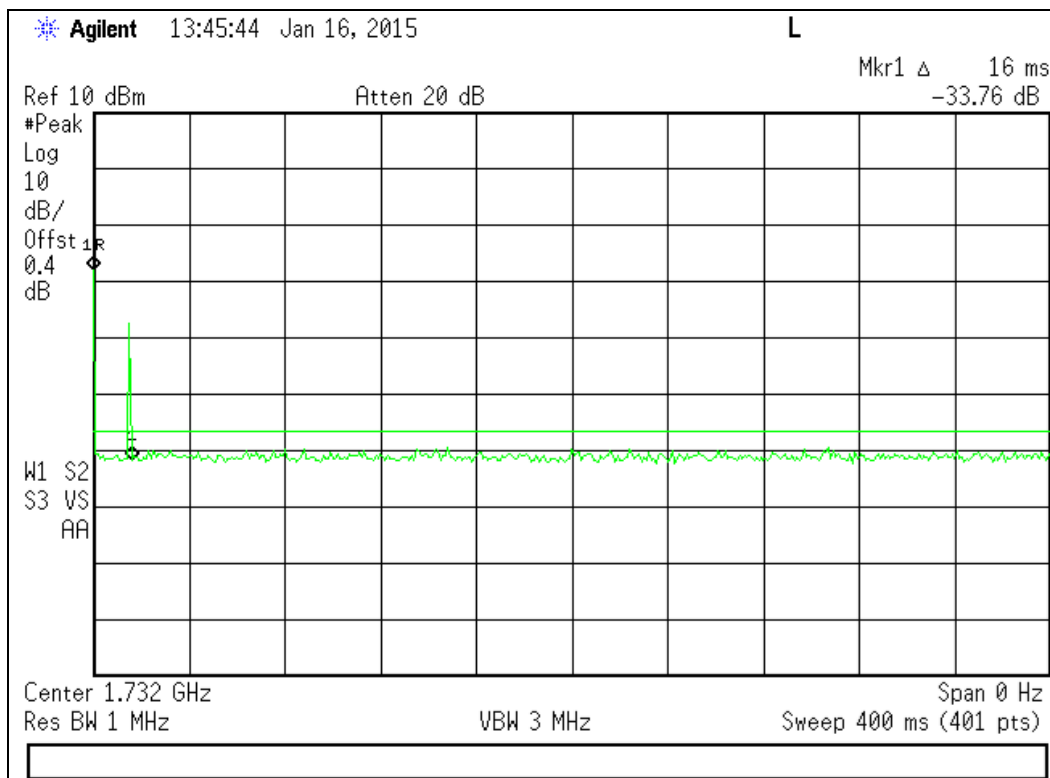




1850 - 1915 MHz Band

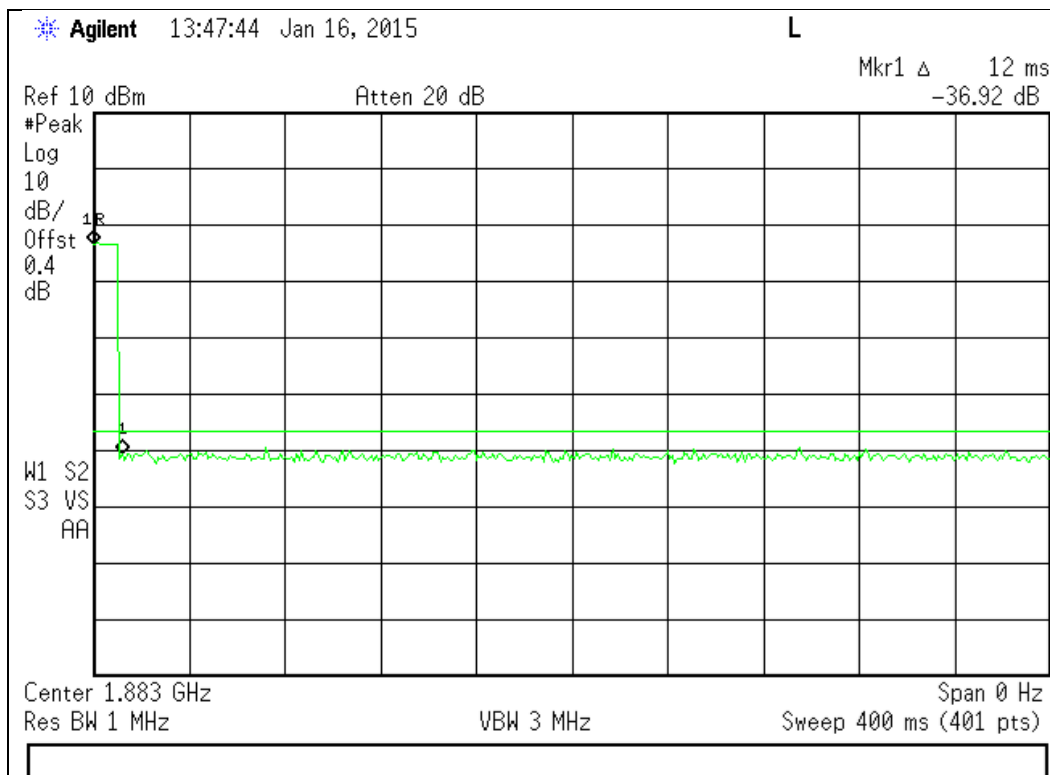


Uplink Restart Time Test Results

698 - 716 MHz Band

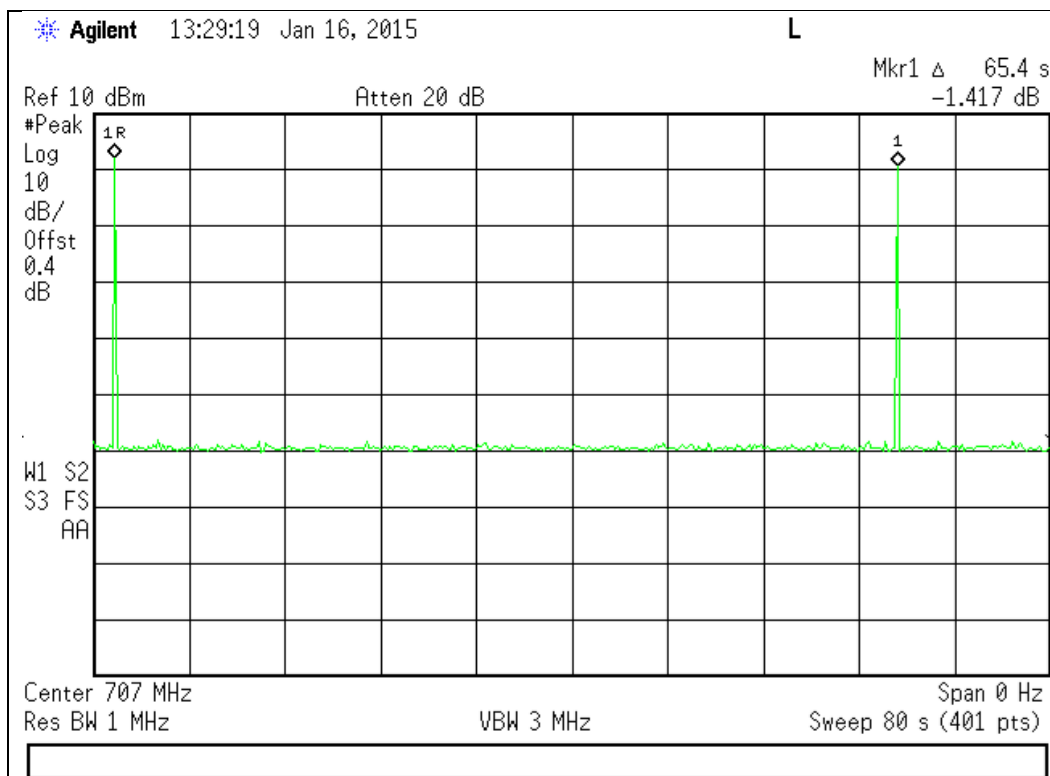




776 - 787 MHz Band

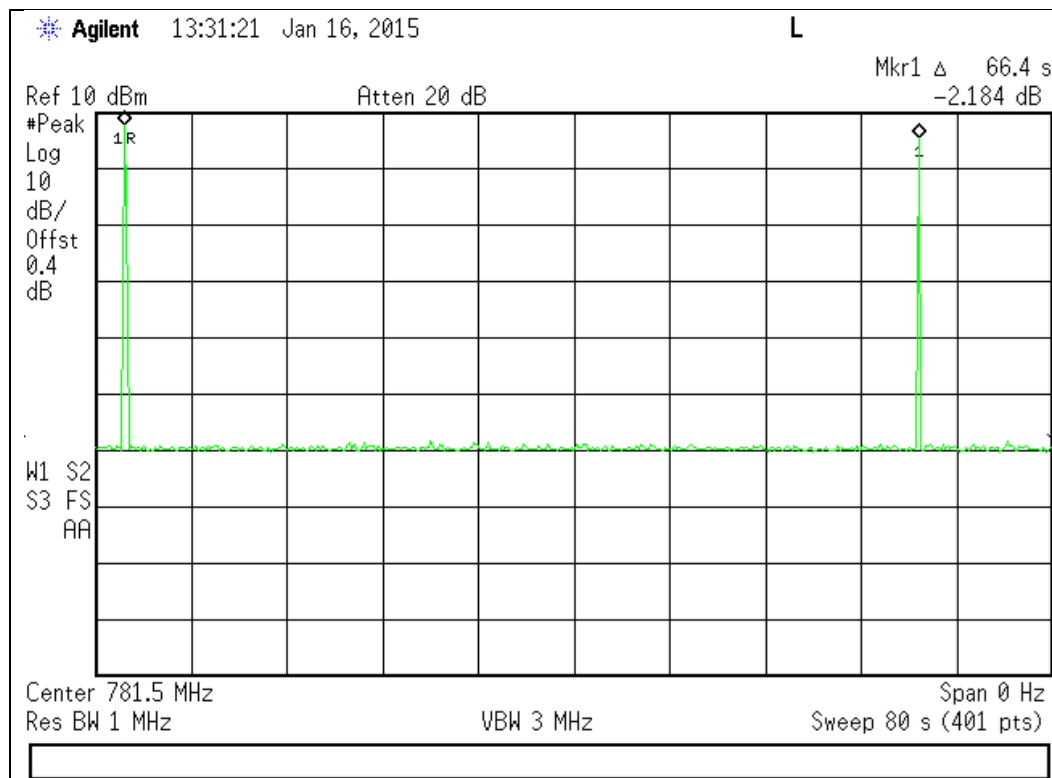

824 - 849 MHz Band

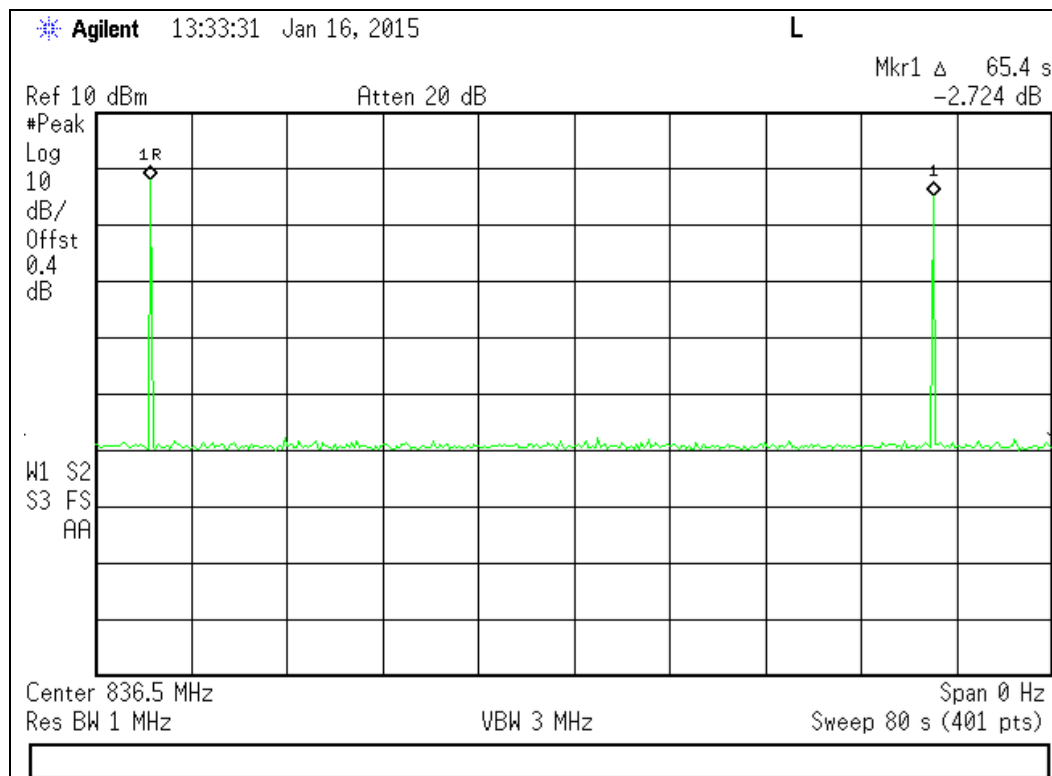

Agilent 13:35:46 Jan 16, 2015 L

Ref 10 dBm Atten 20 dB Mkr1 Δ 65.6 s
-2.861 dB

#Peak
Log
10
dB/
Offst
0.4
dB

1 R 1

W1 S2
S3 FS
AA

Center 1.732 GHz Span 0 Hz
Res BW 1 MHz VBW 3 MHz Sweep 80 s (401 pts)

Agilent 13:39:37 Jan 16, 2015 L

Ref 10 dBm Atten 20 dB Mkr1 Δ 65.6 s
-15.57 dB


#Peak Log 10 dB/ Offst 0.4 dB

W1 S2
S3 FS
AA


Center 1.883 GHz Res BW 1 MHz VBW 3 MHz Span 0 Hz
Sweep 80 s (401 pts)

Uplink Restart Count Test Results


698 - 716 MHz Band

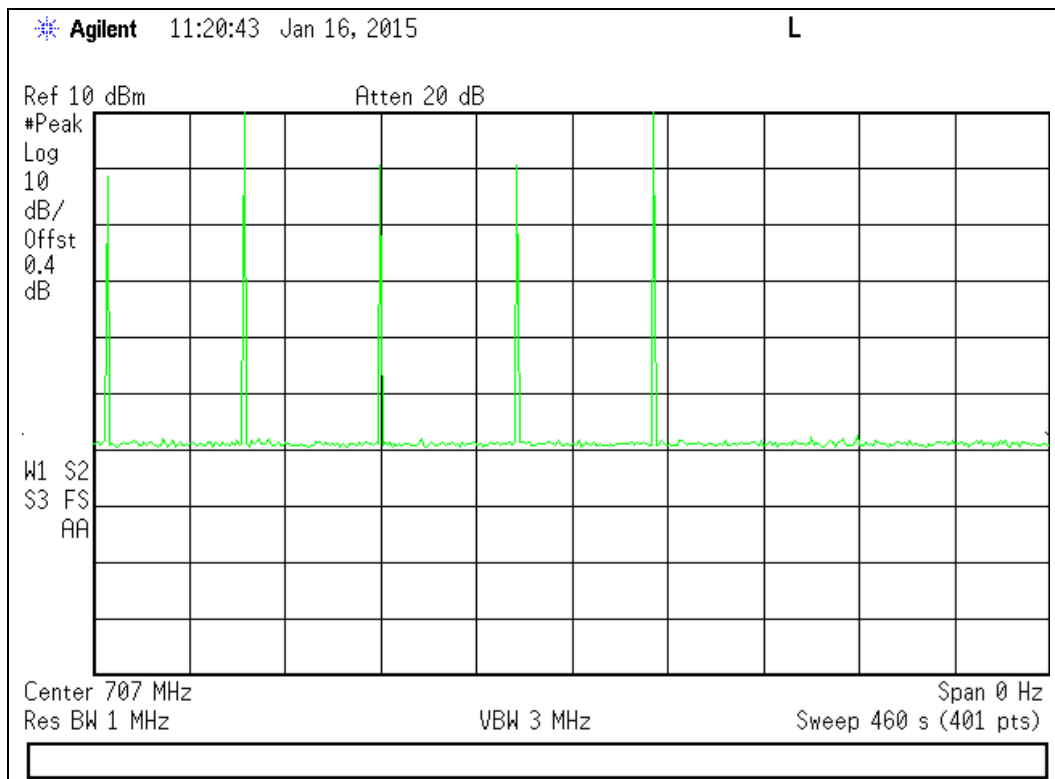


776 - 787 MHz Band

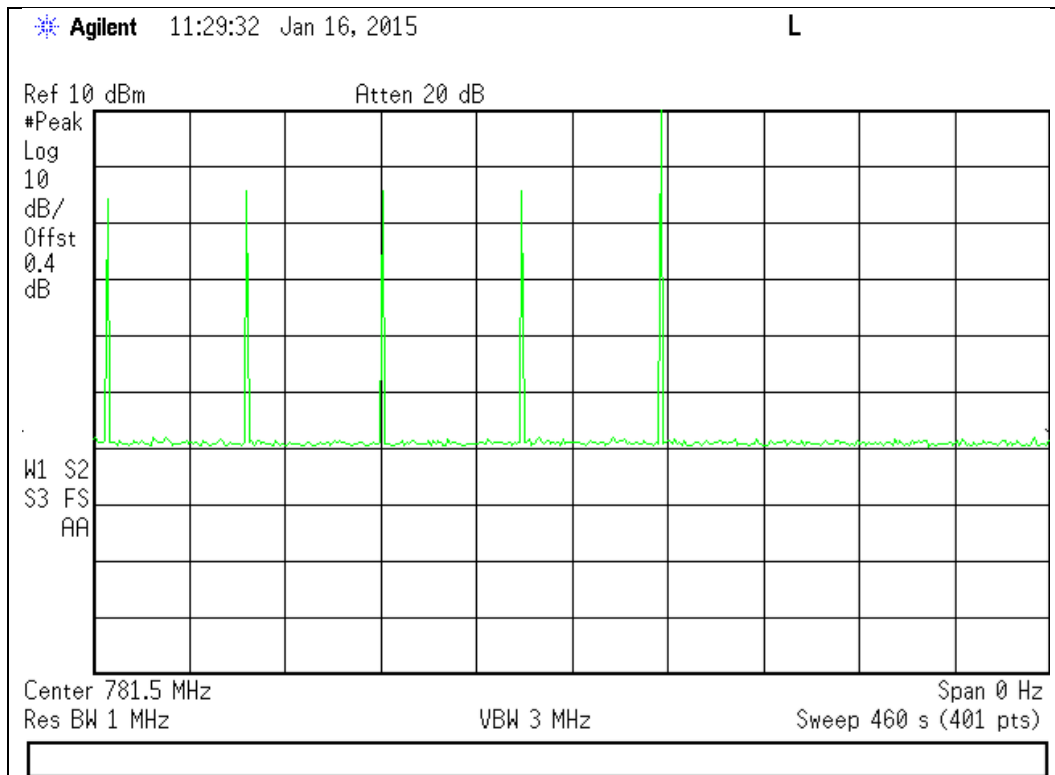


824 - 849 MHz Band

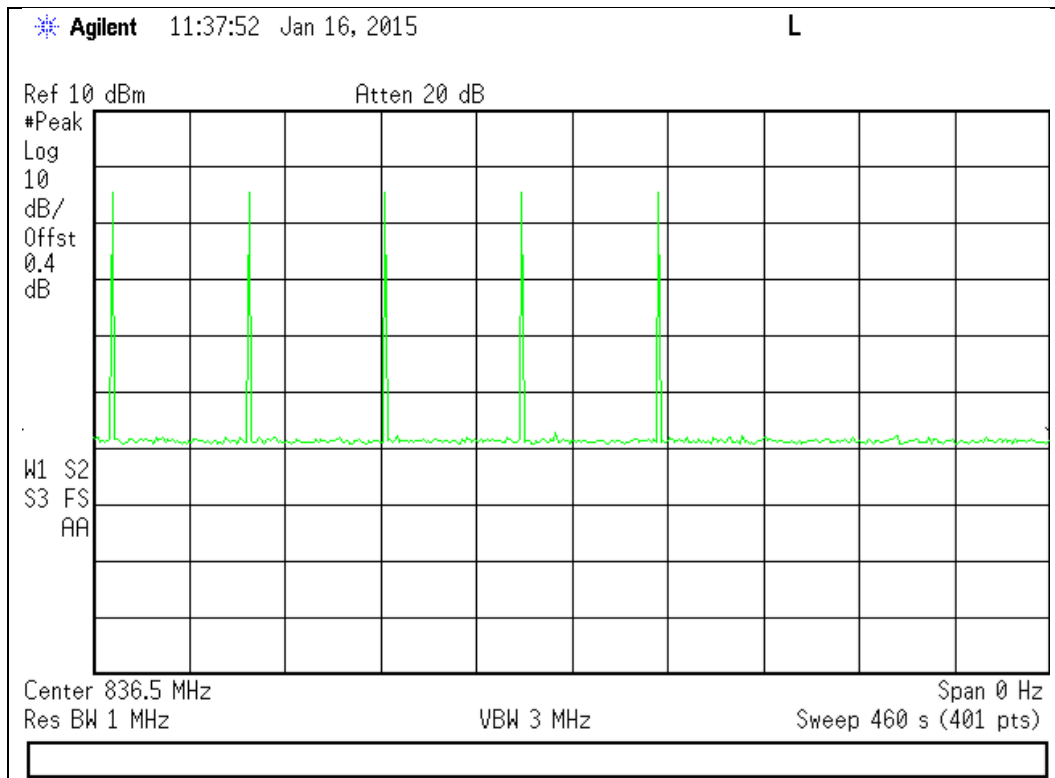

1710 - 1755 MHz Band

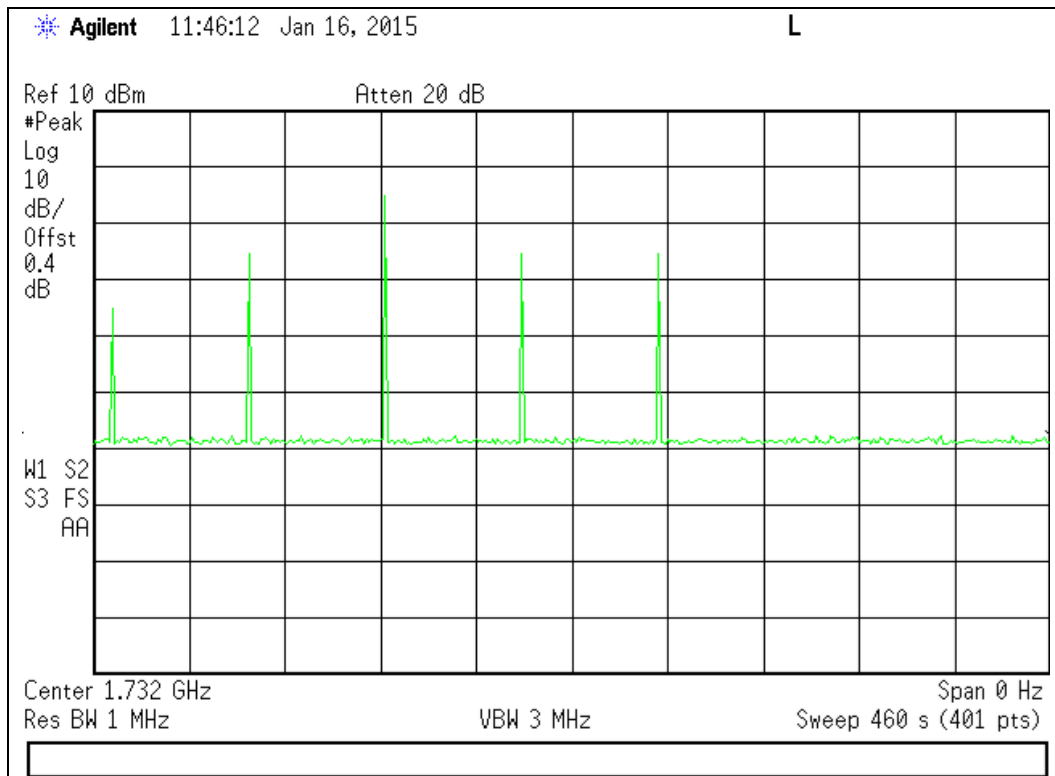


1850 - 1915 MHz Band

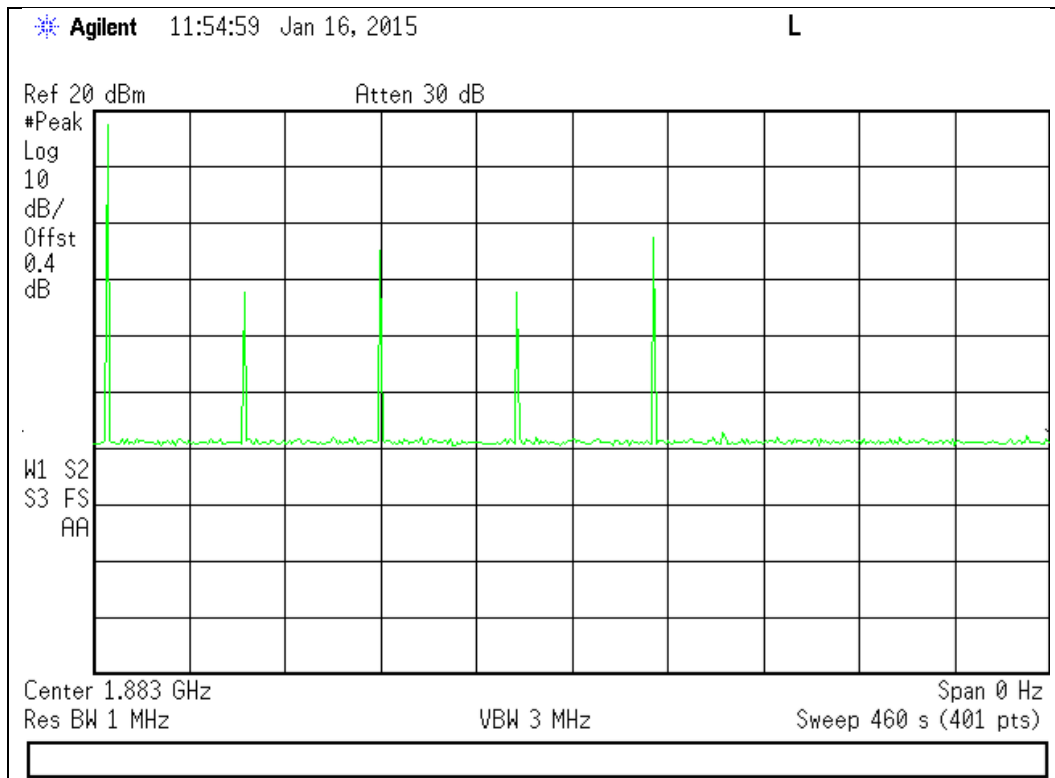


Downlink Detection Time Test Results


728 - 746 MHz Band

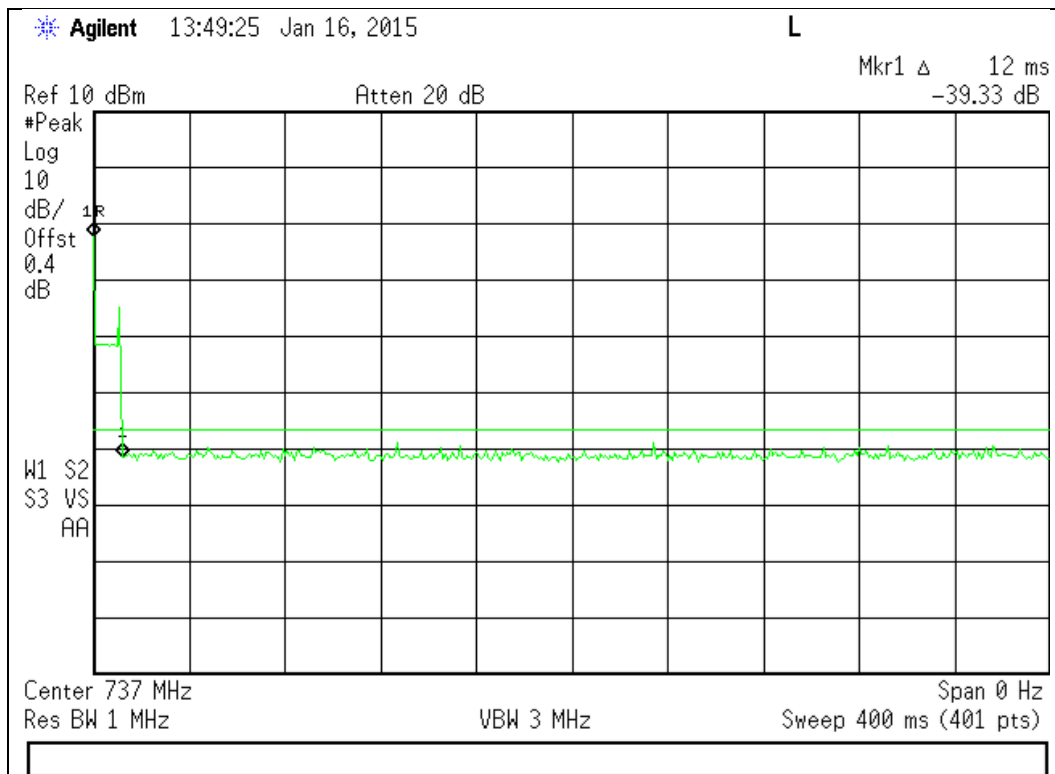

746 - 757 MHz Band

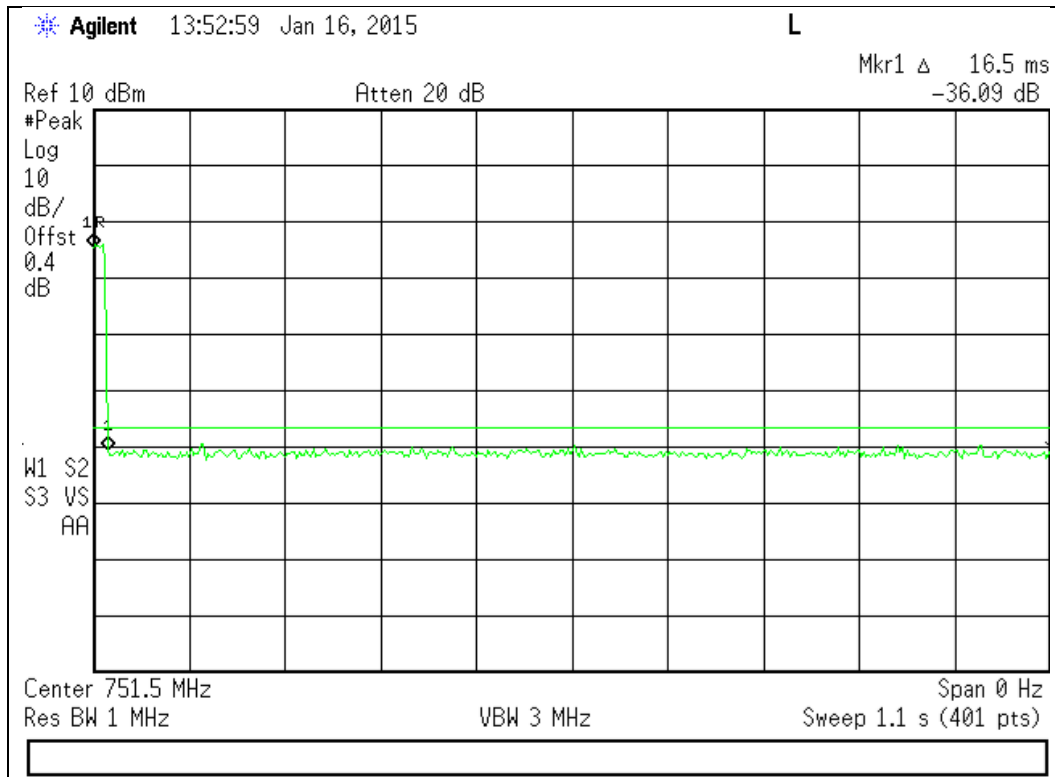


869 - 894 MHz Band

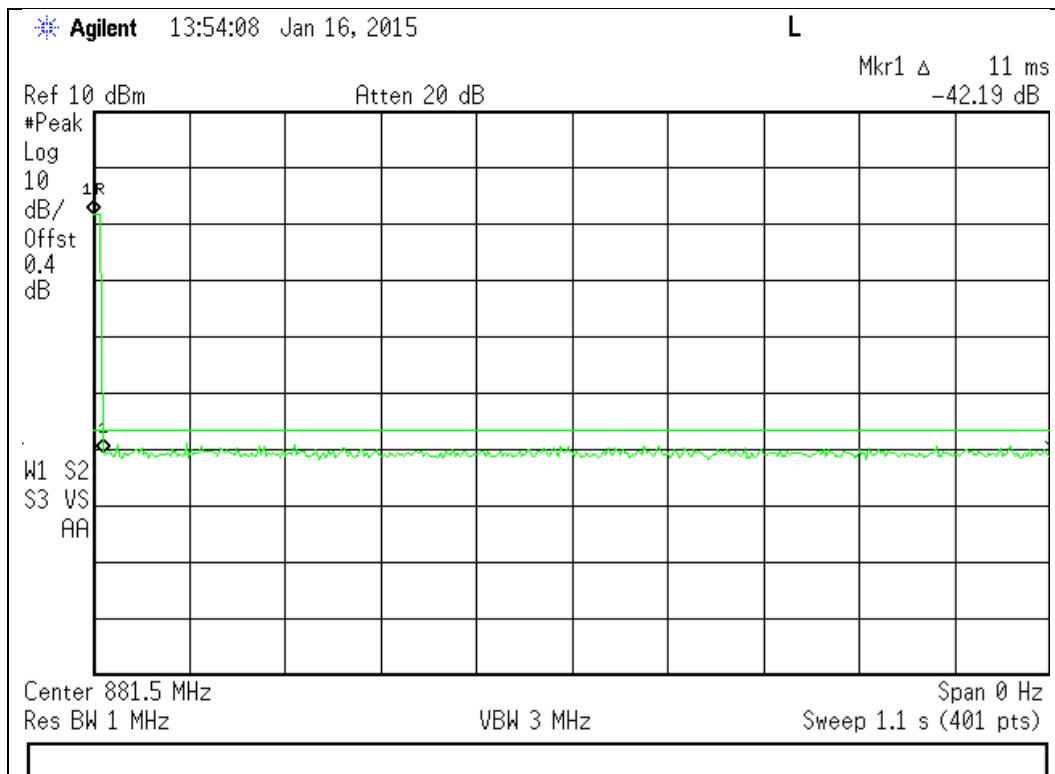




1930 - 1995 MHz Band

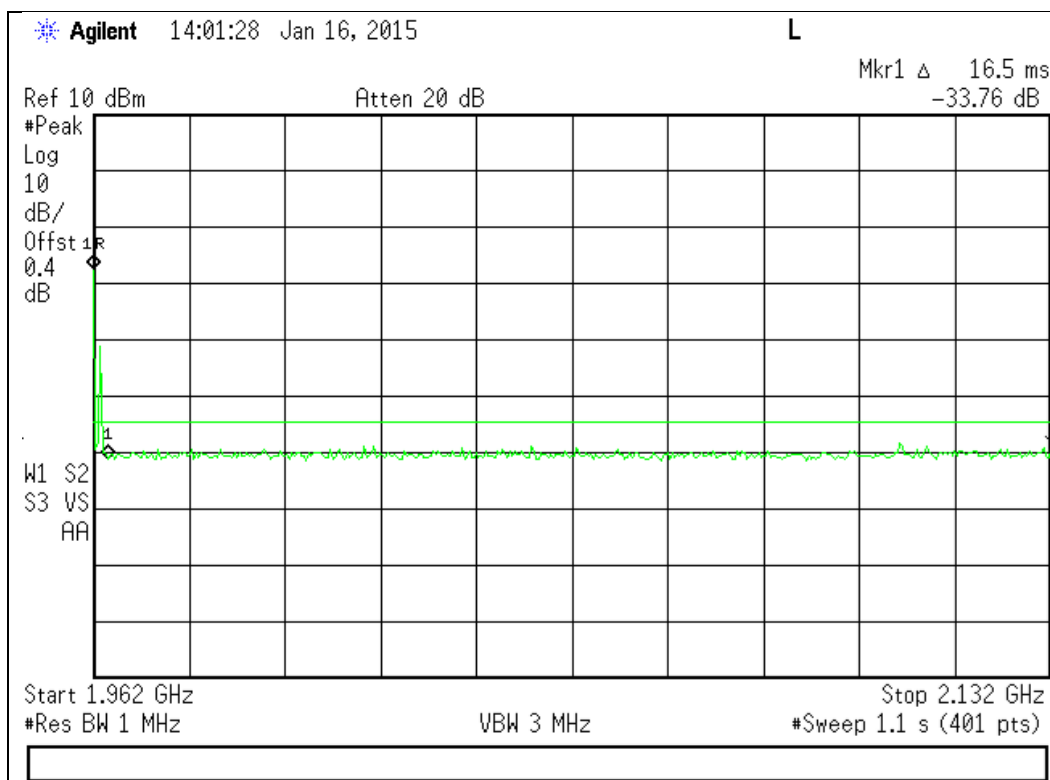


2110 - 2155 MHz Band

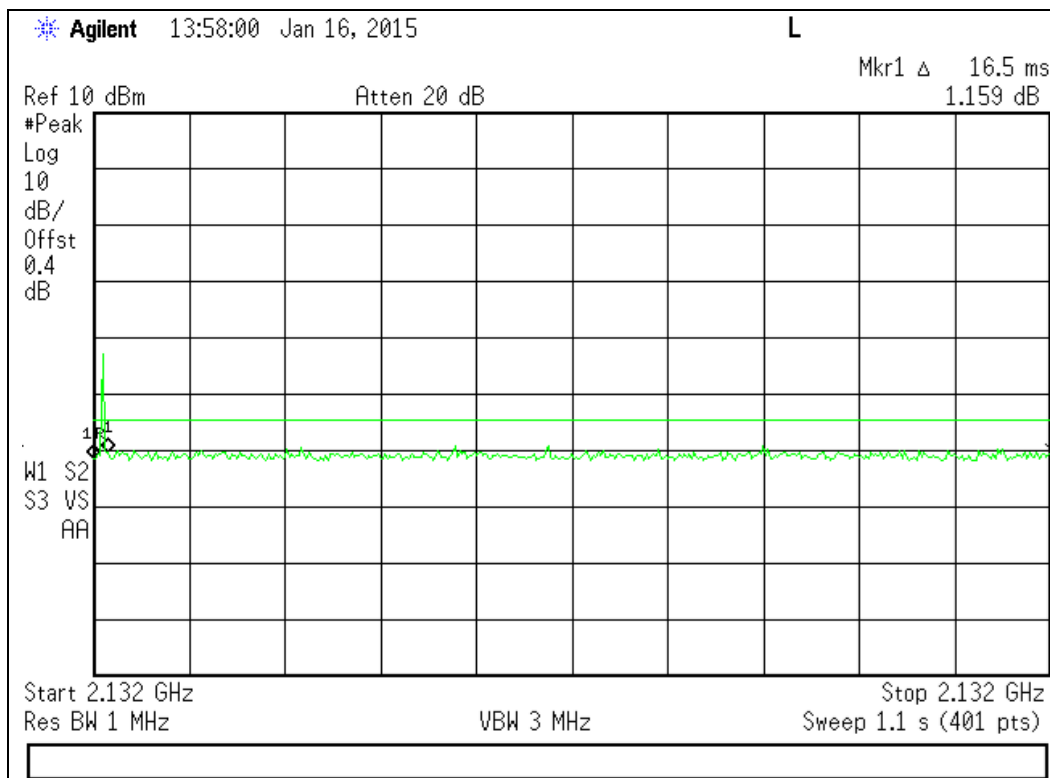


Downlink Restart Time Test Results

728 - 746 MHz Band

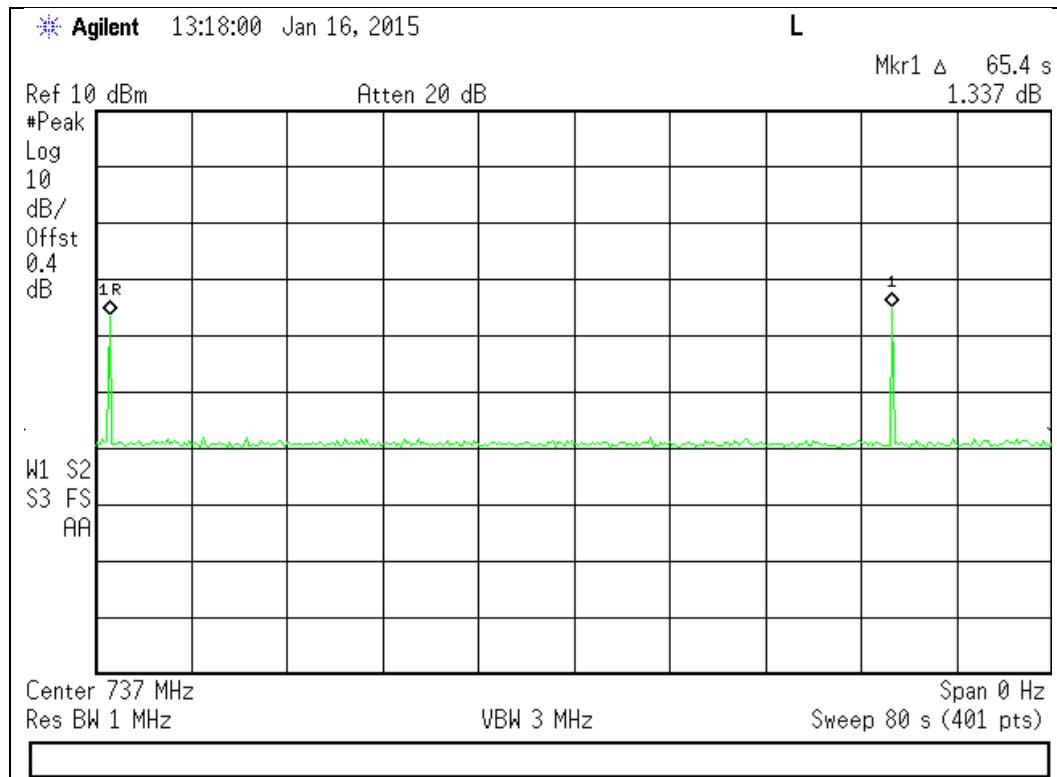


746 - 757 MHz Band

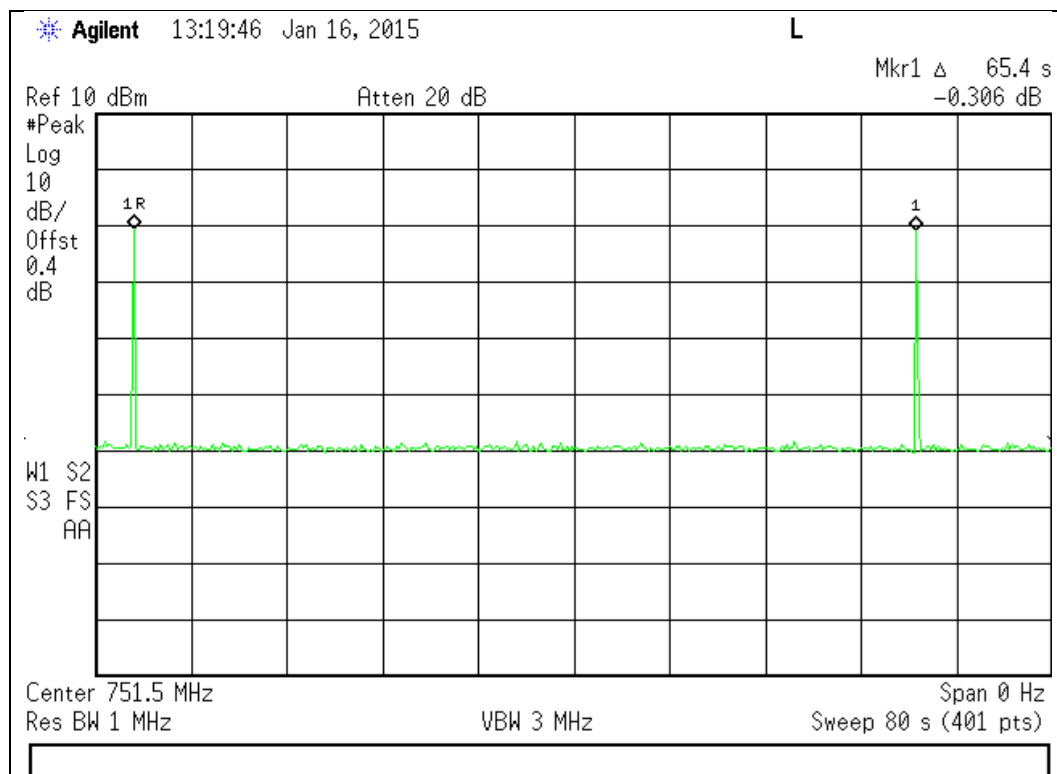




869 - 894 MHz Band

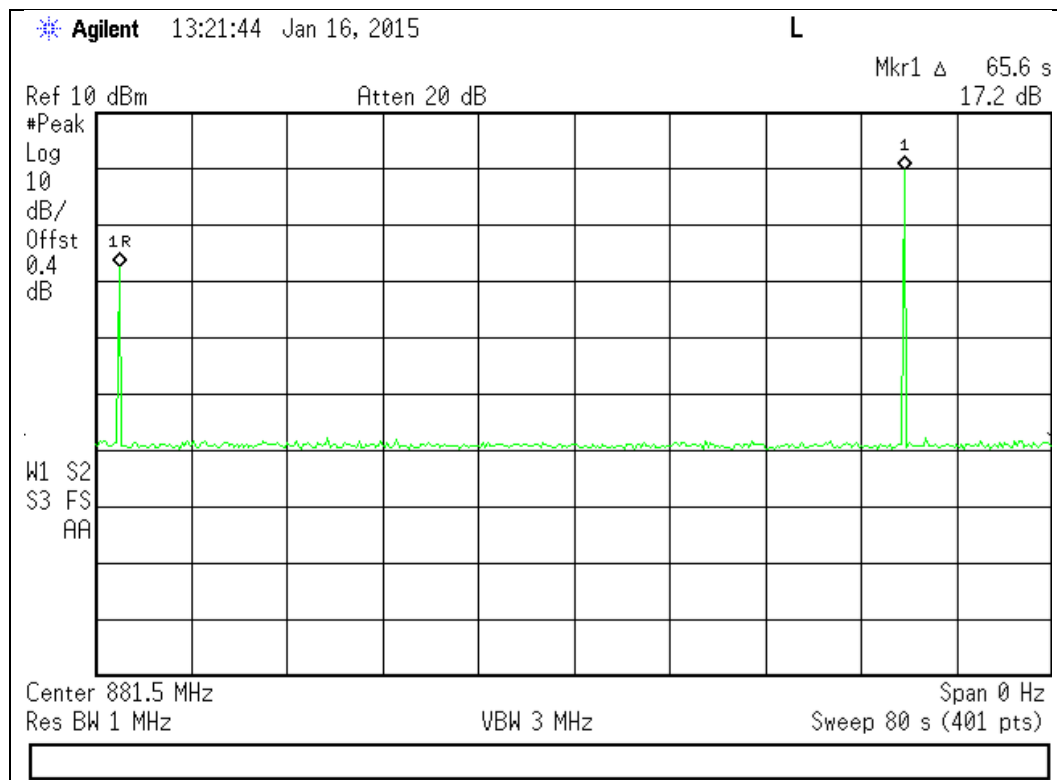


1930 - 1995 MHz Band

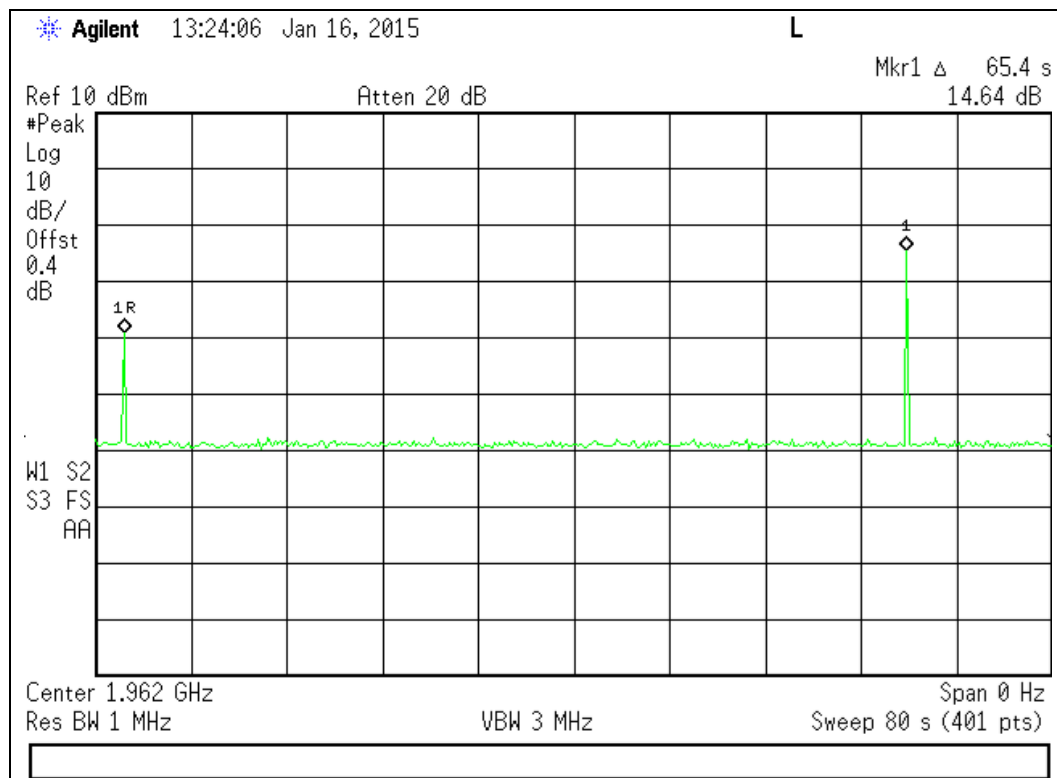




2110 - 2155 MHz Band

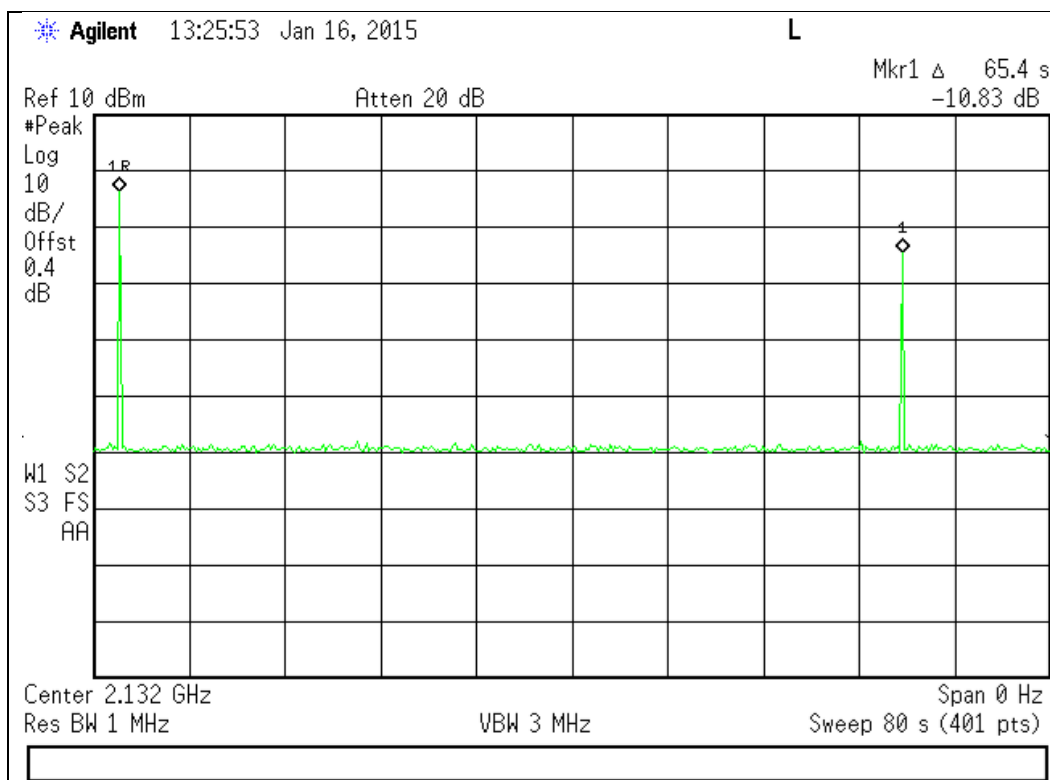


Downlink Restart Count Test Results

728 - 746 MHz Band

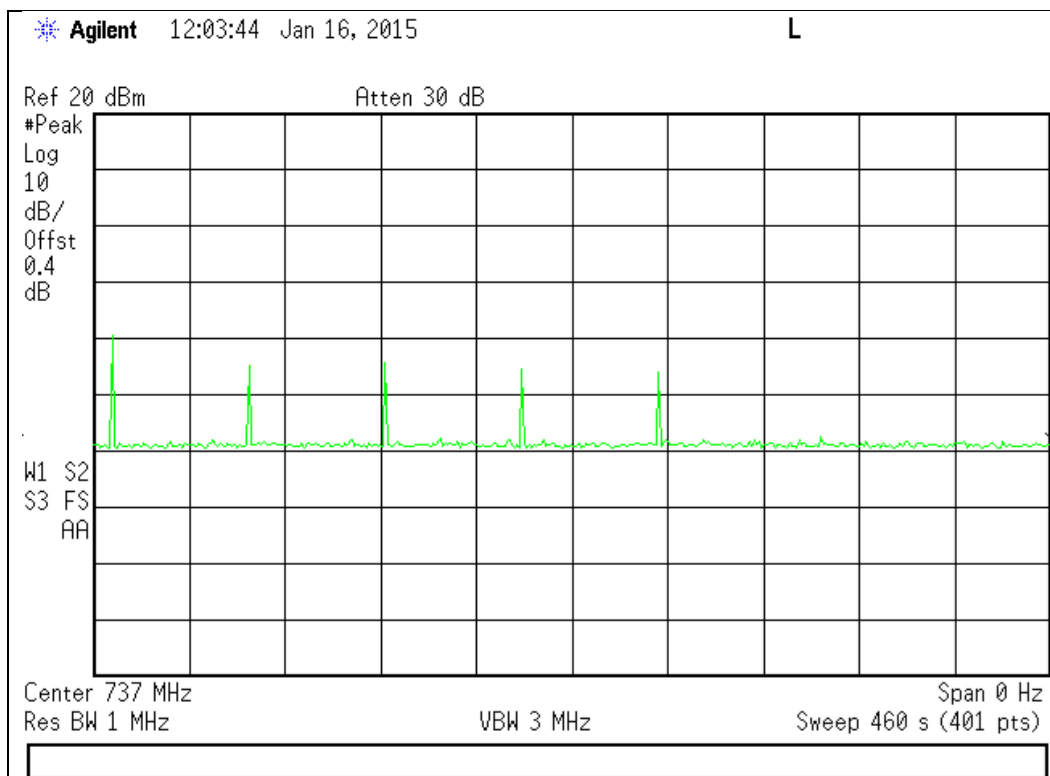




746 - 757 MHz Band

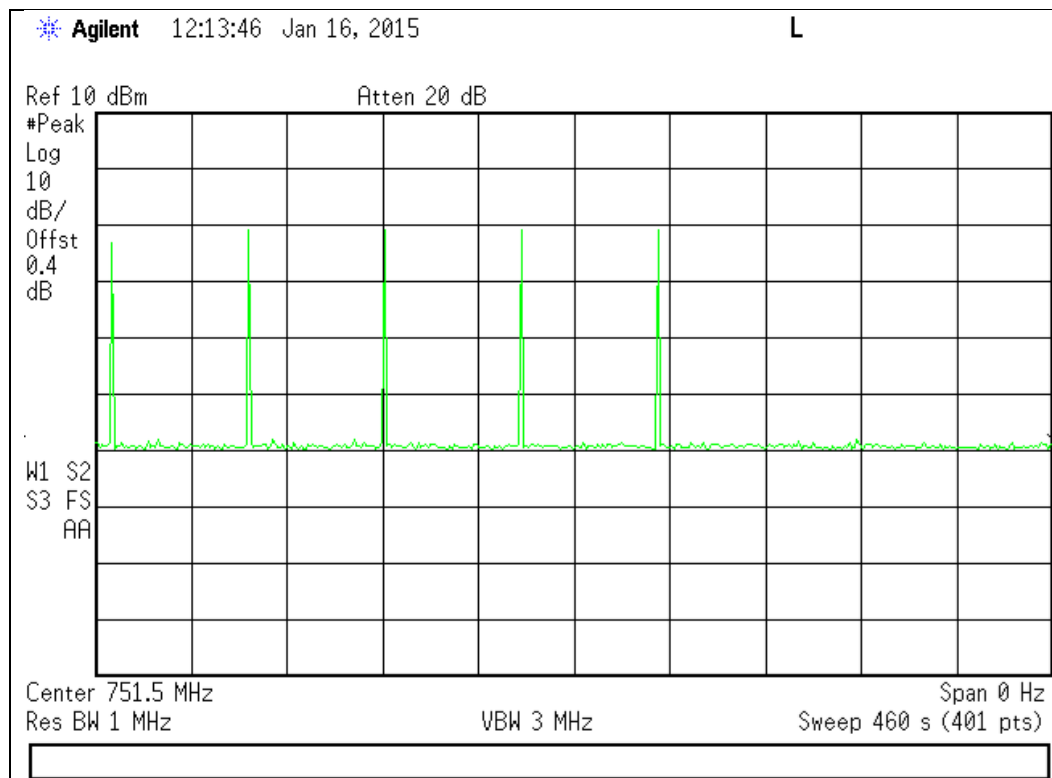


869 - 894 MHz Band

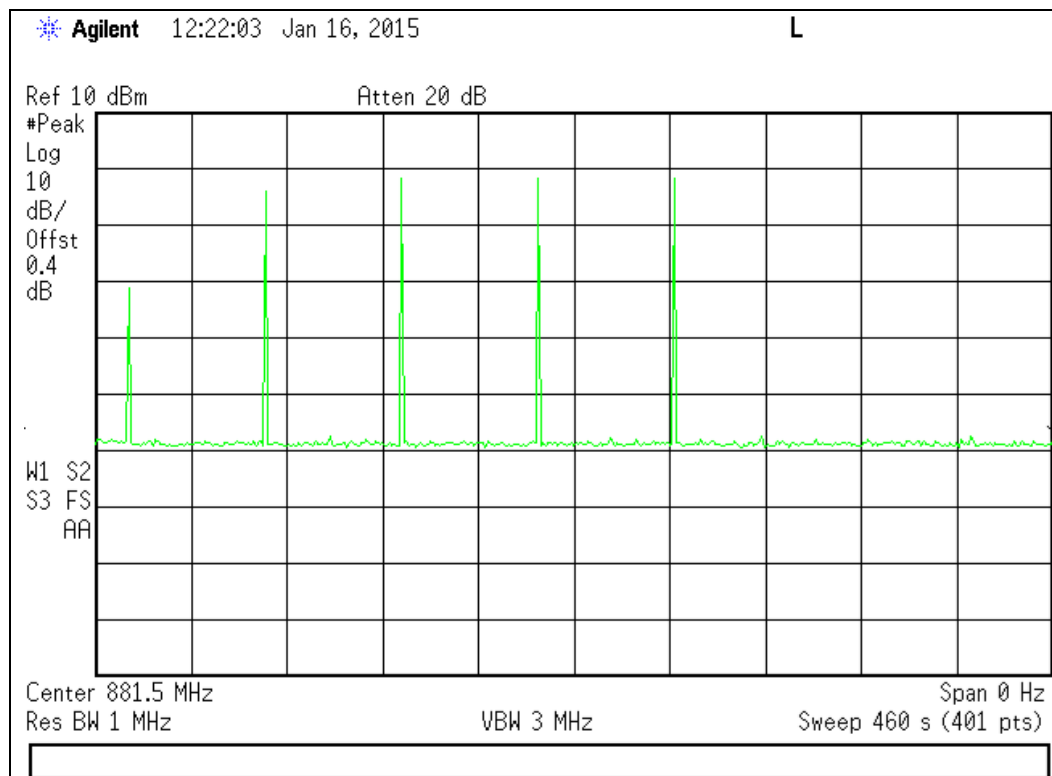




1930 - 1995 MHz Band

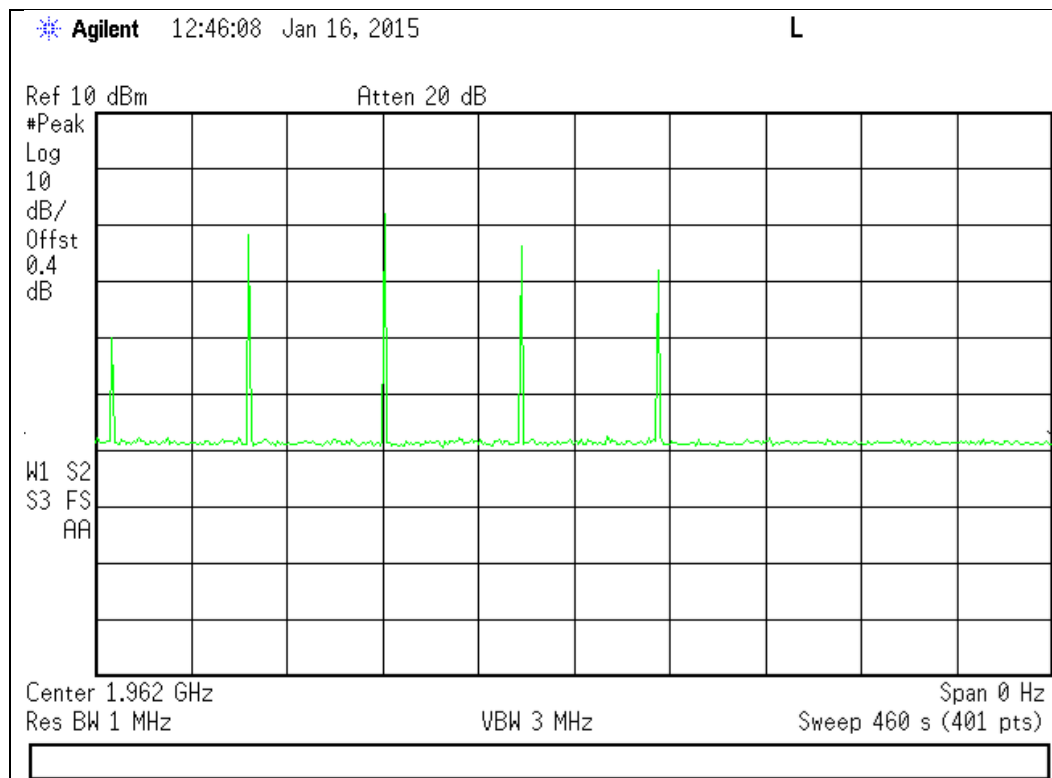

2110 - 2155 MHz Band

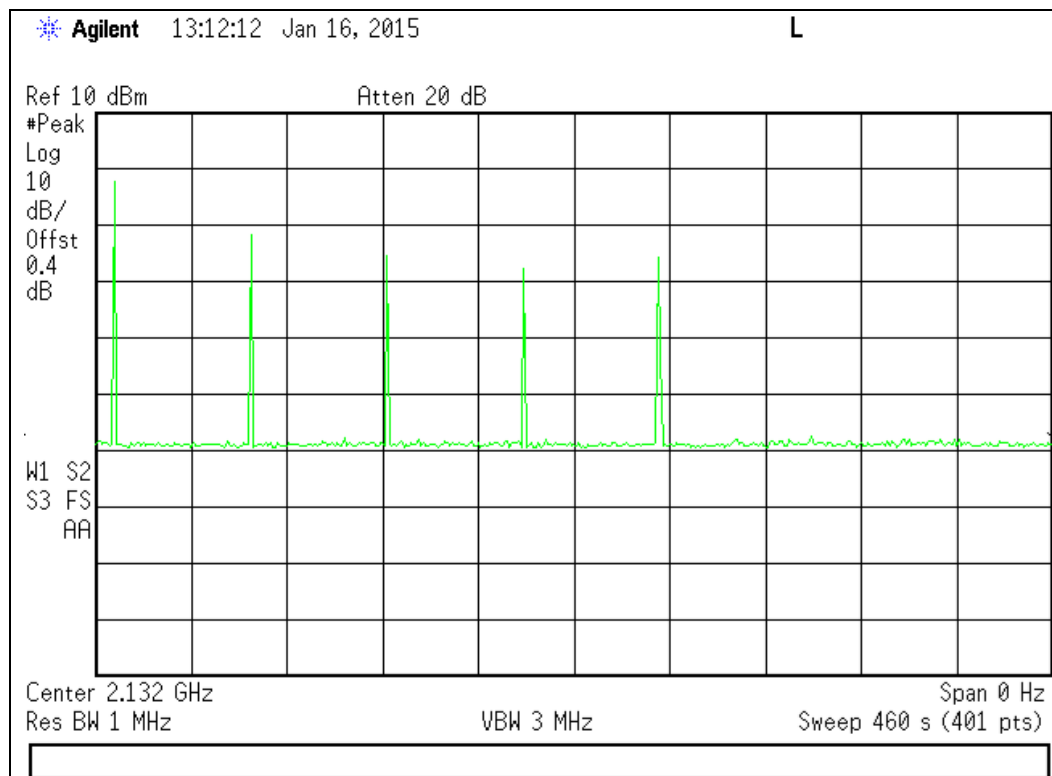

Radiated Spurious

Engineer: Mike Graffeo

Test Date: 1/28/15

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal centered in each operational uplink and downlink band. The EUT output was terminated into a 50 Ohm non-radiating load.


The following formula was used for calculating the limits:

Radiated Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13\text{dBm}$

P1 = power in dBm

P2 = power in Watts

Test Setup

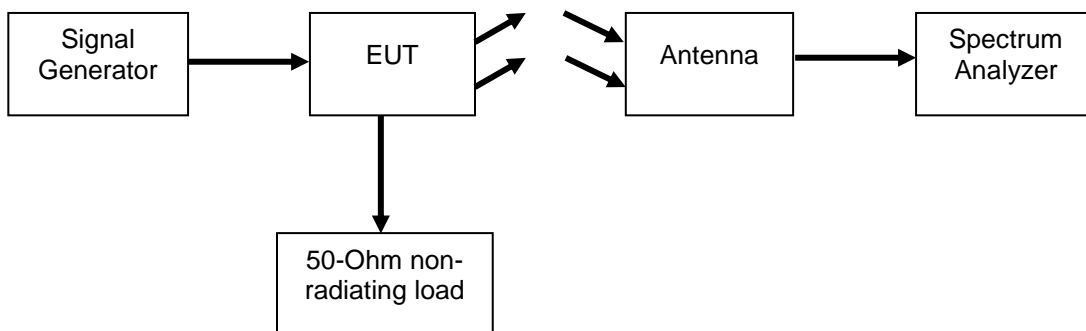



Uplink Test Results

698 - 716 MHz Band 707 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1414	-81.57	-13	Pass
2121	-79.36	-13	Pass
2828	-77.27	-13	Pass

776 - 787 MHz Band 781.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1563	-81.61	-13	Pass
2344.5	-77.52	-13	Pass
3126	-78.40	-13	Pass

824 - 849 MHz Band 836.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1673	-78.75	-13	Pass
2509.5	-78.68	-13	Pass
3344	-79.20	-13	Pass

1710 - 1755 MHz Band 1732.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3465	-77.77	-13	Pass
5197.5	-72.87	-13	Pass
6830	-70.62	-13	Pass

1850 - 1915 MHz Band 1882.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3765	-78.83	-13	Pass
5647.5	-77.25	-13	Pass
7530	-70.42	-13	Pass

Downlink Test Results

728 - 746 MHz Band 737 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1474	-82.32	-13	Pass
2211	-78.93	-13	Pass
2948	-76.39	-13	Pass

746 - 757 MHz Band 751.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1503	-81.82	-13	Pass
2254.5	-75.59	-13	Pass
3006	-79.51	-13	Pass

869 - 894 MHz Band 881.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1763	-81.51	-13	Pass
2644.5	-75.40	-13	Pass
3526	-76.82	-13	Pass

1930 - 1995 MHz Band 1960.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3921	-78.68	-13	Pass
5881.5	-73.66	-13	Pass
7842	-72.08	-13	Pass

2110 - 2155 MHz Band 2132.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
4265	-76.74	-13	Pass
6397.5	-76.10	-13	Pass
8530	-74.42	-13	Pass

No other emissions were detected. All emissions were lower than -13 dBm.
 All emissions were system noise floor.

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/16
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/8/13	10/8/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75III	i00320	3/24/14	3/24/15
EMI Analyzer *	Agilent	E7405A	i00379	1/14/14	1/14/15
Non-radiating load	Termaline	8201	i00334	Verified on: 1/11/15	
Signal Generator	Rohde & Schwarz	SMU200A	i00405	12/11/14	12/11/15
Signal Generator	Keysight (Agilent)	E4438C	I00457	9/26/2014	9/26/2016
RF Directional Coupler	Meca	CS06-1.500V	i00412	Verified on: 1/11/15	

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

* Lab Manager has approved a 30 day extension on this piece of equipment

END OF TEST REPORT