

## FCC Test Report

**Report No.:** RF150316C01

**FCC ID:** A8J-ECB1200

**Test Model:** ECB1200

**Received Date:** Mar. 16, 2015

**Test Date:** Mar. 18 ~ Apr. 21, 2015

**Issued Date:** May 07, 2015

**Applicant:** EnGenius Technologies

**Address:** 1580 Scenic Avenue, Costa Mesa, CA92626

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	12
3.5 General Description of Applied Standards.....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	14
4.1.2 Test Instruments.....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Set Up.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results.....	19
4.2 Conducted Emission Measurement.....	33
4.2.1 Limits of Conducted Emission Measurement.....	33
4.2.2 Test Instruments.....	33
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard.....	33
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Conditions.....	34
4.2.7 Test Results.....	35
4.3 6dB Bandwidth Measurement.....	39
4.3.1 Limits of 6dB Bandwidth Measurement.....	39
4.3.2 Test Setup.....	39
4.3.3 Test Instruments.....	39
4.3.4 Test Procedure.....	39
4.3.5 Deviation from Test Standard.....	39
4.3.6 EUT Operating Conditions.....	39
4.3.7 Test Result.....	40
4.4 Conducted Output Power Measurement.....	42
4.4.1 Limits of Conducted Output Power Measurement.....	42
4.4.2 Test Setup.....	42
4.4.3 Test Instruments.....	42
4.4.4 Test Procedures.....	42
4.4.5 Deviation from Test Standard.....	42
4.4.6 EUT Operating Conditions.....	42
4.4.7 Test Results.....	43
4.5 Power Spectral Density Measurement.....	44
4.5.1 Limits of Power Spectral Density Measurement.....	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments.....	44
4.5.4 Test Procedure.....	44
4.5.5 Deviation from Test Standard.....	44
4.5.6 EUT Operating Condition.....	44



4.5.7 Test Results .....	45
4.6 Conducted Out of Band Emission Measurement.....	48
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	48
4.6.2 Test Setup.....	48
4.6.3 Test Instruments .....	48
4.6.4 Test Procedure .....	48
4.6.5 Deviation from Test Standard .....	48
4.6.6 EUT Operating Condition .....	48
4.6.7 Test Results .....	48
<b>5 Pictures of Test Arrangements.....</b>	<b>57</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>58</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF150316C01	Original release.	May 07, 2015

## 1 Certificate of Conformity

**Product:** 2.4GHz b/g/n, 5GHz ac/a/n Indoor AP

**Brand:** EnGenius

**Test Model:** ECB1200


**Sample Status:** Engineering sample

**Applicant:** EnGenius Technologies

**Test Date:** Mar. 18 ~ Apr. 21, 2015

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** , **Date:** May 07, 2015  
Pettie Chen / Senior Specialist

**Approved by :** , **Date:** May 07, 2015  
Ken Liu / Senior Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.48dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.4dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	2.4GHz b/g/n, 5GHz ac/a/n Indoor AP
Brand	EnGenius
Test Model	ECB1200
Status of EUT	Engineering sample
Power Supply Rating	12Vdc (adapter) 48Vdc (PoE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	784.234mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Data Cable Supplied	0.5m RJ45 non-shielded cable without core

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

2. The EUT uses following adapter and PoE.

<b>Adapter</b>	
Brand	Powertron Electronics Corp.
Model	PA1024-2HUB PA1024-120HUB200
Input Power	100-240Vac~50-60Hz 0.6A
Output Power	12Vdc / 2.0A 24W Max
Power Line	1.5m cable with 1 core

<b>PoE (Support unit)</b>	
Brand	EnGenius
Model	EPE-48GR
Rating	48Vdc / 0.38A 18.24W

<b>Adapter of PoE (Support unit)</b>	
Brand	Powertron Electronics Corp.
Model	PA1040-480IB080
Input Power	100-240Vac~50-60Hz 1.5A
Output Power	48Vdc / 0.8A 38.4W Max
Power Line	1.6m cable with 1 core

3. The following antenna was provided to the EUT.

Antenna Type	Dipole		
Antenna Connector	RSMA		
Gain (dBi)	Frequency (MHz)		
	2400	2450	2500
	5.12	4.94	5.02

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter
B	-	√	√	-	Power from PoE

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.  
2. "-" means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	6	DSSS	DBPSK	1.0

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	6	DSSS	DBPSK	1.0

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
<b>RE≥1G</b>	18deg. C, 70%RH	120Vac, 60Hz	Nick Hsu
<b>RE&lt;1G</b>	18deg. C, 70%RH	120Vac, 60Hz 48Vdc	Nick Hsu
<b>PLC</b>	24deg. C, 68%RH	120Vac, 60Hz 48Vdc	Kevin Kuo
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz	Leo Tsai

### 3.3 Duty Cycle of Test Signal

**802.11b:** Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


**802.11g, 802.11n (HT20), 802.11n (HT40):**

Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

**802.11g:** Duty cycle =  $2.017/2.075 = 0.972$ , Duty factor =  $10 * \log(1/0.972) = 0.12$

**802.11n (HT20):** Duty cycle =  $1.888/1.948 = 0.969$ , Duty factor =  $10 * \log(1/0.969) = 0.14$

**802.11n (HT40):** Duty cycle =  $0.912/0.964 = 0.946$ , Duty factor =  $10 * \log(1/0.946) = 0.24$

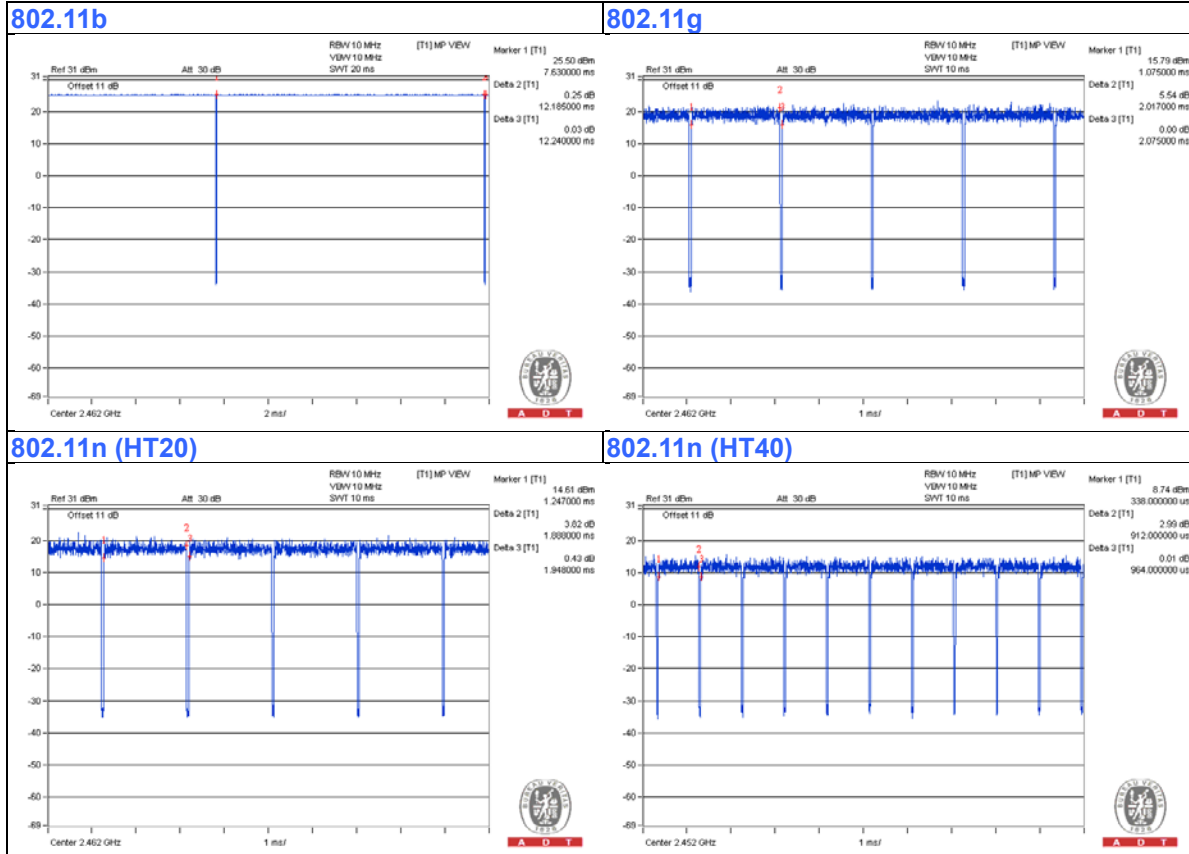

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	PoE	EnGenius	EPE-48GR	-	-	Provided by client
C.	Adapter of PoE	Powertron Electronics Corp.	PA1040-480IB080	-	-	Provided by client

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Items A~C acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	3	N	0	-
2.	DC cable	1	1.6	N	1	Provided by client
3.	LAN cable	1	0.5	N	0	-


Note: The core(s) is(are) originally attached to the cable(s).

#### 3.4.1 Configuration of System under Test

Test Mode A

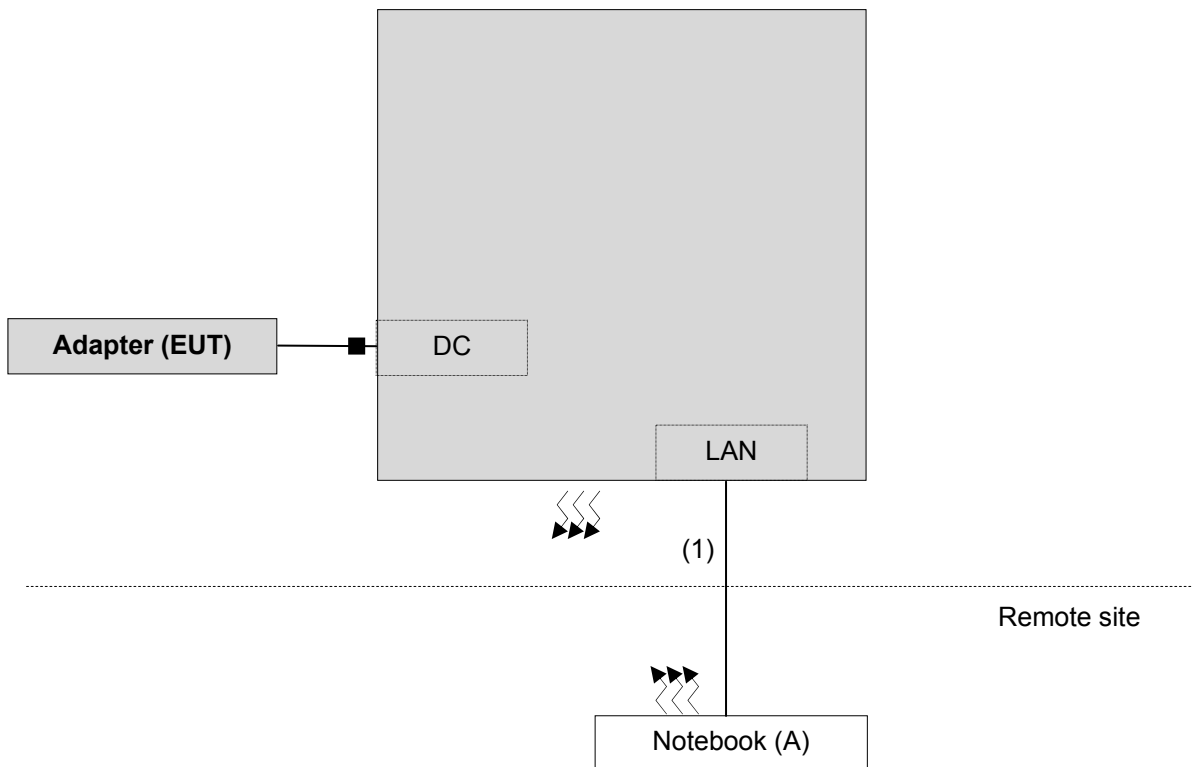

Test Mode B

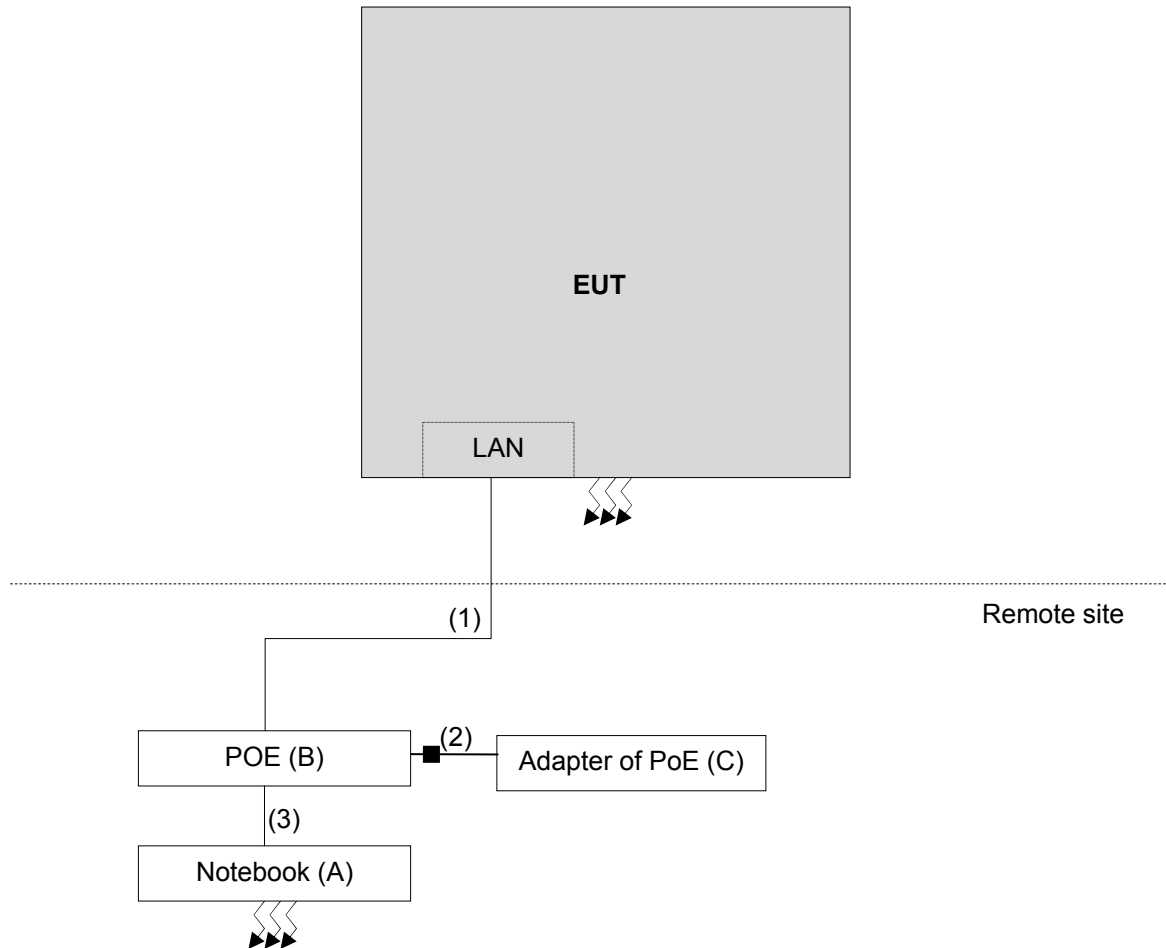

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**558074 D01 DTS Meas Guidance v03r02**  
**662911 D01 Multiple Transmitter Output v02r01**  
ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



## 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Apr. 10, 2015	Apr. 09, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Aug. 29, 2014	Aug. 28, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	9120D	209	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8447D	2944A10738	Oct.18, 2014	Oct. 17, 2015
Preamplifier Agilent	8449B	3008A01964	Aug. 22, 2014	Aug. 21, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214378/4	Aug. 22, 2014	Aug. 21, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6 +309224/4	Aug. 22, 2014	Aug. 21, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 988962.
  5. The IC Site Registration No. is IC 7450F-3.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.


#### 4.1.4 Deviation from Test Standard

No deviation.




4.1.5 Test Set Up

<Frequency Range below 1GHz>

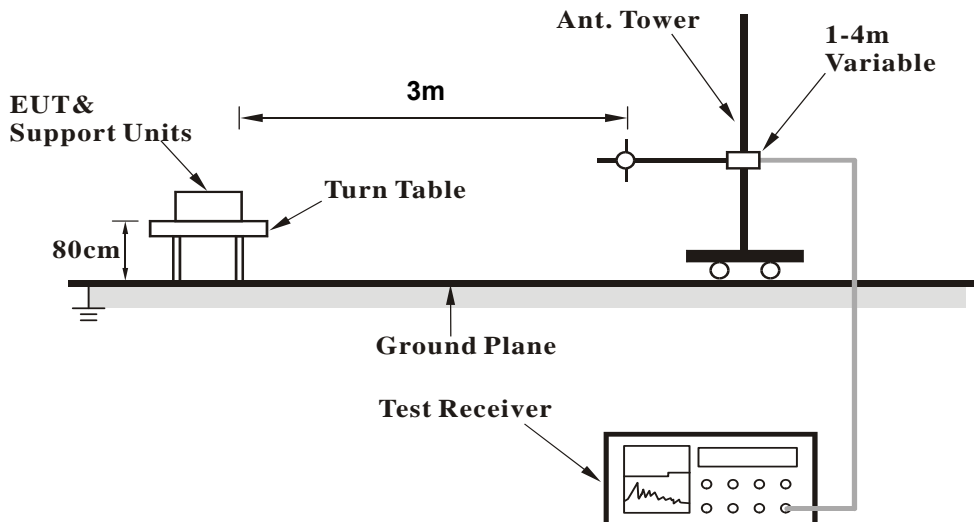

<Frequency Range above 1GHz>

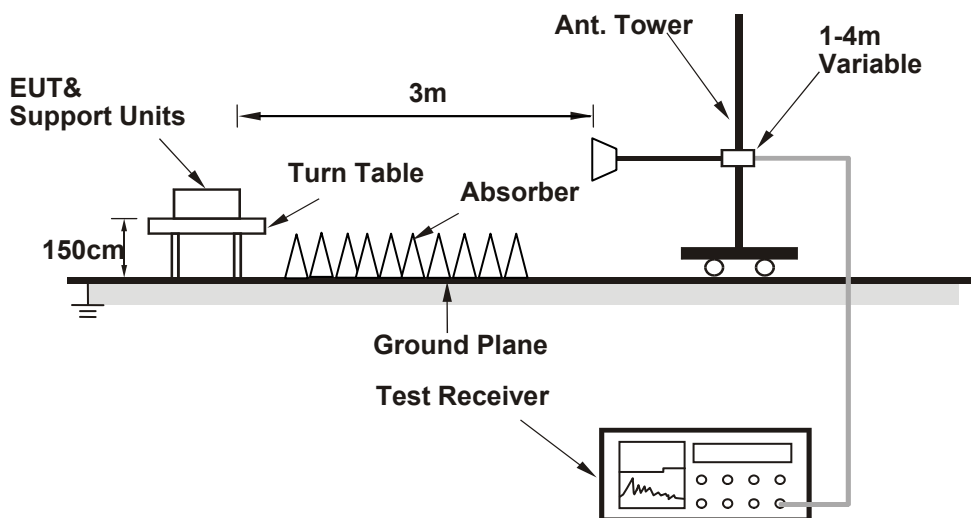

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".
- e. The necessary accessories enable the system in full functions.

#### 4.1.7 Test Results

#### Above 1GHz Data :

#### 802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2371.00	64.0 PK	74.0	-10.0	1.00 H	175	31.50	32.50
2	2371.00	52.3 AV	54.0	-1.7	1.00 H	175	19.80	32.50
3	*2412.00	119.2 PK			1.00 H	174	86.60	32.60
4	*2412.00	115.8 AV			1.00 H	174	83.20	32.60
5	2483.50	65.4 PK	74.0	-8.6	1.23 H	173	32.70	32.70
6	2483.50	50.7 AV	54.0	-3.3	1.23 H	173	18.00	32.70
7	4824.00	47.3 PK	74.0	-26.7	1.22 H	333	41.40	5.90
8	4824.00	35.8 AV	54.0	-18.2	1.22 H	333	29.90	5.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2371.00	56.9 PK	74.0	-17.1	1.14 V	271	24.40	32.50
2	2371.00	45.3 AV	54.0	-8.7	1.14 V	271	12.80	32.50
3	*2412.00	106.2 PK			1.24 V	174	73.60	32.60
4	*2412.00	102.5 AV			1.24 V	174	69.90	32.60
5	2483.50	57.5 PK	74.0	-16.5	1.44 V	266	24.80	32.70
6	2483.50	46.1 AV	54.0	-7.9	1.44 V	266	13.40	32.70
7	4824.00	47.5 PK	74.0	-26.5	1.22 V	69	41.60	5.90
8	4824.00	34.1 AV	54.0	-19.9	1.22 V	69	28.20	5.90

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.58 H	172	32.70	32.50
2	2390.00	50.8 AV	54.0	-3.2	1.58 H	172	18.30	32.50
3	*2437.00	125.0 PK			1.13 H	349	92.30	32.70
4	*2437.00	121.7 AV			1.13 H	349	89.00	32.70
5	2483.50	63.3 PK	74.0	-10.7	1.68 H	173	30.60	32.70
6	2483.50	51.1 AV	54.0	-2.9	1.68 H	173	18.40	32.70
7	4874.00	53.1 PK	74.0	-20.9	1.36 H	176	47.20	5.90
8	4874.00	48.8 AV	54.0	-5.2	1.36 H	176	42.90	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.23 V	209	24.40	32.50
2	2390.00	45.3 AV	54.0	-8.7	1.23 V	209	12.80	32.50
3	*2437.00	114.7 PK			1.00 V	270	82.00	32.70
4	*2437.00	111.4 AV			1.00 V	270	78.70	32.70
5	2483.50	57.0 PK	74.0	-17.0	1.22 V	178	24.30	32.70
6	2483.50	45.6 AV	54.0	-8.4	1.22 V	178	12.90	32.70
7	4874.00	49.3 PK	74.0	-24.7	1.69 V	264	43.40	5.90
8	4874.00	41.6 AV	54.0	-12.4	1.69 V	264	35.70	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.8 PK			1.00 H	166	88.20	32.60
2	*2462.00	117.5 AV			1.00 H	166	84.90	32.60
3	2500.00	63.4 PK	74.0	-10.6	1.09 H	355	30.60	32.80
4	2500.00	52.2 AV	54.0	-1.8	1.09 H	355	19.40	32.80
5	4924.00	50.5 PK	74.0	-23.5	1.27 H	344	44.50	6.00
6	4924.00	42.1 AV	54.0	-11.9	1.27 H	344	36.10	6.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.5 PK			1.00 V	264	77.90	32.60
2	*2462.00	107.1 AV			1.00 V	264	74.50	32.60
3	2500.00	57.8 PK	74.0	-16.2	1.26 V	242	25.00	32.80
4	2500.00	46.5 AV	54.0	-7.5	1.26 V	242	13.70	32.80
5	4924.00	47.7 PK	74.0	-26.3	1.00 V	261	41.70	6.00
6	4924.00	36.0 AV	54.0	-18.0	1.00 V	261	30.00	6.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.00 H	176	31.90	32.50
2	2390.00	52.4 AV	54.0	-1.6	1.00 H	176	19.90	32.50
3	*2412.00	115.2 PK			1.00 H	173	82.60	32.60
4	*2412.00	105.9 AV			1.00 H	173	73.30	32.60
5	4824.00	47.4 PK	74.0	-26.6	1.23 H	127	41.50	5.90
6	4824.00	34.2 AV	54.0	-19.8	1.23 H	127	28.30	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.56 V	184	24.10	32.50
2	2390.00	45.6 AV	54.0	-8.4	1.56 V	184	13.10	32.50
3	*2412.00	101.8 PK			1.00 V	268	69.20	32.60
4	*2412.00	92.5 AV			1.00 V	268	59.90	32.60
5	4824.00	47.1 PK	74.0	-26.9	1.32 V	64	41.20	5.90
6	4824.00	34.0 AV	54.0	-20.0	1.32 V	64	28.10	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	1.00 H	350	31.50	32.50
2	2390.00	52.0 AV	54.0	-2.0	1.00 H	350	19.50	32.50
3	*2437.00	119.8 PK			1.00 H	353	87.10	32.70
4	*2437.00	111.0 AV			1.00 H	353	78.30	32.70
5	2483.50	65.8 PK	74.0	-8.2	1.25 H	171	33.10	32.70
6	2483.50	52.2 AV	54.0	-1.8	1.25 H	171	19.50	32.70
7	4874.00	46.5 PK	74.0	-27.5	1.16 H	147	40.60	5.90
8	4874.00	34.4 AV	54.0	-19.6	1.16 H	147	28.50	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.27 V	259	24.40	32.50
2	2390.00	45.4 AV	54.0	-8.6	1.27 V	259	12.90	32.50
3	*2437.00	109.3 PK			1.00 V	267	76.60	32.70
4	*2437.00	100.5 AV			1.00 V	267	67.80	32.70
5	2483.50	56.9 PK	74.0	-17.1	1.30 V	275	24.20	32.70
6	2483.50	45.9 AV	54.0	-8.1	1.30 V	275	13.20	32.70
7	4874.00	47.5 PK	74.0	-26.5	1.35 V	166	41.60	5.90
8	4874.00	34.0 AV	54.0	-20.0	1.35 V	166	28.10	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.9 PK			1.83 H	171	82.30	32.60
2	*2462.00	105.5 AV			1.83 H	171	72.90	32.60
3	2483.50	64.9 PK	74.0	-9.1	1.67 H	172	32.20	32.70
4	2483.50	52.2 AV	54.0	-1.8	1.67 H	172	19.50	32.70
5	4924.00	47.6 PK	74.0	-26.4	1.61 H	69	41.60	6.00
6	4924.00	34.4 AV	54.0	-19.6	1.61 H	69	28.40	6.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.0 PK			1.27 V	264	71.40	32.60
2	*2462.00	94.1 AV			1.27 V	264	61.50	32.60
3	2483.50	58.0 PK	74.0	-16.0	1.00 V	279	25.30	32.70
4	2483.50	45.8 AV	54.0	-8.2	1.00 V	279	13.10	32.70
5	4924.00	47.4 PK	74.0	-26.6	1.03 V	246	41.40	6.00
6	4924.00	34.0 AV	54.0	-20.0	1.03 V	246	28.00	6.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.64 H	168	33.90	32.50
2	2390.00	52.2 AV	54.0	-1.8	1.64 H	168	19.70	32.50
3	*2412.00	115.4 PK			1.00 H	345	82.80	32.60
4	*2412.00	105.3 AV			1.00 H	345	72.70	32.60
5	4824.00	46.9 PK	74.0	-27.1	1.30 H	267	41.00	5.90
6	4824.00	34.0 AV	54.0	-20.0	1.30 H	267	28.10	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.44 V	98	24.60	32.50
2	2390.00	45.6 AV	54.0	-8.4	1.44 V	98	13.10	32.50
3	*2412.00	101.1 PK			1.00 V	266	68.50	32.60
4	*2412.00	91.9 AV			1.00 V	266	59.30	32.60
5	4824.00	47.0 PK	74.0	-27.0	1.13 V	176	41.10	5.90
6	4824.00	33.9 AV	54.0	-20.1	1.13 V	176	28.00	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.60 H	173	32.30	32.50
2	2390.00	51.6 AV	54.0	-2.4	1.60 H	173	19.10	32.50
3	*2437.00	119.8 PK			1.00 H	166	87.10	32.70
4	*2437.00	110.5 AV			1.00 H	166	77.80	32.70
5	2483.50	64.0 PK	74.0	-10.0	1.25 H	171	31.30	32.70
6	2483.50	52.2 AV	54.0	-1.8	1.25 H	171	19.50	32.70
7	4874.00	47.8 PK	74.0	-26.2	1.26 H	335	41.90	5.90
8	4874.00	34.3 AV	54.0	-19.7	1.26 H	335	28.40	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	1.12 V	267	23.80	32.50
2	2390.00	45.4 AV	54.0	-8.6	1.12 V	267	12.90	32.50
3	*2437.00	109.7 PK			1.00 V	267	77.00	32.70
4	*2437.00	100.8 AV			1.00 V	267	68.10	32.70
5	2483.50	57.3 PK	74.0	-16.7	1.42 V	267	24.60	32.70
6	2483.50	46.4 AV	54.0	-7.6	1.42 V	267	13.70	32.70
7	4874.00	47.3 PK	74.0	-26.7	1.28 V	124	41.40	5.90
8	4874.00	34.3 AV	54.0	-19.7	1.28 V	124	28.40	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.9 PK			1.00 H	169	80.30	32.60
2	*2462.00	104.1 AV			1.00 H	169	71.50	32.60
3	2483.50	65.0 PK	74.0	-9.0	1.00 H	168	32.30	32.70
4	2483.50	52.2 AV	54.0	-1.8	1.00 H	168	19.50	32.70
5	4924.00	47.6 PK	74.0	-26.4	1.16 H	98	41.60	6.00
6	4924.00	34.5 AV	54.0	-19.5	1.16 H	98	28.50	6.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.2 PK			1.00 V	265	70.60	32.60
2	*2462.00	93.4 AV			1.00 V	265	60.80	32.60
3	2483.50	57.9 PK	74.0	-16.1	1.00 V	271	25.20	32.70
4	2483.50	46.3 AV	54.0	-7.7	1.00 V	271	13.60	32.70
5	4924.00	47.1 PK	74.0	-26.9	1.15 V	213	41.10	6.00
6	4924.00	34.3 AV	54.0	-19.7	1.15 V	213	28.30	6.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**802.11n (40MHz)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.00 H	170	34.00	32.50
2	2390.00	52.2 AV	54.0	-1.8	1.00 H	170	19.70	32.50
3	*2422.00	107.8 PK			1.00 H	348	75.20	32.60
4	*2422.00	98.6 AV			1.00 H	348	66.00	32.60
5	4844.00	46.7 PK	74.0	-27.3	1.12 H	246	40.80	5.90
6	4844.00	34.0 AV	54.0	-20.0	1.12 H	246	28.10	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.00 V	266	24.10	32.50
2	2390.00	45.4 AV	54.0	-8.6	1.00 V	266	12.90	32.50
3	*2422.00	96.4 PK			1.00 V	267	63.80	32.60
4	*2422.00	87.2 AV			1.00 V	267	54.60	32.60
5	4844.00	46.1 PK	74.0	-27.9	1.06 V	108	40.20	5.90
6	4844.00	33.8 AV	54.0	-20.2	1.06 V	108	27.90	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.00 H	174	29.60	32.50
2	2390.00	52.2 AV	54.0	-1.8	1.00 H	174	19.70	32.50
3	*2437.00	111.7 PK			1.00 H	163	79.00	32.70
4	*2437.00	103.0 AV			1.00 H	163	70.30	32.70
5	2483.50	62.8 PK	74.0	-11.2	1.21 H	175	30.10	32.70
6	2483.50	51.6 AV	54.0	-2.4	1.21 H	175	18.90	32.70
7	4874.00	46.9 PK	74.0	-27.1	1.08 H	96	41.00	5.90
8	4874.00	34.6 AV	54.0	-19.4	1.08 H	96	28.70	5.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.14 V	264	24.30	32.50
2	2390.00	46.2 AV	54.0	-7.8	1.14 V	264	13.70	32.50
3	*2437.00	101.0 PK			1.00 V	269	68.30	32.70
4	*2437.00	92.8 AV			1.00 V	269	60.10	32.70
5	2483.50	58.0 PK	74.0	-16.0	1.12 V	266	25.30	32.70
6	2483.50	46.7 AV	54.0	-7.3	1.12 V	266	14.00	32.70
7	4874.00	46.6 PK	74.0	-27.4	1.27 V	104	40.70	5.90
8	4874.00	34.6 AV	54.0	-19.4	1.27 V	104	28.70	5.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.5 PK			1.00 H	166	75.80	32.70
2	*2452.00	99.7 AV			1.00 H	166	67.00	32.70
3	2483.50	68.6 PK	74.0	-5.4	1.00 H	165	35.90	32.70
<b>4</b>	<b>2483.50</b>	<b>52.6 AV</b>	<b>54.0</b>	<b>-1.4</b>	<b>1.00 H</b>	<b>165</b>	<b>19.90</b>	<b>32.70</b>
5	4904.00	46.9 PK	74.0	-27.1	1.24 H	89	41.10	5.80
6	4904.00	34.6 AV	54.0	-19.4	1.24 H	89	28.80	5.80

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.8 PK			1.00 V	264	65.10	32.70
2	*2452.00	89.2 AV			1.00 V	264	56.50	32.70
3	2483.50	62.0 PK	74.0	-12.0	2.14 V	95	29.30	32.70
4	2483.50	47.4 AV	54.0	-6.6	2.14 V	95	14.70	32.70
5	4904.00	46.6 PK	74.0	-27.4	1.19 V	95	40.80	5.80
6	4904.00	34.2 AV	54.0	-19.8	1.19 V	95	28.40	5.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

**Below 1GHz Data:**
**802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz	<b>TEST MODE</b>	A

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	32.7 QP	40.0	-7.3	2.00 H	286	47.30	-14.60
2	177.67	35.8 QP	43.5	-7.7	1.51 H	216	50.90	-15.10
3	500.42	37.0 QP	46.0	-9.0	1.51 H	45	45.40	-8.40
4	624.85	39.2 QP	46.0	-6.8	1.01 H	106	44.80	-5.60
5	722.07	40.6 QP	46.0	-5.4	1.51 H	18	44.70	-4.10
6	875.67	41.8 QP	46.0	-4.2	1.51 H	223	42.90	-1.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.79	36.6 QP	40.0	-3.4	1.00 V	140	52.40	-15.80
2	57.12	32.1 QP	40.0	-7.9	1.00 V	179	46.70	-14.60
3	177.67	35.2 QP	43.5	-8.3	1.00 V	182	50.30	-15.10
4	500.42	31.6 QP	46.0	-14.4	1.00 V	304	40.00	-8.40
5	624.85	38.5 QP	46.0	-7.5	1.00 V	195	44.10	-5.60
6	875.67	43.8 QP	46.0	-2.2	1.00 V	10	44.90	-1.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

**802.11b**

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz	<b>TEST MODE</b>	B

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	32.6 QP	40.0	-7.4	1.99 H	4	47.20	-14.60
2	138.78	27.8 QP	43.5	-15.7	1.99 H	102	42.60	-14.80
3	191.28	27.4 QP	43.5	-16.1	1.99 H	315	43.90	-16.50
4	500.42	36.7 QP	46.0	-9.3	1.50 H	66	45.10	-8.40
5	624.85	37.7 QP	46.0	-8.3	1.00 H	138	43.30	-5.60
6	875.67	38.5 QP	46.0	-7.5	1.50 H	8	39.60	-1.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	35.3 QP	40.0	-4.7	1.00 V	296	51.00	-15.70
2	39.62	35.7 QP	40.0	-4.3	1.00 V	250	50.70	-15.00
3	185.44	30.5 QP	43.5	-13.0	1.00 V	70	46.50	-16.00
4	500.42	32.8 QP	46.0	-13.2	2.00 V	190	41.20	-8.40
5	624.85	38.4 QP	46.0	-7.6	1.00 V	57	44.00	-5.60
6	875.67	41.6 QP	46.0	-4.4	1.50 V	4	42.70	-1.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 11, 2014	Nov. 10, 2015
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 02, 2015	Mar. 01, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

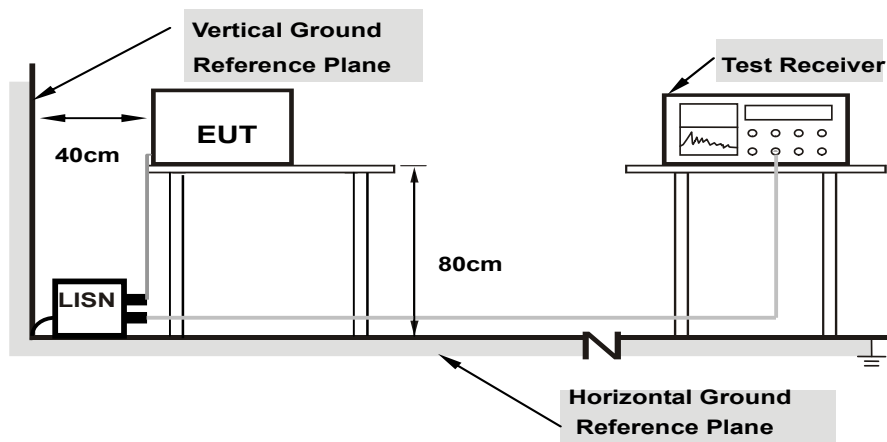

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
<b>1</b>	<b>0.15000</b>	<b>0.05</b>	<b>59.47</b>	<b>42.46</b>	<b>59.52</b>	<b>42.51</b>	<b>66.00</b>	<b>56.00</b>	<b>-6.48</b>	<b>-13.49</b>
2	0.19255	0.06	53.10	35.81	53.16	35.87	63.93	53.93	-10.77	-18.06
3	0.26339	0.06	44.26	27.14	44.32	27.20	61.32	51.32	-17.00	-24.12
4	0.50581	0.06	38.64	30.86	38.70	30.92	56.00	46.00	-17.30	-15.08
5	4.58394	0.22	33.26	24.22	33.48	24.44	56.00	46.00	-22.52	-21.56
6	11.25049	0.51	41.82	36.70	42.33	37.21	60.00	50.00	-17.67	-12.79

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

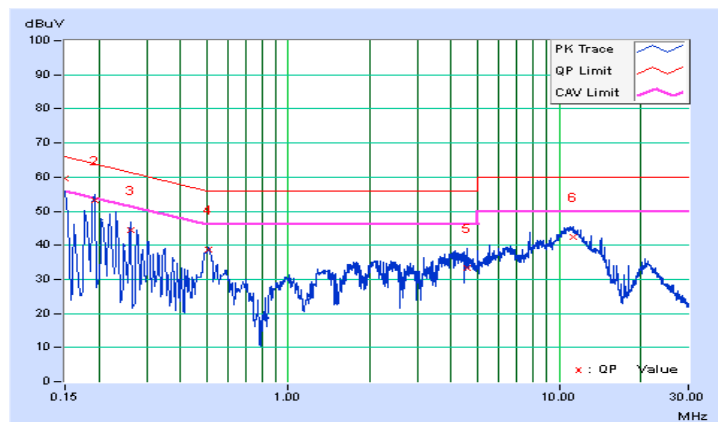


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17346	0.05	55.96	38.66	56.01	38.71	64.79
2	0.18508	0.05	54.16	36.60	54.21	36.65	64.25	54.25	-10.04	-17.60
3	0.49846	0.06	40.14	32.01	40.20	32.07	56.03	46.03	-15.82	-13.95
4	1.72573	0.10	32.63	26.03	32.73	26.13	56.00	46.00	-23.27	-19.87
5	10.92615	0.45	37.24	32.49	37.69	32.94	60.00	50.00	-22.31	-17.06
6	15.24260	0.58	28.65	22.09	29.23	22.67	60.00	50.00	-30.77	-27.33

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

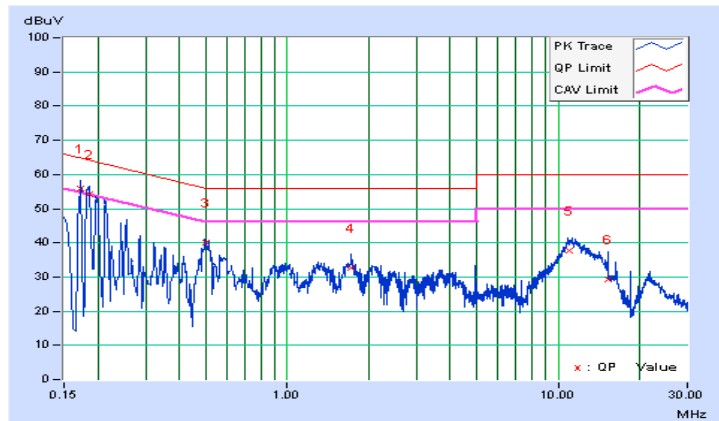


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	0.05	30.03	7.36	30.08	7.41	65.18
2	0.51719	0.06	42.52	33.66	42.58	33.72	56.00	46.00	-13.42	-12.28
3	0.97597	0.08	33.61	22.60	33.69	22.68	56.00	46.00	-22.31	-23.32
4	1.77656	0.11	31.08	22.95	31.19	23.06	56.00	46.00	-24.81	-22.94
5	14.87897	0.67	30.31	29.50	30.98	30.17	60.00	50.00	-29.02	-19.83
6	22.04991	0.96	32.35	23.35	33.31	24.31	60.00	50.00	-26.69	-25.69

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

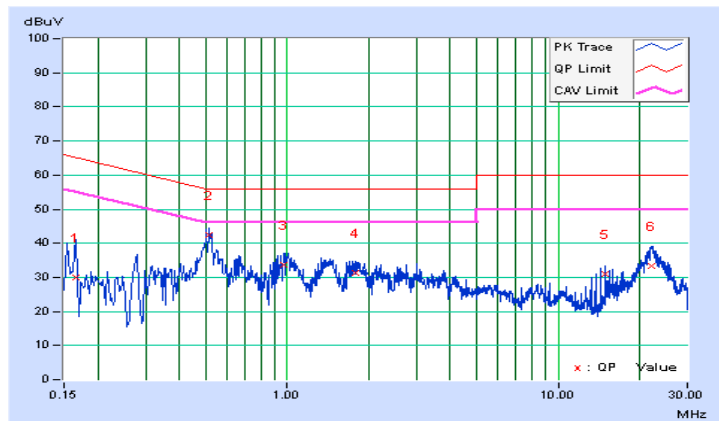


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17651	0.05	35.34	21.60	35.39	21.65	64.65	54.65	-29.26	-33.00
2	0.49715	0.06	39.82	27.75	39.88	27.81	56.05	46.05	-16.16	-18.23
3	1.42466	0.09	30.48	20.27	30.57	20.36	56.00	46.00	-25.43	-25.64
4	3.02776	0.15	28.56	21.23	28.71	21.38	56.00	46.00	-27.29	-24.62
5	14.32766	0.55	29.89	29.36	30.44	29.91	60.00	50.00	-29.56	-20.09
6	22.07728	0.76	28.14	18.66	28.90	19.42	60.00	50.00	-31.10	-30.58

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

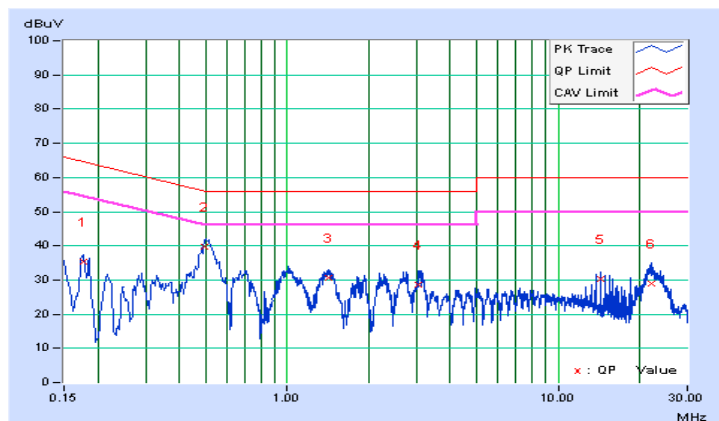


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	7.09	7.11	0.5	PASS
6	2437	7.12	7.13	0.5	PASS
11	2462	7.10	7.10	0.5	PASS

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.42	16.40	0.5	PASS
6	2437	16.38	16.39	0.5	PASS
11	2462	16.38	16.40	0.5	PASS





##### 802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.62	17.63	0.5	PASS
6	2437	17.60	17.60	0.5	PASS
11	2462	17.61	17.61	0.5	PASS

##### 802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.10	36.13	0.5	PASS
6	2437	36.36	36.35	0.5	PASS
9	2452	36.37	36.07	0.5	PASS

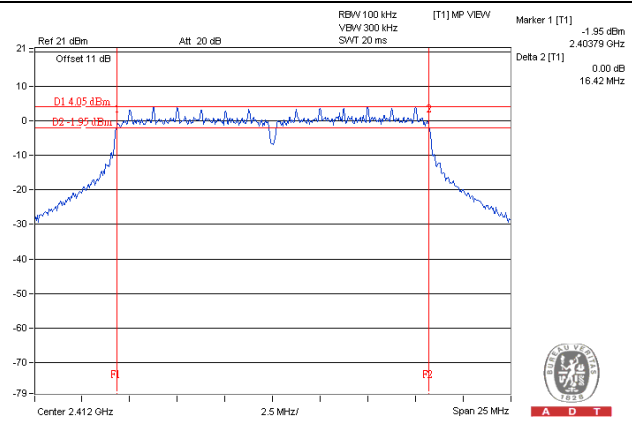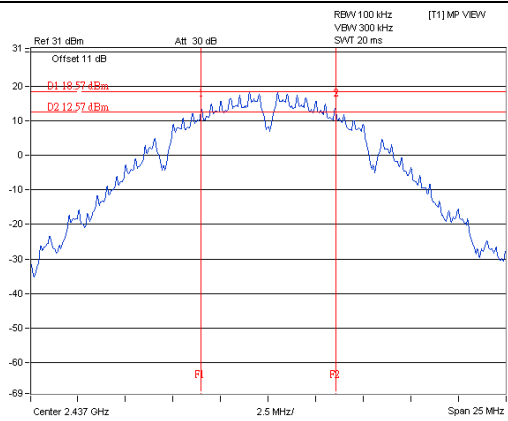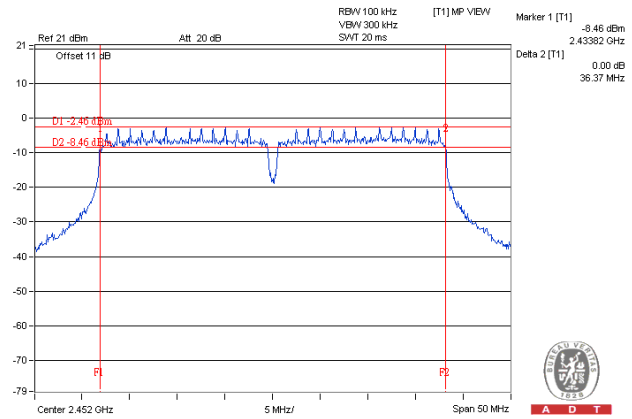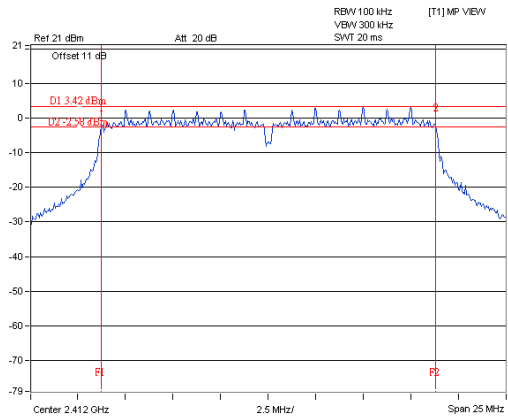

**Spectrum Plot of Worst Value****802.11b****802.11g****802.11n (HT20)****802.11n (HT40)**

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

#### 4.4.7 Test Results

### FOR AVERAGE POWER

#### 802.11b

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.59	19.22	174.551	22.42	30	Pass
6	2437	26.12	25.74	<b>784.234</b>	28.94	30	Pass
11	2462	22.17	21.89	319.341	25.04	30	Pass

#### 802.11g

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.96	15.50	74.927	18.75	30	Pass
6	2437	20.73	20.43	228.712	23.59	30	Pass
11	2462	15.45	15.35	69.352	18.41	30	Pass

#### 802.11n (HT20)

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.41	15.29	68.560	18.36	30	Pass
6	2437	20.75	20.30	226.002	23.54	30	Pass
11	2462	15.30	15.34	68.082	18.33	30	Pass

#### 802.11n (HT40)


Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	11.48	11.15	27.092	14.33	30	Pass
6	2437	16.00	15.95	79.166	18.99	30	Pass
9	2452	12.22	12.02	32.594	15.13	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup

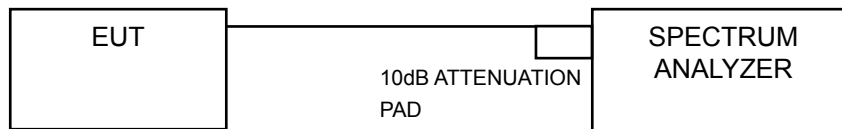

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

#### For AVG. power (duty cycle $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

#### For AVG. power (duty cycle $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log(1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-8.43	3.01	-5.42	5.87	Pass
	6	2437	-1.17	3.01	1.84	5.87	Pass
	11	2462	-4.92	3.01	-1.91	5.87	Pass
1	1	2412	-8.55	3.01	-5.54	5.87	Pass
	6	2437	-1.13	3.01	1.88	5.87	Pass
	11	2462	-5.01	3.01	-2.00	5.87	Pass

**NOTE:** Directional gain =  $5.12\text{dBi} + 10\log(2) = 8.13\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.13-6) = 5.87\text{dBm}$ .

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-15.41	3.01	0.12	-12.28	5.87	Pass
	6	2437	-10.06	3.01	0.12	-6.93	5.87	Pass
	11	2462	-16.07	3.01	0.12	-12.94	5.87	Pass
1	1	2412	-14.24	3.01	0.12	-11.11	5.87	Pass
	6	2437	-9.97	3.01	0.12	-6.84	5.87	Pass
	11	2462	-15.87	3.01	0.12	-12.74	5.87	Pass

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $5.12\text{dBi} + 10\log(2) = 8.13\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.13-6) = 5.87\text{dBm}$ .
- Refer to section 3.3 for duty cycle spectrum plot.

**802.11n (HT20)**

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-16.58	3.01	0.14	-13.43	5.87	Pass
	6	2437	-8.49	3.01	0.14	-5.34	5.87	Pass
	11	2462	-17.18	3.01	0.14	-14.03	5.87	Pass
1	1	2412	-16.29	3.01	0.14	-13.14	5.87	Pass
	6	2437	-9.24	3.01	0.14	-6.09	5.87	Pass
	11	2462	-17.22	3.01	0.14	-14.07	5.87	Pass

**NOTE:**





- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $5.12\text{dBi} + 10\log(2) = 8.13\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.13-6) = 5.87\text{dBm}$ .
- Refer to section 3.3 for duty cycle spectrum plot.

**802.11n (HT40)**

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-22.33	3.01	0.24	-19.08	5.87	Pass
	6	2437	-12.64	3.01	0.24	-9.39	5.87	Pass
	9	2452	-21.64	3.01	0.24	-18.39	5.87	Pass
1	3	2422	-23.07	3.01	0.24	-19.82	5.87	Pass
	6	2437	-10.28	3.01	0.24	-7.03	5.87	Pass
	9	2452	-21.67	3.01	0.24	-18.42	5.87	Pass

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $5.12\text{dBi} + 10\log(2) = 8.13\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8-(8.13-6) = 5.87\text{dBm}$ .
- Refer to section 3.3 for duty cycle spectrum plot.

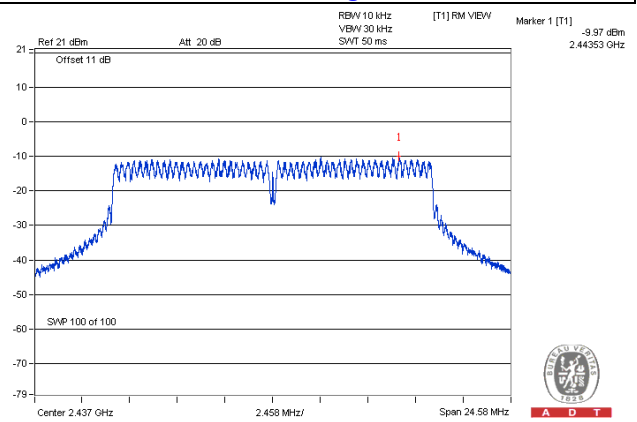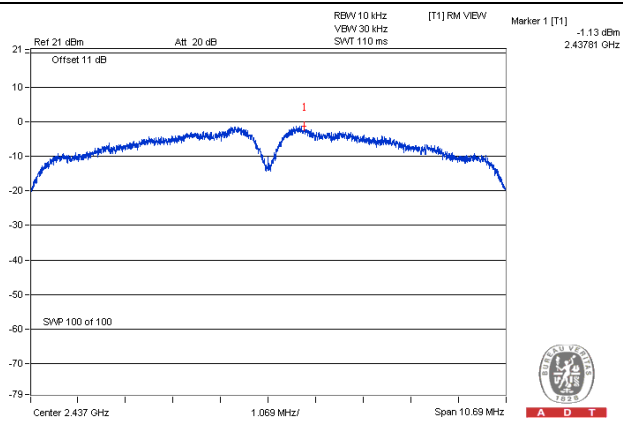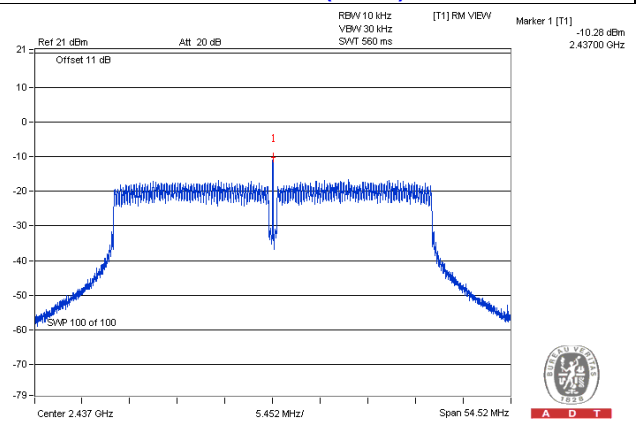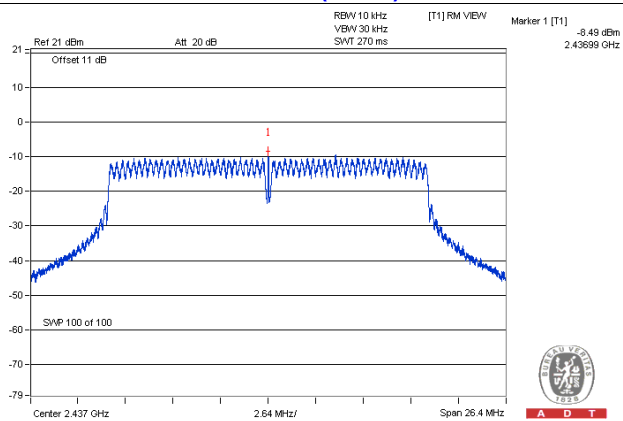
**Spectrum Plot of Worst Value****802.11b****802.11g****802.11n (HT20)****802.11n (HT40)**

## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

Same as Item 4.3.6



### 4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.





802.11b  
CHAIN 0



CH 1

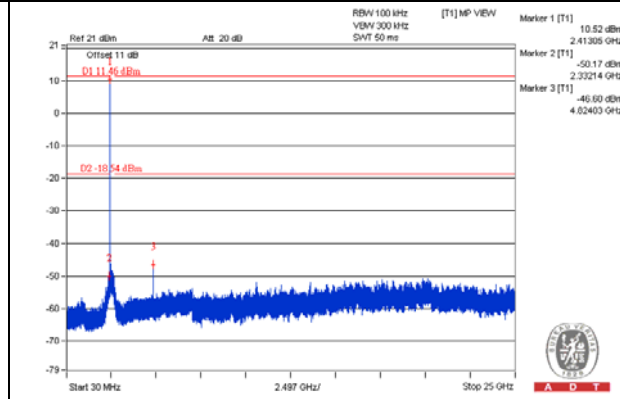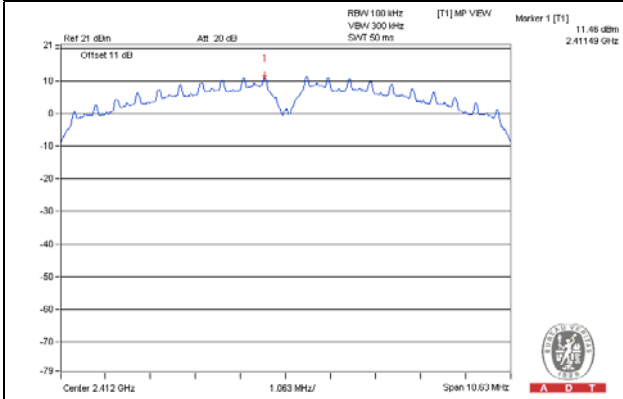


CH 6

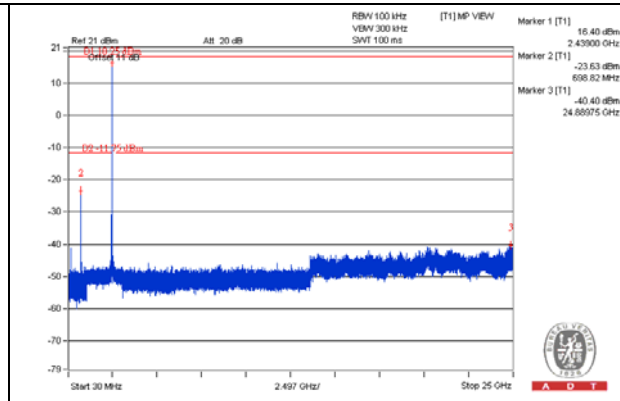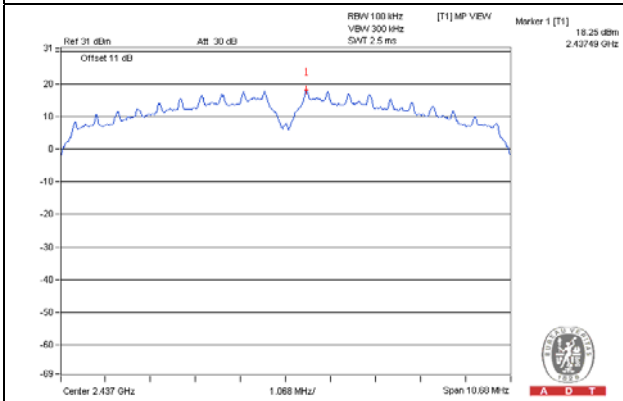


CH 11

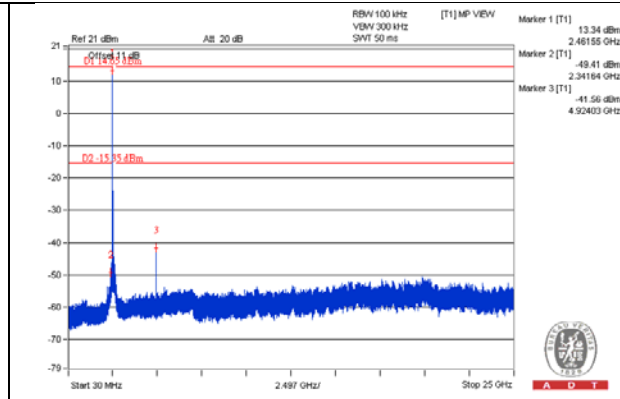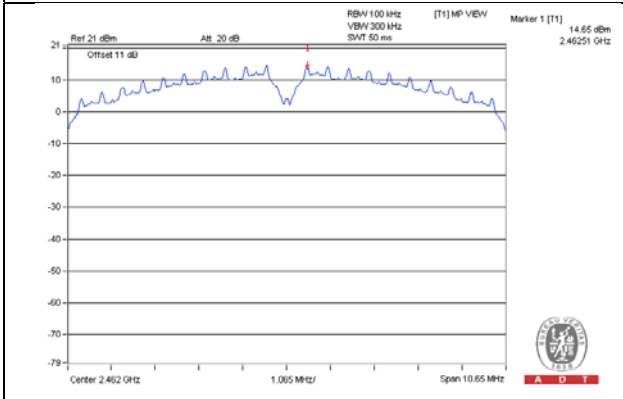

CH 1 Band edge


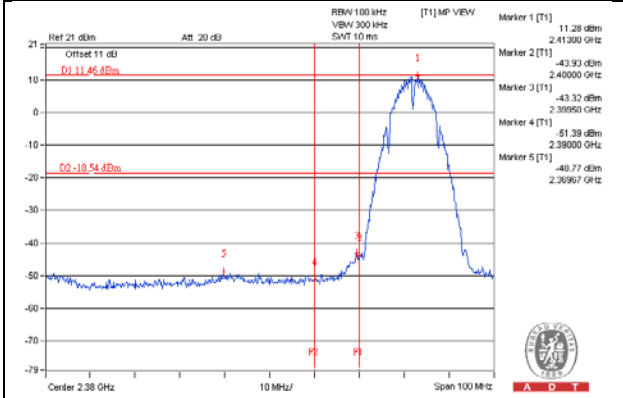


CH 11 Band edge


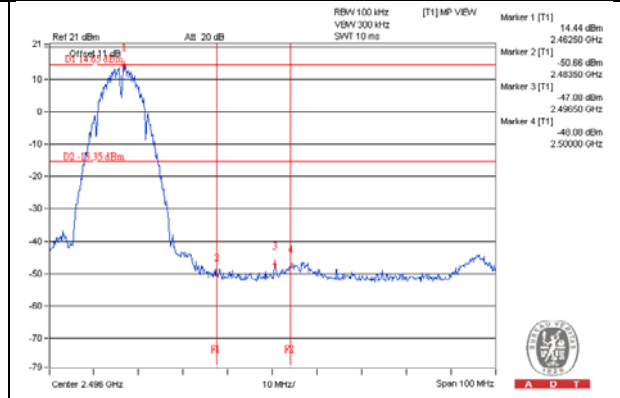


CHAIN 1



CH 1

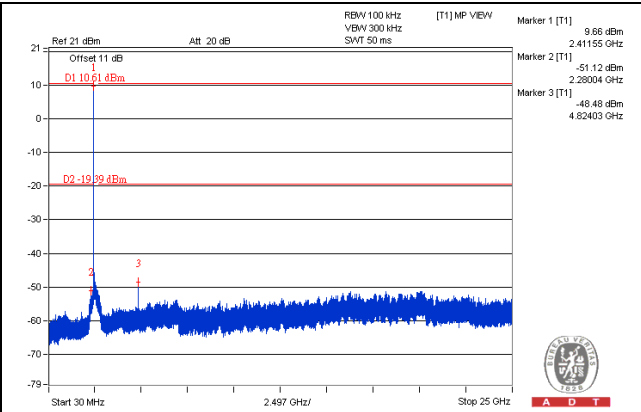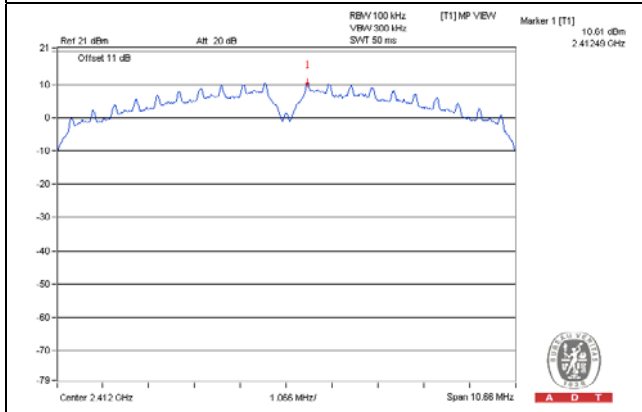


CH 6

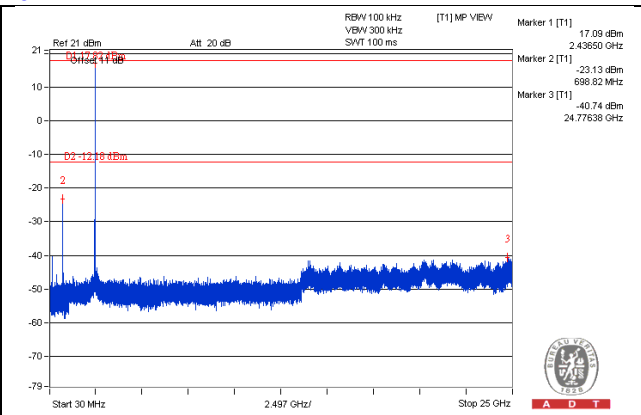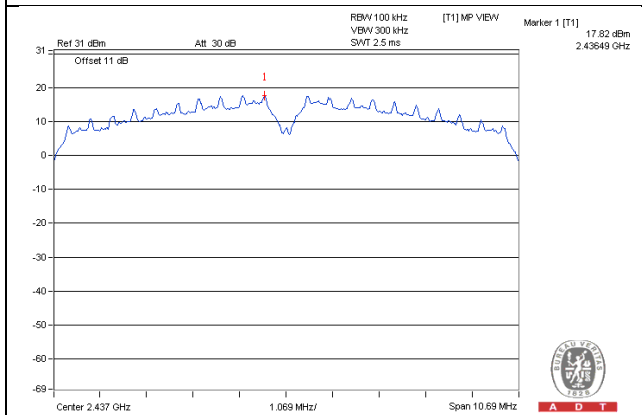


CH 11

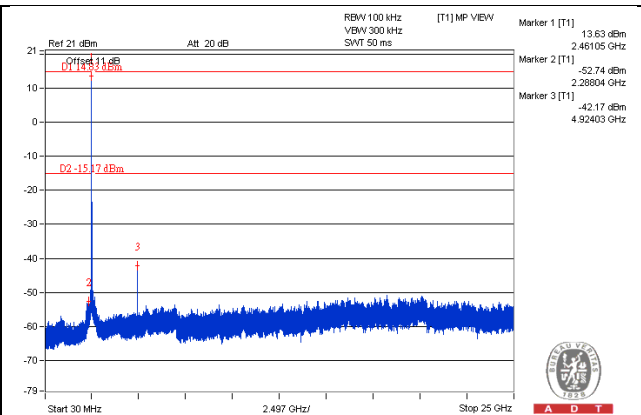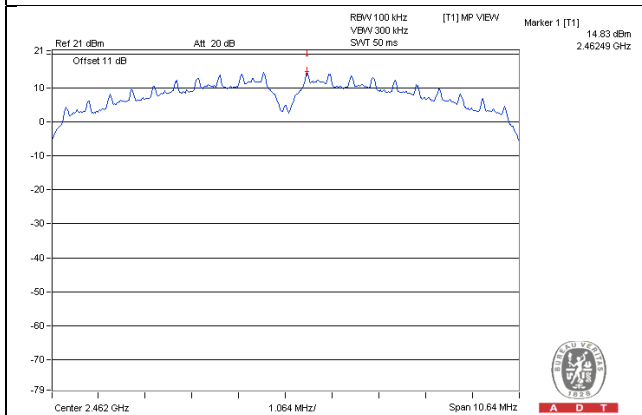

CH 1 Band edge


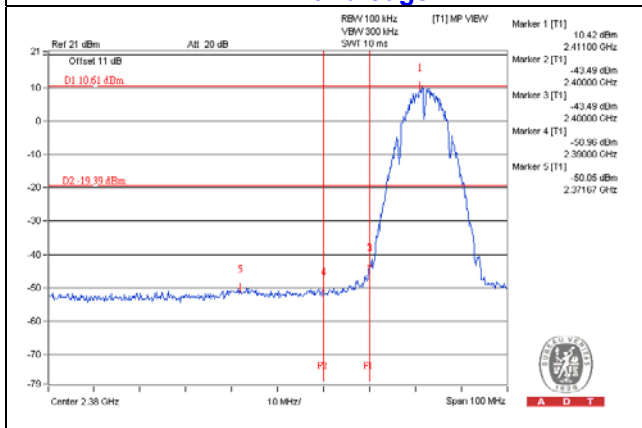


CH 11 Band edge


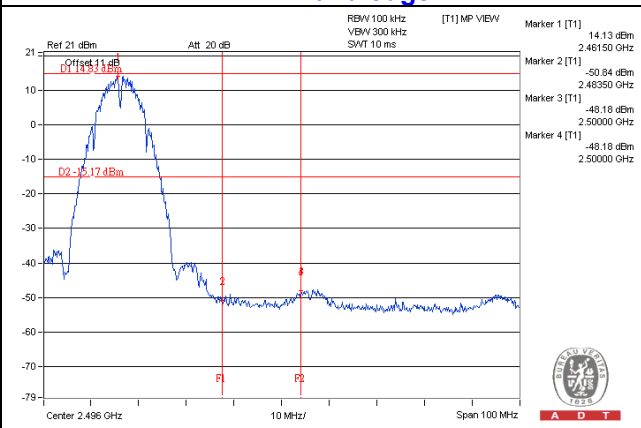


802.11g  
CHAIN 0



CH 1

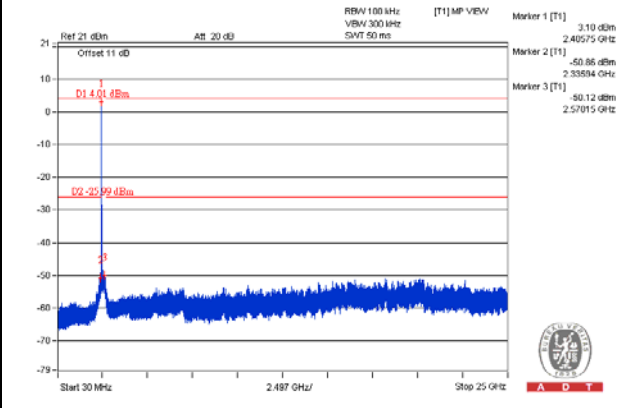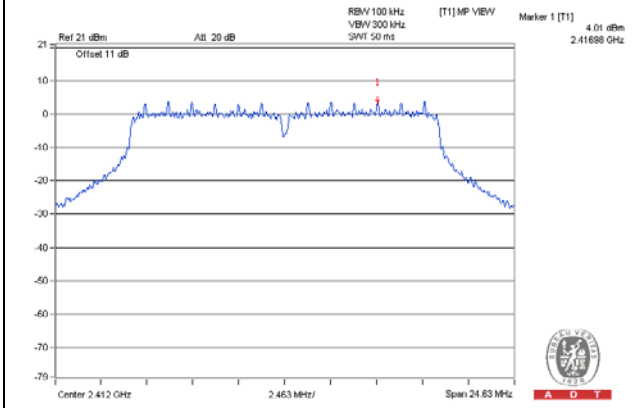


CH 6

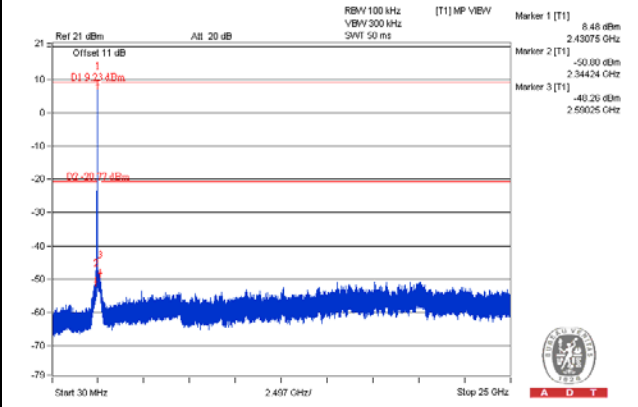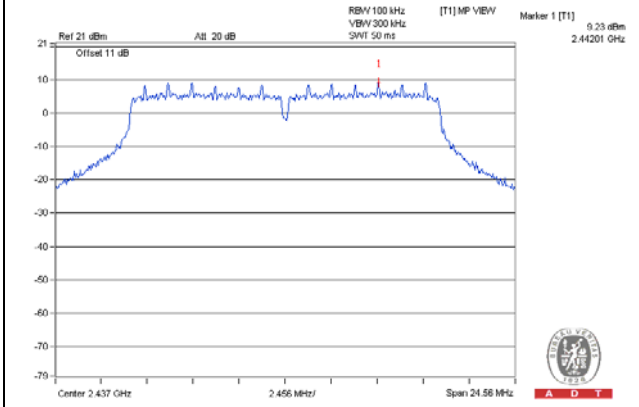


CH 11

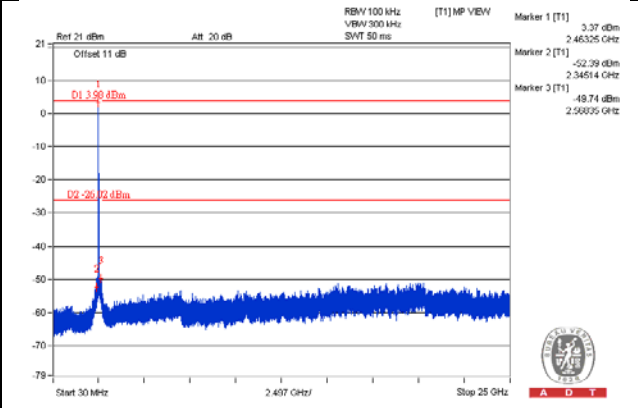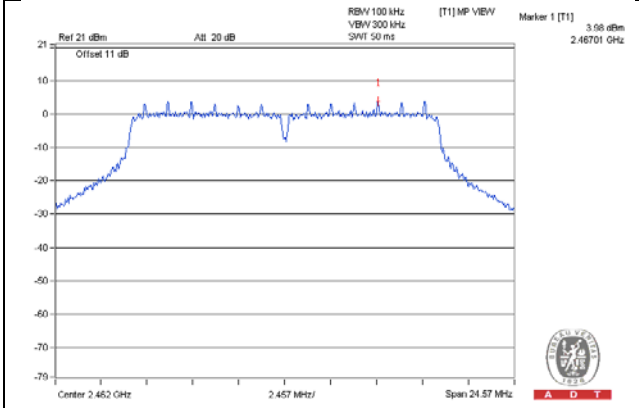

CH 1 Band edge


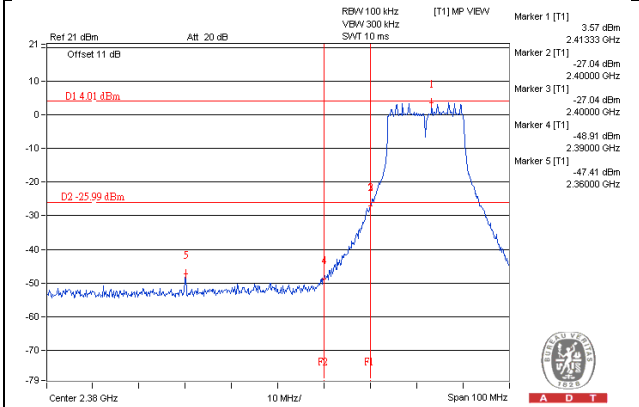


CH 11 Band edge


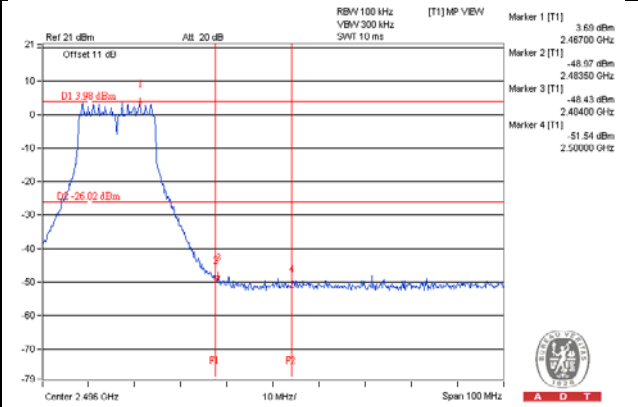


CHAIN 1



CH 1

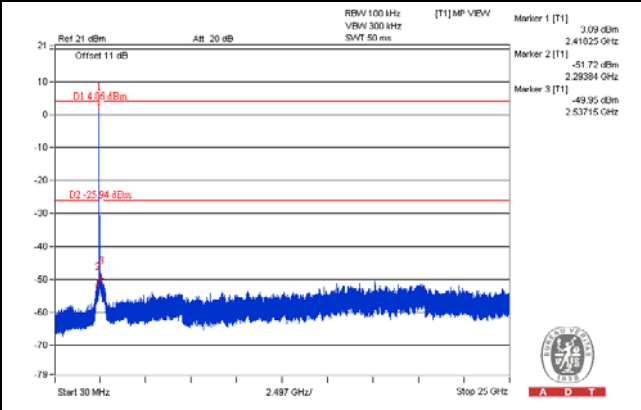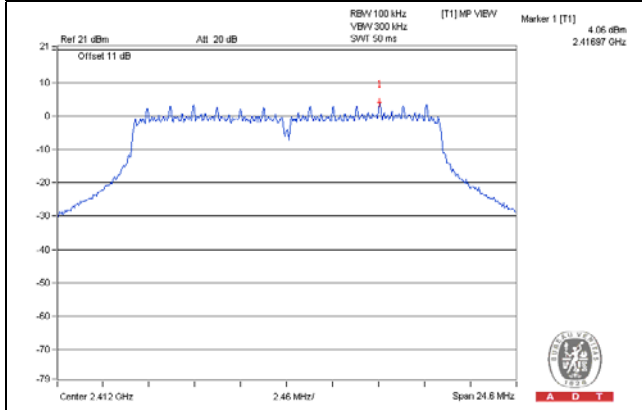


CH 6

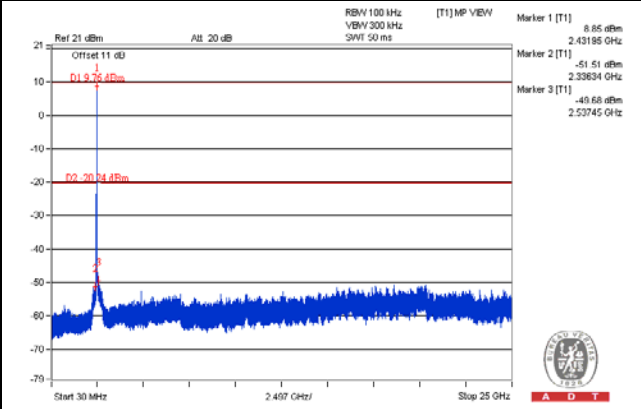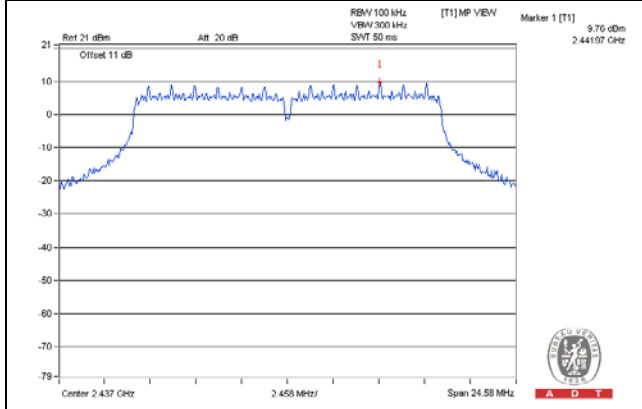


CH 11

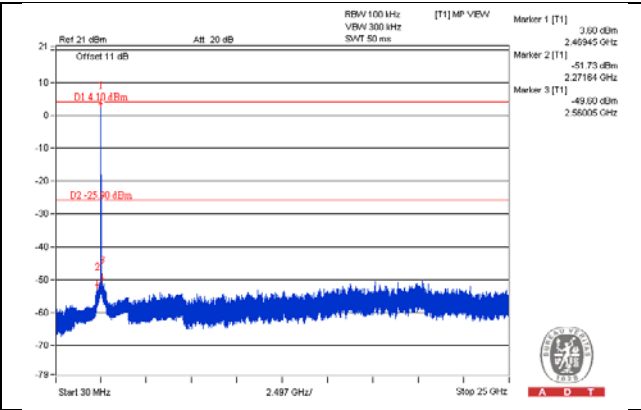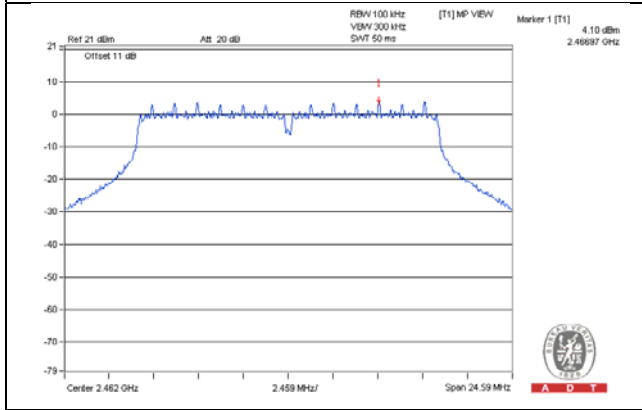

CH 1 Band edge


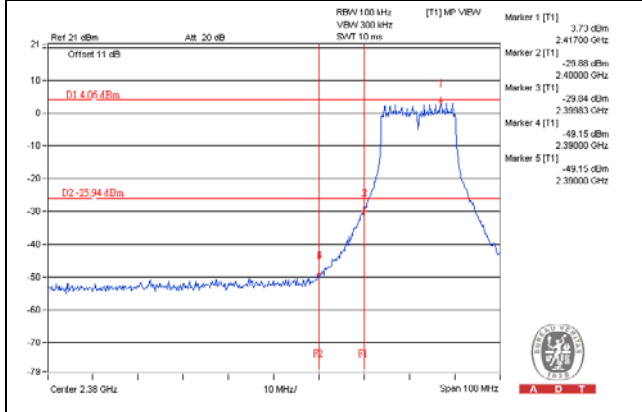


CH 11 Band edge


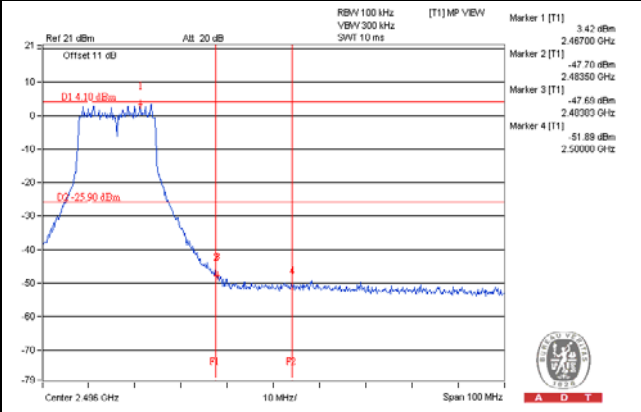


802.11n (HT20)  
CHAIN 0



CH 1

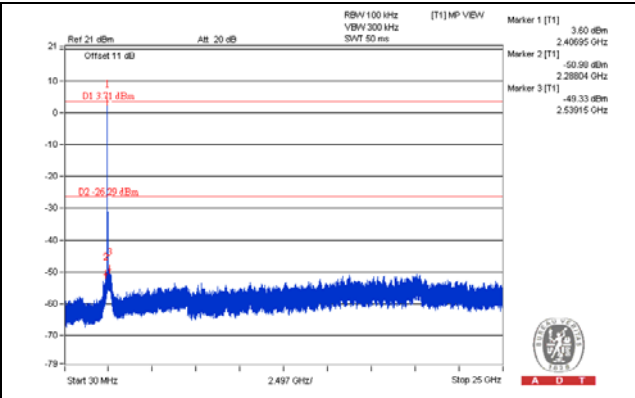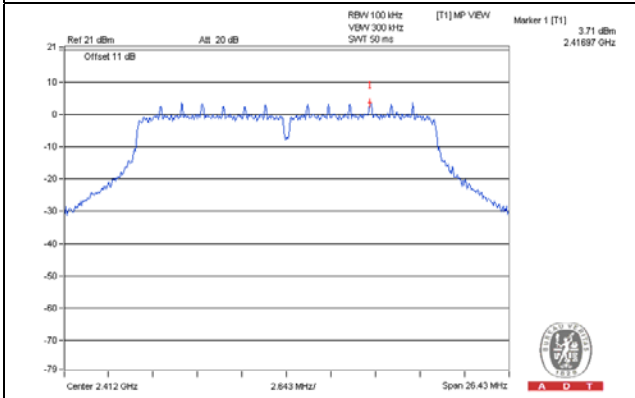


CH 6

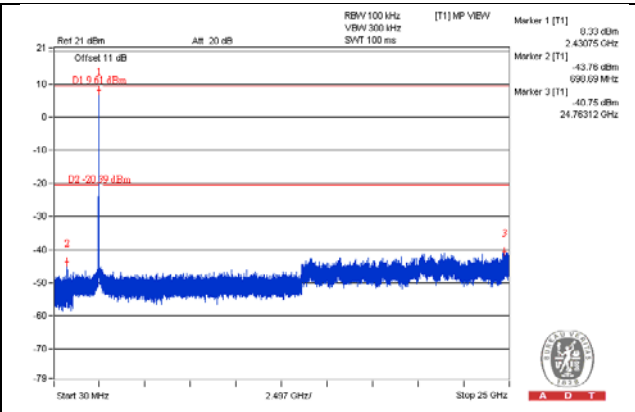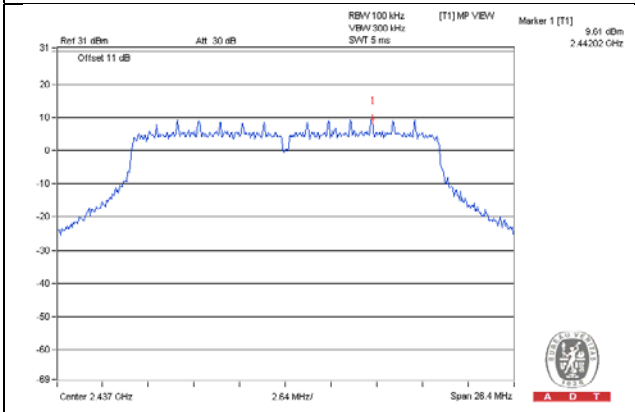


CH 11

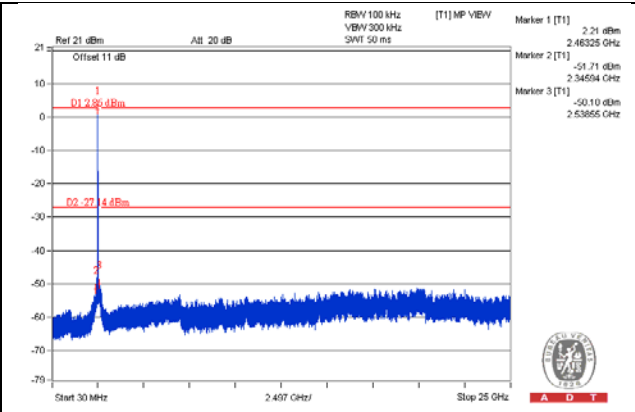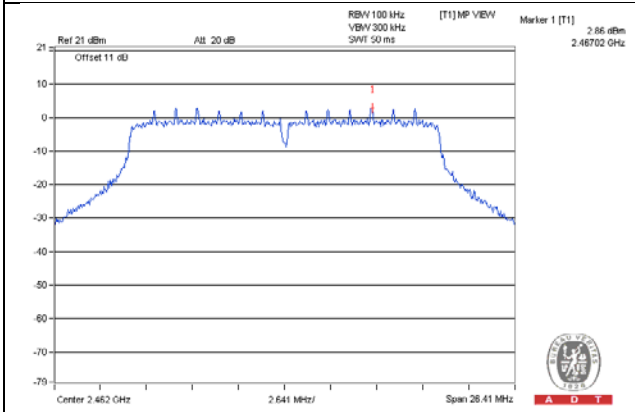

CH 1 Band edge


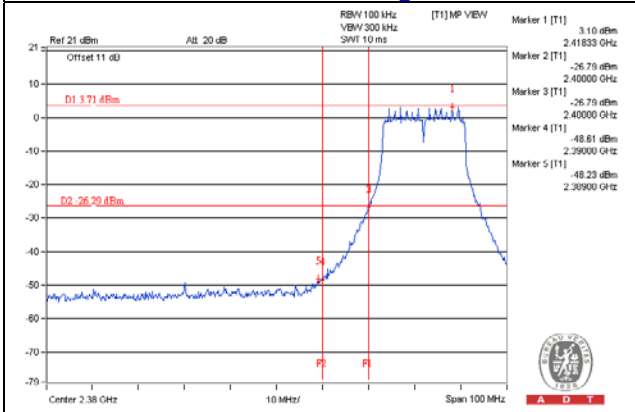


CH 11 Band edge


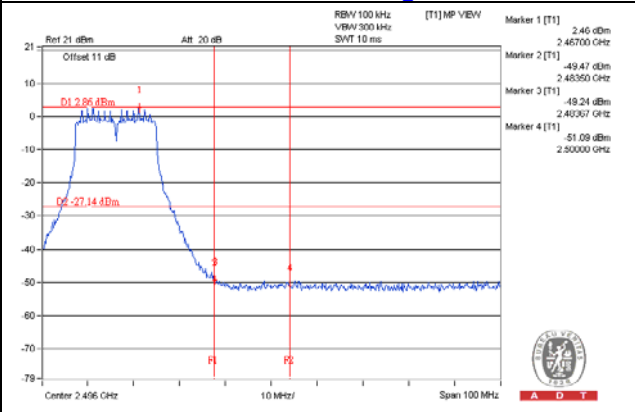


CHAIN 1



CH 1

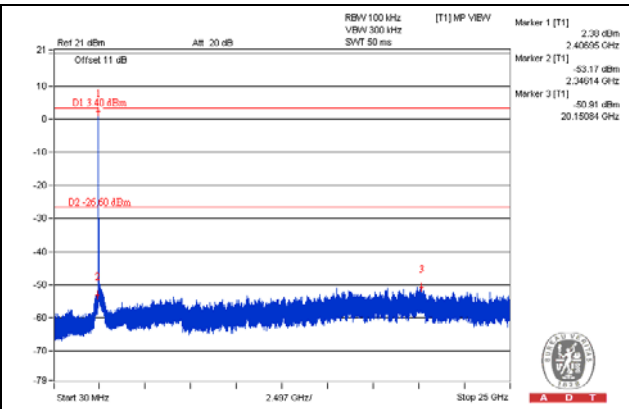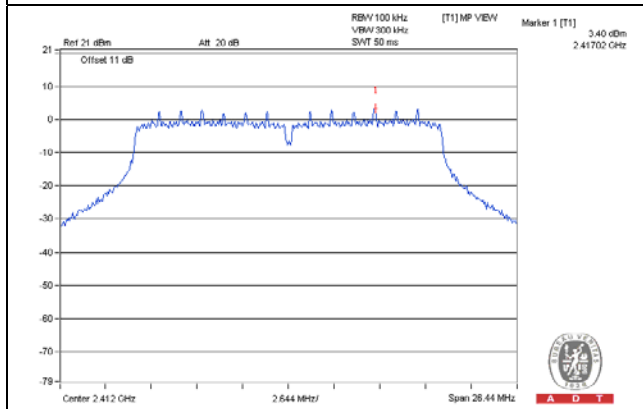


CH 6

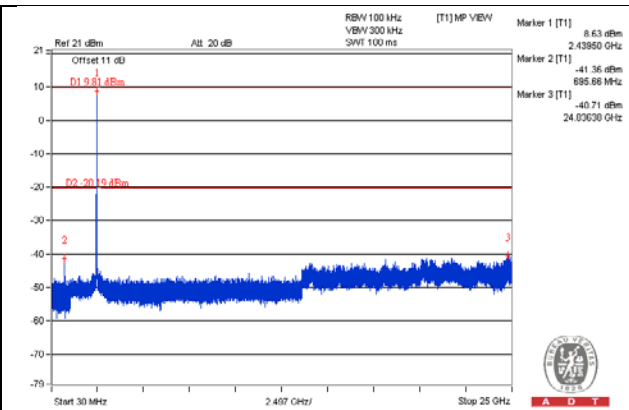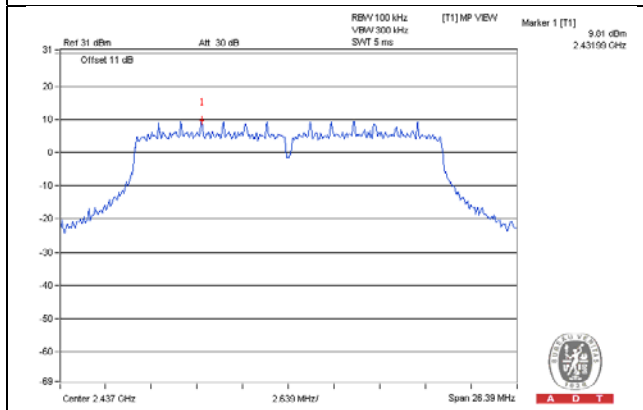


CH 11

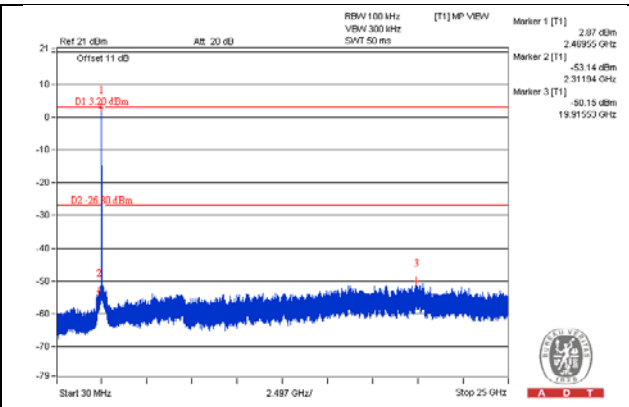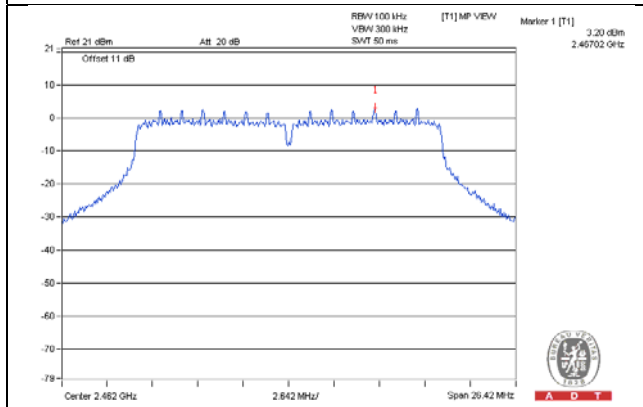

CH 1 Band edge


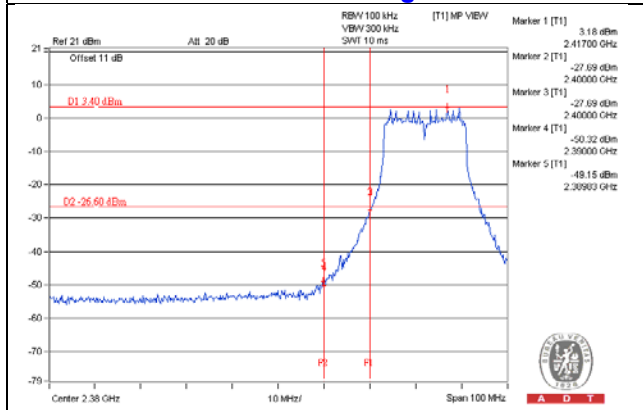


CH 11 Band edge


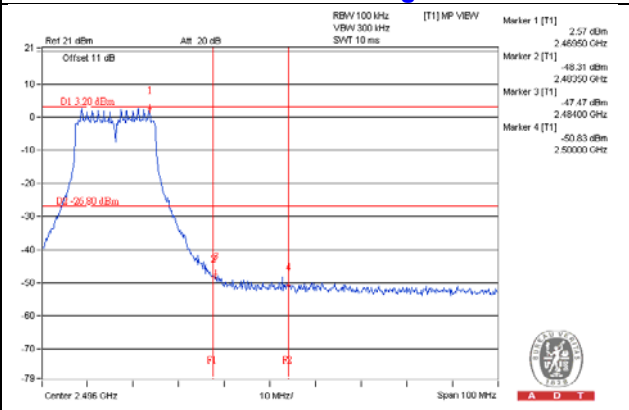


802.11n (HT40)  
CHAIN 0



CH 3

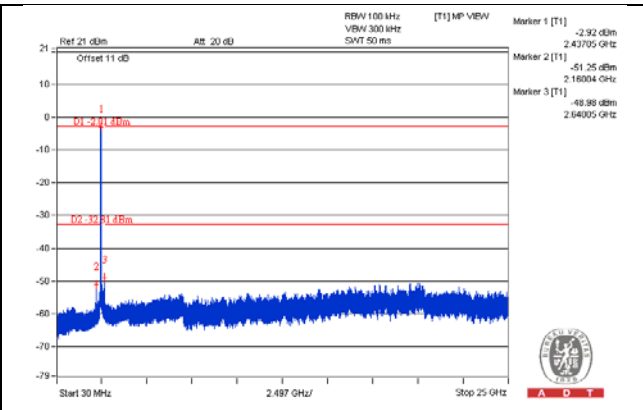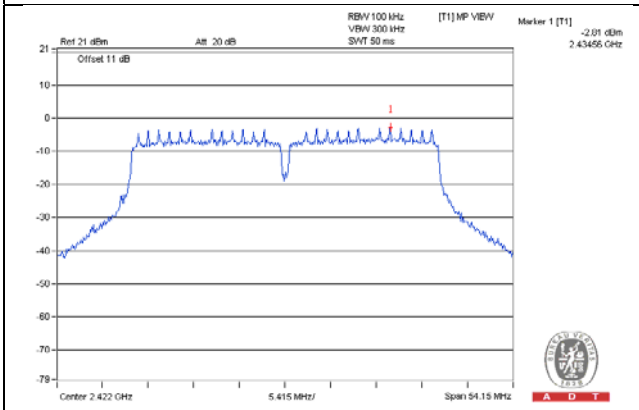


CH 6

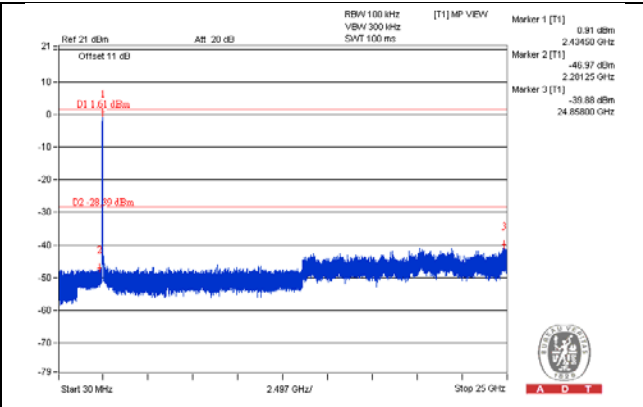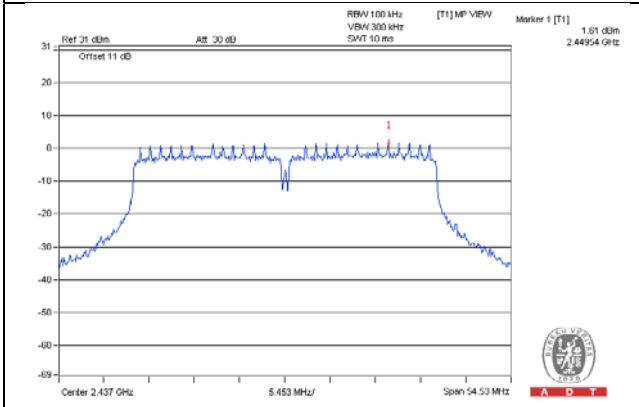


CH 9

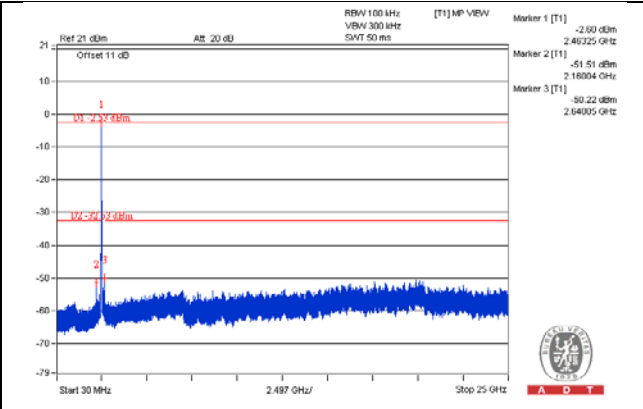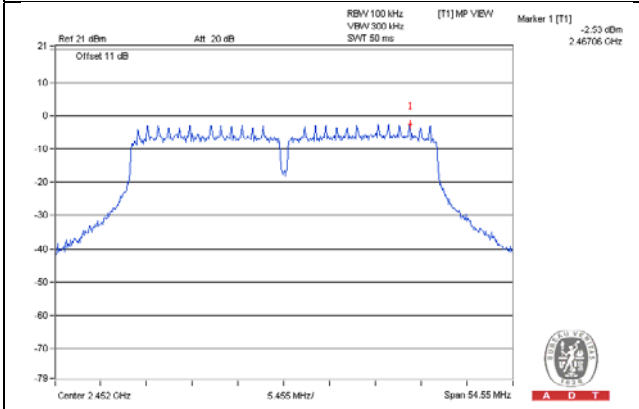

CH 3 Band edge


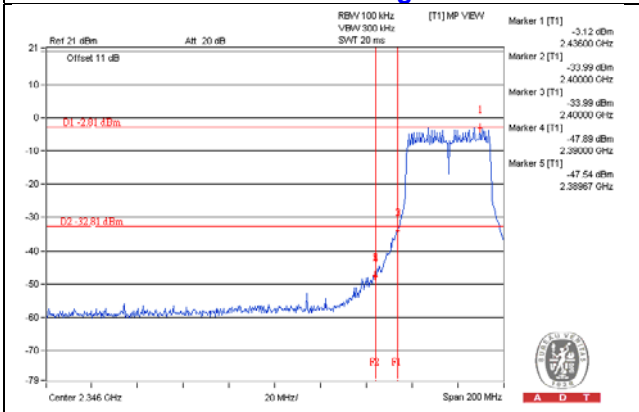


CH 9 Band edge


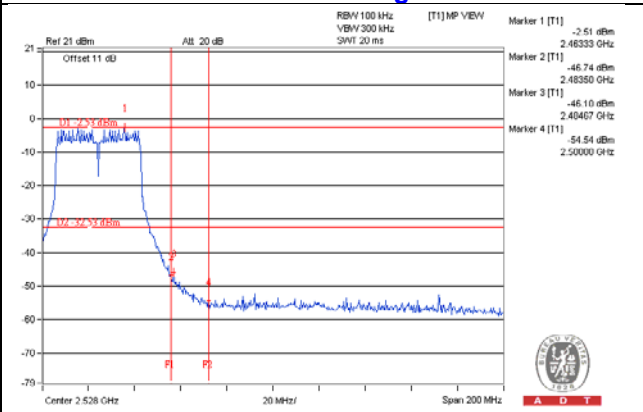


CHAIN 1



CH 3

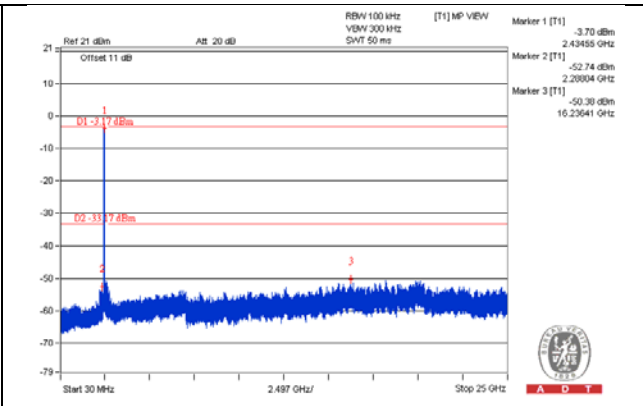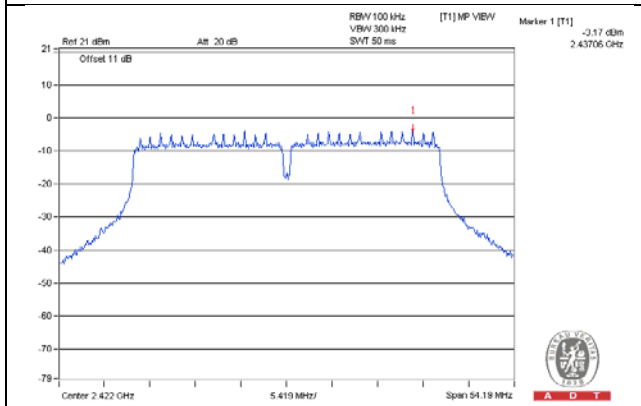


CH 6

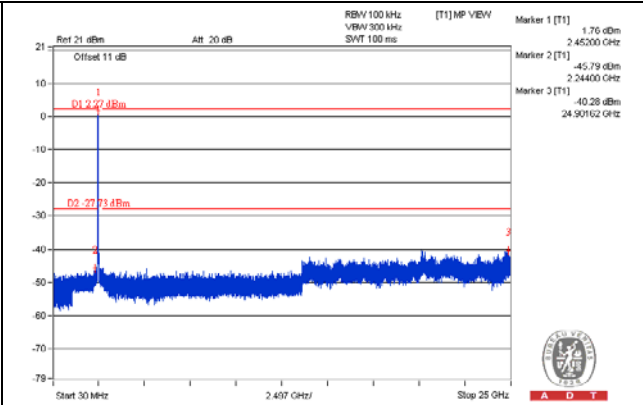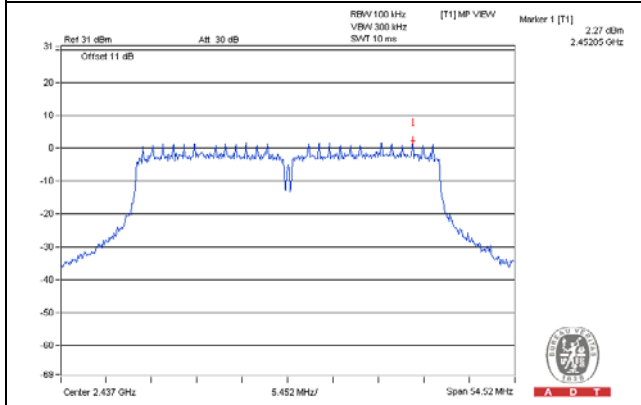


CH 9

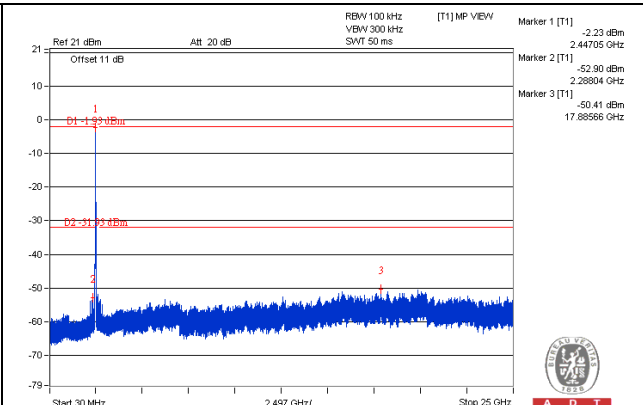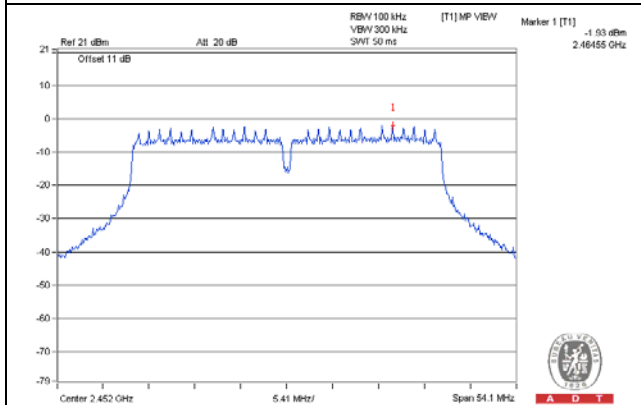

CH 3 Band edge

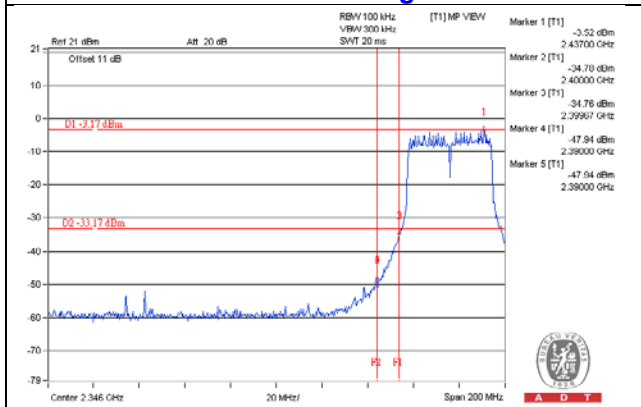

CH 9 Band edge

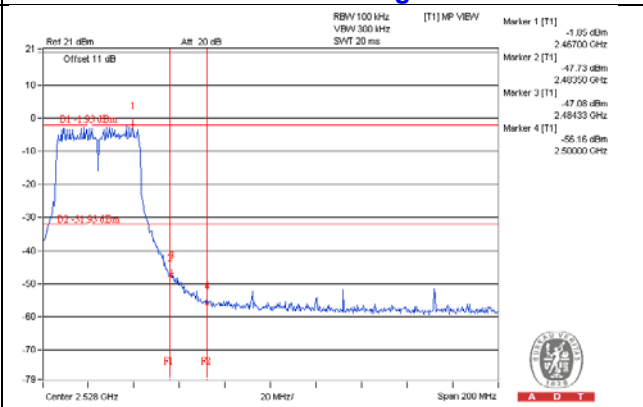



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---