



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF130322C25

MODEL NO.: ECB600

FCC ID: A8J-ECB600

RECEIVED: Mar. 22, 2013

TESTED: Mar. 29 ~ Apr. 16, 2013

ISSUED: Apr. 18, 2013

APPLICANT: EnGenius Technologies

ADDRESS: 1580 Scenic Avenue, Costa Mesa, CA92626

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DESCRIPTION OF SUPPORT UNITS	16
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	17
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	19
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	20
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.2 TEST INSTRUMENTS	21
4.1.3 TEST PROCEDURES	22
4.1.4 DEVIATION FROM TEST STANDARD	22
4.1.5 TEST SETUP	23
4.1.6 EUT OPERATING CONDITIONS	23
4.1.7 TEST RESULTS	24
4.2 CONDUCTED EMISSION MEASUREMENT	38
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	38
4.2.2 TEST INSTRUMENTS	38
4.2.3 TEST PROCEDURES	39
4.2.4 DEVIATION FROM TEST STANDARD	39
4.2.5 TEST SETUP	39
4.2.6 EUT OPERATING CONDITIONS	39
4.2.7 TEST RESULTS	40
4.3 6dB BANDWIDTH MEASUREMENT	44
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	44
4.3.2 TEST SETUP	44
4.3.3 TEST INSTRUMENTS	44
4.3.4 TEST PROCEDURE	44
4.3.5 DEVIATION FROM TEST STANDARD	44
4.3.6 EUT OPERATING CONDITIONS	44
4.3.7 TEST RESULTS	45
4.4 CONDUCTED OUTPUT POWER	46
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	46
4.4.2 TEST SETUP	46
4.4.3 TEST INSTRUMENTS	46
4.4.4 TEST PROCEDURES	46
4.4.5 DEVIATION FROM TEST STANDARD	47
4.4.6 EUT OPERATING CONDITIONS	47
4.4.7 TEST RESULTS	48
4.5 POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2 TEST SETUP	50
4.5.3 TEST INSTRUMENTS	50
4.5.4 TEST PROCEDURE	50
4.5.5 DEVIATION FROM TEST STANDARD	50



4.5.6	EUT OPERATING CONDITION.....	50
4.5.7	TEST RESULTS	51
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.2	TEST SETUP	53
4.6.3	TEST INSTRUMENTS.....	53
4.6.4	TEST PROCEDURE.....	53
4.6.5	DEVIATION FROM TEST STANDARD.....	54
4.6.6	EUT OPERATING CONDITION.....	54
4.6.7	TEST RESULTS	54
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND)	63
5.1	RADIATED EMISSION MEASUREMENT	63
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	63
5.1.2	TEST INSTRUMENTS.....	64
5.1.3	TEST PROCEDURES	64
5.1.4	DEVIATION FROM TEST STANDARD.....	64
5.1.5	TEST SETUP.....	64
5.1.6	EUT OPERATING CONDITIONS	64
5.1.7	TEST RESULTS	65
5.2	CONDUCTED EMISSION MEASUREMENT	75
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	75
5.2.2	TEST INSTRUMENTS.....	75
5.2.3	TEST PROCEDURES	75
5.2.4	DEVIATION FROM TEST STANDARD.....	75
5.2.5	TEST SETUP.....	75
5.2.6	EUT OPERATING CONDITIONS	75
5.2.7	TEST RESULTS	76
5.3	6dB BANDWIDTH MEASUREMENT.....	80
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	80
5.3.2	TEST SETUP.....	80
5.3.3	TEST INSTRUMENTS.....	80
5.3.4	TEST PROCEDURE.....	80
5.3.5	DEVIATION FROM TEST STANDARD.....	80
5.3.6	EUT OPERATING CONDITIONS	80
5.3.7	TEST RESULTS	81
5.4	CONDUCTED OUTPUT POWER.....	82
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	82
5.4.2	TEST SETUP.....	82
5.4.3	INSTRUMENTS.....	82
5.4.4	TEST PROCEDURES	82
5.4.5	DEVIATION FROM TEST STANDARD.....	82
5.4.6	EUT OPERATING CONDITIONS	82
5.4.7	TEST RESULTS	83
5.5	POWER SPECTRAL DENSITY MEASUREMENT	85
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	85
5.5.2	TEST SETUP.....	85
5.5.3	TEST INSTRUMENTS.....	85
5.5.4	TEST PROCEDURE.....	85
5.5.5	DEVIATION FROM TEST STANDARD.....	85
5.5.6	EUT OPERATING CONDITION.....	85
5.5.7	TEST RESULTS	86
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	87
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	87



A D T

5.6.2	TEST SETUP.....	87
5.6.3	TEST INSTRUMENTS.....	87
5.6.4	TEST PROCEDURE.....	87
5.6.5	DEVIATION FROM TEST STANDARD.....	87
5.6.6	EUT OPERATING CONDITION.....	87
5.6.7	TEST RESULTS	87
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	94
7.	INFORMATION ON THE TESTING LABORATORIES	95
8.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	96



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130322C25	Original release	Apr. 18, 2013



A D T

1. CERTIFICATION

PRODUCT: Wireless-N 300+300Mbps Dual Band Concurrent AP/CB
MODEL NO.: ECB600
BRAND: EnGenius
APPLICANT: EnGenius Technologies
TESTED: Mar. 29 ~ Apr. 16, 2013
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: ECB600) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celine Chou , **DATE :** Apr. 18, 2013
Celine Chou / Specialist

APPROVED BY : Ken Liu , **DATE :** Apr. 18, 2013
Ken Liu / Senior Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.99dB at 3.35229MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2390.00 and 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Wireless-N 300+300Mbps Dual Band Concurrent AP/CB
MODEL NO.	ECB600
POWER SUPPLY	12Vdc (Adapter) 48Vdc (POE)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	937.875mW for 2412 ~ 2462MHz 973.242mW for 5745 ~ 5825MHz
ANTENNA TYPE	Dipole antenna with 5dBi gain
ANTENNA CONNECTOR	IPEX
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX



A D T

2. The EUT consumes power from the following adapter.

ADAPTER	
BRAND:	Powertron
MODEL:	PA1024-2HUB / PA1024-120HUB200
INPUT:	100-240Vac, 50-60Hz, 0.6A
OUTPUT:	12Vdc, 2.0A, 24.0W
POWER LINE:	1.5m non-shielded cable with one core

POE	
MODEL:	PD-6083G300
INPUT:	100-250Vac, 50/60Hz, 0.5A
OUTPUT:	48Vdc, 0.35A

* POE for support unit only.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	7.2



A D T

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	1 to 11	6	OFDM	BPSK	7.2

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Sun Lin
RE<1G	24deg. C, 68%RH 26deg. C, 66%RH	120Vac, 60Hz 48Vdc	Alan Wu
PLC	23deg. C, 70%RH 24deg. C, 64%RH	120Vac, 60Hz 48Vdc	Brad Tung Match Tsui
APCM	20deg. C, 70%RH	120Vac, 60Hz	Jun Wu



FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	149 to 165	165	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	149 to 165	165	OFDM	BPSK	7.2



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	21deg. C, 68%RH	120Vac, 60Hz	Brad Tung
RE<1G	21deg. C, 68%RH	120Vac, 60Hz	Alan Wu
	26deg. C, 66%RH	48Vdc	
PLC	23deg. C, 70%RH	120Vac, 60Hz	Brad Tung
	24deg. C, 64%RH	48Vdc	Match Tsui
APCM	20deg. C, 70%RH	120Vac, 60Hz	Jun Wu



A D T

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D531	CN-0XM006-48643-8 1U-2973	QDS-BRCM1020
2	POE	NA	PD-6083G300	NA	NA


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m non-shielded LAN cable for adapter mode, 1.8m non-shielded LAN cable for POE mode
2	10m non-shielded LAN cable for POE mode

NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.
3. Item 2 was provided by the client and for POE mode tested only.


3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

Adapter Mode

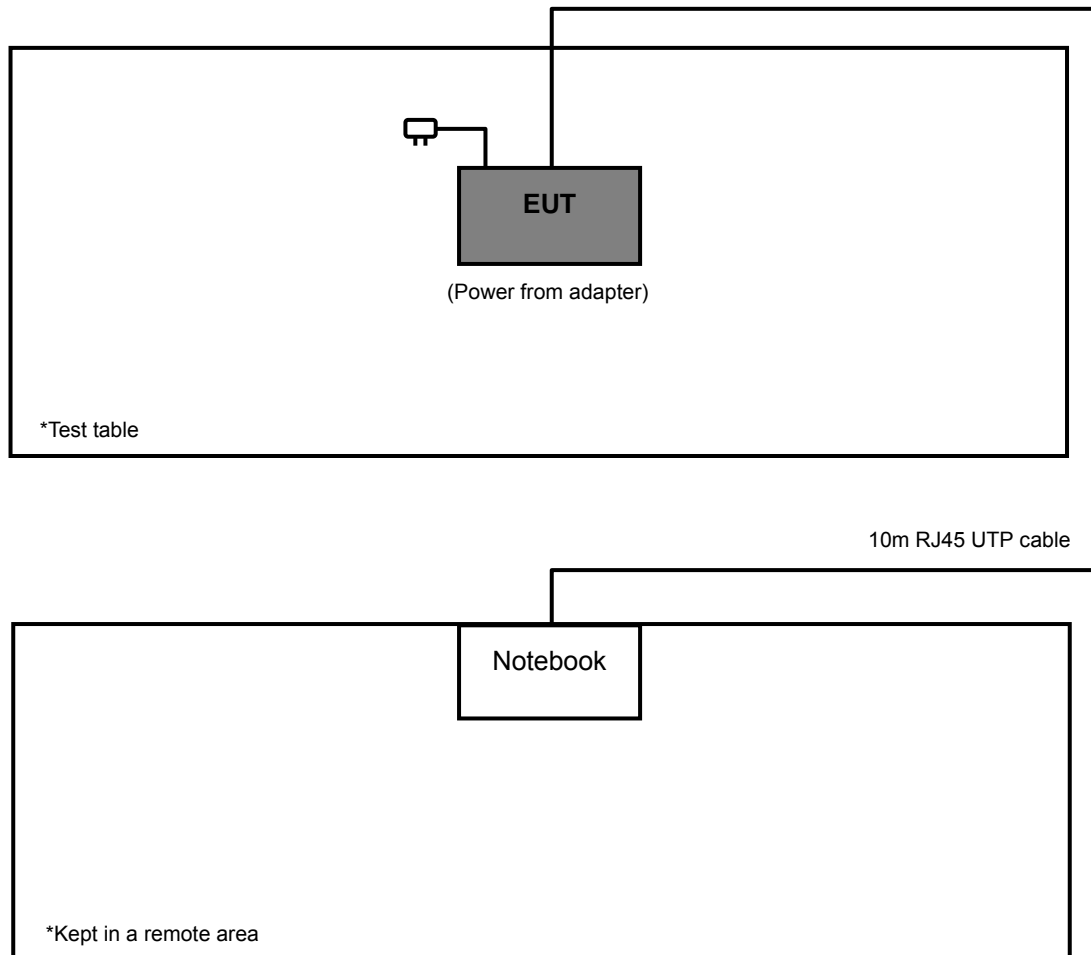



POE Mode

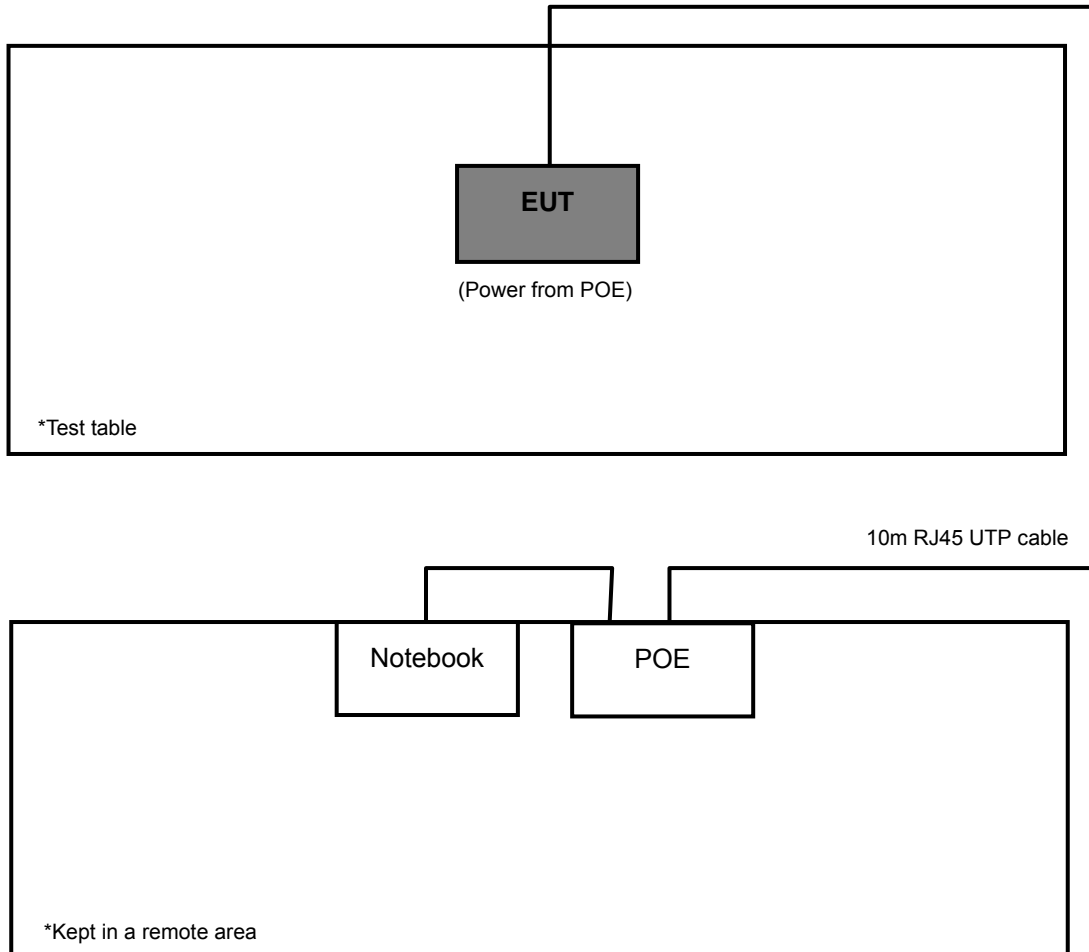



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v02

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/ 4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 3.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 988962.
 6. The IC Site Registration No. is IC 7450F-3.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

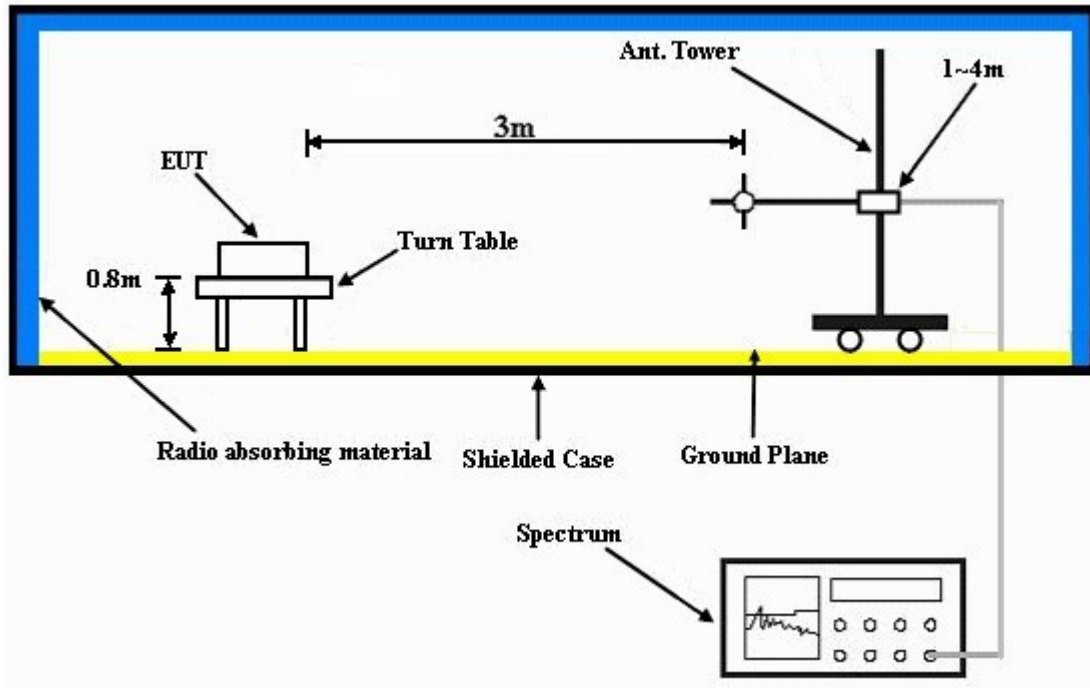

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	57.3 PK	74.0	-16.7	1.34 H	102	26.50	30.80
2	2386.00	43.2 AV	54.0	-10.8	1.34 H	102	12.40	30.80
3	*2412.00	101.8 PK			1.02 H	116	70.90	30.90
4	*2412.00	97.8 AV			1.02 H	116	66.90	30.90
5	2498.00	54.1 PK	74.0	-19.9	1.08 H	121	22.80	31.30
6	2498.00	44.2 AV	54.0	-9.8	1.08 H	121	12.90	31.30
7	4824.00	49.8 PK	74.0	-24.2	1.42 H	301	12.80	37.00
8	4824.00	36.2 AV	54.0	-17.8	1.42 H	301	-0.80	37.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	62.5 PK	74.0	-11.5	1.06 V	110	31.70	30.80
2	2386.00	47.6 AV	54.0	-6.4	1.06 V	110	16.80	30.80
3	*2412.00	112.1 PK			1.05 V	95	81.20	30.90
4	*2412.00	107.9 AV			1.05 V	95	77.00	30.90
5	2498.00	64.3 PK	74.0	-9.7	1.05 V	77	33.00	31.30
6	2498.00	52.4 AV	54.0	-1.6	1.05 V	77	21.10	31.30
7	4824.00	46.6 PK	74.0	-27.4	1.06 V	172	9.60	37.00
8	4824.00	35.8 AV	54.0	-18.2	1.06 V	172	-1.20	37.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.5 PK			1.00 H	52	74.50	31.00
2	*2437.00	101.1 AV			1.00 H	52	70.10	31.00
3	4874.00	47.5 PK	74.0	-26.5	1.13 H	268	10.40	37.10
4	4874.00	37.5 AV	54.0	-16.5	1.13 H	268	0.40	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2288.00	62.0 PK	74.0	-12.0	1.17 V	81	31.60	30.40
2	2288.00	51.9 AV	54.0	-2.1	1.17 V	81	21.50	30.40
3	2352.00	62.3 PK	74.0	-11.7	1.16 V	109	31.60	30.70
4	2352.00	52.9 AV	54.0	-1.1	1.16 V	109	22.20	30.70
5	*2437.00	120.4 PK			1.12 V	81	89.40	31.00
6	*2437.00	116.2 AV			1.12 V	81	85.20	31.00
7	4874.00	48.2 PK	74.0	-25.8	1.60 V	149	11.10	37.10
8	4874.00	39.5 AV	54.0	-14.5	1.60 V	149	2.40	37.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.8 PK			1.27 H	109	70.70	31.10
2	*2462.00	97.7 AV			1.27 H	109	66.60	31.10
3	2483.50	57.7 PK	74.0	-16.3	1.27 H	108	26.50	31.20
4	2483.50	43.7 AV	54.0	-10.3	1.27 H	108	12.50	31.20
5	2500.00	55.4 PK	74.0	-18.6	1.27 H	101	24.10	31.30
6	2500.00	44.8 AV	54.0	-9.2	1.27 H	101	13.50	31.30
7	4924.00	49.1 PK	74.0	-24.9	1.38 H	294	11.90	37.20
8	4924.00	35.9 AV	54.0	-18.1	1.38 H	294	-1.30	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.8 PK			1.06 V	72	85.70	31.10
2	*2462.00	112.7 AV			1.06 V	72	81.60	31.10
3	2483.50	70.0 PK	74.0	-4.0	1.06 V	79	38.80	31.20
4	2483.50	51.2 AV	54.0	-2.8	1.06 V	79	20.00	31.20
5	2500.00	62.8 PK	74.0	-11.2	1.06 V	79	31.50	31.30
6	2500.00	52.5 AV	54.0	-1.5	1.06 V	79	21.20	31.30
7	4924.00	47.6 PK	74.0	-26.4	1.61 V	176	10.40	37.20
8	4924.00	37.2 AV	54.0	-16.8	1.61 V	176	0.00	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.9 PK	74.0	-20.1	1.03 H	117	23.10	30.80
2	2390.00	43.9 AV	54.0	-10.1	1.03 H	117	13.10	30.80
3	*2412.00	102.2 PK			1.03 H	117	71.30	30.90
4	*2412.00	92.5 AV			1.03 H	117	61.60	30.90
5	2500.00	56.9 PK	74.0	-17.1	1.04 H	121	25.60	31.30
6	2500.00	44.1 AV	54.0	-9.9	1.04 H	121	12.80	31.30
7	4824.00	46.5 PK	74.0	-27.5	1.36 H	298	9.50	37.00
8	4824.00	35.7 AV	54.0	-18.3	1.36 H	298	-1.30	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.06 V	112	35.30	30.80
2	2390.00	51.0 AV	54.0	-3.0	1.06 V	112	20.20	30.80
3	*2412.00	113.4 PK			1.08 V	96	82.50	30.90
4	*2412.00	104.4 AV			1.08 V	96	73.50	30.90
5	2500.00	62.7 PK	74.0	-11.3	1.05 V	77	31.40	31.30
6	2500.00	52.2 AV	54.0	-1.8	1.05 V	77	20.90	31.30
7	4824.00	48.6 PK	74.0	-25.4	1.08 V	185	11.60	37.00
8	4824.00	35.7 AV	54.0	-18.3	1.08 V	185	-1.30	37.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.0 PK			1.09 H	96	76.00	31.00
2	*2437.00	93.3 AV			1.09 H	96	62.30	31.00
3	4874.00	46.0 PK	74.0	-28.0	1.32 H	100	8.90	37.10
4	4874.00	35.0 AV	54.0	-19.0	1.32 H	100	-2.10	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2288.00	63.3 PK	74.0	-10.7	1.00 V	177	32.90	30.40
2	2288.00	51.5 AV	54.0	-2.5	1.00 V	177	21.10	30.40
3	*2437.00	116.6 PK			1.06 V	80	85.60	31.00
4	*2437.00	103.9 AV			1.06 V	80	72.90	31.00
5	2483.50	65.6 PK	74.0	-8.4	1.06 V	74	34.40	31.20
6	2483.50	51.6 AV	54.0	-2.4	1.06 V	74	20.40	31.20
7	4874.00	46.9 PK	74.0	-27.1	1.25 V	159	9.80	37.10
8	4874.00	35.8 AV	54.0	-18.2	1.25 V	159	-1.30	37.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.8 PK			1.05 H	112	72.70	31.10
2	*2462.00	93.6 AV			1.05 H	112	62.50	31.10
3	2483.50	54.2 PK	74.0	-19.8	1.04 H	108	23.00	31.20
4	2483.50	44.5 AV	54.0	-9.5	1.04 H	108	13.30	31.20
5	2500.00	56.4 PK	74.0	-17.6	1.04 H	112	25.10	31.30
6	2500.00	43.6 AV	54.0	-10.4	1.04 H	112	12.30	31.30
7	4924.00	46.2 PK	74.0	-27.8	1.31 H	308	9.00	37.20
8	4924.00	35.6 AV	54.0	-18.4	1.31 H	308	-1.60	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.4 PK			1.05 V	76	84.30	31.10
2	*2462.00	105.6 AV			1.05 V	76	74.50	31.10
3	2483.50	68.9 PK	74.0	-5.1	1.05 V	76	37.70	31.20
4	2483.50	53.0 AV	54.0	-1.0	1.05 V	76	21.80	31.20
5	2500.00	62.9 PK	74.0	-11.1	1.05 V	72	31.60	31.30
6	2500.00	52.5 AV	54.0	-1.5	1.05 V	72	21.20	31.30
7	4924.00	49.3 PK	74.0	-24.7	1.07 V	158	12.10	37.20
8	4924.00	38.2 AV	54.0	-15.8	1.07 V	158	1.00	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.02 H	112	22.80	30.80
2	2390.00	43.4 AV	54.0	-10.6	1.02 H	112	12.60	30.80
3	*2412.00	102.5 PK			1.08 H	112	71.60	30.90
4	*2412.00	92.6 AV			1.08 H	112	61.70	30.90
5	2500.00	56.4 PK	74.0	-17.6	1.14 H	125	25.10	31.30
6	2500.00	43.6 AV	54.0	-10.4	1.14 H	125	12.30	31.30
7	4824.00	46.8 PK	74.0	-27.2	1.48 H	306	9.80	37.00
8	4824.00	35.2 AV	54.0	-18.8	1.48 H	306	-1.80	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	1.12 V	142	35.50	30.80
2	2390.00	51.4 AV	54.0	-2.6	1.12 V	142	20.60	30.80
3	*2412.00	113.8 PK			1.12 V	83	82.90	30.90
4	*2412.00	104.7 AV			1.12 V	83	73.80	30.90
5	2500.00	61.9 PK	74.0	-12.1	1.11 V	176	30.60	31.30
6	2500.00	52.4 AV	54.0	-1.6	1.11 V	176	21.10	31.30
7	4824.00	48.6 PK	74.0	-25.4	1.03 V	198	11.60	37.00
8	4824.00	37.6 AV	54.0	-16.4	1.03 V	198	0.60	37.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.6 PK			1.10 H	112	75.60	31.00
2	*2437.00	94.0 AV			1.10 H	112	63.00	31.00
3	4874.00	46.0 PK	74.0	-28.0	1.16 H	198	8.90	37.10
4	4874.00	35.0 AV	54.0	-19.0	1.16 H	198	-2.10	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2288.00	62.2 PK	74.0	-11.8	1.02 V	175	31.80	30.40
2	2288.00	50.6 AV	54.0	-3.4	1.02 V	175	20.20	30.40
3	*2437.00	116.6 PK			1.07 V	78	85.60	31.00
4	*2437.00	104.7 AV			1.07 V	78	73.70	31.00
5	2483.50	64.2 PK	74.0	-9.8	1.07 V	80	33.00	31.20
6	2483.50	49.7 AV	54.0	-4.3	1.07 V	80	18.50	31.20
7	4874.00	47.0 PK	74.0	-27.0	1.35 V	155	9.90	37.10
8	4874.00	36.0 AV	54.0	-18.0	1.35 V	155	-1.10	37.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.8 PK			1.08 H	105	71.70	31.10
2	*2462.00	92.4 AV			1.08 H	105	61.30	31.10
3	2483.50	53.8 PK	74.0	-20.2	1.07 H	114	22.60	31.20
4	2483.50	43.6 AV	54.0	-10.4	1.07 H	114	12.40	31.20
5	2500.00	56.7 PK	74.0	-17.3	1.18 H	158	25.40	31.30
6	2500.00	43.8 AV	54.0	-10.2	1.18 H	158	12.50	31.30
7	4924.00	46.2 PK	74.0	-27.8	1.51 H	299	9.00	37.20
8	4924.00	34.8 AV	54.0	-19.2	1.51 H	299	-2.40	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.8 PK			1.07 V	82	83.70	31.10
2	*2462.00	104.5 AV			1.07 V	82	73.40	31.10
3	2483.50	68.3 PK	74.0	-5.7	1.02 V	96	37.10	31.20
4	2483.50	52.9 AV	54.0	-1.1	1.02 V	96	21.70	31.20
5	2500.00	63.1 PK	74.0	-10.9	1.05 V	74	31.80	31.30
6	2500.00	52.6 AV	54.0	-1.4	1.05 V	74	21.30	31.30
7	4924.00	48.2 PK	74.0	-25.8	1.08 V	204	11.00	37.20
8	4924.00	36.8 AV	54.0	-17.2	1.08 V	204	-0.40	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.04 H	118	25.00	30.80
2	2390.00	44.2 AV	54.0	-9.8	1.04 H	118	13.40	30.80
3	*2422.00	94.1 PK			1.05 H	121	63.20	30.90
4	*2422.00	86.0 AV			1.05 H	121	55.10	30.90
5	2500.00	55.1 PK	74.0	-18.9	1.15 H	122	23.80	31.30
6	2500.00	43.8 AV	54.0	-10.2	1.15 H	122	12.50	31.30
7	4844.00	47.2 PK	74.0	-26.8	1.42 H	301	10.20	37.00
8	4844.00	36.8 AV	54.0	-17.2	1.42 H	301	-0.20	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.08 V	112	39.40	30.80
2	2390.00	53.0 AV	54.0	-1.0	1.08 V	112	22.20	30.80
3	*2422.00	107.6 PK			1.05 V	73	76.70	30.90
4	*2422.00	99.4 AV			1.05 V	73	68.50	30.90
5	2500.00	61.6 PK	74.0	-12.4	1.03 V	74	30.30	31.30
6	2500.00	52.5 AV	54.0	-1.5	1.03 V	74	21.20	31.30
7	4844.00	46.6 PK	74.0	-27.4	1.12 V	168	9.60	37.00
8	4844.00	35.5 AV	54.0	-18.5	1.12 V	168	-1.50	37.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.0 PK			1.12 H	113	71.00	31.00
2	*2437.00	89.1 AV			1.12 H	113	58.10	31.00
3	4874.00	46.8 PK	74.0	-27.2	1.17 H	255	9.70	37.10
4	4874.00	35.8 AV	54.0	-18.2	1.17 H	255	-1.30	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.09 V	86	31.60	30.80
2	2390.00	50.8 AV	54.0	-3.2	1.09 V	86	20.00	30.80
3	*2437.00	110.4 PK			1.10 V	79	79.40	31.00
4	*2437.00	98.0 AV			1.10 V	79	67.00	31.00
5	2483.50	67.1 PK	74.0	-6.9	1.05 V	110	35.90	31.20
6	2483.50	50.7 AV	54.0	-3.3	1.05 V	110	19.50	31.20
7	4874.00	47.0 PK	74.0	-27.0	1.26 V	135	9.90	37.10
8	4874.00	36.2 AV	54.0	-17.8	1.26 V	135	-0.90	37.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	92.5 PK			1.02 H	115	61.40	31.10
2	*2452.00	84.0 AV			1.02 H	115	52.90	31.10
3	2483.50	56.7 PK	74.0	-17.3	1.05 H	115	25.50	31.20
4	2483.50	44.9 AV	54.0	-9.1	1.05 H	115	13.70	31.20
5	2500.00	54.8 PK	74.0	-19.2	1.04 H	124	23.50	31.30
6	2500.00	45.1 AV	54.0	-8.9	1.04 H	124	13.80	31.30
7	4904.00	46.8 PK	74.0	-27.2	1.36 H	305	9.60	37.20
8	4904.00	36.0 AV	54.0	-18.0	1.36 H	305	-1.20	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.9 PK			1.07 V	72	74.80	31.10
2	*2452.00	96.0 AV			1.07 V	72	64.90	31.10
3	2483.50	68.9 PK	74.0	-5.1	1.07 V	72	37.70	31.20
4	2483.50	52.3 AV	54.0	-1.7	1.07 V	72	21.10	31.20
5	2500.00	61.1 PK	74.0	-12.9	1.04 V	74	29.80	31.30
6	2500.00	51.6 AV	54.0	-2.4	1.04 V	74	20.30	31.30
7	4904.00	45.8 PK	74.0	-28.2	1.04 V	195	8.60	37.20
8	4904.00	36.0 AV	54.0	-18.0	1.04 V	195	-1.20	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 68%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.92	28.4 QP	40.0	-11.6	1.49 H	66	15.70	12.70
2	103.72	29.2 QP	43.5	-14.3	1.24 H	319	19.80	9.40
3	274.44	31.6 QP	46.0	-14.4	1.00 H	162	17.70	13.90
4	375.32	31.9 QP	46.0	-14.1	1.99 H	129	15.10	16.80
5	625.58	33.1 QP	46.0	-12.9	1.99 H	205	10.50	22.60
6	676.02	32.4 QP	46.0	-13.6	1.00 H	198	9.30	23.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.70	33.5 QP	40.0	-6.5	1.24 V	355	20.30	13.20
2	103.72	35.9 QP	43.5	-7.6	1.24 V	224	26.50	9.40
3	130.88	32.3 QP	43.5	-11.2	1.24 V	93	20.00	12.30
4	375.32	35.5 QP	46.0	-10.5	1.24 V	15	18.70	16.80
5	499.48	32.5 QP	46.0	-13.5	1.00 V	196	12.50	20.00
6	676.02	31.6 QP	46.0	-14.4	1.74 V	10	8.50	23.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	48Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH	TESTED BY	Alan Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.72	30.3 QP	43.5	-13.2	1.50 H	266	20.20	10.10
2	198.78	32.5 QP	43.5	-11.0	1.00 H	129	21.90	10.60
3	264.74	35.2 QP	46.0	-10.8	1.00 H	58	21.90	13.30
4	499.48	32.6 QP	46.0	-13.4	1.50 H	150	12.80	19.80
5	625.58	31.0 QP	46.0	-15.0	1.00 H	231	8.30	22.70
6	676.02	35.9 QP	46.0	-10.1	1.00 H	140	12.50	23.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	34.2 QP	40.0	-5.8	1.00 V	18	20.50	13.70
2	260.86	31.4 QP	46.0	-14.6	1.24 V	157	18.20	13.20
3	375.32	34.6 QP	46.0	-11.4	1.24 V	16	18.00	16.60
4	499.48	32.2 QP	46.0	-13.8	1.24 V	16	12.40	19.80
5	625.58	29.7 QP	46.0	-16.3	1.75 V	226	7.00	22.70
6	676.02	35.9 QP	46.0	-10.1	1.49 V	231	12.50	23.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2012	Jul. 01, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 04, 2013	Feb. 03, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

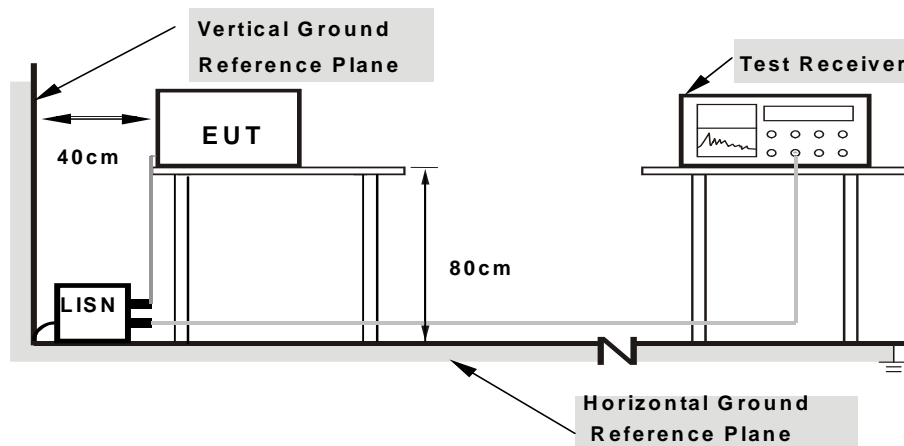

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15040	0.15	51.92	31.18	52.07	31.33	65.98	55.98	-13.91	-24.65
2	0.16955	0.18	49.53	28.32	49.71	28.50	64.98	54.98	-15.27	-26.48
3	0.20458	0.23	44.78	25.42	45.01	25.65	63.42	53.42	-18.41	-27.77
4	0.46915	0.21	37.02	28.31	37.23	28.52	56.53	46.53	-19.30	-18.01
5	9.70604	0.57	40.54	33.68	41.11	34.25	60.00	50.00	-18.89	-15.75
6	21.90915	0.98	26.31	19.31	27.29	20.29	60.00	50.00	-32.71	-29.71

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

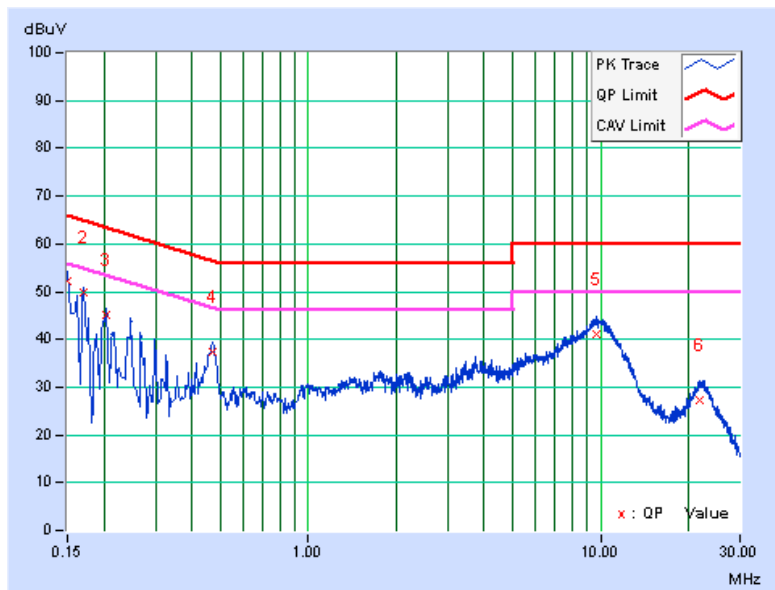




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	0.26	50.79	30.09	51.05	30.35	65.58	55.58	-14.53	-25.23
2	0.19305	0.30	45.94	25.17	46.24	25.47	63.90	53.90	-17.66	-28.43
3	0.46669	0.30	37.96	29.12	38.26	29.42	56.57	46.57	-18.31	-17.15
4	1.80393	0.35	28.78	20.44	29.13	20.79	56.00	46.00	-26.87	-25.21
5	9.87417	0.66	36.78	30.10	37.44	30.76	60.00	50.00	-22.56	-19.24
6	22.22977	1.11	24.57	17.23	25.68	18.34	60.00	50.00	-34.32	-31.66


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

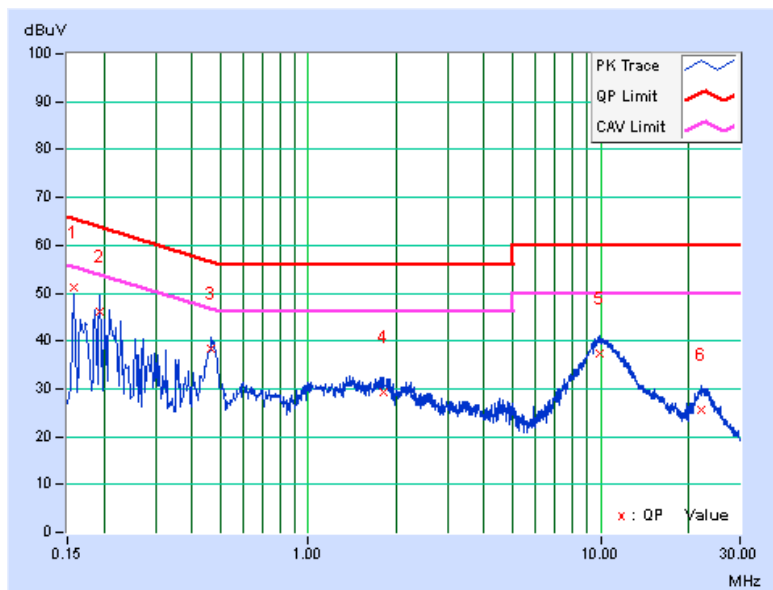

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18903	0.15	50.64	38.82	50.79	38.97	64.08	54.08	-13.29	-15.11
2	0.25557	0.16	41.72	30.35	41.88	30.51	61.57	51.57	-19.69	-21.06
3	0.38069	0.20	36.10	30.80	36.30	31.00	58.26	48.26	-21.97	-17.27
4	3.35229	0.34	39.37	36.67	39.71	37.01	56.00	46.00	-16.29	-8.99
5	6.25742	0.50	40.35	39.28	40.85	39.78	60.00	50.00	-19.15	-10.22
6	21.30701	1.33	31.98	30.99	33.31	32.32	60.00	50.00	-26.69	-17.68


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

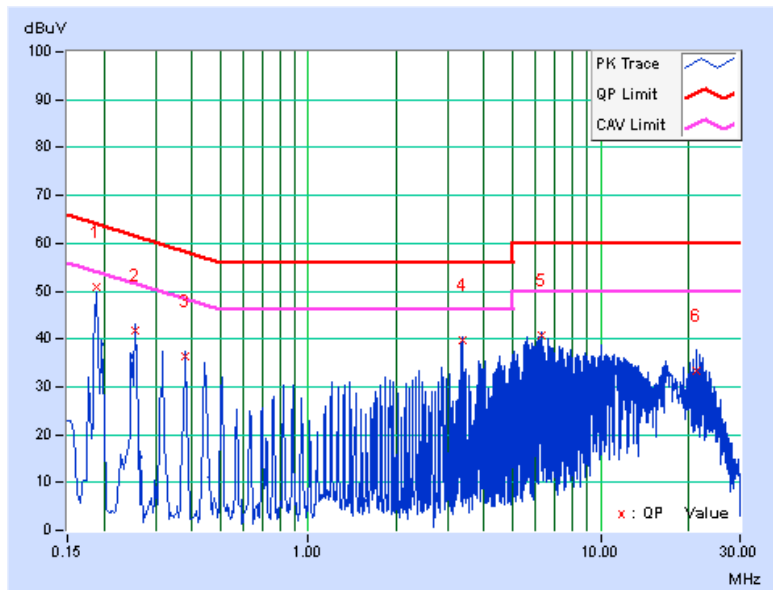

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18903	0.20	48.89	38.51	49.09	38.71	64.08	54.08	-14.99	-15.37
2	0.25557	0.22	38.56	28.49	38.78	28.71	61.57	51.57	-22.80	-22.87
3	0.44273	0.26	34.60	32.72	34.86	32.98	57.01	47.01	-22.15	-14.03
4	2.39689	0.33	36.43	33.02	36.76	33.35	56.00	46.00	-19.24	-12.65
5	6.36690	0.50	41.25	40.14	41.75	40.64	60.00	50.00	-18.25	-9.36
6	20.36470	0.99	32.12	32.02	33.11	33.01	60.00	50.00	-26.89	-16.99

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

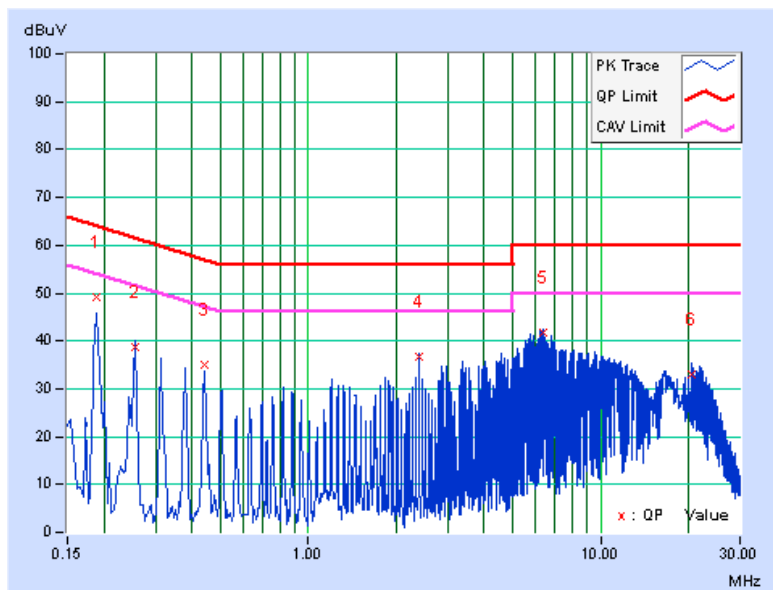


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.08	10.09	0.5	PASS
6	2437	10.12	10.12	0.5	PASS
11	2462	10.12	10.15	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.45	16.45	0.5	PASS
6	2437	16.42	16.45	0.5	PASS
11	2462	16.44	16.44	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.63	17.62	0.5	PASS
6	2437	17.66	17.64	0.5	PASS
11	2462	17.63	17.62	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.48	36.44	0.5	PASS
6	2437	36.51	36.48	0.5	PASS
9	2452	36.52	36.49	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 TEST SETUP

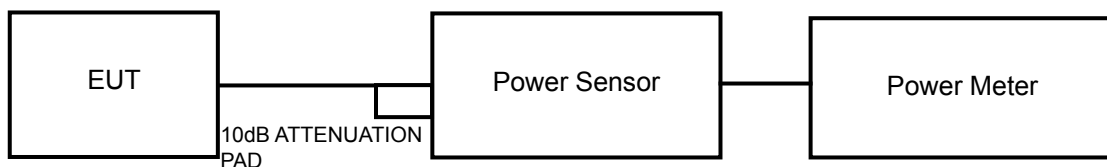

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak / average power sensor were used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.



A D T

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.92	18.89	155.429	21.92	30	PASS
6	2437	23.95	24.44	526.284	27.21	30	PASS
11	2462	20.04	20.69	218.145	23.39	30	PASS

802.11g

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	24.23	24.21	528.483	27.23	30	PASS
6	2437	26.38	25.56	794.259	29.00	30	PASS
11	2462	22.77	24.01	441.002	26.44	30	PASS

802.11n (20MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.91	23.89	440.340	26.44	30	PASS
6	2437	26.61	26.81	937.875	29.72	30	PASS
11	2462	23.38	22.78	407.442	26.10	30	PASS

802.11n (40MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	20.12	20.32	210.449	23.23	30	PASS
6	2437	25.76	25.98	772.982	28.88	30	PASS
9	2452	17.37	18.29	122.029	20.86	30	PASS



FOR AVERAGE POWER

802.11b

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	16.53	16.52	89.853	19.54
6	2437	21.11	22.05	289.447	24.62
11	2462	17.97	18.32	130.581	21.16

802.11g

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	15.97	15.63	76.096	18.81
6	2437	17.97	17.93	124.748	20.96
11	2462	14.57	15.62	65.117	18.14

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	14.54	15.06	60.508	17.82
6	2437	16.79	17.82	108.287	20.35
11	2462	14.54	14.88	59.206	17.72

802.11n (40MHz)


CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	10.77	11.51	26.098	14.17
6	2437	16.64	17.02	96.482	19.84
9	2452	8.33	9.24	15.203	11.82

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-8.26	3.01	-5.25	5.99	PASS
	6	2437	-3.84	3.01	-0.83	5.99	PASS
	11	2462	-7.36	3.01	-4.35	5.99	PASS
1	1	2412	-7.22	3.01	-4.21	5.99	PASS
	6	2437	-3.53	3.01	-0.52	5.99	PASS
	11	2462	-5.88	3.01	-2.87	5.99	PASS

NOTE: Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (8.01 - 6) = 5.99\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-9.14	3.01	-6.13	5.99	PASS
	6	2437	-9.00	3.01	-5.99	5.99	PASS
	11	2462	-12.28	3.01	-9.27	5.99	PASS
1	1	2412	-11.36	3.01	-8.35	5.99	PASS
	6	2437	-8.42	3.01	-5.41	5.99	PASS
	11	2462	-9.92	3.01	-6.91	5.99	PASS

NOTE: Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (8.01 - 6) = 5.99\text{dBm}$.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-10.02	3.01	-7.01	5.99	PASS
	6	2437	-8.76	3.01	-5.75	5.99	PASS
	11	2462	-12.64	3.01	-9.63	5.99	PASS
1	1	2412	-11.70	3.01	-8.69	5.99	PASS
	6	2437	-9.16	3.01	-6.15	5.99	PASS
	11	2462	-11.42	3.01	-8.41	5.99	PASS

NOTE: Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (8.01 - 6) = 5.99\text{dBm}$.



A D T

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-17.28	3.01	-14.27	5.99	PASS
	6	2437	-12.79	3.01	-9.78	5.99	PASS
	9	2452	-19.81	3.01	-16.80	5.99	PASS
1	3	2422	-17.06	3.01	-14.05	5.99	PASS
	6	2437	-12.19	3.01	-9.18	5.99	PASS
	9	2452	-16.76	3.01	-13.75	5.99	PASS


NOTE: Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 8-(8.01-6) = 5.99dBm.

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

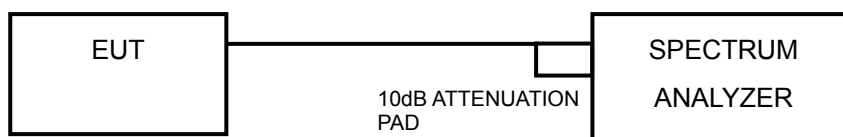

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


802.11b

CHAIN 0


CH 1

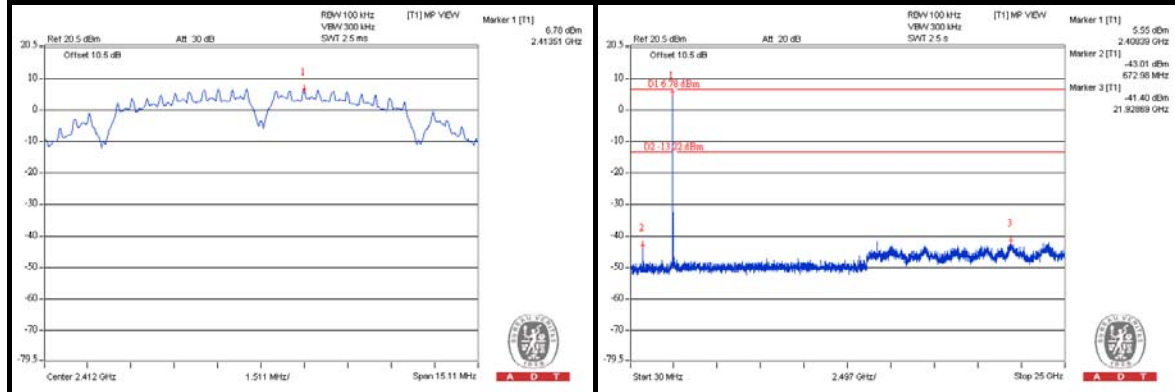

CH 6

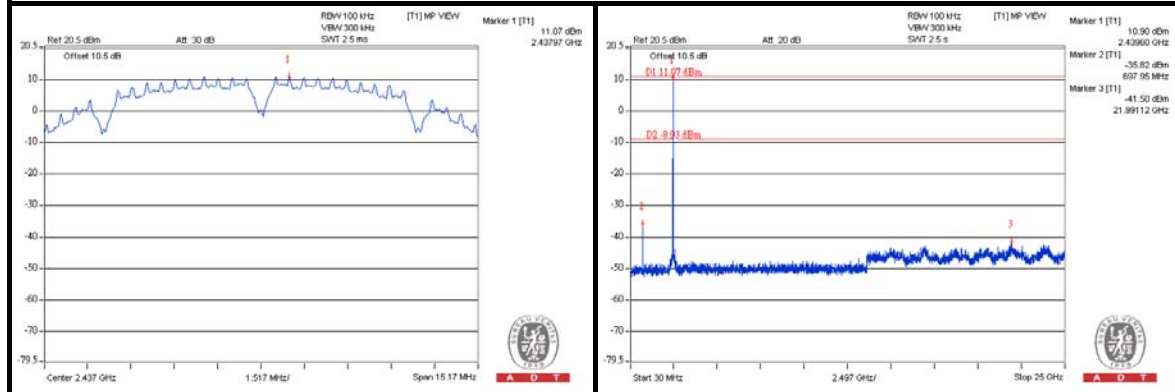

CH 11


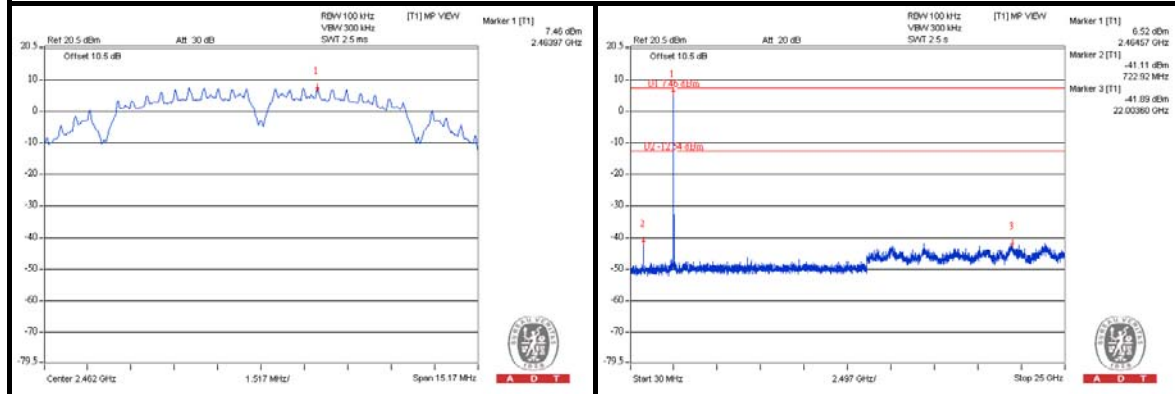






A D T

CHAIN 1



CH 1

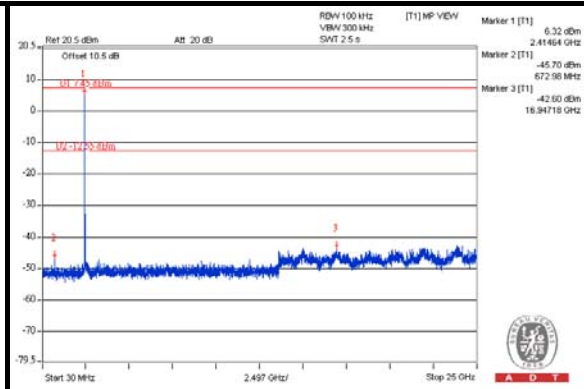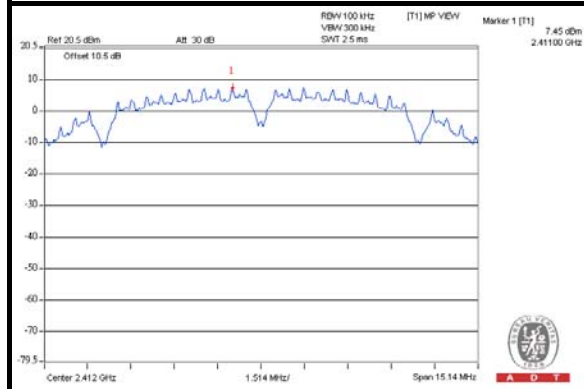

CH 6

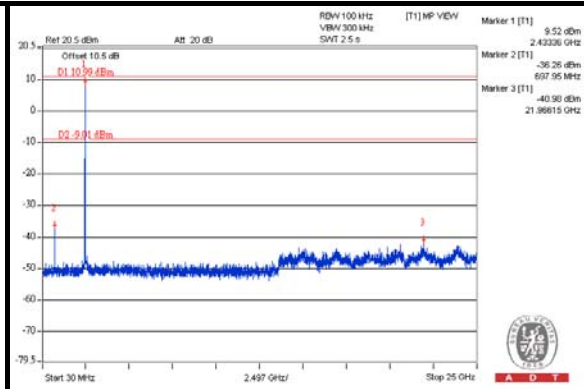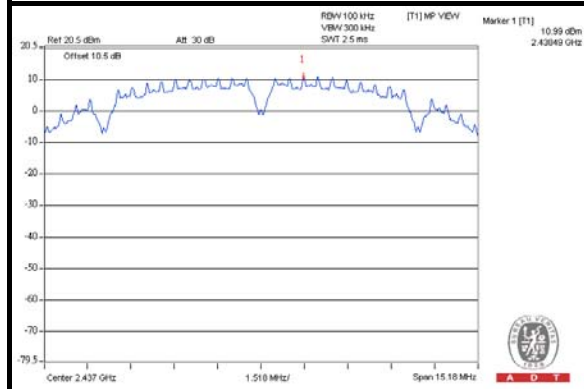

CH 11

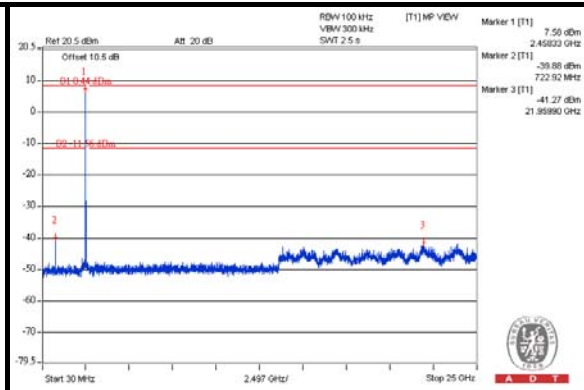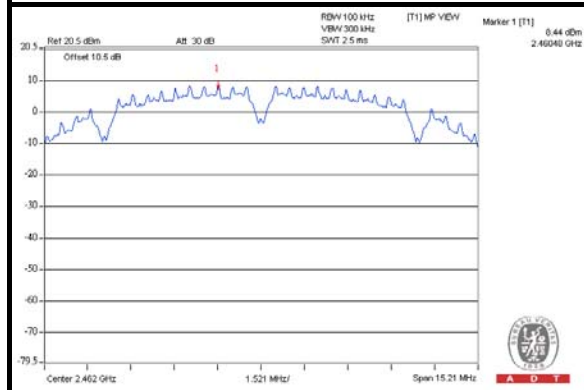




A D T


802.11g

CHAIN 0


CH 1

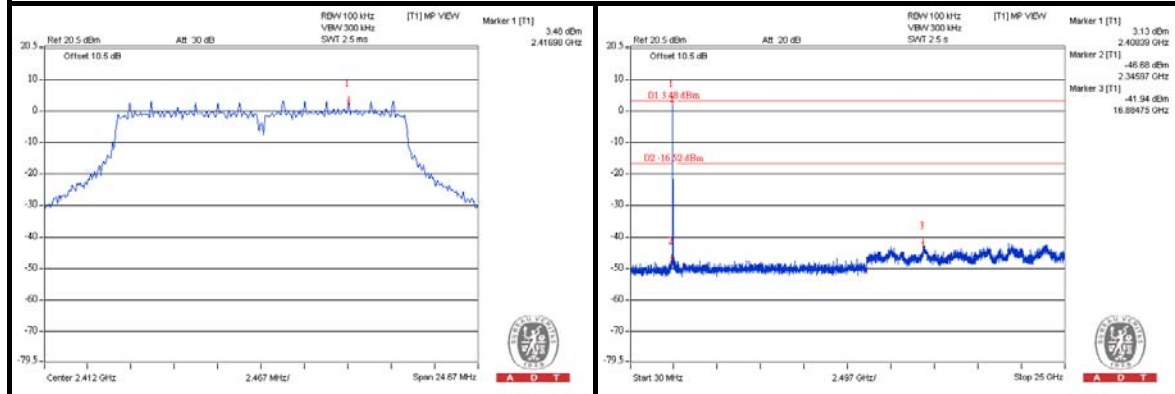

CH 6

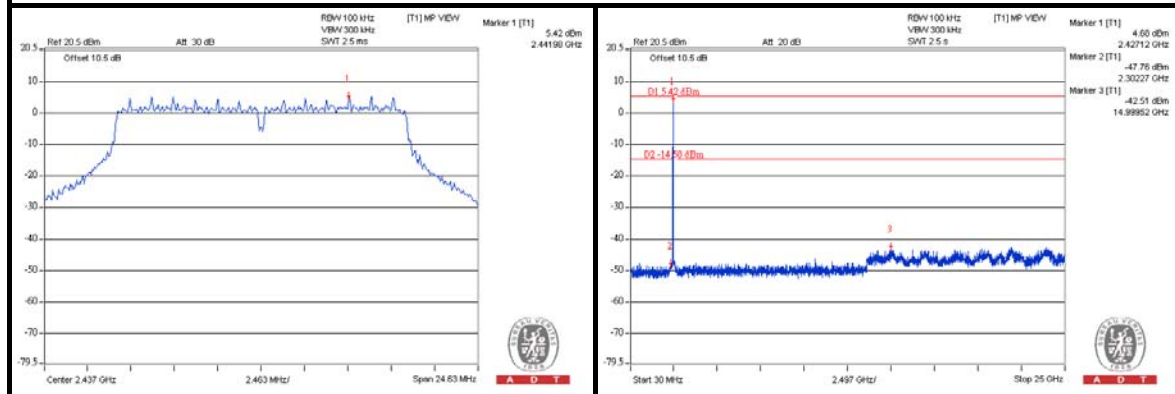

CH 11

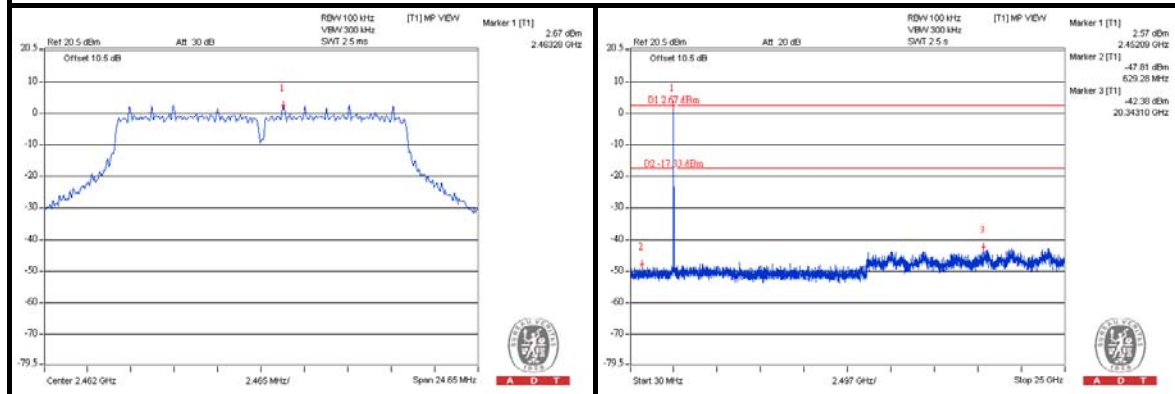





A D T

CHAIN 1


CH 1

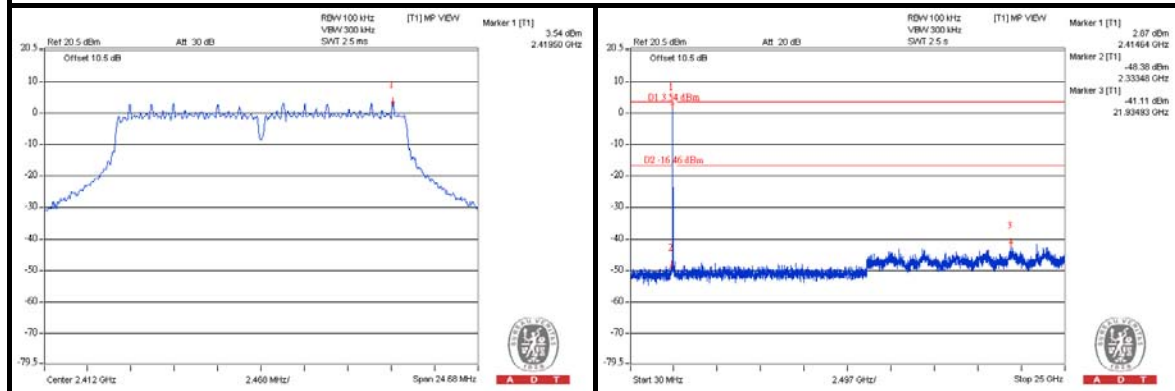

CH 6

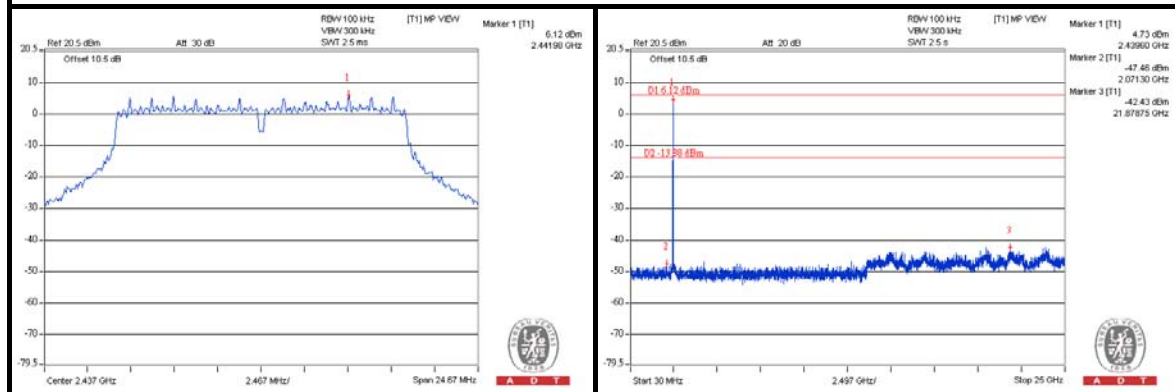

CH 11

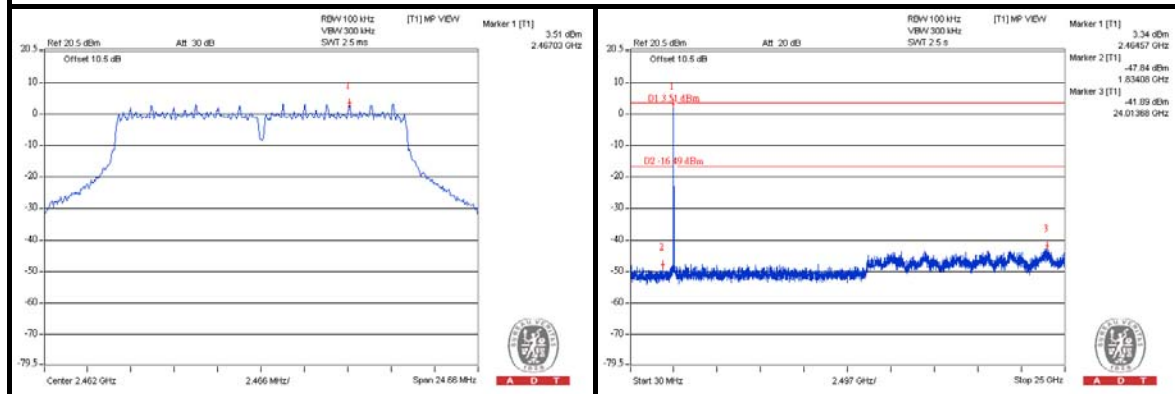




A D T


802.11n (20MHz)

CHAIN 0


CH 1

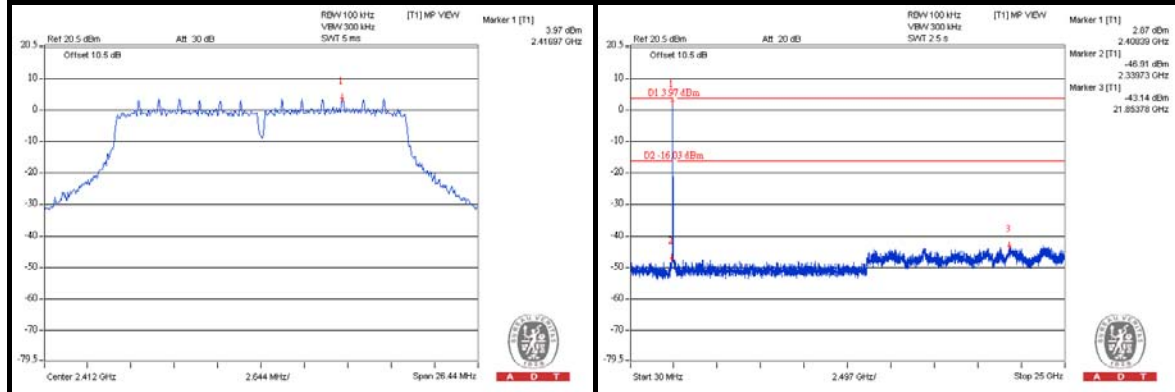

CH 6

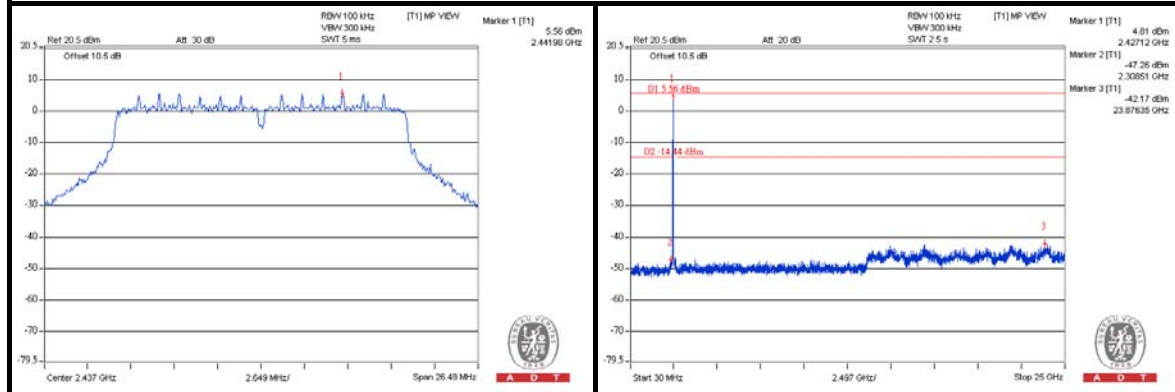


CH 11

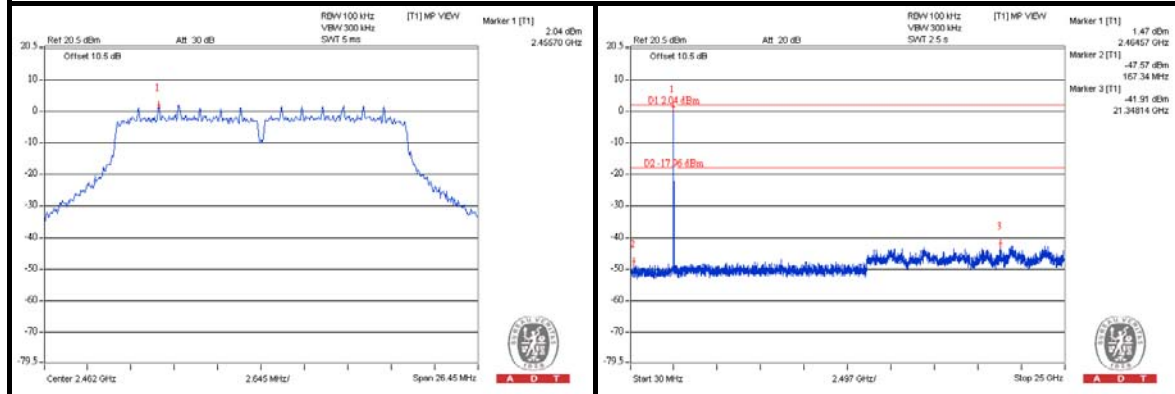


CHAIN 1


CH 1

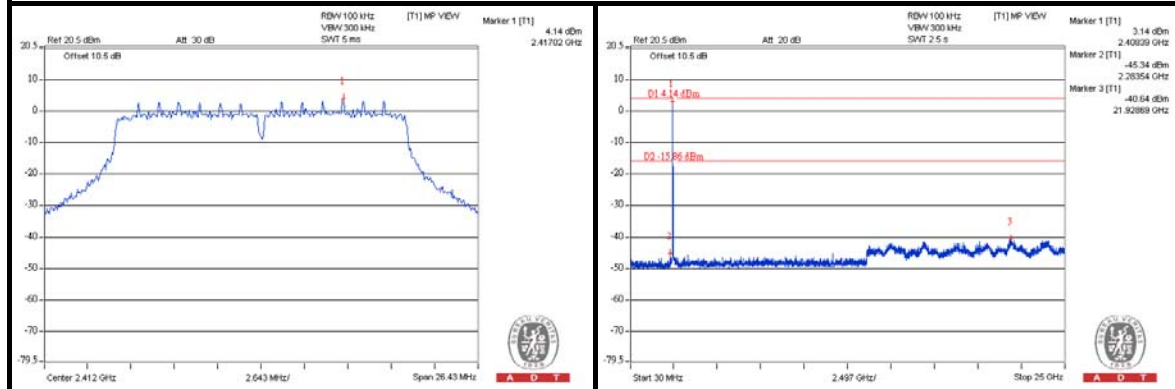

CH 6

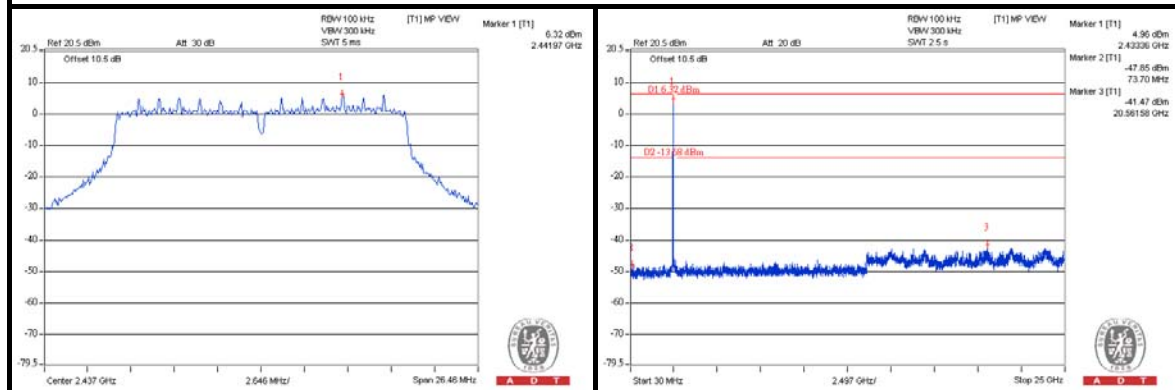

CH 11

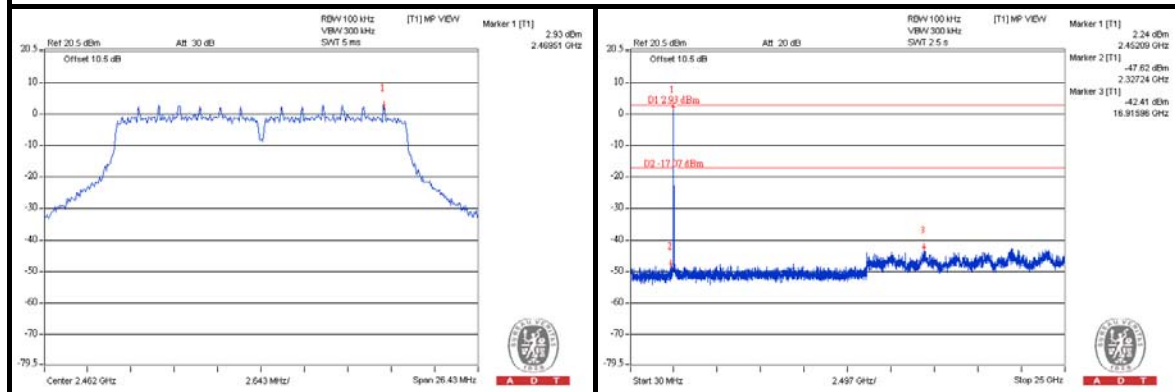





A D T



802.11n (40MHz)

CHAIN 0



CH 3

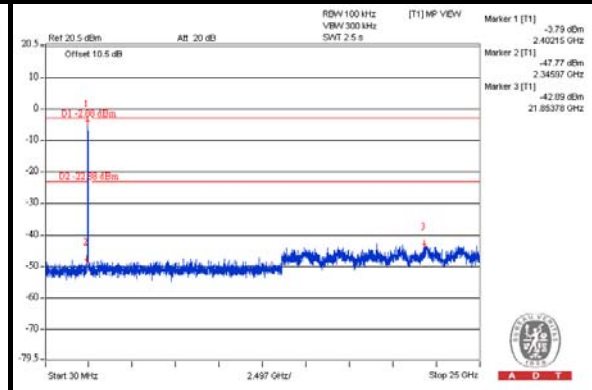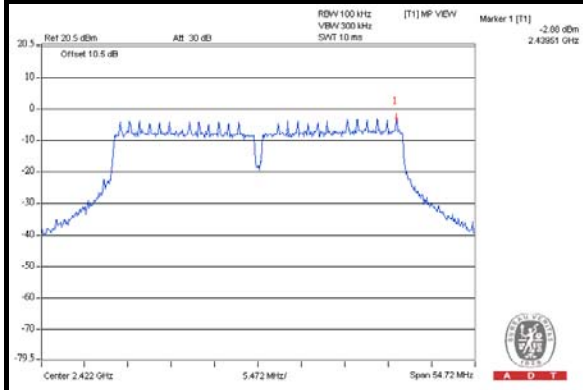

CH 6

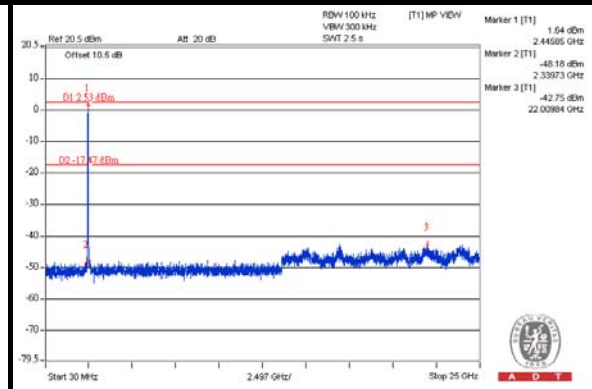
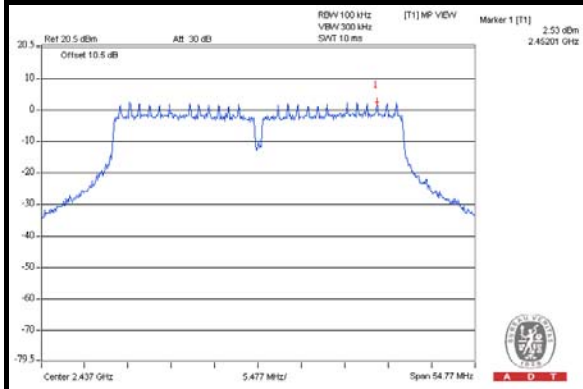


CH 9

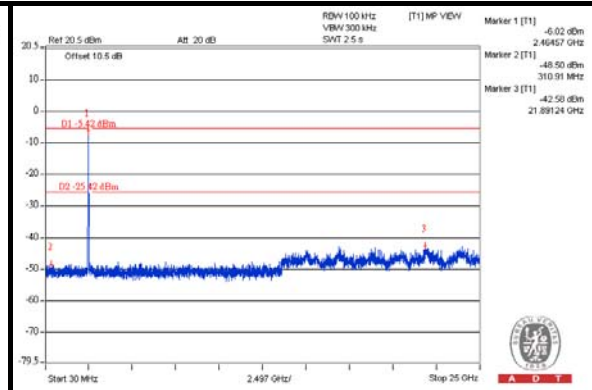
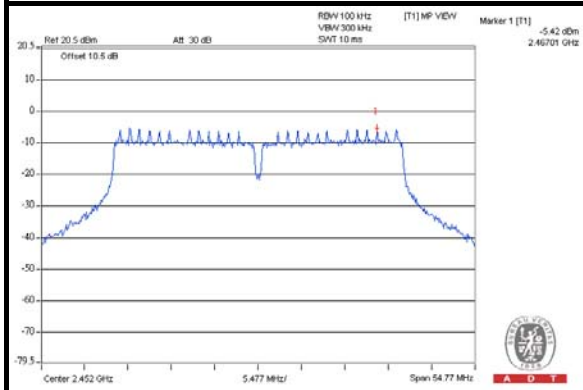


CHAIN 1



CH 3

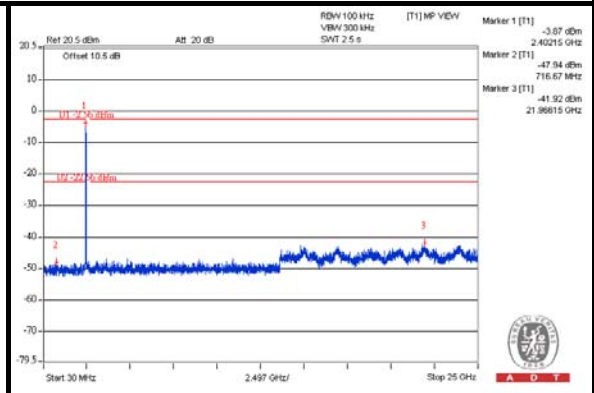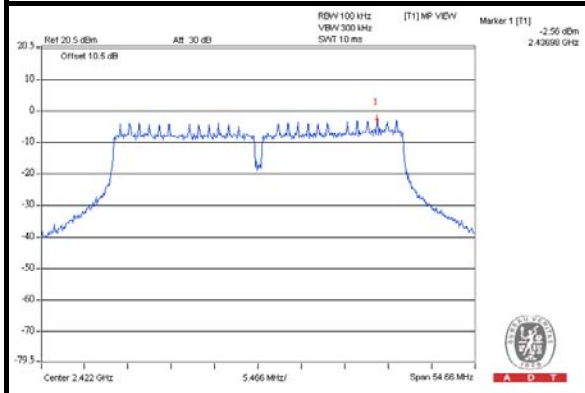

CH 6

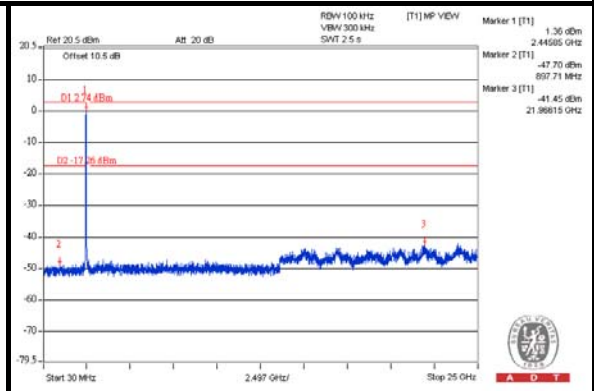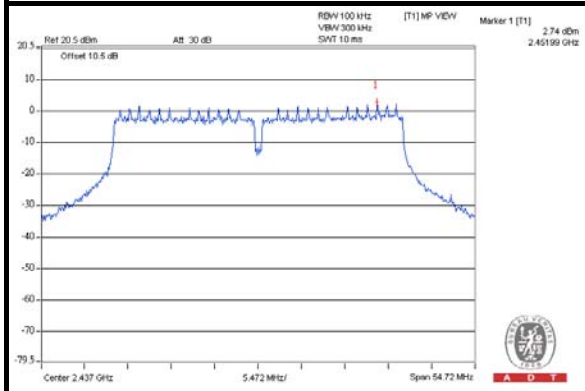

CH 9

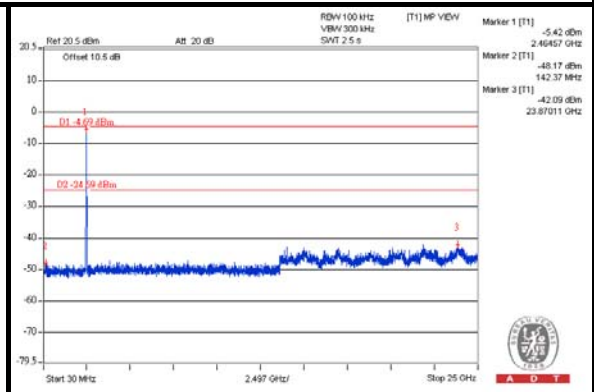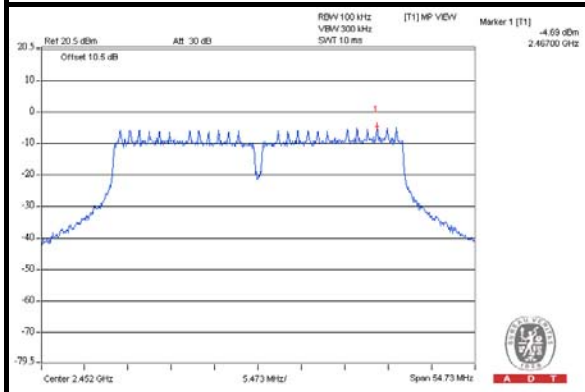

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	62.4 PK	85.6	-23.2	1.10 H	329	23.70	38.70
2	#5725.00	50.9 AV	74.1	-23.2	1.10 H	329	12.20	38.70
3	*5745.00	105.6 PK			1.10 H	329	66.90	38.70
4	*5745.00	94.1 AV			1.10 H	329	55.40	38.70
5	11490.00	57.0 PK	74.0	-17.0	1.06 H	126	7.50	49.50
6	11490.00	45.0 AV	54.0	-9.0	1.06 H	126	-4.50	49.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	70.5 PK	93.7	-23.2	1.00 V	199	31.80	38.70
2	#5725.00	60.2 AV	83.4	-23.2	1.00 V	199	21.50	38.70
3	*5745.00	113.7 PK			1.00 V	199	75.00	38.70
4	*5745.00	103.4 AV			1.00 V	199	64.70	38.70
5	11490.00	58.7 PK	74.0	-15.3	1.10 V	258	9.20	49.50
6	11490.00	44.6 AV	54.0	-9.4	1.10 V	258	-4.90	49.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	105.4 PK			1.11 H	320	66.60	38.80
2	*5785.00	94.2 AV			1.11 H	320	55.40	38.80
3	11570.00	57.0 PK	74.0	-17.0	1.07 H	137	7.60	49.40
4	11570.00	45.1 AV	54.0	-8.9	1.07 H	137	-4.30	49.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5400.00	62.6 PK	74.0	-11.4	1.38 V	131	24.50	38.10
2	5400.00	51.2 AV	54.0	-2.8	1.38 V	131	13.10	38.10
3	*5785.00	113.9 PK			1.00 V	202	75.10	38.80
4	*5785.00	103.3 AV			1.00 V	202	64.50	38.80
5	11570.00	58.0 PK	74.0	-16.0	1.08 V	230	8.60	49.40
6	11570.00	43.7 AV	54.0	-10.3	1.08 V	230	-5.70	49.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.2 PK			1.15 H	308	66.30	38.90
2	*5825.00	94.1 AV			1.15 H	308	55.20	38.90
3	#5850.00	62.4 PK	85.2	-22.8	1.15 H	308	23.50	38.90
4	#5850.00	51.3 AV	74.1	-22.8	1.15 H	308	12.40	38.90
5	11650.00	57.1 PK	74.0	-16.9	1.03 H	140	7.80	49.30
6	11650.00	44.7 AV	54.0	-9.3	1.03 H	140	-4.60	49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5400.00	62.9 PK	74.0	-11.1	1.28 V	130	24.80	38.10
2	5400.00	51.6 AV	54.0	-2.4	1.28 V	130	13.50	38.10
3	*5825.00	114.1 PK			1.00 V	207	75.20	38.90
4	*5825.00	103.2 AV			1.00 V	207	64.30	38.90
5	#5850.00	71.3 PK	94.1	-22.8	1.00 V	207	32.40	38.90
6	#5850.00	60.4 AV	83.2	-22.8	1.00 V	207	21.50	38.90
7	11650.00	58.5 PK	74.0	-15.5	1.15 V	260	9.20	49.30
8	11650.00	44.0 AV	54.0	-10.0	1.15 V	260	-5.30	49.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	62.4 PK	83.7	-21.3	1.00 H	325	23.70	38.70
2	#5725.00	51.4 AV	72.7	-21.3	1.00 H	325	12.70	38.70
3	*5745.00	103.7 PK			1.00 H	325	65.00	38.70
4	*5745.00	92.7 AV			1.00 H	325	54.00	38.70
5	11490.00	58.3 PK	74.0	-15.7	1.06 H	28	8.80	49.50
6	11490.00	45.0 AV	54.0	-9.0	1.06 H	28	-4.50	49.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	72.8 PK	94.1	-21.3	1.57 V	321	34.10	38.70
2	#5725.00	61.5 AV	82.8	-21.3	1.57 V	321	22.80	38.70
3	*5745.00	114.1 PK			1.57 V	321	75.40	38.70
4	*5745.00	102.8 AV			1.57 V	321	64.10	38.70
5	11490.00	59.0 PK	74.0	-15.0	1.24 V	236	9.50	49.50
6	11490.00	46.0 AV	54.0	-8.0	1.24 V	236	-3.50	49.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	103.8 PK			1.00 H	333	65.00	38.80
2	*5785.00	93.1 AV			1.00 H	333	54.30	38.80
3	11570.00	58.1 PK	74.0	-15.9	1.13 H	30	8.70	49.40
4	11570.00	45.2 AV	54.0	-8.8	1.13 H	30	-4.20	49.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5400.00	62.8 PK	74.0	-11.2	1.35 V	136	24.70	38.10
2	5400.00	51.3 AV	54.0	-2.7	1.35 V	136	13.20	38.10
3	*5785.00	114.1 PK			1.55 V	319	75.30	38.80
4	*5785.00	103.2 AV			1.55 V	319	64.40	38.80
5	11570.00	59.7 PK	74.0	-14.3	1.18 V	240	10.30	49.40
6	11570.00	46.0 AV	54.0	-8.0	1.18 V	240	-3.40	49.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	104.1 PK			1.00 H	333	65.20	38.90
2	*5825.00	93.2 AV			1.00 H	333	54.30	38.90
3	#5850.00	63.5 PK	84.1	-20.6	1.00 H	333	24.60	38.90
4	#5850.00	52.6 AV	73.2	-20.6	1.00 H	333	13.70	38.90
5	11650.00	58.0 PK	74.0	-16.0	1.08 H	10	8.70	49.30
6	11650.00	45.0 AV	54.0	-9.0	1.08 H	10	-4.30	49.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5400.00	63.1 PK	74.0	-10.9	1.25 V	134	25.00	38.10
2	5400.00	51.8 AV	54.0	-2.2	1.25 V	134	13.70	38.10
3	*5825.00	114.5 PK			1.49 V	340	75.60	38.90
4	*5825.00	103.2 AV			1.49 V	340	64.30	38.90
5	#5850.00	73.9 PK	94.5	-20.6	1.49 V	340	35.00	38.90
6	#5850.00	62.6 AV	83.2	-20.6	1.49 V	340	23.70	38.90
7	11650.00	59.1 PK	74.0	-14.9	1.13 V	210	9.80	49.30
8	11650.00	45.8 AV	54.0	-8.2	1.13 V	210	-3.50	49.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	67.3 PK	82.3	-15.0	1.00 H	325	28.60	38.70
2	#5725.00	56.0 AV	71.0	-15.0	1.00 H	325	17.30	38.70
3	*5755.00	102.3 PK			1.00 H	325	63.60	38.70
4	*5755.00	91.0 AV			1.00 H	325	52.30	38.70
5	11510.00	56.2 PK	74.0	-17.8	1.20 H	21	6.70	49.50
6	11510.00	44.0 AV	54.0	-10.0	1.20 H	21	-5.50	49.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	74.4 PK	89.4	-15.0	1.51 V	314	35.70	38.70
2	#5725.00	63.1 AV	78.1	-15.0	1.51 V	314	24.40	38.70
3	*5755.00	109.4 PK			1.51 V	314	70.70	38.70
4	*5755.00	98.1 AV			1.51 V	314	59.40	38.70
5	11510.00	57.3 PK	74.0	-16.7	1.35 V	255	7.80	49.50
6	11510.00	45.6 AV	54.0	-8.4	1.35 V	255	-3.90	49.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	101.8 PK			1.00 H	331	63.00	38.80
2	*5795.00	90.8 AV			1.00 H	331	52.00	38.80
3	#5850.00	62.8 PK	81.8	-19.0	1.00 H	331	23.90	38.90
4	#5850.00	51.8 AV	70.8	-19.0	1.00 H	331	12.90	38.90
5	11590.00	56.1 PK	74.0	-17.9	1.16 H	18	6.70	49.40
6	11590.00	43.9 AV	54.0	-10.1	1.16 H	18	-5.50	49.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5400.00	63.0 PK	74.0	-11.0	1.30 V	133	24.90	38.10
2	5400.00	51.6 AV	54.0	-2.4	1.30 V	133	13.50	38.10
3	*5795.00	109.3 PK			1.56 V	326	70.50	38.80
4	*5795.00	98.2 AV			1.56 V	326	59.40	38.80
5	#5850.00	70.3 PK	89.3	-19.0	1.56 V	326	31.40	38.90
6	#5850.00	59.2 AV	78.2	-19.0	1.56 V	326	20.30	38.90
7	11590.00	57.3 PK	74.0	-16.7	1.30 V	250	7.90	49.40
8	11590.00	45.4 AV	54.0	-8.6	1.30 V	250	-4.00	49.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 68%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.79	27.1 QP	40.0	-12.9	1.50 H	62	14.60	12.50
2	199.05	31.1 QP	43.5	-12.4	2.00 H	84	20.00	11.10
3	274.88	36.3 QP	46.0	-9.7	1.00 H	14	22.20	14.10
4	366.26	32.7 QP	46.0	-13.3	1.00 H	188	16.00	16.70
5	624.85	35.1 QP	46.0	-10.9	1.25 H	136	12.30	22.80
6	675.40	32.3 QP	46.0	-13.7	1.00 H	123	9.00	23.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.79	31.6 QP	40.0	-8.4	1.25 V	278	19.10	12.50
2	232.11	35.5 QP	46.0	-10.5	1.00 V	211	23.10	12.40
3	335.15	32.9 QP	46.0	-13.1	2.00 V	195	16.90	16.00
4	366.26	30.5 QP	46.0	-15.5	2.00 V	135	13.80	16.70
5	432.37	28.6 QP	46.0	-17.4	1.00 V	31	10.20	18.40
6	624.85	30.7 QP	46.0	-15.3	1.00 V	209	7.90	22.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	48Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH	TESTED BY	Alan Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.72	31.7 QP	43.5	-11.8	1.49 H	304	21.60	10.10
2	224.00	29.9 QP	46.0	-16.1	2.00 H	166	18.30	11.60
3	276.38	32.0 QP	46.0	-14.0	1.00 H	180	18.30	13.70
4	499.48	28.9 QP	46.0	-17.1	1.24 H	167	9.10	19.80
5	625.58	31.4 QP	46.0	-14.6	1.00 H	244	8.70	22.70
6	676.02	38.8 QP	46.0	-7.2	1.49 H	340	15.40	23.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	37.0 QP	40.0	-3.0	1.00 V	120	24.00	13.00
2	64.92	35.4 QP	40.0	-4.6	1.00 V	11	23.50	11.90
3	262.80	34.3 QP	46.0	-11.7	1.24 V	184	21.00	13.30
4	324.88	32.4 QP	46.0	-13.6	1.75 V	82	17.20	15.20
5	625.58	32.7 QP	46.0	-13.3	1.24 V	160	10.00	22.70
6	676.02	33.9 QP	46.0	-12.1	1.24 V	179	10.50	23.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	0.16	50.98	29.90	51.14	30.06	65.58	55.58	-14.44	-25.52
2	0.21226	0.23	43.63	23.80	43.86	24.03	63.12	53.12	-19.26	-29.09
3	0.46669	0.21	36.86	27.96	37.07	28.17	56.57	46.57	-19.50	-18.40
4	4.13820	0.36	30.10	22.60	30.46	22.96	56.00	46.00	-25.54	-23.04
5	9.90154	0.58	40.34	33.54	40.92	34.12	60.00	50.00	-19.08	-15.88
6	22.03427	0.99	26.07	19.09	27.06	20.08	60.00	50.00	-32.94	-29.92

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

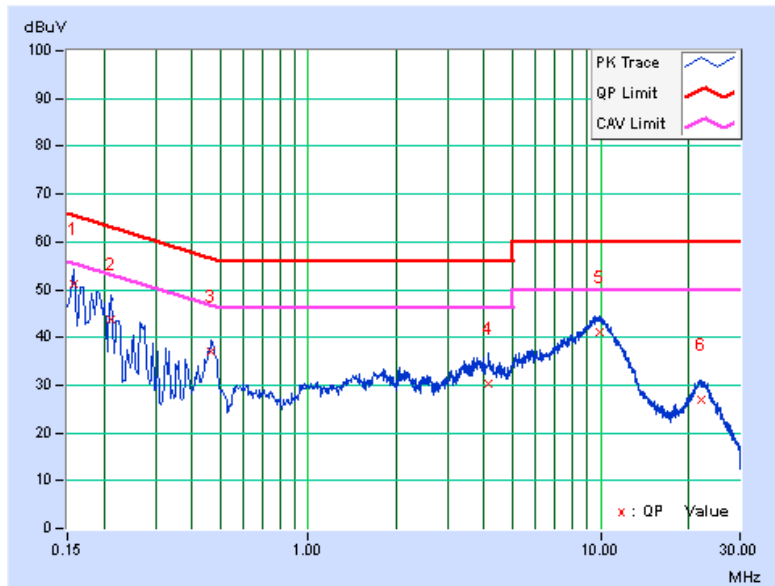




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17346	0.28	48.87	26.96	49.15	27.24	64.79	54.79	-15.65	-27.56
2	0.18519	0.29	47.11	26.20	47.40	26.49	64.25	54.25	-16.85	-27.76
3	0.23993	0.31	39.87	21.63	40.18	21.94	62.10	52.10	-21.92	-30.16
4	0.47039	0.30	37.97	29.36	38.27	29.66	56.51	46.51	-18.24	-16.85
5	1.40511	0.33	29.16	20.33	29.49	20.66	56.00	46.00	-26.51	-25.34
6	9.97583	0.66	36.89	30.14	37.55	30.80	60.00	50.00	-22.45	-19.20

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

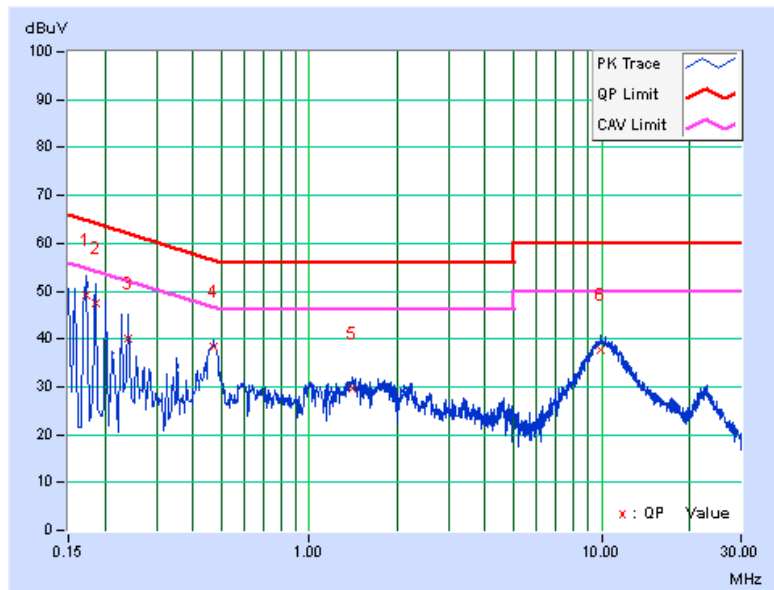




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19305	0.15	45.63	33.94	45.78	34.09	63.90	53.90	-18.13	-19.82
2	0.25166	0.16	42.83	31.40	42.99	31.56	61.70	51.70	-18.71	-20.14
3	0.50581	0.21	33.39	30.99	33.60	31.20	56.00	46.00	-22.40	-14.80
4	3.35229	0.34	35.73	35.46	36.07	35.80	56.00	46.00	-19.93	-10.20
5	6.18704	0.49	40.10	39.18	40.59	39.67	60.00	50.00	-19.41	-10.33
6	22.03818	1.36	33.93	33.76	35.29	35.12	60.00	50.00	-24.71	-14.88

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

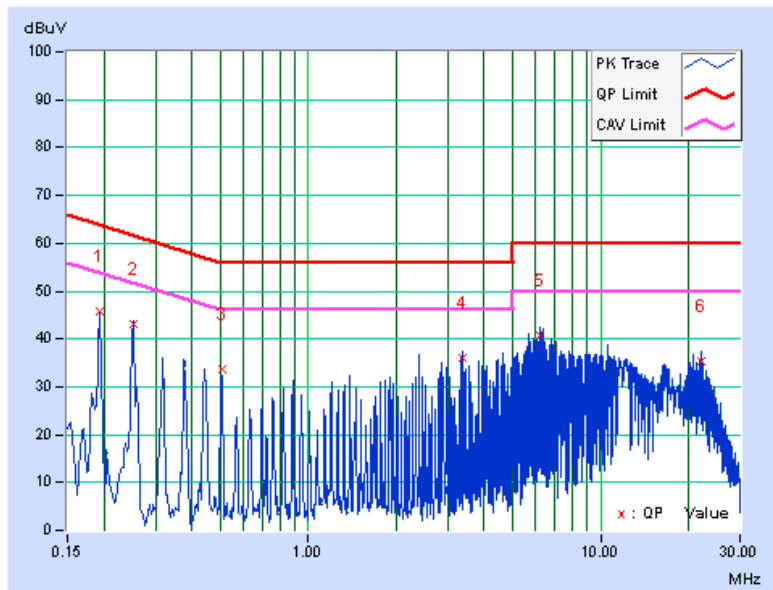




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18910	0.20	48.38	38.16	48.58	38.36	64.08	54.08	-15.50	-15.72
2	0.31432	0.23	35.32	28.03	35.55	28.26	59.86	49.86	-24.30	-21.59
3	0.44325	0.26	33.55	31.73	33.81	31.99	57.00	47.00	-23.19	-15.01
4	2.39434	0.33	36.95	33.38	37.28	33.71	56.00	46.00	-18.72	-12.29
5	6.42946	0.50	37.15	33.73	37.65	34.23	60.00	50.00	-22.35	-15.77
6	22.04600	1.04	33.86	33.11	34.90	34.15	60.00	50.00	-25.10	-15.85

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

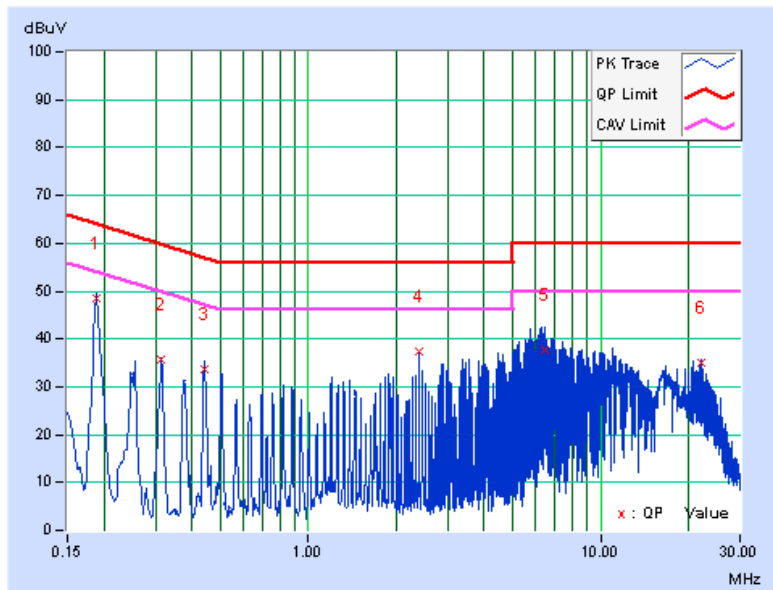



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.33	16.44	0.5	PASS
157	5785	16.40	16.46	0.5	PASS
165	5825	16.39	16.45	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.62	17.67	0.5	PASS
157	5785	17.61	17.61	0.5	PASS
165	5825	17.02	17.64	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.31	36.46	0.5	PASS
159	5795	35.92	36.46	0.5	PASS



A D T

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

5.4.2 TEST SETUP

Same as Item 4.4.2.

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

5.4.7 TEST RESULTS

FOR PEAK POWER

802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	26.40	26.40	873.032	29.41	30	PASS
157	5785	26.80	26.40	915.146	29.61	30	PASS
165	5825	26.80	26.50	925.314	29.66	30	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	26.59	26.72	925.931	29.67	30	PASS
157	5785	26.42	26.54	889.348	29.49	30	PASS
165	5825	27.11	26.62	973.242	29.88	30	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	26.90	26.30	916.359	29.62	30	PASS
159	5795	26.50	27.00	947.871	29.77	30	PASS



FOR AVERAGE POWER

802.11a

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	17.96	18.83	138.901	21.43
157	5785	18.69	18.77	149.297	21.74
165	5825	17.91	18.39	130.826	21.17

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	18.14	17.79	125.280	20.98
157	5785	18.22	17.92	128.318	21.08
165	5825	18.13	17.65	123.223	20.91

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
151	5755	18.59	18.52	143.398	21.57
159	5795	18.68	18.35	142.181	21.53



A D T

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.



5.5.7 TEST RESULTS

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-9.48	3.01	-6.47	5.99	PASS
	157	5785	-7.57	3.01	-4.56	5.99	PASS
	165	5825	-10.10	3.01	-7.09	5.99	PASS
1	149	5745	-11.26	3.01	-8.25	5.99	PASS
	157	5785	-10.26	3.01	-7.25	5.99	PASS
	165	5825	-10.21	3.01	-7.20	5.99	PASS

NOTE: Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 8-(8.01-6) = 5.99dBm.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-9.80	3.01	-6.79	5.99	PASS
	157	5785	-9.91	3.01	-6.90	5.99	PASS
	165	5825	-9.70	3.01	-6.69	5.99	PASS
1	149	5745	-11.54	3.01	-8.53	5.99	PASS
	157	5785	-10.27	3.01	-7.26	5.99	PASS
	165	5825	-11.43	3.01	-8.42	5.99	PASS

NOTE: Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 8-(8.01-6) = 5.99dBm.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-13.71	3.01	-10.70	5.99	PASS
	159	5795	-12.69	3.01	-9.68	5.99	PASS
1	151	5755	-14.42	3.01	-11.41	5.99	PASS
	159	5795	-11.32	3.01	-8.31	5.99	PASS

NOTE: Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 8-(8.01-6) = 5.99dBm.



A D T

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


802.11a

CHAIN 0


CH 149

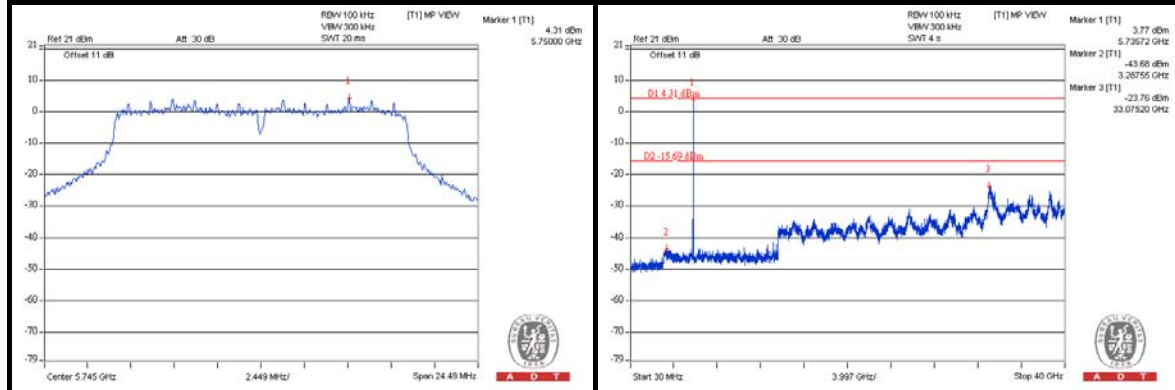

CH 157


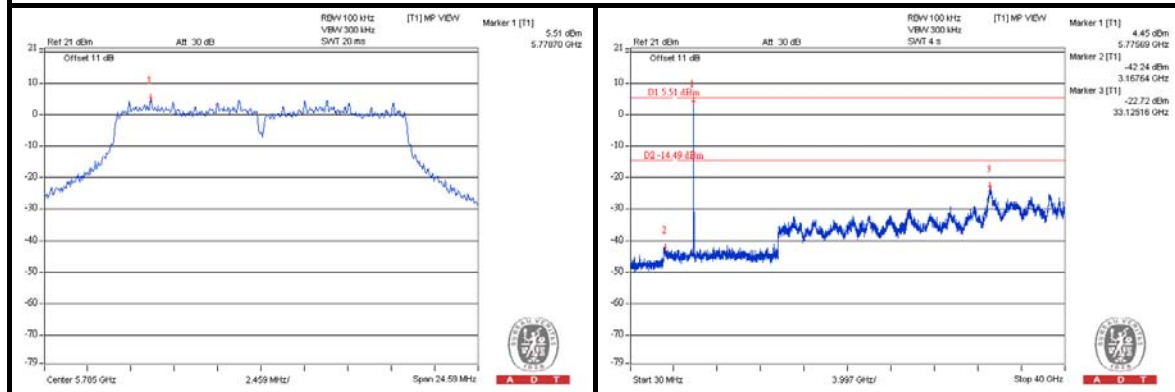


CH 165


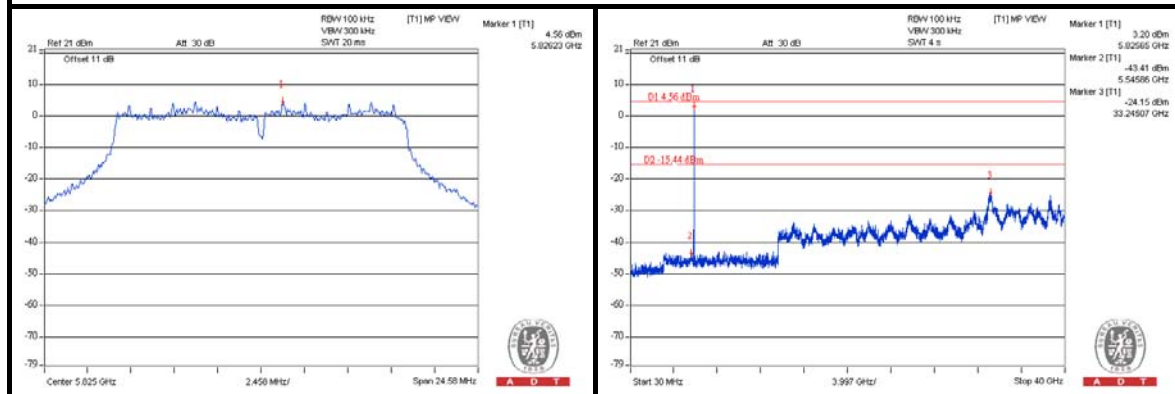


CHAIN 1



CH 149

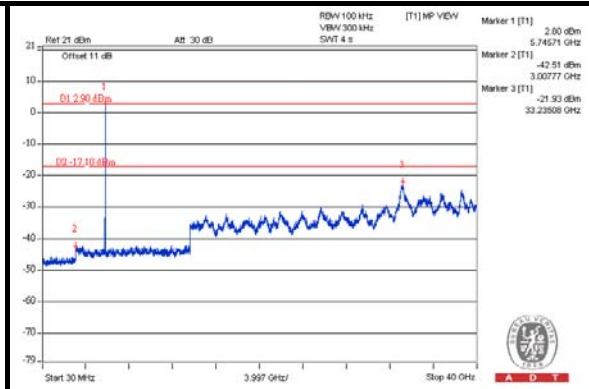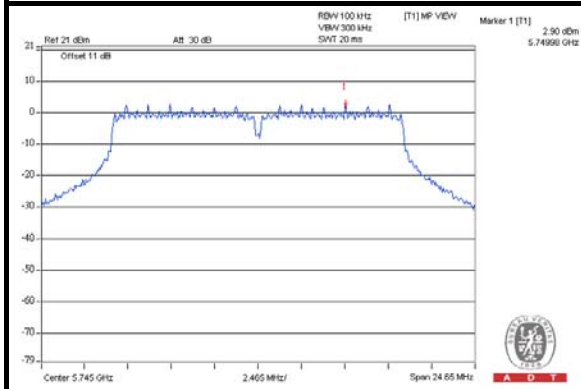

CH 157

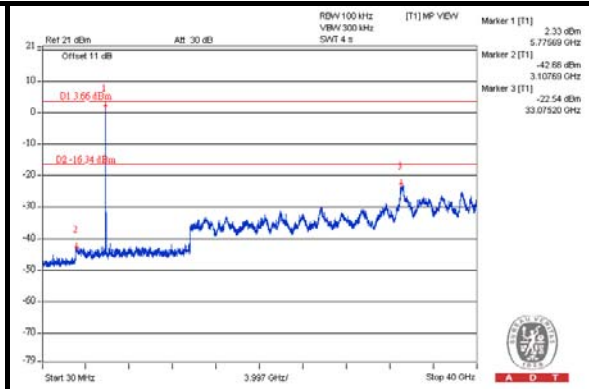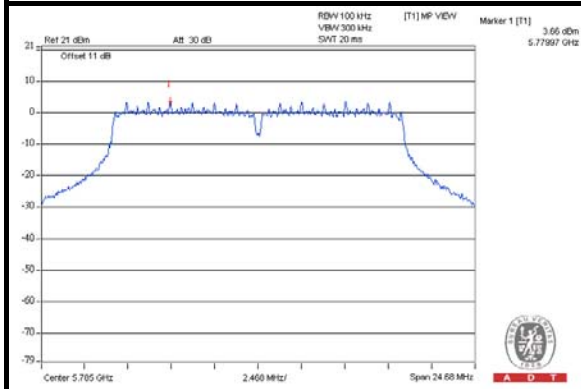

CH 165

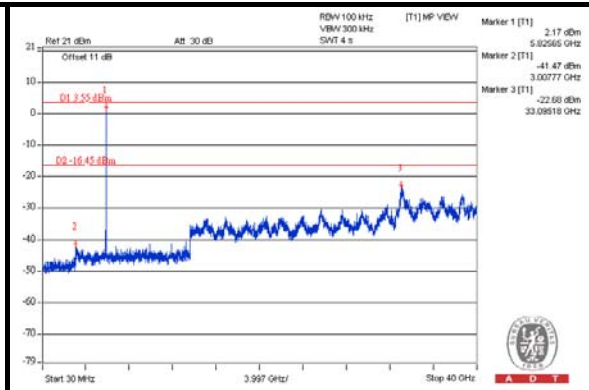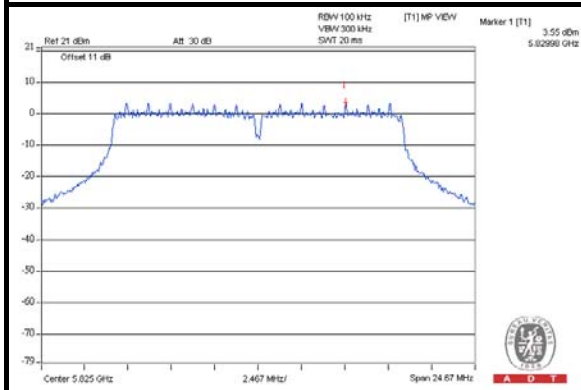




A D T


802.11n (20MHz)

CHAIN 0


CH 149

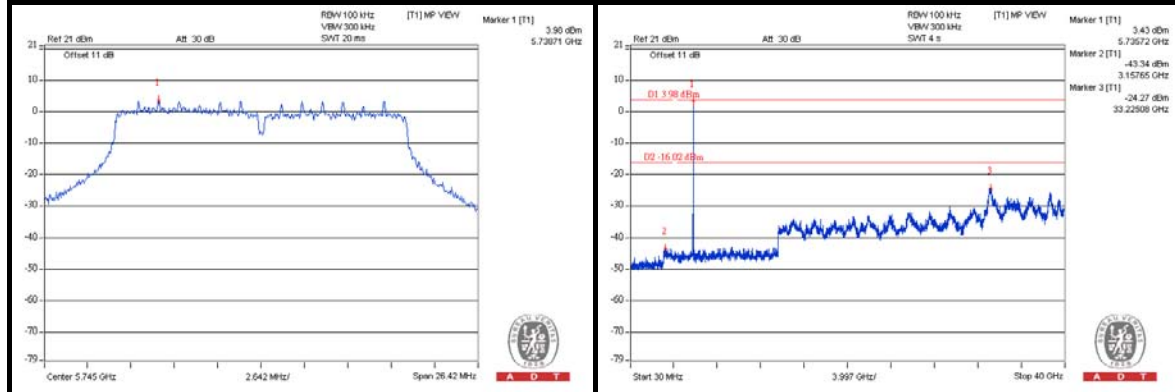

CH 157

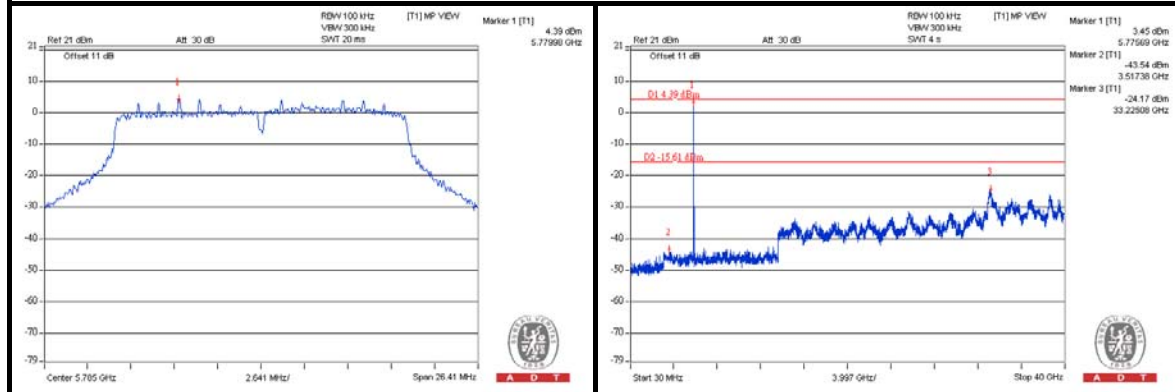


CH 165

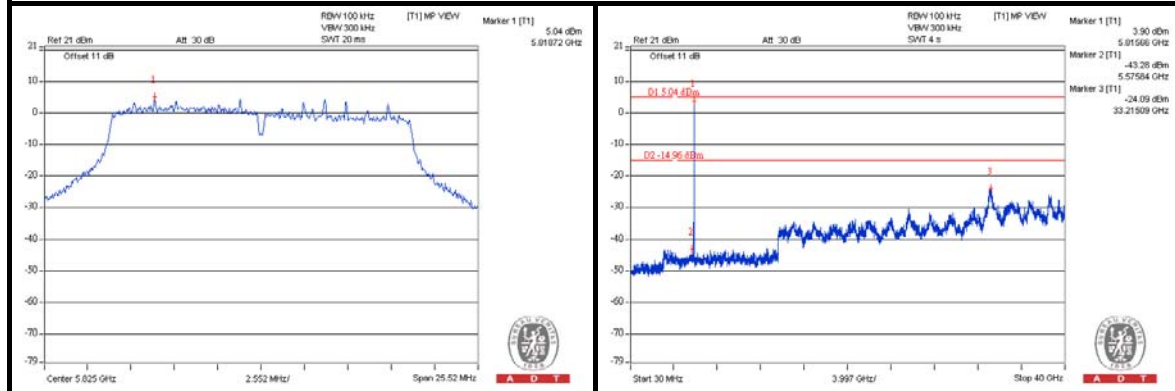


CHAIN 1


CH 149

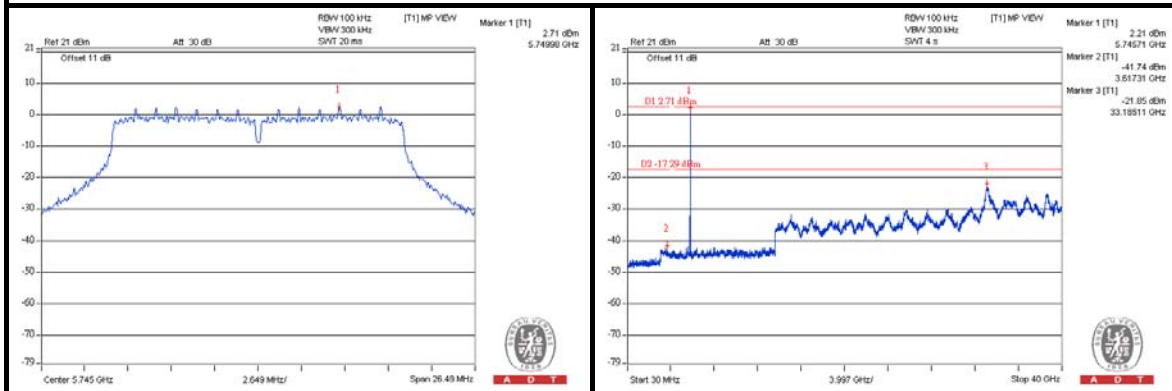

CH 157

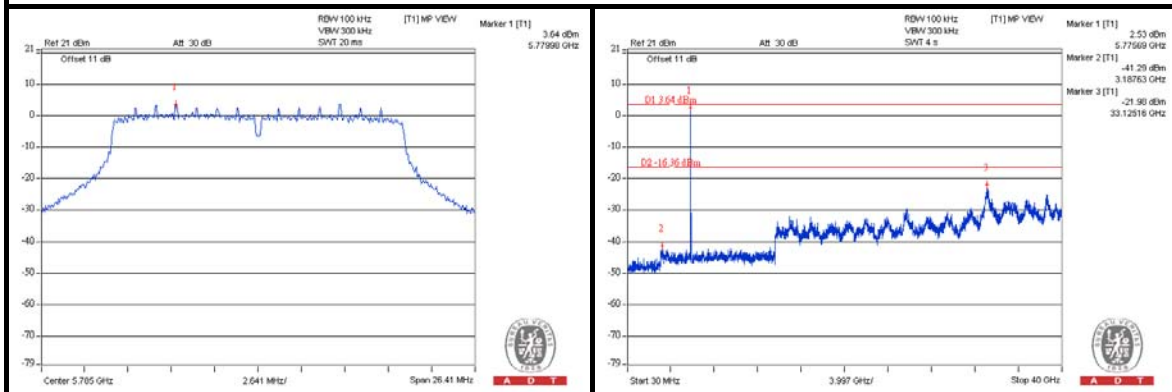

CH 165

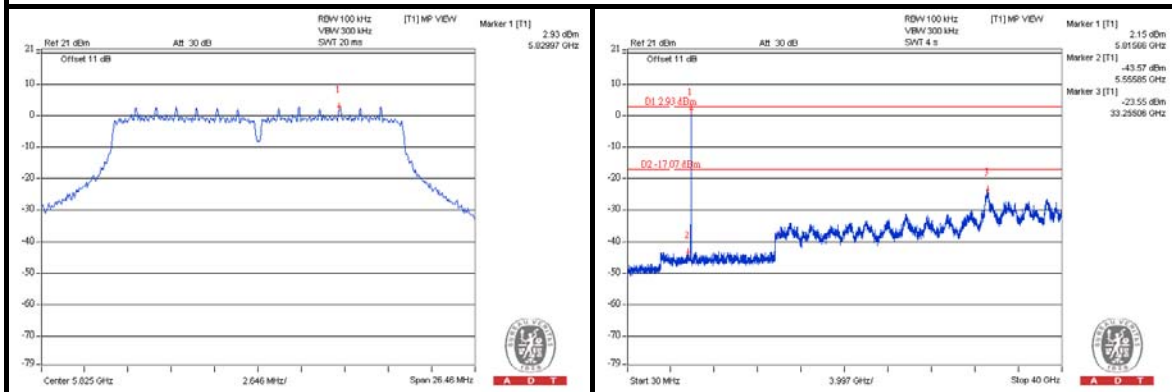




A D T


802.11n (40MHz)

CHAIN 0

CH 151

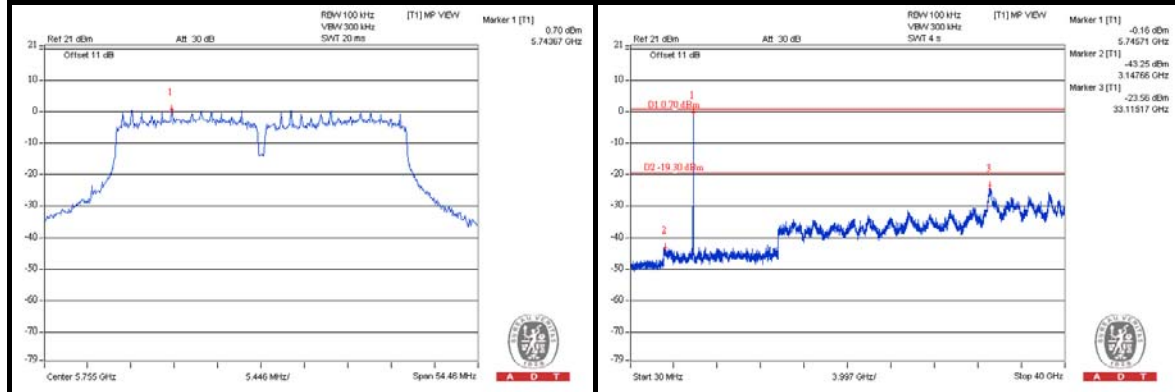

CH 159

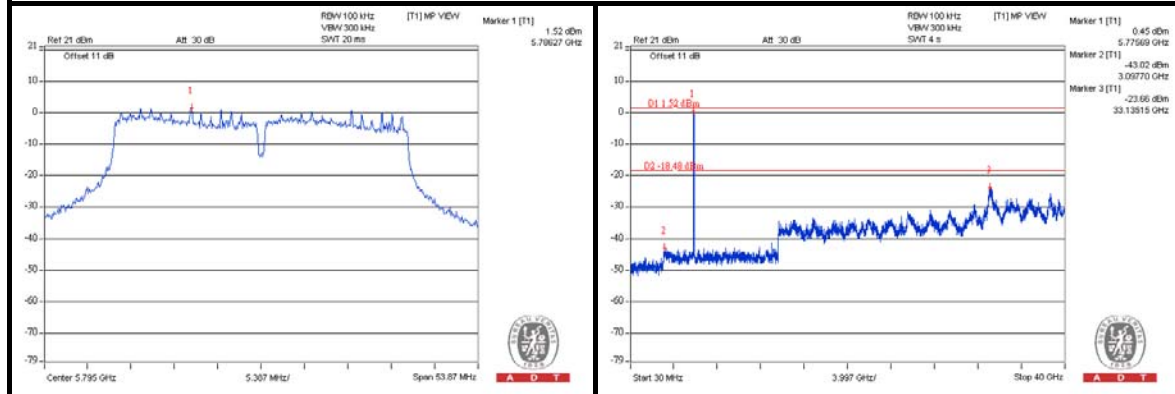





A D T

CHAIN 1

CH 151

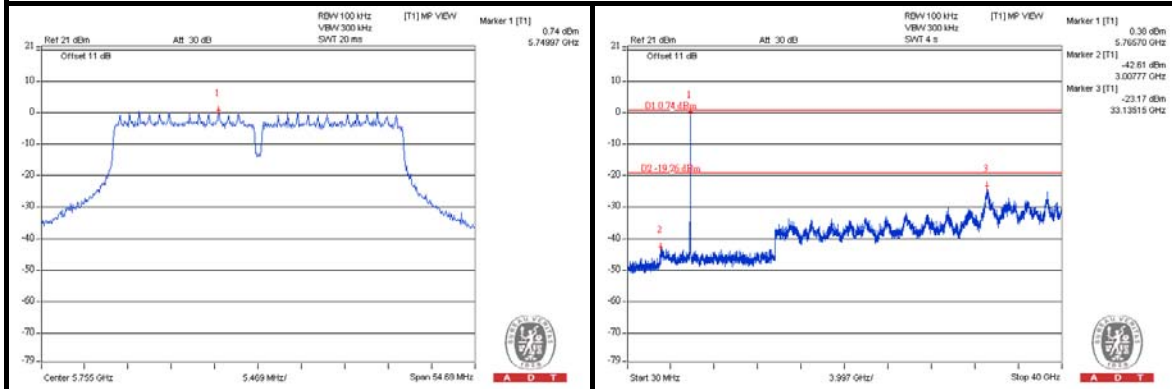

CH 159

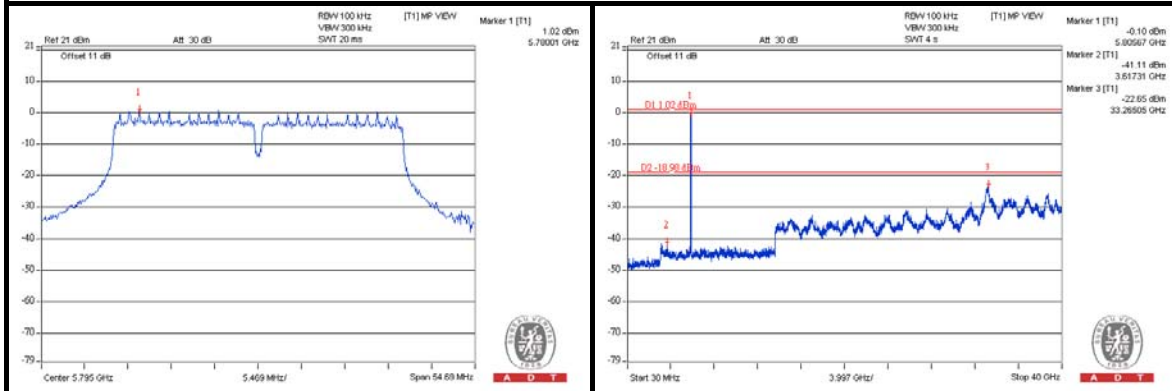



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---