

FCC Test Report

Report No.: RF180302C27

FCC ID: A8J-EMD1

Test Model: EMD1, EMD2

Series Model: ERP1

Received Date: Mar. 01, 2018

Test Date: Mar. 01 ~ May 18, 2018

Issued Date: May 21, 2018

Applicant: EnGenius Technologies

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards.....	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Set Up.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	35
4.2.1 Limits of Conducted Emission Measurement.....	35
4.2.2 Test Instruments.....	35
4.2.3 Test Procedures.....	35
4.2.4 Deviation from Test Standard.....	36
4.2.5 Test Setup.....	36
4.2.6 EUT Operating Conditions.....	36
4.2.7 Test Results.....	37
4.3 6dB Bandwidth Measurement.....	43
4.3.1 Limits of 6dB Bandwidth Measurement.....	43
4.3.2 Test Setup.....	43
4.3.3 Test Instruments.....	43
4.3.4 Test Procedure.....	43
4.3.5 Deviation from Test Standard.....	43
4.3.6 EUT Operating Conditions.....	43
4.3.7 Test Result.....	44
4.4 Conducted Output Power Measurement.....	46
4.4.1 Limits of Conducted Output Power Measurement.....	46
4.4.2 Test Setup.....	46
4.4.3 Test Instruments.....	46
4.4.4 Test Procedures.....	46
4.4.5 Deviation from Test Standard.....	46
4.4.6 EUT Operating Conditions.....	46
4.4.7 Test Results.....	47
4.5 Power Spectral Density Measurement.....	49
4.5.1 Limits of Power Spectral Density Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments.....	49
4.5.4 Test Procedure.....	49
4.5.5 Deviation from Test Standard.....	49
4.5.6 EUT Operating Condition.....	49

4.5.7 Test Results	50
4.6 Conducted Out of Band Emission Measurement.....	53
4.6.1 Limits of Conducted Out of Band Emission Measurement	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments	53
4.6.4 Test Procedure	53
4.6.5 Deviation from Test Standard	53
4.6.6 EUT Operating Condition	53
4.6.7 Test Results	53
5 Pictures of Test Arrangements.....	62
Appendix – Information on the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RF180302C27	Original release.	May 21, 2018

1 Certificate of Conformity

Product: AC1300 Dual-Band Mesh AP

Brand: EnGenius

Test Model: EMD1, EMD2

Series Model: ERP1

Sample Status: Engineering sample


Applicant: EnGenius Technologies

Test Date: Mar. 01 ~ May 18, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Polly Chien / Specialist

Date:

May 21, 2018

Approved by :



Bruce Chen / Project Engineer

Date:

May 21, 2018

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -8.15dB at 0.47185MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0 dB at 4924.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1300 Dual-Band Mesh AP
Brand	EnGenius
Test Model	EMD1, EMD2
Series Model	ERP1
Model Difference	Refer to Note
Status of EUT	Engineering sample
Power Supply Rating	EMD1 & ERP1: 100-240Vac, 50-60Hz EMD2: 12Vdc (adapter) 54Vdc (PoE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	CDD Mode: 322.271mW Beamforming Mode: 154.525mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

1. All models are listed as below.

Brand	Model	Difference
EnGenius	EMD1	Main test model.
	EMD2	1. Remove power plug (change to external power supply from power adaptor) 2. With PoE power (not in the package) 3. RF circuit design & SW unchanged.
	ERP1	1. RF circuit design Identical to EMD1 except SW. (EMD1 SW support Mesh model, ERP1 only support Repeater mode.)

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitter and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11b	Not Support	2TX
802.11g	Not Support	2TX
802.11n (HT20)	Support	2TX
802.11n (HT40)	Support	2TX

* For 802.11n, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

3. The following antennas were provided to the EUT.

Ant. Type	PIFA	
Connector Type	I-PEX	
Antenna Gain (dBi)		
Item	2.4G	5G
Ant. 1	2.0	5.6
Ant. 2	2.2	5.9

* The maximum antenna gain is chosen for final test.

4. The EUT consumes power from the following Adapter.

Adapter for EMD2	
Brand	Asian Power Devices Inc.
Model	WB-12G12FU
Input Power	100-240Vac, 50-60Hz, 0.3A Max
Output Power	12Vdc, 1A
Power Line	1.47m cable without core attached on adapter

5. The EUT consumes power from the following PoE.

PoE for EMD2 (Suporrt unit)	
Brand	EnGenius
Model	EPA5006GP
Input Power	100-240Vac~0.8A, 50-60Hz
Output Power	54Vdc / 0.6A PIN 4,5:54V PIN 7,8:RETURN

6. WLAN 2.4GHz and WLAN 5GHz technologies can transmit at same time.

7. Spurious emission of the simultaneous operation (WLAN 2.4GHz and WLAN 5GHz) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT (EMD1)
B	-	√	√	-	EUT (EMD2) + adapter
C	-	√	√	-	EUT (EMD2) + POE

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.
- "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B, C	802.11g	1 to 11	6	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B, C	802.11g	1 to 11	6	OFDM	BPSK	6.0

6dB Bandwidth, Power Spectral Density and Conducted Out of Band Emission Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Conducted Output Power Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
CDD Mode						
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0
Beamforming Mode						
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE \geq 1G	22 deg. C, 68% RH	120Vac, 60Hz	Willy Cheng, Adair Peng
RE<1G	22 deg. C, 69% RH	120Vac, 60Hz 54Vdc (PoE)	Adair Peng
	22 deg. C, 70% RH	120Vac, 60Hz	
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Adair Peng
	23 deg. C, 69% RH	120Vac, 60Hz 54Vdc (PoE)	Willy Cheng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98%, duty factor is not required


802.11b: Duty cycle = $12.374/12.512 = 0.989$

Duty cycle of test signal is < 98 %, duty factor is required

802.11g: Duty cycle = $2.046/2.147 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (HT20): Duty cycle = $4.988/5.097 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

802.11n (HT40): Duty cycle = $2.402/2.514 = 0.955$, Duty factor = $10 * \log(1/0.955) = 0.20$

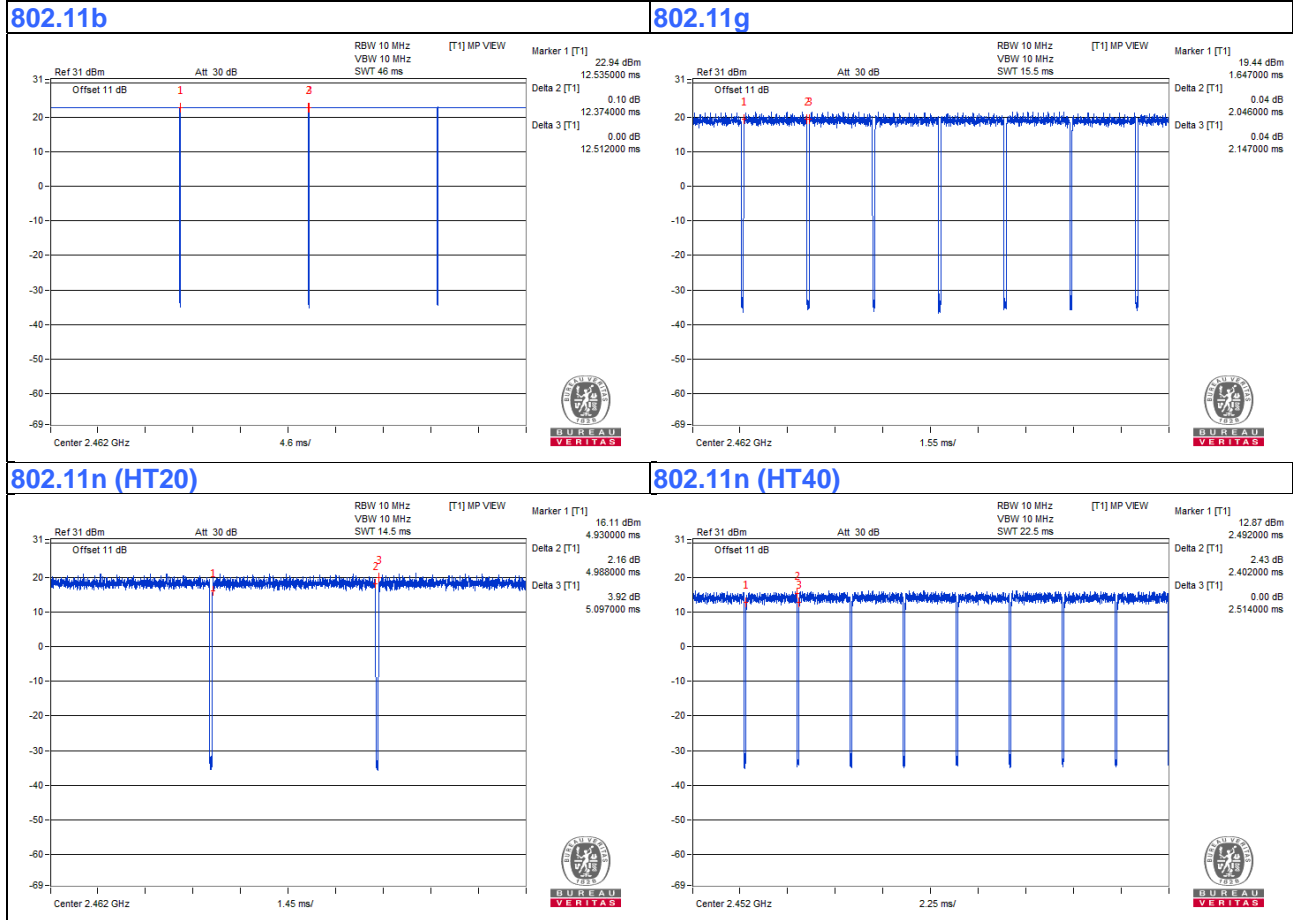

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	80Q7	PF0KUGU6	FCC DoC Approved	Mode A
	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	Mode B, C
B.	PoE	EnGenius	EPA5006GP	NA	NA	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.
3. Item B was placed under the test table.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45 cable	1	6	N	0	Cat5e
2.	RJ45 cable	1	1	N	0	Cat5e

3.4.1 Configuration of System under Test


Mode A

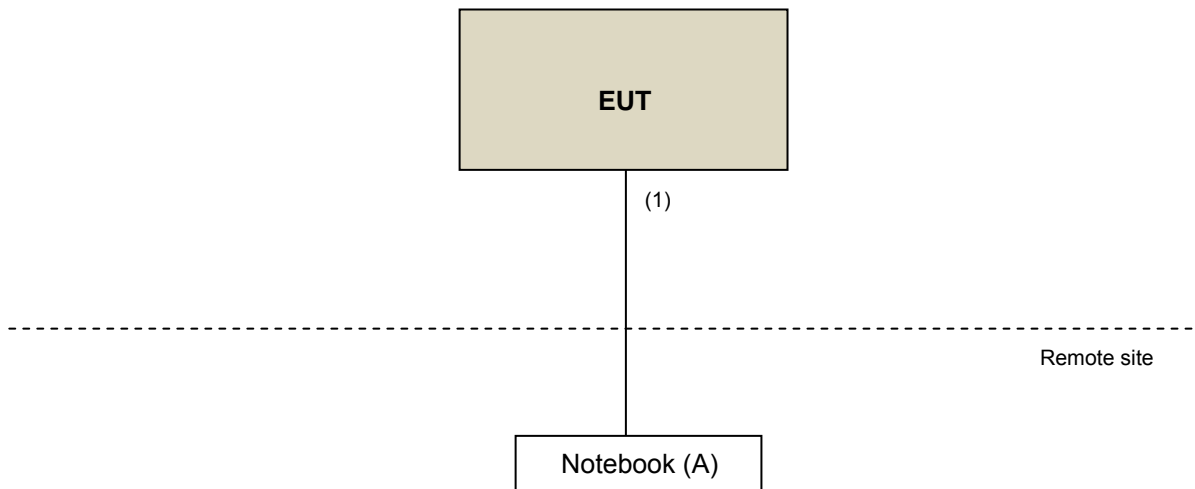

Mode B

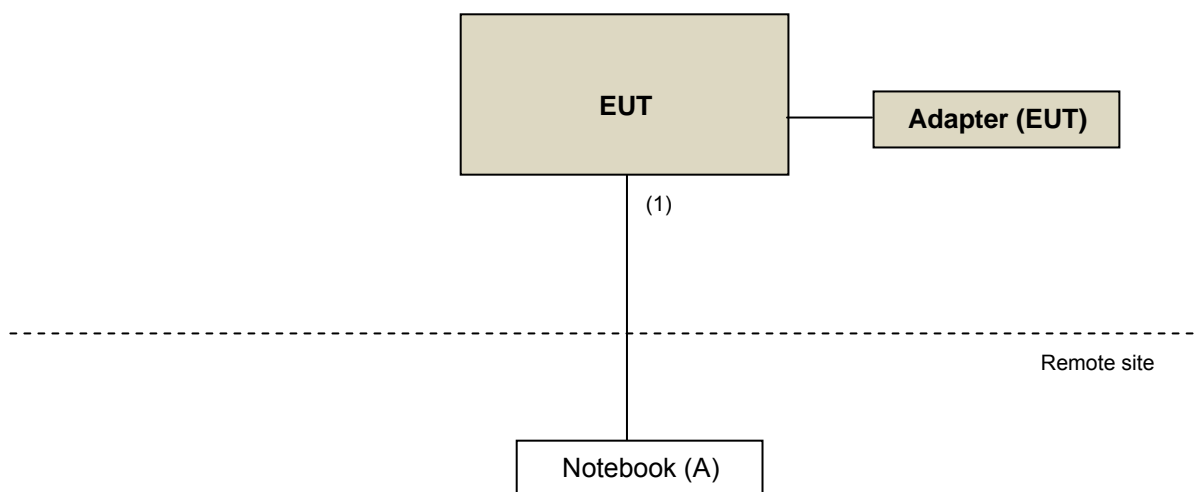

Mode C

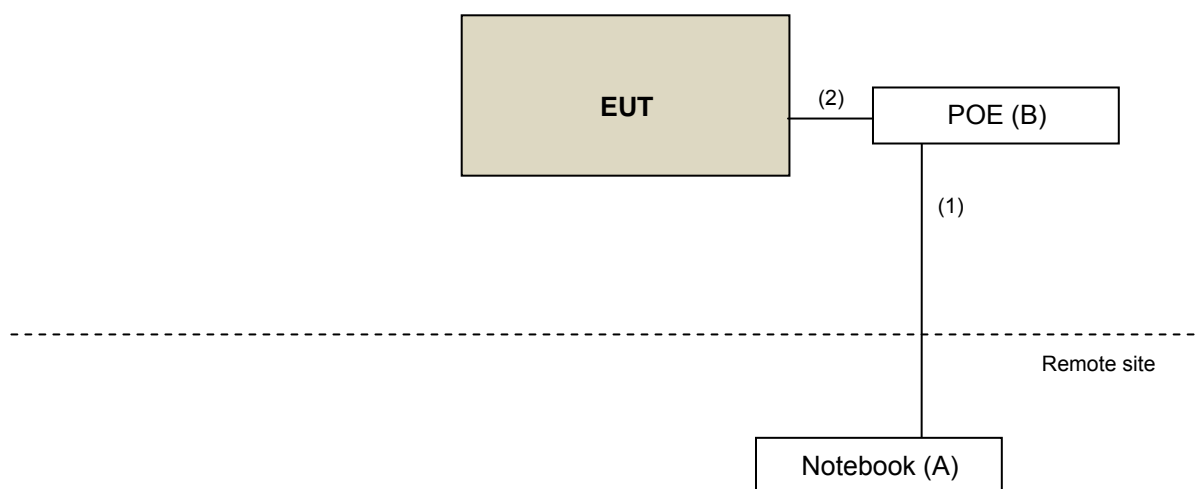

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 17, 2017	Oct. 16, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	9120D	209	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2017	Aug. 20, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Apr. 05, 2017	Apr. 04, 2018
			Apr. 03, 2018	Apr. 02, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2017	Aug. 20, 2018
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Sep.11, 2017	Sep. 10, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

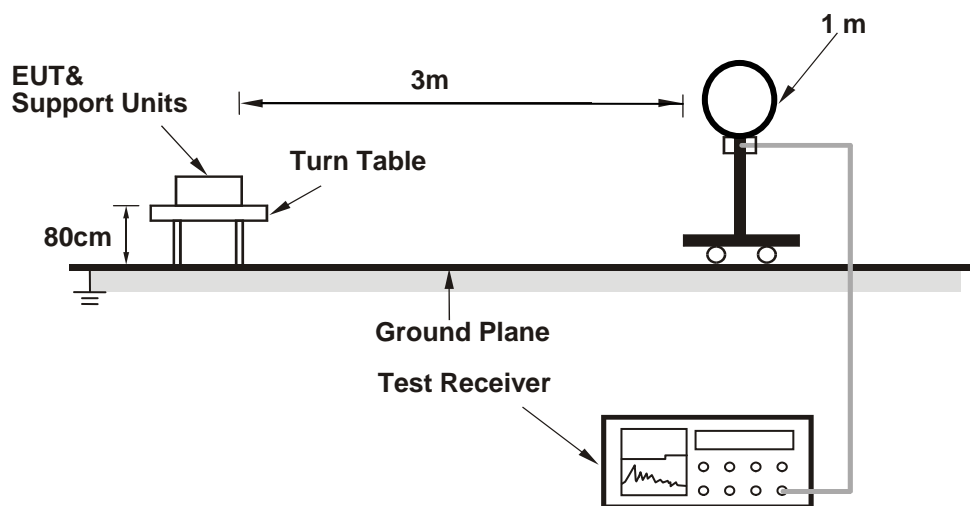

For Radiated emission 30MHz to 1GHz

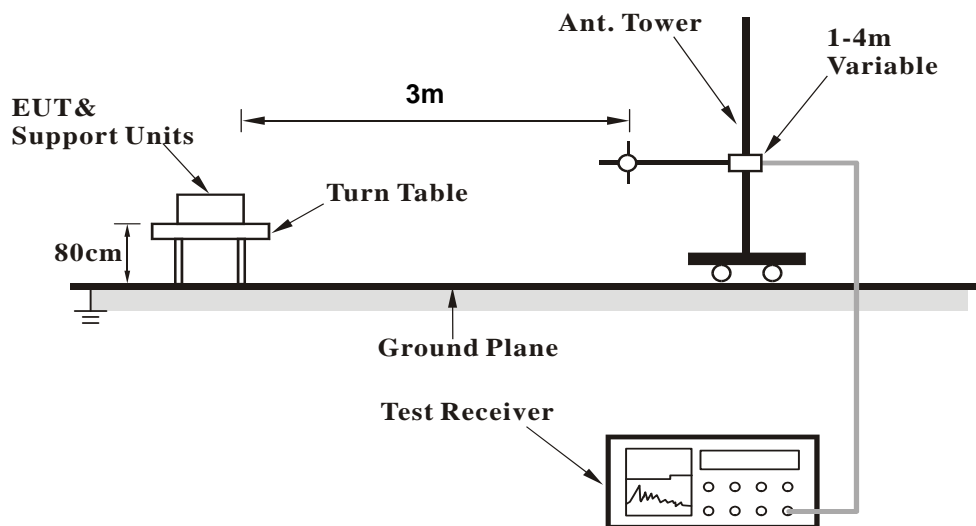

For Radiated emission above 1GHz

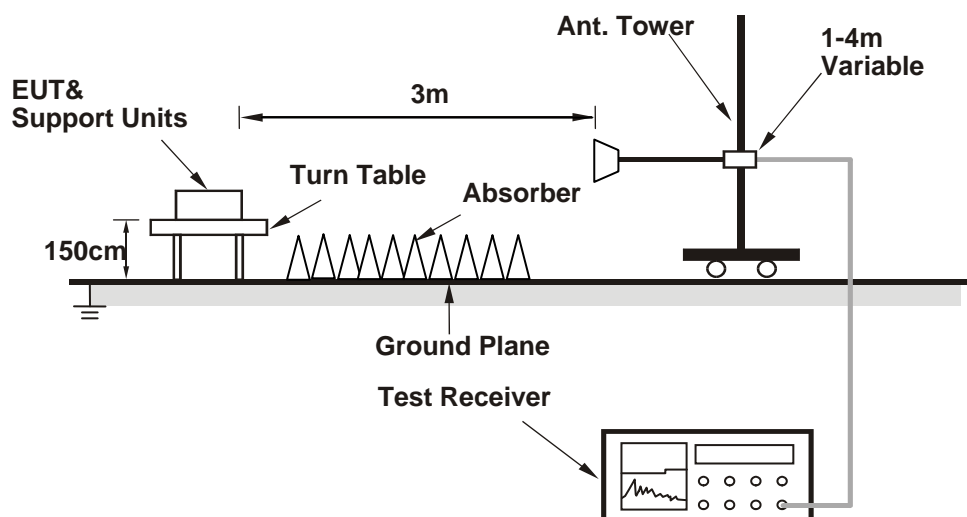

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	2.81 H	93	26.00	33.50
2	2390.00	50.3 AV	54.0	-3.7	2.81 H	93	16.80	33.50
3	*2412.00	110.2 PK			2.97 H	258	76.80	33.40
4	*2412.00	106.4 AV			2.97 H	258	73.00	33.40
5	4824.00	54.5 PK	74.0	-19.5	1.10 H	334	50.80	3.70
6	4824.00	51.8 AV	54.0	-2.2	1.10 H	334	48.10	3.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.41 V	184	24.20	33.50
2	2390.00	46.7 AV	54.0	-7.3	1.41 V	184	13.20	33.50
3	*2412.00	108.2 PK			1.00 V	358	74.80	33.40
4	*2412.00	104.4 AV			1.00 V	358	71.00	33.40
5	4824.00	55.1 PK	74.0	-18.9	2.44 V	325	51.40	3.70
6	4824.00	52.5 AV	54.0	-1.5	2.44 V	325	48.80	3.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.5 PK			2.42 H	169	81.10	33.40
2	*2437.00	110.5 AV			2.42 H	169	77.10	33.40
3	4874.00	54.1 PK	74.0	-19.9	1.06 H	283	50.60	3.50
4	4874.00	50.4 AV	54.0	-3.6	1.06 H	283	46.90	3.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.7 PK			1.97 V	15	77.30	33.40
2	*2437.00	107.0 AV			1.97 V	15	73.60	33.40
3	4874.00	53.5 PK	74.0	-20.5	1.97 V	350	50.00	3.50
4	4874.00	52.3 AV	54.0	-1.7	1.97 V	350	48.80	3.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.5 PK			2.37 H	161	79.20	33.30
2	*2462.00	108.7 AV			2.37 H	161	75.40	33.30
3	2483.50	58.9 PK	74.0	-15.1	1.78 H	170	25.70	33.20
4	2483.50	48.7 AV	54.0	-5.3	1.78 H	170	15.50	33.20
5	4924.00	54.1 PK	74.0	-19.9	1.13 H	256	50.80	3.30
6	4924.00	50.8 AV	54.0	-3.2	1.13 H	256	47.50	3.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.9 PK			1.64 V	11	77.60	33.30
2	*2462.00	107.1 AV			1.64 V	11	73.80	33.30
3	2483.50	59.6 PK	74.0	-14.4	1.27 V	3	26.40	33.20
4	2483.50	49.4 AV	54.0	-4.6	1.27 V	3	16.20	33.20
5	4924.00	55.3 PK	74.0	-18.7	2.52 V	346	52.00	3.30
6	4924.00	53.0 AV	54.0	-1.0	2.52 V	346	49.70	3.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.49 H	240	33.20	33.50
2	2390.00	52.3 AV	54.0	-1.7	1.49 H	240	18.80	33.50
3	*2412.00	109.7 PK			2.64 H	265	76.30	33.40
4	*2412.00	98.7 AV			2.64 H	265	65.30	33.40
5	4824.00	51.6 PK	74.0	-22.4	3.82 H	227	47.90	3.70
6	4824.00	44.9 AV	54.0	-9.1	3.82 H	227	41.20	3.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.41 V	242	31.40	33.50
2	2390.00	49.9 AV	54.0	-4.1	1.41 V	242	16.40	33.50
3	*2412.00	108.8 PK			1.39 V	241	75.40	33.40
4	*2412.00	98.8 AV			1.39 V	241	65.40	33.40
5	4824.00	53.6 PK	74.0	-20.4	2.59 V	291	49.90	3.70
6	4824.00	48.6 AV	54.0	-5.4	2.59 V	291	44.90	3.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	2.75 H	82	34.40	33.50
2	2390.00	52.5 AV	54.0	-1.5	2.75 H	82	19.00	33.50
3	*2437.00	118.0 PK			2.82 H	93	84.60	33.40
4	*2437.00	107.5 AV			2.82 H	93	74.10	33.40
5	4874.00	58.3 PK	74.0	-15.7	2.78 H	13	54.80	3.50
6	4874.00	45.5 AV	54.0	-8.5	2.78 H	13	42.00	3.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	2.43 V	254	30.00	33.50
2	2390.00	49.4 AV	54.0	-4.6	2.43 V	254	15.90	33.50
3	*2437.00	114.8 PK			2.66 V	261	81.40	33.40
4	*2437.00	104.4 AV			2.66 V	261	71.00	33.40
5	4874.00	64.4 PK	74.0	-9.6	2.63 V	279	60.90	3.50
6	4874.00	52.3 AV	54.0	-1.7	2.63 V	279	48.80	3.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.4 PK			2.62 H	88	78.10	33.30
2	*2462.00	100.2 AV			2.62 H	88	66.90	33.30
3	2483.50	67.4 PK	74.0	-6.6	2.12 H	194	34.20	33.20
4	2483.50	52.2 AV	54.0	-1.8	2.12 H	194	19.00	33.20
5	4924.00	48.7 PK	74.0	-25.3	2.44 H	19	45.40	3.30
6	4924.00	41.6 AV	54.0	-12.4	2.44 H	19	38.30	3.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.0 PK			2.33 V	260	75.70	33.30
2	*2462.00	98.5 AV			2.33 V	260	65.20	33.30
3	2483.50	68.4 PK	74.0	-5.6	2.52 V	261	35.20	33.20
4	2483.50	52.7 AV	54.0	-1.3	2.52 V	261	19.50	33.20
5	4924.00	53.3 PK	74.0	-20.7	2.58 V	285	50.00	3.30
6	4924.00	48.2 AV	54.0	-5.8	2.58 V	285	44.90	3.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	2.50 H	168	33.50	33.50
2	2390.00	52.7 AV	54.0	-1.3	2.50 H	168	19.20	33.50
3	*2412.00	110.7 PK			1.83 H	161	77.30	33.40
4	*2412.00	99.6 AV			1.83 H	161	66.20	33.40
5	4824.00	52.5 PK	74.0	-21.5	1.44 H	226	48.80	3.70
6	4824.00	48.3 AV	54.0	-5.7	1.44 H	226	44.60	3.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.28 V	248	28.00	33.50
2	2390.00	49.6 AV	54.0	-4.4	2.28 V	248	16.10	33.50
3	*2412.00	106.6 PK			2.50 V	244	73.20	33.40
4	*2412.00	95.7 AV			2.50 V	244	62.30	33.40
5	4824.00	52.5 PK	74.0	-21.5	2.54 V	285	48.80	3.70
6	4824.00	48.6 AV	54.0	-5.4	2.54 V	285	44.90	3.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.53 H	7	32.50	33.50
2	2390.00	52.8 AV	54.0	-1.2	1.53 H	7	19.30	33.50
3	*2437.00	117.7 PK			2.40 H	168	84.30	33.40
4	*2437.00	107.0 AV			2.40 H	168	73.60	33.40
5	4874.00	61.6 PK	74.0	-12.4	1.06 H	231	58.10	3.50
6	4874.00	47.9 AV	54.0	-6.1	1.06 H	231	44.40	3.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.97 V	18	28.00	33.50
2	2390.00	48.9 AV	54.0	-5.1	2.97 V	18	15.40	33.50
3	*2437.00	115.6 PK			2.63 V	257	82.20	33.40
4	*2437.00	104.9 AV			2.63 V	257	71.50	33.40
5	4874.00	65.2 PK	74.0	-8.8	2.66 V	269	61.70	3.50
6	4874.00	50.0 AV	54.0	-4.0	2.66 V	269	46.50	3.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.0 PK			2.13 H	12	76.70	33.30
2	*2462.00	99.5 AV			2.13 H	12	66.20	33.30
3	2483.50	66.2 PK	74.0	-7.8	2.15 H	227	33.00	33.20
4	2483.50	51.2 AV	54.0	-2.8	2.15 H	227	18.00	33.20
5	4924.00	52.2 PK	74.0	-21.8	1.03 H	230	48.90	3.30
6	4924.00	46.0 AV	54.0	-8.0	1.03 H	230	42.70	3.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.9 PK			1.11 V	241	75.60	33.30
2	*2462.00	98.3 AV			1.11 V	241	65.00	33.30
3	2483.50	66.5 PK	74.0	-7.5	1.01 V	243	33.30	33.20
4	2483.50	52.3 AV	54.0	-1.7	1.01 V	243	19.10	33.20
5	4924.00	53.2 PK	74.0	-20.8	2.61 V	283	49.90	3.30
6	4924.00	48.1 AV	54.0	-5.9	2.61 V	283	44.80	3.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	2.75 H	82	32.20	33.50
2	2390.00	52.9 AV	54.0	-1.1	2.75 H	82	19.40	33.50
3	*2422.00	105.8 PK			2.84 H	92	72.40	33.40
4	*2422.00	95.4 AV			2.84 H	92	62.00	33.40
5	4844.00	49.2 PK	74.0	-24.8	3.79 H	228	45.60	3.60
6	4844.00	43.9 AV	54.0	-10.1	3.79 H	228	40.30	3.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	2.38 V	271	27.20	33.50
2	2390.00	48.7 AV	54.0	-5.3	2.38 V	271	15.20	33.50
3	*2422.00	102.7 PK			2.36 V	255	69.30	33.40
4	*2422.00	93.1 AV			2.36 V	255	59.70	33.40
5	4844.00	52.3 PK	74.0	-21.7	2.20 V	287	48.70	3.60
6	4844.00	49.0 AV	54.0	-5.0	2.20 V	287	45.40	3.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	2.45 H	78	31.60	33.50
2	2390.00	52.4 AV	54.0	-1.6	2.45 H	78	18.90	33.50
3	*2437.00	108.2 PK			2.68 H	83	74.80	33.40
4	*2437.00	98.1 AV			2.68 H	83	64.70	33.40
5	4874.00	48.8 PK	74.0	-25.2	2.13 H	23	45.30	3.50
6	4874.00	42.4 AV	54.0	-11.6	2.13 H	23	38.90	3.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	2.54 V	251	24.40	33.50
2	2390.00	46.5 AV	54.0	-7.5	2.54 V	251	13.00	33.50
3	*2437.00	106.2 PK			2.63 V	260	72.80	33.40
4	*2437.00	96.2 AV			2.63 V	260	62.80	33.40
5	4874.00	53.5 PK	74.0	-20.5	2.61 V	286	50.00	3.50
6	4874.00	49.3 AV	54.0	-4.7	2.61 V	286	45.80	3.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.0 PK			2.82 H	94	72.60	33.40
2	*2452.00	95.9 AV			2.82 H	94	62.50	33.40
3	2483.50	66.4 PK	74.0	-7.6	3.14 H	105	33.20	33.20
4	2483.50	52.3 AV	54.0	-1.7	3.14 H	105	19.10	33.20
5	4904.00	48.2 PK	74.0	-25.8	3.25 H	141	44.80	3.40
6	4904.00	41.9 AV	54.0	-12.1	3.25 H	141	38.50	3.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.9 PK			2.60 V	258	69.50	33.40
2	*2452.00	93.9 AV			2.60 V	258	60.50	33.40
3	2483.50	61.5 PK	74.0	-12.5	3.12 V	268	28.30	33.20
4	2483.50	48.0 AV	54.0	-6.0	3.12 V	268	14.80	33.20
5	4904.00	52.4 PK	74.0	-21.6	2.62 V	287	49.00	3.40
6	4904.00	48.9 AV	54.0	-5.1	2.62 V	287	45.50	3.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data: 802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	27.5 QP	40.0	-12.5	1.99 H	1	41.90	-14.40
2	136.84	26.4 QP	43.5	-17.1	1.50 H	240	41.20	-14.80
3	276.82	32.1 QP	46.0	-13.9	1.01 H	231	45.40	-13.30
4	333.21	24.3 QP	46.0	-21.7	1.01 H	207	36.40	-12.10
5	486.81	22.2 QP	46.0	-23.8	1.01 H	15	31.80	-9.60
6	624.85	24.7 QP	46.0	-21.3	1.01 H	187	31.50	-6.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	32.0 QP	40.0	-8.0	1.00 V	229	47.00	-15.00
2	162.11	23.3 QP	43.5	-20.2	1.00 V	267	37.20	-13.90
3	276.82	28.6 QP	46.0	-17.4	1.49 V	248	41.90	-13.30
4	333.21	23.9 QP	46.0	-22.1	1.00 V	89	36.00	-12.10
5	486.81	22.8 QP	46.0	-23.2	1.49 V	13	32.40	-9.60
6	624.85	26.0 QP	46.0	-20.0	1.00 V	216	32.80	-6.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	27.4 QP	40.0	-12.6	2.00 H	220	41.80	-14.40
2	136.84	35.0 QP	43.5	-8.5	2.00 H	59	49.80	-14.80
3	164.06	36.2 QP	43.5	-7.3	1.50 H	244	50.20	-14.00
4	210.72	37.2 QP	43.5	-6.3	1.01 H	248	53.90	-16.70
5	313.77	33.0 QP	46.0	-13.0	1.01 H	243	45.40	-12.40
6	500.42	23.0 QP	46.0	-23.0	2.00 H	222	32.40	-9.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	35.4 QP	40.0	-4.6	1.00 V	172	51.00	-15.60
2	61.01	34.8 QP	40.0	-5.2	1.49 V	16	49.40	-14.60
3	162.11	33.0 QP	43.5	-10.5	1.00 V	144	46.90	-13.90
4	294.32	31.4 QP	46.0	-14.6	1.49 V	160	44.30	-12.90
5	405.15	21.8 QP	46.0	-24.2	1.00 V	176	32.90	-11.10
6	624.85	25.9 QP	46.0	-20.1	1.49 V	162	32.70	-6.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.9 QP	40.0	-13.1	1.99 H	131	41.30	-14.40
2	171.83	26.9 QP	43.5	-16.6	1.49 H	247	41.20	-14.30
3	222.38	20.3 QP	46.0	-25.7	1.00 H	268	36.60	-16.30
4	405.15	20.5 QP	46.0	-25.5	1.49 H	13	31.60	-11.10
5	539.30	22.8 QP	46.0	-23.2	1.49 H	111	31.90	-9.10
6	692.90	24.1 QP	46.0	-21.9	1.49 H	39	30.20	-6.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	34.6 QP	40.0	-5.4	1.01 V	311	48.90	-14.30
2	74.62	29.4 QP	40.0	-10.6	1.01 V	165	46.20	-16.80
3	156.28	28.3 QP	43.5	-15.2	1.01 V	267	42.00	-13.70
4	222.38	19.6 QP	46.0	-26.4	1.01 V	261	35.90	-16.30
5	405.15	21.1 QP	46.0	-24.9	1.01 V	161	32.20	-11.10
6	537.36	25.5 QP	46.0	-20.5	1.01 V	240	34.60	-9.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Tested date: Mar. 09 ~ May 18, 2018

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Aug. 17, 2017	Aug. 16, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 08, 2017	Sep. 07, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 05, 2018	Feb. 04, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 02, 2017	Aug. 01, 2018
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

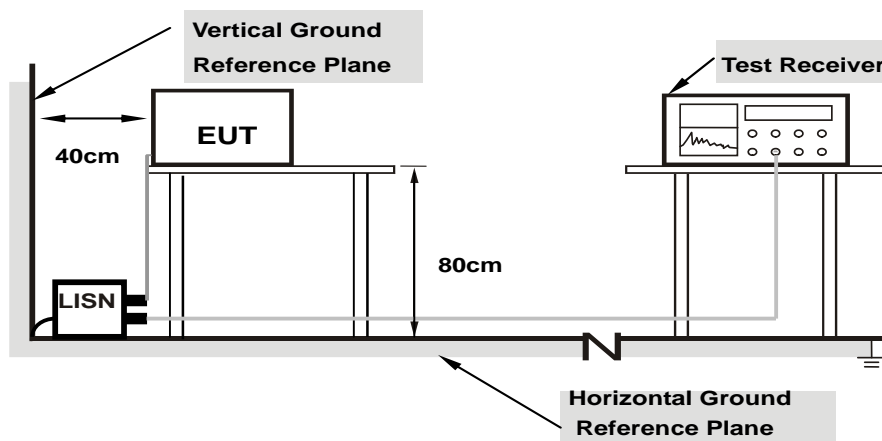

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 802.11g

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24766	10.32	28.81	17.25	39.13	27.57	61.84	51.84	-22.71	-24.27
2	0.43125	10.35	34.25	26.73	44.60	37.08	57.23	47.23	-12.63	-10.15
3	0.68516	10.38	27.19	15.63	37.57	26.01	56.00	46.00	-18.43	-19.99
4	0.97813	10.41	25.11	14.80	35.52	25.21	56.00	46.00	-20.48	-20.79
5	1.55859	10.42	23.76	14.13	34.18	24.55	56.00	46.00	-21.82	-21.45
6	5.83594	10.56	33.70	22.60	44.26	33.16	60.00	50.00	-15.74	-16.84

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

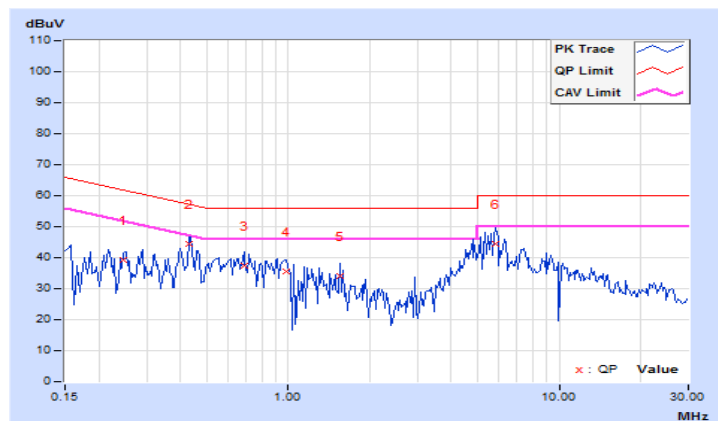


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18125	10.32	30.52	19.04	40.84	29.36	64.43
2	0.43125	10.32	34.19	26.83	44.51	37.15	57.23	47.23	-12.72	-10.08
3	0.67734	10.36	26.04	13.34	36.40	23.70	56.00	46.00	-19.60	-22.30
4	4.78516	10.58	31.04	20.09	41.62	30.67	56.00	46.00	-14.38	-15.33
5	5.77734	10.60	34.23	23.17	44.83	33.77	60.00	50.00	-15.17	-16.23
6	7.38672	10.64	27.49	16.70	38.13	27.34	60.00	50.00	-21.87	-22.66

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

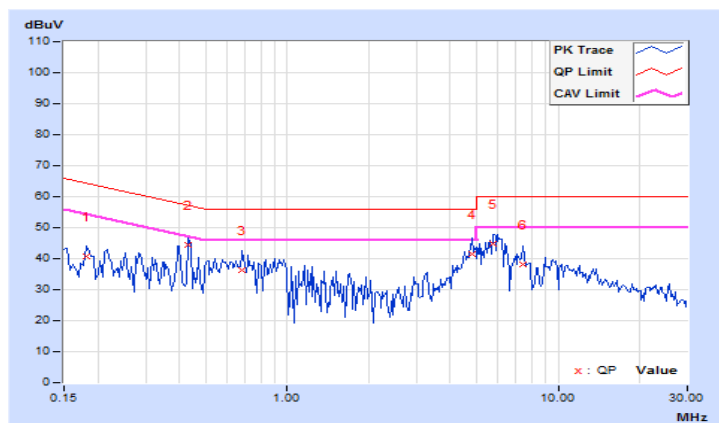


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	10.16	45.00	30.26	55.16	40.42	65.79
2	0.16526	10.16	43.74	29.05	53.90	39.21	65.20	55.20	-11.30	-15.99
3	0.18122	10.16	41.73	27.11	51.89	37.27	64.43	54.43	-12.54	-17.16
4	0.49799	10.20	25.77	14.28	35.97	24.48	56.03	46.03	-20.06	-21.55
5	1.53805	10.21	20.64	8.84	30.85	19.05	56.00	46.00	-25.15	-26.95
6	3.24281	10.31	21.39	9.46	31.70	19.77	56.00	46.00	-24.30	-26.23

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

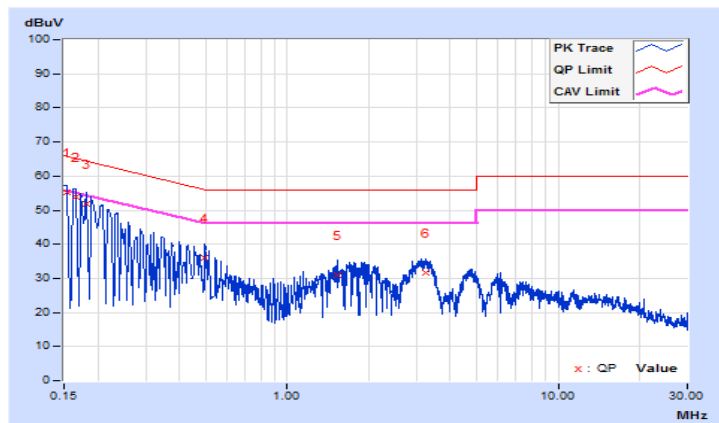


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16569	10.15	43.05	28.76	53.20	38.91	65.17
2	0.37678	10.19	28.00	16.98	38.19	27.17	58.35	48.35	-20.16	-21.18
3	0.50581	10.20	26.81	20.74	37.01	30.94	56.00	46.00	-18.99	-15.06
4	1.05346	10.20	18.75	13.96	28.95	24.16	56.00	46.00	-27.05	-21.84
5	3.43831	10.31	16.56	9.28	26.87	19.59	56.00	46.00	-29.13	-26.41
6	13.86237	10.75	12.58	7.94	23.33	18.69	60.00	50.00	-36.67	-31.31

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

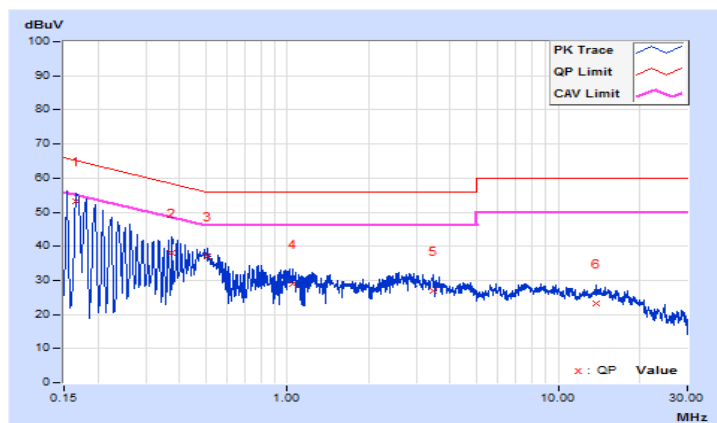


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18600	10.10	33.86	21.33	43.96	31.43	64.21
2	0.47559	10.12	32.75	27.30	42.87	37.42	56.42	46.42	-13.55	-9.00
3	1.08600	10.15	22.25	18.58	32.40	28.73	56.00	46.00	-23.60	-17.27
4	3.57800	10.26	18.16	11.82	28.42	22.08	56.00	46.00	-27.58	-23.92
5	5.53400	10.37	16.59	10.44	26.96	20.81	60.00	50.00	-33.04	-29.19
6	12.15008	10.75	16.95	11.73	27.70	22.48	60.00	50.00	-32.30	-27.52

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

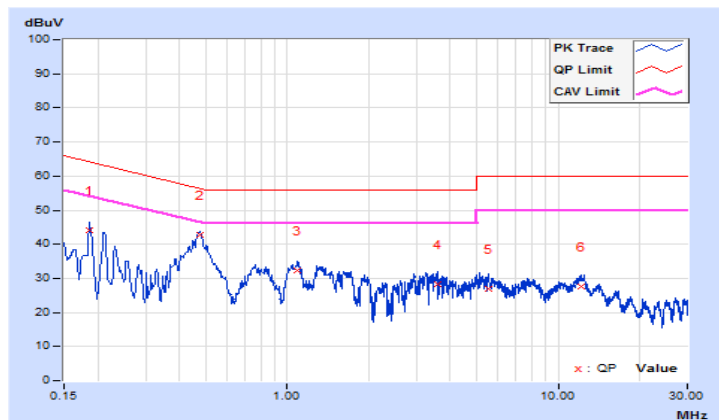


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16623	10.10	36.68	23.21	46.78	33.31	65.15
2	0.20201	10.10	30.53	18.12	40.63	28.22	63.53	53.53	-22.90	-25.31
3	0.47185	10.12	32.92	28.21	43.04	38.33	56.48	46.48	-13.44	-8.15
4	1.06600	10.13	23.37	19.95	33.50	30.08	56.00	46.00	-22.50	-15.92
5	4.14600	10.27	20.16	14.72	30.43	24.99	56.00	46.00	-25.57	-21.01
6	11.34200	10.58	16.66	11.26	27.24	21.84	60.00	50.00	-32.76	-28.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

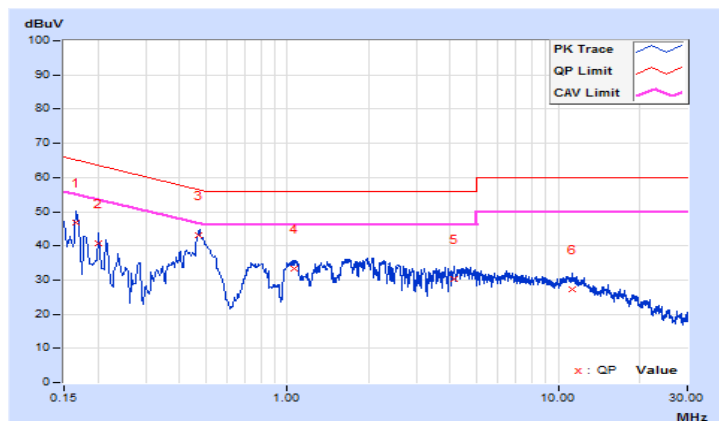


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.09	8.13	0.5	Pass
6	2437	8.10	9.11	0.5	Pass
11	2462	8.07	8.59	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.36	16.39	0.5	Pass
6	2437	15.72	16.39	0.5	Pass
11	2462	15.96	16.39	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.22	17.63	0.5	Pass
6	2437	17.60	17.63	0.5	Pass
11	2462	16.84	17.61	0.5	Pass



802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.20	35.24	0.5	Pass
6	2437	35.21	35.24	0.5	Pass
9	2452	35.21	35.12	0.5	Pass

Spectrum Plot of Worst Value



802.11b

802.11g

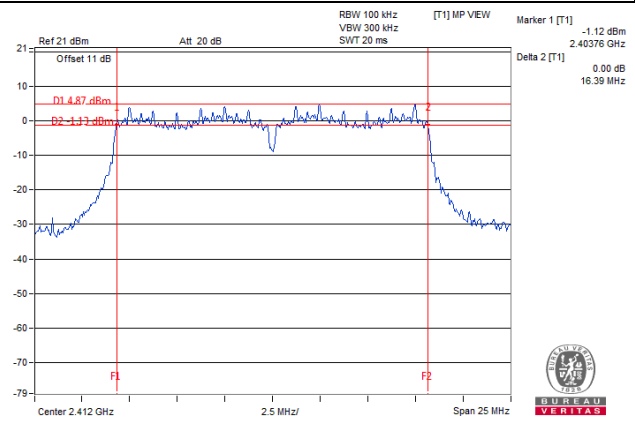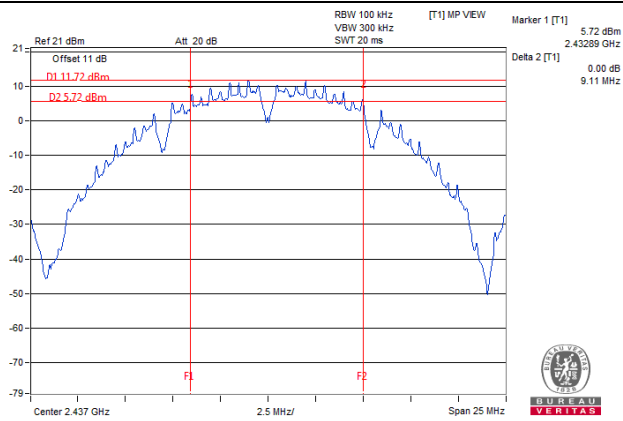

802.11n (HT20)

802.11n (HT40)

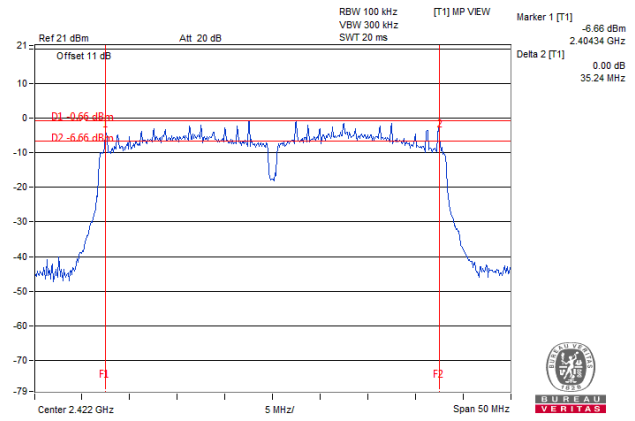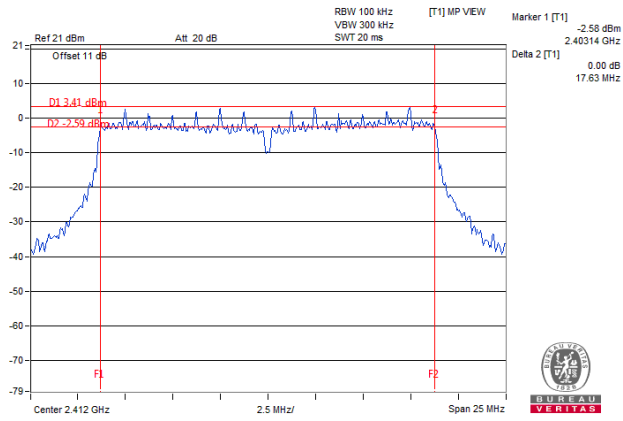

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.03	19.44	167.885	22.25	30	Pass
6	2437	19.41	19.66	179.767	22.55	30	Pass
11	2462	20.15	20.43	213.922	23.30	30	Pass

802.11g

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.27	15.92	81.448	19.11	30	Pass
6	2437	21.82	22.31	322.271	25.08	30	Pass
11	2462	16.02	15.89	78.809	18.97	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.91	14.21	57.337	17.58	30	Pass
6	2437	22.16	21.61	309.314	24.90	30	Pass
11	2462	15.03	14.71	61.422	17.88	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.15	12.83	39.841	16.00	30	Pass
6	2437	16.33	16.11	83.786	19.23	30	Pass
9	2452	13.38	13.05	41.961	16.23	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	11.90	11.20	28.642	14.57	30	Pass
6	2437	19.15	18.60	154.525	21.89	30	Pass
11	2462	12.02	11.70	30.690	14.87	30	Pass

Note: Beamforming gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2\ \text{dBi} + 10 \log(2/1) = 5.21\ \text{dBi} < 6\ \text{dBi}$, so the limit no need to be reduced.

802.11n (HT40)

Chan.	Freq. (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	10.14	9.82	19.907	12.99	30	Pass
6	2437	13.32	13.10	41.879	16.22	30	Pass
9	2452	10.37	10.04	20.989	13.22	30	Pass


Note: Beamforming gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2\ \text{dBi} + 10 \log(2/1) = 5.21\ \text{dBi} < 6\ \text{dBi}$, so the limit no need to be reduced.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For duty cycle $\geq 98\%$

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set VBW $\geq 3 \times \text{RBW}$.
- e. Detector = power averaging (RMS) or sample detector (when RMS not available).
- f. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g. Sweep time = auto couple.
- h. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i. Use the peak marker function to determine the maximum amplitude level.

For duty cycle $< 98\%$

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e. Set VBW $\geq 3 \times \text{RBW}$.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h. Sweep time = auto couple.
- i. Don't use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.
- l. Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Chan.	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-9.35	3.01	-6.34	8.00	Pass
	6	2437	-7.78	3.01	-4.77	8.00	Pass
	11	2462	-6.92	3.01	-3.91	8.00	Pass
1	1	2412	-8.33	3.01	-5.32	8.00	Pass
	6	2437	-6.95	3.01	-3.94	8.00	Pass
	11	2462	-7.36	3.01	-4.35	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $G_{ANT MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2 \text{ dBi} + 10 \log(2/1) = 5.21 \text{ dBi} < 6 \text{ dBi}$, so the limit no need to be reduced.

802.11g

TX chain	Chan.	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-14.52	3.01	0.21	-11.30	8.00	Pass
	6	2437	-8.62	3.01	0.21	-5.40	8.00	Pass
	11	2462	-14.62	3.01	0.21	-11.40	8.00	Pass
1	1	2412	-14.42	3.01	0.21	-11.20	8.00	Pass
	6	2437	-7.66	3.01	0.21	-4.44	8.00	Pass
	11	2462	-14.50	3.01	0.21	-11.28	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $G_{ANT MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2 \text{ dBi} + 10 \log(2/1) = 5.21 \text{ dBi} < 6 \text{ dBi}$, so the limit no need to be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-14.97	3.01	0.09	-11.87	8.00	Pass
	6	2437	-8.34	3.01	0.09	-5.24	8.00	Pass
	11	2462	-15.13	3.01	0.09	-12.03	8.00	Pass
1	1	2412	-16.00	3.01	0.09	-12.90	8.00	Pass
	6	2437	-8.65	3.01	0.09	-5.55	8.00	Pass
	11	2462	-15.11	3.01	0.09	-12.01	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2\ dBi + 10 \log(2/1) = 5.21\ dBi < 6\ dBi$, so the limit no need to be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD with Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-20.46	3.01	0.20	-17.25	8.00	Pass
	6	2437	-16.88	3.01	0.20	-13.67	8.00	Pass
	9	2452	-20.11	3.01	0.20	-16.90	8.00	Pass
1	3	2422	-19.64	3.01	0.20	-16.43	8.00	Pass
	6	2437	-17.05	3.01	0.20	-13.84	8.00	Pass
	9	2452	-19.80	3.01	0.20	-16.59	8.00	Pass



Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS}) = 2.2\ dBi + 10 \log(2/1) = 5.21\ dBi < 6\ dBi$, so the limit no need to be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11b

802.11g

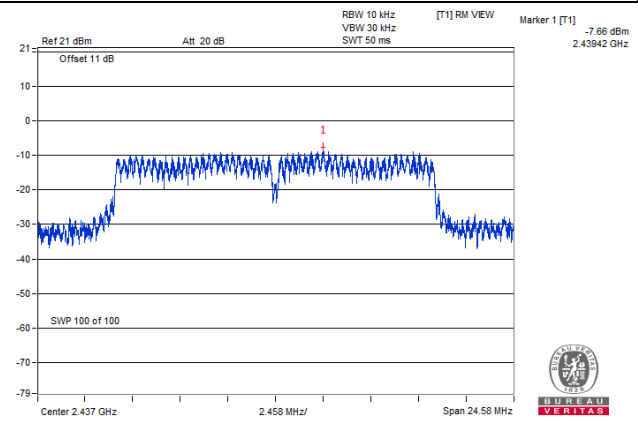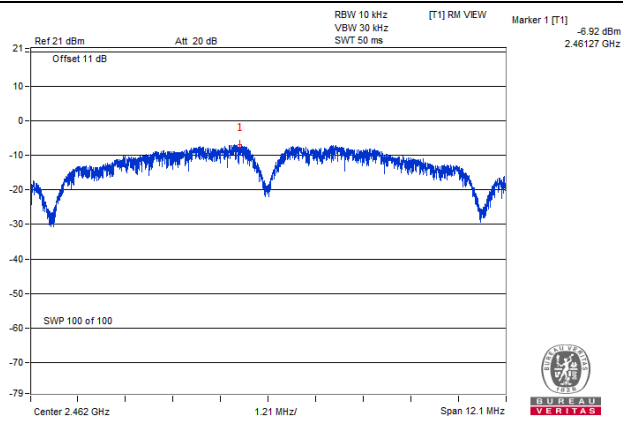

802.11n (HT20)

802.11n (HT40)

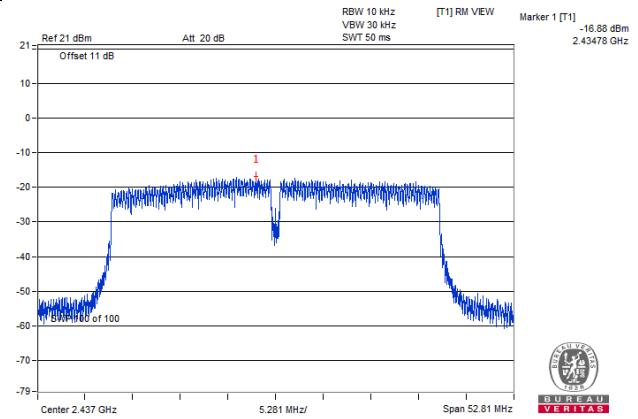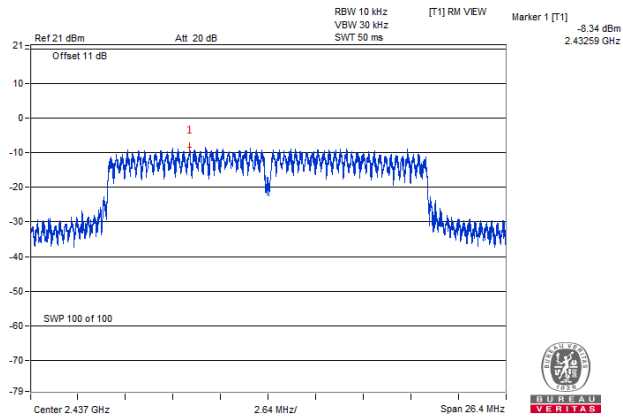


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = average.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Ensure that the number of measurement points \geq span/RBW
- According to measurement points to set differ measurement span.
- Detector = average.
- Trace Mode = max hold.
- Sweep = auto couple.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b_CHAIN 0



CH 1

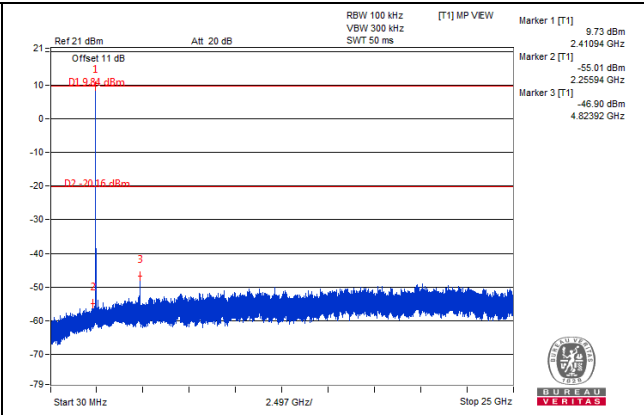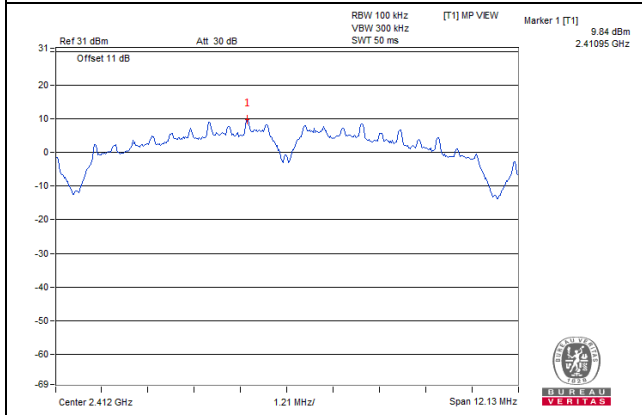


CH 6

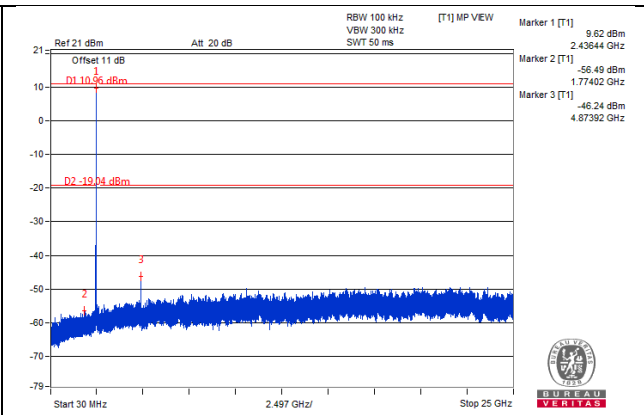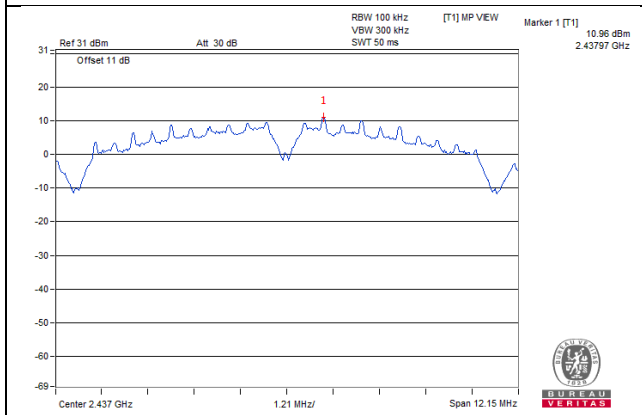


CH 11

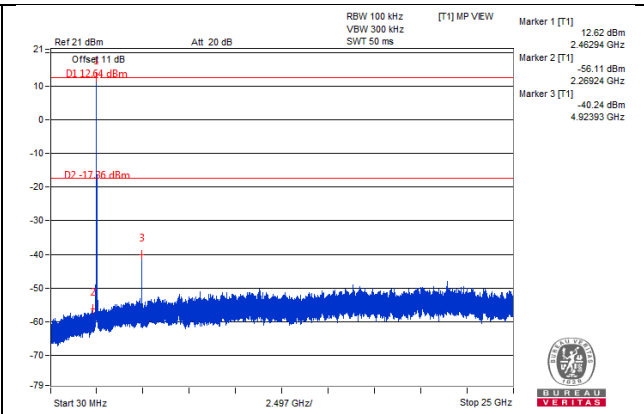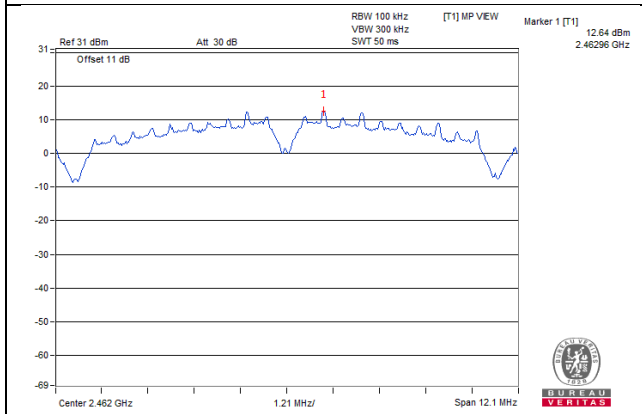

CH 1 Band edge


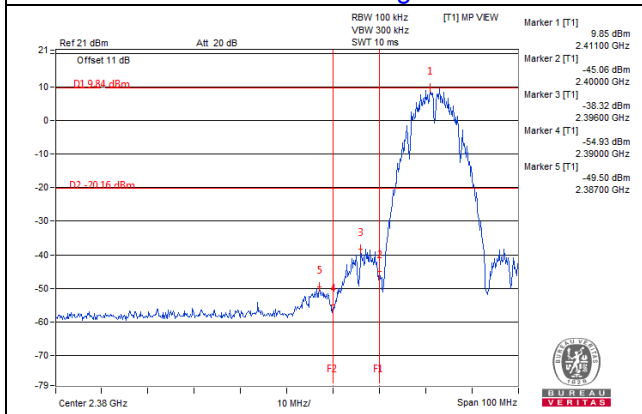


CH 11 Band edge


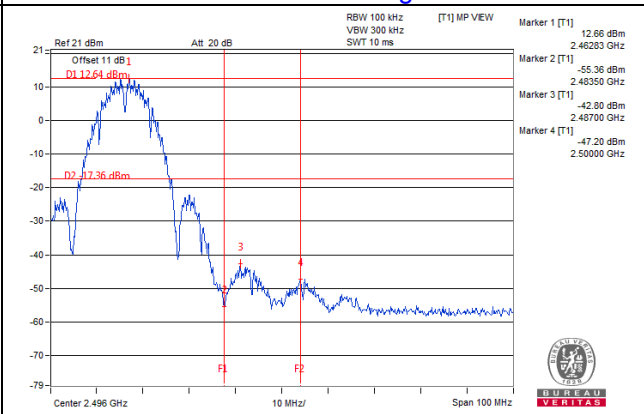


CHAIN 1



CH 1

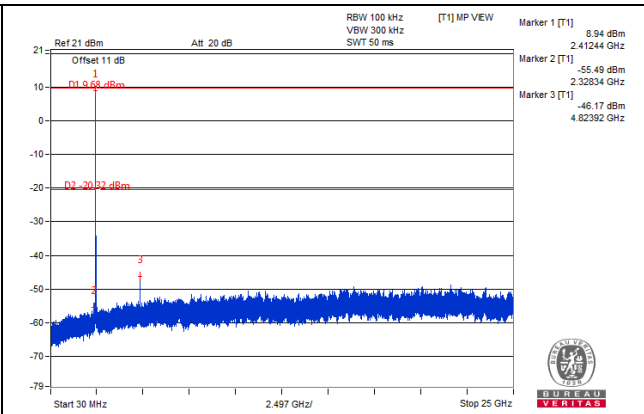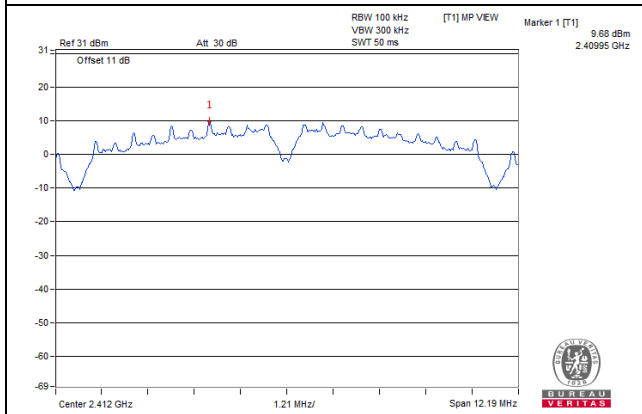


CH 6

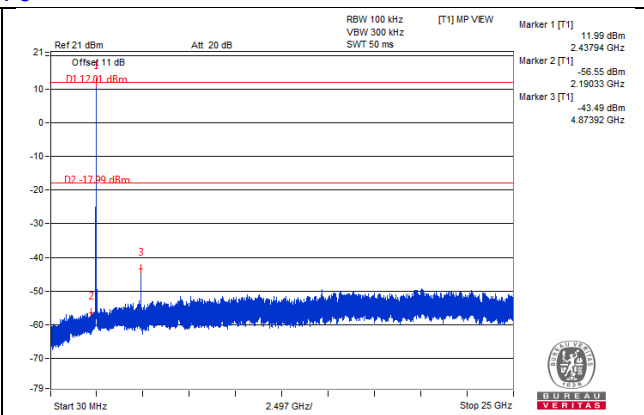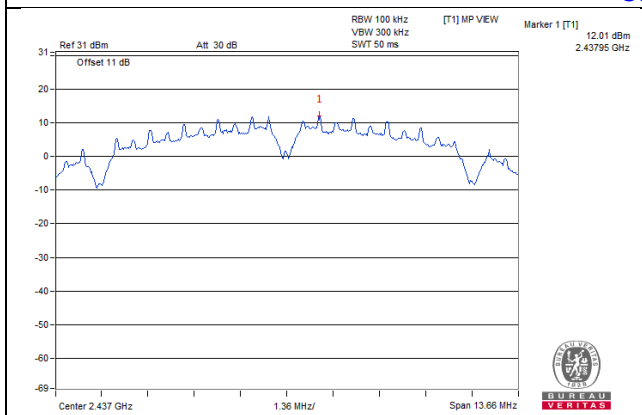


CH 11

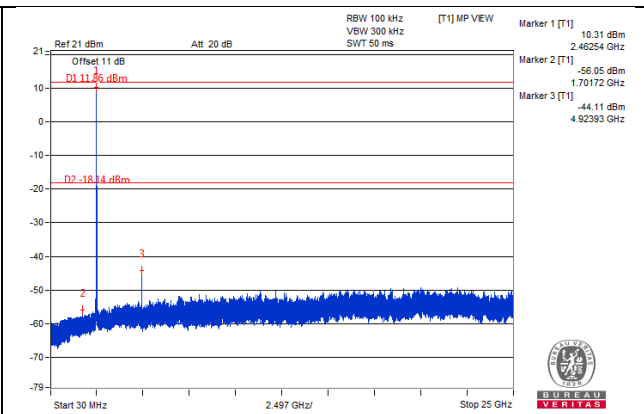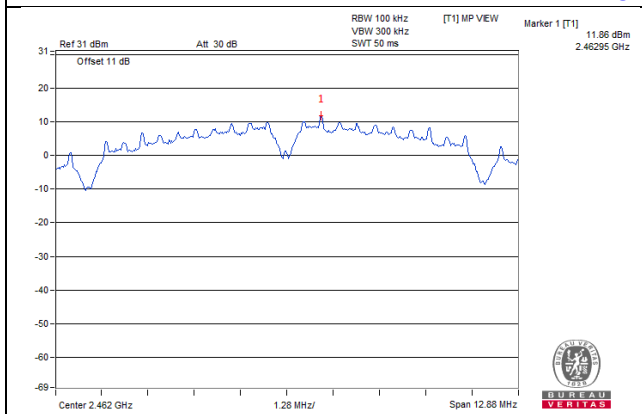

CH 11 Band edge


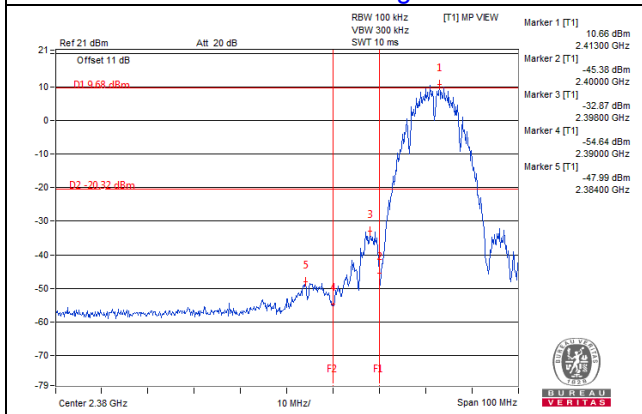


CH 11 Band edge


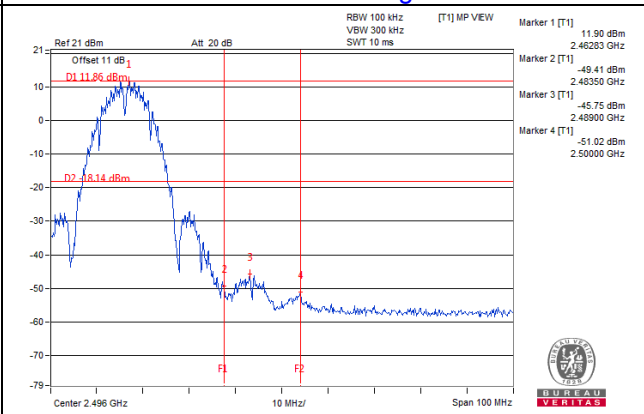


802.11g
CHAIN 0



CH 1

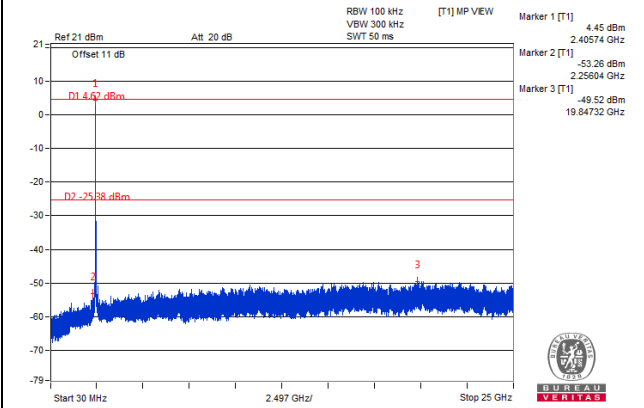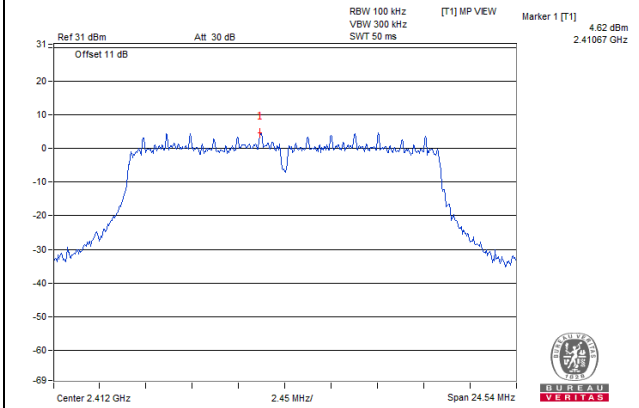


CH 6

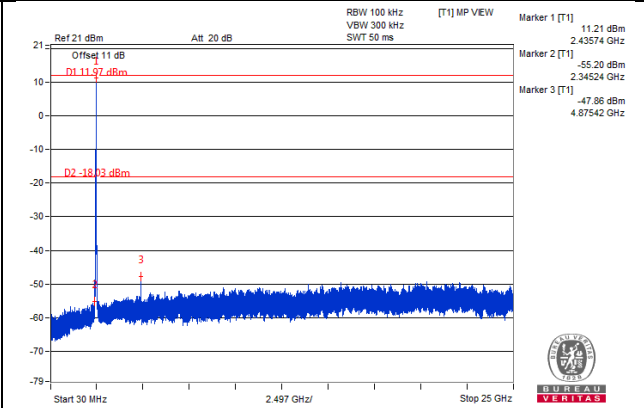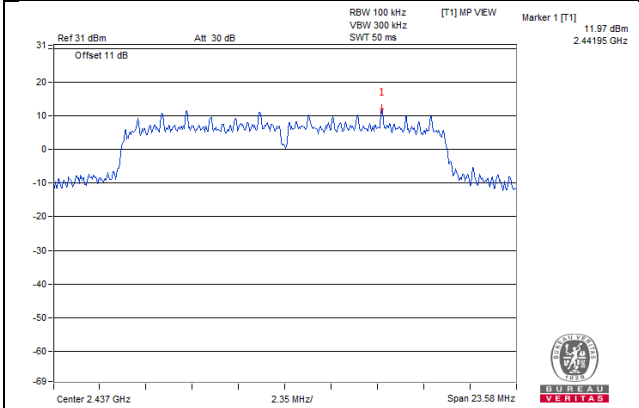


CH 11

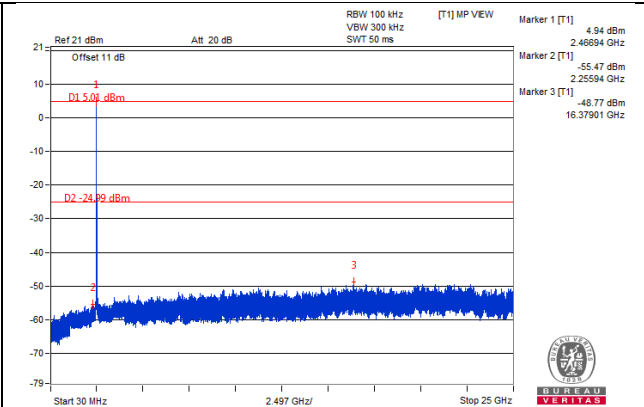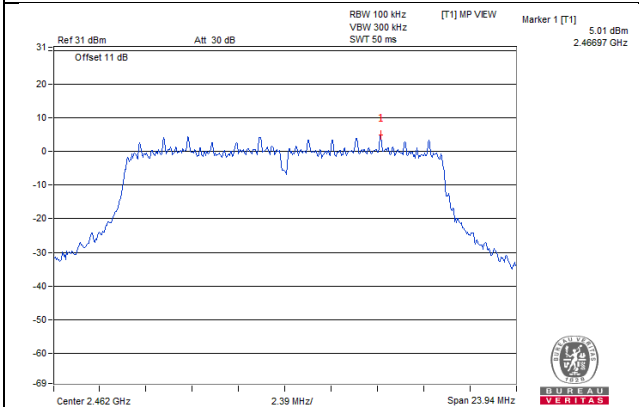

CH 1 Band edge


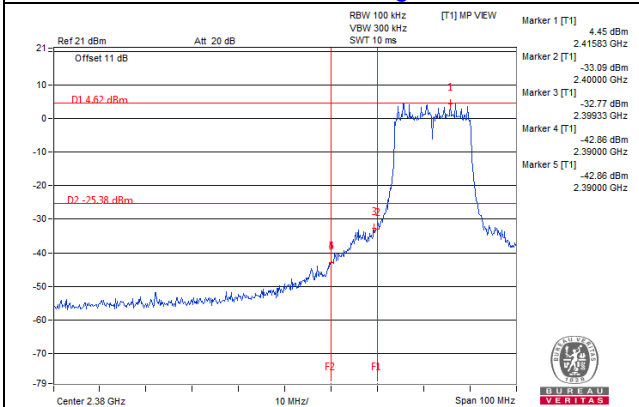


CH 11 Band edge


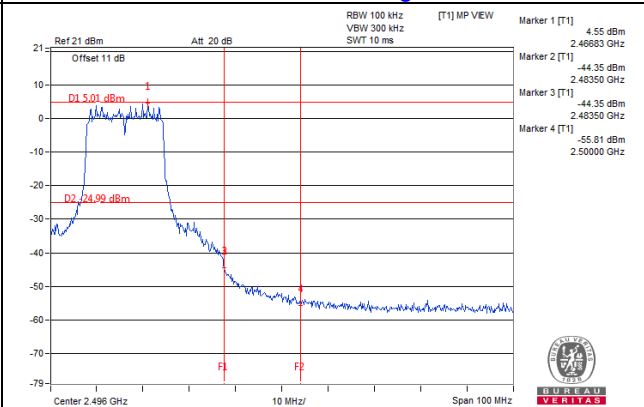


CHAIN 1



CH 1

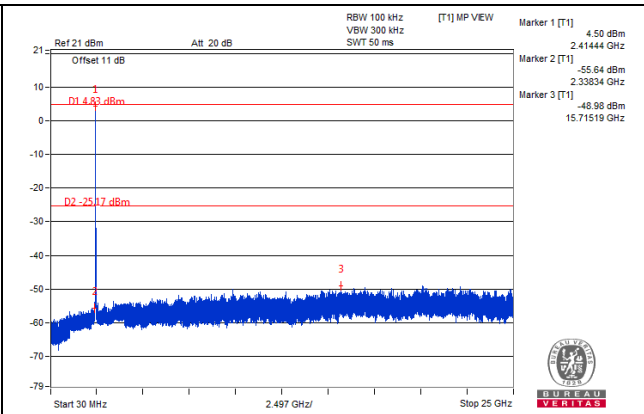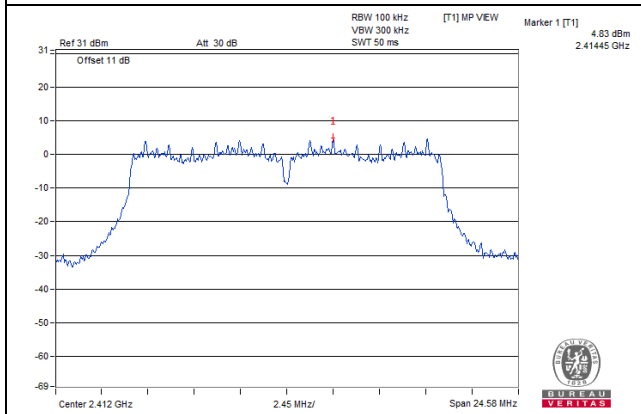


CH 6

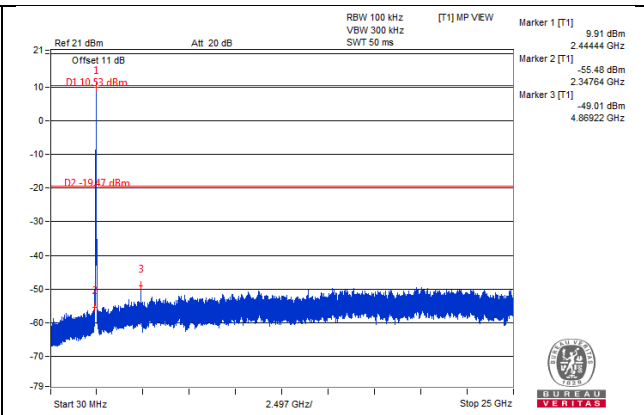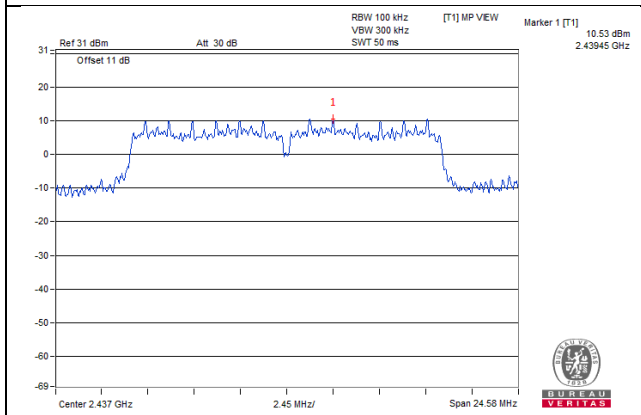


CH 11

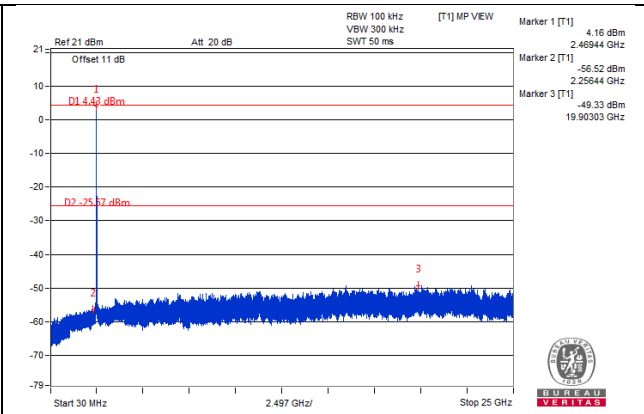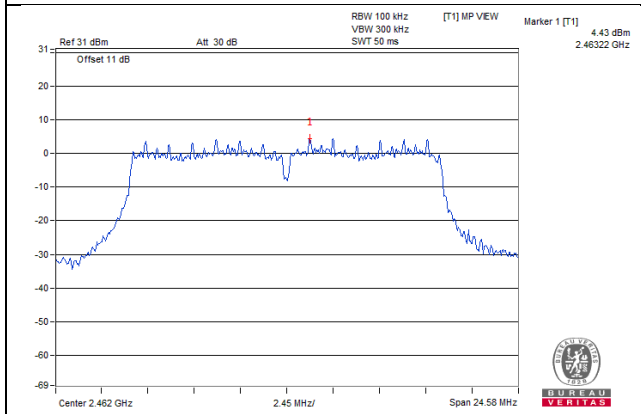

CH 1 Band edge


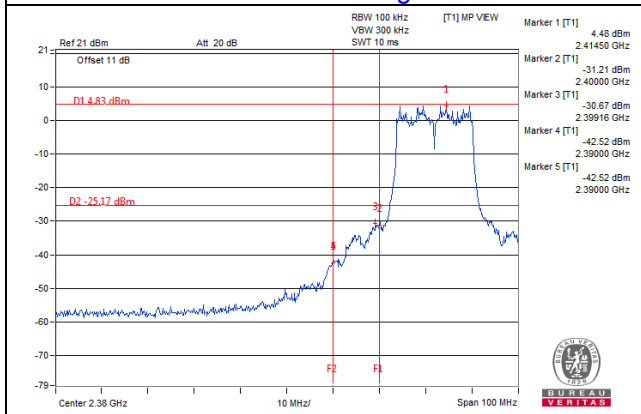


CH 11 Band edge


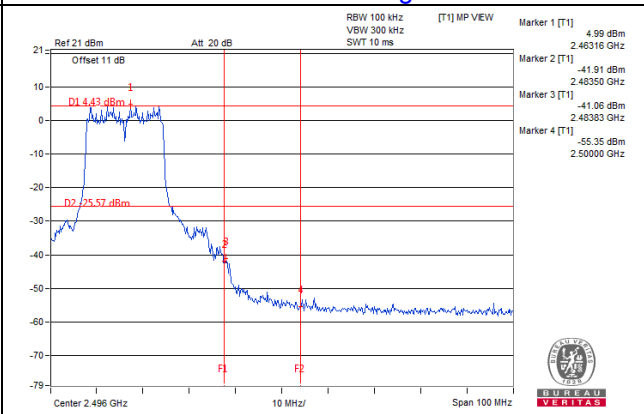


802.11n (HT20)
CHAIN 0



CH 1

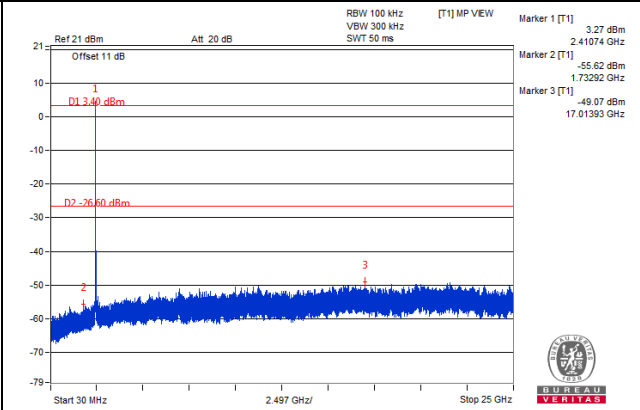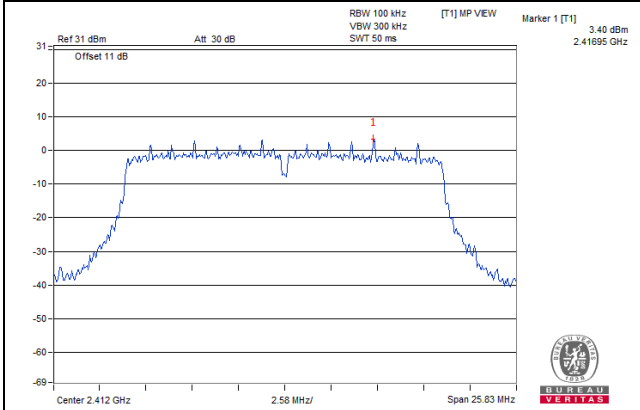


CH 6

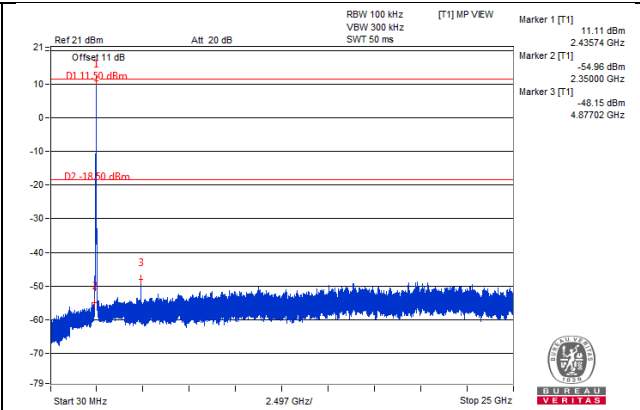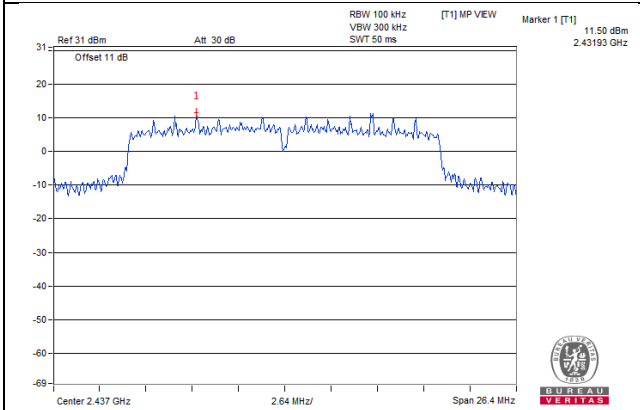


CH 11

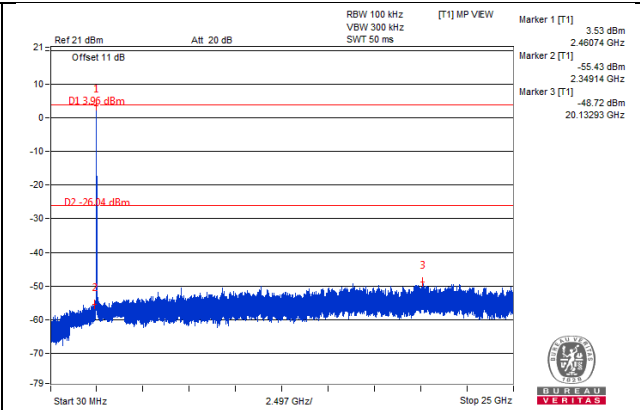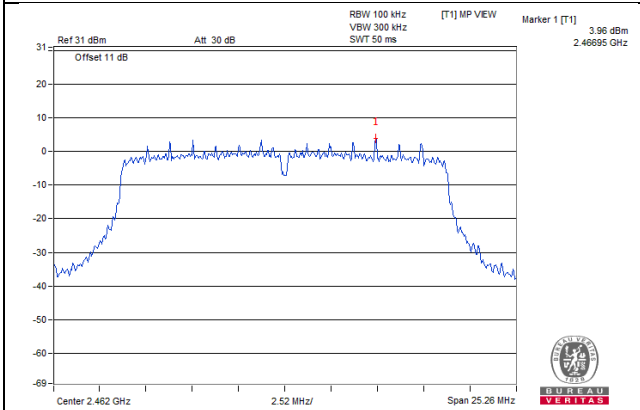

CH 1 Band edge


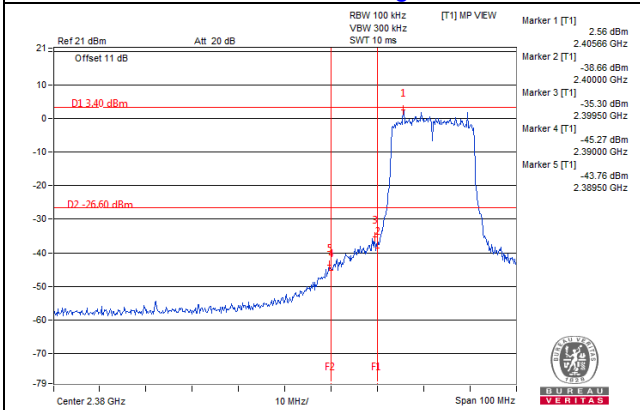


CH 11 Band edge


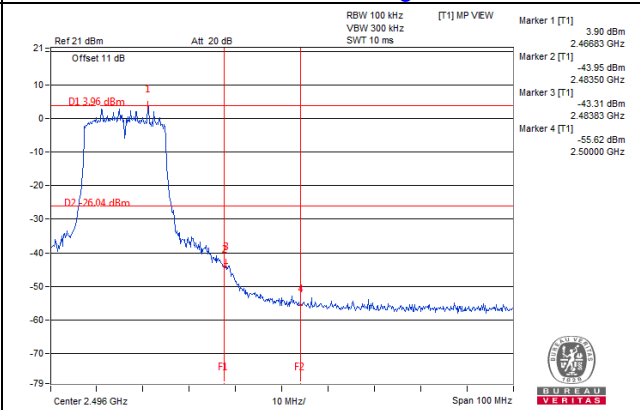


CHAIN 1



CH 1

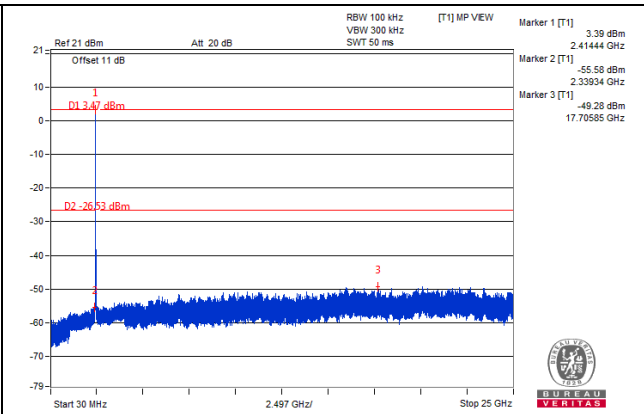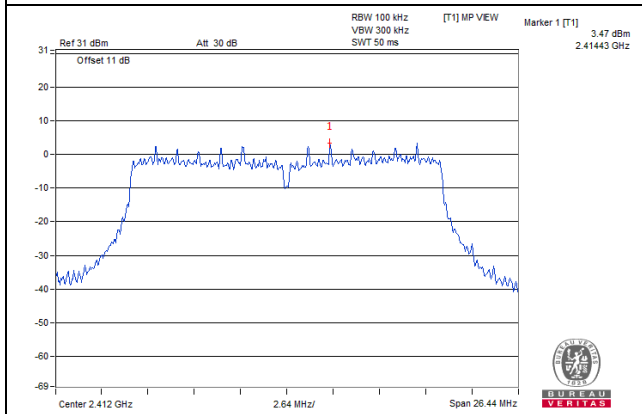


CH 6

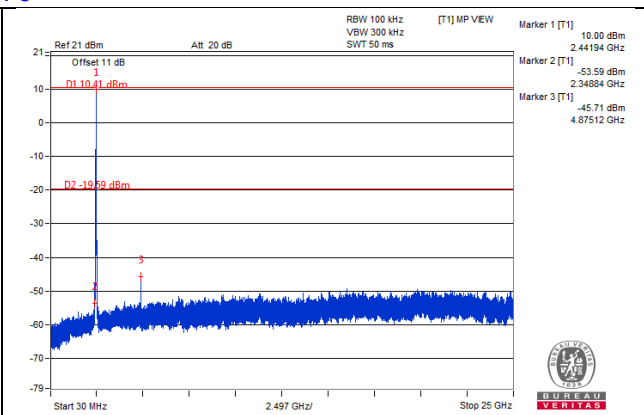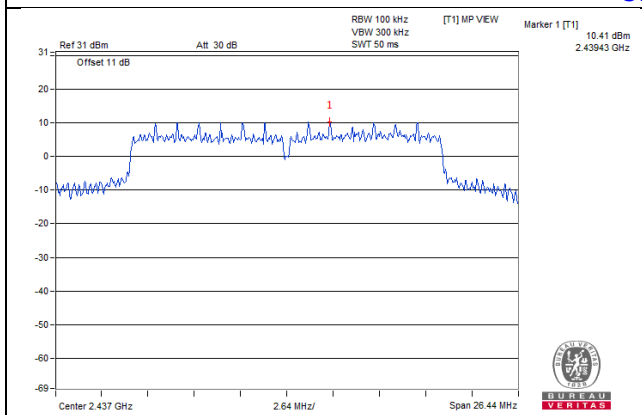


CH 11

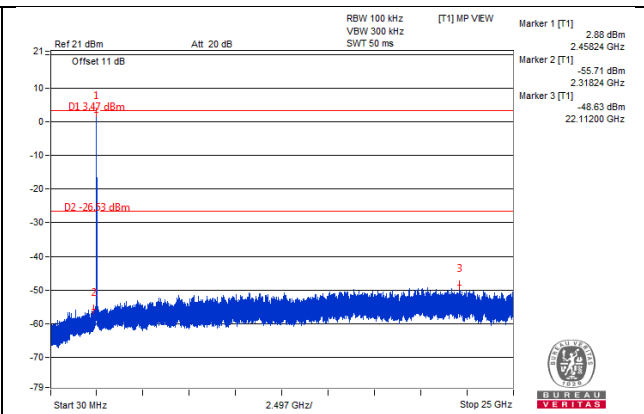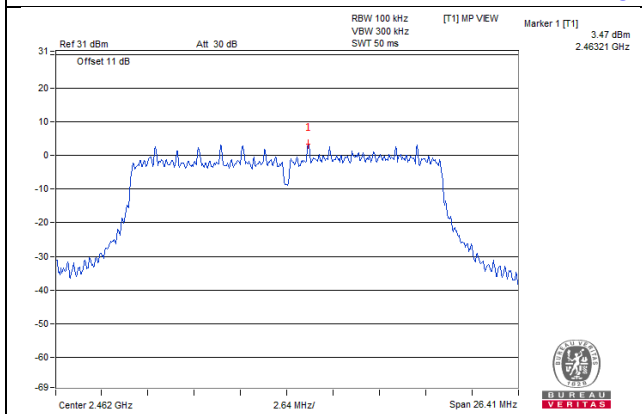

CH 1 Band edge


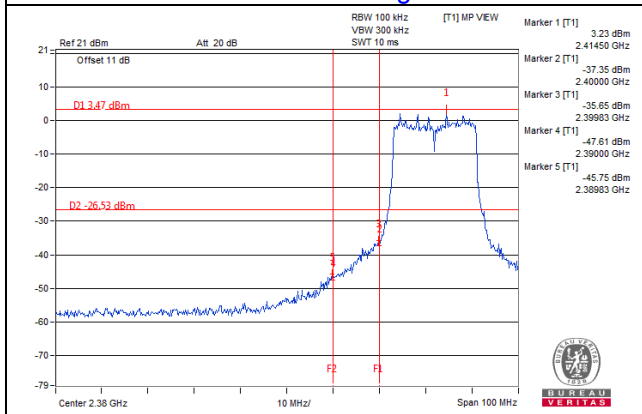


CH 11 Band edge


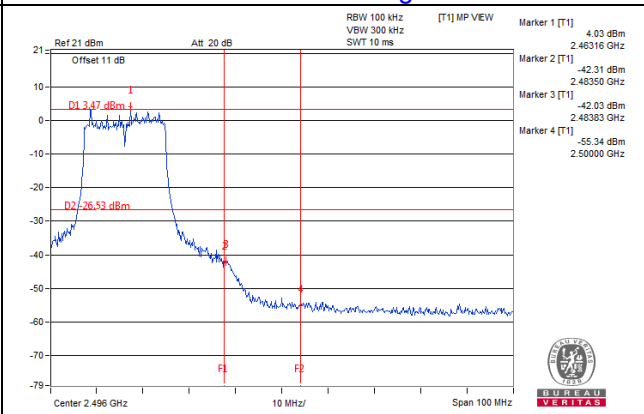


802.11n (HT40)
CHAIN 0



CH 3

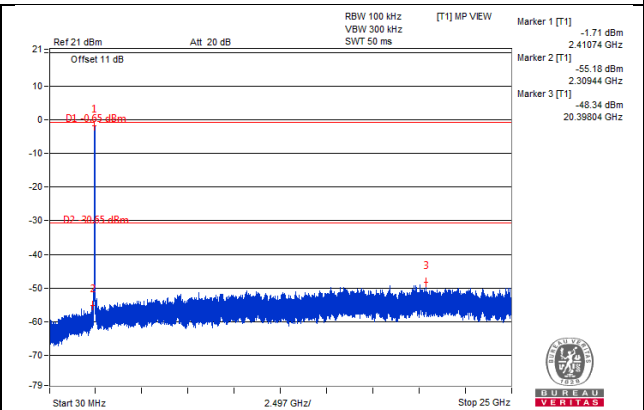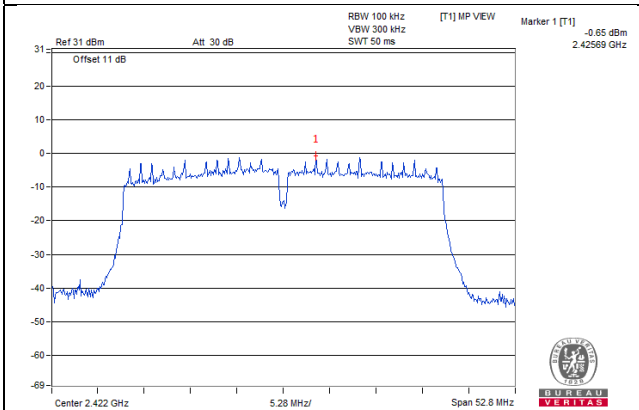


CH 6

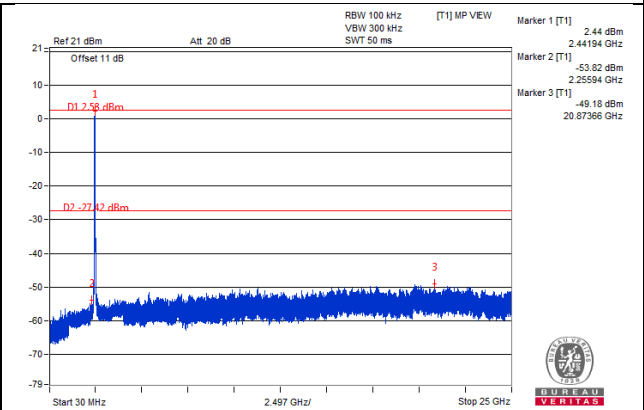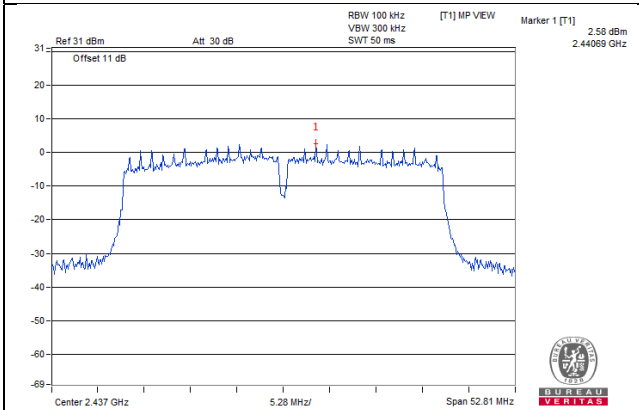


CH 9

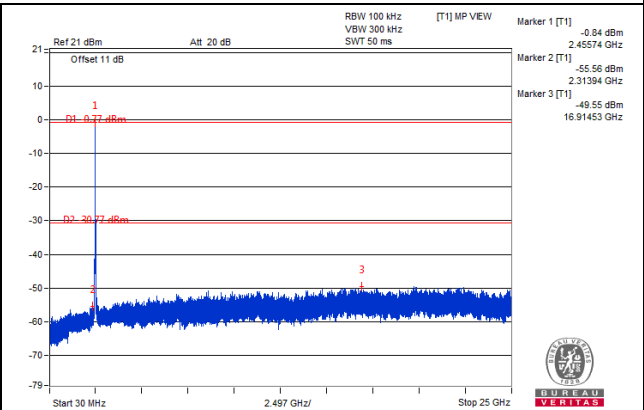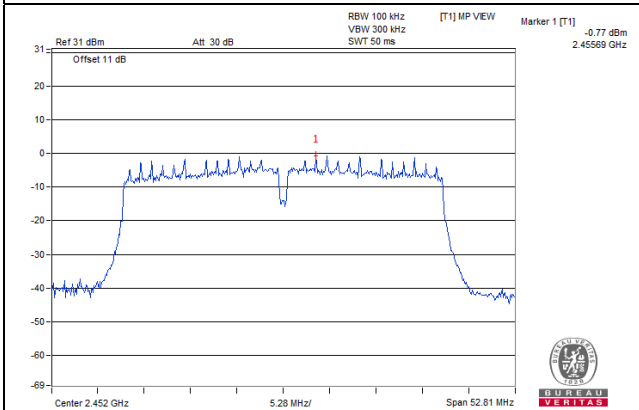

CH 3 Band edge


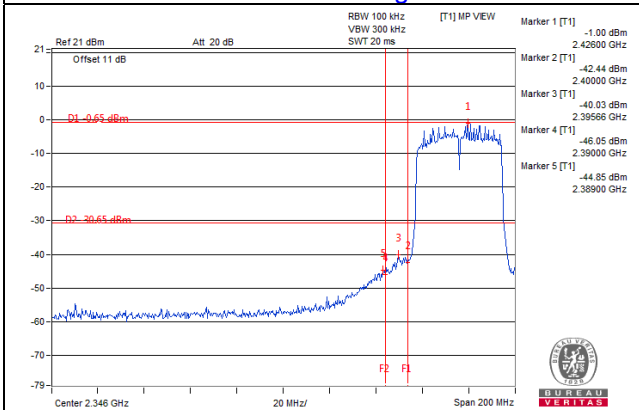


CH 9 Band edge


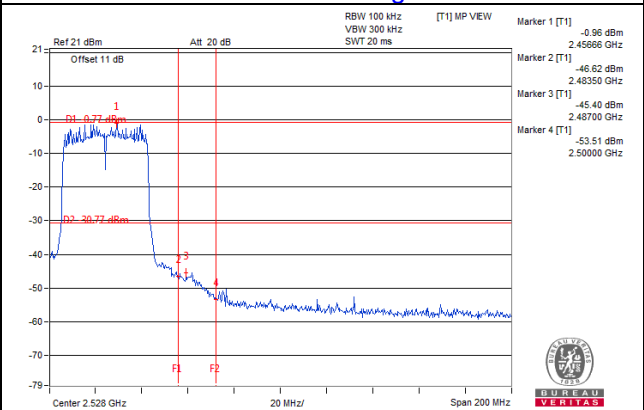


CHAIN 1



CH 3

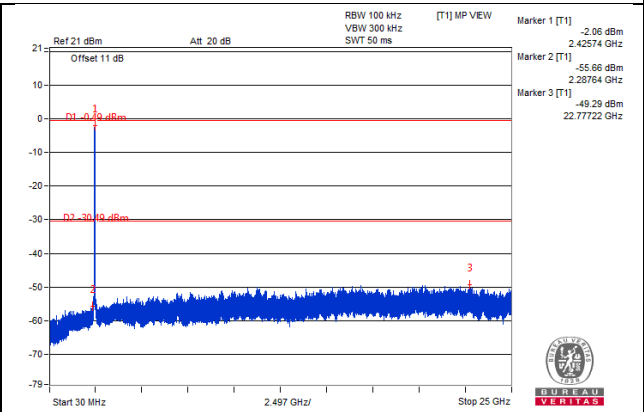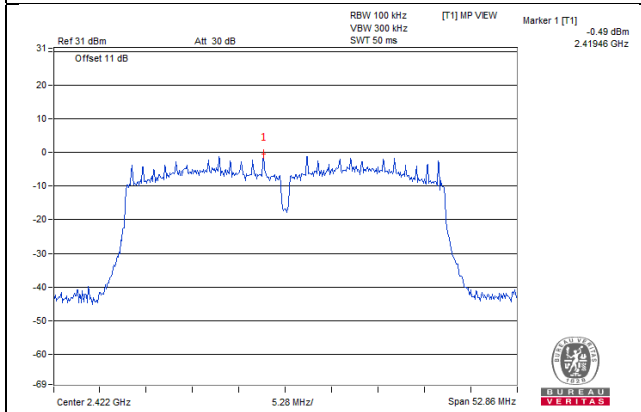


CH 6

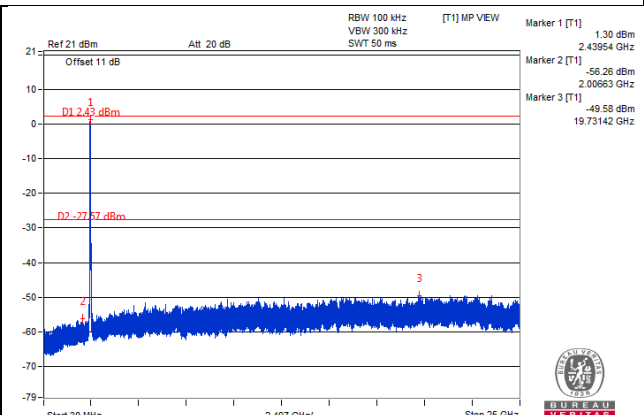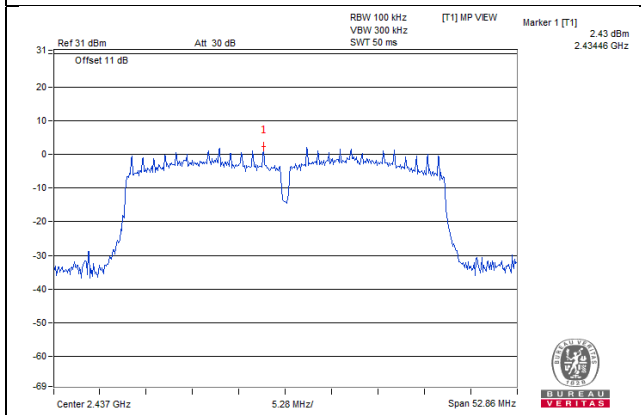


CH 9

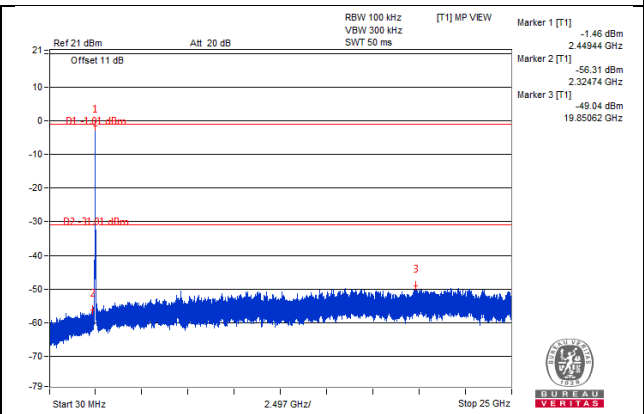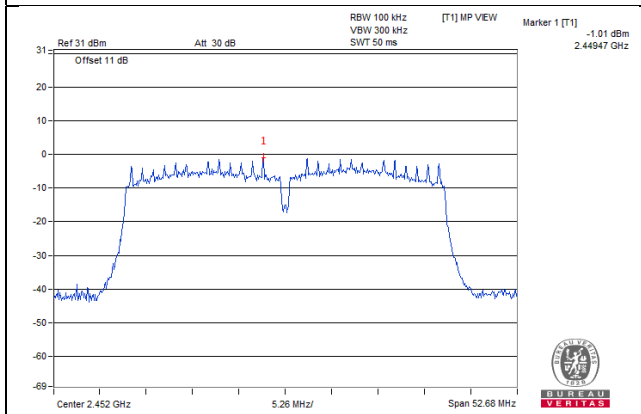

CH 3 Band edge

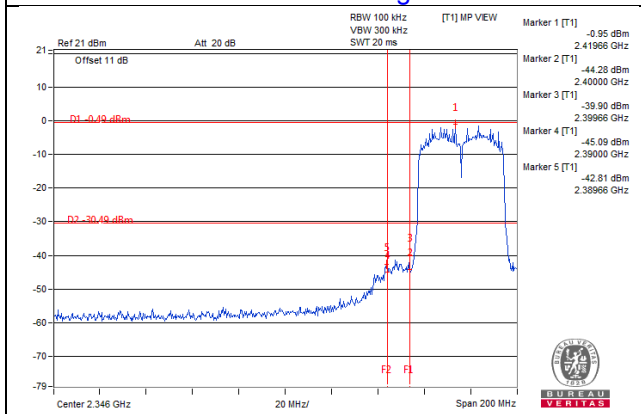

CH 9 Band edge

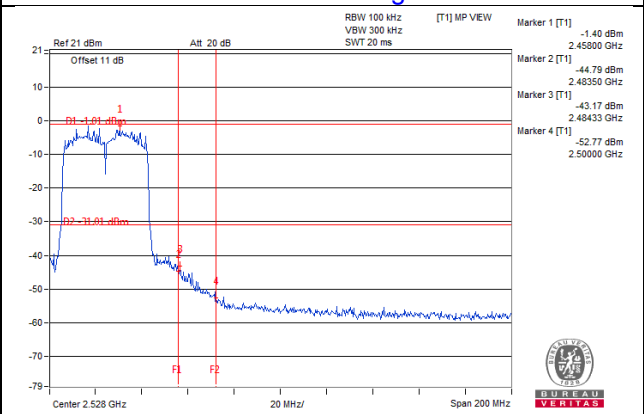

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---