

FCC Test Report

Report No.: RF181204C01-1

FCC ID: A8J-EMR3500

Test Model: EMR3500

Series Model: ESR530

Received Date: Dec. 04, 2018

Test Date: Jan. 29 ~ Feb. 20, 2019

Issued Date: Mar. 06, 2019

Applicant: EnGenius Technologies

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	14
4.1.2 Test Instruments.....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results.....	19
4.2 Conducted Emission Measurement.....	39
4.2.1 Limits of Conducted Emission Measurement.....	39
4.2.2 Test Instruments.....	39
4.2.3 Test Procedures.....	40
4.2.4 Deviation from Test Standard.....	40
4.2.5 Test Setup.....	40
4.2.6 EUT Operating Conditions.....	40
4.2.7 Test Results.....	41
4.3 Transmit Power Measurement.....	43
4.3.1 Limits of Transmit Power Measurement.....	43
4.3.2 Test Setup.....	43
4.3.3 Test Instruments.....	43
4.3.4 Test Procedure.....	43
4.3.5 Deviation from Test Standard.....	43
4.3.6 EUT Operating Conditions.....	43
4.3.7 Test Result.....	44
4.4 Occupied Bandwidth Measurement.....	46
4.4.1 Test Setup.....	46
4.4.2 Test Instruments.....	46
4.4.3 Test Procedure.....	46
4.4.4 Test Result.....	47
4.5 Peak Power Spectral Density Measurement.....	49
4.5.1 Limits of Peak Power Spectral Density Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments.....	49
4.5.4 Test Procedures.....	49
4.5.5 Deviation from Test Standard.....	50
4.5.6 EUT Operating Conditions.....	50
4.5.7 Test Results.....	51
4.6 Frequency Stability.....	56
4.6.1 Limits of Frequency Stability Measurement.....	56

4.6.2	Test Setup.....	56
4.6.3	Test Instruments	56
4.6.4	Test Procedure	56
4.6.5	Deviation from Test Standard	57
4.6.6	EUT Operating Condition	57
4.6.7	Test Results	57
4.7	6dB Bandwidth Measurement.....	58
4.7.1	Limits of 6dB Bandwidth Measurement.....	58
4.7.2	Test Setup.....	58
4.7.3	Test Instruments	58
4.7.4	Test Procedure	58
4.7.5	Deviation from Test Standard	58
4.7.6	EUT Operating Condition	58
4.7.7	Test Results	59
5	Pictures of Test Arrangements.....	61
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	62
	Appendix – Information of the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RF181204C01-1	Original release	Mar. 06, 2019

1 Certificate of Conformity

Product: AC1300 Dual-Band Mesh Router
Brand: EnGenius
Test Model: EMR3500
Series Model: ESR530
Sample Status: Engineering sample
Applicant: EnGenius Technologies
Test Date: Jan. 29 ~ Feb. 20, 2019
Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Mar. 06, 2019
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Mar. 06, 2019
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -6.45dB at 0.36875MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.1dB at 17355.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1300 Dual-Band Mesh Router
Brand	EnGenius
Test Model	EMR3500
Series Model	ESR530
Model Difference	Refer to note for more details
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180 ~ 5240MHz: 157.761mW 5745 ~ 5825MHz: 347.506mW Beamforming Mode: 5180 ~ 5240MHz: 74.138mW 5745 ~ 5825MHz: 173.765mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. All models are listed as below. Model EMR3500 is the representative for final test.

Brand	Model	Difference
EnGenius	EMR3500	For marketing purpose.
	ESR530	

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11a	Not Support	2TX
802.11n (HT20)	Support	2TX
802.11n (HT40)	Support	2TX
802.11ac (VHT20)	Support	2TX
802.11ac (VHT40)	Support	2TX
802.11ac (VHT80)	Support	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

3. The EUT consumes power from the following Adapter.

Adapter	
Brand	DongGuan RuiHeng Electronic Technology CO., LTD
Model	RH-120100USA
Input	100-240Vac, 50/60Hz, 0.6A
Output	12Vdc, 1A
Power Line	1.45m DC cable without core attached on adapter

4. The following antennas were provided to the EUT.

Ant. No.	1	2	3	4
Ant. Type	PIFA	PIFA	PIFA	PIFA
Ant. Connector	IPEX	IPEX	IPEX	IPEX
Frequency (MHz)	2400-2500		5150-5875	
Peak Gain (dBi)	3.1	4.7	5.5	5.5

5. 2.4GHz & 5GHz technology can transmit at same time.

6. Spurious emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	157	OFDM	6.0
-	802.11a	5745-5825	149 to 165		OFDM	6.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	157	OFDM	6.0
-	802.11a	5745-5825	149 to 165		OFDM	6.0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE\geq1G	21 deg. C, 69% RH 23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
RE<1G	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
PLC	23 deg. C, 67% RH	120Vac, 60Hz	Willy Cheng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Alan Wu

3.3 Duty Cycle of Test Signal

802.11n (HT20): Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11a, 802.11n (HT40), 802.11ac (VHT80): Duty cycle of test signal is $< 98\%$, duty factor is required.

802.11a: Duty cycle = $2.060/2.143 = 0.961$, Duty factor = $10 * \log(1/0.961) = 0.17$

802.11n (HT20): Duty cycle = $4.995/5.080 = 0.983$

802.11n (HT40): Duty cycle = $2.410/2.500 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11ac (VHT80): Duty cycle = $1.142/1.235 = 0.925$, Duty factor = $10 * \log(1/0.925) = 0.34$



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	USB Flash	HP	v250W	01	FCC DoC Approved	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	1.5	N	0	-
2.	RJ45, Cat5e	1	5	N	0	-

3.4.1 Configuration of System under Test

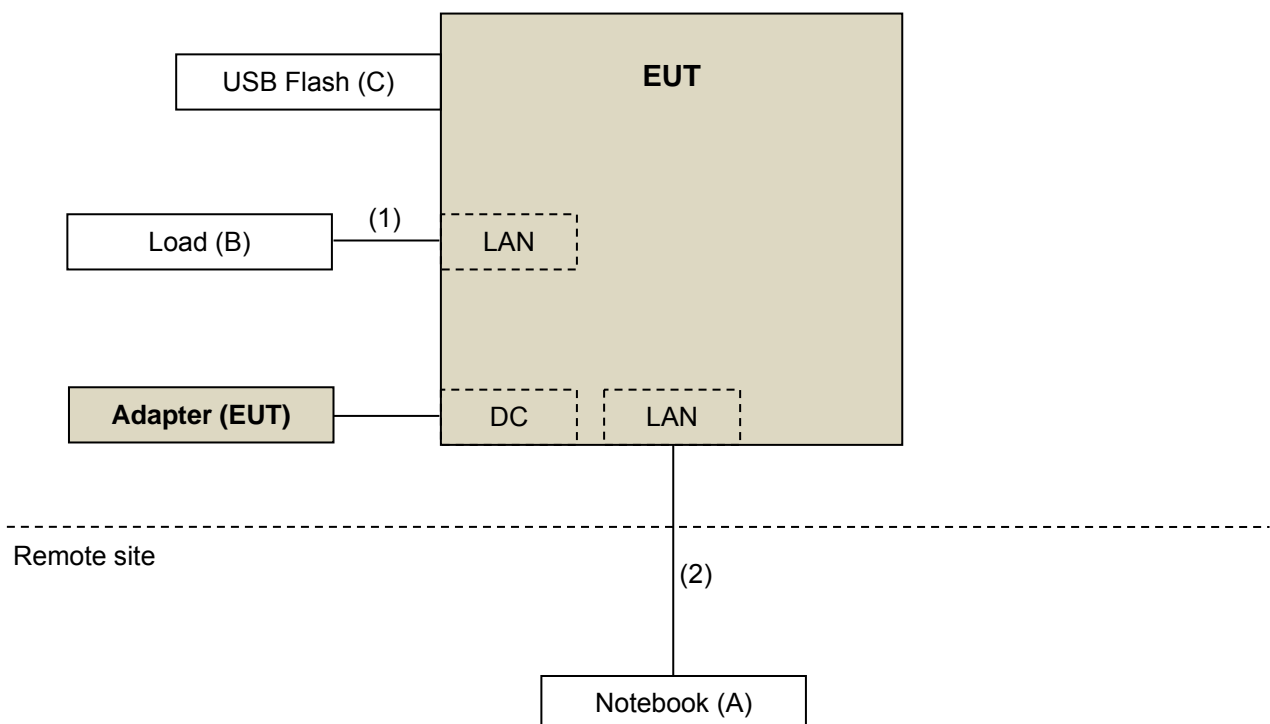

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK: 74 (dBuV/m)	AV: 54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK: 105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK: 122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 29, 2018	May 28, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna TESEQ	HLA 6121	45745	Jun. 14, 2018	Jun. 13, 2019
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2018	Aug. 20, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Apr. 03, 2018	Apr. 02, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-S M-8000	Cable-CH3-03 (309224+170907)	Aug. 21, 2018	Aug. 20, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Nov. 14, 2018	Nov. 13, 2019
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5519 0004/MY55190007/MY 55210005	Jul. 17, 2018	Jul. 16, 2019

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
 5. The IC Site Registration No. is 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

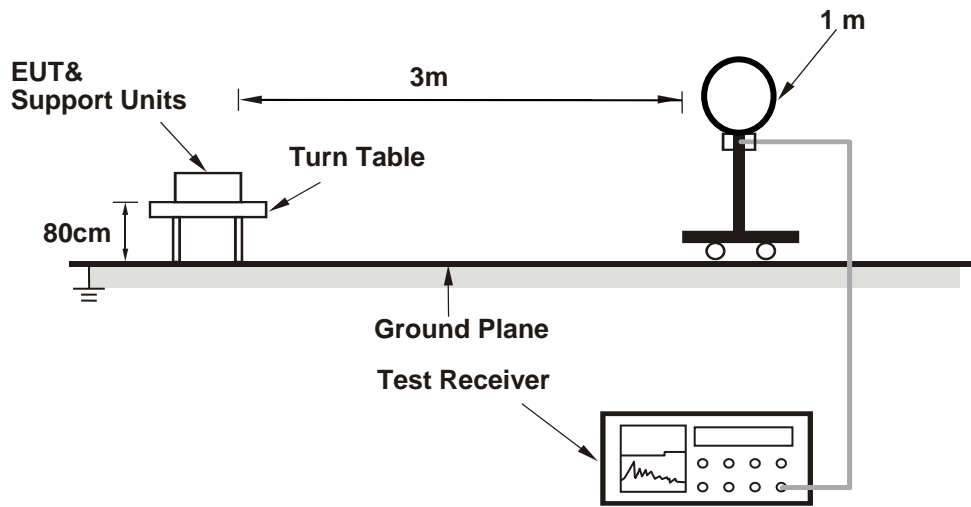

For Radiated emission 30MHz to 1GHz

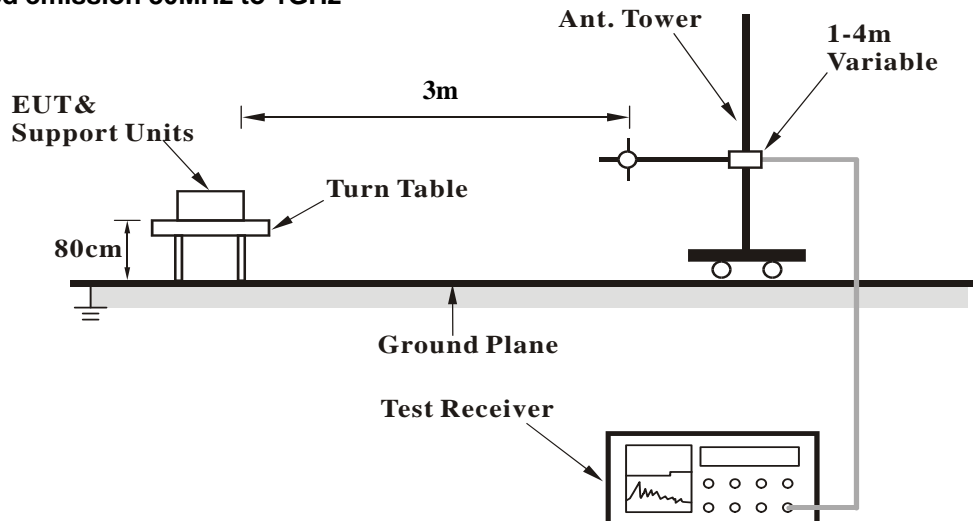

For Radiated emission above 1GHz

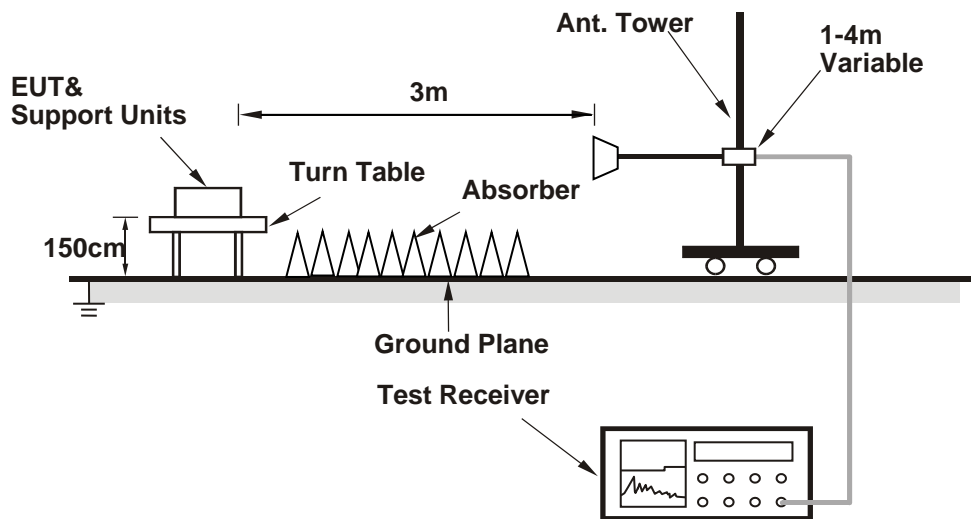

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.3 PK	74.0	-10.7	2.32 H	286	59.4	3.9
2	5150.00	47.9 AV	54.0	-6.1	2.32 H	286	44.0	3.9
3	*5180.00	110.5 PK			2.56 H	288	71.0	39.5
4	*5180.00	100.1 AV			2.56 H	288	60.6	39.5
5	#10360.00	58.0 PK	68.2	-10.2	3.18 H	239	42.2	15.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	1.05 V	276	64.3	3.9
2	5150.00	52.5 AV	54.0	-1.5	1.05 V	276	48.6	3.9
3	*5180.00	114.9 PK			1.34 V	277	75.4	39.5
4	*5180.00	104.6 AV			1.34 V	277	65.1	39.5
5	#10360.00	57.7 PK	68.2	-10.5	2.55 V	132	41.9	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.1 PK			1.30 H	290	69.6	39.5
2	*5200.00	98.5 AV			1.30 H	290	59.0	39.5
3	#10400.00	58.4 PK	68.2	-9.8	2.58 H	316	42.5	15.9
4	15600.00	60.7 PK	74.0	-13.3	1.33 H	38	44.0	16.7
5	15600.00	47.3 AV	54.0	-6.7	1.33 H	38	30.6	16.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	116.3 PK			1.18 V	280	76.8	39.5
2	*5200.00	105.2 AV			1.18 V	280	65.7	39.5
3	#10400.00	57.7 PK	68.2	-10.5	1.83 V	201	41.8	15.9
4	15600.00	66.2 PK	74.0	-7.8	1.11 V	240	49.5	16.7
5	15600.00	52.3 AV	54.0	-1.7	1.11 V	240	35.6	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.8 PK			1.08 H	53	71.5	39.3
2	*5240.00	100.1 AV			1.08 H	53	60.8	39.3
3	5350.00	57.1 PK	74.0	-16.9	1.26 H	79	53.2	3.9
4	5350.00	44.2 AV	54.0	-9.8	1.26 H	79	40.3	3.9
5	#10480.00	59.6 PK	68.2	-8.6	1.93 H	269	42.8	16.8
6	15720.00	62.0 PK	74.0	-12.0	1.37 H	36	46.0	16.0
7	15720.00	48.5 AV	54.0	-5.5	1.37 H	36	32.5	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.4 PK			1.07 V	285	77.1	39.3
2	*5240.00	105.8 AV			1.07 V	285	66.5	39.3
3	5350.00	57.1 PK	74.0	-16.9	1.24 V	273	53.2	3.9
4	5350.00	44.0 AV	54.0	-10.0	1.24 V	273	40.1	3.9
5	#10480.00	59.4 PK	68.2	-8.8	2.26 V	182	42.6	16.8
6	15720.00	66.5 PK	74.0	-7.5	2.05 V	126	50.5	16.0
7	15720.00	52.8 AV	54.0	-1.2	2.05 V	126	36.8	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.92	55.7 PK	68.2	-12.5	2.76 H	76	51.4	4.3
2	*5745.00	112.8 PK			2.76 H	76	72.7	40.1
3	*5745.00	101.9 AV			2.76 H	76	61.8	40.1
4	#5996.79	57.6 PK	68.2	-10.6	2.76 H	76	52.5	5.1
5	11490.00	58.1 PK	74.0	-15.9	2.22 H	110	40.5	17.6
6	11490.00	45.1 AV	54.0	-8.9	2.22 H	110	27.5	17.6
7	#17235.00	66.6 PK	68.2	-1.6	2.59 H	229	45.5	21.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.87	55.1 PK	68.2	-13.1	1.05 V	278	50.8	4.3
2	*5745.00	115.7 PK			1.05 V	278	75.6	40.1
3	*5745.00	104.9 AV			1.05 V	278	64.8	40.1
4	#5936.54	58.5 PK	68.2	-9.7	1.05 V	278	53.6	4.9
5	11490.00	58.3 PK	74.0	-15.7	2.78 V	104	40.7	17.6
6	11490.00	46.0 AV	54.0	-8.0	2.78 V	104	28.4	17.6
7	#17235.00	65.8 PK	68.2	-2.4	3.31 V	308	44.7	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.49	55.7 PK	68.2	-12.5	2.78 H	80	51.5	4.2
2	*5785.00	113.6 PK			2.78 H	80	73.3	40.3
3	*5785.00	102.6 AV			2.78 H	80	62.3	40.3
4	#5983.97	57.5 PK	68.2	-10.7	2.78 H	80	52.4	5.1
5	11570.00	59.2 PK	74.0	-14.8	2.63 H	133	41.7	17.5
6	11570.00	45.8 AV	54.0	-8.2	2.63 H	133	28.3	17.5
7	#17355.00	66.9 PK	68.2	-1.3	2.78 H	133	45.3	21.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.64	56.1 PK	68.2	-12.1	1.00 V	277	51.8	4.3
2	*5785.00	116.5 PK			1.00 V	277	76.2	40.3
3	*5785.00	105.3 AV			1.00 V	277	65.0	40.3
4	#5988.46	57.7 PK	68.2	-10.5	1.00 V	277	52.6	5.1
5	11570.00	59.6 PK	74.0	-14.4	2.83 V	111	42.1	17.5
6	11570.00	46.0 AV	54.0	-8.0	2.83 V	111	28.5	17.5
7	#17355.00	66.4 PK	68.2	-1.8	3.21 V	306	44.8	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.33	55.3 PK	68.2	-12.9	2.74 H	82	51.0	4.3
2	*5825.00	112.4 PK			2.74 H	82	72.0	40.4
3	*5825.00	101.7 AV			2.74 H	82	61.3	40.4
4	#5948.72	57.0 PK	68.2	-11.2	2.74 H	82	52.1	4.9
5	11650.00	59.4 PK	74.0	-14.6	2.53 H	120	42.3	17.1
6	11650.00	46.1 AV	54.0	-7.9	2.53 H	120	29.0	17.1
7	#17475.00	66.6 PK	68.2	-1.6	2.60 H	232	43.5	23.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5613.46	57.1 PK	68.2	-11.1	1.00 V	261	52.8	4.3
2	*5825.00	115.3 PK			1.00 V	261	74.9	40.4
3	*5825.00	104.5 AV			1.00 V	261	64.1	40.4
4	#5926.28	58.4 PK	68.2	-9.8	1.00 V	261	53.5	4.9
5	11650.00	60.1 PK	74.0	-13.9	3.16 V	118	43.0	17.1
6	11650.00	46.6 AV	54.0	-7.4	3.16 V	118	29.5	17.1
7	#17475.00	66.1 PK	68.2	-2.1	3.31 V	307	43.0	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	3.02 H	294	59.7	3.9
2	5150.00	48.0 AV	54.0	-6.0	3.02 H	294	44.1	3.9
3	*5180.00	108.2 PK			2.48 H	292	68.7	39.5
4	*5180.00	97.8 AV			2.48 H	292	58.3	39.5
5	#10360.00	57.3 PK	68.2	-10.9	2.69 H	277	41.5	15.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.4 PK	74.0	-5.6	1.02 V	294	64.5	3.9
2	5150.00	52.3 AV	54.0	-1.7	1.02 V	294	48.4	3.9
3	*5180.00	113.7 PK			1.15 V	275	74.2	39.5
4	*5180.00	103.3 AV			1.15 V	275	63.8	39.5
5	#10360.00	57.7 PK	68.2	-10.5	2.79 V	65	41.9	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.9 PK			2.61 H	299	70.4	39.5
2	*5200.00	99.2 AV			2.61 H	299	59.7	39.5
3	#10400.00	57.9 PK	68.2	-10.3	2.55 H	263	42.0	15.9
4	15600.00	63.3 PK	74.0	-10.7	2.91 H	18	46.6	16.7
5	15600.00	49.0 AV	54.0	-5.0	2.91 H	18	32.3	16.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.5 PK			1.16 V	286	76.0	39.5
2	*5200.00	104.7 AV			1.16 V	286	65.2	39.5
3	#10400.00	57.9 PK	68.2	-10.3	2.51 V	101	42.0	15.9
4	15600.00	66.2 PK	74.0	-7.8	1.09 V	240	49.5	16.7
5	15600.00	52.4 AV	54.0	-1.6	1.09 V	240	35.7	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.8 PK			2.75 H	290	71.5	39.3
2	*5240.00	100.3 AV			2.75 H	290	61.0	39.3
3	5350.00	56.9 PK	74.0	-17.1	2.91 H	301	53.0	3.9
4	5350.00	43.7 AV	54.0	-10.3	2.91 H	301	39.8	3.9
5	#10480.00	59.3 PK	68.2	-8.9	2.55 H	259	42.5	16.8
6	15720.00	62.8 PK	74.0	-11.2	2.99 H	22	46.8	16.0
7	15720.00	49.2 AV	54.0	-4.8	2.99 H	22	33.2	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.3 PK			1.14 V	289	77.0	39.3
2	*5240.00	105.6 AV			1.14 V	289	66.3	39.3
3	5350.00	57.1 PK	74.0	-16.9	1.21 V	293	53.2	3.9
4	5350.00	43.9 AV	54.0	-10.1	1.21 V	293	40.0	3.9
5	#10480.00	59.6 PK	68.2	-8.6	2.51 V	99	42.8	16.8
6	15720.00	66.0 PK	74.0	-8.0	1.15 V	241	50.0	16.0
7	15720.00	52.3 AV	54.0	-1.7	1.15 V	241	36.3	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.87	55.5 PK	68.2	-12.7	1.34 H	50	51.2	4.3
2	*5745.00	113.5 PK			1.34 H	50	73.4	40.1
3	*5745.00	102.5 AV			1.34 H	50	62.4	40.1
4	#5976.28	57.5 PK	68.2	-10.7	1.34 H	50	52.4	5.1
5	11490.00	60.1 PK	74.0	-13.9	2.52 H	188	42.5	17.6
6	11490.00	45.9 AV	54.0	-8.1	2.52 H	188	28.3	17.6
7	#17235.00	66.4 PK	68.2	-1.8	1.51 H	188	45.3	21.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.87	55.4 PK	68.2	-12.8	1.04 V	279	51.2	4.2
2	*5745.00	116.6 PK			1.04 V	279	76.5	40.1
3	*5745.00	105.3 AV			1.04 V	279	65.2	40.1
4	#5974.36	57.3 PK	68.2	-10.9	1.04 V	279	52.2	5.1
5	11490.00	59.7 PK	74.0	-14.3	2.58 V	231	42.1	17.6
6	11490.00	45.6 AV	54.0	-8.4	2.58 V	231	28.0	17.6
7	#17235.00	66.3 PK	68.2	-1.9	1.24 V	109	45.2	21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.28	54.4 PK	68.2	-13.8	1.28 H	51	50.1	4.3
2	*5785.00	114.4 PK			1.28 H	51	74.1	40.3
3	*5785.00	103.0 AV			1.28 H	51	62.7	40.3
4	#5951.28	57.5 PK	68.2	-10.7	1.28 H	51	52.6	4.9
5	11570.00	59.9 PK	74.0	-14.1	2.38 H	183	42.4	17.5
6	11570.00	46.4 AV	54.0	-7.6	2.38 H	183	28.9	17.5
7	#17355.00	66.7 PK	68.2	-1.5	1.56 H	189	45.1	21.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.67	54.7 PK	68.2	-13.5	1.01 V	277	50.4	4.3
2	*5785.00	116.8 PK			1.01 V	277	76.5	40.3
3	*5785.00	105.5 AV			1.01 V	277	65.2	40.3
4	#5943.59	57.9 PK	68.2	-10.3	1.01 V	277	53.0	4.9
5	11570.00	60.0 PK	74.0	-14.0	1.96 V	264	42.5	17.5
6	11570.00	46.3 AV	54.0	-7.7	1.96 V	264	28.8	17.5
7	#17355.00	67.1 PK	68.2	-1.1	1.21 V	120	45.5	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5617.31	54.9 PK	68.2	-13.3	1.15 H	60	50.6	4.3
2	*5825.00	113.8 PK			1.15 H	60	73.4	40.4
3	*5825.00	102.6 AV			1.15 H	60	62.2	40.4
4	#5948.72	57.1 PK	68.2	-11.1	1.15 H	60	52.2	4.9
5	11650.00	59.5 PK	74.0	-14.5	2.03 H	269	42.4	17.1
6	11650.00	45.9 AV	54.0	-8.1	2.03 H	269	28.8	17.1
7	#17475.00	66.5 PK	68.2	-1.7	2.75 H	283	43.4	23.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.97	54.0 PK	68.2	-14.2	1.13 V	273	49.7	4.3
2	*5825.00	115.2 PK			1.13 V	273	74.8	40.4
3	*5825.00	104.2 AV			1.13 V	273	63.8	40.4
4	#5973.72	57.1 PK	68.2	-11.1	1.13 V	273	52.0	5.1
5	11650.00	59.9 PK	74.0	-14.1	1.83 V	125	42.8	17.1
6	11650.00	46.5 AV	54.0	-7.5	1.83 V	125	29.4	17.1
7	#17475.00	65.4 PK	68.2	-2.8	1.15 V	115	42.3	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	2.89 H	298	59.9	3.9
2	5150.00	48.5 AV	54.0	-5.5	2.89 H	298	44.6	3.9
3	*5190.00	104.8 PK			2.77 H	289	65.3	39.5
4	*5190.00	94.5 AV			2.77 H	289	55.0	39.5
5	#10380.00	57.1 PK	68.2	-11.1	2.75 H	243	41.2	15.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	1.13 V	299	66.5	3.9
2	5150.00	52.3 AV	54.0	-1.7	1.13 V	299	48.4	3.9
3	*5190.00	110.3 PK			1.17 V	282	70.8	39.5
4	*5190.00	99.9 AV			1.17 V	282	60.4	39.5
5	#10380.00	57.9 PK	68.2	-10.3	2.29 V	111	42.0	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	108.6 PK			2.73 H	295	69.3	39.3
2	*5230.00	97.8 AV			2.73 H	295	58.5	39.3
3	5350.00	56.8 PK	74.0	-17.2	2.88 H	310	52.9	3.9
4	5350.00	43.7 AV	54.0	-10.3	2.88 H	310	39.8	3.9
5	#10460.00	58.7 PK	68.2	-9.5	2.77 H	269	42.1	16.6
6	15690.00	62.9 PK	74.0	-11.1	2.98 H	19	46.8	16.1
7	15690.00	49.1 AV	54.0	-4.9	2.98 H	19	33.0	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	114.0 PK			1.24 V	286	74.7	39.3
2	*5230.00	103.4 AV			1.24 V	286	64.1	39.3
3	5350.00	57.1 PK	74.0	-16.9	1.31 V	299	53.2	3.9
4	5350.00	43.9 AV	54.0	-10.1	1.31 V	299	40.0	3.9
5	#10460.00	59.1 PK	68.2	-9.1	2.44 V	119	42.5	16.6
6	15690.00	66.1 PK	74.0	-7.9	1.18 V	241	50.0	16.1
7	15690.00	52.4 AV	54.0	-1.6	1.18 V	241	36.3	16.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.10	60.0 PK	68.2	-8.2	1.96 H	43	55.8	4.2
2	#5650.00	64.4 PK	68.2	-3.8	1.52 H	37	60.2	4.2
3	*5755.00	110.2 PK			1.96 H	43	70.1	40.1
4	*5755.00	98.6 AV			1.96 H	43	58.5	40.1
5	#5975.00	57.4 PK	68.2	-10.8	1.96 H	43	52.3	5.1
6	11510.00	60.0 PK	74.0	-14.0	2.13 H	172	42.3	17.7
7	11510.00	46.0 AV	54.0	-8.0	2.13 H	172	28.3	17.7
8	#17265.00	63.0 PK	68.2	-5.2	1.57 H	189	42.1	20.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.51	62.1 PK	68.2	-6.1	2.45 V	223	57.9	4.2
2	#5650.00	66.4 PK	68.2	-1.8	2.30 V	223	62.2	4.2
3	*5755.00	112.0 PK			2.45 V	223	71.9	40.1
4	*5755.00	101.1 AV			2.45 V	223	61.0	40.1
5	#5968.59	57.8 PK	68.2	-10.4	2.45 V	223	52.8	5.0
6	11510.00	59.5 PK	74.0	-14.5	2.15 V	183	41.8	17.7
7	11510.00	46.3 AV	54.0	-7.7	2.15 V	183	28.6	17.7
8	#17265.00	64.3 PK	68.2	-3.9	2.43 V	104	43.4	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.51	56.0 PK	68.2	-12.2	2.01 H	48	51.8	4.2
2	*5795.00	112.7 PK			2.01 H	48	72.3	40.4
3	*5795.00	101.2 AV			2.01 H	48	60.8	40.4
4	#5925.00	63.8 PK	68.2	-4.4	2.29 H	44	58.9	4.9
5	#5925.64	60.4 PK	68.2	-7.8	2.01 H	48	55.5	4.9
6	11590.00	59.8 PK	74.0	-14.2	2.23 H	139	42.3	17.5
7	11590.00	46.2 AV	54.0	-7.8	2.23 H	139	28.7	17.5
8	#17385.00	65.6 PK	68.2	-2.6	2.51 H	235	43.5	22.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.18	60.8 PK	68.2	-7.4	1.05 V	281	56.6	4.2
2	*5795.00	114.9 PK			1.05 V	281	74.5	40.4
3	*5795.00	103.7 AV			1.05 V	281	63.3	40.4
4	#5925.00	66.9 PK	68.2	-1.3	1.02 V	355	62.0	4.9
5	#5930.77	64.3 PK	68.2	-3.9	1.05 V	281	59.4	4.9
6	11590.00	59.9 PK	74.0	-14.1	1.59 V	233	42.4	17.5
7	11590.00	46.5 AV	54.0	-7.5	1.59 V	233	29.0	17.5
8	#17385.00	66.3 PK	68.2	-1.9	1.04 V	116	44.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.1 PK	74.0	-10.9	2.65 H	290	59.2	3.9
2	5150.00	46.4 AV	54.0	-7.6	2.65 H	290	42.5	3.9
3	*5210.00	99.4 PK			2.43 H	295	60.0	39.4
4	*5210.00	89.6 AV			2.43 H	295	50.2	39.4
5	5350.00	56.7 PK	74.0	-17.3	2.55 H	299	52.8	3.9
6	5350.00	43.3 AV	54.0	-10.7	2.55 H	299	39.4	3.9
7	#10420.00	57.6 PK	68.2	-10.6	2.10 H	289	41.4	16.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	1.02 V	274	65.0	3.9
2	5150.00	52.3 AV	54.0	-1.7	1.02 V	274	48.4	3.9
3	*5210.00	106.1 PK			1.07 V	282	66.7	39.4
4	*5210.00	95.6 AV			1.07 V	282	56.2	39.4
5	5350.00	57.0 PK	74.0	-17.0	1.27 V	297	53.1	3.9
6	5350.00	43.8 AV	54.0	-10.2	1.27 V	297	39.9	3.9
7	#10420.00	58.1 PK	68.2	-10.1	2.61 V	98	41.9	16.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.79	60.0 PK	68.2	-8.2	2.00 H	46	55.8	4.2
2	#5650.00	62.5 PK	68.2	-5.7	1.99 H	37	58.3	4.2
3	*5775.00	105.3 PK			2.00 H	46	65.0	40.3
4	*5775.00	94.6 AV			2.00 H	46	54.3	40.3
5	#5925.00	60.9 PK	68.2	-7.3	2.53 H	67	56.0	4.9
6	#5930.77	58.4 PK	68.2	-9.8	2.00 H	46	53.5	4.9
7	11550.00	60.1 PK	74.0	-13.9	1.03 H	289	42.5	17.6
8	11550.00	46.2 AV	54.0	-7.8	1.03 H	289	28.6	17.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.51	61.8 PK	68.2	-6.4	1.06 V	359	57.6	4.2
2	#5650.00	66.7 PK	68.2	-1.5	2.29 V	228	62.5	4.2
3	*5775.00	107.7 PK			1.06 V	359	67.4	40.3
4	*5775.00	96.8 AV			1.06 V	359	56.5	40.3
5	#5925.00	61.8 PK	68.2	-6.4	2.39 V	171	56.9	4.9
6	#5941.67	57.9 PK	68.2	-10.3	1.06 V	359	53.0	4.9
7	11550.00	59.9 PK	74.0	-14.1	2.18 V	196	42.3	17.6
8	11550.00	46.5 AV	54.0	-7.5	2.18 V	196	28.9	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency
6. " # ": The radiated frequency is out of the restricted band

Below 1GHz Worst-Case Data:


802.11a

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.7 QP	40.0	-13.3	2.00 H	289	36.8	-10.1
2	90.17	25.7 QP	43.5	-17.8	2.00 H	205	40.3	-14.6
3	166.00	27.1 QP	43.5	-16.4	1.51 H	261	36.2	-9.1
4	218.50	27.1 QP	46.0	-18.9	1.01 H	76	37.8	-10.7
5	416.81	24.7 QP	46.0	-21.3	1.51 H	215	29.9	-5.2
6	537.36	27.8 QP	46.0	-18.2	1.51 H	141	30.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report

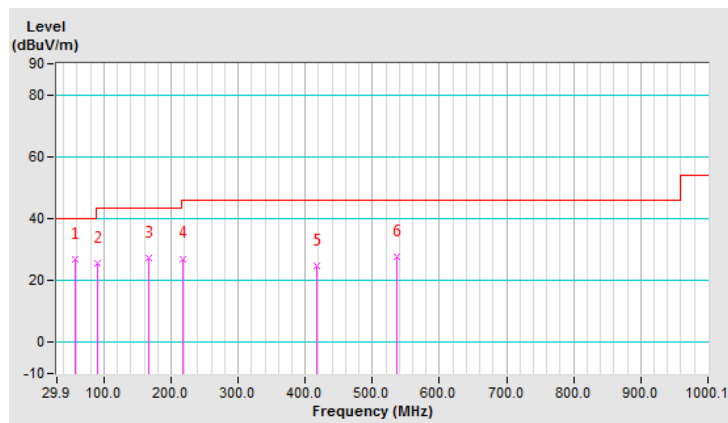


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	31.7 QP	40.0	-8.3	1.00 V	19	41.4	-9.7
2	111.56	32.6 QP	43.5	-10.9	1.00 V	22	45.0	-12.4
3	154.33	27.6 QP	43.5	-15.9	1.00 V	245	36.6	-9.0
4	381.82	25.4 QP	46.0	-20.6	1.50 V	61	31.3	-5.9
5	537.36	28.6 QP	46.0	-17.4	1.50 V	192	31.7	-3.1
6	692.90	31.4 QP	46.0	-14.6	1.50 V	66	31.2	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report

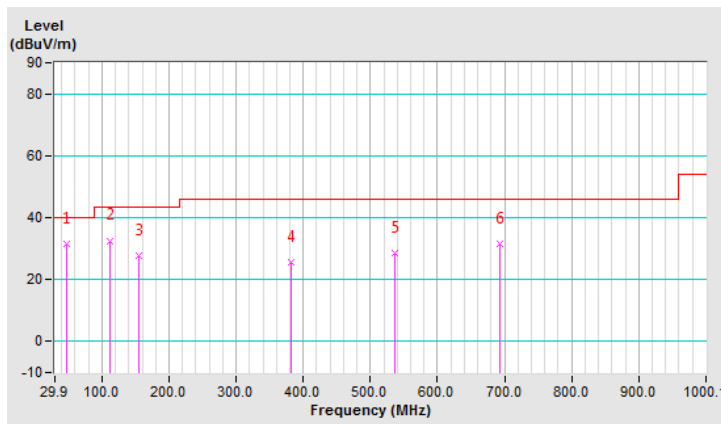

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 06, 2018	Mar. 05, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

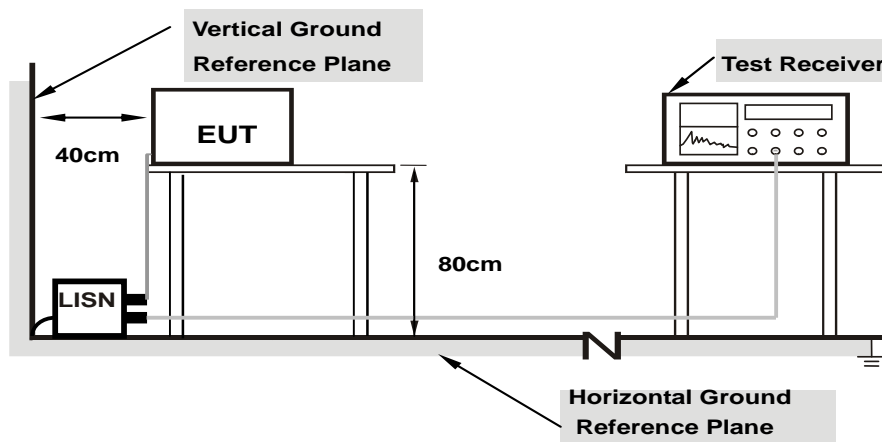

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15781	9.73	48.09	34.12	57.82	43.85	65.58
2	0.19687	9.72	43.66	29.10	53.38	38.82	63.74	53.74	-10.36	-14.92
3	0.23594	9.73	39.35	24.84	49.08	34.57	62.24	52.24	-13.16	-17.67
4	0.36875	9.75	37.18	30.32	46.93	40.07	58.53	48.53	-11.60	-8.46
5	0.66953	9.72	21.69	12.69	31.41	22.41	56.00	46.00	-24.59	-23.59
6	3.33594	9.77	18.60	11.88	28.37	21.65	56.00	46.00	-27.63	-24.35

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

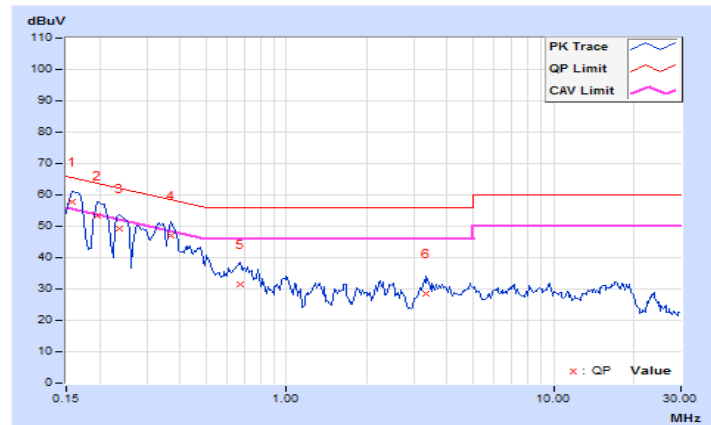


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16172	9.72	48.98	36.09	58.70	45.81	65.38
2	0.19687	9.73	43.70	28.68	53.43	38.41	63.74	53.74	-10.31	-15.33
3	0.23984	9.73	40.19	27.66	49.92	37.39	62.10	52.10	-12.18	-14.71
4	0.36875	9.75	37.30	32.33	47.05	42.08	58.53	48.53	-11.48	-6.45
5	0.67734	9.74	23.77	17.65	33.51	27.39	56.00	46.00	-22.49	-18.61
6	2.44141	9.75	23.87	16.67	33.62	26.42	56.00	46.00	-22.38	-19.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

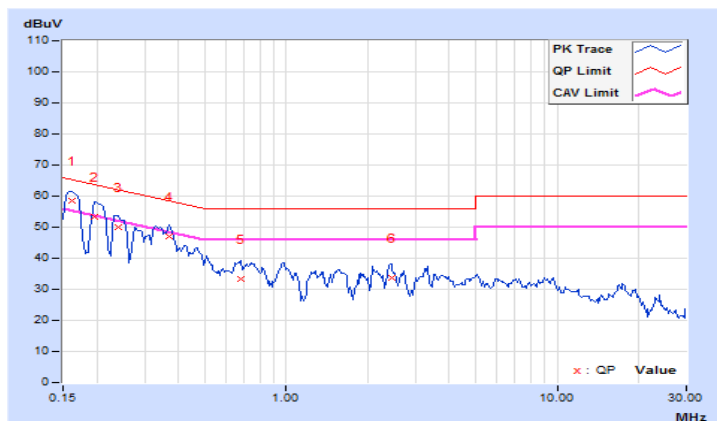

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	17.67	18.23	125.006	20.97	30.00	Pass
40	5200	18.67	19.25	157.761	21.98	30.00	Pass
48	5240	17.23	17.68	111.459	20.47	30.00	Pass
149	5745	20.05	20.56	214.921	23.32	30.00	Pass
157	5785	20.24	21.28	239.958	23.80	30.00	Pass
165	5825	19.49	20.08	190.779	22.81	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	17.16	16.97	101.774	20.08	30.00	Pass
40	5200	18.67	18.73	148.266	21.71	30.00	Pass
48	5240	17.77	17.60	117.385	20.70	30.00	Pass
149	5745	20.84	21.62	266.550	24.26	30.00	Pass
157	5785	21.67	22.61	329.283	25.18	30.00	Pass
165	5825	19.74	20.25	200.114	23.01	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	15.44	15.92	74.079	18.70	30.00	Pass
46	5230	17.80	18.26	127.244	21.05	30.00	Pass
151	5755	21.46	22.46	316.157	25.00	30.00	Pass
159	5795	21.97	22.79	347.506	25.41	30.00	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	14.86	14.78	60.681	17.83	30.00	Pass
155	5775	18.07	18.82	140.329	21.47	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	14.15	13.96	50.891	17.07	27.49	Pass
40	5200	15.66	15.72	74.138	18.70	27.49	Pass
48	5240	14.76	14.59	58.697	17.69	27.49	Pass
149	5745	17.83	18.61	133.285	21.25	27.49	Pass
157	5785	18.66	19.60	164.652	22.17	27.49	Pass
165	5825	16.73	17.24	100.064	20.00	27.49	Pass

Note: Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	12.43	12.91	37.041	15.69	27.49	Pass
46	5230	14.79	15.25	63.627	18.04	27.49	Pass
151	5755	18.45	19.45	158.089	21.99	27.49	Pass
159	5795	18.96	19.78	173.765	22.40	27.49	Pass

Note: Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.


802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	11.85	11.77	30.342	14.82	27.49	Pass
155	5775	15.06	15.81	70.170	18.46	27.49	Pass

Note: Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.92	21.36
40	5200	18.84	26.52
48	5240	18.00	18.84
149	5745	24.36	21.48
157	5785	28.80	27.00
165	5825	24.12	21.36

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.76	18.24
40	5200	19.32	21.72
48	5240	18.60	19.85
149	5745	38.76	36.84
157	5785	37.92	40.80
165	5825	27.96	28.20

802.11n (HT40)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.12	35.88
46	5230	36.84	37.08
151	5755	49.80	51.96
159	5795	51.48	51.48

802.11ac (VHT80)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	75.60
155	5775	76.32	76.08

Spectrum Plot of Worst Value


802.11a

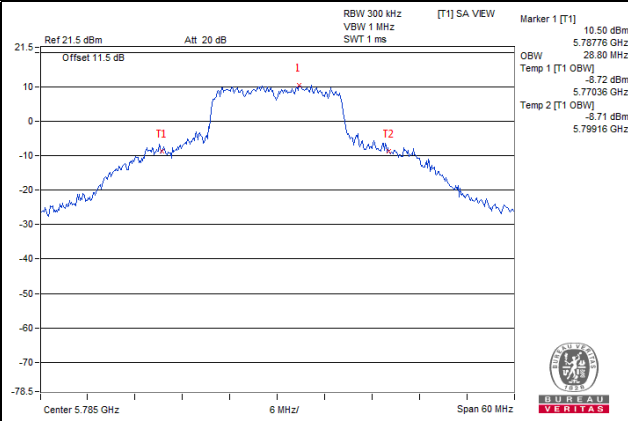


802.11n (HT20)

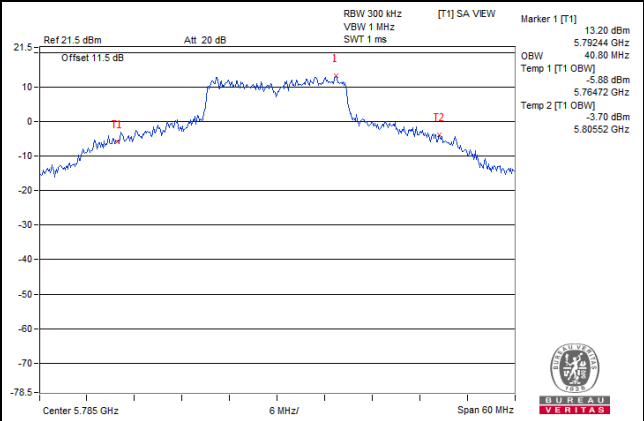

802.11n (HT40)

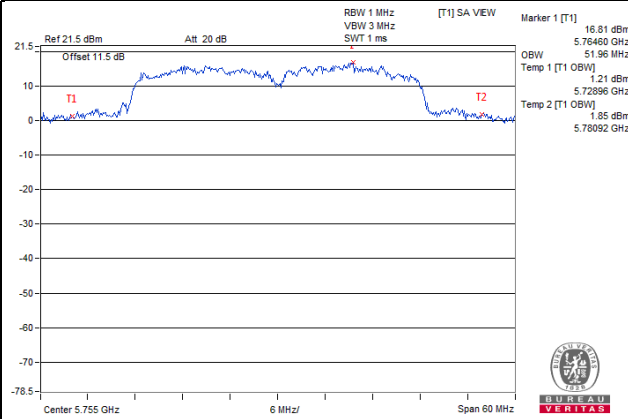

802.11ac (VHT80)

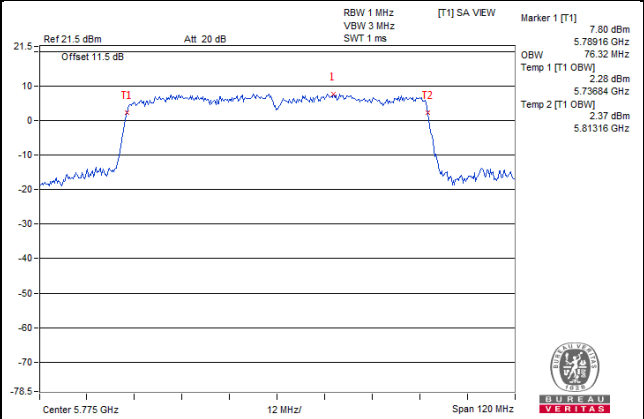


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1 band:

Duty cycle of test signal is > 98%

Using method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Duty cycle of test signal is < 98%

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

Duty cycle of test signal is > 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value

Duty cycle of test signal is < 98%

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- c. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- e. Sweep time = auto, trigger set to "free run".
- f. Trace average at least 100 traces in power averaging mode.
- g. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 band:

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	3.38	5.45	0.17	7.72	14.49	Pass
40	5200	4.07	6.28	0.17	8.49	14.49	Pass
48	5240	2.71	5.45	0.17	7.47	14.49	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.51 - 6) = 14.49\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	1.87	4.56	6.43	14.49	Pass
40	5200	3.11	5.96	7.77	14.49	Pass
48	5240	3.77	5.03	7.46	14.49	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.51 - 6) = 14.49\text{dBm}$.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	-1.84	0.05	0.16	2.38	14.49	Pass
46	5230	2.56	3.10	0.16	6.01	14.49	Pass

Note:


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.51 - 6) = 14.49\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-5.29	-3.82	0.34	-1.14	14.49	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.51 - 6) = 14.49\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

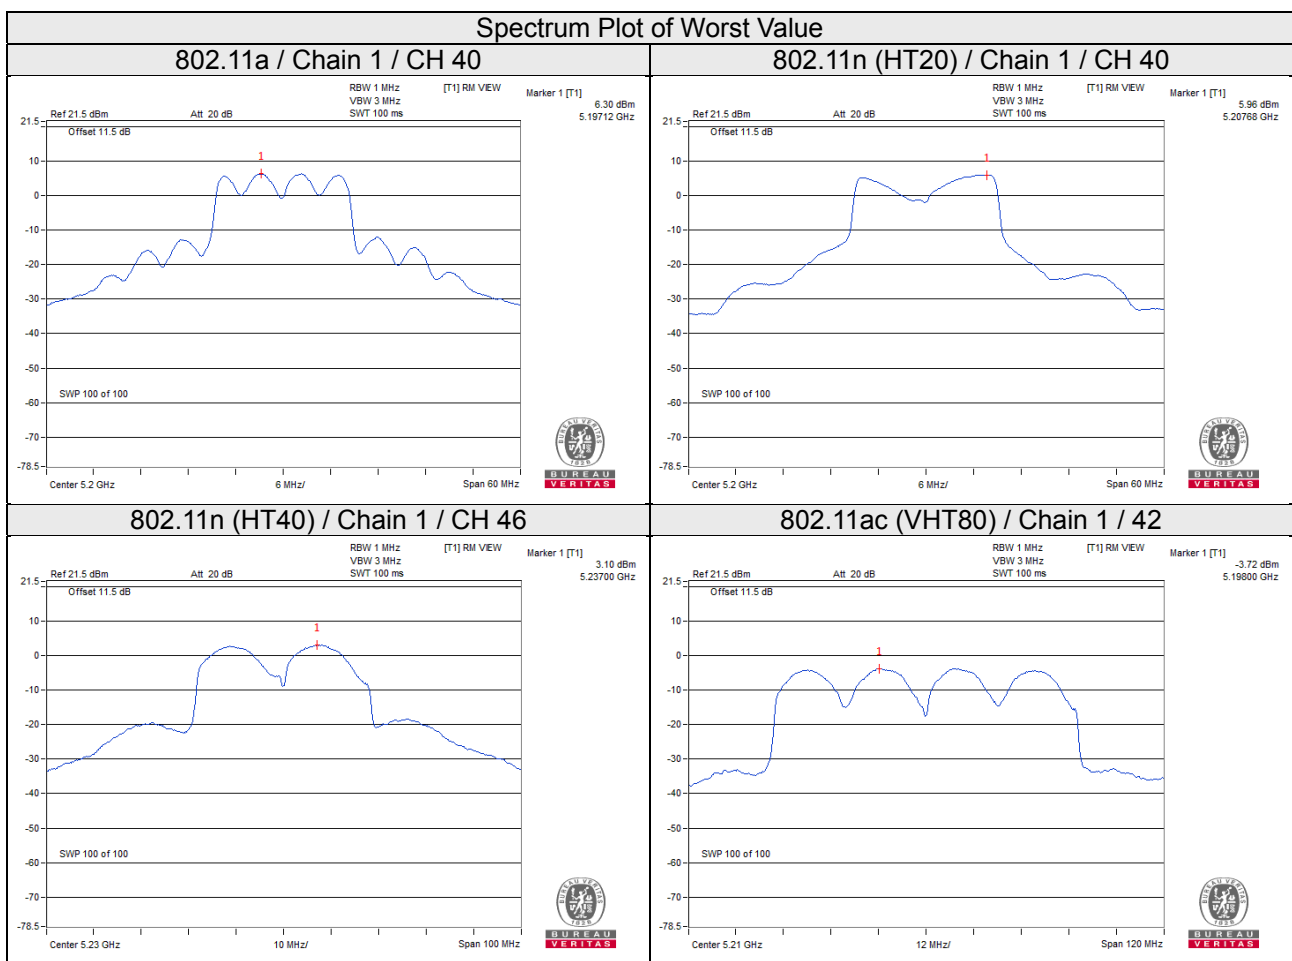

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-1.58	0.64	3.01	0.17	3.82	27.49	Pass
	157	5785	-1.56	0.66	3.01	0.17	3.84	27.49	Pass
	165	5825	-2.10	0.12	3.01	0.17	3.30	27.49	Pass
1	149	5745	-1.15	1.07	3.01	0.17	4.25	27.49	Pass
	157	5785	-1.08	1.14	3.01	0.17	4.32	27.49	Pass
	165	5825	-2.23	-0.01	3.01	0.17	3.17	27.49	Pass

Note:

1. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
2. Method 3 of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{\text{ANT}})$ dB.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=2) dB	Total PSD (dBm/500 kHz)	Limit (dBm/500 kHz)	Pass / Fail
0	149	5745	-1.00	1.22	3.01	4.23	27.49	Pass
	157	5785	-1.41	0.81	3.01	3.82	27.49	Pass
	165	5825	-1.85	0.37	3.01	3.38	27.49	Pass
1	149	5745	-0.45	1.77	3.01	4.78	27.49	Pass
	157	5785	-0.05	2.17	3.01	5.18	27.49	Pass
	165	5825	-1.18	1.04	3.01	4.05	27.49	Pass

Note:

1. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
2. Method 3 of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{\text{ANT}})$ dB.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	151	5755	-4.35	-2.13	3.01	0.16	1.04	27.49	Pass
	159	5795	-4.44	-2.22	3.01	0.16	0.95	27.49	Pass
1	151	5755	-3.10	-0.88	3.01	0.16	2.29	27.49	Pass
	159	5795	-3.12	-0.90	3.01	0.16	2.27	27.49	Pass

Note:

1. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
2. Method 3 of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{\text{ANT}})$ dB.
2. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-9.29	-7.07	3.01	0.34	-3.72	27.49	Pass
1	155	5775	-9.56	-7.34	3.01	0.34	-3.99	27.49	Pass

Note:


1. Directional gain = $5.5\text{dBi} + 10\log(2) = 8.51\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.51 - 6) = 27.49\text{dBm}$.
2. Method 3 of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{\text{ANT}})$ dB.
2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a

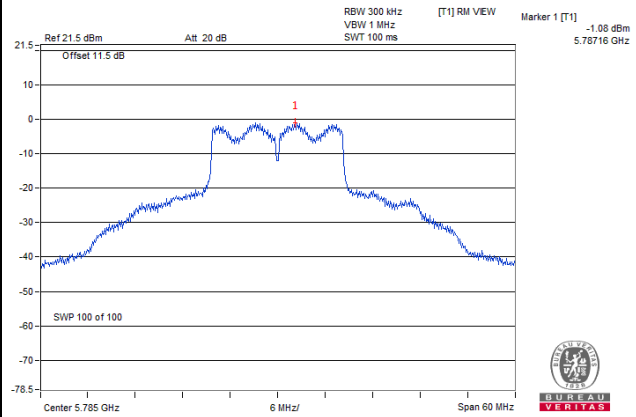


802.11n (HT20)

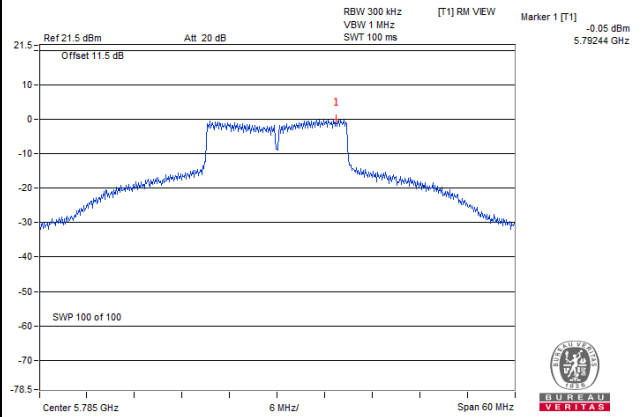

802.11n (HT40)

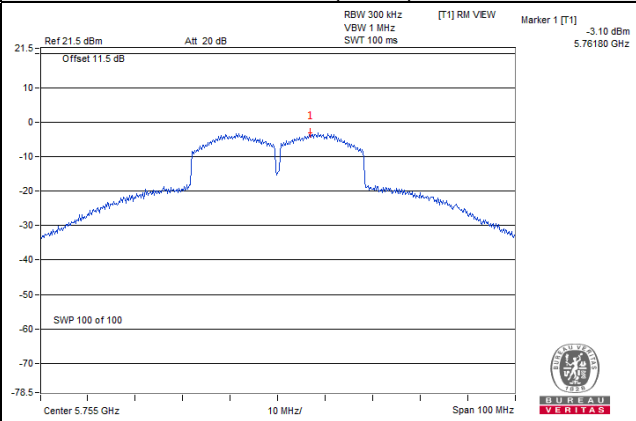

802.11ac (VHT80)

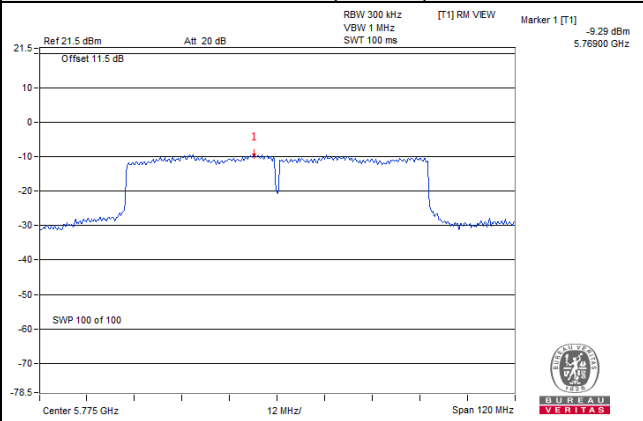


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

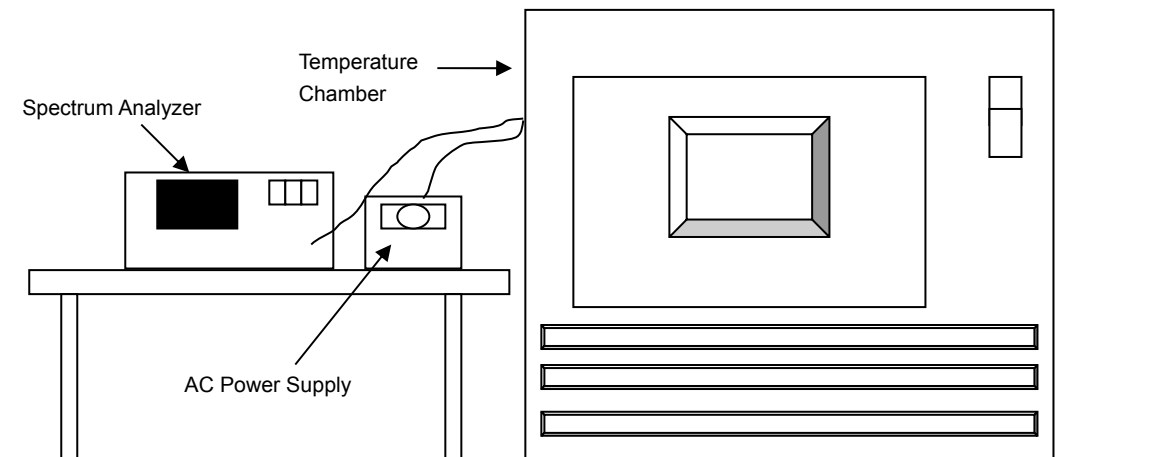

4.6.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 11, 2018	Jun. 10, 2019
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 04, 2018	Jun. 03, 2019
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019
AC Power Supply Extech	CFW-105	E000603	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
40	120	5179.9786	Pass	5179.9795	Pass	5179.9819	Pass	5179.9787	Pass
30	120	5180.0055	Pass	5180.0053	Pass	5180.0054	Pass	5180.0061	Pass
20	120	5180.0189	Pass	5180.019	Pass	5180.0206	Pass	5180.021	Pass
10	120	5179.9867	Pass	5179.9873	Pass	5179.986	Pass	5179.9859	Pass
0	120	5180.0132	Pass	5180.012	Pass	5180.0131	Pass	5180.0157	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5180.0198	Pass	5180.0192	Pass	5180.0209	Pass	5180.0202	Pass
	120	5180.0189	Pass	5180.019	Pass	5180.0206	Pass	5180.021	Pass
	102	5180.0182	Pass	5180.0192	Pass	5180.0212	Pass	5180.021	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.37	16.38	0.5	Pass
157	5785	15.81	16.38	0.5	Pass
165	5825	15.96	16.38	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.62	17.69	0.5	Pass
157	5785	17.64	17.70	0.5	Pass
165	5825	16.95	17.65	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.45	35.19	0.5	Pass
159	5795	33.89	35.22	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.24	75.59	0.5	Pass

Spectrum Plot of Worst Value


802.11a

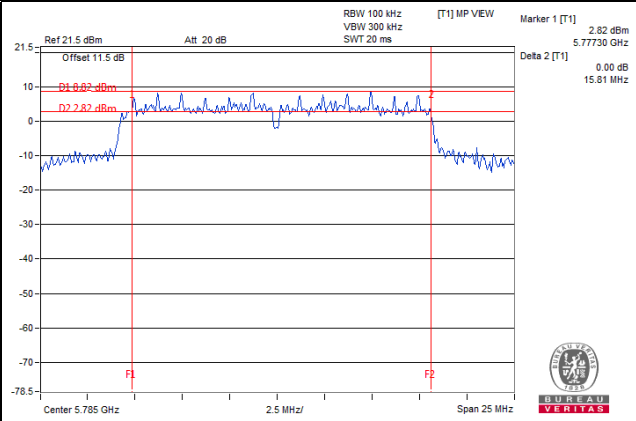


802.11n (HT20)

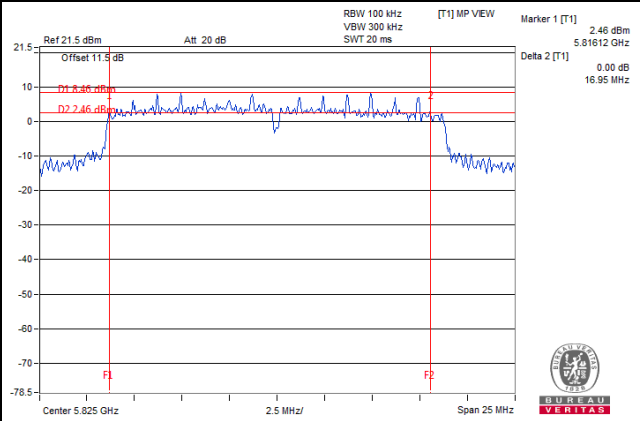

802.11n (HT40)

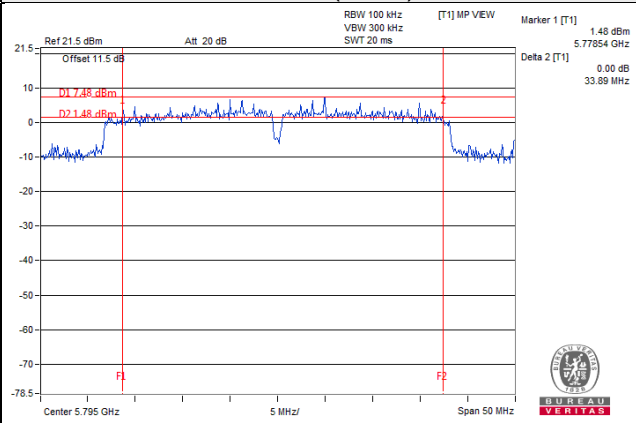

802.11ac (VHT80)

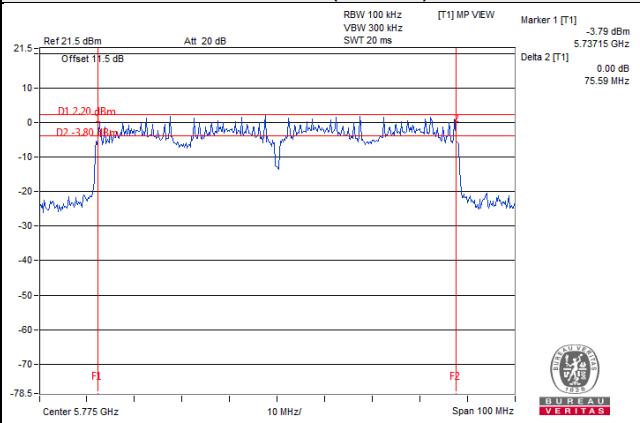


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

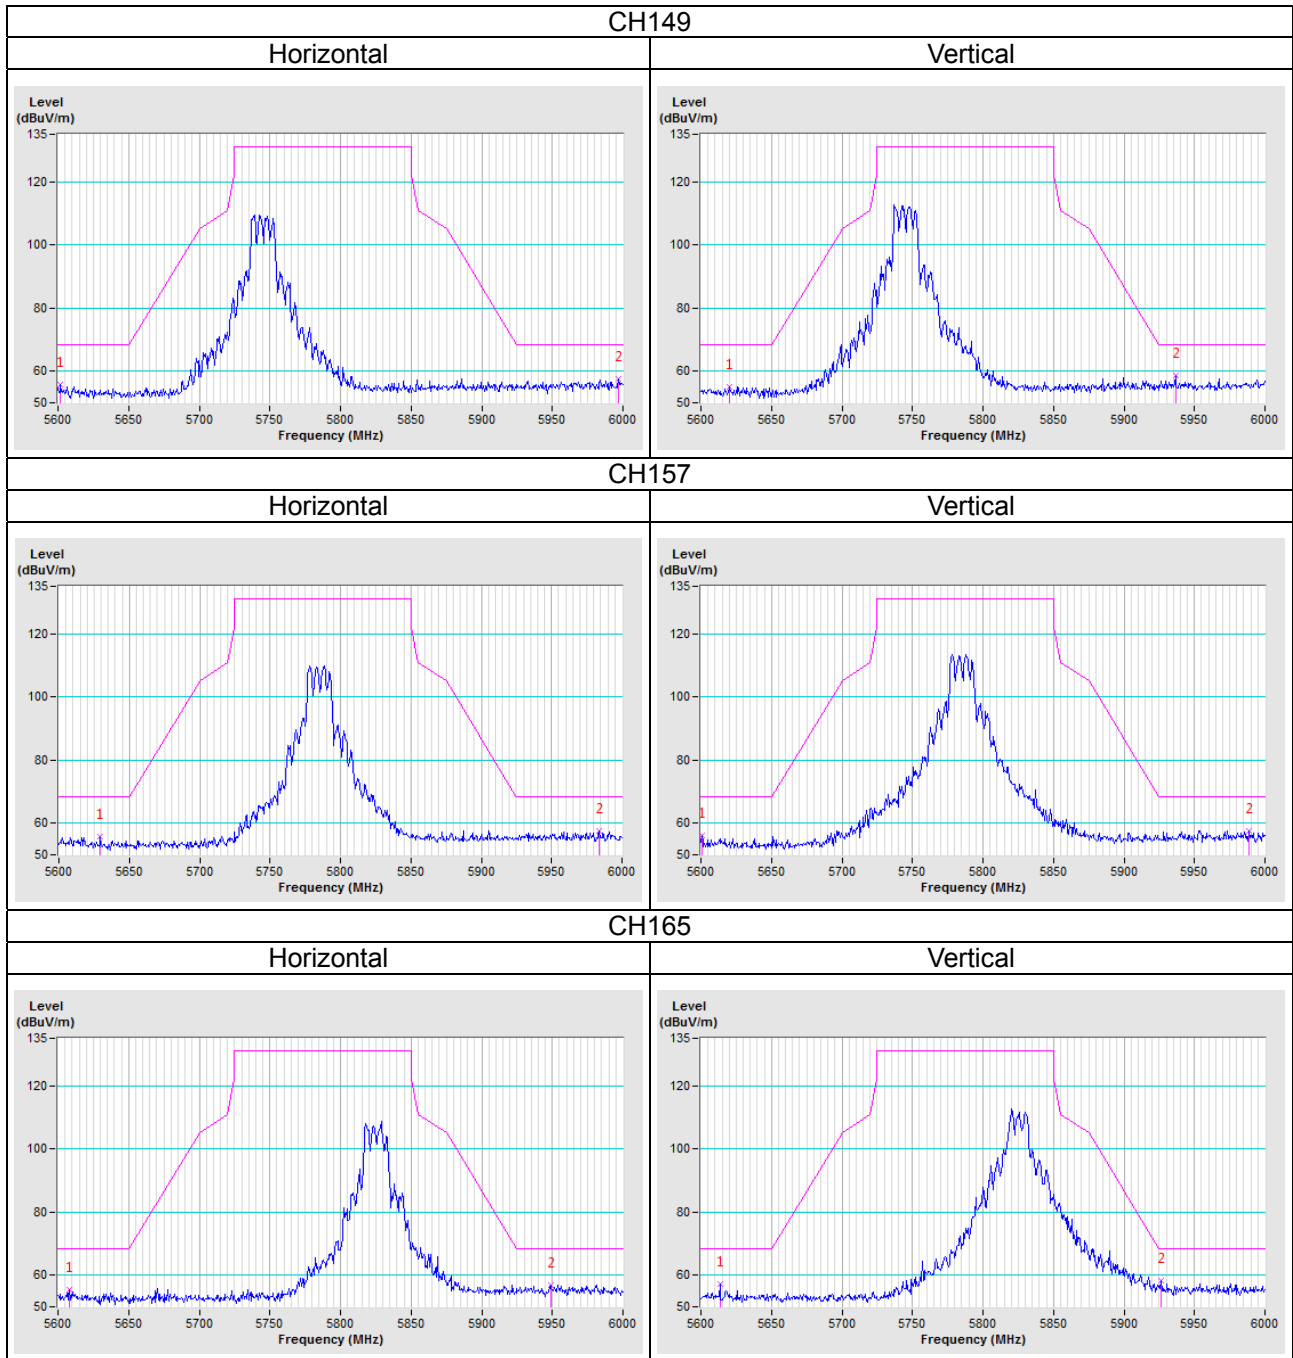


802.11n (HT20)

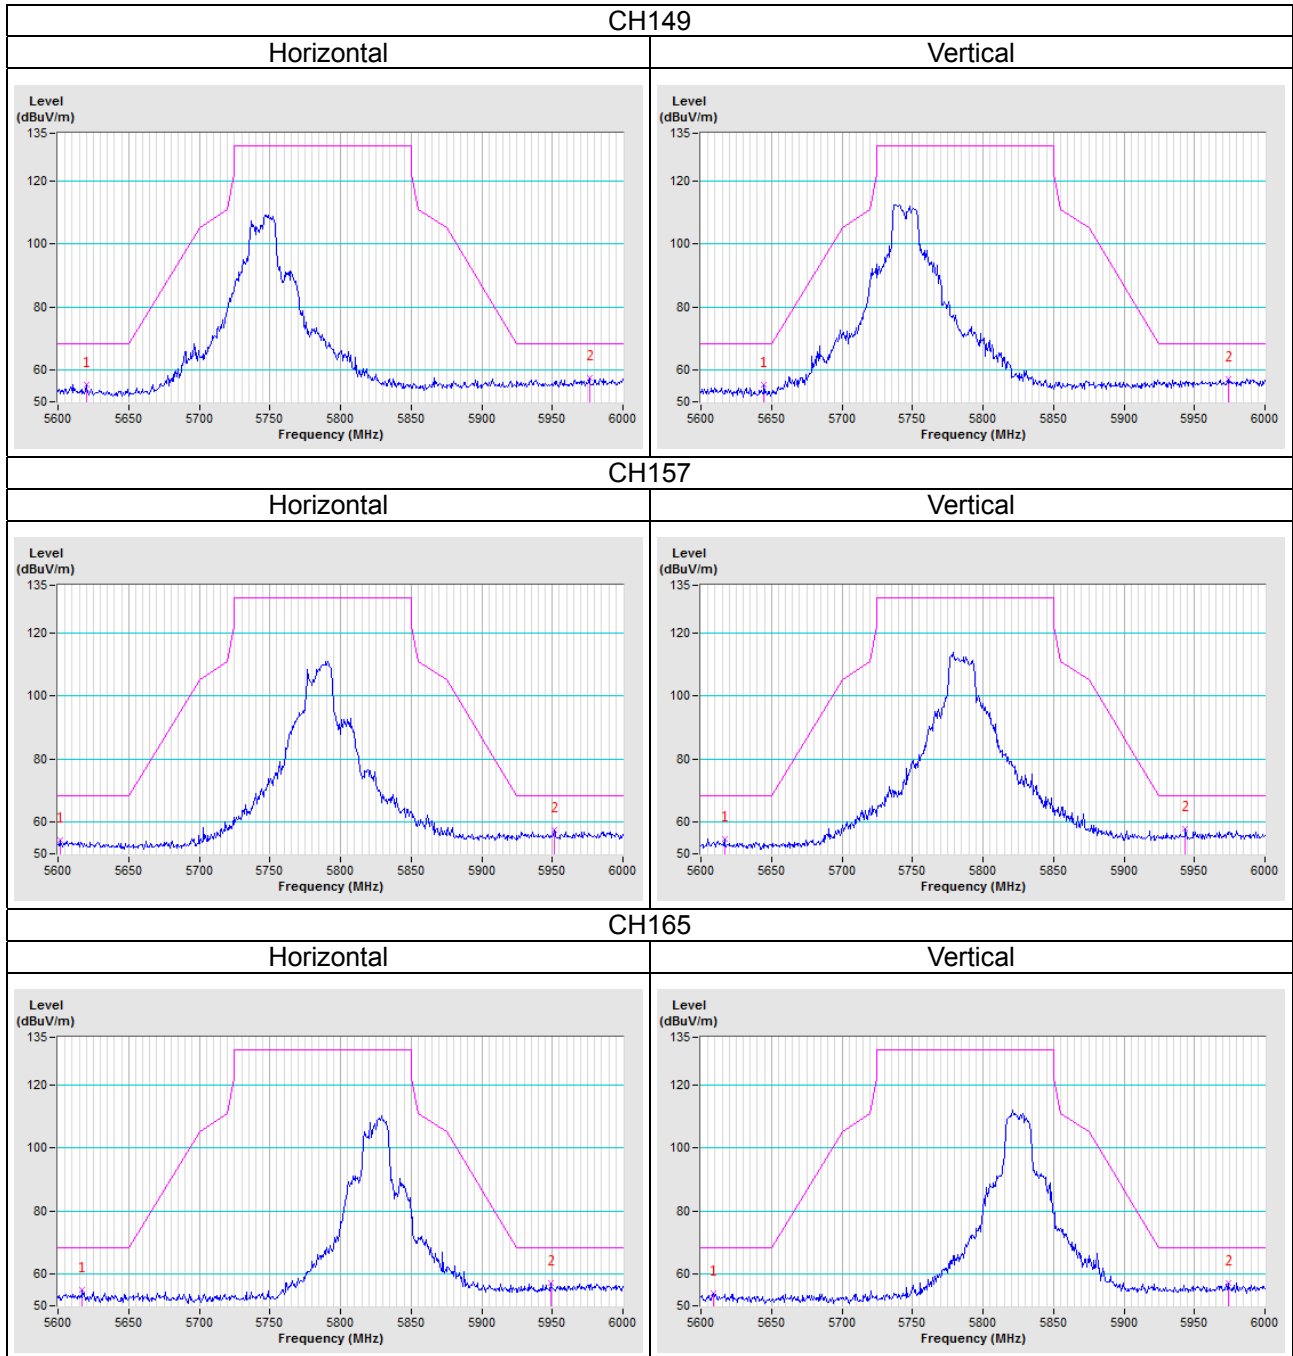

802.11n (HT40)

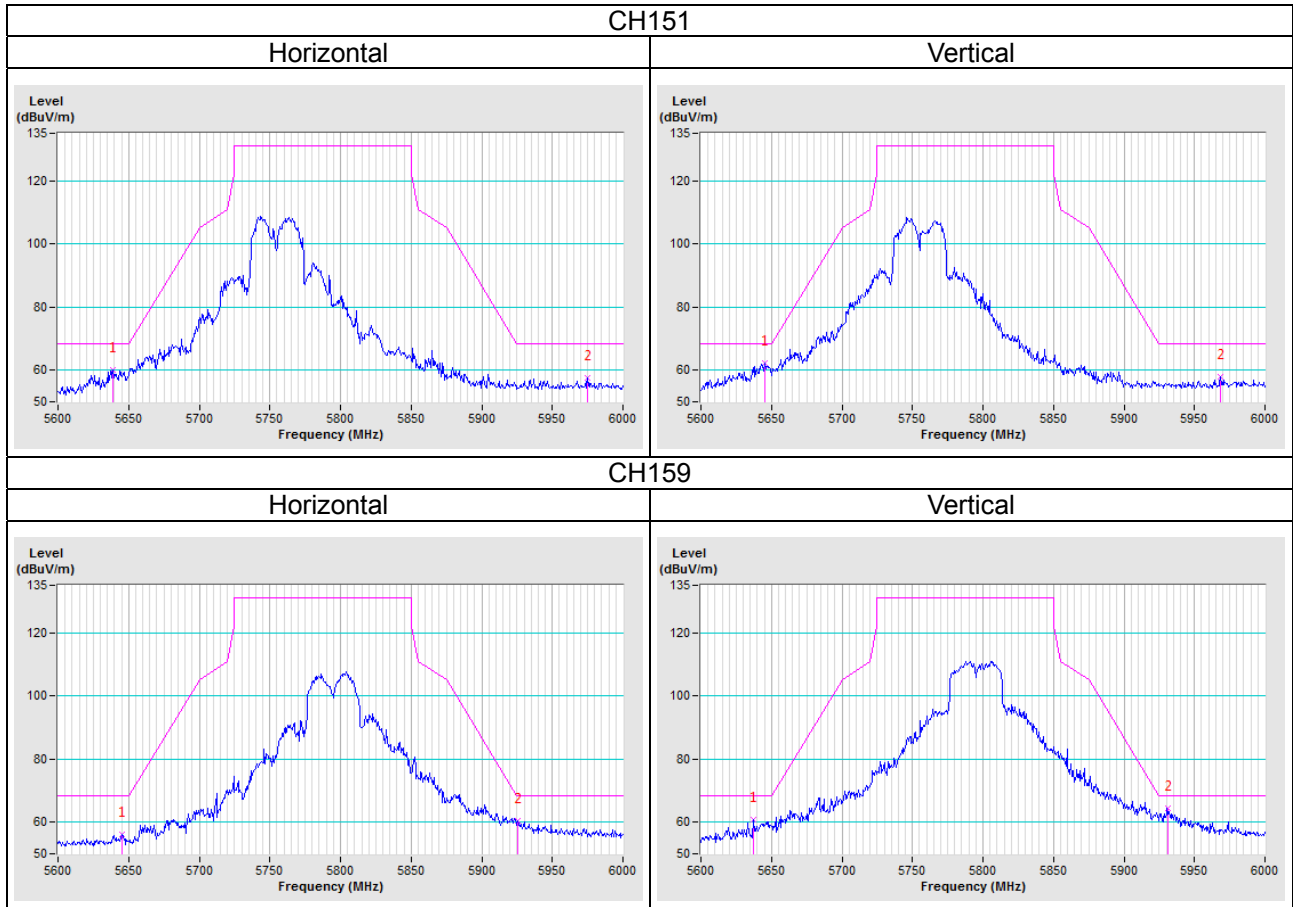

802.11ac (VHT80)

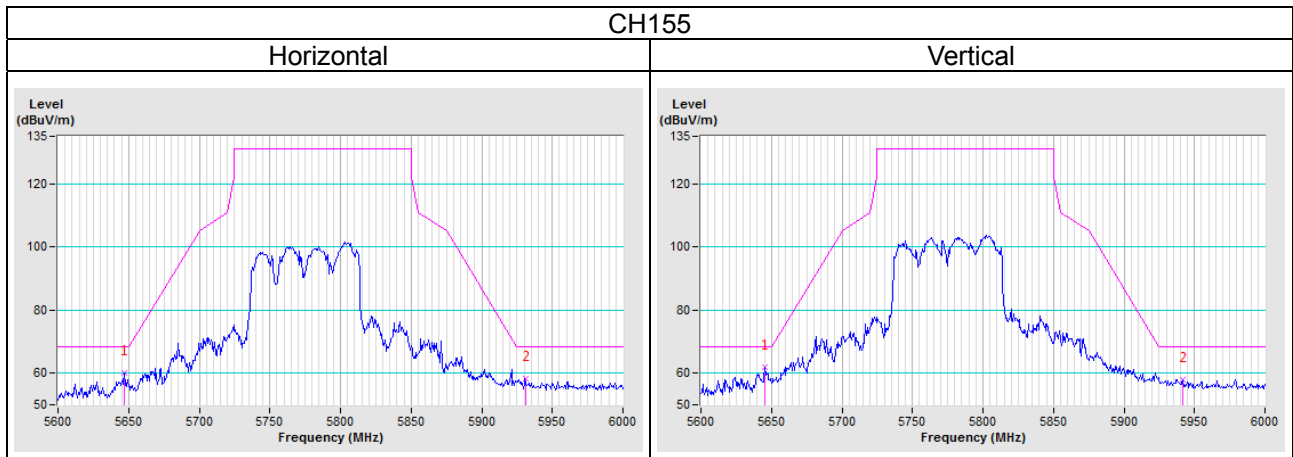

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---